





## BOOK 5465

T.20 N., R. 25 E., Gila and Salt River Meridian, Arizona

## CHAINS

The following field notes describe the dependent resurvey the Fifth Standard Parallel North (north boundary) through a portion of Range 25 East, portions of the east and west boundaries and a portion of the subdivisional lines, the subdivision of section 28, and a metes-and-bounds survey in Township 20 North, Range 25 East, Gila and Salt River Meridian, Arizona.

The Fifth Standard Parallel North (north boundary), East, West and South boundaries were surveyed by Frank Follman in 1882. The subdivisional lines were surveyed by Frank Follman in 1883. A portion of the West boundary and a portion of the subdivisional lines were dependently resurveyed by Benjamin J. Kinsey in 1938, to identify the Petrified Forest National Monument (PFNM). Ty White dependently resurveyed a portion of the Fifth Standard Parallel North (north boundary), in 1947. The south boundary was dependently resurveyed by Kenneth W. Bays and Stephen J. Malloy in 1987. A portion of the east boundary was dependently resurveyed by Kenneth W. Bays in 1987. The fifth Standard Parallel North through Range 26 was dependently resurveyed by Stephen J. Malloy, Gary D. Johnson and Darren R. Breckenridge in 1988-92.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions dated January 12, 1987, for Group No. 686, Arizona.

Preliminary to the resurvey, the lines of the original survey were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The directions of all lines were determined using a Global Positioning System, by static differential field method. Distances were computed using the vectors resolved from the geodetic positions. Ashtech M series geodetic units were used to collect geodetic positions and final output positions were produced through GPPS, PRISM and FILLNET software. Azimuths were checked with angular observations between observed geodetic positions and distances were verified with a Topcon GTS3B during the setting of the final corner positions.

The geographic position of the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., as determined by static differential technique, and controlled by U.S. Coast and Geodetic Survey triangulation stations "DEAD 1936" and "AA1 1959" were used as control stations. The elevation and coordinates refer to the top of the monument.

## BOOK 5465

T.20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS									
	<table border="0"> <tr> <td>Elevation</td> <td>Latitude</td> <td>Longitude</td> <td>Datum</td> </tr> <tr> <td>5685.69 ft.</td> <td>35°04'57.507" N.</td> <td>109°38'46.627" W.</td> <td>NAD27</td> </tr> </table>	Elevation	Latitude	Longitude	Datum	5685.69 ft.	35°04'57.507" N.	109°38'46.627" W.	NAD27
Elevation	Latitude	Longitude	Datum						
5685.69 ft.	35°04'57.507" N.	109°38'46.627" W.	NAD27						
	<p>The mean magnetic declination, as taken from quadrangle map Pinta, Az., ARIZ., published in 1972 by U.S. Geological Survey, is 13½° E.</p>								
	<p>Dependent Resurvey of the Fifth Stan. Par. North (North Edy.) Through a Portion of Range 25 East, Gila and Salt River Meridian, Arizona</p>								
	<p>Restoring the survey executed by Ty White in 1947.</p>								
	<p>Beginning at the stan. cor. of Tps. 21 N., Rs. 25 and 26 E., monumented with an iron post, 3 ins. diam., firmly set, projecting 8 ins. above the ground, with brass cap mkd. SC T21N R25E R26E S36 S31 1988 1947.</p>								
	<p>Add the marks 1993 to the brass cap.</p>								
	<p>Cor. is located SSE., 1 lk. of a cor. of fences, extending N., E., and S., and is N., 64 lks. of an abandoned fence, bears E. and W.</p>								
	<p>S. 89°45' W., on the S. bdy. of sec. 36, T. 21 N., R. 25 E.</p>								
	<p>Descend over gentle rolling land, through scattered juniper.</p>								
19.24	<p>Point for the 1/4 sec. cor. of sec. 1 only, T. 20 N., R. 25 E., hereinafter described.</p>								
20.65	<p>Trailroad, bears NE. and SW.</p>								
30.00	<p>Point for a witness point on the S. bdy. of sec. 36, T. 21 N., R. 25 E.</p>								
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p>								
	<p style="text-align: center;">           WF            T21N R25E            S36            —            S 1            T20N            1993         </p>								

## BOOK 5465

Dependent Resurvey of the Fifth Stan. Par. North (North Bdy.)  
Through a Portion of Range 25 East, Gila and Salt River Meridian, Arizona

CHAINS	
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
	Set a steel fence post near the cor.
	Cor. is located N., 45 lks. of a 5 strand barbed wire fence, bears E. and W.
30.45	Edge of mesa, bears NE. and SW., and descend over broken rugged terrain.
39.31	The witness corner for the stan. 1/4 sec. cor. of sec. 36, monumented with an iron post, 1 in. diam., firmly set, projecting 8 ins. above the ground, with brass cap mkd. SC WC 1/4 S36 1947.
	Add the marks T21N R25E T20N 1993 to the brass cap.
	A mound of stone 2 ft. base, 1/4 ft. high, is N. of cor.
	Cor. is located N., 40 lks. of fence, bears E. and W., in scattered junipers.
	_____
	S. 89°53' W., beginning new measurement.
	Descend over severally broken and rugged terrain.
0.19	Large gulch, 6 ft. deep, 15 lks. wide, drains W.
0.50	True point for the stan. 1/4 sec. cor. of sec. 36, T. 21 N. R. 25 E., at proportionate dist.; falls in a gulch 15 lks. wide, course WSW., impracticable to establish a permanent monument.
2.65	Top of small hill, begin Bad Lands at the foot of mesa.
6.50	Wash, drains SW.
7.20	Top of spur, bears NE. and SW.
16.50	Wash, drains SW.
17.70	Top of hill.
18.70	Toe of hill.
19.35	Top of spur, bears NE. and SW.
19.50	Small drainage, drain SW.
19.61	Point for the closing cor. of secs. 1 and 2, T. 20 N., R. 25 E., hereinafter described.

## BOOK 5465

Dependent Resurvey of the Fifth Stan. Par. North (North Bdy.)  
Through a Portion of Range 25 East, Gila and Salt River Meridian, Arizona

CHAINS	
19.95	Top of small hill.
23.75	Toe of hill.
24.95	Top of spur, bears NE. and SW.
25.30	Toe of spur.
25.65	Top of small clay hill.
26.50	Toe of small clay hill, enter Dead River valley.
40.42	<p>The stan. cor. of secs. 35 and 36, monumented with an iron post, 2 ins. diam., firmly set, projecting 11 ins. above the ground, with brass cap mkd. SC T21N R25E S35 S36 1947.</p> <p>Add the marks 1993 to the brass cap.</p> <p>A mound of stone 2 1/2 ft. base, 2 ft. high is N. of cor.</p> <p>Cor. is located N., 32 lks. of a fence, bears E. and W.</p> <hr/> <p>S. 89°50' W., on the S. bdy. of sec. 35., T. 21 N., R. 25 E., Over level valley land.</p>
19.04	Point for the 1/4 sec. cor. of sec. 2 only, T. 20 N., R. 25 E., hereinafter described.
39.87	<p>The stan. 1/4 sec. cor. of sec. 35, monumented with an iron post, 1 in. diam., firmly set, projecting 9 ins. above the ground, with brass cap mkd. SC 1/4 S35 1947.</p> <p>Add the marks T21N R25E 1993 to the brass cap.</p> <p>Cor. is located N., 1.3 lk. of a fence, bears E. and W.</p> <hr/> <p>S. 89°48' W., beginning new measurement.</p>
16.95	Trailroad, bears N. and S.
19.02	Point for the closing cor. of secs. 2 and 3, T. 20 N., R. 25 E., hereinafter described.
39.86	<p>The stan. cor. of secs. 34 and 35, T. 21 N., R. 25 E., monumented with an iron post, 2 ins. diam., firmly set, projecting 11 ins. above the ground, with brass cap mkd. SC T21N R25E S34 S35 1947.</p> <p>Add the marks 1993 to the brass cap.</p>

## BOOK 5465

Dependent Resurvey of the Fifth Stan. Par. North (North Bdy.)  
Through a Portion of Range 25 East, Gila and Salt River Meridian, Arizona

CHAINS	
	Cor. is located N., 34 lks. of a fence, bears E. and W.
	S. 89°49' W., on the S. bdy. of sec. 34, T. 21 N., R. 25 E.
27.70	Point for the 1/4 sec. cor. of sec. 3 only, T. 20 N., R. 25 E., hereinafter described.
39.85	The stan. 1/4 sec. cor. of sec. 34, monumented with an iron post, 2 in. diam., firmly set, projecting 12 ins. above the ground, with brass cap mkd. SC 1/4 S34 1947.
	Add the marks T21N R25E 1993 to the brass cap.
	Cor. is located S., 34 lks. of a fence, bears E. and W.
	S. 89°47' W., beginning new measurement.
	Over level grass land.
36.39	Point for the closing cor. of secs. 3 and 4, hereinafter described.
39.85	The stan. cor. of secs. 33 and 34, T. 21 N., R. 25 E., monumented with an iron post, 2 ins. diam., firmly set, projecting 12 ins. above the ground, with brass cap mkd. SC T21N R25E S33 S34 T20N S4 PFNM 1882 1938.
	Add the marks 1993 to the brass cap.
	Cor. is located in a 4 strand barbed wire fence, bears E. and W., and is S., 65 lks. of an old fence, bears E. and W., and is N., 23 lks. of a bladed dirt road, 15 lks. wide, bears E. and W.
	<p style="text-align: center;">Dependent Resurvey of a Portion of the East Boundary, T. 20 N., R. 25 E., Gila Salt River Meridian, Arizona</p>
	<p style="text-align: center;">Restoring the survey executed by Frank Follman, U.S. Deputy Surveyor, in 1882</p>
	From the 1/4 sec. cor. of secs. 25 and 30, on the E. bdy. of the Tp., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above the ground, with brass cap mkd. T20N 1/4 R25E R26E S25 S30 1987.
	Add the marks 1993 to the brass cap.

## BOOK 5465

Dependent Resurvey of a Portion of the East Boundary,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS											
39.56	<p>Cor. is located E., 6 lks. of a 4 strand barbed wire fence, bears N. and S., and is S., 14 lks. of a wash, 15 lks. wide, 2 ft. deep, drains W.</p> <p>N. 0°04' W., bet. secs. 25 and 30.</p> <p>Ascend over rolling grass land.</p> <p>The cor. of secs. 19, 24, 25 and 30, monumented by person(s) unknown with an open end iron pipe, 22 1/2 ins. long, 1/2 in. diam., firmly set, 13 ins. in the ground. This position has long been recognized by land owners and utilized by local land surveyors as the corner and is accepted as the best evidence of the original cor.</p> <p>At the cor point.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in ground, with brass cap mkd.</p> <table border="1" data-bbox="842 936 1024 1127"> <tr> <td colspan="2" style="text-align: center;">T20N</td> </tr> <tr> <td style="text-align: center;">R25E</td> <td style="text-align: center;">R26E</td> </tr> <tr> <td style="text-align: center;">S24</td> <td style="text-align: center;">S19</td> </tr> <tr> <td style="text-align: center;">S25</td> <td style="text-align: center;">S30</td> </tr> <tr> <td colspan="2" style="text-align: center;">1993</td> </tr> </table> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the iron pipe alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located W., 3 lks. of a 4 strand barbed wire fence, bears N. and S., and is in the projection of a line of steel fence posts extending E.</p>	T20N		R25E	R26E	S24	S19	S25	S30	1993	
T20N											
R25E	R26E										
S24	S19										
S25	S30										
1993											
10.87	<p>N. 0°10' E., bet. secs. 19 and 24.</p> <p>Ascend over rolling grass land.</p> <p>Point for a witness point on line bet. secs. 19 and 24.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>										

## BOOK 5465

Dependent Resurvey of a Portion of the East Boundary,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	WP T20N R25E   R26E S24   S19 1993
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.  Set a steel fence post near the cor.  Cor. is located W., 10 lks. of a 4 strand barbed wire fence, bears N. and S.
32.20	Abandoned fence, bears E. and W.
32.63	A 4 strand barbed wire fence, bears ENE. and WSW.
33.00	Center of Old Highway No. 66, 32 lks. wide, bears ENE. and WSW.
33.70	Ridge line, bears ENE. and WSW.
39.93	Point for the 1/4 sec. cor. of secs. 19 and 24, at proportionate dist.; there is no remaining evidence of the original cor.  Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.
	T20N 1/4 R25E   R26E S24   S19 1993
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.  Set steel fence post near the cor.  Cor. is located W., 12 lks. of a 4 strand barbed wire fence, bears N. and S., and is W., 77 lks. of the center of a bladed dirt road, 30 lks. wide, bears SSE. curving easterly, and NNW. curving northerly, and is S., 45 lks. of the projection of the intersection of an old fence extending easterly from the east side of the dirt road.  Ascend over rolling grass land.
79.86	Point for the cor. of secs. 13, 18, 19 and 24, at proportionate dist.; there is no remaining evidence of the original cor.

## BOOK 5465

Dependent Resurvey of a Portion of the East Boundary,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS													
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <table border="1" data-bbox="839 400 1025 587"> <tr><td colspan="2" style="text-align:center">T20M</td></tr> <tr><td style="text-align:center">R25E</td><td style="text-align:center">R26E</td></tr> <tr><td style="text-align:center">S13</td><td style="text-align:center">S18</td></tr> <tr><td colspan="2" style="text-align:center">-----</td></tr> <tr><td style="text-align:center">S24</td><td style="text-align:center">S19</td></tr> <tr><td colspan="2" style="text-align:center">1993</td></tr> </table> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located W., 9 lks. of a fence bears, N. and S., and is W., 32 lks. of the center of a bladed dirt road, 30 lks. wide, bears N. and S., and is N., 50 lks. of the projection of the intersection of fence extending E. from the E. side of the road.</p>	T20M		R25E	R26E	S13	S18	-----		S24	S19	1993	
T20M													
R25E	R26E												
S13	S18												
-----													
S24	S19												
1993													
	<p>N. 0°10' E., bet. secs. 13 and 18.</p> <p>Ascend over rolling grass land.</p>												
1.10	Low ridge, bears ENE. and WSW.												
14.50	Ridge, bears ENE. and WSW.												
39.93	<p>Point for the 1/4 sec. cor. of secs. 13 and 18, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <table border="1" data-bbox="839 1421 1025 1576"> <tr><td colspan="2" style="text-align:center">T20M</td></tr> <tr><td colspan="2" style="text-align:center">1/4</td></tr> <tr><td style="text-align:center">R25E</td><td style="text-align:center">R26E</td></tr> <tr><td style="text-align:center">S13</td><td style="text-align:center">S18</td></tr> <tr><td colspan="2" style="text-align:center">1993</td></tr> </table> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located W., 5 lks. of a 4 strand barbed wire fence, bears N. and S. and is W., 25 lks. of the center of bladed dirt road, 30 lks. wide, bears N. and S.</p> <p>Ascend over rolling grass land.</p>	T20M		1/4		R25E	R26E	S13	S18	1993			
T20M													
1/4													
R25E	R26E												
S13	S18												
1993													

## BOOK 5465

Dependent Resurvey of a Portion of the East Boundary,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS											
79.86	<p>Point for the cor. of secs. 7, 12, 13 and 18, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <table border="1" data-bbox="839 495 1025 683"> <tr> <td colspan="2" data-bbox="898 495 966 519">T20N</td> </tr> <tr> <td data-bbox="839 527 926 553">R25E</td> <td data-bbox="951 527 1025 553">R26E</td> </tr> <tr> <td data-bbox="855 559 910 585">S12</td> <td data-bbox="951 559 1006 585">S 7</td> </tr> <tr> <td data-bbox="855 623 910 649">S13</td> <td data-bbox="951 623 1006 649">S18</td> </tr> <tr> <td colspan="2" data-bbox="898 655 966 678">1993</td> </tr> </table> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located W., 2 lks. of a 4 strand barbed wire fence, bears N. and S., and is N., 12 lks. of the projection of the center of bladed dirt road, 30 lks. wide, bears E. and W., and is W., 64 lks. of a track road, 20 lks. wide, bears N. and S.</p>	T20N		R25E	R26E	S12	S 7	S13	S18	1993	
T20N											
R25E	R26E										
S12	S 7										
S13	S18										
1993											
7.35	<p>N. 0°10' E., bet secs. 7 and 12.</p> <p>Ascend over rolling grass land.</p>										
39.93	<p>Ridge, bears ENE. and WSW., enter scattered junipers.</p> <p>The 1/4 sec. cor. of secs. 7 and 12, monumented by Lacy Greer, L.S. 5704, with an iron pipe, 24 ins. long, 1 1/2 ins. diam., firmly set, 18 ins. in the ground. This position has long been recognized by land owners and utilized by local land surveyors as the corner and is accepted as the best evidence of the original cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <table border="1" data-bbox="839 1644 1025 1800"> <tr> <td colspan="2" data-bbox="898 1644 966 1668">T20N</td> </tr> <tr> <td colspan="2" data-bbox="898 1674 966 1698">1/4</td> </tr> <tr> <td data-bbox="839 1706 926 1732">R25E</td> <td data-bbox="951 1706 1025 1732">R26E</td> </tr> <tr> <td data-bbox="855 1738 910 1764">S12</td> <td data-bbox="951 1738 1006 1764">S 7</td> </tr> <tr> <td colspan="2" data-bbox="898 1770 966 1793">1993</td> </tr> </table> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>	T20N		1/4		R25E	R26E	S12	S 7	1993	
T20N											
1/4											
R25E	R26E										
S12	S 7										
1993											

## BOOK 5465

Dependent Resurvey of a Portion of the East Boundary,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS													
	<p>Bury the iron pipe alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located E., 1 lk. of a 4 strand barbed wire fence, bears N. and S., and is E., 18 lks. of the center of a track road, 20 lks. wide, bears N. and S.</p> <hr/> <p>N. 0°07' E., beginning new measurement.</p> <p>Ascend over rolling hills through scattered junipers.</p>												
40.00	<p>The cor. of secs. 1, 6, 7 and 12, perpetuated by Lacy Greer, L.S. 5704 in 1971, monumented with an iron pipe, 29 ins. long, 1 1/2 ins. diam., firmly set, 25 ins. in the ground, with the brass plug mkd. LS5704 T20N S1 S6 S12 S7 R25E R26E 1971. This position is accepted as a careful and faithful perpetuation of the original cor.</p> <p>At the cor. point.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd.</p> <table border="1" data-bbox="839 1098 1025 1289"> <tr> <td colspan="2" data-bbox="897 1098 968 1119">T20N</td> </tr> <tr> <td data-bbox="839 1129 926 1151">R25E</td> <td data-bbox="951 1129 1025 1151">R26E</td> </tr> <tr> <td data-bbox="855 1161 910 1183">S 1</td> <td data-bbox="951 1161 1006 1183">S 6</td> </tr> <tr> <td colspan="2" data-bbox="855 1204 1006 1225"><hr/></td> </tr> <tr> <td data-bbox="855 1225 910 1247">S12</td> <td data-bbox="951 1225 1006 1247">S 7</td> </tr> <tr> <td colspan="2" data-bbox="897 1257 968 1278">1993</td> </tr> </table> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the iron pipe alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located in a 4 strand barbed wire fence, bears N. and S., and is E., 14 lks. of the center of a track road 20 lks. wide, bears N. and S.</p> <hr/> <p>N. 0°01' E., bet. secs. 1 and 6.</p> <p>Ascend through scattered junipers.</p>	T20N		R25E	R26E	S 1	S 6	<hr/>		S12	S 7	1993	
T20N													
R25E	R26E												
S 1	S 6												
<hr/>													
S12	S 7												
1993													
3.50	<p>Ridge, bears NE. and SW.</p>												

## BOOK 5465

Dependent Resurvey of a Portion of the East Boundary,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.75	<p>Point for the 1/4 sec. cor. of secs. 1 and 6, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T20M 1/4 R25E   R26E S 1   S 6 1993</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor is located W., 7 lks. of a 4 strand barbed wire fence, bears N. and S., and is E., 8 lks. of a track road, 20 lks. wide, bears N. and S.</p>
48.30	Ridge, bears NE. and SW.
81.22	<p>The closing cor. of secs. 1 and 6, monumented by person(s) unknown with an iron pipe, 30 ins. long, 2 ins. diam., firmly set, 18 ins. in the ground. This position has long been recognized by land owners and utilized by local land surveyors as the corner and is accepted as the best evidence of the original cor.</p> <p>Add the marks AM to the iron pipe.</p> <p>Bury iron pipe in place, 36 ins. in the ground.</p>
81.95	Cor. of fences bears, E., 10 lks. dist., fences extending E., S. and W.
82.01	<p>Point for the closing cor. of secs. 1 and 6, at intersection with the Fifth Stan. Par. N.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>

## BOOK 5465

Dependent Resurvey of a Portion of the East Boundary,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS

T21N R26E  
S31  
-----  
S 1 | S 6  
R25E R26E  
T20N  
CC  
1993

from which

A juniper, 21 ins. diam., bears N. 29 1/2° E., 36 1/2 lks.  
dist., mkd., T21N R26E S31 BT.

A juniper, 10 ins. diam., bears S. 68 1/4° E., 58 1/2 lks.  
dist., mkd. T20N R26E S6 BT.

A juniper, 13 ins. diam., bears S. 77° W., 148 lks.  
dist., mkd. T20N R25E S1 BT.

Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic  
case beneath the stainless steel post.

Set a steel fence post near the cor.

From this cor. point, the stan. cor. of Tps. 21 N., Rgs. 25 and  
26 E., hereinbefore described, bears S. 89°47' W., 20.44 chs.  
dist.

Added the marks 1993 to the brass cap.

From this same cor. point, the stan. 1/4 sec. cor. of sec. 31,  
T. 21 N., R. 26 E., monumented with an iron post, 2 1/2 ins.  
diam., firmly set, projecting 6 ins. above the ground, with brass  
cap mkd. SC T21N R26E 1/4 S31 1988, bears N. 89°47' E.,  
19.40 chs. dist.

Add the marks 1993 to the brass cap.

Cor. is located N., 7.5 lks. of a 5 strand barbed wire fence,  
bears E. and W.

---

Dependent Resurvey of a Portion the West Boundary,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

---

Restoring the Resurvey executed by Benjamin J. Kinsey,  
Cadastral Engineer, in 1938

---

## BOOK 5465

Dependent Resurvey of a Portion of the West Boundary,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From the cor. of Tps. 19 and 20 N., Rgs. 24 and 25 E., monumented with an iron post, 3 ins. diam., firmly set, projecting 10 ins. above the ground, with brass cap mkd. T20N PFNM R24E R25E S36 S31 S1 S6 T19N 1882 1938.</p>
	<p>Add the marks 1993 to the brass cap.</p>
	<p>Cor. is located W., 1 lk. of the intersection of 4 strand barbed wire fences extending E. and W., mesh and 2 strand barbed wire fence, extends N. and S.</p>
	<p>N. 5°07' E., bet. secs. 31 and 36.</p>
	<p>Ascend over rolling grass land.</p>
33.95	<p>Center of Old Highway. 66, 35 lks. wide, bears ENE. and WSW.</p>
41.53	<p>The 1/4 sec. cor. of secs. 31 and 36, monumented with an iron post, 1 in. diam., firmly set, projecting 8 1/2 ins. above the ground, with brass cap mkd. PFNM 1/4 S36 S31 1882 1938.</p>
	<p>Add the marks T20N R24E R25E 1993 to the brass cap.</p>
	<p>Cor. is located E., 1 lk. of a mesh and 2 strand barbed wire fence, bears N. and S., and is W., 200 lks. of a track road, bears N. and S., and is E., 18 lks. of the center of a bladed dirt road, 15 lks. wide, bears N. and S.</p>
	<p>N. 2°58' W., beginning new measurement.</p>
	<p>Over level grass land.</p>
38.65	<p>The cor. of secs. 25, 30, 31 and 36, monumented with an iron post, 1/2 in. diam., firmly set, projecting 5 ins. above the ground, with brass cap mkd. PFNM T20N R24E R25E S25 S30 S36 S31 1882 1938.</p>
	<p>Add the marks 1993 to the brass cap.</p>
	<p>Cor. is located E., 3 lks. of a mesh and 2 strand barbed wire fence, bears N. and S., and is W., 300 lks. of a track road, bears N. and S., and is E., 38 lks. of the center of a bladed dirt road, 15 lks. wide, bears N. and S.</p>
	<p>N. 0°59' E. bet. secs. 25 and 30.</p>
	<p>Ascend over rolling grass land.</p>

## BOOK 5465

Dependent Resurvey of a Portion of the West Boundary,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
42.54	<p>The 1/4 sec. cor. of secs. 25 and 30, monumented with an iron post, 1 in. diam., firmly set, projecting 10 ins. above the ground, with brass cap mkd. PFNM 1/4 S25 S30 1882 1938.</p> <p>Add the marks T20N R24E R25E 1993 to the brass cap.</p> <p>Cor. is located in a mesh and 2 strand barbed wire fence, bears N. and S., and is E., 29 lks. of the center of a bladed dirt road, 15 lks. wide, bears N. and S.</p> <hr/> <p>N. 1°01' E., beginning new measurement.</p>
37.65	<p>Wash, 10 lks. wide, 3 ft. deep, drains ESE.</p>
42.53	<p>The cor. of secs. 19, 24, 25, and 30, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd. PFNM T20N R24E R25E S24 S19 S25 S30 1882 1938.</p> <p>Add the marks 1993 to the brass cap.</p> <p>Cor. is located in a mesh and 2 strand barbed wire fence, bears N. and S., and is W., 160 lks. of a track road, bears SSE. and NNW. and is E., 30 lks. of a bladed dirt road, 15 lks. wide, bears N. and S.</p> <hr/> <p>N. 0°56' E., bet. secs. 19 and 24.</p> <p>Ascend over rolling grass land.</p>
42.48	<p>The 1/4 sec. cor. of secs. 19 and 24, monumented with an iron post, 1 in. diam., firmly set, projecting 14 ins. above the ground, with brass cap mkd. PFNM 1/4 S24 S19 1882 1938.</p> <p>Add the marks T20N R24E R25E 1993 to the brass cap.</p> <p>Cor. is located W., 1 lk. of a mesh and 2 strand barbed wire fence, bears N. and S., and is W., 23 lks. of a bladed dirt road, 15 lks. wide, bears N. and S., and is W., 15 lks. of a track road, bears N. and S.</p> <hr/> <p>N. 1°15' E., beginning new measurement.</p> <p>Ascend over rolling grass land.</p>
29.60	<p>Center of a stock pond, Rattlesnake Tank, approximately 2 acres, bears E., 8 chs. dist.</p>

## BOOK 5465

Dependent Resurvey of a Portion of the West Boundary,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
42.55	<p>The cor. of secs. 13, 18, 19 and 24, monumented with an iron post, 2 ins. diam., firmly set, projecting 18 ins. above the ground, with brass cap mkd. PFNM T20N R24E R25E S13 S18 S24 S19 1882 1938.</p> <p>Add the marks 1993 to the brass cap.</p> <p>Cor. is located W., 9 lks. of a fence, bears E. and W., and is W., 15 lks. of a bladed dirt road, 15 lks. wide, bears NE. curving easterly, and is S., 21 lks. from the same road, as it bears NE. curving southeasterly.</p> <hr/> <p>Dependent Resurvey of a Portion the Subdivisional Lines, T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona</p> <hr/> <p>Restoring the Survey Executed by Frank Follman, U.S. Deputy Surveyor, in 1883 and the resurvey executed by Benjamin J. Kinsey, Cadastral Engineer, in 1938</p> <hr/> <p>From the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of Tp., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above the ground, with brass cap mkd. T20N R25E S35 S36 S2 S1 T19N 1987.</p> <p>Add the marks 1993 to the brass cap.</p> <p>A mound of stone relocated during the construction of the fence, 3 1/2 ft. base, 3 ft. high, bears S.</p> <p>Cor. is located in a mesh and 4 strand barbed wire fence, bears E. and W.</p> <p>N. 1°12' E., bet. secs. 35 and 36.</p> <p>Ascend over nearly level land.</p>
3.25	Trailroad, 15 lks. wide, bears ESE. and WNW.
5.00	Wash, 50 lks. wide, 7 ft. deep, drains E.
40.40	<p>Point for the 1/4 sec. cor. of secs. 35 and 36, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p>

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T20N R25E 1/4 S35   S36 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on gentle southerly grass slope.</p> <p>Ascend and leave Puerco River valley.</p>
67.30	<p>Top of mesa above Puerco River valley, thence over gentle rolling grass land.</p>
80.80	<p>The cor. of secs. 25, 26, 35 and 36, monumented by person(s) unknown with an iron pipe, 31 ins. long, 2 1/2 ins. diam., firmly set, 21 ins. in the ground. This position has long been recognized by land owners and utilized by local land surveyors as the corner and is accepted as the best evidence of the original cor.</p> <p>At the cor. point.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T20N R25E S26   S25 ----- S35   S36 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the iron pipe, alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>From this cor. point, the remains of a standing telephone pole, 10 ft. long, bears E., 6 lks.</p>
	<p>From the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of Tp., monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd. T20N R25E R26E S25 S30 S36 S31 1987.</p>

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Add the marks 1993 to the brass cap.</p> <p>Cor. is located E., 55 lks. of a 4 strand barbed wire fence, bears SSE. and NNW., and is S., 200 lks. of bend in same fence, extending N. and SSE.</p> <p>N. 89°22' W., bet. secs. 25 and 36.</p> <p>Ascend and leave Puerco River valley.</p>
1.50	Wash, 55 lks. wide, 2 ft. deep, drains S.
19.00	Center of County Road No. 7380, 50 lks. wide, bears SE. and NW.
36.35	East edge of borrow pit, bears N. and S.
39.81	<p>Point for the 1/4 sec. cor. of secs. 25 and 36, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T20N R25E S25 1/4 — S36 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located in an abandoned borrow pit, on the east slope of a mesa.</p>
44.50	West edge of borrow pit.
46.90	Top of mesa over Puerco River valley, thence over gentle rolling grass land.
79.62	The cor. of secs. 25, 26, 35 and 36.
	<p>N. 0°02' W., bet. secs. 25 and 26.</p> <p>Over rolling grass land.</p>
5.18	Point for a witness point, on line bet. secs. 25 and 26, at intersection with the southerly right-of-way of Interstate Highway No. 40.

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WF T20N R25E S26   S25 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located in 5 strand barbed wire fence along the southerly right-of-way of Interstate Highway No. 40, bears N. 79°59' E. and S. 79°59' W.</p> <p>From this cor. point, an Arizona Highway Department southerly right-of-way marker of Interstate No. 40, monumented with a brass disk 3 1/2 ins. diam., firmly set in a circular collar of concrete 6 ins. diam., flush with the ground, mkd. RP WB 206.00 SURVEY LINE EL 5675.13 1962, bears N. 79°59' E., 10.77 chs. dist.</p> <p>From this same cor. point, an Arizona Highway Department southerly right-of-way marker of Interstate No. 40, monumented with a brass disk 3 1/2 ins. diam., firmly set in a circular collar of concrete 6 ins. diam., projecting 1/2 ins. above the ground, mkd. EL 5666.02 206.00 RP WB SURVEY LINE 1962, bears S. 79°59' W., 70.19 chs. dist.</p>
6.66	Center of E. bound lanes of Interstate Highway No. 40, 66.6 lks. wide, bears N. 79°59' E. and S. 79°59' W.
8.35	Center of W. bound lanes of Interstate Highway No. 40, 66.6 lks. wide, bears N. 79°59' E. and S. 79°59' W.
9.89	Point for a witness point, on line bet. secs. 25 and 26, at intersection with the northerly right-of-way of Interstate No. 40, position was occupied by a rebar, 17 ins. long, 5/8 in. diam. firmly set, 13 ins. in the ground, with lath mkd. PINTA ROAD PARCEL A.
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WF T20N R25E S26   S25 1993</p>

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
	<p>Bury the rebar, inside stainless steel post.</p>
	<p>Set a steel fence post near the cor.</p>
	<p>Cor. is located in a 5 strand barbed wire fence along the northerly right-of-way of Interstate Highway No. 40, bears N. 79°59' E. and S. 79°59' W.</p>
	<p>From this cor. point, an Arizona Highway Department northerly right-of-way marker of Interstate Highway No. 40, monumented with a brass disk 3 1/2 ins. diam., firmly set in a collar of concrete 6 ins. diam., flush with the ground, mkd. RP WB 100.00 SURVEY LINE 1962, bears N. 79°59' E., 11.47 chs. dist.</p>
	<p>From this same cor. point, an Arizona Highway Department northerly right-of-way marker of Interstate Highway No. 40, monumented with a brass disk 3 1/2 ins. diam., firmly set in a collar of concrete 6 ins. diam., flush with the ground, mkd. RP WB 100.00 SURVEY, bears S. 79°59' W., 70.99 chs. dist.</p>
39.95	<p>Point for the 1/4 sec. cor. of secs. 25 and 26, at proportionate dist.; there is no remaining evidence of the original cor., position was occupied by a rebar, 18 ins. long, 5/8 in. diam., firmly set, 15 ins. in the ground, with lath, mkd. PINTA ROAD PARCEL A N.W. COR.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T20N R25E 1/4 S26   S25 1993</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
	<p>Bury the rebar, inside the stainless steel post.</p>
	<p>Set a steel fence post near the cor.</p>
	<p>Cor. is located on top of a small ridge, bears ENE. and WSW.</p>
56.50	<p>Center of bladed dirt road, 40 lks. wide, bears SE. and NW.</p>
57.85	<p>Center of Old Navajo Trail, 20 lks. wide, bears ENE. and WSW.</p>

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS											
79.90	<p>The cor. of secs. 23, 24, 25 and 26, monumented by person(s) unknown, with an iron pipe, 31 ins. long, 1/2 in. diam., firmly set, 19 ins. in the ground. This position has long been recognized by land owners and utilized by local land surveyors as the corner and is accepted as the best evidence of the original cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <table data-bbox="855 697 1007 851" style="margin-left: auto; margin-right: auto;"> <tr> <td>T20N</td> <td>R25E</td> </tr> <tr> <td>S23</td> <td>S24</td> </tr> <tr> <td colspan="2" style="border-top: 1px solid black;"></td> </tr> <tr> <td>S26</td> <td>S25</td> </tr> <tr> <td colspan="2" style="text-align: center;">1993</td> </tr> </table> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the iron pipe and a 1959 California License plate alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located S., 200 lks. of a mesh and 2 strand barbed wire fence, bears ENE. and WSW., on nearly level ground, with sage and grass.</p>	T20N	R25E	S23	S24			S26	S25	1993	
T20N	R25E										
S23	S24										
S26	S25										
1993											
	<p>From the cor. of secs. 19, 24, 25 and 30, on the E. bdy. of Tp., hereinbefore described.</p> <p>N. 89°08' W. bet secs. 24 and 25.</p> <p>Ascend over rolling grass land.</p>										
18.20	Ridge, bears NE. and SW.										
39.86	<p>Point for the 1/4 sec. cor. of secs. 24 and 25, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <table data-bbox="855 1783 1007 1936" style="margin-left: auto; margin-right: auto;"> <tr> <td>T20N</td> <td>R25E</td> </tr> <tr> <td></td> <td>S24</td> </tr> <tr> <td>1/4</td> <td>—</td> </tr> <tr> <td></td> <td>S25</td> </tr> <tr> <td colspan="2" style="text-align: center;">1993</td> </tr> </table>	T20N	R25E		S24	1/4	—		S25	1993	
T20N	R25E										
	S24										
1/4	—										
	S25										
1993											

## BOOK 54 65

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on rolling grassy land.</p> <p>41.45 Old Navajo trail, bears ENE. and WSW.</p> <p>79.72 The cor. of secs. 23, 24, 25 and 26.</p>
	<hr/>
	<p>N. 0°01' E., bet. secs. 23 and 24.</p> <p>Ascend over rolling grass land.</p> <p>2.00 Mesh and 2 strand barbed wire fence, bears ENE. and WSW.</p> <p>2.70 Center of Old Highway No. 66, 55 lks. wide, bears ENE. and WSW.</p> <p>39.93 Point for the 1/4 sec. cor. of secs. 23 and 24, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T20N R25E 1/4 S23   S24 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on gently rolling land.</p> <p>Ascend over gently rolling grass land.</p> <p>79.86 The cor. of secs. 13, 14, 23 and 24, monumented by person(s) unknown with an iron pipe, 30 1/2 ins. long, 2 1/2 ins. diam., firmly set, 18 ins. in the ground. This position has long been recognized by land owners and utilized by local land surveyors as the corner and is accepted as the best evidence of the original cor.</p> <p>At the cor. point.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS											
	<table border="1"> <tr> <td>T20N</td> <td>R25E</td> </tr> <tr> <td>S14</td> <td>S13</td> </tr> <tr> <td>S23</td> <td>S24</td> </tr> <tr> <td colspan="2" style="text-align: center;">1993</td> </tr> </table>	T20N	R25E	S14	S13	S23	S24	1993			
T20N	R25E										
S14	S13										
S23	S24										
1993											
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the iron pipe alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on rolling grass land.</p>										
	<p>From the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of Tp., hereinbefore described.</p> <p>N. 89°08' W., bet. secs. 13 and 24.</p> <p>Over gently rolling grass land.</p>										
39.95	<p>Point for the 1/4 sec. cor. of secs. 13 and 24, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p>										
	<table border="1"> <tr> <td>T20N</td> <td>R25E</td> </tr> <tr> <td></td> <td>S13</td> </tr> <tr> <td>1/4</td> <td>—</td> </tr> <tr> <td></td> <td>S24</td> </tr> <tr> <td colspan="2" style="text-align: center;">1993</td> </tr> </table>	T20N	R25E		S13	1/4	—		S24	1993	
T20N	R25E										
	S13										
1/4	—										
	S24										
1993											
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on nearly level grass land.</p>										
42.00	Trailroad, bears SE. and NW.										
79.90	The cor. of secs. 13, 14, 23 and 24.										
	<p>N. 0°08' E., bet. secs. 13 and 14.</p> <p>Ascend over gently rolling grass land.</p>										

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.30	<p>Point for the 1/4 sec. cor. of secs. 13 and 14, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T20N R25E 1/4 S14   S13 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on gentle southeasterly slope.</p>
78.60	<p>The cor. of secs. 11, 12, 13 and 14, monumented by person(s) unknown with an iron pipe, 30 1/2 ins. long, 2 1/2 ins. diam., firmly set, 23 ins. in the ground, a rebar, 17 ins. long, 1/4 in. diam., was set loosely inside the pipe. This position has long been recognized by land owners and utilized by local land surveyors as the corner and is accepted as the best evidence of the original cor.</p> <p>At the cor. point.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T20N R25E S11   S12 ----- S14   S13 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the iron pipe and rebar alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on nearly level grass land.</p> <hr/> <p>From the cor. of secs. 7, 12, 13 and 18, on the E. bdy. of Tp., hereinbefore described.</p> <p>S. 89°57' W., bet. secs. 12 and 13.</p>

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.96	<p>Over gentle rolling grass land.</p> <p>Point for the 1/4 sec. cor. of secs. 12 and 13, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T20N R25E S12 1/4 — S13 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on nearly level grass land.</p>
79.92	<p>The cor. of secs. 11, 12, 14 and 15.</p>
10.20	<p>N. 0°03' E., bet. secs. 11 and 12.</p> <p>Ascend over gentle rolling grass land.</p> <p>Enter scattered junipers.</p>
39.92	<p>Point for the 1/4 sec. cor. of secs. 11 and 12, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T20N R25E 1/4 S11   S12 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on rolling grass land.</p> <p>Ascend through scattered junipers.</p>

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS											
79.84	<p>The cor. of secs. 1, 2, 11 and 12, monumented by person(s) unknown with an iron pipe, 25 ins. long, 1 1/2 ins. diam., firmly set, 16 ins. in the ground and a rebar 12 ins. long, 1/2 in. diam., firmly set, 10 ins. in the ground, by person(s) unknown. This position has long been recognized by land owners and utilized by local land surveyors as the corner and is accepted as the best evidence of the original cor.</p> <p>At the cor. point.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <table border="1" data-bbox="850 723 1007 883"> <tr> <td>T20N</td> <td>R25E</td> </tr> <tr> <td>S 2</td> <td>S 1</td> </tr> <tr> <td>S11</td> <td>S12</td> </tr> <tr> <td colspan="2">1993</td> </tr> </table> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the iron pipe and rebar alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on gentle southeasterly slope.</p>	T20N	R25E	S 2	S 1	S11	S12	1993			
T20N	R25E										
S 2	S 1										
S11	S12										
1993											
40.02	<p>From the cor. of secs. 1, 6, 7 and 12, on the E. bdy. of Tp., hereinbefore described.</p> <p>S. 89°54' W., bet. secs. 1 and 12.</p> <p>Descend through scattered junipers.</p> <p>Point for the 1/4 sec. cor. of secs. 1 and 12, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <table border="1" data-bbox="850 1649 1007 1808"> <tr> <td>T20N</td> <td>R25E</td> </tr> <tr> <td>S 1</td> <td></td> </tr> <tr> <td>1/4</td> <td>—</td> </tr> <tr> <td>S12</td> <td></td> </tr> <tr> <td colspan="2">1993</td> </tr> </table> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>	T20N	R25E	S 1		1/4	—	S12		1993	
T20N	R25E										
S 1											
1/4	—										
S12											
1993											

## BOOK 54 65

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
30.04	<p>Set a steel fence post near the cor.</p> <p>Cor. is located on nearly level land, in scattered junipers.</p> <p>Descend through scattered junipers.</p> <p>The cor. of secs. 1, 2, 11 and 12.</p>
4.65	<p>N. 0°28' E., bet. secs. 1 and 2.</p> <p>Ascend through scattered junipers.</p> <p>Ridge, bears NE. and SW.</p> <p>Descend over rolling broken land, through scattered junipers.</p>
39.87	<p>Point for the 1/4 sec. cor. of secs. 1 and 2, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T20N R25E 1/4 S 2   S 1 1993</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 15 ins. diam., bears N. 30° E., 67 lks. dist., mkd. 1/4 S1 BT.</p> <p style="padding-left: 40px;">A juniper, 14 ins. diam., bears S. 50° W., 181 lks. dist., mkd. 1/4 S2 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
40.50	<p>Set a steel fence post near the cor.</p> <p>Cor. is located on rolling grassy N. slope.</p> <p>Ridge, bears NE. and SW.</p>
44.30	<p>Wash, 65 lks. wide, 4 ft. deep, drains W.</p>
60.20	<p>Ridge, bears NE. and SW., begin descent into broken and rugged terrain.</p>

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
81.55	<p>The closing cor. of secs. 1 and 2, monumented by person(s) unknown with an iron pipe, 24 ins. long, 2 1/2 ins. diam., firmly set, 14 ins. in the ground. This position has long been recognized by land owners and utilized by local land surveyors as the corner and is accepted as the best evidence of the original cor.</p> <p>Add the marks AM to the iron pipe.</p> <p>Bury iron pipe in place 36 ins. in the ground.</p>
81.86	<p>Point for the closing cor. of secs. 1 and 2, at intersection with the Fifth Stan. Par. N.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N T25E S36</p> <hr style="width: 50px; margin: auto;"/> <p>S 2   S 1 CC T20N 1993</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>From this cor. point the stan. cor. of secs. 35 and 36, T. 21 N., R. 25 E., hereinbefore described, bears S. 89°53' W., 20.81 chs. dist.</p> <p>Cor. is located N., 30 lks. of a 4 strand barbed wire fence, bears E. and W., and is on the E. slope of a small knoll, in the Bad Lands area at the toe of the mesa.</p> <hr/> <p>Point for the 1/4 sec. cor. of sec. 1 only, T. 20 N., R. 25 E., is at midpoint on the N. bdy. of sec. 1.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <hr style="width: 50px; margin: auto;"/> <p>1/4 S 1 T20N R25E 1993</p> </div>

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
	<p>Set a steel fence post near the cor.</p>
	<p>From this cor. point the witness cor for the 1/4 sec. cor. of sec. 36, T. 21 N., R. 25 E., hereinbefore described, bears S. 89°45' W., 20.07 chs. dist.</p>
	<p>Cor. is located N., 52.3 lks. of a fence, bears E. and W., and is E., 84.9 lks. of a wash, 3 ft. wide, 1 ft. deep, drains SE.</p>
	<p>From the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of Tp., monumented with a stainless steel post, 2 1/2 ins. diam, firmly set, projecting, 4 ins. above the ground, with brass cap mkd. T20N R25E S34 S35 S3 S2 T19N 1987.</p>
	<p>Add the marks 1993 to the brass cap.</p>
	<p>N. 2°09' E., bet. secs. 34 and 35.</p>
	<p>Descend over nearly level grass land.</p>
40.29	<p>Point for the 1/4 sec. cor. of secs. 34 and 35, at proportionate dist.; there is no remaining evidence of the original cor.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T20N R25E 1/4 S34   S35 1993</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
	<p>Set a steel fence post near the cor.</p>
	<p>Cor. is located on nearly level grass land.</p>
71.45	<p>Point for a witness point, on line bet. secs. 34 and 35, at intersection with the southerly right-of-way of Interstate Highway No. 40.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">WP T20N R25E S34   S35 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located in a 5 strand barbed wire fence along the southerly right-of-way of Interstate Highway No. 40, bears N. 79°59' E. and S 79°59' W.</p> <p>From this cor. point, an Arizona Highway Department right-of-way marker, bears N. 79°59' E., 11.32 chs. dist., hereinbefore described.</p> <p>From this same cor. point, an Arizona Highway Department right-of-way marker, monumented with an aluminum disk 3 1/2 ins. diam., firmly set in a circular concrete collar, 8 ins. diam., projecting 4 in. above the ground, not mkd., bears S. 79°59' W., 3.93 chs. dist.</p> <p>72.94 Center of E. bound lanes of Interstate Highway No. 40, 66.6 lks. wide, bears N. 79°59' E. and S. 79°59' W.</p> <p>74.60 Center of W. bound lanes of Interstate Highway No. 40, 66.6 lks. wide, bears N. 79°59' E. and S. 79°59' W.</p> <p>76.19 Point for a witness point, on line bet. secs. 34 and 35, at intersection with the northerly right-of-way of Interstate Highway No. 40.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WP T20N R25E S34   S35 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located in a 5 strand barbed wire fence along the northerly right-of-way of Interstate Highway No. 40, bears N. 79°59' E. and S 79°59' W.</p>

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS									
80.58	<p>From this cor. point, an Arizona Highway Department right-of-way marker, bears N. 79°59' E., 10.33 chs. dist., hereinbefore described.</p> <p>From this same cor. point, an Arizona Highway Department right-of-way marker, bears S. 79°59' W., 4.93 chs. dist., hereinbefore described.</p> <p>The cor. of secs. 26, 27, 34 and 35, monumented by person(s) unknown with an iron pipe, 34 ins. long, 2 ins. diam., firmly set, 22 ins. in the ground. This position has long been recognized by land owners and utilized by local land surveyors as the corner and is accepted as the best evidence of the original cor.</p> <p>At the cor. point.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <table border="1" data-bbox="850 948 1007 1110"> <tr> <td>T20N</td> <td>R25E</td> </tr> <tr> <td>S27</td> <td>S26</td> </tr> <tr> <td>S34</td> <td>S35</td> </tr> <tr> <td colspan="2">1993</td> </tr> </table> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the iron pipe alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on nearly level grass land.</p>	T20N	R25E	S27	S26	S34	S35	1993	
T20N	R25E								
S27	S26								
S34	S35								
1993									
29.03	<p>From the cor. of secs. 25, 26, 35 and 36.</p> <p>N. 89°56' W., bet. secs. 26 and 35.</p> <p>Over nearly level grass land.</p> <p>Point for a witness point, on line bet. secs. 26 and 35, at intersection with the southerly right-of-way of Interstate Highway No. 40.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>								

## BOOK 54 65

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">WP T20N R25E S26 — S35 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located S., 2 lk. of a 5 strand barbed wire fence along the southerly right-of-way of Interstate Highway No. 40, bears N. 79°59' E. and S. 79°59' W.</p> <p>From this cor. point, an Arizona Highway Department right-of-way marker, bears N. 79°59' E., 40.25 chs. dist., hereinbefore described.</p> <p>From this same cor. point, an Arizona Highway Department right-of-way marker, bears S. 79°59' W., 40.71 chs. dist., hereinbefore described.</p>
37.33	Center of E. bound lanes of Interstate Highway No. 40, 66.6 lks. wide, bears N. 79°59' E. and S. 79°59' W.
39.96	<p>Point for the 1/4 sec. cor. of secs. 26 and 35, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 40 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T20N R25E S26 1/4 — S35 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located in the median of Interstate Highway No. 40.</p>
46.33	Center of W. bound lanes of Interstate Highway No. 40, 66.6 lks. wide, bears N. 79°59' E. and S. 79°59' W.

## BOOK 54 65

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
55.46	<p>Point for a witness point, on line bet. secs. 26 and 35, at intersection with the northerly right-of-way of Interstate Highway No. 40.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WP T20N R25E S26 —— S35 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located S., 2 lks. of a 5 strand barbed wire fence along the northerly right-of-way of Interstate Highway No. 40, bears N. 79°59' E. and S. 79°59' W.</p> <p>From this cor. point, an Arizona Highway Department right-of-way marker, bears N. 79°59' E., 67.78 chs. dist., hereinbefore described.</p> <p>From this same cor. point, an Arizona Highway Department right-of-way marker, bears S. 79°59' W., 14.68 chs. dist., hereinbefore described.</p>
79.92	<p>The cor. of secs. 26, 27, 34 and 35.</p>
	<p>N. 0°15' E., bet. secs. 26 and 27.</p> <p>Ascend over nearly level grass land.</p>
18.55	<p>Old Navajo Trail, 20 lks. wide, bears ENE. and WSW.</p>
39.96	<p>Point for the 1/4 sec. cor. of secs. 26 and 27, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T20N R25E 1/4 S27   S26 1993</p>

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS									
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on nearly level grass land.</p>								
49.35	A 5 strand barbed wire fence, bears ENE. and WSW.								
50.00	Center of Old Highway No. 66, bears ENE. and WSW.								
	Ascend over rolling grass land.								
79.92	<p>The cor. of secs. 22, 23, 26 and 27, monumented by person(s) unknown with an iron pipe, 22 ins. long, 2 1/2 ins. diam., firmly set, 21 ins. in the ground. This position has long been recognized by land owners and utilized by local land surveyors as the corner and is accepted as the best evidence of the original cor.</p> <p>At the cor. point.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td>T20N</td> <td>R25E</td> </tr> <tr> <td>S22</td> <td>S23</td> </tr> <tr> <td>S27</td> <td>S26</td> </tr> <tr> <td colspan="2">1993</td> </tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the iron pipe alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on rolling grass land.</p>	T20N	R25E	S22	S23	S27	S26	1993	
T20N	R25E								
S22	S23								
S27	S26								
1993									
	<p>From the cor. of secs. 23, 24, 25 and 26.</p> <p>N. 89°54' W., bet. secs. 23 and 26.</p> <p>Ascend over rolling grass land.</p>								
5.15	A 5 strand barbed wire fence, bears ENE. and WSW.								
7.40	Center of Old Highway No. 66, bears ENE. and WSW.								

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
15.70	Trailroad, 20 lks. wide, bears N. and S.
39.76	<p>Point for the 1/4 sec. cor. of secs. 23 and 26, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T20N R25E S23 1/4 — S26 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on rolling grass land.</p>
79.52	The cor. of secs. 22, 23, 26 and 27.
39.96	<p>N. 0°06' E., bet. secs. 22 and 23.</p> <p>Over nearly level grass land.</p> <p>Point for the 1/4 sec. cor. of secs. 22 and 33, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T20N R25E 1/4 S22   S23 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on nearly level grass land.</p>

## BOOK 54 65

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS											
79.92	<p>The cor. of secs. 14, 15, 22 and 23, monumented by person(s) unknown with an iron pipe, 28 ins. long, 2 1/2 ins. diam., firmly set, 21 ins. in the ground, and a rebar, 18 ins. long, 1/2 in. diam., lying loose alongside the pipe. This position has long been recognized by land owners and utilized by local land surveyors as the corner and is accepted as the best evidence of the original cor.</p> <p>At the cor. point.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td>T20N</td> <td>R25E</td> </tr> <tr> <td>S15</td> <td>S14</td> </tr> <tr> <td colspan="2" style="text-align: center;"> </td> </tr> <tr> <td>S22</td> <td>S23</td> </tr> <tr> <td colspan="2" style="text-align: center;">1993</td> </tr> </table> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the iron pipe and the rebar alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on rolling grass land.</p>	T20N	R25E	S15	S14			S22	S23	1993	
T20N	R25E										
S15	S14										
S22	S23										
1993											
39.69	<p>From the cor. of secs. 13, 14, 23 and 24.</p> <p>N. 89°52' W., bet. secs. 14 and 23.</p> <p>Over nearly level grass land.</p> <p>Point for the 1/4 sec. cor. of secs. 14 and 23, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td>T20N</td> <td>R25E</td> </tr> <tr> <td></td> <td>S14</td> </tr> <tr> <td>1/4</td> <td>—</td> </tr> <tr> <td></td> <td>S23</td> </tr> <tr> <td colspan="2" style="text-align: center;">1993</td> </tr> </table> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>	T20N	R25E		S14	1/4	—		S23	1993	
T20N	R25E										
	S14										
1/4	—										
	S23										
1993											

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Set a steel fence post near the cor.
	Cor. is located on rolling grass land.
56.55	Trailroad, bears SE. and NW.
79.38	The cor. of secs. 14, 15, 22 and 23.
	N. 1°00' W., bet. secs. 14 and 15.
	Ascend over rolling grass land.
40.73	Point for the 1/4 sec. cor. of secs. 14 and 15, at proportionate dist.; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T20N R25E 1/4 S15   S14 1993</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
	Set a steel fence post near the cor.
	Cor. is located on gentle W. slope on rolling grass land.
48.75	Trailroad, bears ESE. and WNW.
81.46	The cor. of secs. 10, 11, 14 and 15, monumented by person(s) unknown with an iron pipe, 20 ins. long, 2 1/2 ins. diam., firmly set, 19 ins. in the ground. This position has long been recognized by land owners and utilized by local land surveyors as the corner and is accepted as the best evidence of the original cor.
	At the cor. point.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T20N R25E S10   S11 ----- S15   S14 1993</p>

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the iron pipe alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>From this cor. point, U.S. Coast and Geodetic Survey triangulation station "DEAD 1936" with published latitude of 35°08'29.426" N. and longitude of 109°39'26.711" W., NAD 27, monumented with a brass cap 3 1/2 ins. diam., in a 10 X 10 in. concrete collar, firmly set, projecting 2 ins. above the ground, mkd. DEAD 1936, bears N. 84°54' E., 28.83 chs, dist.</p> <p>From this same cor. point, a monument, with a brass cap 3 1/2 ins. diam., in a 10 X 10 in. concrete collar, projecting 4 ins. above the ground, mkd. U.S. COAST &amp; GEODETIC SURVEY AZ. MARK DEAD, bears S. 88°20' W., 4.04 chs. dist.</p>
40.52	<p>From the cor. of secs. 11, 12, 13 and 14.</p> <p>N. 87°51' W., bet. secs. 11 and 14.</p> <p>Descend over rolling grass land.</p> <p>Point for the 1/4 sec. cor. of secs. 11 and 14, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T20N R25E S11 1/4 — S14 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on nearly level grass land.</p> <p>From this cor. point, U.S. Coast &amp; Geodetic triangulation station "DEAD 1936, hereinbefore described, bears N. 56°21' W., 9.11 chs. dist.</p>

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS											
81.04	The cor. of secs. 10, 11, 14 and 15.										
	N. 0°35' E., bet. secs. 10 and 11.										
	Over nearly level grass land.										
2.05	Trailroad, bears NE. and SW.										
4.60	Ridge, bears NE. and SW., descend into Dead River Valley.										
15.10	Toe of slope, over nearly level grass land, on valley floor.										
38.80	Point for the 1/4 sec. cor. of secs. 10 and 11, at proportionate dist.; there is no remaining evidence of the original cor.										
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.										
	<table style="margin-left: auto; margin-right: auto;"> <tr><td>T20N</td><td>R25E</td></tr> <tr><td></td><td>1/4</td></tr> <tr><td>S10</td><td>  S11</td></tr> <tr><td></td><td>1993</td></tr> </table>	T20N	R25E		1/4	S10	S11		1993		
T20N	R25E										
	1/4										
S10	S11										
	1993										
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.										
	Set a steel fence post near the cor.										
	Cor. is located on level grass land, on the floor of Dead River valley.										
77.60	The cor. of secs. 2, 3, 10 and 11, monumented by person(s) unknown with a galvanized iron pipe, 29 ins. long, 1 3/4 in. diam., firmly set, 23 ins. in the ground. This position has long been recognized by land owners and utilized by local land surveyors as the corner and is accepted as the best evidence of the original cor.										
	At the cor. point.										
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.										
	<table style="margin-left: auto; margin-right: auto;"> <tr><td>T20N</td><td>R25E</td></tr> <tr><td>S 3</td><td>  S 2</td></tr> <tr><td colspan="2"><hr/></td></tr> <tr><td>S10</td><td>  S11</td></tr> <tr><td></td><td>1993</td></tr> </table>	T20N	R25E	S 3	S 2	<hr/>		S10	S11		1993
T20N	R25E										
S 3	S 2										
<hr/>											
S10	S11										
	1993										

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the galvanized iron pipe alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on nearly level grass land.</p>
	<p>From the cor. of secs. 1, 2, 11 and 12.</p> <p>N. 89°26' W., bet. secs. 2 and 11.</p> <p>Descend over rolling grass land.</p>
5.65	Ridge, bears NE. and SW.
10.55	Trailroad, bears NE. and SW., descend over rolling and broken terrain into Dead River valley.
40.12	<p>Point for the 1/4 sec. cor. of secs. 2 and 11, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T20N R25E S 2 1/4 — S11 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on nearly level grass land, at the toe of mesa.</p> <p>Descend over nearly level grass land.</p>
80.24	The cor. of secs. 2, 3, 10 and 11.
	<p>N. 0°51' E., bet. secs. 2 and 3.</p> <p>Over nearly level grass land.</p>
39.76	Point for the 1/4 sec. cor. of secs. 2 and 3, at proportionate dist.; there is no remaining evidence of the original cor.

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T20N R25E 1/4 S 3   S 2 1993</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
	Set a steel fence post near the cor.
	Cor. is located on nearly level grass land.
75.55	Trailroad, bears NE. and SW.
80.86	Point for the closing cor. of secs. 2 and 3, at the intersection with the Fifth Stan. Par. N.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T21N R25E S34 ----- S 3   S 2 OC T20N 1993</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
	Set a steel fence post near the cor.
	Cor. is located S., 8 lks. of a 4 strand barbed wire fence, bears E. and W.
	From this cor. point, the stan. cor. of secs. 34 and 35, T. 21 N., R. 25 E., hereinbefore described, bears S. 89°48' W., 20.84 chs. dist.
	From this same cor. point, the closing cor., monumented by person(s) unknown with an iron pipe, 30 ins. long, 2 1/2 ins. diam., firmly set, 23 ins. in the ground, bears N. 0°51' E., 0.62 chs. dist. This position has long been recognized by land owners and utilized by local land surveyors as the corner and is accepted as the best evidence of the original cor.
	Add the marks AM to the iron pipe.

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Bury the iron pipe 36 ins. in the ground.
	Point for the 1/4 sec. cor. of sec. 2 only, T. 20 N., R. 25 E., is at midpoint on the N. bdy. of sec. 2.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.
	<hr/> 1/4 S 2 T20N R25E 1993
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
	Set a steel fence post near the cor.
	Cor. is located N., 2.3 lks. of a fence, bears E. and W.
	From this cor. point, the stan. 1/4 sec. cor. of sec. 35, T. 21 N., R. 25 E., bears S. 89°50' W., 20.83 chs. dist., hereinbefore described.
	From the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of Tp., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting, 4 ins. above the ground, with brass cap mkd. T20N R25E S33 S34 S4 S3 T19N 1987.
	Add the marks 1993 to the brass cap.
	Cor. is located on nearly level grass land, on mesa above the Puerco River.
	N. 2°57' E., bet. secs. 33 and 34.
	Over nearly level grass land.
0.94	A 4 strand barbed wire fence, bears E. and W.
40.30	Point for the 1/4 sec. cor. of secs. 33 and 34, at proportionate dist.; there is no remaining evidence of the original cor.  Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T20N R25E 1/4 S33   S34 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on gentle N. slope, on grassy land.</p>
47.79	<p>Point for a witness point, on line bet. secs. 33 and 34, at intersection with the southerly right-of-way of Interstate Highway No. 40.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">WP T20N R25E S33   S34 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located in a 5 strand barbed wire fence along the southerly right-of-way of Interstate Highway No. 40, bears N 70°13' E. and S. 70°13' W.</p> <p>From this cor. point, an Arizona Highway Department right-of-way marker, monumented with a brass disk 3 1/2 ins. diam., firmly set in a circular collar of concrete 6 ins. diam., projecting 1/2 in. above the ground mkd. PC 564+57.19, bears N. 70°13' E., 22.54 chs. dist.</p> <p>From this same cor. point, an Arizona Highway Department right-of-way marker, monumented with a brass disk 3 1/2 ins. diam., firmly set in a circular collar of concrete 6 ins. diam., projecting 1/2 in. above the ground mkd. 549+00 19, bears S. 70°13' W., 1.06 chs. dist.</p>
49.38	<p>Center of E. bound lanes of Interstate Highway No. 40, 66.6 lks. wide, bears N. 70°13' E. and S. 70°13' W.</p>
51.07	<p>Center of W. bound lanes of Interstate Highway No. 40, 66.6 lks. wide, bears N. 70°13' E. and S. 70°13' W.</p>

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
52.80	<p>Point for a witness point, on line bet. secs. 33 and 34, at intersection with the northerly right-of-way of the Interstate Highway No. 40.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WP T20N R25E S33   S34 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located in a 5 strand barbed wire fence along the northerly right-of-way of Interstate Highway No. 40, bears N. 70°13' E. and S. 70°13' W.</p> <p>From this cor. point, an Arizona Highway Department right-of-way marker, monumented with an aluminum disk 3 1/2 ins. diam., firmly set in a circular concrete collar 6 ins. diam., flush with the ground mkd. PC 564+57.19, bears N. 70°13' E. 20.60 chs. dist.</p> <p>From this same cor. point, an Arizona Highway Department right-of-way marker, monumented with an aluminum disk 3 1/2 ins. diam., firmly set in a circular concrete collar 8 ins. diam., 1 in. above the ground, not mkd., bears S. 70°13' W., 3.00 chs. dist.</p>
57.80	Old Navajo trail, 35 lks. wide, bears ENE. and WSW.
80.60	<p>The cor. of secs. 27, 28, 33 and 34, monumented by person(s) unknown with an iron pipe, 28 1/2 ins. long, 2 1/2 ins diam., firmly set, 18 ins. in the ground. This position has long been recognized by land owners and utilized by local land surveyors as the corner and is accepted as the best evidence of the original cor.</p> <p>At the cor. point.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T20N R25E S28   S27 ----- S33   S34 1993</p>

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the iron pipe alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on rolling grass land.</p>
	<p>From the cor. of secs. 26, 27, 33 and 34.</p> <p>N. 89°45' W. bet., secs. 27 and 34.</p> <p>Over nearly level grass land.</p>
9.85	A 4 strand barbed wire fence along abandoned access road between Old Highway No. 66 and Interstate Highway No. 40, bears ESE. and WNW.
10.46	Center of abandoned asphalt roadway, bears ESE. and WNW.
36.75	Old Navajo trail, 35 lks. wide, bears ENE. and WSW.
40.06	<p>Point for the 1/4 sec. cor. of secs. 27 and 34, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T20N R25E S27 1/4 — S34 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on rolling grass land.</p> <p>Over rolling grass land.</p>
80.12	<p>The cor. of secs. 27, 28, 33 and 34.</p> <p>N. 0°18' E., bet. secs. 27 and 28.</p> <p>Ascend over rolling grass land.</p>

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
19.45	A mesh and 2 strand barbed wire fence, bears ENE. and WSW.
20.05	Center of Old Highway No. 66, bears ENE. and WSW.
39.90	Point for the 1/4 sec. cor. of secs. 27 and 28, at proportionate dist.; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.
	<pre> T20N R25E   1/4 S28   S27   1993 </pre>
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
	Set a steel fence post near the cor.
	Cor. is located W., 3 lks. of an abandoned fence, bears N. and S.
	Ascend over rolling grass land.
40.70	Rim of mesa, above Dead River valley, bears N. and S., descend over rolling and broken terrain.
79.80	The cor. of secs. 21, 22, 27 and 28, monumented with a juniper post, 34 ins. long, 6 ins. diam., firmly set, 22 ins. in the ground, no visible marks.
	At the cor. point.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.
	<pre> T20N R25E S21   S22 ----- S28   S27   1993 </pre>
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
	Bury the remains of the juniper post, alongside the stainless steel post.
	Set a steel fence post near the cor.

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Cor. is located in an abandoned fence, extends S., and SE.
	From the cor. of secs. 22, 23, 26 and 27.
	N. 89°50' W., bet. secs. 22 and 27.
	Ascend over rolling grass land.
19.10	Trailroad, bears N. and S.
19.40	Top ridge, bears N. and S., descend into Dead River valley, over broken and rugged terrain.
40.02	Point for the 1/4 sec. cor. of secs. 22 and 27, at proportionate dist.; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T20N R25E S22 1/4 — S27 1993</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
	Set a steel fence post near the cor.
	Cor. is located on westerly slope of broken and rolling hills, below mesa.
	Descend into floor of Dead River valley, and over eroded and broken land.
80.04	The cor. of secs. 21, 22, 27 and 28.
	N. 6°10' W., bet. secs. 21 and 22.
	Over nearly level, alluvial floor of the Dead River valley.
37.90	Point for the 1/4 sec. cor. of secs. 21 and 22, at proportionate dist.; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T20N R25E 1/4 S21   S22 1993</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
	<p>Set a steel fence post near the cor.</p>
	<p>Cor. is located on nearly level grass land, with numerous broken and eroded washes.</p>
65.90	<p>Point for a witness point, on line bet. secs. 21 and 22.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">WP T20N R25E S21   S22 1993</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
	<p>Set a steel fence post near the cor.</p>
	<p>Cor. is located S., 40 lks. of the left bank of the Dead River, 6 ft. high, bears NE. and SW., on nearly level grass land.</p>
75.40	<p>Left bank of Dead River, 6 ft. high, bears NE. and SW., descend into bed of Dead River, across gravel and sand bars.</p>
75.80	<p>The cor. of secs. 15, 16, 21 and 22, monumented by person(s) unknown with an iron pipe, 28 ins. long, 2 ins. diam., buried 24 ins. below the surface of the ground at the extension of fences, with a steel fence post, 7 ft. long, set 4 ft. in the ground alongside. This position has long been recognized by land owners and utilized by local land surveyors as the corner and is accepted as the best evidence of the original cor.</p>
	<p>At the cor. point.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, over a 6 ft. steel fence post, with brass cap mkd.</p>

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS											
	<table border="1"> <tr> <td>T20N</td> <td>R25E</td> </tr> <tr> <td>S16</td> <td>S15</td> </tr> <tr> <td>S21</td> <td>S22</td> </tr> <tr> <td colspan="2" style="text-align: center;">1993</td> </tr> </table>	T20N	R25E	S16	S15	S21	S22	1993			
T20N	R25E										
S16	S15										
S21	S22										
1993											
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the iron pipe alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located in a easterly tributary of Dead River, 15 lks. wide, 1 ft. deep, drains SE., and is W., 90 lks. of left bank, 7 ft. high, bears SE. and NW., and is S. 7°52' E., 150 lks. of a bend in a 4 strand barbed wire fences, extending WSW. and N. and is S. 82°E., 488 lks. of bend and suspension brace in 4 strand barbed wire fences, extending ENE. and WNW.</p>										
	<p>From the cor. of secs. 14, 15, 22 and 23.</p> <p>S. 87°12' W., bet. secs. 15 and 22.</p> <p>Descend over broken and eroded land.</p>										
11.20	Rim of mesa, begin descent into Dead River valley over broken and rugged terrain.										
44.20	Point for the 1/4 sec. cor. of secs. 15 and 22, at proportionate dist.; there is no remaining evidence of the original cor.										
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p>										
	<table border="1"> <tr> <td>T20N</td> <td>R25E</td> </tr> <tr> <td></td> <td>S15</td> </tr> <tr> <td>1/4</td> <td>—</td> </tr> <tr> <td></td> <td>S22</td> </tr> <tr> <td colspan="2" style="text-align: center;">1993</td> </tr> </table>	T20N	R25E		S15	1/4	—		S22	1993	
T20N	R25E										
	S15										
1/4	—										
	S22										
1993											
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on nearly level grass and desert land.</p> <p>Descend over eroded and broken grass land.</p>										

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
86.21	<p>Point for a witness point, on line bet. secs. 15 and 22.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WP T20N R25E S15 — S22 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located E., 129 lks. of the left bank, 7 ft. high, of the Dead River on nearly level desert land.</p>
87.05	Left bank of Dead River, 7 ft. high, bears NW. and SE.
88.40	The cor. of secs. 15, 16, 21 and 22.
	N. 7°52' W., bet. secs. 15 and 16.
	Ascend over broken and eroded river bottom.
0.95	Left bank of the Dead River, 3 ft. high, bears NW. and SE.
1.50	A cor. of a suspended fence, extending ENE. across the Dead River and a 4 strand barbed wire fence, extending N.
3.00	<p>Point for a witness point, on line bet. secs. 15 and 16.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WP T20N R25E S16   S15 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>

## BOOK 54 65

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Cor. is located in a 4 strand barbed wire fence, bears N. and S., and is E., 50 lks. of the left bank of the Dead River, 5 chs. wide, bears SE. curving southwesterly, and NNW. curving northeasterly.
11.20	Left bank of the Dead River, 6 ft. high, bears WSW. and ENE.
15.70	Right bank of the Dead River, 3 ft. high, bears WSW. and ENE.
	Ascend over broken and rugged terrain.
39.51	The 1/4 sec. cor. of secs. 15 and 16, monumented with an iron post, 1 in. diam., firmly set, projecting 13 ins. above the ground, with brass cap mkd. PFNM 1/4 S16 S15 1882 1938.
	Add the marks T20N R25E 1993 to the brass cap.
	Cor. is located in a mesh and 2 strand barbed wire fence, bears N. and S., and is E., 18 lks. of a bladed dirt road, 18 lks. wide, bears N. and S.
	N. 7°51' W., beginning new measurement.
	Over rolling and broken desert land.
39.56	The cor. of secs. 9, 10, 15 and 16, monumented with an iron post, 2 ins. diam., firmly set, projecting 9 ins. above the ground, with brass cap mkd., PFNM T20N R25E S9 S10 S16 S15 1882 1938.
	Add the marks 1993 to the brass cap.
	Cor. is located W., 1 lk. and N., 5.3 lks. of angle point of a mesh and 2 strand barbed wire fence, bears N. and S., and is E., 29 lks. of a bladed dirt road, 18 lks. wide, bears N. and S.
	From the cor. of secs. 10, 11, 14 and 15.
	S. 85°38' W., bet. secs. 10 and 15.
	Over nearly level grass land.
1.90	Trailroad, 12 lks. wide, bears NE., curving easterly and SW., curving southerly.
4.30	Trailroad, 12 lks. wide, bears SE. and NW.
6.15	Rim of mesa, descend into Dead River valley.
	Over rolling and broken terrain.

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
48.97	<p>Point for the 1/4 sec. cor. of secs. 10 and 15, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T20N R25E S10 1/4 — S15 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on nearly level grass land, floor of Dead River valley.</p> <p>Descend over nearly level grass land, with numerous small eroded drainage.</p>
64.40	Left bank of Dead River, 3 ft. high, bears SSE. and N.
69.65	<p>Right bank of Dead River, 1 ft. high, bears N. and S.</p> <p>Ascend over nearly level desert land.</p>
97.94	The cor. of secs. 9, 10, 15 and 16.
	<p>N. 0°35' E., bet. secs. 9 and 10.</p> <p>Over nearly level, barren desert land.</p>
41.23	<p>The 1/4 sec. cor. of secs. 9 and 10, monumented with an iron post, 1 in. diam., firmly set, projecting 12 ins. above the ground, with brass cap mkd. PFNM 1/4 S9 S10 1882 1938.</p> <p>Add the marks T20N R25E 1993 to the brass cap.</p> <p>Cor. is located in a mesh and 2 strand barbed wire fence, bears N. and S., and is N., 5.5 lks. of a gate in the fence, 20 lks. wide, and is E., 44 lks. of a bladed dirt road, 18 lks. wide, bears N. and S.</p> <p style="text-align: center;">—————</p> <p>N. 0°34' E., beginning new measurement.</p> <p>Ascend over nearly level, barren desert land.</p>

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
41.30	<p>The cor. of secs. 3, 4, 9 and 10, monumented with an iron post, 2 ins. diam., firmly set, projecting 15 ins. above the ground, with brass cap mkd. PFNM T20N R25E S4 S3 S9 S10 1882 1938.</p> <p>Add the marks 1993 to the brass cap.</p> <p>Cor. is located in a mesh and 2 strand barbed wire fence, bears N. and S., and is E., 60 lks. of a bladed dirt road, 18 lks. wide, bears N. and S.</p>
	<p>From the cor. of secs. 2, 3, 10 and 11.</p> <p>S. 88°31' W., bet. secs. 3 and 10.</p> <p>Descend over nearly level grass land.</p>
28.55	Trailroad, 12 lks. wide, bears S. and N.
47.07	Left bank of E. tributary of Dead River, 7 ft. high, bears NNE. and SSW.
48.82	<p>Point for the 1/4 sec. cor. of secs. 3 and 10, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a 5 ft. tall fence post, in a collar of stone, 3 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T20N R25E S 3 1/4 — S10 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located in the bed of the easterly tributary of Dead River and is W., 174 lks. of the left bank, 7 ft. high, bears NE. and SSW.</p> <p>Over eroded and broken barren river bottom.</p>
70.10	Right bank of the Dead River, 5 ft. high, bears NNE. and SSW.
97.64	The cor. of secs. 3, 4, 9 and 10.

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	N. 1°49' E., bet. secs. 3 and 4.
	Ascend over rolling and broken barren land.
38.22	The 1/4 sec. cor. of secs. 3 and 4, monumented with an iron post 1 in. diam., firmly set, projecting 1 in. above the ground, with brass cap mkd. PFNM 1/4 S3 S2 1882 1938.
	Add the marks 1993 to the brass cap.
	Rebuild a mound of stone W., 2 ft. base and 2 ft. high.
	Cor. is located in a mesh and 2 strand barbed wire fence, bears N. and S.
	From this cor. point, a rebar, 1/2 in. diam., bears S. 80°W., 0.5 lks. dist., with tag mkd. PEFO 87E 59.
	N. 0°37' E., beginning new measurement.
44.83	The closing cor. for secs. 3 and 4, T. 20 N., R. 25 E., at Intersection with the Fifth Stan. Par. N., monumented with an iron post, 2 ins. diam., firmly set, projecting 12 ins. above the ground, with brass cap mkd. T21N R25E S34 S4 S3 T20N R25E CC PFNM: 1882 1938.
	Add the marks 1993 to the brass cap.
	Cor. is located in a fence, bears N. and S., and is N., 3 lks. of the intersection of a fence extending W. and is S., 65.1 lks. of fence, bears E. and W.
	From this cor. point, the stan. cor. of secs. 33 and 34, T. 21 N., R. 25 E., hereinbefore described, bears S. 89°47' W., 3.46 chs. dist.
	Point for the 1/4 sec. cor. of sec. 3 only, T. 20 N., R. 25 E., at midpoint on the N. bdy. of sec. 3.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.
	1/4 S 3
	T20N R25E
	1993
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.

## BOOK 54 65

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a steel fence post near the cor.</p> <p>Cor. is located S., 35 lks. of a fence, bears E. and W.</p> <p>From this cor. point, the stan. 1/4 sec. cor. of sec. 34, T. 21 N., R. 25 E., hereinbefore described, bears S. 89°49' W., 12.15 chs. dist.</p> <hr/> <p>From the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of Tp., monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd. T20N R25E S32 S33 S5 S4 T19N 1987.</p> <p>Add the marks 1993 to the brass cap.</p> <p>Cor. is located S., 83 lks. of a 5 strand barbed wire fence, bears E. and W.</p> <p>N. 4°30' E. bet., secs. 32 and 33.</p> <p>Descend over rolling grass land.</p>
17.78	<p>Point for a witness point, on line bet. secs. 32 and 33, at intersection with the southerly right-of-way of Interstate Highway No. 40.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WF T20N R25E S32   S33 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located in a 5 strand barbed wire fence along the southerly right-of-way of Interstate Highway No. 40, bears N. 70°14' E. and S. 70°14' W.</p> <p>From this cor. point, an Arizona Highway Department right-of-way marker, monumented with a brass disk 3 1/2 ins. diam., firmly set in a circular collar of concrete 6 ins. diam., projecting 3 ins. above the ground, mkd. 495+00 19, bears N. 70°14' E., 4.66 chs. dist.</p>

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From this same cor. point, an Arizona Highway Department right-of-way marker, monumented with a brass disk 3 1/2 ins. diam., firmly set in a circular collar of concrete, 6 ins. diam., projecting 3 ins. above the ground, mkd. 495+00 19, bears S. 70°14' W., 84.70 chs. dist.</p>
19.40	<p>Center of E. bound lanes of Interstate Highway No. 40, 66.6 lks. wide, bears N. 70°14' E. and S. 70°14' W.</p>
22.22	<p>Center of W. bound lanes of Interstate Highway No. 40, 66.6 lks. wide, bears N. 70°14' E. and S. 70°14' W.</p>
22.89	<p>Point for a witness point, on line bet. secs. 32 and 33, at intersection with the northerly right-of-way of Interstate Highway No. 40.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">WF T20N R25E S32   S33 1993</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
	<p>Set a steel fence post near the cor.</p>
	<p>Cor. is located in a 5 strand barbed wire fence along the northerly right-of-way of Interstate Highway No. 40, bears N. 70°14' E. and S. 70°14' W.</p>
	<p>From this cor. point, an Arizona Highway Department right-of-way marker, monumented with an aluminum disk 3 1/2 ins. diam., firmly set in a circular concrete collar 8 ins. diam., 1 in. above the ground, mkd. 495+00, bears N. 70°14' E., 2.56 chs. dist.</p>
	<p>From this same cor. point, an Arizona Highway Department right-of-way marker, monumented with an angle iron post 3 x 3 ins., projecting 30 ins. above the ground, welded to the fence cor. of the rest area, bears S. 70°13' W., 44.77 chs. dist.</p>
	<p>Descend into Dead River valley, over broken and barren land.</p>
40.51	<p>Point for the 1/4 sec. cor. of secs. 32 and 33, at proportionate dist.; there is no remaining evidence of the original cor.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p>

## BOOK 54 65

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T20N R25E 1/4 S32   S33 1993</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
	<p>Set a steel fence post near the cor.</p>
	<p>Cor. is located in alluvial area E., 420 lks. of the left bank of the Dead River, 7 ft. high, bears NNE. and SSW., and is W., 380 lks. of an ancient 4 strand barbed wire fence, bears N. and S.</p>
47.87	<p>Left bank of the Dead River, 5 ft. high, bears NNE. and SSW., descend into bed of Dead River, over sand bars and gravel.</p>
79.02	<p>Right bank of Dead River, 3 ft. high, bears N. and S.</p>
81.02	<p>The cor. of secs. 28, 29, 32 and 33, at the corner of fences, extending N. and E. This position has long been recognized by land owners and is harmoniously related to other accepted corners and is accepted as the best evidence of the original cor.</p>
	<p>At the cor. point.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T20N R25E S29   S28 ----- S32   S33 1993</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
	<p>Set a steel fence post near the cor.</p>
	<p>Cor. is located on the right bank of the Dead River, and is W., 113 lks. of bank, 2 ft. high, bears N. and S.</p>
	<p>From the cor. of secs. 27, 28, 33 and 34.</p>
	<p>S. 89°04' W., bet. secs. 28 and 33.</p>
	<p>Over rolling and broken grass land.</p>

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
23.64	Rim of mesa, bears ENE. and WSW., descend into Dead River valley, over broken rugged land.
39.55	<p>The 1/4 sec. cor. of secs. 28 and 33, at the corner of fences, extending N. and W. This position has long been recognized by land owners and is harmoniously related to other accepted corners and is accepted as the best evidence of the original cor.</p> <p>At the cor. point.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T20N R25E S28 1/4 — S33 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on gentle westerly slope, on grass land.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 88°07' W., beginning new measurement.</p>
31.58	A 4 strand barbed wire fence, extending NNE. and S.
32.52	Point for A.P. 9, of the metes-and-bounds survey in sec. 28, hereinafter described.
32.65	Left bank of the Dead River, 6 ft. high, bears NNE. and SSW.
38.40	Right bank of the Dead River, 2 ft. high, bears N. and S.
39.52	The cor. of secs. 28, 29, 32 and 33.
	<hr/> <p>N. 0°14' E., bet. secs. 28 and 29.</p> <p>Ascend and leave bed of Dead River.</p>
1.10	Point for A.P. 7, of the metes-and-bounds survey in sec 28, hereinafter described.
15.54	Abandoned fence, bears E. and W.
16.35	Center of Old Highway No. 66, 55 lks. wide, bears E. and W.

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
16.95	New mesh and 2 strand barbed wire fence, bears E. and W.
33.95	The NW. cor. of abandoned frame house, bears E., 107 lks. dist., long side bears S. 10° E.
39.93	<p>The 1/4 sec. cor. of secs. 28 and 29, at the intersection of a 4 strand barbed wire fence, bears E. and W., with the projection of fences extending N. and S. This position has long been recognized by land owners and is harmoniously related to other accepted corners and is accepted as the best evidence of the original cor.</p> <p>At the cor. point.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T20N R25E 1/4 S29   S28 1993</p> <p>from which</p> <p style="padding-left: 40px;">The NW. cor of an abandoned frame house, bears S. 10° E. 6.14 chs. dist., long side bears S. 10° E.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N 0°14' E., beginning new measurement.</p> <p>Ascend over broken and barren desert land</p>
4.55	Angle point in fence, extending N. and SSE.
34.55	Ridge, bears E. and W.
39.93	<p>The cor. of secs. 20, 21, 28 and 29, monumented by person(s) unknown with a gear spindle, 30 ins. long, shaft, 1 in. diam, and gear, 3 ins. diam., firmly set, 18 ins. in the ground. This position has long been recognized by land owners and utilized by local land surveyors as the corner and is accepted as the best evidence of the original cor.</p> <p>At the cor. point.</p>

## BOOK 54 65

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS											
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 19 ins. in the ground, in a mound of stone, 2 ft. base to top, with brass cap mkd.</p>										
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td>T20N</td> <td>R25E</td> </tr> <tr> <td>S20</td> <td>S21</td> </tr> <tr> <td colspan="2" style="text-align: center;">— —</td> </tr> <tr> <td>S29</td> <td>S28</td> </tr> <tr> <td colspan="2" style="text-align: center;">1993</td> </tr> </table>	T20N	R25E	S20	S21	— —		S29	S28	1993	
T20N	R25E										
S20	S21										
— —											
S29	S28										
1993											
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>										
	<p>Bury the gear spindle inside the stainless steel post.</p>										
	<p>Set a steel fence post near the cor.</p>										
	<p>Cor. is located in the cor. of an ancient 4 strand barbed wire fence, extends S. and abandoned fence, extends E.</p>										
	<p>From the cor. of secs. 21, 22, 27 and 28.</p>										
	<p>N. 89°25' W., bet. secs. 21 and 28.</p>										
	<p>Over broken and eroded desert land.</p>										
31.25	<p>Left bank of the Dead River, 7 ft. high, bears SSE. curving southerly, and NNW.</p>										
38.95	<p>Right bank of the Dead River, 4 ft. high, bears SE. and NNW.</p>										
40.90	<p>The 1/4 sec. cor. of secs. 21 and 28, at the corner of an ancient fence, extending S. and W. This position has long been recognized by land owners and is harmoniously related with other accepted corners and is accepted as the best evidence of the original cor.</p>										
	<p>At the cor. point.</p>										
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>										
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td>T20N</td> <td>R25E</td> </tr> <tr> <td></td> <td>S21</td> </tr> <tr> <td>1/4</td> <td>—</td> </tr> <tr> <td></td> <td>S28</td> </tr> <tr> <td colspan="2" style="text-align: center;">1993</td> </tr> </table>	T20N	R25E		S21	1/4	—		S28	1993	
T20N	R25E										
	S21										
1/4	—										
	S28										
1993											
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>										

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Set a steel fence post near the cor.
	Cor. is located S., 320 lks. of the right bank of the Dead Rivers, 500 lks. wide, bears SE. curving southerly and NW.
	<hr/>
	N. 89°30' W., beginning new measurement.
	Over nearly level river bottom, grass land.
9.80	A 4 strand barbed wire fence, bears NNE. and SSW.
38.24	The cor. of secs. 20, 21, 28 and 29.
	<hr/>
	N. 3°47' W., bet. secs. 20 and 21.
	Over broken, gently rolling land.
27.35	Wash, 48 lks. wide, 7 ft. deep, drains ESE.
38.35	Spur, bears WSW., continuing over broken and rolling land.
42.42	Point for the 1/4 sec. cor. of secs. 20 and 21, at proportionate dist.; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.
	<p style="text-align: center;">T20N R25E 1/4 S20   S21 1993</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
	Set a steel fence post near the cor.
	Cor. is located on the east slope of a low hill at the W. end of a small ridge, 40 ft. high, bears NNE. and SSW.
	Ascend over broken and rolling land.
43.75	Spur, slopes SW.
47.50	Ridge, bears NE. and SW.
	Over rolling grass land.

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
84.84	<p>The cor. of secs. 17, 18, 20 and 21, monumented with an iron post, 2 ins. diam., firmly set, projecting 10 ins. above the ground, with brass cap mkd. PFM T20N R25E S17 S16 S20 S21 1882 1938.</p> <p>Scattered remains of a mound of stone, N. of cor., 3 ft. base, 1/2 ft. high.</p> <p>Add the marks 1993 to the brass cap.</p> <p>Cor. is located in a mesh and 2 strand barbed wire fence, bears E. and W., and is WNW., 5 lks. of an angle point in the same fence, extend E. and W., and is S., 42 lks. of a bladed dirt road, 18 lks. wide, bears ESE. curving easterly and WNW.</p>
	<p>From the cor. of secs. 15, 16, 21 and 22.</p> <p>N. 82°31' W., bet. secs. 16 and 21.</p> <p>Over sand bars and barren river bottom.</p>
4.90	<p>Point for a witness point, on line bet. secs. 16 and 21.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WF T20N R25E S16 ----- S21 1993</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>
	<p>Cor. is located in a 5 strand barbed wire fence, bears E. and W., and is W., 3 lks. of an iron brace post, 3 ins. diam. of a suspension fence across Dead River, bears ENE.</p>
8.15	<p>Right bank of the Dead River, 3 ft. high, bears N. and S., ascend over rolling grass and desert land.</p>
38.38	<p>The 1/4 sec. cor. of secs. 16 and 21, monumented with an iron post, 1 in. diam., firmly set, projecting 16 ins. above the ground, with brass cap mkd. PFM 1/4 S16 S21 1882 1938.</p> <p>Add the marks T20N R25E 1993. to the brass cap.</p>

## BOOK 54 65

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Cor. is located in a mesh and 2 strand barbed wire fence, bears E. and W., and is S., 15 lks. of a bladed dirt road, bears E. and W.
	N. 82°32' W., beginning new measurement.
	Ascend over rolling barren land.
0.05	Gulch, 20 lks. wide, 3 ft. deep, drains S.
38.86	The cor. of secs. 16, 17, 20 and 21.
	<p>From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of Tp., monumented with an iron post, 2 ins. diam., firmly set, projecting 5 ins. above the ground, with brass cap mkd. T20N R25E S31 S32 S6 S5 T19N 1887.</p> <p>Add the marks 1993 to the brass cap.</p> <p>Cor. is located on nearly level grass land, S., 53 lks. of a barbed wire fence, bears E. and W.</p> <p>N. 5°19' E. bet., secs. 31 and 32.</p> <p>Ascend over nearly level grass land.</p>
19.00	Old Navajo trail, bears NNE. and SSW.
40.40	Point for the 1/4 sec. cor. of secs. 31 and 32, at proportionate dist.; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T20N R25E 1/4 S31   S32 1993</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
	Set a steel fence post near the cor.
	Cor. is located on nearly level grass land and W., 330 lks. of an abandoned barbed wire fence, bears N. and S.
69.69	Old abandoned fence, along the south right-of-way of Highway No. 66, bears ENE. and WSW.

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS									
70.45	Center of Old Highway No. 66, 150 lks. wide, bears ENE. and WSW.								
71.20	A mesh and 2 strand barbed wire fence, bears ENE. and WSW.								
80.30	<p>The cor. of secs. 29, 30, 31 and 32, monumented by person(s) unknown with an iron pipe, 20 ins. long, 2 1/2 ins. diam., firmly set, 15 ins. in the ground. This position has long been recognized by land owners and utilized by local land surveyors as the corner and is accepted as the best evidence of the original cor.</p> <p>At the cor. point.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <table border="1" data-bbox="855 821 1004 978" style="margin-left: auto; margin-right: auto;"> <tr> <td>T20N</td> <td>R25E</td> </tr> <tr> <td>S30</td> <td>S29</td> </tr> <tr> <td>S31</td> <td>S32</td> </tr> <tr> <td colspan="2" style="text-align: center;">1993</td> </tr> </table> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the iron pipe alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on nearly level grass land.</p>	T20N	R25E	S30	S29	S31	S32	1993	
T20N	R25E								
S30	S29								
S31	S32								
1993									
39.32	<p>From the cor. of secs. 28, 29, 32 and 33.</p> <p>N. 88°13' W. bet. secs. 29 and 32.</p> <p>Ascend over rolling grass land.</p> <p>The 1/4 sec. cor. of secs. 29 and 32, monumented by person(s) unknown with a juniper post, 84 ins. long, 8 ins. diam., firmly set, 30 ins. in the ground, no visible original mks. This position has long been recognized by land owners and utilized by local land surveyors as the corner and is accepted as the best evidence of the original cor.</p> <p>At the cor. point.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>								

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T20M R25E S29 1/4 — S32 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the juniper post alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located S., 200 lks. of Old Highway No. 66, on grassy southeasterly slope, and is in the projection of a 5 strand barbed wire fence extending N. from the N. side of the road.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 88°21' W., beginning new measurement.</p> <p>Ascend over rolling grass land.</p>
8.75	Center of Old Highway No. 66, 150 lks. wide, bears ENE. and WSW.
11.70	A mesh and 2 strand barbed wire fence, bears ENE. and WSW.
	Over nearly level grass land.
40.34	The cor. of secs. 29, 30, 31 and 32.
	S. 89°56' W., bet. secs. 30 and 31.
	Ascend over rolling grass land.
43.87	Point for the 1/4 sec. cor. of secs. 30 and 31, at proportionate dist.; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T20M R25E S30 1/4 — S31 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Cor. is located on nearly level grass land.
63.00	A mesh and 2 strand barbed wire fence, bears SSE. and NNW.
64.00	Center of a stock pond, Alley Way Tank, approximately 1 acre, bears N., 60 lks.
67.80	A mesh and 2 strand barbed wire fence, bears ENE. and WSW.
85.99	The cor. of secs. 25, 30, 31 and 36, on the W. bdy. of Tp., hereinbefore described.
	From the cor. of secs. 29, 30, 31 and 32.
	N. 0°17' E., bet. secs. 29 and 30.
	Ascend over rolling grass land.
39.95	Point for the 1/4 sec. cor. of secs. 29 and 30, at proportionate dist.; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T20N R25E 1/4 S30   S29 1993</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
	Set a steel fence post near the cor.
	Cor is located on nearly level grass land.
79.90	The cor. of secs. 19, 20, 29 and 30, monumented by person(s) unknown with a broken iron pipe, 12 ins. long, 2 1/2 ins. diam., firmly set, 6 ins. in the ground. This position has long been recognized by land owners and utilized by local land surveyors as the corner and is accepted as the best evidence of the original cor.
	At the cor. point.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.

## BOOK 54 65

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS											
	<table border="1"> <tr> <td>T20N</td> <td>R25E</td> </tr> <tr> <td>S19</td> <td>S20</td> </tr> <tr> <td>S30</td> <td>S29</td> </tr> <tr> <td colspan="2" style="text-align: center;">1993</td> </tr> </table>	T20N	R25E	S19	S20	S30	S29	1993			
T20N	R25E										
S19	S20										
S30	S29										
1993											
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the iron pipe alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on gentle southerly slope of rolling grass land.</p>										
	<p>From the cor. of secs. 20, 21, 28 and 29.</p> <p>N. 89°57' W., bet. secs. 20 and 29.</p> <p>Ascend over rugged broken barren hills.</p>										
6.65	Rim of plateau, west of Dead River valley, over rolling grass land.										
40.02	<p>Point for the 1/4 sec. cor. of secs. 20 and 29, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>										
	<table border="1"> <tr> <td>T20N</td> <td>R25E</td> </tr> <tr> <td></td> <td>S20</td> </tr> <tr> <td></td> <td>1/4 —</td> </tr> <tr> <td></td> <td>S29</td> </tr> <tr> <td colspan="2" style="text-align: center;">1993</td> </tr> </table>	T20N	R25E		S20		1/4 —		S29	1993	
T20N	R25E										
	S20										
	1/4 —										
	S29										
1993											
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on gentle rolling grass land.</p> <p>Ascend over gentle rolling grass land.</p>										
80.04	The cor. of secs. 19, 20, 29 and 30.										
	N. 86°36' W., bet. secs. 19 and 30.										

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Ascend over rolling grass land.
43.44	Point for the 1/4 sec. cor. of secs. 19 and 30, at proportionate dist.; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T20N R25E S19 1/4 — S30 1993</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
	Set a steel fence post near the cor.
	Cor. is located on a gentle southeasterly slope on rolling grass land.
	Ascend over rolling grass land.
85.07	The cor. of secs. 19, 24, 25 and 30, on the W. bdy. of Tp., hereinbefore described.
	From the cor. of secs. 19, 20, 29 and 30.
	N. 2°27' W., bet. secs. 19 and 20.
	Ascend over rolling grass land.
36.45	Rim of mesa, descend over broken and rolling hills.
41.56	Point for the 1/4 sec. cor. of secs. 19 and 20, at proportionate dist.; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T20N R25E 1/4 S19   S20 1993</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
	Set a steel fence post near the cor.

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Cor. is located on W. slope of an open valley, at the E. end of small spur, bears E. and W.</p>
	<p>Descend across rolling grassy valley floor.</p>
65.55	<p>Toe of rugged barren hills, ascend over southeasterly slope.</p>
83.12	<p>The cor. of secs. 17, 18, 19 and 20, monumented with an iron post, 2 ins. diam., firmly set, projecting 7 ins. above the ground, with brass cap mkd. PFNM T20N R25E S18 S17 S19 S20 1882 1938.</p> <p>Add the marks 1993 to the brass cap.</p> <p>Cor. is located in a mesh and 2 strand barbed wire fence, bears E. and W., and is S., 20 lks. of a bladed dirt road, 20 lks. wide, bears ENE. and W.</p>
	<hr/> <p>From the cor. of secs. 16, 17, 20 and 21.</p> <p>N. 87°56' W., bet. secs. 17 and 20.</p> <p>Ascend over broken barren and desert land.</p>
4.55	<p>Ridge, bears NNE. and SSW., ascend over broken and rolling land.</p>
42.18	<p>The 1/4 sec. cor. of secs. 17 and 20, monumented with an iron post, 1 in. diam., firmly set, projecting 5 ins. above the ground, with brass cap mkd. PFNM 1/4 S17 S20 1882 1938.</p> <p>Add the marks T20N R25E 1993 to the brass cap.</p> <p>Cor. is located S., 11 lks. of a mesh and 2 strand barbed wire fence, bears E. and W., and is S., 20 lks. of a bladed dirt road, 20 lks. wide, bears E. and W., and is N., 25 lks. of the track road, bears ENE. curving southeasterly.</p>
	<hr/> <p>S. 85°08' W., beginning new measurement.</p> <p>Ascend over broken and barren land.</p>
8.55	<p>Center of a stock pond, Big Tank, approximately 2 acres, bears S., 5 chs. dist.</p>
35.93	<p>The cor. of secs. 17, 18, 19 and 20.</p>
	<hr/> <p>N. 84°59' W., bet. secs. 18 and 19.</p>

## BOOK 5465

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Ascend over rolling grass land.
40.78	The 1/4 sec. cor. of secs. 18 and 19, monumented with an iron post, 1 in. diam., firmly set, projecting 7 ins. above the ground, with brass cap mkd. PFM 1/4 S18 S19 1882 1938.
	Add the marks T20N R25E 1993 to the brass cap.
	Cor. is located in a mesh and 2 strand barbed wire fence, bears E. and W., and is N., 20 lks. of a track road, 15 lks. wide, bears E. and W., and is S., 20 lks. of a bladed dirt road, 20 lks. wide, bears E. and W.
	N. 84°58' W., beginning new measurement.
	Ascend over gentle rolling grass land.
39.29	The cor. of secs. 13, 18, 19 and 24, on the W. bdy. of Tp., hereinbefore described.
	Subdivision of Section 28, T. 20 N., R. 25 E., Gila and Salt River Mer., Arizona.
	From the 1/4 sec. cor. of secs. 28 and 33.
	N. 0°40' W., on the N. and S. center line of sec. 28.
11.15	A mesh and 2 strand barbed wire fence, bears E., curving northeasterly and W.
11.90	Center of Old Highway No. 66, 50 lks. wide, bears N. 88°E., curving northeasterly and S. 88°W., curving westerly.
12.30	An abandoned fence, generally parallels road.
40.91	Point for the center 1/4 sec. cor. of sec. 28, at intersection with the E. and W. centerline.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.
	T20N R25E C1/4 S28 1993
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.

## BOOK 5465

Subdivision of Section 28,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Set a steel fence post near the cor.
	Corner is located N. 40°10' E., 1.37 chs. of the intersection of fences, extending E., W. and S.
66.40	Left bank of the Dead River, 5 ft. high, bears ENE. and WSW.
71.55	Right bank of the Dead River, 6 ft. high, bears ENE. and WSW.
80.87	The 1/4 sec. cor. of secs. 21 and 28.
<hr/>	
	From the 1/4 sec. cor. of secs. 27 and 28.
	N. 89°29' W., on the E. and W. center line of sec. 28.
	Descend over gentle rolling grass land.
4.65	Rim of mesa above Dead River valley, descend over rolling hills.
31.25	Trailroad, bears N. and S.
40.23	The center 1/4 sec. cor. of sec. 28.
55.78	Point for A.P. 1. of the metes-and-bounds survey in sec. 28, hereinafter described.
56.55	Left bank of the Dead River, 5 ft. high, bears NNE. and SSE.
64.40	Right bank of the Dead River, 4 ft. high, bears NNE. and SSW.
65.44	Point for A.P. 2. of the metes-and-bounds survey in sec. 28 hereinafter described.
	Ascend over broken and rolling grass land.
69.88	A 4 strand barbed wire fence extends NNE., a dilapidated 4 strand barbed wire fence extends SE. and an abandoned fence extends WNW.
79.09	The 1/4 sec. cor. of secs. 28 and 29.
<hr/>	
A Metes-and-Bounds Surveys in Section 28, T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona.	
<hr/>	
	From the point for A.P. 1, on the E. and W. center line of sec. 28.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.

## BOOK 5465

A Metes-and Bounds Survey in Section 28,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T20N R25E ----- AP1 / S28 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located in an abandoned fence, bears E. and W.</p> <p>N. 89°29' W., along line 1-2, identical with the E. and W. center line of sec. 28.</p>
9.66	<p>Point for A.P. 2, on the E. and W. center line of sec. 28.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T20N R25E ----- S28 / AP2 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located in an abandoned fence, bears E. and W.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 49°01' W., along line 2-3.</p>
8.39	<p>Point for A.P. 3.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T20N R25E ----- S28 / AP3 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>

## BOOK 5465

A Metes-and Bounds Survey in Section 28,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a steel fence post near the cor.</p> <p>Cor. is located on a sand bar on the right bank of Dead River, 3 ft. high, bears NE. and SW.</p> <hr/> <p>S. 5°37' W., along line 3-4.</p>
10.18	<p>Point for A.P. 4.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T20N R25E</p> <p>S28 \ AP4</p> <p>1993</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on right bank of Dead River, 5 ft. high, bears SE. and NW.</p> <hr/> <p>S. 27°12' E., along line 4-5.</p>
10.90	<p>Center of Old Highway No. 66, 50 lks. wide, bears E. and W.</p>
11.70	<p>Point for A.P. 5.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T20N R25E</p> <p>S28 \ AP5</p> <p>1993</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>

## BOOK 54 65

A Metes-and Bounds Survey in Section 28,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
12.10	<p>Cor. is located SW., 5 lks. of a concrete abutment of the bridge across Dead River at the right bank, on the south side of Old Highway No. 66,</p> <hr/> <p>S. 36°03' W., along line 5-6.</p> <p>Point for A.P. 6.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T20N R25E</p> <p>S28 / AP6</p> <p>1993</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on a sand bar on the right bank of Dead River, 7 ft. high, bears NE. and SW.</p> <hr/>
5.51	<p>S. 58°30' W., along line 6-7.</p> <p>Point for A.P. 7, on the line bet. secs. 28 and 29.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T20N R25E</p> <p>S28</p> <p>S29   AP7</p> <p>1993</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on a sand bar W., 76 lks. above the right bank of Dead River, 3 ft. high, bears NNE. and SSW.</p> <hr/>


## BOOK 5465

A Metes-and Bounds Survey in Section 28,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	S. 0°14' W., along line 7-8, identical with the line bet. secs. 28 and 29.
1.10	Point for A.P. 8, identical with the cor. of secs. 28, 29, 32 and 33, hereinbefore described.
	<hr/> S. 88°07' E., along line 8-9, identical with the line bet. secs. 28 and 33.
7.00	Point for A.P. 9, on the line bet. secs. 28 and 33.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;"> <p>T20N R25E</p> <p>AP9 / S28</p> <hr style="width: 50px; margin: 0 auto;"/> <p>S33</p> <p>1993</p> </div>
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
	Set a steel fence post near the cor.
	Cor. is located E., 60 lks. of the left bank of the Dead River, 6 ft. high, bears N. and S.
	<hr/> N. 34°30' E., along line 9-10.
10.14	Point for A.P. 10.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;"> <p>T20N R25E</p> <p>AP10 / S28</p> <hr style="width: 50px; margin: 0 auto;"/> <p>1993</p> </div>
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
	Set a steel fence post near the cor.

## BOOK 5465

A Metes-and Bounds Survey in Section 28,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Cor. is located on a sand bar E., 38 lks. of the left bank of Dead River, 10 ft. high, bears MNE. and SSW.</p> <hr/>
	<p>N. 21°50' E., along line 10-11.</p>
6.20	<p>A mesh and 2 strand barbed wire fence, bears E. and W.</p>
6.90	<p>Center of Old Highway No. 66, 50 lks. wide, bears E. and W.</p>
7.70	<p>An abandoned barbed wire fence, bears E. and W.</p>
9.67	<p>Point for A.P. 11.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
	<div style="text-align: center;"> <p>T20N R25E</p>  <p>AP11 S28</p> <p>1993</p> </div>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
	<p>Set a steel fence post near the cor.</p>
	<p>Cor. is located on a sand bar, E. 40 lks. of the left bank of the Dead River, 10 ft. high, bears S. curving northwesterly and MNW. curving southwesterly.</p> <hr/>
	<p>N. 0°57' W., along line 11-12.</p>
6.03	<p>Point for A.P. 12.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
	<div style="text-align: center;"> <p>T20N R25E</p>  <p>AP12 S28</p> <p>1993</p> </div>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
	<p>Set a steel fence post near the cor.</p>

## BOOK 5465


A Metes-and Bounds Survey in Section 28,  
T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	<p>Cor. is located on a sand bar on the left bank of the Dead River, 5 ft. high, bears NNE. and SSW.</p> <hr/> <p>N. 23°33' E., along line 12-1.</p>
18.11	<p>A.P. 1, and point of beginning.</p> <hr/> <p style="text-align: center;">GENERAL DESCRIPTION</p> <p>The land encompassed in the survey is located five miles west of a small town called Navajo, Arizona. The south side of the township can be reached by Interstate Highway No. 40 to the Pinta exit. The northeast portion of the township can be reached by going north from the Pinta interchange on two dirt roads. The south end of the township is access by Old Highway No. 66. The northwest quadrant of the township is enclosed by the Petrified Forest National Monument, there is no access from the south or east.</p> <p>The elevation of the township is 5,700 feet above sea level with areas of +/- 200 feet. The township is drained by the Dead River which flows diagonally from the center north of the township through the center of the southwest quadrant.</p> <p>There are scattered junipers throughout the northeast quadrant, although the area is mostly open rolling desert with sage and grass for cattle.</p> <p>The area has scatted petroglyphs and petrified wood, many on the plateaus above the Dead River valley.</p> <p>The magnet declination as take from the U.S.G.S. Quadrangle map "PINTA ARIZ," is 13 1/2°E.</p> <hr/> <p style="text-align: center;">GEODETIC POSITIONS</p> <p>The following information is provided for informational purposes only.</p> <p>The geographic position of the following points were determined by differential positioning using Ashtech M series Geodetic units. U.S. Geological Survey triangulation stations "DEAD", "AA1" and "PAUL" were used as control stations.</p>

## BOOK 5465

T.20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS

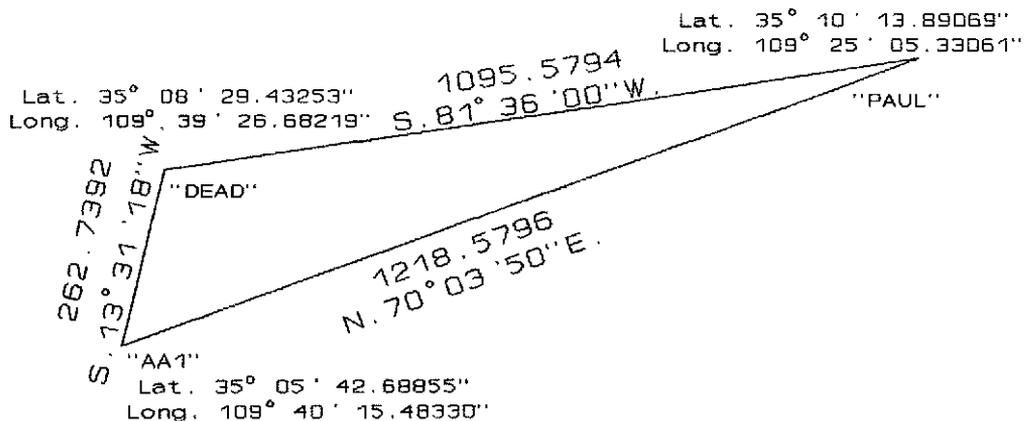

Coordinates refer to the top of found monuments which were used as controlling point for the proceeding survey.

Station	Latitude	Longitude	NAD 27
---------	----------	-----------	--------

## MONUMENTS ALONG THE FIFTH STANDARD PAR. N.

1/4 COR SEC 31	$35^{\circ} 10' 11.550'' N$	$109^{\circ} 37' 26.085'' W$	
T21N, R25&26E	$35^{\circ} 10' 11.454'' N$	$109^{\circ} 37' 57.749'' W$	
1/4 COR SEC 36	$35^{\circ} 10' 11.339'' N$	$109^{\circ} 38' 28.992'' W$	
SEC 35 & 36	$35^{\circ} 10' 11.284'' N$	$109^{\circ} 39' 01.113'' W$	
1/4 COR SEC 35	$35^{\circ} 10' 11.205'' N$	$109^{\circ} 39' 32.800'' W$	
SEC 34 & 35	$35^{\circ} 10' 11.115'' N$	$109^{\circ} 40' 04.477'' W$	
1/4 COR SEC 34	$35^{\circ} 10' 11.032'' N$	$109^{\circ} 40' 36.145'' W$	
CC SEC 3 & 4, T20N R25E	$35^{\circ} 10' 12.736'' N$	$109^{\circ} 40' 52.089'' W$	
SEC 33 & 34	$35^{\circ} 10' 10.935'' N$	$109^{\circ} 41' 07.809'' W$	

## MONUMENTS ALONG THE EAST BOUNDARY

T19 & 20N, R25 & 26E	$35^{\circ} 04' 57.259'' N$	$109^{\circ} 37' 42.113'' W$	
1/4 COR SEC 31 & 36	$35^{\circ} 05' 23.457'' N$	$109^{\circ} 37' 42.091'' W$	
SEC 25, 30, 31 & 36	$35^{\circ} 05' 49.654'' N$	$109^{\circ} 37' 42.076'' W$	
1/4 COR SEC 25 & 30	$35^{\circ} 06' 15.771'' N$	$109^{\circ} 37' 41.994'' W$	

## BOOK 5465

T.20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS	MONUMENTS ALONG THE SOUTH BOUNDARY	
	SEC 1, 2, 35 & 36	35°04'57.507" N 109°38'46.627" W
	SEC 2, 3, 34 & 35	35°04'57.750" N 109°39'51.142" W
	SEC 3, 4, 33 & 34	35°04'57.998" N 109°40'55.660" W
	SEC 4, 5, 32 & 33	35°04'58.249" N 109°42'00.176" W
	SEC 5, 6, 31 & 32	35°04'58.502" N 109°43'04.698" W
	T19 & 20N, R24 & 25E	35°04'58.753" N 109°44'08.373" W
	MONUMENTS ALONG THE WEST BOUNDARY	
	1/4 COR SEC 31 & 36	35°05'25.748" N 109°44'05.436" W
	SEC 25, 30, 31 & 36	35°05'50.936" N 109°44'07.028" W
	1/4 COR SEC 25 & 30	35°06'18.691" N 109°44'06.851" W
	SEC 19, 24, 25 & 30	35°06'46.440" N 109°44'05.851" W
	1/4 COR SEC 19 & 24	35°07'14.160" N 109°44'05.303" W
	SEC 13, 14, 18 & 19	35°07'41.922" N 109°44'04.614" W
	MONUMENTS ALONG THE SOUTH AND EAST BOUNDARY OF THE PETRIFIED FOREST NATIONAL MONUMENT	
	1/4 COR SEC 18 & 19	35°07'39.671" N 109°43'33.524" W
	SEC 17, 18, 19 & 20	35°07'37.347" N 109°43'01.253" W
	1/4 COR SEC 17 & 20	35°07'39.334" N 109°42'32.811" W
	SEC 16, 17, 20 & 21	35°07'38.344" N 109°41'59.326" W
	1/4 COR SEC 16 & 22	35°07'35.048" N 109°41'28.714" W
	SEC 15, 16, 21 & 22	35°07'34.802" N 109°40'51.786" W
	1/4 COR SEC 15 & 16	35°07'32.817" N 109°40'14.899" W
	SEC 9, 10, 15 & 16	35°08'22.903" N 109°41'07.070" W
	1/4 COR SEC 9 & 10	35°08'49.806" N 109°41'06.735" W
	SEC 3, 4, 9 & 10	35°09'16.757" N 109°41'06.414" W

## BOOK 54 65

T.20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS			
	1/4 COR SEC 3 & 4	35°09'41.685" N	109°41'05.450" W
	SUBDIVISIONAL CORNERS		
	SEC 25, 26, 35 & 36	35°05'50.232" N	109°38'45.286" W
	SEC 23, 24, 25 & 26	35°06'42.370" N	109°38'45.332" W
	SEC 13, 14, 23 & 24	35°07'34.487" N	109°38'45.312" W
	SEC 11, 12, 13 & 14	35°08'25.774" N	109°38'45.164" W
	SEC 1, 2, 11 & 12	35°09'17.887" N	109°38'45.107" W
	SEC 26, 27, 34 & 35	35°05'50.297" N	109°39'48.747" W
	SEC 22, 23, 26 & 27	35°06'42.455" N	109°39'48.477" W
	SEC 14, 15, 22 & 23	35°07'34.607" N	109°39'48.363" W
	SEC 10, 11, 14 & 15	35°08'27.760" N	109°39'49.494" W
	SEC 2, 3, 10 & 11	35°09'18.401" N	109°39'48.864" W
	SEC 27, 28, 33 & 34	35°05'50.529" N	109°40'52.364" W
	SEC 21, 22, 27 & 28	35°06'42.607" N	109°40'52.027" W
	SEC 15, 16, 21 & 22	35°07'31.788" N	109°40'58.488" W
	SEC 28, 29, 32 & 33	35°05'50.954" N	109°41'55.130" W
	1/4 COR SEC 28 & S33	35°05'50.107" N	109°41'23.765" W
	1/4 COR SEC 28 & 29	35°06'17.014" N	109°41'55.001" W
	SEC 20, 21, 28 & 29	35°06'43.103" N	109°41'54.872" W
	1/4 COR SEC 21 & 28	35°06'42.800" N	109°41'24.503" W
	SEC 29, 30, 31 & 32	35°05'51.007" N	109°42'58.748" W
	SEC 19, 20, 29 & 30	35°06'43.149" N	109°42'58.436" W
	ANGLE POINTS ON THE METES-AND-BOUNDS SURVEY IN SECTION 28		
	AP2	35°06'16.706" N	109°41.44.486" W
	AP3	35°06'13.346" N	109°41'49.193" W

## BOOK 5465

T.20 N., R. 25 E., Gila and Salt River Meridian, Arizona

CHAINS			
	AP4	35°06'06.736" N	109°41'49.984" W
	AP5	35°05'59.953" N	109°41'45.735" W
	AP6	35°05'53.557" N	109°41'51.391" W
	AP7	35°05'51.677" N	109°41'55.123" W
	AP9	35°05'50.804" N	109°41'49.579" W
	AP10	35°05'56.259" N	109°41'45.018" W
	AP11	35°06'02.117" N	109°41'42.162" W
	AP12	35°06'06.052" N	109°41'42.241" W



## BOOK 5465

## CERTIFICATE OF SURVEY

I, Dean E. Wiese, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of Special Instructions bearing date of the 12 day of January, 1987, and Supplemental Special Instructions bearing date of the 29 day of February, 1988, I have dependently resurveyed the Fifth Standard Parallel North (north boundary) through a portion of Range 25 East, portions of the east and west boundaries and a portion of the subdivision lines, subdivided section 28 and executed a metes-and-bounds survey in section 28, Township 20 North, Range 25 East, of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

7/26/96  
(Date)

Dean E. Wiese  
(Cadastral Surveyor)

## CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT  
Arizona State Office  
Phoenix, Arizona

The foregoing field notes of the dependent resurvey of the Fifth Standard Parallel North (north boundary) through a portion of Range 25 East, portions of the east and west boundaries and a portion of the subdivisional lines, the subdivision of section 28 and a metes-and-bounds survey in section 28, Township 20 North, Range 25 East, Gila and Salt River Meridian, Arizona, executed by Dean E. Wiese, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

AUG 22 1996  
(Date)

Paul C. Wilson  
(Acting Chief Cadastral Surveyor of Arizona)

~~CERTIFICATE OF TRANSCRIPT~~

~~I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in T. 20 N., R. 25 E., Gila and Salt River Meridian, Arizona, is a true copy of the original field notes.~~

~~\_\_\_\_\_  
(Date)~~

~~\_\_\_\_\_  
(Acting Chief Cadastral Surveyor of Arizona)~~