

ORIGINAL

1 BOOK 5485

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES
OF THE

DEPENDENT RESURVEY OF

A PORTION OF THE SEVENTH AUXILIARY GUIDE MERIDIAN EAST (WEST BOUNDARY)

AND A PORTION OF THE

SUBDIVISIONAL LINES

AND

THE SUBDIVISION OF SECTION 18

IN TOWNSHIP 22 NORTH, RANGE 29 EAST

Of the Gila and Salt River Meridian,
In the State of Arizona

EXECUTED BY
Joe R. Salazar, Cadastral Surveyor

Under Special Instructions dated January 12, 1987, approved February 23, 1987, and Supplemental Special Instructions dated and approved February 16, 1993, which provided for the surveys included under Group Number 685 and assignment instructions dated April 13, 1993.


Survey commenced April 13, 1993

Survey completed June 10, 1993

2
BOOK 5485

INDEX DIAGRAM

TOWNSHIP 22 NORTH, RANGE 29 EAST,

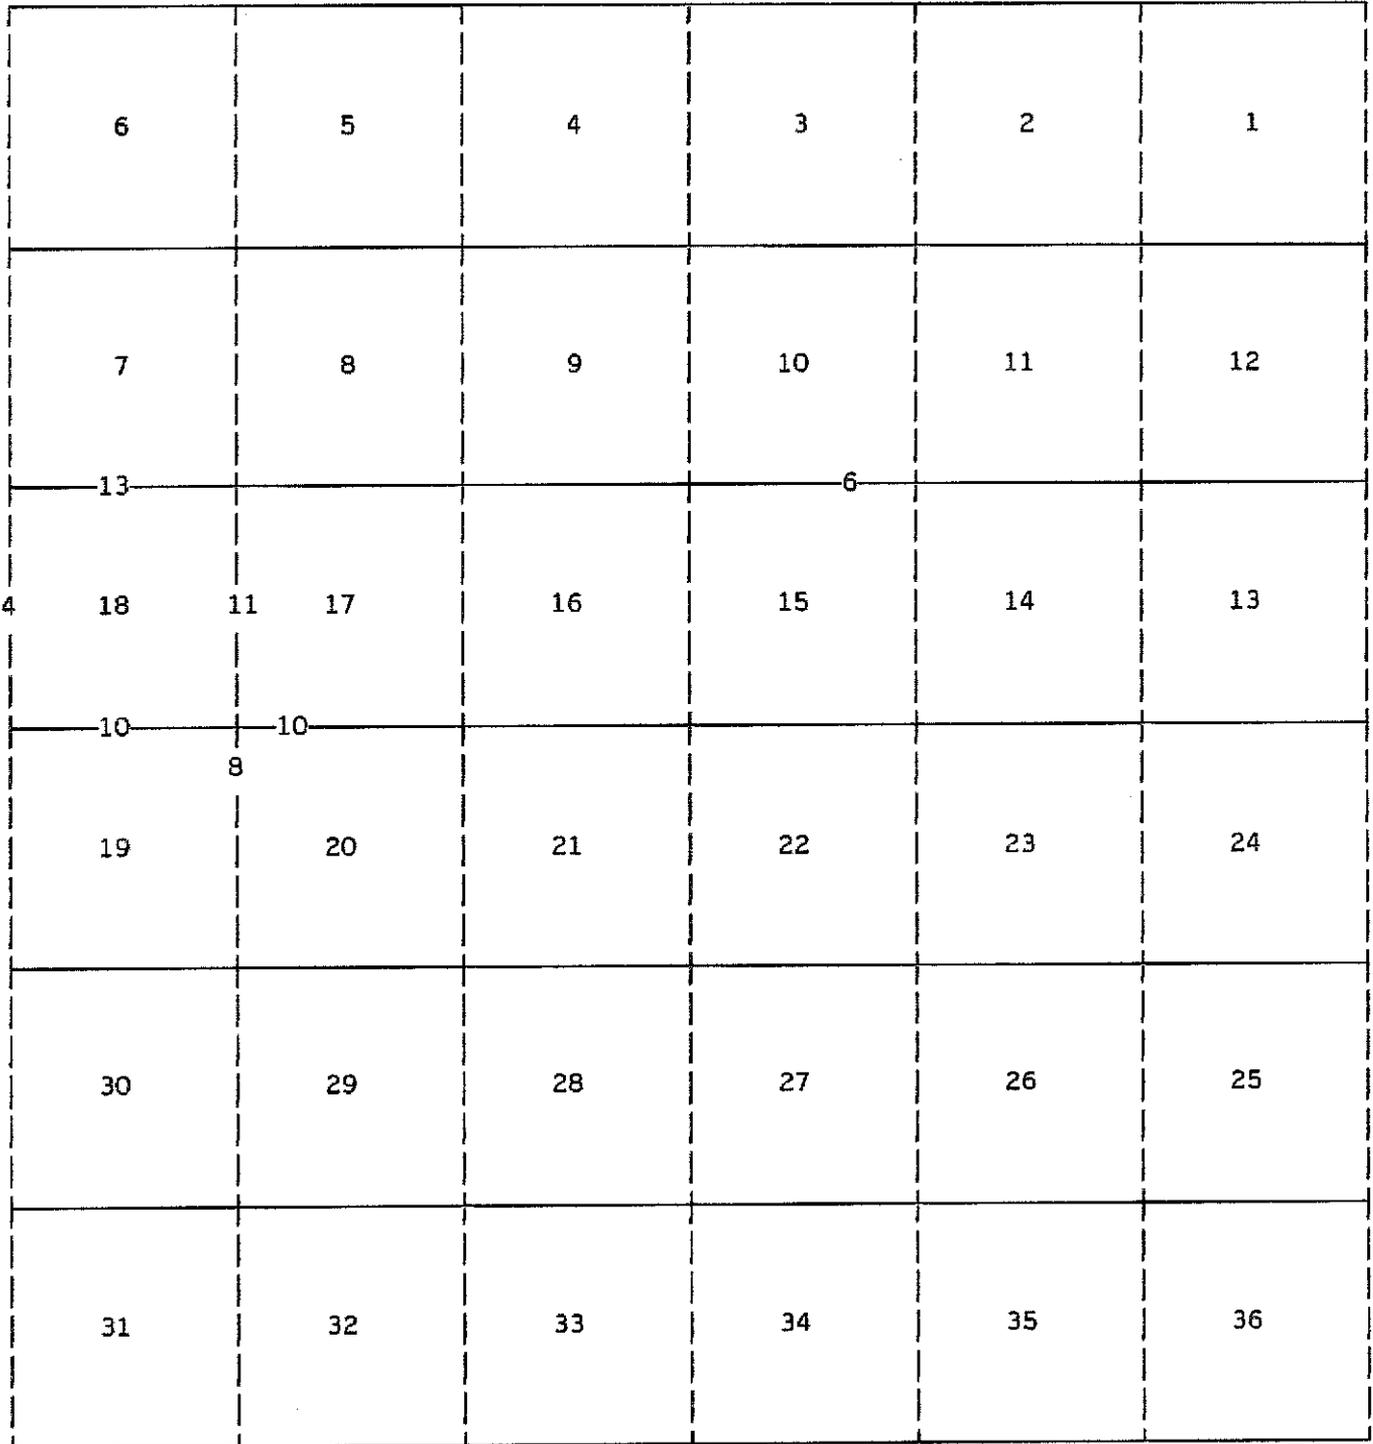

BOOK 5485

T. 22 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS

The following field notes are those of the dependent resurvey of a portion of the Seventh Auxiliary Guide Meridian East (west boundary) and a portion of the subdivisional lines and the subdivision of section 18, in Township 22 North, Range 29 East, Gila and Salt River Meridian, Arizona.

The township boundaries and subdivisional lines were surveyed by W. B. Fitzgerald, in 1882. The north boundary was dependently resurveyed by Sidney E. Blout, in 1920. The cor. of secs. 19, 24, 25 and 30 on the W. bdy. of the Tp. was remonumented by William P. Carpender, Stephen J. Malloy and Kenneth W. Bays, in 1987-93.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, the Special Instructions dated January 12, 1987, and the Supplemental Special Instructions dated February 16, 1993, for Group No. 685, Arizona.

Preliminary to the resurvey, the lines of the original survey were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The directions of all lines were determined by direct hour angle observations on the sun, and refer to the true meridian. Distances and angles were measured with a Pentax PTS 3 total station instrument.

The geographic position of the cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp., as determined from a tie made to U.S. Geological Survey triangulation station "LOST 1959", is as follows:

Latitude: 35°17'51.49" N. Longitude: 109°18'52.55" W. NAD27

The mean magnetic declination, as taken from quadrangle map BURNTWATER WASH, ARIZ., published in 1971 by U.S. Geological Survey, is 13 1/2° E.

Dependent Resurvey of
a Portion of the Seventh Guide Meridian East (West Boundary),
T. 22 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS

Restoring the survey executed by
W. R. Fitzgerald, in 1882

Beginning at the cor. of secs. 13, 18, 19 and 24 on the W. bdy. of the Tp., monumented with a sandstone, 18 x 12 x 3 ins., firmly set, projecting 8 ins. above ground, with no visible marks.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T22N	
R28E	R29E
S13	S18

S24	S19
1993	

from which

A juniper, 14 ins. diam., bears N. 24 1/4° W. 62 lks. dist., mkd. T22N R28E S13 BT.

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Bury the sandstone alongside the stainless steel post.

Set a steel fence post alongside the cor.

Cor. is located 2 ft. W. of corner of abandon barbed wire fences, bears N. and E.

From this cor. point, the cor. of secs. 19, 24, 25 and 30 on the W. bdy. of Tp., bears S. 1° 31' E., 80.58 chs. dist., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd. T22N R28E R29E S19 S24 S25 S30 1991.

From this same cor. point, U. S. Coast and Geodetic Survey triangulation station "LOST 1959", bears S. 37°28'21" W. (forward bearing), 175.71 chs. dist., monumented with a brass disk, 4 ins. diam., set flush in a concrete post 12 ins. square, projecting 10 ins. above the ground, with top mkd. LOST 1959 and a triangle in the center.

N. 0°07' E., bet. secs. 13 and 18 on the W. bdy. of Tp.

Over rolling land, through scattered juniper and piñon pine.


Dependent Resurvey of
a Portion of the Seventh Guide Meridian East (West Boundary),
T. 22 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
14.40	<p>Point for a witness point on line bet. secs. 13 and 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> WP T22N R28E R29E S13 S18 1993 </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>Cor. is located on a ridge, bears E. and W.</p>
39.71	<p>Point for 1/4 sec. cor. of secs. 13 and 18, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> T22N 1/4 R28E R29E S13 S18 1993 </div> <p>from which</p> <p style="padding-left: 40px;">A piñon, 10 ins. diam., bears N. 27 1/4° E., 199 lks. dist., mkd. 1/4 S18 BT.</p> <p style="padding-left: 40px;">A juniper, 6 ins. diam., bears N. 20 1/2° W., 71 lks. dist., mkd. 1/4 S13 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>Cor. is located 5.5 ft. W. of abandon barbed wire fence, bears N. and S.</p>
40.90	<p>Draw, 20 lks. wide, course NNE.</p>
79.42	<p>Point for the cor. of secs., 7, 12, 13 and 18, at proportionate dist.; there is no remaining evidence of the original cor.</p>

Dependent Resurvey of
 a Portion of the Seventh Guide Meridian East (West Boundary),
 T. 22 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.



from which

A juniper, 8 ins. diam., bears N. 0 1/2° E., 45.5 lks. dist., mkd. T22N R29E S7 BT.

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Set a steel fence post alongside the cor.

From this cor. point, the cor. of Tps. 22 and 23 N., Rs. 28 and 29 E. bears N. 0° 07' E., 158.84 chs. dist., monumented with an iron post, 3 ins. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd. T23N R28E R29E S36 S31 S1 S6 T22N 1920.

Add the date 1993 to the brass cap

Dependent Resurvey of a Portion of the Subdivisional Lines,
 T. 22 N., R. 29 E., Gila and Salt River Meridian, Arizona

Restoring the survey executed by
 W. R. Fitzgerald, in 1882

From the cor. of secs. 10, 11, 14 and 15, monumented with a wooden post, 30 ins. long, 4 ins. diam., firmly set, projecting 24 ins. above ground, faintly mkd. with 4 notches on the S. edge.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 22 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS											
	<table style="margin: auto; border-collapse: collapse;"> <tr><td style="padding: 2px;">T22N</td><td style="padding: 2px;">R29E</td></tr> <tr><td style="padding: 2px;">S10</td><td style="padding: 2px;">S11</td></tr> <tr><td colspan="2" style="border-top: 1px solid black; padding: 2px;"></td></tr> <tr><td style="padding: 2px;">S15</td><td style="padding: 2px;">S14</td></tr> <tr><td colspan="2" style="padding: 2px;">1993</td></tr> </table>	T22N	R29E	S10	S11			S15	S14	1993	
T22N	R29E										
S10	S11										
S15	S14										
1993											
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the wooden post alongside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>From this cor. point, the cor. of secs. 14, 15, 22 and 23, bears S. 0°41' E., 78.56 chs. dist., monumented with a wooden post, 40 ins. long, 4 ins. diam., loosely set, plainly mkd. with 2 grooves on one side, and is accepted as the best available evidence of the original corner.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>										
	<table style="margin: auto; border-collapse: collapse;"> <tr><td style="padding: 2px;">T22N</td><td style="padding: 2px;">R29E</td></tr> <tr><td style="padding: 2px;">S15</td><td style="padding: 2px;">S14</td></tr> <tr><td colspan="2" style="border-top: 1px solid black; padding: 2px;"></td></tr> <tr><td style="padding: 2px;">S22</td><td style="padding: 2px;">S23</td></tr> <tr><td colspan="2" style="padding: 2px;">1993</td></tr> </table>	T22N	R29E	S15	S14			S22	S23	1993	
T22N	R29E										
S15	S14										
S22	S23										
1993											
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the wooden post alongside the stainless steel post.</p> <p>S. 89°50' W., bet. secs. 10 and 15.</p> <p>Over rolling land, along barbed wire fence line.</p>										
40.21	<p>The 1/4 sec. cor. of sec. 10 and 15, a barbed wire fence corner, extending N. and E. This is locally recognized as the cor. and is accepted as the best available evidence of the position of the original cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>										

BOOK 5485

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 22 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS

T22N R29E
S10
1/4 —
S15
1993

Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.

Set a steel fence post alongside the cor.

From the 1/4 sec. cor. of secs. 19 and 20, monumented by person(s) unknown, with a 4 x 6 in. wooden post, firmly set, projecting 4 ft. from the ground. This is locally recognized as the cor. and is accepted as the best available evidence of the position of the original cor.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T22N R29E
1/4
S19 | S20
1993

Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.

Bury the wooden post alongside the stainless steel post.

Set a steel fence post alongside the cor.

From this cor. point, the cor. of secs. 29, 30, 31 and 32, bears S. 0°05' E., 121.49 chs. dist., monumented with a sandstone, 20 x 14 x 4 ins., firmly set, projecting 12 ins. above ground, plainly mkd. with 4 notches on the E.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T22N R29E
S30 | S29
—+—
S31 | S32
1993

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 22 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS									
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the sandstone alongside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>Cor. is located on E. edge of a dirt road, bears N. and S..</p> <p>N. 0°28' E., bet. secs. 19 and 20.</p> <p>Over rolling land, through scattered juniper and piñon pine.</p>								
38.60	Toe of sandstone bluff.								
39.50	Top of sandstone bluff.								
39.67	<p>Point for the cor. of secs. 17, 18, 19 and 20, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, to bedrock, encircled with a collar of stone, 3 ft. base to top, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr> <td style="padding: 2px 5px;">T22N</td> <td style="padding: 2px 5px;">R29E</td> </tr> <tr> <td style="padding: 2px 5px;">S18</td> <td style="padding: 2px 5px;">S17</td> </tr> <tr> <td style="border-top: 1px solid black; padding: 2px 5px;">S19</td> <td style="border-top: 1px solid black; padding: 2px 5px;">S20</td> </tr> <tr> <td colspan="2" style="padding: 2px 5px;">1993</td> </tr> </table> </div> <p>from which</p> <p style="margin-left: 40px;">A piñon, 8 ins. diam., bears N. 57° E., 40.5 lks. dist., mkd. T22N R29E S17 BT.</p> <p style="margin-left: 40px;">A juniper, 14 ins. diam., bears S. 61 1/2° E., 44 lks. dist., mkd. T22N R29E S20 BT.</p> <p style="margin-left: 40px;">A juniper, 12 ins. diam., bears S. 8° W., 145 lks. dist., mkd. T22N R29E S19 BT.</p> <p style="margin-left: 40px;">A piñon, 6 ins. diam., bears N. 83 1/4° W., 67 lks. dist., mkd. T22N R29E S18 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p>	T22N	R29E	S18	S17	S19	S20	1993	
T22N	R29E								
S18	S17								
S19	S20								
1993									

10
BOOK 5485

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 22 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.73	<p>From this cor. point, the cor. of abandon barbed wire fences, extending N. and W., bears S. 13°15' W., 66 lks. dist.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 17 and 20, monumented with a sandstone, 28 x 8 x 4 ins., firmly set, projecting 14 ins. above the ground, plainly mkd. with 1/4 on the S.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R29E S17 1/4 — S20 1993</p> <p>from which</p> <p style="padding-left: 40px;">A piñon, 36 ins. diam., bears S. 14° W., 44 lks. dist., mkd. 1/4 S 20 BT.</p> <p style="padding-left: 40px;">A piñon, 30 ins. diam., bears N. 13° W., 37 lks. dist., mkd. 1/4 S17 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the sandstone alongside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>N. 89°17' W., bet. secs. 17 and 20.</p> <p>Over rolling land, through scattered juniper and piñon pine.</p> <p>The cor. of secs. 17, 18, 19 and 20.</p> <hr/>
23.31	<p>S. 89°36' W., bet. secs. 18 and 19.</p> <p>Over rolling land, through scattered juniper and piñon pine.</p> <p>Point for a witness point on line bet. secs. 18 and 19.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines
 T. 22 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">WP T22N R29E S18 — S19 1993</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
	<p>Set a steel fence post alongside the cor.</p>
35.80	<p>Spur, bears NNE and SSW.</p>
39.70	<p>Point for the 1/4 sec. cor. of secs. 18 and 19, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T22N R29E S18 1/4 — S19 1993</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
	<p>Set a steel fence post alongside the cor.</p>
53.30	<p>Draw, 1.50 chs. wide, course S.</p>
78.01	<p>The cor. of secs. 13, 18, 29 and 24, on the W. bdy. of Tp., hereinbefore described.</p>
	<hr/> <p>From the cor. of secs. 17, 18, 19 and 20.</p>
	<p>N. 0° 39' E., bet. secs. 17 and 18.</p>
	<p>Over rolling land, through dense juniper and piñon pine.</p>
11.32	<p>Point for a witness point on line bet. secs. 17 and 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 22 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.67	<p style="text-align: center;">WP T22N R29E S18 S17 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>Point for the 1/4 sec. cor. of secs. 17 and 18, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
79.34	<p style="text-align: center;">T22N R29E 1/4 S18 S17 1993</p> <p>from which</p> <p style="padding-left: 40px;">A piñon, 7 ins. diam., bears N. 64 3/4° E., 44.5 lks. dist., mkd. 1/4 S17 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>Cor. is located 34 ft. E. of abandon barbed wire fences, bears N. and S.</p> <p>Point for the cor. of secs. 7, 8, 17 and 18, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R29E S 7 S 8 ----- S18 S17 1993</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 18 ins. diam., bears S. 6° E., 81 lks. dist., mkd. X at waist height and BT at base.</p>

BOOK 5485

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 22 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS

Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.

Set a steel fence post alongside the cor.

Cor. is located 3 ft. N. of dirt road, bears E. and W.

From this cor. point, a reinforcing bar, 3/8 in. diam., firmly set, projecting 4 ins. above ground, in barbed wire fence corner, bears S. and W., with aluminum cap mkd., GREER, bears S. 47°16' W., 1.29 chs. dist. This position was established by Lacy Greer as a property cor.

From this same cor. point, the 1/4 sec. cor. of secs. 10 and 15, bears S. 89°51' E. 199.36 chs. dist., hereinbefore described.

From this same cor. point, the cor. of secs. 5, 6, 31 and 32 on the N. bdy. of Tp., bears N. 0°08' E., 158.57 chs. dist., determined from the remains of the 1920 bearing trees.

from which

A decayed piñon, 14 ins. diam., bears N. 41° E., 100.5 lks. dist., partially mkd. T29 E B (Record: 106 lks.).

A decayed piñon, 5 ins. diam., bears S. 65 1/2° E., 80 lks. dist., mkd. T22N R29E S5 BT

A decayed piñon, 10 ins. diam., bears S. 17 1/2° W., 79 lks. dist., partially mkd. T22N R29E T (Record: S. 22 1/4° W., 83 lks.).

A decayed piñon, 12 ins. diam., bears N. 63° W., 73 lks. dist., partially mkd. T23N 9E S31 BT.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T23N R29E	S31	S32
	S6	S5
T22N R29E		
1993		

S. 89°40' W., bet. secs. 7 and 18.

Over rolling land, along dirt road.

BOOK 5485

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 22 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
19.96	<p>Point for the E. 1/16 sec. cor. of secs. 7 and 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. below the surface of the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R29E S7 E 1/16 — S18 1993</p> <p>from which</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground, for a reference monument, bears N. 6°07' W., 18.0 ft. dist., with cap mkd. RM E1/16 T22N R29E 18.0 FT TO COR 1993, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>A piñon, 8 ins. diam., bears S. 3 1/2° E., 54 lks. dist., mkd. E 1/16 S18 BT.</p> <p>From this cor. point, a reinforcing bar, 3/8 in. diam., firmly set, projecting 6 ins. above ground, in barbed wire fence intersection, bears E., S. and W., bears S. 63°33' W., 1.06 chs. dist. This position was established by Lacy Greer as a property cor.</p> <p>Cor. is located in dirt road, bears E. and W.</p>
39.92	<p>Point for 1/4 sec. cor. of secs. 7 and 18, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. below the surface of the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R29E S7 1/4 — S18 1993</p> <p>from which</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground, for a reference monument, bears N. 12°50' W., 36.43 ft. dist., with cap mkd. RM 1/4 T22N R29E 36.43 FT TO COR 1993, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 22 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
78.72	<p>A piñon, 14 ins. diam., bears S. 73 1/2° W., 88.5 lks. dist., mkd. 1/4 S18 BT.</p> <p>Cor. is located in dirt road, bears E. and W.</p> <p>The cor. of secs. 7, 12, 13 and 18, on the W. bdy. of Tp., hereinbefore described.</p>
39.70	<hr/> <p style="text-align: center;">Subdivision of Section 18 T. 22 N., R. 29 E., Gila and Salt River Meridian, Arizona</p> <hr/> <p>From the 1/4 sec. cor. of secs. 18 and 19.</p> <p>N. 0°29' E., on the N. and S. center line of sec. 18.</p> <p>Over rolling land, through dense juniper and piñon pine.</p> <p>Point for the center 1/4 sec. cor. of sec. 18, at intersection with the E. and W. center line of sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22N R29E C1/4 S18 1993</p> <p>from which</p> <p>A piñon, 6 ins. diam., bears N. 28 1/2° E., 60.5 lks. dist., mkd. C1/4 S18 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p>
79.39	<p>The 1/4 sec. cor. of secs. 7 and 18.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 17 and 18.</p> <p>S. 89°38' W., on the E. and W. center line of sec. 18.</p> <p>Over rolling land, through dense juniper and piñon pine.</p>
19.91	<p>Point for the center E. 1/16 sec. cor. of sec. 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Subdivision of Section 18
T. 22 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>T22N R29E E1/16 C-----C S18 1993</p>
	<p>from which</p> <p style="padding-left: 40px;">A piñon, 18 ins. diam., bears N. 53° E., 60.5 lks. dist., mkd. CE 1/16 S18 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p>
39.82	The center 1/4 sec. cor. of sec. 18.
78.37	The 1/4 sec. cor. of secs. 13 and 18, on the W. bdy. of the Tp.
	<hr/> <p>NE 1/4 Section 18</p> <hr/>
	<p>From the center E. 1/16 sec. cor. of sec. 18.</p> <p>N. 0°34' E., on the N. and S. center line of the NE 1/4 of sec. 18.</p> <p>Over rolling land, through dense juniper and piñon pine.</p>
39.68	The E. 1/16 sec. cor. of secs. 7 and 18.
	<hr/> <p>GENERAL DESCRIPTION</p> <hr/>
	<p>The land encompassed in this survey is located about 5 miles north of Sanders, Arizona. Access is by many graded dirt roads off of Interstate Highway 40.</p> <p>The vegetation consists of juniper trees, sagebrush and grass.</p> <p>No mining activity was noted in the area surveyed. Several homes are located in the E 1/2 of the NE 1/4 of sec 18.</p> <p>The mean magnetic declination, as taken from quadrangle map BURNTWATER WASH, ARIZ., published in 1971 by U.S. Geological Survey, is 13 1/2° E.</p> <hr/>

BOOK 5485

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
W. William Foster	Surveying Technician
Johnny R. Ramirez	Survey Aid
Mike A. Searles	Survey Aid

BOOK 5485

CERTIFICATE OF SURVEY

I, Joe R. Salazar, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of Special Instructions bearing date of the 12th day of January, 1987, and Supplemental Special Instructions bearing date of the 16th day of February, 1993, I have dependently resurveyed a portion of the Seventh Auxiliary Guide Meridian East (west boundary) and a portion of the subdivisional lines and subdivided section 18, in Township 22 North, Range 29 East, of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

3-13-97
(Date)

Joe R. Salazar
(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Arizona State Office
Phoenix, Arizona

The foregoing field notes of the dependent resurvey of a portion of the Seventh Auxiliary Guide Meridian East (west boundary) and a portion of the subdivisional lines and the subdivision of section 18, in Township 22 North, Range 29 West, Gila and Salt River Meridian, Arizona, executed by Joe R. Salazar, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

MAR 31 1997
(Date)

Robert Wilson
(Acting Chief Cadastral Surveyor of Arizona)

~~CERTIFICATE OF TRANSCRIPT~~

~~I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in T. 22 N., R. 29 E., Gila and Salt River Meridian, Arizona, is a true copy of the original field notes.~~

~~_____
(Date)~~

~~_____
(Acting Chief Cadastral Surveyor of Arizona)~~