

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES
OF THE
DEPENDENT RESURVEY OF

THE FIFTH STANDARD PARALLEL NORTH (SOUTH BOUNDARY),

THE NORTH BOUNDARY,

AND A PORTION OF THE SUBDIVISIONAL LINES,

THE SUBDIVISION OF SECTIONS 26, 27, AND 34,

AND METES-AND-BOUNDS SURVEYS

IN

TOWNSHIP 21 NORTH, RANGE 27 EAST

Of the Gila and Salt River Meridian,
In the State of Arizona

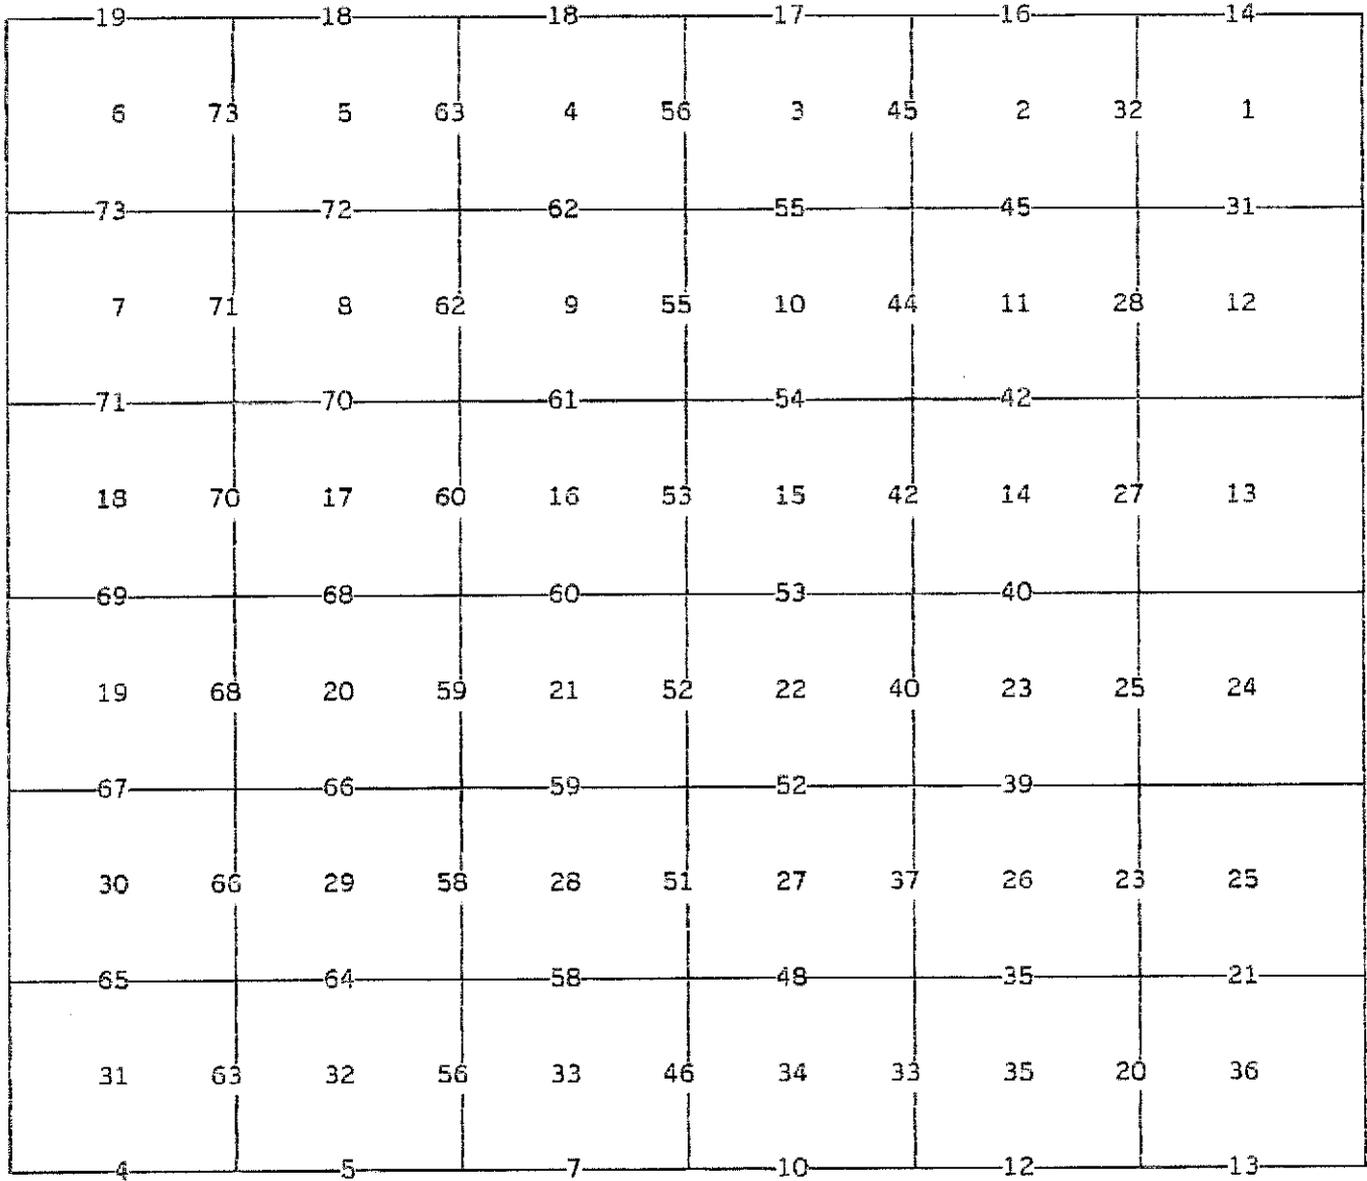
EXECUTED BY
William P. Carpender and Darren R. Breckenridge, Cadastral Surveyors

Under Special Instructions dated January 12, 1987, approved February 23, 1987, and Supplemental Special Instructions dated February 29, 1988, approved February 29, 1988, which provided for the surveys included under Group Number 685, and assignment instructions dated April 27, 1988 and July 11, 1988.

Survey Commenced September 8, 1988
Survey Completed August 31, 1994

INDEX DIAGRAM

TOWNSHIP 21 NORTH, RANGE 27 EAST,



- Subdivision of Section 26 Pgs. 74-75
- Subdivision of Section 27 Pgs. 76-77
- Subdivision of Section 34 Pgs. 77-81
- Metes-and-Bounds Survey, E. Right-of-Way, State Highway 63-W Pgs. 82-85
- Metes-and-Bounds Survey, W. Right-of-Way, State Highway 63-W Pgs. 85-87
- Metes-and-Bounds Surveys in Section 27 Pgs. 87-88
- Metes-and-Bounds Survey in Section 33 Pgs. 88-89
- Metes-and-Bounds Surveys in Section 35 Pgs. 89-91

T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS

The following field notes describe the dependent resurvey of the Fifth Standard Parallel North (south boundary), the north boundary, and a portion of the subdivisional lines, the subdivision of sections 26, 27, and 34, and metes-and-bounds surveys in Township 21 North, Range 27 East, Gila and Salt River Meridian, Arizona.

The east boundary was surveyed by W. R. Fitzgerald in 1882. The south, west and north boundaries and the subdivisional lines were surveyed by Frank Follman in 1882. A portion of the east boundary was retraced by William Strover in 1910. The north boundary and a portion of the east boundary were resurveyed by Ty White in 1947. The west boundary was resurveyed by Stephen J. Malloy, Gary D. Johnson and Darren R. Breckenridge from 1988 to 1992. The east boundary was resurveyed by William P. Carpender and Stephen J. Malloy from 1987 to 1994.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions dated January 12, 1987, and the Supplemental Special Instructions dated February 29, 1988, for Group No. 685, Arizona.

Preliminary to the resurvey, the lines of the original survey were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The directions of all lines were determined by the technique of static differential positioning using Ashtech models M-XII and MS-XII geodetic units, confirmed by direct hour angle observations on the sun, and refer to the true meridian. Distances and angles were measured with Sokkia, Geodimeter, Zeiss, and Topcon total station instruments.

The geographic position of the standard township corner of Township 21 North, Ranges 27 and 28 East was determined by the technique of static differential positioning using Ashtech models M-XII and MS-XII geodetic units. U.S. Coast and Geodetic Survey triangulation stations "BEACON 54B ECC 1936" and "DEAD 1936" were used as the control stations. The coordinates refer to the top of the monument.

Latitude 35°10'13.472" N. Longitude 109°25'16.596" W. NAD27

The mean magnetic declination, as taken from quadrangle map CHAMBERS, ARIZ., published in 1971 by U.S. Geological Survey, is 13 1/2° E.

Dependent Resurvey of the Fifth Stan. Par. North (South Bdy.),
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Restoring the survey executed by Frank Follman, in 1882</p> <hr/> <p>Beginning at the stan. cor. of Tps. 21 N., Rs. 26 and 27 E., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 7 ins. above ground, in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd. SC T21N R26E R27E S36 S31 1988, with a steel fence post set alongside the cor., as described in the field notes of the dependent resurvey of the Fifth Stan. Par. North, T. 21 N., R. 26 E., executed concurrently under this same group.</p> <p>From this cor., U.S. Coast and Geodetic Survey triangulation station "DEAD 1936", with published latitude 35°08'29.426" N. and longitude 109°39'26.711" W. NAD 27, bears S. 75°07'20" W. (forward bearing), 610.85 chs. dist., monumented with a brass disk, 4 ins. diam., set flush in a concrete pillar, 9 x 9 ins., projecting 11 ins. above ground, mkd. DEAD 1936, and a triangle.</p> <p>S. 89°21' E., on the S. bdy. of sec. 31.</p> <p>Over rolling, broken land, through moderate juniper.</p> <p>0.10 Wash, 5 lks. wide, drains SW.</p> <p>39.25 Wash, 7 lks. wide, drains SE.</p> <p>40.48 The stan. 1/4 sec. cor. of sec. 31, monumented with a sandstone, 9 x 8 x 6 ins., laying on the ground, mkd. SC.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">S C T21N R27E 1/4 S 31</p> <hr style="width: 10%; margin: auto;"/> <p style="text-align: center;">1988</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 11 ins. diam., bears N. 30 1/2° E., 162 lks. dist., mkd. X BT.</p> <p style="padding-left: 40px;">A juniper, 8 ins. diam., bears N. 39° W., 203 lks. dist., mkd. 1/4 S31 SC BT.</p>

Dependent Resurvey of the Fifth Stan. Par. North (South Bdy.),
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the original stone alongside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <hr/> <p>N. 88°40' E., beginning new measurement.</p>
32.80	Track road, bears ENE and S.
34.75	Wash, 10 lks. wide, drains S.
40.81	<p>The stan. cor. of secs. 31 and 32, monumented with a sandstone, 25 x 9 x 7 ins., laying on the ground, mkd. with 5 grooves on a side, and 1 groove on the opposite side, with a juniper guard post, 11 ins. diam., projecting 8 ft. above ground alongside.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>S C</p> <p>T21N R27E</p> <p>S31 S32</p> <hr style="width: 50px; margin: 0 auto;"/> <p>1988</p> </div> <p>from which</p> <p style="padding-left: 40px;">A juniper, 9 ins. diam., bears N. 18° E., 273 lks. dist., mkd. T21N R27E S32 SC BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the original stone alongside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <hr/> <p>S. 87°32' E., on the S. bdy. of sec. 32.</p> <p>Over rolling, broken land, through moderate juniper.</p>
39.46	<p>The stan. 1/4 sec. cor. of sec. 32, monumented with a sandstone, 16 x 11 x 5 ins., firmly set, projecting 7 ins. above ground, mkd. 1/4 on the N. face.</p>

Dependent Resurvey of the Fifth Stan. Par. North (South Bdy.),
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S C T21N R27E 1/4 S32</p> <hr style="width: 10%; margin: auto;"/> <p style="text-align: center;">1988</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 6 ins. diam., bears N. 6° E., 172 lks. dist., mkd. X BT.</p> <p style="padding-left: 40px;">A juniper, 13 ins. diam., bears N. 76 1/2° W., 190 lks. dist., mkd. 1/4 S32 SC BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the original stone alongside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 87°08' E., beginning new measurement.</p>
3.70	Power line, bears NE and SW.
3.95	Access road for power line, bears NE and SW.
39.85	<p>The stan. cor. of secs. 32 and 33, monumented with a sandstone, 22 x 10 x 6 ins., firmly set, projecting 16 ins. above ground, mkd. with 4 grooves on the E. face, 2 grooves on the W. face, and an X on top.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S C T21N R27E S32 S33</p> <hr style="width: 10%; margin: auto;"/> <p style="text-align: center;">1988</p>

Dependent Resurvey of the Fifth Stan. Par. North (South Bdy.),
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the original stone alongside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located in a cor. of fences, extending N. and E.</p>
	<p>N. 89°41' E., on the S. bdy. of sec. 33.</p> <p>Over rolling land, through moderate juniper.</p>
21.905	<p>The closing cor. of secs. 4 and 5, T. 20 N., R. 27 E., as described in the field notes of the dependent resurvey of the subdivisional lines, T. 20 N., R. 27 E., executed concurrently under Group No. 686, Arizona.</p>
24.48	<p>Point for a witness point on the S. bdy. of sec. 33.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">WP T21N R27E S33 /— 1988</p>
25.20	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 2 lks. S. of a fence, bears E. and W.</p> <p>Edge of mesa, bears NE and S.; descend.</p>
30.10	<p>Wash, 5 lks. wide, drains S.</p>
40.08	<p>Point for the stan. 1/4 sec. cor. of sec. 33, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the Fifth Stan. Par. North (South Bdy.),
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">S C T21N R27E 1/4 S 33</p> <hr style="width: 10%; margin: auto;"/> <p style="text-align: center;">1988</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 1 lk. S. of a fence, extending E. and W.</p>
42.40	Power line, bears NE and SW.
43.20	Old U.S. Highway 66, decayed pavement, 30 lks. wide, bears NE and SW.
64.59	<p>Point for a witness point at intersection with the northwesterly right-of-way line of relocated U.S. Interstate Highway 40, bears NE and SW.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WP T21N R27E S33 /</p> <hr style="width: 10%; margin: auto;"/> <p style="text-align: center;">1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>From this cor., a right-of-way marker bears N. 51°39' E., 16.24 chs. dist., monumented with an aluminum disk, 3 ins. diam., firmly set in a concrete pillar, 6 ins. diam., projecting 3 ins. above ground, mkd. A.D.O.T. HIGHWAY DIV. 19, located 4 lks. S. of the old right-of-way fence, bears NE and SW.</p> <p>From this same cor., a right-of-way marker bears N. 51°39' E., 49.32 chs. dist., monumented with an aluminum disk, 3 ins. diam., firmly set in a concrete pillar, 6 ins. diam., projecting 6 ins. above ground, mkd. A.D.O.T. HIGHWAY DIV. 19, located 4.5 lks. S. of the old right-of-way fence, bears NE and SW.</p>

Dependent Resurvey of the Fifth Stan. Par. North (South Bdy.),
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From this same cor., a piece of railroad rail for a right-of-way marker, bears N. 86° W., 4.5 lks. dist., firmly set, projecting 24 ins. above ground, mkd. P.O.T. 1238+27.3, with a rebar alongside, 1 in. diam., firmly set, projecting 3 ins. above ground, with a tag attached, mkd. LS 12219, established by James D. Thornhill, R.L.S. 12219, in 1987. Located in the old right-of-way fence, bears NE and SW.</p>
65.30	Center of frontage road, pavement, bears NE and SW.
66.10	Fence, bears NE and SW.
67.20	Center of westbound U.S. Interstate Highway 40, pavement, 60 lks. wide, bears NE and SW.
69.80	Center of eastbound U.S. Interstate Highway 40, pavement, 60 lks. wide, bears NE and SW.
72.065	<p>Point for a witness point on the southeasterly right-of-way line of U.S. Interstate Highway 40.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">WP T21N R27E S33 + 1988</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 2 lks. E. of a fence, bears NE and SW.</p>
80.16	<p>The stan. cor. of secs. 33 and 34, monumented with a sandstone, 30 x 15 x 6 ins., firmly set, projecting 14 ins. above ground, mkd. with 3 grooves on the E. face, 3 grooves on the W. face, and an X on top, with a juniper guard post alongside, 5 ins. diam., projecting 5 ft. above ground.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the Fifth Stan. Par. North (South Bdy.),
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	S C T21N R27E S33 S34 <hr style="width: 50%; margin: auto;"/> 1988
	Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post. Bury the original stone alongside the stainless steel post. Set a steel fence post alongside the cor.
	N. 89°32' E., on the S. bdy. of sec. 34. Over nearly level, open land.
25.50	Right bank of the Puerco River, bears NE and SW.
33.00	Left bank of the Puerco River, bears NNE and SSW.
36.59	Point for a witness point on the northwesterly right-of-way of the Atchison Topeka and Santa Fe Railway Co. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.
	WP T21N R27E S34 <hr style="width: 50%; margin: auto;"/> 1988
	Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post. Set a steel fence post alongside the cor. The cor. is located in a fence, bears NE and SW.
38.75	Eastbound track of the Atchison Topeka and Santa Fe Railway Co., bears NE and SW.
39.00	Westbound track of the Atchison Topeka and Santa Fe Railway Co., bears NE and SW.
39.44	Point for the stan. 1/4 sec. cor. of sec. 34, at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey of the Fifth Stan. Par. North (South Bdy.),
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S C T21N R27E <u>1/4 S 34</u></p> <p style="text-align: center;">1988</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p>
39.90	<p>Railroad access road, bears NE and SW.</p>
40.89	<p>Point for a witness point on the 100 ft. southeasterly right-of-way of the Atchison Topeka and Santa Fe Railway Co.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WP T21N R27E <u>S34</u></p> <p style="text-align: center;">1988</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 2 lks. W. of a fence, bears NE and SW.</p>
49.49	<p>Point for a witness point on the 500 ft. southeasterly right-of-way of the Atchison Topeka and Santa Fe Railway Co.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WP T21N R27E <u>S34</u></p> <p style="text-align: center;">1988</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>

Dependent Resurvey of the Fifth Stan. Par. North (South Bdy.),
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
78.88	<p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 165 lks. S. of a fence, bears E. and W.</p> <p>Point for the stan. cor. of secs. 34 and 35, at proportionate dist.; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>S C T21N R27E S34 S35</p> <hr style="width: 50px; margin: auto;"/> <p>1988</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 115 lks. S. of a fence, bears E. and W.</p>
26.30	<p>N. 89°32' E., on the S. bdy. of sec. 35.</p> <p>Over nearly level, open land.</p> <p>Left bank of a large wash, course NW.</p>
28.10	<p>Right bank of the same wash.</p>
39.44	<p>Point for the stan. 1/4 sec. cor. of sec. 35, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>S C T21N R27E 1/4 S 35</p> <hr style="width: 50px; margin: auto;"/> <p>1988</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Raise a mound of stone, 3 ft. base, 2 1/2 ft. high, N. of the cor.</p>

Dependent Resurvey of the Fifth Stan. Par. North (South Bdy.),
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS				
	<p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 45 lks. S. of a fence, bears E. and W.</p>			
41.10	Wash, 10 lks. wide, course S.			
78.88	<p>The stan. cor. of secs. 35 and 36, monumented with a weathered sandstone, 13 x 12 x 3 ins., laying on the ground, mkd. SC on the N. face, 1 groove on the E. face, and 3 grooves on the W. face, from which the remaining original bearing tree</p> <p style="padding-left: 40px;">A juniper, 10 ins. diam., bears S. 34 1/4° W., 59 lks. dist., mkd. with a blaze. (Record: S. 36° W., 51 lks. dist.)</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table border="1" style="margin: auto;"> <tr><td style="padding: 2px;">S C</td></tr> <tr><td style="padding: 2px;">T21N R27E</td></tr> <tr><td style="padding: 2px;">S35 S36</td></tr> </table> </div> <p style="text-align: center; margin: 10px 0;">1988</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the original stone alongside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 10 lks. S. of a fence, bears E. and W.</p> <hr style="border: 0.5px solid black;"/>	S C	T21N R27E	S35 S36
S C				
T21N R27E				
S35 S36				
40.52	<p>S. 89°46' E., on the S. bdy. of sec. 36.</p> <p>Over gently rolling land, through moderate juniper.</p> <p>Point for the stan. 1/4 sec. cor. of sec. 36, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p>			

Dependent Resurvey of the North Boundary,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
10.00	Ascend into rolling land, through scattered juniper.
40.95	<p>The 1/4 sec. cor. of secs. 1 and 36, monumented with an iron post, 1 in. diam., firmly set, projecting 3 ins. above ground, with brass cap mkd. 1/4 S36 S1 1947, from which the 1947 bearing trees</p> <p style="padding-left: 40px;">A juniper, 11 ins. diam., bears S. 28 1/2° W., 109 lks. dist., mkd. 1/4 S1 BT.</p> <p style="padding-left: 40px;">A juniper, 10 ins. diam., bears N. 24° W., 265 lks. dist., mkd. with a healed blaze.</p> <p>Add the marks T22N T21N R27E 1994 to the brass cap.</p> <hr style="width: 20%; margin: 10px auto;"/> <p style="padding-left: 40px;">N. 89°21' W., beginning new measurement.</p>
33.85	Cor. of fences, extending E., SSW, and NNE.
34.87	Cor. of E. right-of-way of State Highway 63-W, bears E. and S.
35.60	Center of State Highway 63-W, pavement, 40 lks. wide, bears N. and S.
36.39	<p>Point for a witness point at intersection with the W. right-of-way of State Highway 63-W.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> WP T22N R27E S36 <hr style="width: 50%; margin: 0 auto;"/> S 1 T21N 1994 </div>
	Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.
	An angle iron guard post, 4 x 4 ins., projecting 24 ins. above ground is set alongside the cor.
	From this cor., right-of-way marker, B.M. #48 50' Lt. Sta. 240+00, bears S. 3°39' W., 8.625 chs. dist., monumented with an iron pipe, 1 in. diam., firmly set, flush with the ground as shown on an Arizona Highway Department map titled CHAMBERS-GANADO HWY.

Dependent Resurvey of the North Boundary,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From this same cor., right-of-way marker, B.M. #39 85' Lt. Sta. 190+00.4, bears S. 4°01' W., 84.35 chs. dist., monumented with an iron pipe, 1 in. diam., firmly set, flush with the ground, as shown on an Arizona Highway Department map titled CHAMBERS-GANADO HWY.</p>
36.43	<p>A cor. of fences, extending SSW and W.</p>
37.15	<p>A right-of-way marker, monumented with a brass tablet, 3 ins. diam., firmly set in a concrete pillar, 6 ins. diam., projecting 6 ins. above ground, mkd. BIA ROADS 19, with an angle iron guard post, 4 x 4 ins., projecting 24 ins. above ground alongside. Located in a cor. of fences extending NNE, E., and W.</p>
40.93	<p>The cor. of secs. 1, 2, 35, and 36, monumented with an iron post, 2 ins. diam., firmly set, projecting 12 ins. above ground, with brass cap mkd. T22N R27E S35 S36 S2 S1 T21N 1947, from which the remaining 1947 bearing trees</p> <p style="padding-left: 40px;">A juniper, 8 ins. diam., bears N. 15 1/2° E., 446 lks. dist., mkd. T22N R27E S36 BT.</p> <p style="padding-left: 40px;">A dead and down juniper, 8 ins. diam., bears S. 49 1/2° E., 236 lks. dist., mkd. T21N R27E S1 BT. (Record: S. 53° E., 358 lks. dist.)</p> <p style="padding-left: 40px;">A juniper, 14 ins. diam., bears N. 4 1/2° W., 317 lks. dist., mkd. 22N R27E S35 BT.</p> <p>Add the marks 1994 to the brass cap.</p> <p>The cor. is located 3 lks. N. of a fence, bears E. and W.</p> <hr/>
39.93	<p>N. 89°39' W., bet. secs. 2 and 35.</p> <p>Over rolling land, through scattered juniper, along a fence.</p> <p>The 1/4 sec. cor. of secs. 2 and 35, monumented with an iron post, 1 in. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. 1/4 S35 S2 1947, from which the remaining 1947 bearing tree</p> <p style="padding-left: 40px;">A juniper, 7 ins. diam., bears N. 66 1/4° E., 131 lks. dist., mkd. 1/4 S35 BT.</p> <p>Add the marks T22N R27E T21N 1994 to the brass cap.</p> <p>The cor. is located in a fence, bears E. and W.</p> <hr/>

Dependent Resurvey of the North Boundary,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	N. 89°36' W., beginning new measurement.
39.95	<p>The cor. of secs. 2, 3, 34, and 35, monumented with an iron post, 2 ins. diam., firmly set, projecting 7 ins. above ground, with brass cap mkd. T22N R27E S34 S35 S3 S2 T21N 1947, from which the remaining 1947 bearing trees</p> <p style="padding-left: 40px;">A juniper, 9 ins. diam., bears N. 1° E., 126 lks. dist., mkd. T22N R27E S35 BT.</p> <p style="padding-left: 40px;">A juniper, 8 ins. diam., bears N. 45 1/2° W., 120 lks. dist., mkd. T22N R27E S34 BT.</p> <p>Add the marks 1994 to the brass cap.</p> <p>The cor. is located 1.5 lks. N. of a fence, bears E. and W.</p> <hr/>
	N. 89°37' W., bet. secs. 3 and 34.
	Over rolling land, through scattered juniper, along a fence.
21.30	Wash, 80 lks. wide, 4 ft. deep, course SE.
39.90	<p>The 1/4 sec. cor. of secs. 3 and 34, monumented with an iron post, 1 in. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. 1/4 S34 S3 1947, from which the remaining 1947 bearing tree</p> <p style="padding-left: 40px;">A juniper, 21 ins. diam., bears N. 11° E., 223 lks. dist., mkd. 1/4 S34 BT.</p> <p>Add the marks T22N R27E T21N 1994 to the brass cap.</p> <p>The cor. is located 10 lks. N. of a fence, bears E. and W., and 100 lks. W. of a cor. of fences extending E., SSE, and W.</p> <hr/>
	N. 89°36' W., beginning new measurement.
39.96	<p>The cor. of secs. 3, 4, 33, and 34, monumented with an iron post, 2 ins. diam., firmly set, 20 ins. below ground, with brass cap mkd. T22N R27E S33 S34 S4 S3 T21N 1947.</p> <p>Add the marks 1994 to the brass cap.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 4 lks. N. of a fence, bears E. and W.</p> <hr/>

Dependent Resurvey of the North Boundary,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>N. 89°39' W., bet. secs. 4 and 33.</p>
	<p>Over rolling land, through moderate juniper, along a fence.</p>
10.35	<p>E. edge of a mesa, bears NE and SSW.</p>
39.89	<p>The 1/4 sec. cor. of secs. 4 and 33, monumented with an iron post, 1 in. diam., firmly set, projecting 8 ins. above ground, with brass cap mkd. 1/4 S33 S4 1947, from which the 1947 bearing trees</p> <p style="padding-left: 40px;">A juniper, 15 ins. diam., bears N. 41 3/4° E., 208 lks. dist., mkd. 1/4 S33 BT.</p> <p style="padding-left: 40px;">A juniper, 9 ins. diam., bears S. 40 1/2° E., 123 lks. dist., mkd. 1/4 S4 BT.</p> <p>Add marks T22N R27E T21N 1994 to the brass cap.</p> <p>The cor. is located 1.5 lks. N. of a fence, bears E. and W.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 89°36' W., beginning new measurement.</p>
39.89	<p>The cor. of secs. 4, 5, 32, and 33, monumented with an iron post, 2 ins. diam., firmly set, projecting 8 ins. above ground, with brass cap mkd. T22N R27E S32 S33 S5 S4 T21N 1947, from which the 1947 bearing trees</p> <p style="padding-left: 40px;">A juniper, 9 ins. diam., bears N. 32 3/4° E., 57 lks. dist., mkd. T22N R27E S33 BT. (Record: N. 36 1/4° E., 58 lks. dist.)</p> <p style="padding-left: 40px;">A juniper, 11 ins. diam., bears S. 86 1/4° E., 131 lks. dist., mkd. T21N R27E S4 BT. (Record: S. 84 3/4° E., 130 lks. dist.)</p> <p style="padding-left: 40px;">A juniper, 17 ins. diam., bears S. 44 1/2° W., 154 lks. dist., mkd. T21N R27E S5 BT. (Record: 156 lks. dist.)</p> <p style="padding-left: 40px;">A juniper, 10 ins. diam., bears N. 46 1/2° W., 60 lks. dist., with a healed blaze. (Record: N. 45° W.)</p> <p>Add the marks 1994 to the brass cap.</p> <p>The cor. is located 2 lks. N. of a fence, bears E. and W.</p> <hr style="width: 60%; margin: 10px auto;"/>
	<p>S. 89°30' W., bet. secs. 5 and 32.</p>

Dependent Resurvey of the North Boundary,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.99	<p>Over rolling, broken land, through scattered juniper, along a fence.</p> <p>The 1/4 sec. cor. of secs. 5 and 32, monumented with an iron post, 1 in. diam., firmly set, projecting 8 ins. above ground, with brass cap mkd. 1/4 S32 S5 1947, from which the remains of the 1947 bearing trees</p> <p style="padding-left: 40px;">A charred juniper stump, 13 ins. diam., bears N. 52° E., 20 lks. dist.</p> <p style="padding-left: 40px;">A dead and down juniper, 16 ins. diam., the roots bear S. 12 1/4° E., 34 lks. dist., mkd. 1/4 S5 BT.</p> <p>Add the marks T22N R27E T21N 1994 to the brass cap.</p> <p>The cor. is located 4 lks. N. of a fence, bears E. and W.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89°29' W., beginning new measurement.</p>
39.98	<p>The cor. of secs. 5, 6, 31, and 32, monumented with an iron post, 2 ins. diam., firmly set, flush with the ground, with brass cap mkd. T22N R27E S31 S32 S6 S5 T21N 1947, from which the remains of the 1947 bearing trees</p> <p style="padding-left: 40px;">A charred juniper stump, 12 ins. diam., bears N. 16 1/2° E., 126 lks. dist., with a branch laying on the ground alongside, 13 ins. diam., mkd. T22N R27E.</p> <p style="padding-left: 40px;">A juniper, 12 ins. diam., bears S. 51 1/2° E., 123 lks. dist., with a healed blaze.</p> <p style="padding-left: 40px;">A juniper, 10 ins. diam., bears S. 8 1/4° W., 156 lks. dist., with a healed blaze.</p> <p style="padding-left: 40px;">A juniper, 8 ins. diam., bears N. 24 1/4° W., 156 lks. dist., mkd. T22N27E.</p> <p>Add the marks 1994 to the brass cap.</p> <p>The cor. is located 5 lks. N. of a fence, bears E. and W.</p> <hr style="width: 60%; margin: 10px auto;"/> <p>S. 89°28' W., bet. secs. 6 and 31.</p> <p>Over gently rolling land, through scattered juniper, along a fence.</p>

Dependent Resurvey of the North Boundary,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.02	<p>The 1/4 sec. cor. of secs. 6 and 31, monumented with an iron post, 1 in. diam., firmly set, projecting 7 ins. above ground, with brass cap mkd. 1/4 S31 S6 1947, from which the 1947 bearing trees</p> <p style="padding-left: 40px;">A juniper, 13 ins. diam., bears N. 52 1/2° E., 39 lks. dist., mkd. 1/4 S31 BT.</p> <p style="padding-left: 40px;">A juniper, 11 ins. diam., bears S. 10 1/4° W., 166 lks. dist., mkd. 1/4 S6 BT.</p> <p>Add marks T22N R27E T21N 1994 to the brass cap.</p> <p>The cor. is located 3.5 lks. N. of a fence, bears E. and W.</p> <p style="text-align: center;">_____</p> <p>S. 89°27' W., beginning new measurement.</p>
38.68	<p>The cor. of Tps. 21 and 22 N., Rs. 26 and 27 E., monumented with an iron post, 3 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. T22N R26E R27E S36 S31 S1 S6 T21N 1990 1947, as described in the field notes of the dependent resurvey of the N. bdy., T. 21 N., R. 26 E., executed concurrently under this same group.</p>
<p>Dependent Resurvey of a Portion of the Subdivisional Lines, T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona</p>	
<p>Restoring the survey executed by Frank Follman, in 1882</p> <p style="text-align: center;">_____</p>	
39.30	<p>From the stan. cor. of secs. 35 and 36, on the S. bdy. of the Tp., hereinbefore described.</p> <p>N. 1°46' E., bet. secs. 35 and 36.</p> <p>Over rolling broken land, through moderate juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 35 and 36, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T21N R27E 1/4 S35 S36 1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
	<p>Set a steel fence post alongside the cor.</p>
67.50	<p>Fence on the left bank of the Puerco River, bears ENE and WSW.</p>
75.70	<p>Right bank of the Puerco River, bears ENE and WSW.</p>
78.60	<p>The cor. of secs. 25, 26, 35, and 36, perpetuated by Ralph B. Nunnolley, R.C.E. 4901, in 1968, as per a map recorded at the Apache County Courthouse in St. Johns, Arizona, monumented with a sandstone, 29 x 10 x 5 ins., firmly set, projecting 5 ins. above ground, mkd. with 1 groove on the E. face, 1 groove on the S. face, and an X on top. This is accepted as a careful and faithful perpetuation of the original cor.</p>
	<p>At the cor. point</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T21N R27E S26 S25 ----- S35 S36 1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
	<p>Bury the stone alongside the stainless steel post.</p>
	<p>Set a steel fence post alongside the cor.</p>
	<hr/> <p>From the cor. of secs. 25, 30, 31, and 36, on the E. bdy. of the Tp., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 20 ins. above ground, and in a mound of stone, 5 ft. base, to top, with brass cap mkd. T21N R27E R28E S25 S30 S36 S31 1987, with a steel fence post set alongside the cor., as described in the field notes of the dependent resurvey of the W. bdy., T. 21 N., R. 28 E., executed concurrently under this same group.</p>
	<p>S. 89°13' W., bet. secs. 25 and 36.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Descend into the Puerco River valley, over gently rolling, open land.</p>
32.95	<p>Left bank of the Puerco River, bears NE and SW.</p>
39.38	<p>True point for the 1/4 sec. cor. of secs. 25 and 36, at proportionate dist.; there is no remaining evidence of the original cor. The cor. point falls in the bed of the Puerco River, where it is impractical to establish a permanent monument.</p> <p>From this point, the point selected for a witness cor. bears N. 87°15' E., 8.96 chs. dist.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a steel fence post driven into the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>WC T21N R27E S25 1/4 ——— ← S36 1990</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located on a sandy ridge, bears N. and S.</p>
61.20	<p>Right bank of the Puerco River, bears NE and SW.</p>
61.56	<p>Point for a witness point on the line bet. secs. 25 and 36.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>WP T21N R27E S25 ——— S36 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
78.77	The cor. of secs. 25, 26, 35, and 36.
	N. 0°09' W., bet. secs. 25 and 26.
	Over nearly level, open land.
4.00	Fence on the southeasterly right-of-way of the Atchison Topeka and Santa Fe Railway Co., bears E. and W.
5.50	S. main track (westbound) of the Atchison Topeka and Santa Fe Railway Co., bears ENE and WSW.
5.96	N. main track (eastbound) of the Atchison Topeka and Santa Fe Railway Co., bears ENE and WSW.
6.70	Power pole line, bears ENE and WSW.
7.30	Fence on the northwesterly right-of-way of the Atchison Topeka and Santa Fe Railway Co., bears E. and W.
23.65	Center of frontage road, pavement, 45 lks. wide, bears ENE and WSW.
24.30	Fence, bears ENE and WSW.
25.25	Center of eastbound U.S. Interstate Highway 40, pavement, 60 lks. wide, bears ENE and WSW.
26.90	Center of westbound U.S. Interstate Highway 40, pavement, 60 lks. wide, bears ENE and WSW.
27.70	Fence, bears ENE and WSW.
28.05	Center of frontage road, pavement, 45 lks. wide, bears ENE and WSW, thence along a paved road, 35 lks. wide, bears N.
40.07	Point for the 1/4 sec. cor. of secs. 25 and 26, at proportionate dist.; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. below the surface of the pavement, with brass cap mkd.
	<p style="text-align: center;">T21N R27E 1/4 S26 S25 1994</p>
	from which

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS									
	<p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, for a reference monument, bears S. 47°46' W., 39.3 ft. dist., with brass cap mkd. RM T21N R27E 1/4 S26 39.3 FT TO COR 1994, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, for a reference monument, bears N. 38°29' W., 46.9 ft. dist., with brass cap mkd. RM T21N R27E 1/4 S26 46.9 FT TO COR 1994, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>The cor. is located 3 lks. W. of the center line of the paved road, and 45 lks. E. of a right-of-way fence, bears N. and S.</p>								
68.40	Southerly right-of-way fence of old U.S. Highway 66, bears E. and W.								
69.40	Southerly edge of a gravel parking lot, bears E. and W., leave paved road.								
72.80	Northerly edge of the gravel parking lot.								
80.14	<p>The cor. of secs. 23, 24, 25, and 26, monumented by person(s) unknown, with a rebar, 5/8 in. diam., 24 ins. long, firmly set, 24 ins. below the gravel surface on the W. shoulder of State Highway 63-W. Mrs. Mildred M. McDonald, a lifetime resident of the area, furnished a signed statement, attached to and made a part of the Group file, attesting to the cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 13 ins. below the surface of the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td>T21N</td> <td>R27E</td> </tr> <tr> <td>S23</td> <td>S24</td> </tr> <tr> <td>S26</td> <td>S25</td> </tr> <tr> <td colspan="2">1990</td> </tr> </table> </div> <p>from which</p>	T21N	R27E	S23	S24	S26	S25	1990	
T21N	R27E								
S23	S24								
S26	S25								
1990									

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, for a reference monument, bears N. 30°52' W., 72.0 ft. dist., with brass cap mkd. RM T21N R27E S23 72.0 FT TO COR 1994, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.

Deposit the rebar inside the stainless steel post.

From this cor. point, a right-of-way marker bears S. 83°43' E., 1.06 chs. dist., monumented with a brass disk, 3 ins. diam., firmly set in a concrete pillar, 6 ins. diam., 5 ins. below ground, mkd. ARIZONA HIGHWAY DEPT. R.P. 50.00 CL EQUA. 33X59.45B 35X27.27A 1964.

From this same cor. point, a right-of-way marker bears S. 71°26' W., 48 lks. dist., monumented with a brass disk, 3 ins. diam., firmly set in a concrete pillar, 6 ins. diam., projecting 1 in. above ground, mkd. ARIZONA HIGHWAY DEPT. R.P. 50.00 CL EQUA. 33X59.45B 35X27.27A 1964.

N. 0°20' E., bet. secs. 23 and 24.

Ascend gradually, over nearly level land, within the State Highway 63-W right-of-way.

35.09 Point for a witness point, at intersection with the E. right-of-way of State Highway 63-W.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.

WP
T21N R27E
S23 | S24
1994

Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.

Set a steel fence post alongside the cor.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From this cor., a local property cor. established by Ralph B. Nunnolley, R.C.E. 4901, in 1968, as per a map recorded at the Apache County Courthouse in St. Johns, Arizona, monumented with an iron pin, 1/2 in. diam., firmly set, flush with the ground, with a tag attached, mkd. PE 2399, bears S. 18° W., 2 lks. dist.</p> <p>From this same cor., a right-of-way marker on the E. right-of-way of State Highway 63-W, near the cor. of secs. 23, 24, 25, and 26, hereinbefore described, bears S. 1°23' E., 35.22 chs. dist.</p> <p>From this same cor., a right-of-way marker, B.M. #22 73' Lt. Sta. 106+13, bears N. 2°52' W., 72.12 chs. dist., monumented with an iron pipe, 1 in. diam., firmly set, flush with the ground, as shown on Arizona Highway Department map titled CHAMBERS-GANADO HWY.</p> <p>The cor. is located 2.5 lks. W. of a fence, bears N. and S.</p> <p>Thence leave the State Highway 63-W right-of-way.</p>
39.96	<p>Point for the 1/4 sec. cor. of secs. 23 and 24, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E 1/4 S23 S24 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>The cor. is located 3 lks. W. of a fence, bears N. and S.; thence along a fence.</p>
79.92	<p>The cor. of secs. 13, 14, 23, and 24, monumented by person(s) unknown, with a sandstone, 22 x 7 x 5 ins., firmly set, projecting 9 ins. above ground, mkd. with 1 groove on the E. face, 3 grooves on the S. face, and a hole in the top. This is accepted as the best available evidence of the position of the original cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS									
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>T21N</td> <td>R27E</td> </tr> <tr> <td>S14</td> <td>S13</td> </tr> <tr> <td>S23</td> <td>S24</td> </tr> <tr> <td colspan="2" style="text-align: center;">1994</td> </tr> </table> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Bury the stone alongside the stainless steel post.</p> <p>The cor. is located 2 lks. N. of a cor. of fences, extending E. and S., and on the S. edge of the parking lot of a liquor store.</p>	T21N	R27E	S14	S13	S23	S24	1994	
T21N	R27E								
S14	S13								
S23	S24								
1994									
39.81	<p>N. 0°04' E., bet. secs. 13 and 14.</p> <p>Ascend into rolling land, through scattered juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 13 and 14, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>								
79.62	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>T21N</td> <td>R27E</td> </tr> <tr> <td colspan="2" style="text-align: center;">1/4</td> </tr> <tr> <td>S14</td> <td>S13</td> </tr> <tr> <td colspan="2" style="text-align: center;">1994</td> </tr> </table> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>The cor. of secs. 11, 12, 13, and 14, reestablished by Wilfred P. Hanson, R.L.S. 2473, in 1967, as per a map recorded at the Apache County Courthouse in St. Johns, Arizona, monumented with a rebar, 1/2 in. diam., firmly set, projecting 1 in. above ground, and in a scattered collar of stone, 2 ft. diam. This is accepted as a careful and faithful reestablishment of the position of the original cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p>	T21N	R27E	1/4		S14	S13	1994	
T21N	R27E								
1/4									
S14	S13								
1994									

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS

T21N R27E	
S11	S12

S14	S13
1994	

Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.

Deposit the rebar inside the stainless steel post.

The cor. is located 35 lks. E. of a fence, bears N. and S.

N. 0°52' W., bet. secs. 11 and 12.

Over rolling land, through moderate juniper.

28.47

Point for a witness point, at intersection with the E. right-of-way of State Highway 63-W, determined by Wilfred P. Hanson, R.L.S. 2473, in 1967, as per a map recorded at the Apache County Courthouse in St. Johns, Arizona, monumented with a rebar, 5/8 in. diam., 19 ins. long, firmly set, projecting 2 ins. above ground, with a tag attached, mkd. LS 2473. This is accepted as a careful and faithful determination of the position of the cor.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

WP	
T21N R27E	
S11	S12
1994	

Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.

Deposit the rebar inside the stainless steel post.

Set a steel fence post alongside the cor.


From this cor., a right-of-way marker, B.M. #27 37' Lt. Sta. 131+53.10, bears S. 3°20' W., 42.46 chs. dist., monumented with an iron pipe, 1 in. diam., firmly set, flush with the ground, as shown on an Arizona Highway Department map titled CHAMBERS-GANADO HWY.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.80	<p>From this same cor., a right-of-way marker, B.M. #35 36' Lt. Sta. 170+00.4, bears N. 4°22' W., 15.88 chs. dist., monumented with an iron pipe, 1 in. diam., firmly set, flush with the ground, as shown on an Arizona Highway Department map titled CHAMBERS-GANADO HWY.</p> <p>The cor. is located 65 lks. W. of a fence, bears N. and S.; thence within the State Highway 63-W right-of-way.</p> <p>Point for the 1/4 sec. cor. of secs. 11 and 12, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. below the surface of the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R27E 1/4 S11 S12 1994</p>
70.08	<p>from which</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, for a reference monument, bears S. 45°55' W., 121.7 ft. dist., with brass cap mkd. RM T21N R27E 1/4 S11 121.7 FT TO COR 1994, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, for a reference monument, bears N. 47°45' W., 117.0 ft. dist., with brass cap mkd. RM T21N R27E 1/4 S11 117 FT TO COR 1994, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>The cor. is located on the E. shoulder of State Highway 63-W.</p> <p>Point for a witness point at intersection with the W. right-of-way of State Highway 63-W.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS



Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.

Set a steel fence post alongside the cor.

From this cor., a right-of-way marker, B.M. #35 36' Lt. Sta. 170+00.4, bears S. 1°17' W., 25.78 chs. dist., hereinbefore described.

From this same cor., a right-of-way marker, B.M. #39 85' Lt. Sta. 190+00.4, bears N. 3°13' W., 4.59 chs. dist., hereinbefore described.


The cor. is located 57 lks. E. of a fence, bears N. and S.; thence leave the State Highway 63-W right-of-way.

79.60

The cor. of secs. 1, 2, 11, and 12, reestablished by Wilfred P. Hanson, R.L.S. 2473, in 1967, as per a map recorded at the Apache County Courthouse in St. Johns, Arizona, monumented with a rebar, 5/8 in. diam., 23 ins. long, firmly set, projecting 3 ins. above ground, encircled with collar of stone and broken concrete pipe, with a tag attached, mkd. LS 2473. This is accepted as a careful and faithful reestablishment of the position of the original cor.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled with a collar of stone, with brass cap mkd.



Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.

Deposit the rebar inside the stainless steel post.

The cor. is located 20 lks. W. of a fence, bear N. and S.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From the cor. of secs. 1, 6, 7, and 12, on the E. bdy. of the Tp., monumented with and iron post, 2 ins. diam., firmly set, projecting 27 ins. above ground, and in a mound of stone, 4 ft. base, 1 1/2 ft. high, with brass cap mkd. T21N R27E R28E S1 S6 S12 S7 1994 1947, as described in the field notes of the dependent resurvey of the W. bdy., T. 21 N., R. 28 E., executed concurrently under this same group.</p> <p>N. 89°20' W., bet. secs. 1 and 12.</p> <p>Over rolling land, through scattered juniper.</p>
41.23	<p>The 1/4 sec. cor. of secs. 1 and 12, reestablished by Wilfred P. Hanson, R.L.S. 2473, in 1967, as per a map recorded at the Apache County Courthouse in St. Johns, Arizona, monumented with a rebar, 5/8 in. diam., 24 ins. long, firmly set, projecting 8 ins. above ground, and in a mound of stone, 3 ft. base, to top, with a tag attached, mkd. LS 2473. This is accepted as a careful and faithful reestablishment of the position of the original cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E S 1 1/4 — S12 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Deposit the rebar inside the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 89°20' W., beginning new measurement.</p>
38.45	Fence, bears N. and S.
38.99	<p>A property cor. on the E. right-of-way of State Highway 63-W, established by Wilfred P. Hanson, R.L.S. 2473, in 1967, as per a map recorded at the Apache County Courthouse in St. Johns, Arizona, monumented with a rebar, 5/8 in. diam., firmly set, projecting 3 ins. above ground, encircled with a collar of broken concrete pipe, with a tag attached, mkd. LS 2473.</p>
39.75	Center of State Highway 63-W, pavement, 40 lks. wide, bears N. and S.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.50	<p>Point for a witness point, at intersection with the W. right-of-way of State Highway 63-W, bears N. and S.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>WP T21N R27E / S 1 — S12 / 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>From this cor., a right-of-way marker, B.M. #48 50' Lt. Sta. 240+00, bears N. 3°39' E., 70.75 chs. dist., hereinbefore described.</p> <p>From this same cor., a right-of-way marker, B.M. #39 85' Lt. Sta. 190+00.4, bears S. 9°44' W., 5.00 chs. dist., hereinbefore described.</p>
41.04	Fence, bears N. and S.
41.24	The cor. of secs. 1, 2, 11, and 12.
	<p>N. 0°54' E., bet. secs. 1 and 2.</p> <p>Over gently rolling, open land.</p>
39.79	<p>Point for the 1/4 sec. cor. of secs. 1 and 2, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E 1/4 S 2 S 1 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
79.27	<p>The cor. of secs. 1, 2, 35, and 36, on the N. bdy. of the Tp., hereinbefore described.</p> <hr/> <p>From the stan. cor. of secs. 34 and 35, on the S. bdy. of the Tp., hereinbefore described.</p> <p>N. 0°56' E., bet. secs. 34 and 35.</p> <p>Over nearly level, open land.</p>
37.75	<p>Fence, bears NE and SW.</p>
38.485	<p>Point for a witness point on the 100 ft. southeasterly right-of-way of the Atchison Topeka and Santa Fe Railway Co.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <div data-bbox="830 914 981 1069" style="text-align: center;"> <p>WP T21N R27E S34 S35 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p>
39.60	<p>True point for the 1/4 sec. cor. of secs. 34 and 35, at proportionate dist.; there is no remaining evidence of the original cor.; falls in the S. main track (westbound) of the Atchison Topeka and Santa Fe Railway Co., where it is impractical to establish a permanent monument.</p> <p>From this point, the point selected for a witness cor. to the 1/4 sec. cor. of secs. 34 and 35, bears N. 89°45' E., 1.375 chs. dist.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div data-bbox="835 1683 986 1867" style="text-align: center;"> <p>W C T21N R27E 1/4 ← → S34 S35 1994</p> </div>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p>
39.85	N. main track (eastbound) of the Atchison Topeka and Santa Fe Railway Co.
40.55	Telegraph pole line, bears NNE and SSW.
42.45	Fence, bears ENE and WSW.
52.85	Puerco River, 6 chs. wide, course NNW.
65.85	Fence, bears ENE and WSW.
67.65	Center of eastbound U.S. Interstate Highway 40, pavement, 60 lks. wide, bears ENE and WSW.
69.70	Center of westbound U.S. Interstate Highway 40, pavement, 60 lks. wide, bears ENE and WSW.
71.58	<p>Point for a witness point, at intersection with the northwesterly right-of-way of U.S. Highway 66 as it existed on March 1, 1966.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>WP T21N R27E S34 S35 └──┘ 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>From this cor. point, a right-of-way marker bears N. 59°59' E., 15.26 chs. dist., monumented with a brass disk, 3 ins. diam., firmly set in a concrete pillar, 6 ins. diam., projecting 2 ins. above the ground, mkd. ARIZONA HIGHWAY DEPT. R.P. 102.00 W.B. CONST. CL STA. 1326X11.72 1964.</p> <p>From this same cor. point, a right-of-way marker bears S. 57°47' W., 11.55 chs. dist., monumented with a brass disk, 3 ins. diam., firmly set in concrete in a sandstone outcropping, 11 x 6 x 1 ft. high, mkd. ARIZONA HIGHWAY DEPT. R.P. 102.00 W.B. CONST. CL STA. 1308X50.00 1964.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS											
	<p>The cor. is located in the northwesterly right-of-way fence of U.S. Interstate Highway 40, and 22 lks. SW of a cor. of fences extending N., NE and SW.</p>										
72.70	<p>Power pole line, bears ENE and WSW.</p>										
79.20	<p>The cor. of secs. 26, 27, 34, and 35, monumented by person(s) unknown, with a sandstone, 25 x 12 x 4 ins., firmly set, projecting 12 ins. above ground, mkd. with 2 grooves on the E. face, and 1 groove on the S. face. This is accepted as the best available evidence of the position of the original cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr> <td>T21N</td> <td>R27E</td> </tr> <tr> <td>S27</td> <td>S26</td> </tr> <tr> <td colspan="2" style="text-align: center;">+</td> </tr> <tr> <td>S34</td> <td>S35</td> </tr> <tr> <td colspan="2" style="text-align: center;">1990</td> </tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Bury the stone alongside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 2 lks. S. of a cor. of fences extending S. and W.</p>	T21N	R27E	S27	S26	+		S34	S35	1990	
T21N	R27E										
S27	S26										
+											
S34	S35										
1990											
8.03	<hr/> <p>From the cor. of secs. 25, 26, 35, and 36.</p> <p>West, bet. secs. 26 and 35.</p> <p>Over nearly level, open land.</p> <p>Point for a witness point on the 100 ft. southeasterly right-of-way of the Atchison Topeka and Santa Fe Railway Co., bears ENE and WSW.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>										

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	WP T21N R27E S26 <hr style="width: 10%; margin: 0 auto;"/> S35 1994
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post. Set a steel fence post alongside the cor. From this cor., milepost 206, at station 10399+42.8, on the S. main track (westbound) of the Atchison Topeka and Santa Fe Railway Co., identical with the center line of the railroad right-of-way, bears N. 58°36' E., 15.25 chs. dist. The cor. is located on the right bank of the Puerco River, bears E. and WSW.
10.10	Fence, bears ENE and WSW.
12.355	S. main track (westbound) of the Atchison Topeka and Santa Fe Railway Co., bears ENE and WSW.
13.025	N. main track (eastbound) of the Atchison Topeka and Santa Fe Railway Co., bears ENE and WSW.
13.80	Telegraph pole line, bears NE and SW.
14.30	Fence, bears ENE and WSW.
40.00	The 1/4 sec. cor. of secs. 26 and 35, reestablished by Ralph B. Nunnelley, R.C.E. 4901, in 1968, as per a map recorded at the Apache County Courthouse in St. Johns, Arizona, monumented with a stone, 42 x 13 x 9 ins., laying on the ground, mkd. 1/4. This is accepted as a careful and faithful reestablishment of the position of the original cor. At the cor. point Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.
	T21N R27E S26 1/4 — S35 1994

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Bury the stone alongside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <hr style="width: 20%; margin: 10px auto;"/>
	<p>S. 89°58' W., beginning new measurement.</p>
17.10	<p>Fence, bears ENE and WSW.</p>
20.10	<p>Center of eastbound U.S. Interstate Highway 40, pavement, 60 lks. wide, bears ENE and WSW.</p>
23.80	<p>Center of westbound U.S. Interstate Highway 40, pavement, 60 lks. wide, bears ENE and WSW.</p>
26.92	<p>Point for a witness point, at intersection with the northwesterly right-of-way of U.S. Highway 66 as it existed on March 1, 1966.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
	<p>WP T21N R27E S26 ----- S35/ 1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p>
	<p>The cor. is located in the northwesterly right-of-way fence of U.S. Interstate Highway 40.</p>
	<p>From this cor., a right-of-way marker for STA. 1326X11.72, hereinbefore described, bears N. 61°14' E., 2 lks. dist.</p>
	<p>From this same cor., a right-of-way marker for STA. 1308X50.00, hereinbefore described, bears S. 59°02' W., 26.79 chs. dist.</p>
28.00	<p>Power pole line, bears ENE and WSW.</p>
39.99	<p>The cor. of secs. 26, 27, 34, and 35.</p>
	<hr style="width: 80%; margin: 0 auto;"/> <p>N. 0°16' W., bet. secs. 26 and 27.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Ascend gradually over nearly level, open land.
16.50	Top of mesa, bears NNE and SSW; thence over rolling land, through scattered juniper.
39.68	The 1/4 sec. cor. of secs. 26 and 27, monumented by person(s) unknown, with an old, well embedded mound of stone, 30 ins. diam. This is accepted as the best available evidence of the position of the original cor.
	At the cor. point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, encircled with a collar of stone, with brass cap mkd.
	<p style="text-align: center;">T21N R27E 1/4 S27 S26 1994</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.
	Set a steel fence post alongside the cor.
	The cor. is located 10 lks. N. of a track road, bears SE and NW.

	N. 0°02' E., beginning new measurement.
6.80	Old U.S. Highway 66, decayed pavement, 30 lks. wide, bears NE and SW.
10.50	Power pole line, bears NE and SW.
40.35	The cor. of secs. 22, 23, 26, and 27, monumented by person(s) unknown, with a sandstone, 24 x 8 x 6 ins., laying on the ground, mkd. with 4 grooves on one face, 2 grooves on the opposite face, and 2 grooves on another face. This is accepted as the best available evidence of the position of the original cor.
	At the cor. point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T21N R27E S22 S23 ----- S27 S26 1990</p>



Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Bury the stone alongside the stainless steel post.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of the cor.</p> <p>Set a steel fence post alongside the cor.</p> <hr/>
	<p>From the cor. of secs. 23, 24, 25, and 26.</p>
	<p>S. 89°54' W., bet. secs. 23 and 26.</p>
	<p>Over nearly level, open land.</p>
1.00	<p>A cor. of fences, extending N., S., and W.; thence along a fence.</p>
20.30	<p>Power pole line, bears SSE and NNW.</p>
39.96	<p>The 1/4 sec. cor. of secs. 23 and 26, reestablished by Ralph B. Nunnolley, R.C.E. 4901, in 1968, as per a map recorded at the Apache County Courthouse in St. Johns, Arizona, monumented with a sandstone, 31 x 7 x 6 ins., firmly set, projecting 8 ins. above ground, mkd. 1/4 on the N. face, and an X on top. This is accepted as a careful and faithful reestablishment of the position of the original cor.</p>
	<p>At the cor. point</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T21N R27E S23 1/4 — S26 1990</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p>
	<p>Bury the stone alongside the stainless steel post.</p>
	<p>Set a steel fence post alongside the cor.</p>
	<p>The cor. is located 2 lks. W. of a cor. of fences, extending E., NNW and S.</p> <hr/>
	<p>S. 89°54' W., beginning new measurement.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.98	The cor. of secs. 22, 23, 26, and 27.
	<hr/> N. 0°01' W., bet. secs. 22 and 23. Over rolling land, through moderate juniper.
38.30	Fence, bears E. and W.
39.81	Point for the 1/4 sec. cor. of secs. 22 and 23, at proportionate dist.; there is no remaining evidence of the original cor. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. <div style="text-align: center;"> T21N R27E 1/4 S22 S23 1994 </div> Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.
79.62	The cor. of secs. 14, 15, 22, and 23, monumented by person(s) unknown, with a sandstone, 24 x 10 x 6 ins., firmly set, projecting 7 ins. above ground, mkd. with 2 grooves on the E. face, and 4 grooves on the S. face, with a juniper guard post, 4 ins. diam., projecting 64 ins. above ground alongside. This is accepted as the best available evidence of the position of the original cor. At the cor. point Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. <div style="text-align: center;"> T21N R27E S15 S14 <hr style="width: 50%; margin: 0 auto;"/> S22 S23 1994 </div> Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post. Bury the stone alongside the stainless steel post.
	<hr/> From the cor. of secs. 13, 14, 23, and 24. S. 89°41' W., bet. secs. 14 and 23.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
1.34	<p>Over nearly level, open land.</p> <p>Point for a witness point, at intersection with the E. right-of-way of State Highway 63-W, established by Ralph B. Nunnolley, R.C.E. 4901, in 1968, as per a map recorded at the Apache County Courthouse in St. Johns, Arizona, monumented with an iron pin, 1/2 in. diam., 19 ins. long, firmly set, 12 ins. below ground. This is accepted as a careful and faithful determination of the position of the cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the surface of the ground, with brass cap mkd.</p> <div style="text-align: center;">  <p>WP T21N R27E S14 S23 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>From this cor. point, a right-of-way marker on the E. right-of-way of State Highway 63-W, near the cor. of secs. 23, 24, 25, and 26, hereinbefore described, bears S. 1°23' E., 80.06 chs. dist.</p> <p>From this same cor. point, right-of-way marker B.M. #22 73' Lt. Sta. 106+13, hereinbefore described, bears N. 5°18' W., 27.32 chs. dist.</p>
2.05	Center of State Highway 63-W, pavement, 50 lks. wide, bears N. and S.
3.20	Fence, bears N. and S.
40.20	<p>Point for the 1/4 sec. cor. of secs. 14 and 23, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;">  <p>T21N R27E S14 1/4 — S23 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
58.20	Track road, bears SSE and NNW.
80.41	The cor. of secs. 14, 15, 22, and 23.
39.92	<p>N. 0°12' E., bet. secs. 14 and 15.</p> <p>Over rolling land, through moderate juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 14 and 15, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E 1/4 S15 S14 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p>
77.50	Fence, bears E. and W.
79.84	<p>Point for the cor. of secs. 10, 11, 14, and 15, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E S10 S11 ----- S15 S14 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p>
0.35	<p>From the cor. of secs. 11, 12, 13, and 14.</p> <p>N. 87°56' W., bet. secs. 11 and 14.</p> <p>Over rolling land, through moderate juniper.</p>
0.915	Point for a witness point at intersection with the E. right-of-way of State Highway 63-W.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>WP T21N R27E S11) S14) 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>From this cor. point, right-of-way marker B.M. #27 37' Lt. Sta. 131+53.10, hereinbefore described, bears S. 8°07' W., 14.10 chs. dist.</p> <p>From same this cor. point, right-of-way marker B.M. #35 36' Lt. Sta. 170+00.4, hereinbefore described, bears N. 0°56' W., 44.27 chs. dist.</p>
1.60	Center of State Highway 63-W, pavement, 50 lks. wide.
2.45	Fence, bears N. and S.
40.29	<p>The 1/4 sec. cor. of secs. 11 and 14, monumented by person(s) unknown, with a juniper post, 4 ins. sq., 29 ins. long, firmly set, projecting 12 ins. above ground. This is accepted as the best available evidence of the position of the original cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E S11 1/4 — S14 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Bury the juniper post alongside the stainless steel post.</p> <p>The cor. is located 50 lks. N. of a track road, bears E. and W.</p> <hr style="width: 20%; margin: 10px auto;"/>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.95	<p>S. 87°36' W., beginning new measurement.</p> <p>The cor. of secs. 10, 11, 14, and 15.</p> <hr/>
7.60 22.60	<p>N. 0°14' W., bet. secs. 10 and 11.</p> <p>Over rolling land, through scattered juniper.</p> <p>Fence, bears ENE and WSW.</p> <p>Fence, bears NE and SW.</p>
39.92	<p>Point for the 1/4 sec. cor. of secs. 10 and 11, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E 1/4 S10 S11 1994</p> </div>
79.84	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>The cor. is located 20 lks. E. of a track road, bears NNE and SSW.</p> <p>The cor. of secs. 2, 3, 10, and 11, monumented by person(s) unknown, with a stone, 21 x 10 x 8 ins., firmly set, projecting 10 ins. above ground, mkd. with 2 grooves on the E. face and 5 grooves on the S. face, with a juniper guard post alongside, projecting 5 ft. above ground. This is accepted as the best available evidence of the position of the original cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E S 3 S 2 ----- S10 S11 1994</p> </div>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
41.33	<p>Bury the stone alongside the stainless steel post.</p> <hr/> <p>From the cor. of secs. 1, 2, 11, and 12.</p> <p>S. 89°03' W., bet. secs. 2 and 11.</p> <p>Over rolling land, through scattered juniper.</p> <p>The 1/4 sec. cor. of secs. 2 and 11, monumented by person(s) unknown, with a juniper post, 2 ins. diam., 42 ins. long, laying on the ground, faintly mkd. 1/4 on an axed flat. This is accepted as the best available evidence of the position of the original cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R27E S 2 1/4 — S11 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Bury the juniper post alongside the stainless steel post.</p> <hr/> <p>N. 88°55' W., beginning new measurement.</p>
37.97	<p>The cor. of secs. 2, 3, 10, and 11.</p> <hr/> <p>N. 0°28' E., bet. secs. 2 and 3.</p> <p>Over rolling, open land.</p>
39.94	<p>Point for the 1/4 sec. cor. of secs. 2 and 3, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R27E 1/4 S 3 S 2 1994</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
79.75	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>The cor. of secs. 2, 3, 34, and 35, on the N. bdy. of the Tp., hereinbefore described.</p>
8.15	<p>From the stan. cor. of secs. 33 and 34, on the S. bdy. of the Tp., hereinbefore described.</p> <p>N. 0°08' E., bet. secs. 33 and 34.</p> <p>Over nearly level, open land.</p> <p>Center of eastbound U.S. Interstate Highway 40, pavement, 60 lks. wide, bears NE and SW.</p>
10.20	<p>Center of westbound U.S. Interstate Highway 40, pavement, 60 lks. wide, bears NE and SW.</p>
11.05	<p>Fence, bears NE and SW.</p>
11.70	<p>Center of frontage road, paved, bears NE and SW.</p>
12.26	<p>Point for a witness point at intersection with the northwesterly right-of-way line of relocated U.S. Interstate Highway 40.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div data-bbox="826 1255 991 1425" style="text-align: center;"> <p>WP T21N R27E S33 S34 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>From this cor. point, a piece of railroad rail for a right-of-way marker, bears N. 88 1/4° W., 6.5 lks. dist., firmly set, projecting 20 ins. above ground, mkd. O.T. 1249+32.9, located in the old right-of-way fence, bears NE and SW.</p> <p>From this same cor. point, a right-of-way marker bears N. 51°39' E., 3.66 chs. dist., hereinbefore described.</p> <p>From this same cor., a right-of-way marker bears N. 51°39' E., 29.42 chs. dist., hereinbefore described.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.65	<p>The 1/4 sec. cor. of secs. 33 and 34, monumented by person(s) unknown, with a rebar, 1/2 in. diam., 23 ins. long, firmly set, projecting 1 in. above ground. This is accepted as the best available evidence of the position of the original cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E 1/4 S33 S34 1990</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Bury the rebar alongside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 30 lks. NE of a cor. of fences, extending E. and S.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°08' E., beginning new measurement.</p>
37.45	A cor. of abandoned fence lines, extending N., E. and W.
39.65	<p>The cor. of secs. 27, 28, 33, and 34, monumented by person(s) unknown, with a sandstone, 43 x 11 x 8 ins., laying on the ground, mkd. with 3 grooves on a side, and 1 groove on the adjacent side. This is accepted as the best available evidence of the position of the original cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E S28 S27 ----- S33 S34 1990</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Bury the stone alongside the stainless steel post.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 1 lk. E. of an abandoned fence line, bears N. and S.</p>
11.05	<p>From the cor. of secs. 26, 27, 34, and 35.</p> <p>S. 89°38' W., bet. secs. 27 and 34.</p> <p>Ascend into rolling land, through moderate juniper, along a fence.</p> <p>Point for a witness point on the line bet. secs. 27 and 34.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WP T21N R27E S27 — S34 1994</p>
22.27	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>The cor. is located in a fence, bears E. and W.</p> <p>Point for a witness point on the line bet. secs. 27 and 34.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 15 ins. in the ground, to bedrock, in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">WP T21N R27E S27 — S34 1994</p>
35.00	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>The cor. is located in a fence, bears E. and W.</p> <p>Point for an angle point determined at the SW cor. of the East 2310 ft. of the SE 1/4 of sec. 27.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 4 ins. in the ground, to an X chiseled in the sandstone bedrock, supported in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E S27 AP</p> <hr style="width: 50px; margin: 0 auto;"/> <p>S34 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>The cor. is located in a fence, bears E. and W.</p>
40.08	<p>The 1/4 sec. cor. of secs. 27 and 34, monumented by person(s) unknown, with a sandstone, 36 x 12 x 5 ins., firmly set, projecting 21 ins. above ground, mkd. 1/4 on the S. face. This is accepted as the best available evidence of the position of the original cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E S27 1/4 — S34 1990</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Bury the stone alongside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 1 lk. E. of a cor. of fences, extending NNE, E., SSW, and W.</p> <div style="text-align: center;"> <hr style="width: 100px; margin: 0 auto;"/> <p>S. 89°37' W., beginning new measurement.</p> </div>
1.50	Power pole line, bears SSE and NNW.
14.90	Point for an angle point determined at the SE cor. of the West 1650 ft. of the SW 1/4 of sec. 27.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R27E AP S27 ----- S34 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>The cor. is located 4 LKS. SSW of a cor. of fences, extending N., E. and W.</p>
19.91	<p>The W. 1/16 sec. cor. of secs. 27 and 34, monumented by person(s) unknown, with an axle housing, 2 ins. diam., 23 ins. long, including a round universal joint housing with flange, 4 ins. diam., firmly set, projecting 6 ins. above ground, within an old truck wheel, 22 ins. diam., embedded flush with the ground. This is accepted as a careful and faithful determination of the position of the cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R27E S27 W 1/16 — S34 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Bury the axle housing alongside the stainless steel post.</p> <p>The cor. is located 1.5 lks. S. of a cor. of fences, extending E. and S.</p> <p style="text-align: center;">_____</p> <p>S. 89°35' W., beginning new measurement.</p>
1.90	<p>Old U.S. Highway 66, decayed pavement, 30 lks. wide, bears NE and SW.</p>
19.99	<p>The cor. of secs. 27, 28, 33, and 34.</p> <hr/>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>N. 0°14' W., bet. secs. 27 and 28.</p>
	<p>Ascend over rolling land, through moderate juniper, along an abandoned fence.</p>
37.55	<p>Track road, bears ENE and WSW.</p>
37.65	<p>Power pole line, bears ENE and WSW.</p>
39.87	<p>The 1/4 sec. cor. of secs. 27 and 28, monumented by person(s) unknown, with a sandstone, 31 x 10 x 6 ins., loosely set, projecting 5 ins. above ground, mkd. 1/4 on the W. face. This is accepted as the best available evidence of the position of the original cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E 1/4 S28 S27 1990</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the stone alongside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located in a cor. of fences, extending E. and S.</p> <hr style="width: 20%; margin: 10px auto;"/>
40.01	<p>N. 0°09' W., beginning new measurement.</p> <p>Point for the cor. of secs. 21, 22, 27, and 28, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E S21 S22 S28 S27 1994</p> </div>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.03	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <hr/> <p>From the cor. of secs. 22, 23, 26, and 27.</p> <p>S. 89°31' W., bet. secs. 22 and 27.</p> <p>Over rolling land, through scattered juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 22 and 27, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E S22 1/4 ——— S27 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
80.07	<p>The cor. of secs. 21, 22, 27, and 28.</p> <hr/> <p>N. 0°11' E., bet. secs. 21 and 22.</p> <p>Over gently rolling, cleared land, through scattered juniper.</p>
40.01	<p>Point for the 1/4 sec. cor. of secs. 21 and 22, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E 1/4 S21 S22 1994</p> </div>
80.02	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Point for the cor. of secs. 15, 16, 21, and 22, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS											
	<div style="text-align: center;"> <table border="1"> <tr> <td>T21N R27E</td> <td></td> </tr> <tr> <td>S16</td> <td>S15</td> </tr> <tr> <td>S21</td> <td>S22</td> </tr> <tr> <td colspan="2">1994</td> </tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>	T21N R27E		S16	S15	S21	S22	1994			
T21N R27E											
S16	S15										
S21	S22										
1994											
39.88	<hr/> <p>From the cor. of secs. 14, 15, 22, and 23.</p> <p>S. 89°48' W., bet. secs. 15 and 22.</p> <p>Over rolling land, through moderate juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 15 and 22, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p>										
79.77	<div style="text-align: center;"> <table border="1"> <tr> <td>T21N R27E</td> <td></td> </tr> <tr> <td></td> <td>S15</td> </tr> <tr> <td>1/4</td> <td>—————</td> </tr> <tr> <td></td> <td>S22</td> </tr> <tr> <td colspan="2">1994</td> </tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>The cor. of secs. 15, 16, 21, and 22.</p>	T21N R27E			S15	1/4	—————		S22	1994	
T21N R27E											
	S15										
1/4	—————										
	S22										
1994											
31.00	<hr/> <p>N. 0°02' W., bet. secs. 15 and 16.</p> <p>Over gently rolling, cleared land, through scattered juniper.</p> <p>Wash, 90 lks. wide, 10 ft. deep, drains ENE.</p>										
40.01	<p>Point for the 1/4 sec. cor. of secs. 15 and 16, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td>T21N R27E</td> <td></td> </tr> <tr> <td></td> <td>1/4</td> </tr> <tr> <td>S16</td> <td>S15</td> </tr> <tr> <td colspan="2">1994</td> </tr> </table> </div>	T21N R27E			1/4	S16	S15	1994			
T21N R27E											
	1/4										
S16	S15										
1994											

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS											
80.02	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Point for the cor. of secs. 9, 10, 15, and 16, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td>T21N</td><td>R27E</td></tr> <tr><td>S 9</td><td> S10</td></tr> <tr><td colspan="2" style="text-align: center;">— —</td></tr> <tr><td>S16</td><td> S15</td></tr> <tr><td colspan="2" style="text-align: center;">1994</td></tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>	T21N	R27E	S 9	S10	— —		S16	S15	1994	
T21N	R27E										
S 9	S10										
— —											
S16	S15										
1994											
12.70	<p>From the cor. of secs. 10, 11, 14, and 15.</p> <p>S. 89°55' W., bet. secs. 10 and 15.</p> <p>Ascend over rolling, cleared land, through scattered juniper.</p> <p>Fence, bears SE and NW.</p>										
13.00	Dirt road, 10 lks. wide, bears SE and NW.										
18.70	Power pole line, bears SSE and NNW.										
35.65	Fence, bears SE and NW.										
40.04	<p>Point for the 1/4 sec. cor. of secs. 10 and 15, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td>T21N</td><td>R27E</td></tr> <tr><td></td><td>S10</td></tr> <tr><td>1/4</td><td>— —</td></tr> <tr><td></td><td>S15</td></tr> <tr><td colspan="2" style="text-align: center;">1994</td></tr> </table> </div>	T21N	R27E		S10	1/4	— —		S15	1994	
T21N	R27E										
	S10										
1/4	— —										
	S15										
1994											
80.08	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>The cor. of secs. 9, 10, 15, and 16.</p>										

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.01	<p>N. 0°15' W., bet. secs. 9 and 10.</p> <p>Over rolling, cleared land, through scattered juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 9 and 10, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E 1/4 S 9 S10 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
80.02	<p>Point for the cor. of secs. 3, 4, 9, and 10, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E S 4 S 3 ----- S 9 S10 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>From this cor. point, a sandstone, 21 x 15 x 2 ins. laying loose on the ground, mkd. AM on a face, and with 1 groove on the opposite face, bears S. 0°47', W., 7.67 chs. dist. This stone of unknown origin, does not relate harmoniously to accepted cors. nearby, has no evidence of utilization by previous landowners, and is not utilized in the course of this resurvey.</p>
22.00 40.04	<p>From the cor. of secs. 2, 3, 10, and 11.</p> <p>N. 89°57' W., bet. secs. 3 and 10.</p> <p>Over rolling, cleared land, through scattered juniper.</p> <p>Descend into broken, rolling land.</p> <p>Point for the 1/4 sec. cor. of secs. 3 and 10, at proportionate dist.; there is no remaining evidence of the original cor.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
80.09	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T21N R27E S 3 1/4 ——— S10 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>The cor. is located on a ridge, bears N. and S.</p> <p>The cor. of secs. 3, 4, 9, and 10.</p> <hr/>
40.01	<p>N. 0°37' E., bet. secs. 3 and 4.</p> <p>Over gently rolling land, through sage and scattered juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 3 and 4, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R27E 1/4 S 4 S 3 1994</p>
80.22	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>The cor. of secs. 3, 4, 33, and 34, on the N. bdy. of the Tp., hereinbefore described.</p> <hr/> <p>From the stan. cor. of secs. 32 and 33, on the S. bdy. of the Tp., hereinbefore described.</p> <p>N. 0°02' W., bet. secs. 32 and 33.</p> <p>Ascend over rolling land, through dense juniper, along a fence, bears N. and S.</p> <p>36.15 Power pole line, bears NE and SW.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
37.83	<p>The 1/4 sec. cor. of secs. 32 and 33, monumented by person(s) unknown, with a sandstone, 16 x 9 x 5 ins., firmly set, projecting 6 ins. above ground, mkd. 1/4 on the W. face. This is accepted as the best available evidence of the position of the original cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E 1/4 S32 S33 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the stone alongside the stainless steel post.</p> <p>The cor. is located in a fence, bears N. and S.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°19' E., beginning new measurement.</p>
42.00	<p>The cor. of secs. 28, 29, 32, and 33, monumented by person(s) unknown, with a sandstone, 17 x 11 x 9 ins., firmly set, projecting 10 ins. above ground, mkd. with 4 grooves on the E. face, 1 groove on the S. face, and 2 grooves on the W. face. This is accepted as the best available evidence of the position of the original cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E S29 S28 ----- S32 S33 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the stone alongside the stainless steel post.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.05	<p>The cor. is located 25 lks. N. of a cor. of fences, extending ENE, S., and WSW.</p> <hr/> <p>From the cor. of secs. 27, 28, 33, and 34.</p> <p>N. 89°57' W., bet. secs. 28 and 33.</p> <p>Ascend over broken, rolling land, through moderate juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 28 and 33, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E S28 1/4 ——— S33 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
80.11	<p>The cor. of secs. 28, 29, 32, and 33.</p> <hr/> <p>N. 0°18' W., bet. secs. 28 and 29.</p> <p>Ascend over rolling land, through dense juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 28 and 29, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E 1/4 S29 S28 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Thence ascend over rolling, cleared land, through scattered juniper.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS											
80.10	<p>Point for the cor. of secs. 20, 21, 28, and 29, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td>T21N</td> <td>R27E</td> </tr> <tr> <td>S20</td> <td>S21</td> </tr> <tr> <td>S29</td> <td>S28</td> </tr> <tr> <td colspan="2">1994</td> </tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>	T21N	R27E	S20	S21	S29	S28	1994			
T21N	R27E										
S20	S21										
S29	S28										
1994											
40.12	<p>From the cor. of secs. 21, 22, 27, and 28.</p> <p>N. 89°47' W., bet. secs. 21 and 28.</p> <p>Ascend over rolling, cleared land, through scattered juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 21 and 28, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td>T21N</td> <td>R27E</td> </tr> <tr> <td colspan="2">S21</td> </tr> <tr> <td>1/4</td> <td>_____</td> </tr> <tr> <td colspan="2">S28</td> </tr> <tr> <td colspan="2">1994</td> </tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>	T21N	R27E	S21		1/4	_____	S28		1994	
T21N	R27E										
S21											
1/4	_____										
S28											
1994											
80.24	<p>The cor. of secs. 20, 21, 28, and 29.</p> <hr/> <p>N. 0°24' E., bet. secs. 20 and 21.</p> <p>Over rolling, cleared land, through scattered juniper.</p>										
40.05	<p>Point for the 1/4 sec. cor. of secs. 20 and 21, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>										

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
80.10	<p style="text-align: center;">T21N R27E 1/4 S20 S21 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Point for the cor. of secs. 16, 17, 20, and 21, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R27E S17 S16 ----- S20 S21 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
39.97	<p>From the cor. of secs. 15, 16, 21, and 22.</p> <p>N. 89°43' W., bet. secs. 16 and 21.</p> <p>Over rolling land, through moderate juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 16 and 21, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p>
79.94	<p style="text-align: center;">T21N R27E S16 1/4 ----- S21 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>The cor. of secs. 16, 17, 20, and 21.</p> <hr/> <p>N. 0°14' W., bet. secs. 16 and 17.</p> <p>Over rolling land, through moderate juniper.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.05	<p>Point for the 1/4 sec. cor. of secs. 16 and 17, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E 1/4 S17 S16 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>The cor. is located 3 lks. N. of a fence, bears E. and W.</p>
80.10	<p>Point for the cor. of secs. 8, 9, 16, and 17, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E S 8 S 9 ----- S17 S16 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
33.80	<hr/> <p>From the cor. of secs. 9, 10, 15, and 16.</p> <p>N. 89°40' W., bet. secs. 9 and 16.</p> <p>Ascend over rolling, cleared land, through scattered juniper.</p>
40.11	<p>Ridge, bears NNE and SSW.</p> <p>Point for the 1/4 sec. cor. of secs. 9 and 16, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
80.21	<p style="text-align: center;">T21N R27E S 9 1/4 ——— S16 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>The cor. of secs. 8, 9, 16, and 17.</p> <hr/>
40.05	<p>N. 0°05' E., bet. secs. 8 and 9.</p> <p>Over rolling, cleared land, through scattered juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 8 and 9, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
80.10	<p style="text-align: center;">T21N R27E 1/4 S 8 S 9 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Point for the cor. of secs. 4, 5, 8, and 9, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T21N R27E S 5 S 4 ——— S 8 S 9 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <hr/> <p>From the cor. of secs. 3, 4, 9, and 10.</p> <p>N. 89°36' W., bet. secs. 4 and 9.</p> <p>Over rolling land, through moderate juniper.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.86	<p>Point for the 1/4 sec. cor. of secs. 4 and 9, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R27E S 4 1/4 ——— S 9 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
79.73	<p>The cor. of secs. 4, 5, 8, and 9.</p> <hr/> <p>N. 0°34' E., bet. secs. 4 and 5.</p> <p>Over rolling land, through moderate juniper.</p>
40.05	<p>Point for the 1/4 sec. cor. of secs. 4 and 5, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R27E 1/4 S 5 S 4 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.</p>
80.19	<p>The cor. of secs. 4, 5, 32, and 33, on the N. bdy. of the Tp., hereinbefore described.</p> <hr/> <p>From the stan. cor. of secs. 31 and 32, on the S. bdy. of the Tp., hereinbefore described.</p> <p>N. 0°18' W., bet. secs. 31 and 32.</p> <p>Over gently rolling land, through sage and scattered juniper.</p>
39.94	<p>Point for the 1/4 sec. cor. of secs. 31 and 32, at proportionate dist.; there is no remaining evidence of the original cor.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T21N R27E 1/4 S31 S32 1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
78.15	<p>Abandoned fence, bears E. and W.</p>
79.88	<p>The cor. of secs. 29, 30, 31, and 32, monumented by person(s) unknown, with a sandstone, 22 x 12 x 7 ins., loosely set, projecting 18 ins. above ground, mkd. with 5 grooves on the E. face, and 1 groove on the S. face, with a juniper guard post, 10 ins. diam., firmly set, projecting 94 ins. above ground, alongside. This is accepted as the best available evidence of the position of the original cor.</p>
	<p>At the cor. point</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T21N R27E S30 S29 ----- S31 S32 1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
	<p>Bury the stone alongside the stainless steel post.</p>
	<p>The cor. is located in an abandoned fence, bears S.</p>
	<hr/> <p>From the cor. of secs. 28, 29, 32, and 33.</p>
	<p>S. 87°22' W., bet. secs. 29 and 32.</p>
	<p>Over rolling land, through dense juniper.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.02	<p>The 1/4 sec. cor. of secs. 29 and 32, monumented by person(s) unknown, with a sandstone, 20 x 9 x 5 ins., firmly set, projecting 9 ins. above ground, mkd. 1/4 on the S. face. This is accepted as the best available evidence of the position of the original cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R27E S29 1/4 ————— S32 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the stone alongside the stainless steel post.</p> <p>The cor. is located in a fence, bears N. and S.</p> <p style="text-align: center;">—————</p> <p>N. 87°42' W., beginning new measurement.</p> <p>Descend over broken, rolling land, through dense juniper.</p>
39.91	<p>The cor. of secs. 29, 30, 31, and 32.</p> <hr/> <p>S. 89°42' W., bet. secs. 30 and 31.</p> <p>Ascend over broken land, through dense juniper.</p>
40.50	<p>Point for the 1/4 sec. cor. of secs. 30 and 31, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T21N R27E S30 1/4 ————— S31 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
80.41	<p>The cor. of secs. 25, 30, 31, and 36, on the W. bdy. of the Tp., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. T21N R26E R27E S25 S30 S36 S31 1990, with a steel fence post alongside the cor., as described in the field notes of the dependent resurvey of the E. bdy., T. 21 N., R. 26 E., executed concurrently under this same group.</p> <hr/> <p>From the cor. of secs. 29, 30, 31, and 32. N. 0°28' W., bet. secs. 29 and 30. Over broken, rolling land, through dense juniper.</p>
39.90	<p>Top of ridge, bears ENE and WSW.</p>
40.02	<p>Point for the 1/4 sec. cor. of secs. 29 and 30, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E 1/4 S30 S29 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
80.04	<p>Point for the cor. of secs. 19, 20, 29, and 30, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E S19 S20 ----- S30 S29 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <hr/> <p>From the cor. of secs. 20, 21, 28, and 29. S. 89°47' W., bet. secs. 20 and 29.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.04	<p>Over rolling, cleared land, through scattered juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 20 and 29, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T21N R27E S20 1/4 ——— S29 1994</p>
40.50	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Top of ridge, bears N. and S.</p>
80.08	<p>The cor. of secs. 19, 20, 29, and 30.</p>
40.06	<hr/> <p>S. 89°39' W., bet. secs. 19 and 30.</p> <p>Descend over broken land, through dense juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 19 and 30, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T21N R27E S19 1/4 ——— S30 1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>The cor. is located on a ridge, bears N. and S.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS											
79.30	<p>The cor. of secs. 19, 24, 25, and 30, on the W. bdy. of the Tp., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with brass cap mkd. T21N R26E R27E S24 S19 S25 S30 1992, with a steel fence post alongside the cor., as described in the field notes of the dependent resurvey of the E. bdy, T. 21 N., R. 26 E., executed concurrently under this same group.</p>										
40.02	<p>From the cor. of secs. 19, 20, 29, and 30.</p> <p>N. 0°17' E., bet. secs. 19 and 20.</p> <p>Over gently rolling land, through moderate juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 19 and 20, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td>T21N</td><td>R27E</td></tr> <tr><td></td><td>1/4</td></tr> <tr><td>S19</td><td> S20</td></tr> <tr><td></td><td>1994</td></tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>	T21N	R27E		1/4	S19	S20		1994		
T21N	R27E										
	1/4										
S19	S20										
	1994										
80.04	<p>Point for the cor. of secs. 17, 18, 19, and 20, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td>T21N</td><td>R27E</td></tr> <tr><td>S18</td><td> S17</td></tr> <tr><td colspan="2"><hr/></td></tr> <tr><td>S19</td><td> S20</td></tr> <tr><td></td><td>1994</td></tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <hr/> <p>From the cor. of secs. 16, 17, 20, and 21.</p> <p>S. 89°44' W., bet. secs. 17 and 20.</p> <p>Over rolling land, through scattered juniper.</p>	T21N	R27E	S18	S17	<hr/>		S19	S20		1994
T21N	R27E										
S18	S17										
<hr/>											
S19	S20										
	1994										

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.11	<p>Point for the 1/4 sec. cor. of secs. 17 and 20, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R27E S17 1/4 ——— S20 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
80.23	<p>The cor. of secs. 17, 18, 19, and 20.</p> <hr/> <p>S. 89°35' W., bet. secs. 18 and 19.</p> <p>Over rolling land, through dense juniper.</p>
1.50	<p>Fence, bears N. and S.</p>
39.99	<p>Point for the 1/4 sec. cor. of secs. 18 and 19, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R27E S18 1/4 ——— S19 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
79.23	<p>The cor. of secs. 13, 18, 19, and 24, on the W. bdy. of the Tp., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with brass cap mkd. T21N R26E R27E S13 S18 S24 S19 1992, with a steel fence post alongside the cor., as described in the field notes of the dependent resurvey of the E. bdy., T. 21 N., R. 26 E., executed concurrently under this same group.</p> <hr/>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From the cor. of secs. 17, 18, 19, and 20.</p> <p>N. 0°06' E., bet. secs. 17 and 18.</p> <p>Over gently rolling land, through moderate juniper.</p>
40.02	<p>Point for the 1/4 sec. cor. of secs. 17 and 18, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E 1/4 S18 S17 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
80.04	<p>Point for the cor. of secs. 7, 8, 17, and 18, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E S 7 S 8 ----- S18 S17 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
39.88	<p>From the cor. of secs. 8, 9, 16, and 17.</p> <p>S. 89°41' W., bet. secs. 8 and 17.</p> <p>Over rolling, cleared land, through scattered juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 8 and 17, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
79.77	<p style="text-align: center;">T21N R27E S 8 1/4 ————— S17 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>The cor. of secs. 7, 8, 17, and 18.</p> <hr/>
40.00	<p>S. 89°32' W., bet. secs. 7 and 18.</p> <p>Over gently rolling, cleared land, through scattered juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 7 and 18, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
78.91	<p style="text-align: center;">T21N R27E S 7 1/4 ————— S18 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>The cor. is located 65 lks. N. of a track road, bears ENE and WSW.</p> <p>The cor. of secs. 7, 12, 13, and 18, on the W. bdy. of the Tp., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with brass cap mkd. T21N R26E R27E S12 S7 S13 S18 1992, with a steel fence post alongside the cor., as described in the field notes of the dependent resurvey of the E. bdy., T. 21 N., R. 26 E., executed concurrently under this same group.</p> <hr/>
4.50	<p>From the cor. of secs. 7, 8, 17, and 18.</p> <p>N. 0°02' W., bet. secs. 7 and 8.</p> <p>Over gently rolling, cleared land, through scattered juniper.</p> <p>Track road, bears E. and W.</p>


Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.02	<p>Point for the 1/4 sec. cor. of secs. 7 and 8, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R27E 1/4 S 7 S 8 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
80.04	<p>Point for the cor. of secs. 5, 6, 7, and 8, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R27E S 6 S 5 ----- S 7 S 8 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
	<hr/> <p>From the cor. of secs. 4, 5, 8, and 9.</p> <p>S. 89°38' W., bet. secs. 5 and 8.</p> <p>Over rolling land, through moderate juniper.</p>
8.10	<p>Top of ridge, bears NE and SW.</p>
39.97	<p>Point for the 1/4 sec. cor. of secs. 5 and 8, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R27E S 5 1/4 ----- S 8 1994</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
79.94	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>The cor. of secs. 5, 6, 7, and 8.</p>
39.93	<p>S. 89°29' W., bet. secs. 6 and 7.</p> <p>Over rolling, cleared land, through scattered juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 6 and 7, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E S 6 1/4 ——— S 7 1994</p> </div>
78.40	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>The cor. of secs. 1, 6, 7, and 12, on the W. bdy. of the Tp., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. T21N R26E R27E S1 S6 S12 S7 1990, with a steel fence post alongside the cor., as described in the field notes of the dependent resurvey of the E. bdy., T. 21 N., R. 26 E., executed concurrently under this same group.</p>
40.02	<p>From the cor. of secs. 5, 6, 7, and 8.</p> <p>N. 0°39' E., bet. secs. 5 and 6.</p> <p>Over broken, rolling land, through scattered juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 5 and 6, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E 1/4 S 6 S 5 1994</p> </div>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
80.00	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>The cor. of secs. 5, 6, 31, and 32, on the N. bdy. of the Tp., hereinbefore described.</p>
<p>Subdivision of Section 26, T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona</p>	
<p>From the 1/4 sec. cor. of secs. 26 and 35.</p> <p>N. 0°07' W., on the N. and S. center line of sec. 26.</p> <p>Over nearly level, open land.</p>	
8.20	<p>The southeasterly right-of-way of U.S. Interstate Highway 40, bears ENE and SW.</p>
9.80	<p>Center of eastbound U.S. Interstate Highway 40, pavement, 60 lks. wide, bears ENE and SW.</p>
11.60	<p>Center of westbound U.S. Interstate Highway 40, pavement, 60 lks. wide, bears ENE and SW.</p>
12.75	<p>Center of frontage road, dirt, 30 lks. wide, curving northeasterly along the right-of-way, and sharply northwesterly into a gate in the right-of-way fence.</p>
13.275	<p>Point for a witness point on the northwesterly right-of-way of U.S. Interstate Highway 40, bears NNE and SW.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
 <p>WP T21N R27E C S26 C 1994</p>	
<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p>	


Subdivision of Section 26,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
47.55	<p>The cor. is located in a curved right-of-way fence, 10 lks. NE of a cor. of fences, extending N., NE and SW; thence along a fence.</p> <p>Point for a witness point on the N. and S. center line of sec. 26.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>WP T21N R27E C S26 C 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located on the steep E. slope of a spur, bears E. and W.; thence enter rolling, open land.</p>
64.52	<p>Point for a witness point on the N. and S. center line of sec. 26.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>WP T21N R27E C S26 C 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located in a fence, bears N. and S., and on old U.S. Highway 66, decayed pavement, 30 lks. wide, bears ENE and WSW.</p>
80.08	<p>The 1/4 sec. cor. of secs. 23 and 26.</p>



Subdivision of Section 27,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From the 1/4 sec. cor. of secs. 27 and 34. N. 0°05' W., on the N. and S. center line of sec. 27. Over rolling land, through dense juniper.</p>
39.76	<p>Point for the center 1/4 sec. cor. of sec. 27, at intersection with the E. and W. center line of sec. 27. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R27E C 1/4 S27 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post. The cor. is located in a fence, bears E. and W., and in a small wash, 30 lks. wide, drains ESE.</p>
79.94	<p>The 1/4 sec. cor. of secs. 22 and 27.</p>
35.00	<p>From the 1/4 sec. cor. of secs. 26 and 27. S. 89°45' W., on the E. and W. center line of sec. 27. Over rolling land, through scattered juniper.</p> <p>Point for an angle point determined at the NW cor. of the East 2310 ft. of the SE 1/4 of sec. 27. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R27E S27 C ——— C AP 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post. The cor. is located 3 lks. WSW of a cor. of fences, extending S., W. and N.; thence along a fence.</p>
39.96	<p>The center 1/4 sec. cor. of sec. 27.</p>

Subdivision of Section 27,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
54.96	<p>Point for an angle point determined at the NE cor. of the West 1650 ft. of the SW 1/4 of sec. 27.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E S27</p>  <p>AP 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>The cor. is located 12 lks. S. of a cor. of fences, extending E. and S.; thence along an abandoned fence line.</p>
79.96	<p>The 1/4 sec. cor. of secs. 27 and 28.</p>
<p>Subdivision of Section 34, T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona</p>	
	<p>From the stan. 1/4 sec. cor. of sec. 34, on the S. bdy. of the Tp.</p>
	<p>N. 0°28' E., on the N. and S. center line of sec. 34.</p>
	<p>Over nearly level, open land.</p>
0.40	<p>S. main track (westbound) of the Atchison Topeka and Santa Fe Railway Co., bears NE and SW.</p>
0.70	<p>N. main track (eastbound) of the Atchison Topeka and Santa Fe Railway Co., bears NE and SW.</p>
2.90	<p>Fence, bears NE and SW.</p>
8.50	<p>Left bank of the Puerco River, bears NE and SW.</p>
17.00	<p>Left bank of the main channel of the Puerco River, bears NE and SW.</p>
20.70	<p>Right bank of the main channel of the Puerco River, bears ENE and WSW.</p>
24.00	<p>Right bank of the Puerco River, bears ENE and SW.</p>



Subdivision of Section 34,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
24.84	<p>Point for a witness point on the N. and S. center line of sec. 34.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;">  </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p>
37.485	<p>Point for a witness point on the southeasterly right-of-way of U.S. Interstate Highway 40, bears NE and SW.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;">  </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 2 lks. S. of the southeasterly right-of-way fence, bears NE and SW.</p>
39.35	<p>Center of eastbound U.S. Interstate Highway 40, pavement, 60 lks. wide, bears NE and SW.</p>
39.63	<p>True point for the center 1/4 sec. cor. of sec. 34, at intersection with the E. and W. center line of sec. 34, falls on eastbound U.S. Interstate Highway 40, where it is impractical to establish a permanent monument.</p> <p>From this point, the point selected for a witness cor. bears S. 45°00' E., 1.68 chs. dist.</p>

Subdivision of Section 34,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">W C T21N R27E C 1/4 S34  1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>The cor. is located 2 lks. S. of the southeasterly right-of-way fence, bears NE and SW.</p>
41.15	Center of westbound U.S. Interstate Highway 40, pavement, 60 lks. wide, bears NE and SW.
47.00	Power pole line, bears NE and SW; thence ascend into rolling, broken land, through moderate juniper.
79.26	The 1/4 sec. cor. of secs. 27 and 34.
	<hr/> <p>From the true point for the 1/4 sec. cor. of secs. 34 and 35. S. 89°34' W., on the E. and W. center line of sec. 34. Over nearly level, open land.</p>
1.05	N. main track (eastbound) of the Atchison Topeka and Santa Fe Railway Co., bears NE and SW.
2.50	Left bank of the Puerco River, bears NE and SW.
3.70	Left bank of the main channel of the Puerco River, bears NE and SW.
6.10	Right bank of the main channel of the Puerco River, bears ENE and WSW.
6.60	Right bank of the Puerco River, bears ENE and SW.
37.05	Point for a witness point on the southeasterly right-of-way of U.S. Interstate Highway 40, bears NE and SW.
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Subdivision of Section 34,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<div style="text-align: center;">  <p>WP T21N R27E C — C S34 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 2 lks. S. of the southeasterly right-of-way fence, curving NE and SW.</p> <p>39.40 Center of eastbound U.S. Interstate Highway 40, pavement, 60 lks. wide, bears NE and SW.</p> <p>39.76 True point for the center 1/4 sec. cor. of secs. 34.</p> <p>42.10 Center of westbound U.S. Interstate Highway 40, pavement, 60 lks. wide, bears NE and SW.</p> <p>59.595 Point for the center W. 1/16 sec. cor. of sec. 34.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
	<div style="text-align: center;">  <p>T21N R27E W 1/16 C — C S34 1990</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>79.43 The 1/4 sec. cor. of secs. 33 and 34.</p>
	<hr/> <p>From the center W. 1/16 sec. cor. of sec. 34.</p> <p>N. 0°21' E., on the N. and S. center line of the NW 1/4 of sec. 34.</p> <p>Over nearly level, open land.</p> <p>3.30 Begin rapid ascent of bluff, bears ESE and SSW.</p>

Subdivision of Section 34,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
4.80	Top of bluff, bears ESE and SSW; thence ascend gradually over rolling land, through moderate juniper.
10.66	Point for a witness point on the N. and S. center line of the NW 1/4 of sec. 34.
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>WP T21N R27E W S34 W 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 20 lks. W. of a fence, bears N. and S.</p>
28.04	Point for a witness point on the N. and S. center line of the NW 1/4 of sec. 34.
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>WP T21N R27E W S34 W 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>The cor. is located 1 lk. E. of a fence, bears N. and S.</p>
39.65	The W. 1/16 sec. cor. of secs. 27 and 34.

Metes-and-Bounds Survey of the East Right-of-Way of
State Highway 63-W Through Sections 11, 14, and 23,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
44.84	<p>The following field notes describe a metes-and-bounds survey of a portion of the E. right-of-way of State Highway 63-W as it existed on September 6, 1968, computed from ties to State Highway Department reference points to the center line, as per a map titled CHAMBERS-GANADO HWY, provided by the Arizona Department of Transportation, Holbrook, Arizona.</p> <p style="text-align: center;">Section 23</p> <hr style="width: 20%; margin: auto;"/> <p>From the witness point at intersection of the line bet. secs. 23 and 24, hereinbefore described.</p> <p>From this cor. point, the 1/4 sec. cor. of secs. 23 and 24, bears N. 0°20' E., 4.87 chs. dist.</p> <p>N. 1°23' W., through sec. 23.</p> <p>The witness point at intersection with the line bet. secs. 14 and 23, hereinbefore described.</p> <p>From this cor. point, the cor. of secs. 13, 14, 23, and 24, bears N. 89°41' E., 1.34 chs. dist.</p>
27.255	<p style="text-align: center;">Section 14</p> <hr style="width: 20%; margin: auto;"/> <p>Thence N. 1°23' W., through sec. 14.</p> <p>Point for an angle point at the beginning of a curve.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E</p> <p>S14 (AP</p> <p>1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>An angle iron guard post is set alongside the cor.</p> <p>The cor. is located 36 lks. W. of a fence, bears N. and S.</p>


Metes-and-Bounds Survey of the East Right-of-Way of
State Highway 63-W Through Sections 11, 14, and 23,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From this cor. point, a State Highway Department reference point for center line station 106+13.10 P.C. bears N. 88°32' E., 0.30 chs. dist., monumented with an open ended iron pipe, 1 in. diam., firmly set, flush with the ground.</p> <p>From this same cor. point, B.M. #22 73' Lt. Sta. 106+13, hereinbefore described, bears S. 88°38' W., 1.86 chs. dist.</p> <hr/> <p>Thence along a 0°10'01" circular curve to the right, having a radius of 34,307.93 ft., the chord of said arc bears N. 0°35' W., 14.602 chs. dist.</p>
14.602	<p>Point for a witness point on the E. right-of-way of State Highway 63-W.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;"> W P T21N R27E S14 (1994 </p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 28 lks. W. of a fence, bears N. and S.</p> <p>Thence continuing along said curve, the chord of said arc bears N. 1°32' E., 23.805 chs. dist.</p>
38.407	<p>Point for an angle point at the end of the curve.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;"> T21N R27E S14 (AP 1994 </p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>An angle iron guard post is set alongside the cor.</p>

Metes-and-Bounds Survey of the East Right-of-Way of
State Highway 63-W Through Sections 11, 14, and 23,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From this cor. point, a State Highway Department reference point for center line station 131+53.10 P.T. bears S. 87°23' E., 0.605 chs. dist., monumented with an open ended iron pipe, 1 in. diam., firmly set, flush with the ground.</p> <p>From this same cor. point, B.M. #27 37' Lt. Sta. 131+53.10, hereinbefore described, bears N. 87°10' W., 1.32 chs. dist.</p> <p>The cor. is located 64 lks. W. of a fence, bears N. and S.</p> <hr/> <p>Thence N. 2°51' E., beginning new measurement.</p>
9.44	<p>Point for an angle point at the beginning of a curve.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E</p> <p>S14 } AP</p> <p>1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 57 lks. W. of a fence, bears N. and S.</p> <p>From this cor. point, B.M. #27 37' Lt. Sta. 131+53.10, hereinbefore described, bears S. 10°47' W., 9.53 chs. dist.</p> <p>From this same cor. point, B.M. #35 36' Lt. Sta. 170+00.4, hereinbefore described, bears N. 0°36' W., 48.87 chs. dist.</p> <hr/> <p>Thence along a 0°09'59" circular curve to the left, having a radius of 34,417.80 ft., the chord of said arc bears N. 2°35' E., 4.600 chs. dist.</p>
4.600	<p>The witness point at intersection with the line bet. secs. 11 and 14, hereinbefore described.</p> <p>From this cor. point the cor. of secs. 11, 12, 13, and 14, bears S. 87°56' E., 0.915 chs. dist., hereinbefore described,</p> <hr/>

Metes-and-Bounds Survey of the East Right-of-Way of
State Highway 63-W Through Sections 11, 14, and 23,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">Section 11</p> <hr style="width: 20%; margin: auto;"/> <p>Thence continuing along said curve, the chord of said arc bears N. 1°20' E., 18.152 chs. dist.</p> <p>22.754 Point for an angle point at the end of the curve.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;">  </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>From this cor., B.M. #27 37' Lt. Sta. 131+53.10, hereinbefore described, bears S. 4°18' W., 32.20 chs. dist.</p> <p>From this same cor., B.M. #35 36' Lt. Sta. 170+00.4, hereinbefore described, bears N. 2°31' W., 26.15 chs. dist.</p> <p>The cor. is located 64 lks. W. of a fence, bears N. and S.</p> <hr style="width: 20%; margin: auto;"/> <p>Thence N. 0°21' E., beginning new measurement.</p>
10.285	<p>The witness point at intersection with the line bet. secs. 11 and 12, hereinbefore described.</p> <p>From this cor. point, the 1/4 sec. cor. of secs. 11 and 12, hereinbefore described, bears N. 0°52' W., 11.33 chs. dist.</p> <hr/> <p style="text-align: center;">Metes-and-Bounds Survey of the West Right-of-Way of State Highway 63-W Through Sections 1 and 12, T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona</p> <hr/> <p>The following field notes describe a metes-and-bounds survey of a portion of the W. right-of-way of State Highway 63-W as it existed on September 6, 1968, computed from ties to State Highway Department reference points to the center line, as per a map titled CHAMBERS-GANADO HWY, provided by the Arizona Department of Transportation, Holbrook, Arizona.</p>


Metes-and-Bounds Survey of the West Right-of-Way of
State Highway 63-W Through Sections 1 and 12,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Section 12</p> <hr/>
	<p>From the witness point at the intersection of the line bet. secs. 11 and 12, hereinbefore described.</p> <p>From this cor. point, the cor. of secs. 1, 2, 11, and 12, hereinbefore described, bears N. 0°52' W., 9.52 chs. dist.</p> <p>Thence along a 0°09'59" circular curve to the right, having a radius of 34,427.48 ft., the chord of said arc bears N. 3°25' E., 4.555 chs. dist.</p>
4.555	<p>Point for an angle point at the end of the curve.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21N R27E</p> <p>S12 / AP</p> <p>1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>An angle iron guard post is set alongside the cor.</p> <p>From this cor. point, State Highway Department reference point for center line station 190+00.04 P.T. bears S. 86°19' E., 2.05 chs. dist., hereinbefore described.</p> <p>From this same cor. point, B.M. #39 85' Lt. Sta. 190+00.4, hereinbefore described, bears N. 86°22' W., 0.53 chs. dist.</p> <p>The cor. is located 57 lks. E. of a fence, bears N. and S.</p> <hr/>
4.975	<p>Thence N. 3°39' E., beginning new measurement.</p> <p>The witness point at intersection with the line bet. secs. 1 and 12, hereinbefore described.</p> <p>From this cor. point, the cor. of secs. 1, 2, 11, and 12, hereinbefore described, bears N. 89°20' W., 0.74 chs. dist.</p> <hr/>
	<p>Section 1</p> <hr/>

Metes-and-Bounds Survey of the West Right-of-Way of
State Highway 63-W Through Sections 1 and 12,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	N. 3°39' E., through sec. 1.
39.84	Point for a witness point, on the W. right-of-way of State Highway 63-W.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">W P T21N R27E / S 1 1994</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.
	Set a steel fence post alongside the cor.
	The cor. is located 278 lks. E. of a fence, bears N. and S.
70.75	Right-of-way marker B.M. #48 50' Lt. Sta. 240+00, hereinbefore described.
79.38	The witness point at intersection with the line bet. secs. 1 and 36, on the N. bdy. of the Tp., hereinbefore described.
	From this cor. point, the cor. of secs. 1, 2, 35, and 36, on the N. bdy. of the Tp., hereinbefore described, bears N. 89°21' W., 4.54 chs. dist.
	<hr/> Metes-and-Bounds Surveys in Section 27, T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona <hr/>
	From the angle point at the SW cor. of the East 2310 ft. of the SE 1/4 of sec. 27, on the line bet. secs. 27 and 34, hereinbefore described.
	N. 0°16' W., on the W. bdy. of the East 2310 ft. of the SE 1/4 of sec. 27.
23.15	A cor. of fences extending N. and SSW; thence along a fence.
29.35	Old U.S. Highway 66, decayed pavement, 30 lks. wide, bears ENE and WSW.



Metes-and-Bounds Surveys in Section 27,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.75	<p>The angle point at the NW cor. of the East 2310 ft. of the SE 1/4 of sec. 27, on the E. and W. center line of sec. 27, hereinbefore described.</p> <hr/>
12.36	<p>From the angle point at the SE cor. of the West 1650 ft. of the SW 1/4 of sec. 27, on the line bet. secs. 27 and 34, hereinbefore described.</p> <p>N. 0°14' W., on the E. bdy. of the West 1650 ft. of the SW 1/4 of sec. 27, along a fence.</p> <p>Point for a witness point, on the E. bdy. of the West 1650 ft. of the SW 1/4 of sec. 27.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;">  </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 4 lks. W. of a fence, bears N. and S.</p>
39.80	<p>The angle point at the NE cor. of the West 1650 ft. of the SW 1/4 of sec. 27, on the E. and W. center line of sec. 27, hereinbefore described.</p> <hr/> <p style="text-align: center;">Metes-and-Bounds Survey in Section 33, T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona</p> <hr/> <p>The following field notes describe the metes-and-bounds survey of a portion of the northwesterly right-of-way of relocated U.S. Highway Interstate Highway 40.</p> <p>From the witness point on the S. bdy. of sec. 33, hereinbefore described.</p> <p>From this cor. point, the stan. cor. of secs. 33 and 34, on the S. bdy. of the Tp., hereinbefore described, bears N. 89°41' E., 15.57 chs. dist.</p>

Metes-and-Bounds Survey in Section 33,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
19.895	<p>N. 51°39' E., through sec. 33, along a fence.</p> <p>The witness point at intersection with the line bet. secs. 33 and 34, hereinbefore described.</p> <p>From this cor. point, the stan. cor. of secs. 33 and 34, on the S. bdy. of the Tp., hereinbefore described, bears S. 0°08' W., 12.26 chs. dist.</p>
<p>Metes-and-Bounds Surveys in Section 35, T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona</p>	
15.243	<p>The following field notes describe the metes-and-bounds survey of a portion of the northwesterly right-of-way of U.S. Highway 66 as it existed on March 1, 1966.</p> <p>From the witness point on the line bet. secs. 34 and 35, hereinbefore described.</p> <p>From this cor. point, the cor. of secs. 26, 27, 34, and 35, hereinbefore described, bears N. 0°56' E., 7.62 chs. dist.</p> <p>Thence through sec. 35, along a 0°14'56" circular curve to the right, having a radius of 23,018.32 ft., the chord of said arc bears N. 59°59' E., 15.242 chs. dist.</p> <p>The witness point at intersection with the line bet. secs. 26 and 35, hereinbefore described.</p> <p>From this cor. point, the cor. of secs. 26, 27, 34, and 35, hereinbefore described, bears S. 89°58' W., 13.07 chs. dist.</p>
29.845	<p>The following field notes describe the metes-and-bounds survey of a portion of the 100 ft. southeasterly right-of-way of the Atchison Topeka and Santa Fe Railway Company.</p> <p>From the witness point on the line bet. secs. 26 and 35, hereinbefore described.</p> <p>From this cor. point, the cor. of secs. 25, 26, 35, and 36, hereinbefore described, bears East, 8.03 chs. dist.</p> <p>S. 63°23' W., through sec. 35.</p> <p>Point for an angle point at the beginning of a curve.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>

Metes-and-Bounds Surveys in Section 35,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">A P T21N R27E</p>  <p style="text-align: center;">1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located on the right bank of the Puerco River, bears ENE and WSW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>Thence along a 1°01'01" circular curve to the left, having a radius of 5,633.87 ft., the chord of said arc bears S. 61°28' W., 5.710 chs. dist., beginning new measurement.</p>
5.711	<p>Point for an angle point at the end of the curve.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">A P T21N R27E</p>  <p style="text-align: center;">1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 20 lks. NW of the right bank of the Puerco River, curving NE and SW, and 10 lks. N. of a fence, bears NE and SW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>Thence S. 59°33' W., beginning new measurement.</p>
34.30	<p>Right bank of the Puerco River, bears ESE and WNW.</p>
40.10	<p>Berm on the left bank of the Puerco River, bears SSE and NNW.</p>
42.07	<p>Point for an angle point at the beginning of a curve.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Metes-and-Bounds Surveys in Section 35,
T. 21 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>A P T21N R27E S35</p>  <p>1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <hr style="width: 20%; margin: 10px auto;"/>
	<p>Thence along a 2°36'49" circular curve to the left, having a radius of 2,192.11 ft., the chord of said arc bears S. 54°36' W., 5.720 chs. dist., beginning new measurement.</p>
3.944	<p>The witness cor. for the 1/4 sec. cor. of secs. 34 and 35, hereinbefore described.</p>
5.727	<p>The witness point at intersection with the line bet. secs. 34 and 35, hereinbefore described.</p> <p>From this cor. point, the true point for the 1/4 sec. cor. of secs. 34 and 35, hereinbefore described, bears N. 0°56' E., 1.115 chs. dist.</p>
	<p>GENERAL DESCRIPTION</p>
	<p>Township 21 North, Range 27 East is located approximately 35 miles northeast of Holbrook, Arizona. The community of Chambers, Arizona is located in the southeast corner of the township.</p> <p>The terrain consists of rolling land, with stands of juniper forests scattered throughout the township. The Puerco River enters in section 25, and leaves in section 34. The average elevation is 6000 feet above sea level.</p> <p>Access is provided by U.S. Interstate Highway 40 through sections 25, 26, 33, 34, and 35, State Highway 63, and several dirt roads. The Atchison Topeka and Santa Fe Railroad runs through sections 25, 26, 34, and 35.</p> <p>Occupancy is limited to the community of Chambers, Arizona, and several individual dwellings, all in the southeast portion of the township.</p> <p>The mean magnetic declination is 13 1/2° E., as shown on U.S.G.S. Quadrangle "CHAMBERS, ARIZ.", 1971 edition.</p>

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Daniel Patterson	Land Surveyor
Gary D. Johnson	Land Surveyor
Geoffrey A. Graham	Surveying Technician
Luke B. Granger	Surveying Technician
Stephen K. Hansen	Surveying Technician
Robert J. Lyle	Surveying Technician
Jack E. Arend	Surveying Aid
Joel D. Ayers	Surveying Aid
Ralph E. Van Buskirk	Surveying Aid
Bruce J. Olson	Surveying Aid
Michael A. Searles	Surveying Aid

