

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES
OF THE

DEPENDENT RESURVEY OF A PORTION OF

THE SOUTH AND EAST BOUNDARIES

AND A PORTION OF THE SUBDIVISIONAL LINES,

THE SUBDIVISION OF SECTIONS 28 AND 34,

AND THE METES-AND-BOUNDS SURVEY

OF THE

MOUNT TIPTON WILDERNESS AREA BOUNDARY

IN TOWNSHIP 26 NORTH, RANGE 18 WEST

Of the Gila and Salt River Meridian,
In the State of Arizona

EXECUTED BY

Robert C. Umbanhowar

Cadastral Surveyor


Under Special Instructions dated April 8, 1994, approved April 8, 1994, which provided for the surveys included under Group Number 770, and assignment instructions dated October 3, 1994.

Survey Commenced October 5, 1994

Survey Completed December 13, 1994

INDEX DIAGRAM

TOWNSHIP 26 NORTH, RANGE 18 WEST,

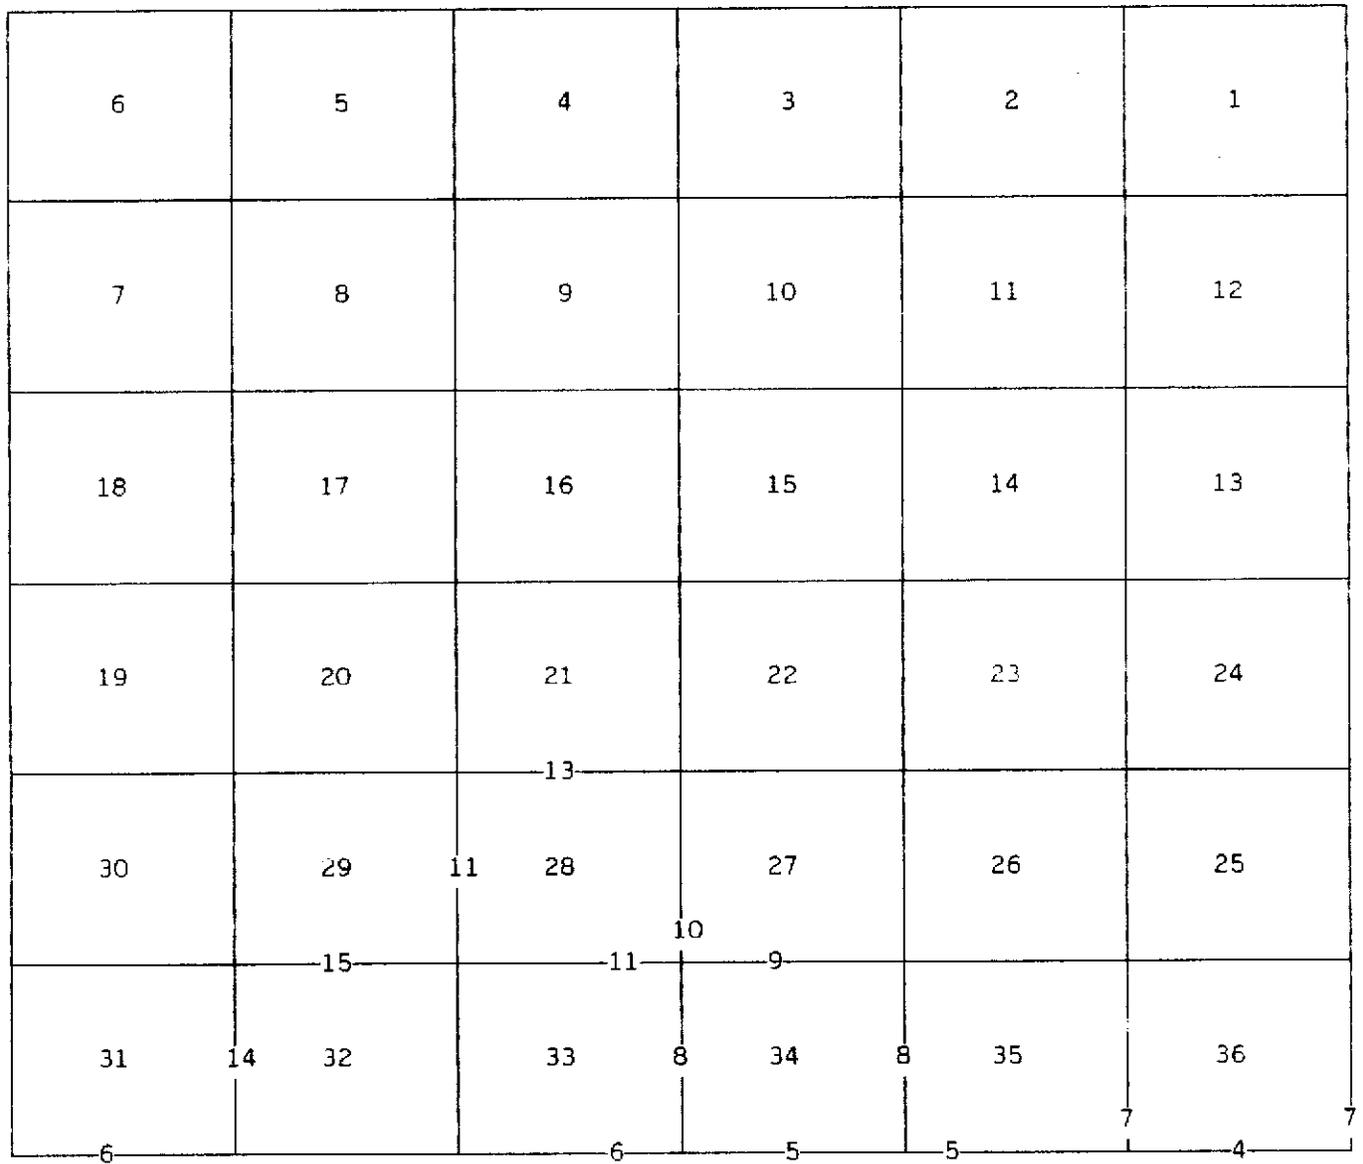

Subdivision of Sec. 28 pp. 15-18
 Subdivision of Sec. 34 pp. 18-19
 Metes-and-Bounds Survey MTWA pp. 19-35

T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS

The following field notes describe the dependent resurvey of a portion of the south and east boundaries and a portion of the subdivisional lines, the subdivision of sections 28 and 34, and the metes-and-bounds survey of Mount Tipton Wilderness Area Boundary, in Township 26 North, Range 18 West, Gila and Salt River Meridian, Arizona.

The history of surveys pertaining to this survey is as follows: The exterior boundaries were surveyed by C. Burton Foster, in 1874. The east boundary was resurveyed by Jesse B. Wright, in 1912. The north, south and west boundaries were resurveyed by H. G. Bardsley, in 1915. The subdivisional lines were surveyed by H. G. Bardsley and Royston C. Durnford, in 1915.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions dated April 8, 1994, for Group No. 770, Arizona.

Preliminary to the resurvey, the lines of the original survey were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The directions of all lines were determined by direct hour angle observations on the sun, and refer to the true meridian. Distances and angles were measured with a Pentax PTS-iii05 total station instruments.

The geographic position of the cor. of Townships 25 and 26 North, Ranges 18 and 19 West, was determined by the technique of static differential positioning using Ashtech models M-XII and MS-XII geodetic units. United States Geological Survey triangulation station "MILLER 1958" was used as the control station. The elevation and coordinates refer to the top of the monument.

Elevation	Latitude	Longitude
3778 ft.	35°35'22.890" N.	114°15'19.390" W. NAD27

The mean magnetic declination, as taken from quadrangle map MT. TIPTON, ARIZ., published in 1968 by U.S. Geological Survey, is 15° E.

Dependent Resurvey of a Portion of the S. Bdy.,
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Restoring the resurvey executed by H. G. Bardsley, in 1915</p> <hr/> <p>Beginning at the cor. of Tps. 25 and 26 N., Rs. 17 and 18 W., monumented with an iron post, 3 ins. diam., firmly set, projecting 18 ins. above the ground, in a mound of stone, 2 1/2 ft. base, 1 ft. high, with brass cap mkd. T26N S36 S31 R18W R17W S1 S6 T25N 1912.</p> <p>Add the marks 1994 to the brass cap.</p> <p>S. 89°59' W., bet. secs. 1 and 36, on the S. bdy. of the Tp.</p>
10.92	Point for AP 4, sec. 36, identical with AP 1, sec. 1, T. 25 N., R. 18 W., on the Mount Tipton Wilderness Area Bdy., hereinafter described.
28.49	Point for AP 5, sec. 36, identical with AP 3, sec. 1, T. 25 N., R. 18 W., on the Mount Tipton Wilderness Area Bdy., hereinafter described.
39.97	Point for the 1/4 sec. cor. of secs. 1 and 36, at proportionate dist.; there is no remaining evidence of the original cor.
	At the cor. point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, in a mound of stone, 2 1/2 ft. base, to top, with brass cap mkd.
	<p>T26N R18W S36 1/4 ————— S1 T25N 1994</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.
63.44	Point for AP 11, sec. 36, identical with AP4, sec. 1, T. 25 N., R. 18 W., on the Mount Tipton Wilderness Area Bdy., hereinafter described.
67.46	Point for AP 12, sec. 36, identical with AP 6, sec. 1, T. 25 N., R. 18 W., on the Mount Tipton Wilderness Area Bdy., hereinafter described.

Dependent Resurvey of a Portion of the S. Bdy.,
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
79.94	<p>The cor. of secs. 1, 2, 35 and 36, monumented with an iron post, 3 ins. diam., firmly set, projecting 24 ins. above the ground, in a mound of stone, 3 ft. base, 1 1/2 ft. high, with a mound of stone, 4 ft. base, 2 ft. high, to the W., with brass cap mkd. T26N R18W S35 S36 S2 S1 T25N 1915.</p> <p>Add the marks 1994 to brass cap.</p> <hr/>
39.98	<p>S. 89°59' W., bet. secs. 2 and 35, along the Mount Tipton Wilderness Area Bdy.</p> <p>The 1/4 sec. cor. of secs. 2 and 35, monumented with an iron post, 1 in. diam., firmly set, projecting 18 ins. above ground, with brass cap mkd. 1/4 S35 S2 1915.</p> <p>Add the marks T26N R18W T25N 1994 to the brass cap.</p> <hr/>
40.02	<p>S. 89°59' W., beginning new measurement.</p> <p>The cor. of secs. 2, 3, 34 and 35, monumented with an iron post, 3 ins. diam., firmly set, projecting 12 ins. above ground, encircled with a collar of stone, and a mound of stone, 3 ft. base, 2 ft. high, to the W., with brass cap mkd. T26N R18W S34 S35 S3 S2 T25N 1915.</p> <p>Add the marks 1994 to the brass cap.</p> <hr/>
	<p>From the 1/4 sec. cor. of secs. 3 and 34, monumented with an iron post, 1 in. diam., loosely set, projecting 18 ins. above a mound of stone, 2 ft. base, 1 ft. high, with brass cap mkd. 1/4 S34 S3 1915.</p> <p>Add the marks T26N R18W T25N 1994 to the brass cap.</p> <p>Rebuild mound of stone, 3 ft. base, to top.</p> <p>S. 89°59' W., bet. secs. 3 and 34.</p>
40.11	<p>Point for the cor. of secs. 3, 4, 33 and 34, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the S. Bdy.,
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS											
	<div style="text-align: center;"> <table border="1"> <tr><td>T26S</td><td>R18W</td></tr> <tr><td>S33</td><td>S34</td></tr> <tr><td>S4</td><td>S3</td></tr> <tr><td>T25N</td><td></td></tr> <tr><td>1994</td><td></td></tr> </table> </div> <p>Found a basalt stone, 24 x 12 x 8 ins., mkd. with 3 grooves on a face and 3 grooves on opposite face, laying loose in nearby rock slide.</p> <p>Deposit the stone in the mound of stone. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <hr/> <p>S. 89°59' W., bet. secs. 4 and 33.</p>	T26S	R18W	S33	S34	S4	S3	T25N		1994	
T26S	R18W										
S33	S34										
S4	S3										
T25N											
1994											
40.11	<p>The 1/4 sec. cor. of secs. 4 and 33, monumented with an iron post, 1 in. diam., loosely set, projecting 36 ins. above the ground, in a mound of stone, 3 ft. base, 1 ft. high, with brass cap mkd. 1/4 S33 S4 1915.</p> <p>Add the marks T26N R18W T25N 1994 to the brass cap.</p> <p>Rebuild supporting mound of stone, 4 ft. base, to top.</p> <hr/> <p>From the cor. of secs. 5, 6, 31 and 32, monumented with an iron post, 3 ins. diam., firmly set, projecting 18 ins. above the ground, in a mound of stone, 3 ft. base, 1 ft. high, with a mound of stone, 3 ft. base, 1 ft. high, to the W., with brass cap mkd. T26N R18W S31 S32 S6 S5 T25N 1915.</p> <p>Add the marks 1994 to the brass cap.</p>										
39.58	<p>N. 89°32' W., bet. secs. 6 and 31, along the Mount Tipton Wilderness Area Bdy.</p> <p>The 1/4 sec. cor. of secs. 6 and 31, monumented with an iron post, 1 in. diam., loosely set, projecting 36 ins. above the ground, in a mound of stone, 2 ft. base, 1 ft. high, with brass cap mkd. 1/4 S31 S6 1915.</p> <p>Add the marks T26N R18W T25N 1994 to the brass cap.</p> <p>Rebuild supporting mound of stone, 4 ft. base, to top.</p> <hr/> <p>S. 89°24' W., beginning new measurement.</p>										

Dependent Resurvey of a Portion of the S. Bdy.,
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
25.29	Point for AP 1, sec. 6, T. 25 N., R. 18 W., as described in the field notes of the concurrent survey of the metes-and-bounds survey of the Mount Tipton Wilderness Area Bdy., T. 25 N., R. 18 W.
40.30	<p>The cor. of Tps. 25 and 26 N., Rs. 18 and 19 W., monumented with an iron post, 3 ins. diam., firmly set, projecting 9 ins. above ground, with a mound of stone, 2 ft. base, 1 ft. high, to the N., with brass cap mkd. T26N R19W R18W S36 S31 S1 S6 1915.</p> <p>Add the marks 1994 to the brass cap.</p>
<p>Dependent Resurvey of a Portion of the E. Bdy., T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona</p>	
<p>Restoring the resurvey executed by Jesse B. Wright, in 1912</p>	
<p>From the cor. of Tps. 25 and 26 N., Rs. 17 and 18 W., hereinbefore described.</p>	
<p>N. 0°02' W., bet. secs. 31 and 36, on the E. bdy. of the Tp., along the Mount Tipton Wilderness Area Bdy.</p>	
10.82	<p>Point for AP 1, sec. 36, on the Mount Tipton Wilderness Area Bdy., hereinafter described.</p> <p>Leave the Mount Tipton Wilderness Area Bdy.</p>
40.17	<p>The 1/4 sec. cor. of secs. 31 and 36, monumented with an iron post, 1 in. diam., firmly set, projecting 29 ins. above ground, in a mound of stone, 2 1/2 ft. base, 2 ft. high, with brass cap mkd. 1/4 S36 S31 1912.</p> <p>Add the marks T26N R18W R17W 1994 to the brass cap.</p>
<p>Dependent Resurvey of a Portion of the Subdivisional Lines, T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona</p>	
<p>Restoring the survey executed by H. G. Bardsley and Royston C. Durnford, 1915</p>	
<p>From the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., hereinbefore described.</p>	

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	N. 0°04' W., bet. secs. 35 and 36, along the Mount Tipton Wilderness Area Bdy.
2.715	Point for AP 13, sec. 36, on the Mount Tipton Wilderness Area Bdy., hereinafter described.
	Leave the Mount Tipton Wilderness Area Bdy.
39.99	The 1/4 sec. cor. of secs. 35 and 36, monumented with an iron post, 1 in. diam., firmly set, projecting 24 ins. above ground, in a mound of stone, 2 ft. base, 1 ft. high, with a mound of stone, 3 ft. base, 2 1/2 ft. high, to the W., with brass cap mkd. 1/4 S35 S36 1915.
	Add the marks T26N R18W 1994 to the brass cap.
	From the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp., hereinbefore described.
	N. 0°10' W., bet. secs. 34 and 35, along the Mount Tipton Wilderness Area Bdy.
40.00	The 1/4 sec. cor. of secs. 34 and 35, monumented with an iron post, 1 in. diam., loosely set, projecting 36 ins. above ground, in a mound of stone, 1 1/2 ft. base, 1 ft. high, with brass cap mkd. 1/4 S34 S35 1915.
	Add the marks T26N R18W 1994 to the brass cap.
	Rebuild supporting mound of stone, 4 ft. base, to top.
	North, beginning new measurement.
40.00	The cor. of secs. 26, 27, 34 and 35, monumented with an iron post, 2 ins. diam., firmly set, projecting 26 ins. above ground, in a mound of stone, 3 1/2 ft. base, 1 1/2 ft. high, with brass cap mkd. T26N R18W S27 S26 S34 S35 1915.
	Add the marks 1994 to the brass cap.
	From the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp., hereinbefore described.
	N. 0°09' W., bet. secs. 33 and 34.
39.99	Point for the 1/4 sec. cor. of secs. 33 and 34, at record dist. from the cor. of secs. 27, 28, 33 and 34; there is no remaining evidence of the original cor.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 15 ins. in the ground, in a supporting mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T26N R18W 1/4 S33 S34 1994</p>
	<p>from which</p>
	<p>A boulder, 4 1/2 x 4 1/2 x 2 1/2 ft. high, projecting from the W. face of a conglomerate cliff, bears N. 52° E., 76 lks. dist., mkd. X 80 on the SW face.</p>
	<p>A boulder, 4 x 3 x 3 ft. high, bears S. 40 3/4° E., 25 lks. dist., mkd. X 80 on the NW face.</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
	<p>Thence along the Mount Tipton Wilderness Area Bdy.</p>
66.06	<p>Point for AP 1, sec. 33 on the Mount Tipton Wilderness Area Bdy., hereinafter described.</p>
	<p>Leave the Mount Tipton Wilderness Area Bdy.</p>
79.99	<p>The cor. of secs. 27, 28, 33 and 34, monumented with an iron post, 2 ins. diam., firmly set, projecting 18 ins. above ground, with brass cap mkd. T26N R18W S28 S27 S33 S34 1915.</p>
	<p>Add the marks 1994 to the brass cap.</p>
	<p>From the cor. of secs. 26, 27, 34 and 35.</p>
	<p>S. 89°50' W., bet. secs. 27 and 34, along the Mount Tipton Wilderness Area Bdy.</p>
40.03	<p>The 1/4 sec. cor. of secs. 27 and 34, monumented with an iron post, 1 in. diam., firmly set, projecting 24 ins. above ground, in a mound of stone, 2 ft. base, 1 ft. high, with brass cap mkd. 1/4 S27 S34 1915.</p>
	<p>Add the marks T26N R18W 1994 to the brass cap.</p>
	<p>Rebuild supporting mound of stone, 4 ft. base, to top.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
20.04	<p>N. 89°54' W., beginning new measurement.</p> <p>Point for the W. 1/16 sec. cor. of secs. 27 and 34.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T26N R18W S27 W 1/16 — S34 1994</p> <p>from which</p> <p style="padding-left: 40px;">A rock cliff, 66 ft. x 18 ft. high, bears N. 12 1/4° E., 35 lks. dist., mkd. X B0 on the S. face.</p> <p style="padding-left: 40px;">A boulder, 12 x 6 x 3 ft. high, bears N. 64 3/4° W., 44 lks. dist., mkd. X B0 on the SE face.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Leave the Mount Tipton Wilderness Area Bdy.</p>
40.08	<p>The cor. of secs. 27, 28, 33 and 34.</p> <hr/>
20.12	<p>N. 0°07' W., bet. secs. 27 and 28.</p> <p>Point for the S. 1/16 sec. cor. of secs. 27 and 28.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T26N R18W S 1/16 S28 S27 1994</p> <p>from which</p> <p style="padding-left: 40px;">A rock outcrop, 8 ft. x 10 ft. high, bears N. 24 3/4° E., 94 lks. dist., mkd. X B0 on the S. face.</p> <p style="padding-left: 40px;">A boulder, 12 x 5 x 5 ft. high, bears S. 75 1/4° E., 166 lks. dist., mkd. X B0 on the W face.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
40.24	<p>The 1/4 sec. cor. of secs. 27 and 28, monumented with an iron post, 1 in. diam., firmly set, projecting 18 ins. above ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd. 1/4 S27 S28 1915.</p>
	<p>Add the marks T26N R18W 1994 to the brass cap.</p>
	<hr/> <p>From the cor. of secs. 27, 28, 33 and 34.</p>
	<p>S. 89°58' W., bet. secs. 28 and 33.</p>
16.70	<p>Point for AP 4, sec. 33, on the Mount Tipton Wilderness Area Bdy., hereinafter described.</p>
	<p>Thence along the Mount Tipton Wilderness Area Bdy.</p>
20.01	<p>Point for the E. 1/16 sec. cor. of secs. 28 and 33.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T26N R18W S28 E 1/16 — S33 1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
40.02	<p>The 1/4 sec. cor. of secs. 28 and 33, monumented with an iron post, 1 in. diam., firmly set, projecting 24 ins. above ground, in a scattered mound of stone, with brass cap mkd. 1/4 S28 S33 1915.</p>
	<p>Rebuild mound of stone, 3 ft. base, to top.</p>
	<p>Add the marks T26N R18W 1994 to the brass cap.</p>
	<hr/> <p>From the cor. of secs. 28, 29, 32 and 33, monumented with an iron post, 2 ins. diam., firmly set, projecting 18 ins. above the ground, with brass cap mkd. T26N R18W S29 S28 S32 S33 1915.</p>
	<p>Add the marks 1994 to the brass cap.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Cor. is located on a moderately steep E. facing slope.</p> <p>N. 0°01' W., bet. secs. 28 and 29, along the Mount Tipton Wilderness Area Bdy.</p>
40.11	<p>The 1/4 sec. cor. of secs. 28 and 29, monumented with an iron post, 1 in. diam., firmly set, projecting 14 ins. above the ground, in a mound of stone, 2 ft. base, 1 ft. high, with brass cap mkd. 1/4 S29 S28 1915.</p> <p>Add the marks T26N R18W 1994 to the brass cap.</p> <p>Leave the Mount Tipton Wilderness Area Bdy.</p> <p>Cor. is located 45 lks. E. of center line of graded road, 10 ft. wide, bears W. and 45 lks. S. of graded road, 10 ft. wide, bears N.</p> <hr/> <p>N. 0°06' W., beginning new measurement.</p>
40.13	<p>The cor. of secs. 20, 21, 28 and 29, monumented with a well imbedded collar of stone, falls in the intersection of bladed roads. This position is harmoniously related to existing original cors., has been accepted as the position by local survey, and therefore is accepted as the best available evidence of the original cor.</p> <p>At the cor. point</p> <p>Set a Number 5 iron reinforcing bar, 13 ins. long, 5/8 in. diam. 20 ins. in the ground.</p> <p>from which</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 22 ins. in the ground, encircled with a collar of stone, for a reference monument, bears N. 42°35' E., 30.1 ft. dist., with cap mkd. RM T26N R18W S21 30.1 FT TO COR 1994, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 18 ins. in the ground, in a mound of stone, 2 1/2 ft. base to top, for a reference monument, bears N. 44°09' W., 41.3 ft. dist., with cap mkd. RM T26N R18W S20 41.3 FT TO COR 1994, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Found original monument, an iron post, 36 ins. long, 2 ins. diam., with brass cap mkd. T26N R18W S20 S21 S28 S29 1915, lying NW of cor. approximately 1 ch. dist.</p> <p>Deposit a section of the original iron post, 4 ins. long, with cap inverted alongside the reinforcing bar.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the reinforcing bar.</p> <p>Cor. is located in the intersection of bladed roads, 13 ft. wide, bears N., S., E., and W.</p> <hr/> <p>From the cor. of secs. 21, 22, 27 and 28, monumented with an iron post, 2 ins. diam. firmly set, projecting 18 ins. above ground, with brass cap mkd. T26N R18W S21 S22 S28 S27 1915.</p> <p>Add the marks 1994 to brass cap.</p> <p>Build mound of stone, 3 ft. base, to top.</p> <p>S. 89°56' W., bet. secs. 21 and 28.</p>
39.96	<p>The 1/4 sec. cor. of secs. 21 and 28, monumented with a collar of stone. This position is harmoniously related to existing original cors., has been accepted as the position by local survey, and therefore is accepted as the best available evidence of the orig. cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T26N R18W S21 1/4 ——— S28 1994</p> </div> <p>Found original monument, an iron post, 36 ins. long, 1 in. diam., with brass cap mkd. 1/4 S21 S28 1915, lying NNW of cor. approximately 20 lks. dist.</p> <p>Deposit a section of the original iron post, 2 ins. long, with cap inverted alongside the stainless steel post.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>from which</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 22 ins. in the ground, encircled with a collar of stone, for a reference monument, bears S. 45°58' E., 39.5 ft. dist., with cap mkd. RM T26N R18W S28 39.5 FT TO COR 1994, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 16 ins. in the ground, in a supporting mound of stone, 3 ft. base, to top, for a reference monument, bears S. 20°24' W., 24.9 ft. dist., with cap mkd. RM T26N R18W S28 24.9 FT TO COR 1994, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 15 lks. S. of the intersection of bladed roads, 13 ft. wide, bears N., E., and W.</p> <hr/> <p>S. 89°56' W., beginning new measurement.</p> <p>39.95 The cor. of secs. 20, 21, 28 and 29.</p> <hr/>
	<p>From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp., hereinbefore described.</p> <p>N. 0°03' E., bet. secs. 31 and 32, along the Mount Tipton Wilderness Area Bdy.</p> <p>39.89 The 1/4 sec. cor. of secs. 31 and 32, monumented with an iron post, 1 in. diam., firmly set, projecting 18 ins. above ground, with a mound of stone, 3 ft. base, 2 ft. high, to the W., with cap erroneously mkd. 1/4 S32 S33 1915.</p> <p>Remark the brass cap to read T26N R18W 1/4 S31 S32 1994 1915.</p> <hr/>
	<p>N. 0°09' W., beginning new measurement.</p> <p>40.03 The cor. of secs. 29, 30, 31 and 32, monumented with an iron post, 2 ins. diam., firmly set, projecting 18 ins. above ground, in a mound of stone, 3 ft. base, 1 ft. high, with brass cap mkd. T26N R18W S30 S29 S31 S32 1915.</p> <p>Add the marks 1994 to the brass cap.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Cor. is located on a steep N. facing slope.</p> <hr/>
	<p>From the cor. of secs. 28, 29, 32 and 33.</p>
	<p>S. 89°43' W., bet. secs. 29 and 32, along the Mount Tipton Wilderness Area Bdy.</p>
39.99	<p>The 1/4 sec. cor. of secs. 29 and 32, monumented with an iron post, 1 in. diam., firmly set, projecting 24 ins. above ground, in a mound of stone, 4 ft. base, 1 ft. high, with brass cap mkd. 1/4 S29 S32 1915.</p>
	<p>Add the marks T26N R18W 1994 to the brass cap.</p>
	<p>Rebuild mound of stone, 4 ft. base, to top.</p>
	<p>Cor. is located on a N. facing slope.</p> <hr/>
	<p>N. 89°39' W., beginning new measurement.</p>
39.88	<p>The cor. of secs. 29, 30, 31 and 32.</p> <hr/>
	<p style="text-align: center;">Subdivision of Section 28, T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona</p> <hr/>
	<p>From the 1/4 sec. cor. of secs. 28 and 33.</p>
	<p>N. 0°01' E., on the N. and S. center line of sec. 28, along the Mount Tipton Wilderness Area Bdy.</p>
20.04	<p>Point for the center S. 1/16 sec. cor. of sec. 28.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T26N R18W C S1/16 S28 C 1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
	<p>Leave the Mount Tipton Wilderness Area Bdy.</p>

Subdivision of Section 28,
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
30.66	Point for AP 3, sec. 28, on the Mount Tipton Wilderness Area Bdy., hereinafter described.
40.08	<p>Point for the center 1/4 sec. cor. of sec. 28, at intersection with the E. and W. center line of sec. 28</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T26N R18W</p> <p style="text-align: center;">C 1/4 S28</p> <p style="text-align: center;">1994</p> <p>Raise a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, 1 bk. W. of cor.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
80.09	<p>The 1/4 sec. cor. of secs. 21 and 28.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 27 and 28.</p> <p>S. 89°45' W., on the E. and W. center line of sec. 28.</p>
19.96	<p>Point for the center E. 1/16 sec. cor. of sec. 28.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, in a supporting mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T26N R18W</p> <p style="text-align: center;">E 1/16</p> <p style="text-align: center;">C ——— C</p> <p style="text-align: center;">S28</p> <p style="text-align: center;">1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
39.92	The center 1/4 sec. cor. of sec. 28.
49.83	Point for AP 6, sec. 28, on the Mount Tipton Wilderness Area Bdy., hereinafter described.
79.33	Point for AP 21, sec. 28, on the Mount Tipton Wilderness Area Bdy., hereinafter described.

Subdivision of Section 28,
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
79.79	<p>Thence along the Mount Tipton Wilderness Area Bdy.</p> <p>The 1/4 sec. cor. of secs. 28 and 29.</p> <hr/>
20.08	<p style="text-align: center;">SE 1/4</p> <hr style="width: 20%; margin: auto;"/> <p>From the E. 1/16 sec. cor. of secs. 28 and 33.</p> <p>N. 0°03' W., on the N. and S. center line of the SE 1/4 of sec. 28.</p> <p>Point for the SE 1/16 sec. cor. of sec. 28, at intersection with the E. and W. center line of the SE 1/4 of sec. 28.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, in a supporting mound of stone, 2 1/2 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T26N R18W</p> <p style="text-align: center;">SE 1/16 S28</p> <p style="text-align: center;">1994</p> <p>from which</p> <p style="padding-left: 40px;">A boulder, 5 x 4 x 6 ft. high, bears N. 50 1/4° E., 123 lks. dist., mkd. X BO on the SE face.</p> <p style="padding-left: 40px;">A boulder, 4 x 3 x 1 1/2 ft. high, bears N. 24 3/4° W., 94 lks. dist., mkd. X BO on the S. face ,</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
40.16	<p>The center E. 1/16 sec. cor. of secs. 28.</p> <hr/>
19.98	<p>From the S. 1/16 sec. cor. of secs. 27 and 28.</p> <p>S. 89°51' W., on the E. and W. center line of SE 1/4 of sec. 28.</p>
33.62	<p>The SE 1/16 sec. cor. of sec. 28.</p>
	<p>Point for AP 1, sec. 28, on the Mount Tipton Wilderness Area Bdy., hereinafter described.</p> <p>Thence along the Mount Tipton Wilderness Area Bdy.</p>

Subdivision of Section 28,
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
39.96	The center S. 1/16 sec. cor. of sec. 28.
<hr/> Subdivision of Section 34, T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona <hr/>	
40.00	<p>From the 1/4 sec. cor. of secs. 3 and 34, on the S. bdy. of the Tp.</p> <p>N. 0°09' W., on the N. and S. center line of sec. 34.</p> <p>Point for the center 1/4 sec. cor. of sec. 34, at intersection with E. and W. center line of sec. 34.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T26N R18W</p> <p style="text-align: center;">C 1/4 S34</p> <p style="text-align: center;">1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
79.90	<p>The 1/4 sec. cor. of secs. 27 and 34.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 34 and 35.</p> <p>S. 89°59' W., on the E. and W. center line of sec. 34.</p>
39.92	The center 1/4 sec. cor. of sec. 34.
59.97	<p>Point for the center W. 1/16 sec. cor. of sec. 28.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 13 ins. in the ground, in a supporting mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T26N R18W</p> <p style="text-align: center;">W 1/16</p> <p style="text-align: center;">C ——— C</p> <p style="text-align: center;">S34</p> <p style="text-align: center;">1994</p>

Subdivision of Section 34,
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>from which</p> <p style="padding-left: 40px;">A boulder, 4 x 3 x 2 ft. high, bears N. 15 1/2° E., 26 lks. dist., mkd. X B0.</p> <p style="padding-left: 40px;">A boulder, 3 x 3 1/2 x 1 1/2 ft. high, bears N. 65 3/4° E., 67 lks. dist., mkd. X B0.</p> <p>Cor. is located 104 lks. SSW of the cor. of barbed wire fence, 5 strand, bears W and NE.</p> <p>Thence along the Mount Tipton Wilderness Area Bdy.</p>
80.02	<p>The 1/4 sec. cor. of secs. 33 and 34.</p> <hr/> <p style="text-align: center;">NW 1/4</p> <hr style="width: 20%; margin: auto;"/> <p>From the center W. 1/16 sec. cor. of sec. 34</p> <p>N. 0°09' W., on the N. and S. center line of the NW 1/4 of sec. 34, along the Mount Tipton Wilderness Area Bdy.</p>
39.95	<p>The W. 1/16 sec. cor. of sec. 34.</p> <hr/> <p style="text-align: center;">Metes-and-Bounds Survey of the Mount Tipton Wilderness Area Boundary, T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona</p> <hr/> <p style="text-align: center;">In Sec. 36</p> <hr style="width: 20%; margin: auto;"/> <p>From the point for AP 1, sec. 36, on the E. bdy. of the Tp.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center; margin-top: 20px;"> <p>T26N R18W R17W S36 S31 AP1 MTWA 1994</p> </div>



Metes-and-Bounds Survey of the
Mount Tipton Wilderness Area Boundary,
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case inside the stainless steel post.</p> <p>From this cor. point, the cor. of Tps. 25 and 26 N., Rs. 17 and 18 W., bears S. 0°02' E., 10.82 chs. dist., hereinbefore described.</p> <p>Cor. is located 61 lks. S. of trail road, bears NE and SSW.</p> <p>S. 37°30' W., on line 1-2.</p>
2.04	<p>Point for AP 2, sec. 36.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div data-bbox="812 787 1023 976" style="text-align: center;"> <p>T26N R18W S36 AP2 MTWA 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: auto;"/> <p>S. 63°52' W., on line 2-3.</p>
4.14	<p>Point for AP 3, sec. 36.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div data-bbox="844 1354 1023 1543" style="text-align: center;"> <p>T26N R18W S36 AP3 MTWA 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case inside the stainless steel post.</p> <hr style="width: 20%; margin: auto;"/> <p>S. 38°55' W., on line 3-4.</p>
9.48	<p>Point for AP 4, sec. 36, identical with AP 1, sec. 1, T. 25 N., R. 18 W., on the S. bdy. of the Tp.</p>



Metes-and-Bounds Survey of the
Mount Tipton Wilderness Area Boundary,
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, in a mound of stone, 2 1/2 ft. base, to top, with brass cap mkd.</p> <div data-bbox="828 415 1039 640" style="text-align: center;"> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 80 lks. S. of S. bank of wash, 3 chs. wide, drains NE.</p> <p>From this cor. point, the cor. of Tps. 25 and 26 N., Rs. 17 and 18 W., bears N. 89°59' E., 10.92 chs. dist., hereinbefore described.</p>
7.67	<p>From the point for AP 5, sec. 36, identical with AP 3, sec. 1, T. 25 N., R. 18 W., on S. bdy. of the Tp.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 11 ins. in the ground, in a supporting mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.</p> <div data-bbox="812 1239 1088 1459" style="text-align: center;"> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>From this cor. point, the 1/4 sec. cor. of secs. 1 and 36, on the S. bdy. of the Tp., bears S. 89°59' W., 11.48 chs. dist., hereinbefore described.</p> <p>N. 77°50' W., on line 5-6.</p> <p>Point for AP 6, sec. 36.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>

Metes-and-Bounds Survey of the
Mount Tipton Wilderness Area Boundary,
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T26N R18W S36</p>  <p style="text-align: center;">AP6 MTWA 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: auto;"/> <p>S. 82°22' W., on line 6-7.</p>
4.67	<p>Point for AP 7, sec. 36.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T26N R18W S36</p>  <p style="text-align: center;">AP7 MTWA 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 72°31' W., on line 7-8.</p>
5.46	<p>Point for AP 8, sec. 36.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T26N R18W S36</p>  <p style="text-align: center;">AP8 MTWA 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: auto;"/> <p>S. 85°24' W., on line 8-9.</p>
7.62	<p>Point for AP 9, sec. 36.</p>

Metes-and-Bounds Survey of the
 Mount Tipton Wilderness Area Boundary,
 T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

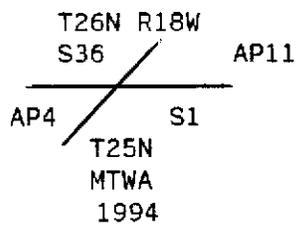CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T26N R18W S36</p>  <p>AP9 MTWA 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
<p>4.46</p>	<p>N. 79°58' W., on line 9-10.</p> <p>Point for AP 10, sec. 36.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T26N R18W S36</p>  <p>AP10 MTWA 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
<p>6.30</p>	<p>S. 63°30' W., on line 10-11.</p> <p>Point for AP 11, sec. 36, identical with AP 4, sec. 1, T. 25 N., R. 18 W., on the S. bdy. of the Tp.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, in a supporting mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T26N R18W S36</p>  <p>AP4 S1 AP11</p> <p>T25N MTWA 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>

Metes-and-Bounds Survey of the
 Mount Tipton Wilderness Area Boundary,
 T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	<p>From this cor. point, the 1/4 sec. cor. of secs. 1 and 36, on the S. bdy. of the Tp., bears N. 89°59' E., 23.47 chs. dist., hereinbefore described.</p> <hr/> <p>From the point for AP 12, sec. 36, identical with AP 6, sec. 1, T. 25 N., R. 18 W., on the S. bdy. of the Tp.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T26N R18W AP12 S36 S1 AP6 MTWA T25N 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>From this cor. point, the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp, bears S. 89°59' W., 12.48 chs. dist., hereinbefore described.</p> <p>N. 77°45' W., on line 12-13.</p> <p>12.77 Point for AP 13, on the line bet. secs. 35 and 36.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T26N R18W S35 S36 AP13 MTWA 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 1 ch. S. of right bank of wash, 1 ch. wide, 10 ft. deep, drains NNE, and 3 chs. S. of right bank of wash, 3 chs. wide, 10 ft. deep, drains E.</p>
--------	--

Metes-and-Bounds Survey of the
Mount Tipton Wilderness Area Boundary,
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona


CHAINS

From this cor. point, the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp, bears S. 0°04' E., 2.715 chs. dist., hereinbefore described.

In Sec. 33

From the point for AP 1, sec. 33, on the line bet. secs. 33 and 34.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 19 ins. in the ground, in a mound of stone, 2 ft. base, to top, with brass cap mkd.



Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case inside the stainless steel post.


Cor. is located 64 lks. S. of trail road, bears SE and NW.

From this cor. point, the cor. of secs. 27, 28, 33 and 34, bears N. 0°09' W., 13.93 chs. dist., hereinbefore described.

N. 48°19' W., on line 1-2.

10.07 Point for AP 2, sec. 33.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.

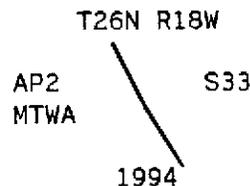

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Cor. is located 61 lks. S. of trail road, bears SE and NNW.

N. 45°41' W., on line 2-3.

Metes-and-Bounds Survey of the
Mount Tipton Wilderness Area Boundary,
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
4.04	<p>Point for AP 3, sec. 33.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div data-bbox="829 447 1073 636" style="text-align: center;"> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case inside the stainless steel post.</p> <p>Cor. is located 61 lks. S. of trail road, bears SE and NNW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 55°13' W., on line 3-4.</p>
7.71	<p>Point for AP 4, sec. 33, on the line bet. secs. 28 and 33.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd.</p> <div data-bbox="873 1083 1073 1272" style="text-align: center;"> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 45 lks. W. of trail road, bears SE and NW, and 189 lks. N. of old barbed wire fence, 4 strand, bears ENE and WSW.</p> <p>From this cor. point, the cor. of secs. 27, 28, 33 and 34, bears N. 89°58' E., 16.70 chs. dist., hereinbefore described.</p> <hr style="width: 20%; margin: 10px auto;"/> <p style="text-align: center;">In Sec. 28</p> <hr style="width: 20%; margin: 10px auto;"/> <p>From the point for AP 1, sec. 28, on the E and W center line of the SE 1/4 of sec. 28.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p>

Metes-and-Bounds Survey of the
Mount Tipton Wilderness Area Boundary,
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
4.81	<div data-bbox="824 275 1071 472" data-label="Diagram"> </div> <p data-bbox="418 499 1360 562">Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case inside the stainless steel post.</p> <p data-bbox="418 598 1323 625">Cor. is located 49 lks. W of trail road, bears NE and SW.</p> <p data-bbox="418 661 1404 724">From this cor. point, the center S. 1/16 sec. cor. of sec. 28, bears S. 89°51' W., 6.34 chs. dist., hereinbefore described.</p> <p data-bbox="418 760 831 787">N. 42°44' W., on line 1-2.</p> <p data-bbox="418 823 799 850">Point for AP 2, sec. 28.</p> <p data-bbox="418 886 1421 976">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>
7.71	<div data-bbox="795 1008 1039 1197" data-label="Diagram"> </div> <p data-bbox="418 1234 1360 1297">Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p data-bbox="418 1333 1356 1360">Cor. is located 45 lks. S. of trail road, bears SE and NNW.</p> <p data-bbox="418 1423 831 1451">N. 23°29' W., on line 2-3.</p> <p data-bbox="418 1486 1453 1514">Point for AP 3, sec. 28, on the N. and S. center line of sec. 28.</p> <p data-bbox="418 1549 1356 1619">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div data-bbox="812 1648 1015 1869" data-label="Diagram"> </div>

Metes-and-Bounds Survey of the
 Mount Tipton Wilderness Area Boundary,
 T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case inside the stainless steel post.</p> <p>From this cor. point, the center 1/4 sec. cor. of sec. 28, bears N. 0°01' E., 9.42 chs. dist., hereinbefore described.</p> <hr/> <p>N. 43°34' W., on line 3-4.</p>
<p>2.43</p>	<p>Point for AP 4, sec. 28.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div data-bbox="873 766 1047 955" style="text-align: center;"> <p>T26N R18W</p> <p>S28</p> <p>AP4 MTWA 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 45 lks. S. of trail road, bears SE and NW.</p> <hr/> <p>N. 74°57' W., on line 4-5.</p>
<p>4.10</p>	<p>Point for AP 5, sec. 28.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div data-bbox="873 1396 1063 1585" style="text-align: center;"> <p>T26N R18W</p> <p>S28</p> <p>AP5 MTWA 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <hr/> <p>N. 33°09' W., on line 5-6.</p>
<p>7.82</p>	<p>Point for AP 6, sec. 28, on the E. and W. center line of sec. 28.</p>

Metes-and-Bounds Survey of the
 Mount Tipton Wilderness Area Boundary,
 T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div data-bbox="841 384 1055 604" style="text-align: center;"> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 87 lks. S. of trail road, bears SSE and NNW.</p> <p>From this cor. point, the center 1/4 sec. cor. of sec. 28, bears N. 89°45' E., 9.91 chs. dist., hereinbefore described.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 26°18' W., on line 6-7.</p>
<p>5.73</p>	<p>Point for AP 7, sec. 28.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with brass cap mkd.</p> <div data-bbox="841 1146 1055 1335" style="text-align: center;"> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 64 lks. W of trail road, bears SSE and NNW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 9°37' W., on line 7-8.</p>
<p>6.44</p>	<p>Point for AP 8, sec. 28.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>

Metes-and-Bounds Survey of the
 Mount Tipton Wilderness Area Boundary,
 T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<div data-bbox="841 289 1058 478" data-label="Diagram"> <p>T26N R18W AP8 MTWA S28 1994</p> </div> <p data-bbox="446 514 1396 577">Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p data-bbox="446 609 1360 640">Cor. is located 136 lks. W of trail road, bears N. and S.</p> <hr data-bbox="771 661 1136 672"/> <p data-bbox="446 703 868 735">N. 14°07' E., on line 8-9.</p> <p data-bbox="300 766 836 798">6.44 Point for AP 9, sec. 28.</p> <p data-bbox="446 829 1388 892">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd.</p>
	<div data-bbox="841 924 1058 1113" data-label="Diagram"> <p>T26N R18W AP9 MTWA S28 1994</p> </div> <p data-bbox="446 1144 1396 1207">Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p data-bbox="446 1239 1347 1270">Cor. is located 45 lks. W of trail road, bears N. and S.</p> <hr data-bbox="771 1291 1136 1302"/> <p data-bbox="446 1333 868 1365">N. 6°30' W., on line 9-10.</p> <p data-bbox="300 1396 852 1428">6.45 Point for AP 10, sec. 28.</p> <p data-bbox="446 1459 1388 1522">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd.</p>
	<div data-bbox="841 1554 1058 1743" data-label="Diagram"> <p>T26N R18W AP10 MTWA S28 1994</p> </div> <p data-bbox="446 1774 1396 1837">Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>

Metes-and-Bounds Survey of the
 Mount Tipton Wilderness Area Boundary,
 T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona


CHAINS

Cor. is located 68 lks. W of trail road, bears NNW and SSE.

N. 2°19' W., on line 10-11.

7.72 Point for AP 11, sec. 28.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,
 17 ins. in the ground, in a mound of stone, 2 ft. base, to top,
 with brass cap mkd.




Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case
 beneath the stainless steel post.

Cor. is located 58 lks. W of trail road, bears N. and S.

N. 22°26' W., on line 11-12.

3.73 Point for AP 12, sec. 28.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,
 21 ins. in the ground, with brass cap mkd.



Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case
 beneath the stainless steel post.


Cor. is located 53 lks. W of trail road, bears NNW and SSE.

N. 28°56' W., on line 12-13.

4.88 Point for AP 13, sec. 28.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,
 25 ins. in the ground, with brass cap mkd.

Metes-and-Bounds Survey of the
Mount Tipton Wilderness Area Boundary,
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<div style="text-align: center;"> <p>T26N R18W</p>  <p>1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 59 lks. S. of graded road, bears E. and W., and 45 lks. W of trail road, bears NNW and SSE.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89°56' W., on line 13-14.</p>
22.70	<p>Point for AP 14, sec. 28.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T26N R18W</p>  <p>1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 45 lks. S. of graded road, 12 ft. wide, bears E. and W., and 45 lks. E of graded road, 12 ft. wide, bears N. and S.</p> <p>From this cor. point, the cor. of secs. 20, 21, 28 and 29, bears N. 45°03' W., 0.64 chs. dist., hereinbefore described.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 0°06' E., on line 14-15.</p>
20.39	<p>Point for AP 15, sec. 28.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with brass cap mkd.</p>

Metes-and-Bounds Survey of the
 Mount Tipton Wilderness Area Boundary,
 T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<div data-bbox="860 283 1071 483" data-label="Diagram"> </div> <p data-bbox="438 504 1396 577">Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p data-bbox="438 598 1380 640">Cor. is located 36 lks. E of trail road, bears N. and SSE.</p> <hr data-bbox="763 661 1136 672"/> <p data-bbox="438 693 893 735">S. 41°19' E., on line 15-16.</p>
<p data-bbox="300 766 373 808">3.26</p>	<p data-bbox="438 766 844 808">Point for AP 16, sec. 28.</p> <p data-bbox="438 829 1396 903">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with brass cap mkd.</p> <div data-bbox="852 924 1079 1123" data-label="Diagram"> </div> <p data-bbox="438 1144 1404 1218">Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p data-bbox="438 1239 1396 1281">Cor. is located 55 lks. E of trail road, bears WNW and SSE.</p> <hr data-bbox="763 1302 1136 1312"/> <p data-bbox="438 1333 885 1375">S. 4°01' W., on line 16-17.</p>
<p data-bbox="300 1396 373 1438">3.65</p>	<p data-bbox="438 1396 852 1438">Point for AP 17, sec. 28.</p> <p data-bbox="438 1459 1404 1533">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with brass cap mkd.</p> <div data-bbox="852 1554 1079 1753" data-label="Diagram"> </div> <p data-bbox="438 1774 1404 1848">Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>

Metes-and-Bounds Survey of the
 Mount Tipton Wilderness Area Boundary,
 T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
4.79	<p>Cor. is located 50 lks. E of trail road, bears WNW and SSE.</p> <hr/> <p>S. 5°39' E., on line 17-18.</p> <p>Point for AP 18, sec. 28.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div data-bbox="860 630 1088 840" style="text-align: center;"> <p>T26N R18W</p> <p>S28</p> <p>MTWA AP18</p> <p>1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 45 lks. E of trail road, bears N. and SSW.</p> <hr/> <p>S. 5°27' W., on line 18-19.</p>
3.34	<p>Point for AP 19, sec. 28.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd.</p> <div data-bbox="876 1260 1088 1470" style="text-align: center;"> <p>T26N R18W</p> <p>S28</p> <p>MTWA AP19</p> <p>1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
3.31	<p>Cor. is located 45 lks. E of trail road, bears NNE and SW.</p> <hr/> <p>S. 37°38' W., on line 19-20.</p> <p>Point for AP 20, sec. 28.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p>

Metes-and-Bounds Survey of the
Mount Tipton Wilderness Area Boundary,
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<div data-bbox="841 281 1036 464" data-label="Diagram"> </div> <p data-bbox="412 499 1354 562">Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p data-bbox="412 596 1414 659">Cor. is located 23 lks. E of graded road, 10 ft. wide, bears N. and S.</p> <hr data-bbox="732 680 1101 688"/> <p data-bbox="412 726 841 751">S. 0°06' E., on line 20-21.</p>
2.47	<p data-bbox="412 789 1398 852">Point for AP 21, sec. 28, on the E. and W. center line of sec. 28.</p> <p data-bbox="412 884 1354 947">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <div data-bbox="841 978 1036 1161" data-label="Diagram"> </div> <p data-bbox="412 1199 1354 1262">Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p data-bbox="412 1293 1414 1356">Cor. is located 23 lks. E of graded road, 10 ft. wide, bears N. and S.</p> <p data-bbox="412 1388 1451 1451">From this cor. point, the 1/4 sec. cor. of secs. 28 and 29, bears S. 89°45' W., 0.46 chs. dist., hereinbefore described.</p>
	<div data-bbox="797 1514 1101 1539" data-label="Section-Header"> <p>GENERAL DESCRIPTION</p> </div> <hr data-bbox="412 1570 1451 1579"/> <p data-bbox="412 1612 1451 1707">The land encompassed in this survey is located about 2 miles east of Dolan Springs, Arizona. Elevations range from 3000 to 5500 ft. above sea level.</p> <p data-bbox="412 1738 1354 1833">Terrain is mountainous and rocky, interspersed with rolling grasslands at the lower elevations. Vegetation consists of juniper, cedar and joshua trees.</p>

T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS

Ranching is the principal commercial use of the area. Other uses of the area include hiking and hunting.

Description of the Mount Tipton Wilderness Area Bdy.,
T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

The following description is for informational purposes only.

Beginning at the cor. of Tps. 25 and 26 N., Rs. 17 and 18 W.

thence N. 0°02' W., 10.82 chs. dist., bet. secs. 31 and 36, on the E. bdy. of the Tp., to Angle Point 1, sec. 36;
thence S. 37°30' W., 2.04 chs. dist. to Angle Point 2, sec. 36;
thence S. 63°52' W., 4.14 chs. dist. to Angle Point 3, sec. 36;
thence S. 38°55' W., 9.48 chs. dist. to Angle Point 4, sec. 36, identical with Angle Point 1, sec. 1, T. 25 N., R. 18 W., on the S. bdy. of the Tp;

From Angle Point 5, sec. 36, identical with Angle Point 3, sec. 1, T. 25 N., R. 18 W., on the S. bdy. of the Tp.;

thence N. 77°50' W., 7.67 chs. dist. to Angle Point 6, sec. 36;
thence S. 82°22' W., 4.67 chs. dist. to Angle Point 7, sec. 36;
thence N. 72°31' W., 5.46 chs. dist. to Angle Point 8, sec. 36;
thence S. 85°24' W., 7.62 chs. dist. to Angle Point 9, sec. 36;
thence N. 79°58' W., 4.46 chs. dist. to Angle Point 10, sec. 36;
thence S. 63°30' W., 6.30 chs. dist. to Angle Point 11, sec. 36, identical with Angle Point 4, sec. 1, T. 25 N., R. 18 W., on the S. bdy. of the Tp.;

From Angle Point 12, sec. 36, identical with Angle Point 6, sec. 1, T. 25 N., R. 18 W., on the S. bdy. of the Tp.;

thence N. 77°45' W., 12.77 chs. dist. to Angle Point 13, sec. 36, on the line bet. secs. 35 and 36;
thence S. 0°04' E., 2.715 chs. dist., bet. secs. 35 and 36 to the cor. of secs. 1, 2, 35 and 36;
thence S. 89°59' W., 39.98 chs. dist., bet. secs. 2 and 35, on the S. bdy. of the Tp. to the 1/4 sec. cor. of secs. 2 and 35;
thence S. 89°59' W., 40.02 chs. dist., bet. secs. 2 and 35, on the S. bdy. of the Tp. to the cor. of secs. 2, 3, 34 and 35;
thence N. 0°10' W., 40.00 chs. dist., bet. secs. 34 and 35 to the 1/4 sec. cor. of secs. 34 and 35;
thence North, 40.00 chs. dist., bet. secs. 34 and 35 to the cor. of secs. 26, 27, 34 and 35;

T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	thence S. 89°50' W., 40.03 chs. dist., bet. secs. 27 and 34 to the 1/4 sec. cor. of secs. 27 and 34;
	thence N. 89°54' W., 20.04 chs. dist., bet. secs. 27 and 34 to the W. 1/16 sec. cor. of secs. 27 and 34;
	thence S. 0°09' E., 39.95 chs. dist., on the N. and S. center line of the NW 1/4 of sec. 34 to the center W. 1/16 sec. cor. of secs. 34;
	thence S. 89°59' W., 20.05 chs. dist., on the E. and W. center line of sec. 34 to the 1/4 sec. cor. of secs. 33 and 34;
	thence N. 0°09' W., 26.07 chs. dist., bet. secs. 33 and 34 to the Angle Point 1, sec. 33;
	thence N. 48°19' W., 10.07 chs. dist. to Angle Point 2, sec. 33;
	thence N. 45°41' W., 4.04 chs. dist. to Angle Point 3, sec. 33;
	thence N. 55°13' W., 7.71 chs. dist. to Angle Point 4, sec. 33, on the line bet. secs. 28 and 33;
	thence S. 89°58' W., 23.32 chs. dist., bet. secs. 28 and 33 to the 1/4 sec. cor. of secs. 28 and 33;
	thence N. 0°01' E., 20.04 chs. dist., on the N. and S. center line of sec. 28 to the center S. 1/16 sec. cor. of sec. 28;
	thence N. 89°51' E., 6.34 chs. dist., on the E. and W. center line of the SE 1/4 of sec. 28 to Angle Point 1, sec. 28;
	thence N. 42°44' W., 4.81 chs. dist. to Angle Point 2, sec. 28;
	thence N. 23°29' W., 7.71 chs. dist. to Angle Point 3, sec. 28, on the N. and S. center line of sec. 28;
	thence N. 42°34' W., 2.43 chs. dist. to Angle Point 4, sec. 28;
	thence N. 74°57' W., 4.10 chs. dist. to Angle Point 5, sec. 28;
	thence N. 33°09' W., 7.82 chs. dist. to Angle Point 6, sec. 28, on the E. and W. center line of sec. 28;
	thence N. 26°18' W., 5.73 chs. dist. to Angle Point 7, sec. 28;
	thence N. 9°37' W., 6.44 chs. dist. to Angle Point 8, sec. 28;
	thence N. 14°07' E., 6.44 chs. dist. to Angle Point 9, sec. 28;
	thence N. 6°30' W., 6.45 chs. dist. to Angle Point 10, sec. 28;
	thence N. 2°19' W., 7.72 chs. dist. to Angle Point 11, sec. 28;
	thence N. 22°26' W., 3.73 chs. dist. to Angle Point 12, sec. 28;
	thence N. 28°56' W., 4.88 chs. dist. to Angle Point 13, sec. 28;
	thence S. 89°56' W., 22.70 chs. dist. to Angle Point 14, sec. 28;
	thence S. 0°06' E., 20.39 chs. dist. to Angle Point 15, sec. 28;
	thence S. 41°19' E., 3.26 chs. dist. to Angle Point 16, sec. 28;
	thence S. 4°01' W., 3.65 chs. dist. to Angle Point 17, sec. 28;
	thence S. 5°39' E., 4.79 chs. dist. to Angle Point 18, sec. 28;
	thence S. 5°27' W., 3.34 chs. dist. to Angle Point 19, sec. 28;
	thence S. 37°38' W., 3.31 chs. dist. to Angle Point 20, sec. 28;
	thence S. 0°06' E., 2.47 chs. dist. to Angle Point 21, sec. 28, on the E. and W. center line of sec. 28;
	thence S. 89°45' W., 0.46 chs. dist., on the E. and W. center line of sec. 28 to the 1/4 sec. cor. of secs. 28 and 29;
	thence S. 0°01' E., 40.11 chs. dist., bet. secs. 28 and 29 to the cor. of secs. 28, 29, 32 and 33;
	thence S. 89°43' W., 39.99 chs. dist., bet. secs. 29 and 32 to the 1/4 sec. cor. of secs. 29 and 32;
	thence N. 89°39' W., 39.88 chs. dist., bet. secs. 29 and 32 to

T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>the cor. of secs. 29, 30, 31 and 32; thence S. $0^{\circ}09'$ E., 40.03 chs. dist., bet. secs. 31 and 32 to the 1/4 sec. cor. of secs. 31 and 32; thence S. $0^{\circ}03'$ W., 39.89 chs. dist., bet. secs. 31 and 32 to the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp.; thence N. $89^{\circ}32'$ W., 39.58 chs. dist., bet. secs. 6 and 31, on the S. bdy. of the Tp. to the 1/4 sec. cor. of secs. 6 and 31; thence S. $89^{\circ}24'$ W., 25.29 chs. dist., bet. secs. 6 and 31, on the S. bdy. of the Tp. to Angle Point 1, sec. 6, T. 25 N., R. 18 W.</p>

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Robert J. Lyle	Surveying Technician
W. William Foster	Surveying Technician
Geoffery A. Graham	Surveying Technician
Mark R. Searles	Surveying Technician

CERTIFICATE OF SURVEY

I, Robert C. Umbanhowar, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of Special Instructions bearing date of the 8th day of April, 1994, I have dependently resurveyed a portion of the south and east boundaries and a portion of the subdivisional lines, subdivided sections 28 and 34, and executed the metes-and-bounds survey of the Mount Tipton Wilderness Area Boundary, in Township 26 North, Range 18 West, of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

July 3, 1998
(Date)

Robert C. Umbanhowar
(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Arizona State Office
Phoenix, Arizona

The foregoing field notes of the dependent resurvey of a portion of the south and east boundaries and a portion of the subdivisional lines, the subdivision of sections 28 and 34, and the metes-and-bounds survey of the Mount Tipton Wilderness Area Boundary in Township 26 North, Range 18 West, Gila and Salt River Meridian, Arizona, executed by Robert C. Umbanhowar, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

7/08/98
(Date)

Kenny A Lavintas
(Chief Cadastral Surveyor of Arizona)

~~CERTIFICATE OF TRANSCRIPT~~

~~I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in T. 26 N., R. 18 W., Gila and Salt River Meridian, Arizona, is a true copy of the original field notes.~~

~~_____
(Date)~~

~~_____
(Chief Cadastral Surveyor of Arizona)~~