

ORIGINAL

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES
OF THE
DEPENDENT RESURVEY OF

THE SEVENTH STANDARD PARALLEL NORTH

THROUGH RANGE 15 EAST (SOUTH BOUNDARY),

THE EAST, WEST AND NORTH BOUNDARIES

AND THE

SUBDIVISIONAL LINES,

TOWNSHIP 29 NORTH, RANGE 15 EAST

Of the Gila and Salt River Meridian,
In the State of Arizona


EXECUTED BY
Joe R. Salazar Cadastral Surveyor

Under Special Instructions dated May 28, 1998, approved May 28, 1998, which provided for the surveys included under Group Number 829, and assignment instructions dated July 13, 1998.

Survey Commenced August 18, 1998
Survey Completed May 10, 1999

INDEX DIAGRAM

TOWNSHIP 29 NORTH, RANGE 15 EAST,

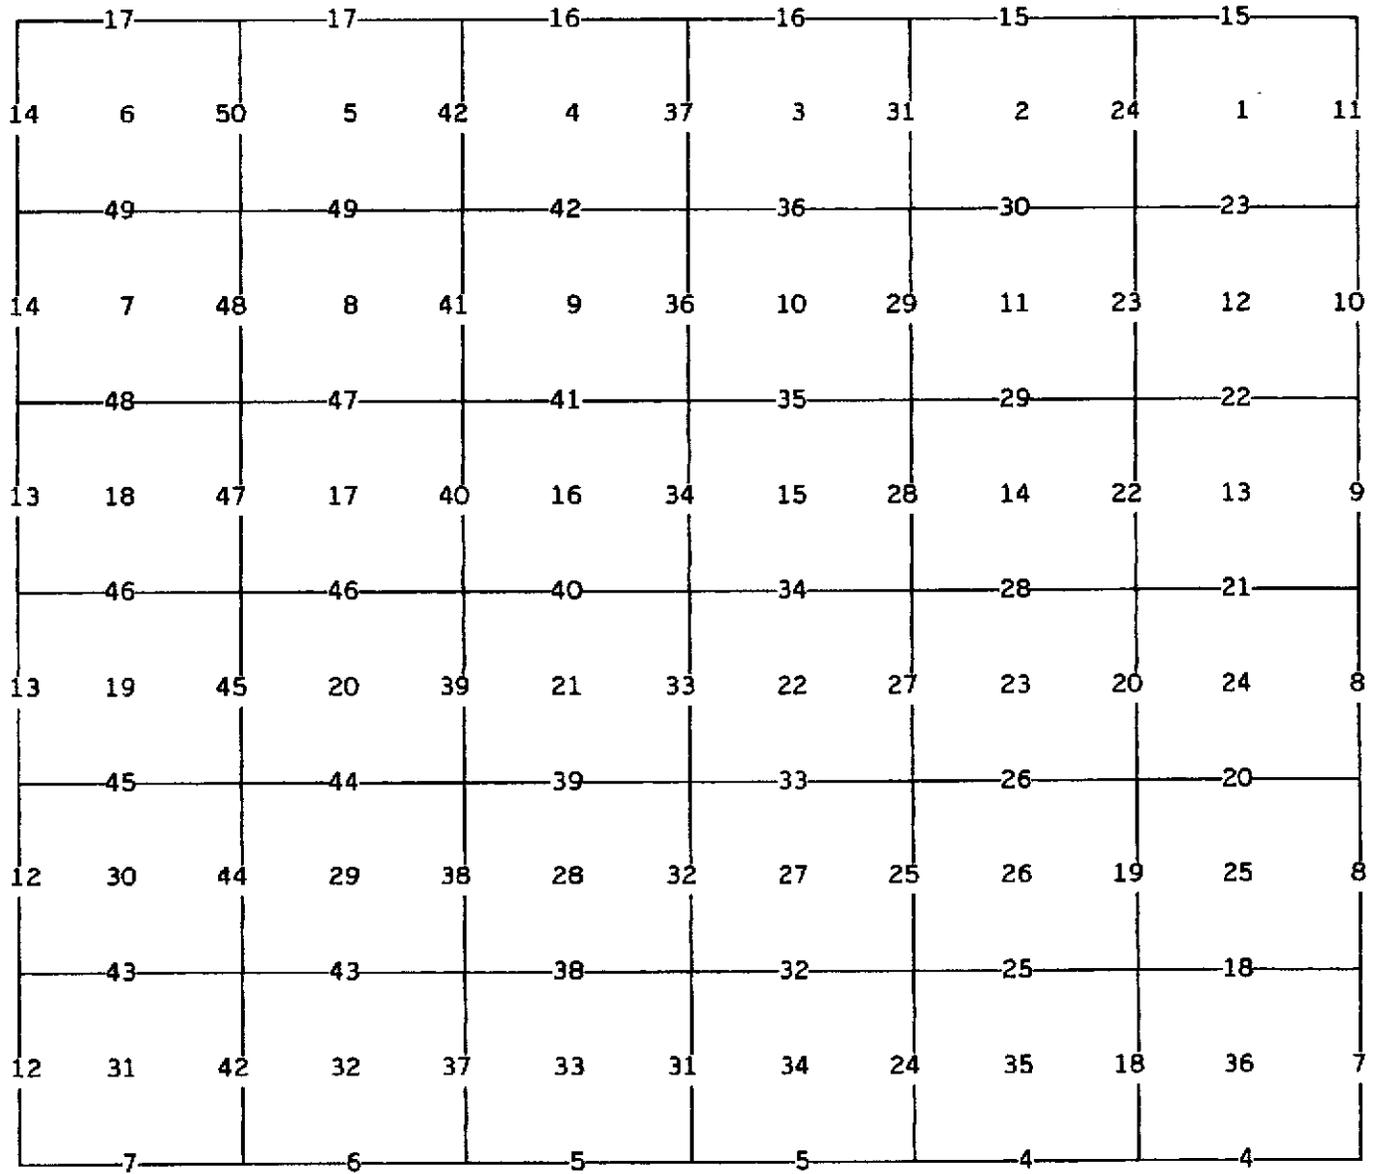

T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS

The following field notes describe the dependent resurvey of the Seventh Standard Parallel North through Range 15 East (S. bdy.), the east, west and north boundaries and the subdivisional lines, Township 29 North, Range 15 East, Gila and Salt River Meridian, Arizona.

John C. Smith surveyed a portion of the Seventh Standard Parallel North (S. bdy.), a portion of the subdivisional lines, and the subdivision of sections 26 and 35, in 1891. Sidney E. Blout resurveyed a portion of the Seventh Standard Parallel North (S. bdy.) and a portion of the subdivisional lines, and surveyed the remaining portion of the Seventh Standard Parallel North (S. bdy.), the east, west and north boundaries and the remaining portion of the subdivisional lines, in 1909.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions dated May 28, 1998, for Group No. 829, Arizona.

Preliminary to the resurvey, the lines of the previous surveys were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the latest record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The true meridian direction and length of lines were determined by real time kinematic global positioning system observations using Trimble 4400 model receivers.

The geographic position of the standard corner of Townships 29 North, Ranges 15 and 16 East, was determined by the system of differential positioning using the Trimble Navigation 4400 Model Global Positioning System. First order U. S. Coast and Geodetic Survey Triangulation Station "N 70 1934", with published latitude of 35°51'29.99114 N., and published longitude of 110°37'46.24765 W., NAD 83 (1992) was used as the control station. The geographic position is as follows:

Latitude: 35°52'02.74" N. Longitude: 110°40'12.14" W. NAD 83(1992)

The mean magnetic declination is 12 1/2° E.

Dependent Resurvey of the Seventh Stan. Par. North, Through R. 15 E.
(S. Bdy.), T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">Restoring the Survey and Resurvey Executed by Sidney E. Blout, in 1909</p> <hr/> <p>Beginning at the stan. cor. of Tps. 29 N., Rs. 15 and 16 E., monumented with an iron post, 3 ins. diam., firmly set, projecting 11 ins. above the ground, with brass cap mkd. T29N S36 S31, with a sandstone 15 X 10 X 7 ins., lying loose alongside, mkd. with 6 grooves on one face, 6 grooves on opposite face and SC on other face. Add the marks SC R15E R16E 1998 to the brass cap.</p> <p>From this cor. point, U. S. Coast and Geodetic Survey triangulation station "N 70 1934", bears S. 74°35' E., 188.80 chs. dist., monumented with a standard brass disk, 3 ins. diam., cemented in a concrete post, 8 ins. square, firmly set, projecting 3 ins. above ground, with top mkd. N 70 1934.</p> <p>S. 89°57' W., on the S. bdy. of sec. 36.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p>
38.82	<p>The closing cor. of Tps. 28 N., Rs. 15 and 16 E., monumented with an iron post, 3 ins. diam., firmly set, projecting 10 ins. above the ground, with brass cap mkd. T29N R15E R16E S36 S31 CC R15E R16E S1 S6 T28N.</p>
40.01	<p>The stan. 1/4 sec. cor. of sec. 36, monumented with an iron post, 1 in. diam., firmly set, projecting 2 ins. above the ground, with brass cap mkd. S36 1/4 1908. Add the marks SC T29N R15E 1998 to the brass cap.</p> <hr/>
40.03	<p>S. 89°59' W., beginning new measurement.</p> <p>The stan. cor. of secs. 35 and 36, monumented with an iron post, 3 ins. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd. SC T29N R15E S35 S36. Add the marks 1998 to the brass cap.</p> <hr/>
2.00	<p>WEST, on the S. bdy. of sec. 35.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p> <p>Track road. bears N. and S.</p>

Dependent Resurvey of the Seventh Stan. Par. North, Through R. 15 E.
(S. Bdy.), T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.02	<p>The stan. 1/4 sec. cor. of sec. 35, monumented with an iron post, 1 in. diam., firmly set, projecting 7 ins. above the ground, with brass cap mkd. S35 1/4 1908. Add the marks SC T29N R15E 1998 to the brass cap.</p>
	<p style="text-align: center;">_____</p> <p>S. 89°59' W., beginning new measurement.</p>
40.03	<p>The stan. cor. of secs. 34 and 35, monumented with an iron post, 3 ins. diam., firmly set, projecting 10 ins. above the ground, with brass cap mkd. SC T29N R15E S34 S35. Add the marks 1998 to the brass cap.</p>
	<p>WEST, on the S. bdy. of sec. 34.</p>
	<p>Over rolling sandy terrain through sagebrush and grasses.</p>
39.59	<p>From this point, the original bearing tree for the closing cor. of secs. 2 and 3, T. 28 N., R. 15 E., a cedar tree, 10 ins. diam., mkd. S3 CC BT, bears South, 0.52 ch. dist.</p>
40.01	<p>The stan. 1/4 sec. cor. of sec. 34, monumented with an iron post, 1 in. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd. S34 1/4 1908. Add the marks SC T29N R15E 1998 to the brass cap.</p>
	<p>Cor. is located on the N. slope of ridge, bears E. and W.</p>
	<p style="text-align: center;">_____</p> <p>WEST, beginning new measurement.</p>
40.01	<p>The stan. cor. of secs. 33 and 34, monumented with an iron post, 3 ins. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd. SC T29N R15E S33 S34. Add the marks 1998 to the brass cap.</p>
	<p>S. 89°59' W., on the S. bdy. of sec. 33.</p>
	<p>Over rolling sandy terrain through sagebrush and grasses.</p>
38.53	<p>The closing cor. of secs. 3 and 4, T. 28 N., R. 15 E., monumented with an iron post, 4 ins. diam., firmly set, projecting 10 ins. above the ground, with brass cap mkd. T29N R15E S33 S34 CC T28N S3 S4 T28N.</p>
40.04	<p>The stan. 1/4 sec. cor. of sec. 33, determined from the remains of the original bearing tree:</p>

Dependent Resurvey of the Seventh Stan. Par. North, Through R. 15 E.
(S. Bdy.), T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.98	<p>A juniper stump, 10 ins. diam., bears N. 37° W., 71 lks. dist., with partial blaze with no visible scribe marks.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S C T29N R15E 1/4 S33</p> <hr style="width: 10%; margin: auto;"/> <p style="text-align: center;">1998</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <hr style="width: 20%; margin: auto;"/> <p>S. 89°58' W., beginning new measurement.</p> <p>True point for the stan. cor. of secs. 32 and 33, at proportionate distance.</p> <p>Cor. point fall in wash, drains NW.</p>
1.00	<p>S. 89°58' W., on the S. bdy. of sec. 32.</p> <p>Over broken terrain through scattered sagebrush and grasses.</p> <p>The witness cor. for the stan. cor. of secs. 32 and 33, monumented with an iron post, 3 ins. diam., firmly set, projecting 8 ins. above the ground, with brass cap mkd. T29N R15E WC S32 S33. Add the marks 1998 to the brass cap.</p> <hr style="width: 20%; margin: auto;"/> <p>S. 89°59' W., beginning new measurement.</p>
36.93	<p>The witness cor. for the stan. 1/4 sec. cor. of sec. 32, monumented with an iron post, 1 in. diam., firmly set, projecting 16 ins. above the ground, with brass cap mkd. S32 1/4 WC 1908. Add the marks T29N R15E 1998 to the brass cap.</p> <hr style="width: 20%; margin: auto;"/> <p>S. 89°56' W., beginning new measurement.</p>
0.76	<p>The closing cor. of secs. 4 and 5, T. 28 N., R. 15 E., monumented with an iron post, 3 ins. diam., firmly set, 6 ins. below the ground, with the upper 12 ins. of iron post broken off, lying loose along side, with brass cap mkd. S32 S33 CC T28N S4 S5 T28N.</p>
2.00	<p>True point for the stan. 1/4 sec. cor. of sec. 32.</p>

Dependent Resurvey of the Seventh Stan. Par. North, Through R. 15 E.
(S. Bdy.), T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
42.00	<p>Cor. point falls in wash, drains E.</p> <p>The stan. cor. of secs. 31 and 32, monumented with an iron post, 3 ins. diam., firmly set, projecting 5 ins. above the ground, with brass cap mkd. T29N R15E S31 S32. Add the marks SC 1998 to the brass cap.</p>
	<p>S. 89°56' W., on the S. bdy. of sec. 31.</p> <p>Over broken terrain through scattered sagebrush and grasses.</p>
40.01	<p>The stan. 1/4 sec. cor. of sec. 31, monumented with an iron post, 1 in. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd. S31 1/4 1908. Add the marks SC T29N R15E 1998 to the brass cap.</p>
	<p>S. 89°58' W., beginning new measurement.</p>
40.02	<p>The stan. cor. of Tps. 29 N., Rs. 14 and 15 E., monumented with an iron post, 3 ins. diam., firmly set, projecting 1 in. above the ground, with brass cap mkd. T29N R14E R15E S36 S31. Add the marks SC 1998 to the brass cap.</p>
<p>Dependent Resurvey of the East Boundary, T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona</p>	
<p>Restoring the survey executed by Sidney E. Blout, in 1909</p>	
	<p>From the stan. cor. of Tps. 29 N., Rs. 15 and 16 E., hereinbefore described.</p> <p>N. 0°08' W., bet. secs. 31 and 36.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p>
39.99	<p>Point for the 1/4 sec. cor. of secs. 31 and 36, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the East Boundary,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
79.98	<p style="text-align: center;">T29N R15E R16E 1/4 S36 S31 1998</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>The cor. of secs. 25, 30, 31 and 36, monumented with an iron post, 3 ins. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd. T29N R15E R16E S25 S30 S36 S31. Add the marks 1998 to the brass cap.</p>
39.50	<p>N. 0°07' W., bet. secs. 25 and 30.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p> <p>Wash, drains W.</p>
39.95	<p>Point for the 1/4 sec. cor. of secs. 25 and 30, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
79.90	<p style="text-align: center;">T29N R15E R16E 1/4 S25 S30 1998</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on the S. slope of ridge, bears E. and W.</p> <p>The cor. of secs. 19, 24, 25 and 30, monumented with an iron post, 3 ins. diam., firmly set, flush with ground with brass cap mkd. T29N R15E R16E S24 S19 S25 S30. Add the marks 1998 to the brass cap.</p> <p>Cor. is located on the W. slope of ridge, bears NNE and SSW.</p>
8.50	<p>N. 0°05' E., bet. secs. 19 and 24.</p> <p>Over broken terrain through sagebrush and grasses.</p> <p>Ascend S. edge of mesa.</p>

Dependent Resurvey of the East Boundary,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
9.20	Top of mesa.
40.00	<p>Point for the 1/4 sec. cor. of secs. 19 and 24, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T29N R15E R16E 1/4 S24 S19 1998</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>from which</p> <p style="padding-left: 40px;">The NW corner of a house, bears S. 68°07' E., 87 lks. dist., the long side, 40 ft., bears E. and W.</p>
80.00	<p>Point for the cor. of secs. 13, 18, 19 and 24, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a brass tablet, 3 1/4 ins. diam., 3 1/2 ins. long stem, cemented in a drill hole, in sandstone outcrop, with top mkd.</p> <div style="text-align: center;"> <p>T29N R15E R16E S13 S18 ----- S24 S19 1998</p> </div> <p>Deposit a cylindrical magnet, 3/4 x 1 in., beneath the brass tablet, in the drill hole.</p>
	<p>N. 0°05' E., bet. secs. 13 and 18.</p>
	<p>Along top of mesa over rolling sandy terrain.</p>
39.10	S. edge of cultivated field.
40.00	<p>Point for the 1/4 sec. cor. of secs. 13 and 18, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 50 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the East Boundary,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T29N R15E R16E 1/4 S13 S18 1998</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located in cultivated field.</p>
44.50	N. edge of cultivated field.
79.00	Dirt road, bears E. and W.
80.00	<p>Point for the cor. of secs. 7, 12, 13 and 18, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T29N R15E R16E S12 S 7 ----- S13 S18 1998</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
40.00	<p>N. 0°05' E., bet. secs. 7 and 12.</p> <p>Along top of mesa over rolling sandy terrain.</p> <p>Point for the 1/4 sec. cor. of secs. 7 and 12, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with ground, with brass cap mkd.</p> <p style="text-align: center;">T29N R15E R16E 1/4 S12 S 7 1998</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>

Dependent Resurvey of the East Boundary,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
	from which
	The SW corner of a house, bears S. 12°00' E., 32 lks. dist., the long side, 50 ft., bears E. and W.
	Cor. is located in dirt driveway to house.
56.10	Descend over N. edge of mesa.
79.80	S. edge of cultivated field.
80.00	The cor. of secs. 1, 6, 7 and 12, monumented with an iron post, 3 ins. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd. T29N R15E R16E S1 S6 S12 S7, with a steel fence post, firmly set alongside. Add the marks 1998 to the brass cap.
	Cor. is located in cultivated field
	N. 0°06' E., bet. secs. 1 and 6.
	Over rolling sandy terrain through sagebrush and grasses.
1.20	Center of Arizona State Road 264, paved, 25 ft. wide, bears S. 62° E. and N. 62° W.
39.99	The 1/4 sec. cor. of secs. 1 and 6, monumented with an iron post, 1 in. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd. 1/4 S1 S6 1908. Add the marks T29N R15E R16E 1998 to the brass cap.
	N. 0°03' E., beginning new measurement.
40.00	The cor. of Tps. 29 and 30 N., Rgs. 15 and 16 E., monumented with an iron post, 3 ins. diam., firmly set, projecting 12 ins. above the ground, with the brass cap mkd. T30N R15E R16E S36 S31 S1 S6 T29N. Add the marks 1998 to the brass cap.
	from which the original bearing tree
	A juniper, 8 ins. diam, bears S. 42 1/2° E., 35 lks. dist., mkd. T29N R16E S6 BT.

Dependent Resurvey of the West Boundary,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">Restoring the survey executed by Sidney E. Blout, in 1909</p> <hr/> <p>From the stan. cor. of Tps. 29 N., Rs. 14 and 15 E., hereinbefore described.</p> <p>N. 0°04' E., bet. secs. 31 and 36.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p> <p>40.01 The 1/4 sec. cor. of secs. 31 and 36, monumented with an iron post, 1 in. diam., firmly set, bent over, projecting 10 ins. above the ground, with brass cap mkd. 1/4 S31 S36 1908.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T29N R14E R15E 1/4 S36 S31 1998</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the iron post alongside stainless steel post.</p> <hr/> <p>N. 0°02' E., beginning new measurement.</p>
	<p>40.03 The cor. of secs. 25, 30, 31 and 36, monumented with an iron post, 3 ins. diam., firmly set, 2 ins. below the ground, with brass cap mkd. T29N R14E R15E S25 S30 S36 S31. Add the marks 1998 to the brass cap.</p> <hr/>
	<p>NORTH, bet. secs. 25 and 30.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p> <p>40.03 The 1/4 sec. cor. of secs. 25 and 30, monumented with an iron post, 1 in. diam., firmly set, projecting 10 ins. above the ground, with brass cap mkd. 1/4 S25 S30 1908. Add the marks T29N R14E R15E 1998 to the brass cap.</p> <hr/> <p>N. 0°01' E., beginning new measurement.</p>

Dependent Resurvey of the West Boundary,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS																			
40.04	<p>The cor. of secs. 19, 24, 25 and 30, monumented with an iron post, 3 ins. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd. T29N R14E R15E S24 S19 S25 S30. Add the marks 1998 to the brass cap.</p>																		
	<p>N. 0°01' E., bet. secs. 19 and 24. Over rolling sandy terrain through sagebrush and grasses.</p>																		
22.00	<p>Dirt road, 20 ft. wide, bears N. 80° E. and West.</p>																		
40.03	<p>The 1/4 sec. cor. of secs. 19 and 24, monumented with an iron post, 1 in. diam., firmly set, projecting 1 in. above the ground, with brass cap mkd. 1/4 S24 S19 1908. Add the marks T29N R14E R15E 1998 to the brass cap.</p>																		
	<p>NORTH, beginning new measurement.</p>																		
40.03	<p>Point for the cor. of secs. 13, 18, 19 and 24, at proportionate dist.; there is no remaining evidence of the orig. cor. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>																		
	<table border="0" style="margin-left: auto; margin-right: auto;"> <tr><td></td><td>T29N</td><td></td></tr> <tr><td></td><td>R14E</td><td>R15E</td></tr> <tr><td>S13</td><td> </td><td>S18</td></tr> <tr><td colspan="3" style="border-top: 1px solid black;"></td></tr> <tr><td>S24</td><td> </td><td>S19</td></tr> <tr><td></td><td>1998</td><td></td></tr> </table>		T29N			R14E	R15E	S13		S18				S24		S19		1998	
	T29N																		
	R14E	R15E																	
S13		S18																	
S24		S19																	
	1998																		
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>																		
	<p>NORTH., bet. secs. 13 and 18. Over rolling sandy terrain through sagebrush and grasses.</p>																		
40.03	<p>The 1/4 sec. cor. of secs. 13 and 18, monumented with an iron post, 1 in. diam., firmly set, projecting 1 in. above the ground, with brass cap mkd. 1/4 S13 S18 1908. Add the marks T29N R14E R15E 1998 to the brass cap.</p>																		
	<p>NORTH, beginning new measurement.</p>																		

Dependent Resurvey of the West Boundary,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.04	<p>The cor. of secs. 7, 12, 13 and 18, monumented with an iron post, 3 ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd. T29N R14E R15E S12 S7 S13 S18. Add the marks 1998 to the brass cap.</p> <hr/> <p>NORTH, bet. secs. 7 and 12.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p>
40.04	<p>The 1/4 sec. cor. of secs. 7 and 12, monumented with an iron post, 1 in. diam., firmly set, projecting 8 in. above the ground, with brass cap mkd. 1/4 S12 S7 1908. Add the marks T29N R14E R15E 1998 to the brass cap.</p> <hr/> <p>N. 0°01' E., beginning new measurement.</p>
40.02	<p>The cor. of secs. 1, 6, 7 and 12, monumented with an iron post, 3 ins. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd. T29N R14E R15E S1 S6 S12 S7. Add the marks 1998 to the brass cap.</p> <hr/> <p>NORTH, bet. secs. 1 and 6.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p>
40.03	<p>The 1/4 sec. cor. of secs. 1 and 6, monumented with an iron post, 1 in. diam., firmly set, projecting 1 in. above the ground, with brass cap mkd. 1/4 S1 S6 1908. Add the marks T29N R14E R15E 1998 to the brass cap.</p> <hr/> <p>N. 0°02' E., beginning new measurement.</p>
40.03	<p>The cor. of Tps. 29 and 30 N., Rgs. 14 and 15 E., monumented with an iron post, 3 ins. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd. T30N R14E R15E S36 S31 S1 S6 T29N. Add the marks 1998 to the brass cap.</p> <hr/> <p>Dependent Resurvey of the North Boundary, T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona</p> <hr/> <p>Restoring the survey executed by Sidney E. Blout, in 1909</p> <hr/>

Dependent Resurvey of the North Boundary,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.01	<p>From the cor. of Tps. 29 and 30 N., Rgs. 15 and 16 E., hereinbefore described.</p> <p>N. 89°57' W., bet. secs. 1 and 36.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p> <p>Point for the 1/4 sec. cor. of secs. 1 and 36, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T30N R15E S36 1/4 — S 1 T29N 1998</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
55.50	<p>Center of Arizona State Road 264, paved, 25 ft. wide, bears S. 35° E. and N. 35° W.</p>
80.02	<p>The cor. of secs. 1, 2, 35 and 36, monumented with an iron post, 3 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd. T30N R15E S35 S36 S2 S1 T29N. Add the marks 1998 to the brass cap.</p>
40.02	<p>N. 89°58' W., bet. secs. 2 and 35.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p> <p>Point for the 1/4 sec. cor. of secs. 2 and 35, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T30N R15E S35 1/4 — S 2 T29N 1999</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>

Dependent Resurvey of the North Boundary,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS													
80.04	<p>The cor. of secs. 2, 3, 34 and 35, monumented with an iron post, 3 ins. diam., firmly set, 38 ins. below the ground, with brass cap mkd. T30N R15E S34 S35 S3 S2 T29N. Add the marks 1998 to the brass cap.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over the iron post, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td colspan="2">T30N R15E</td></tr> <tr><td>S34</td><td>S35</td></tr> <tr><td colspan="2">— —</td></tr> <tr><td>S 3</td><td>S 2</td></tr> <tr><td colspan="2">T29N</td></tr> <tr><td colspan="2">1998</td></tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>	T30N R15E		S34	S35	— —		S 3	S 2	T29N		1998	
T30N R15E													
S34	S35												
— —													
S 3	S 2												
T29N													
1998													
	<p>S. 89°58' W., bet. secs. 3 and 34.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p>												
40.03	<p>The 1/4 sec. cor. of secs. 3 and 34, monumented with an iron post, 1 in. diam., firmly set, projecting 4 in. above the ground, with brass cap mkd. 1/4 S34 S3 1908. Add the marks T30N R15E T29N 1998 to the brass cap.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 89°58' W., beginning new measurement.</p>												
40.02	<p>Point for the cor. of secs. 3, 4, 33 and 34, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td colspan="2">T30N R15E</td></tr> <tr><td>S33</td><td>S34</td></tr> <tr><td colspan="2">— —</td></tr> <tr><td>S 4</td><td>S 3</td></tr> <tr><td colspan="2">T29N</td></tr> <tr><td colspan="2">1998</td></tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <hr/> <p>N. 89°58' W., bet. secs. 4 and 33.</p>	T30N R15E		S33	S34	— —		S 4	S 3	T29N		1998	
T30N R15E													
S33	S34												
— —													
S 4	S 3												
T29N													
1998													

Dependent Resurvey of the North Boundary,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.02	<p>Over rolling sandy terrain through sagebrush and grasses.</p> <p>The 1/4 sec. cor. of secs. 4 and 33, monumented with an iron post, 1 in. diam., firmly set, projecting 1 in. above the ground, with brass cap mkd. 1/4 S33 S4 1908. Add the marks T30N R15E T29N 1998 to the brass cap.</p> <hr/> <p>N. 89°58' W., beginning new measurement.</p>
40.02	<p>The cor. of secs. 4, 5, 32 and 33, monumented with an iron post, 3 ins. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd. T30N R15E S32 S33 S5 S4 T29N. Add the marks 1998 to the brass cap.</p> <hr/> <p>WEST, bet. secs. 5 and 32.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p>
40.04	<p>Point for the 1/4 sec. cor. of secs. 5 and 32, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T30N R15E S32 1/4 — S 5 T29N 1999</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
80.08	<p>The cor. of secs. 5, 6, 31 and 32, monumented with an iron post, 3 ins. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd. T30N R15E S31 S32 S6 S5 T29N. Add the marks 1998 to the brass cap.</p> <hr/> <p>S. 89°59' W., bet. secs. 6 and 31.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p>
40.07	<p>The 1/4 sec. cor. of secs. 6 and 31, monumented with an iron post, 1 in. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd. 1/4 S31 S6 1908. Add the marks T30N R15E T29N 1998 to the brass cap.</p> <hr/>

Dependent Resurvey of the North Boundary,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
	N. 89°57' W., beginning new measurement.
39.17	The cor. of Tps. 29 and 30 N., Rgs. 14 and 15 E., hereinbefore described.
<p>Dependent Resurvey of the Subdivisional Lines, T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona</p>	
<p>Restoring the survey and resurvey executed by Sidney E. Blout, in 1909</p>	
	From the stan. cor. of secs. 35 and 36, on the S. bdy. of the Tp., hereinbefore described.
	N. 0°01' W., bet. secs. 35 and 36.
	Over rolling sandy terrain through sagebrush and grasses.
38.70	Barbed wire fence, bears E. and W
40.03	Point for the 1/4 sec. cor. of secs. 35 and 36, at proportionate dist.; there is no remaining evidence of the orig. cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.
	<p>T29N R15E 1/4 S35 S36 1998</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.
	Cor. is located in abandon cultivated field.
44.00	Barbed wire fence, bears E. and W
80.06	The cor. of secs. 25, 26, 35 and 36, monumented with an iron post, 2 in. diam., firmly set, projecting 5 ins. above the ground, with brass cap mkd. T29N R15E S26 S25 S35 S36 1908. Add the marks 1998 to the brass cap.
	From the cor. of secs. 25, 30, 31 and 36 on the E. bdy. of the Tp., hereinbefore described. N. 89°59' W., bet. secs. 25 and 36.

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Over broken terrain through scattered sagebrush and grasses.
39.92	Point for the 1/4 sec. cor. of secs. 25 and 36, at proportionate dist.; there is no remaining evidence of the orig. cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.
	T29N R15E S25 1/4 — S36 1999
	Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.
	Cor. is located on the S. slope of ridge, bears E. and W.
51.40	Top of mesa.
79.84	The cor. of secs. 25, 26, 35 and 36.
	N. 0°04' W., bet. secs. 25 and 26.
	Over rolling sandy terrain through scattered juniper.
36.00	Ascend, S. slope of mesa.
39.93	True point for the 1/4 sec. cor. of secs. 25 and 26, at proportionate dist.; there is no remaining evidence of the original cross marking the true point.
40.00	Edge of mesa, bears E. and W.
40.03	The witness 1/4 sec. cor. of secs. 25 and 26, monumented with an iron post, 1 in. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd. 1/4 S26 S25 1908. Add the marks WC T29N R15E 1998 and an arrow pointing to cor. to the brass cap.
	_____ N. 0°09' W., beginning new measurement.
39.89	Point for the cor. of secs. 23, 24, 25 and 26, at proportionate dist.; there is no remaining evidence of the orig. cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS											
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>T29N</td> <td>R15E</td> </tr> <tr> <td>S23</td> <td>S24</td> </tr> <tr> <td>S26</td> <td>S25</td> </tr> <tr> <td colspan="2" style="text-align: center;">1999</td> </tr> </table> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>	T29N	R15E	S23	S24	S26	S25	1999			
T29N	R15E										
S23	S24										
S26	S25										
1999											
39.91	<p>From the cor. of secs. 19, 24, 25 and 30, on the E. bdy. of the Tp., hereinbefore described.</p> <p>N. 89°58' W., bet. secs. 24 and 25.</p> <p>Along top of mesa.</p> <p>Point for the 1/4 sec. cor. of secs. 24 and 25, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>T29N</td> <td>R15E</td> </tr> <tr> <td></td> <td>S24</td> </tr> <tr> <td>1/4</td> <td>—</td> </tr> <tr> <td></td> <td>S25</td> </tr> <tr> <td colspan="2" style="text-align: center;">1999</td> </tr> </table> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>	T29N	R15E		S24	1/4	—		S25	1999	
T29N	R15E										
	S24										
1/4	—										
	S25										
1999											
79.82	<p>The cor. of secs. 23, 24, 25 and 26.</p> <hr/> <p>NORTH, bet. secs. 23 and 24.</p> <p>Along top of mesa.</p> <p>39.99 The 1/4 sec. cor. of sec. 23 and 24, determined from the remaining original bearing tree:</p> <p style="padding-left: 40px;">A juniper, 18 in. diam., bears S. 37 1/2° W., 154 lks. dist., mkd. 1/4 S24 BT on open blaze.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>										

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.08	<p style="text-align: center;">T29N R15E 1/4 S23 S24 1999</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <hr/> <p>N. 0°08' W., beginning new measurement.</p> <p>The cor. of secs. 13, 14, 23 and 24, determined from the remaining original bearing tree:</p> <p style="padding-left: 40px;">A juniper, 14 in. diam., bears S. 10 3/4° W., 159 lks. dist., mkd. T29N R15E S23 BT on open blaze.</p> <p>At the cor point</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case, in a drill hole, 9 ins. deep, on sloping rock shelf.</p> <p>from which</p> <p style="padding-left: 40px;">A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground, for a reference monument, bears S. 49°21' E., 6 lks. dist., with brass cap mkd. RM T29N R15E S24 4.0 FT. TO COR 1999 and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
40.00	<p>From the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of the Tp., hereinbefore described.</p> <p>N. 89°55' W., bet. secs. 13 and 24.</p> <p>Along top of mesa.</p> <p>Point for the 1/4 sec. cor. of secs. 13 and 24, at proportionate dist.; there is no remaining evidence of the orig. cor. falls on steep, W. slope of ridge.</p> <p>From this point, the point selected for the witness cor. to the 1/4 sec. cor. of secs. 13 and 24, bears S. 56°05' W., 0.90 chs. dist.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
80.00	<p style="text-align: center;"> W C T29N R15E S13 1/4 ———— ↗ S24 1999 </p> <p>The cor. of secs. 13, 14, 23 and 24.</p>
	<p>NORTH, bet. secs. 13 and 14.</p> <p>Along top of mesa.</p>
39.00	<p>Wash, drains NNW.</p>
39.96	<p>Point for the 1/4 sec. cor. of secs. 13 and 14, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;"> T29N R15E 1/4 S14 S13 1998 </p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on S. slope of ridge, bears E. and W.</p>
79.92	<p>The cor. of secs. 11, 12, 13 and 14, monumented with an iron post, 2 ins. diam., firmly set, projecting 2 ins. above the ground, with brass cap mkd. T29N R15E S11 S12 S14 S13 1908. Add the marks 1998 to the brass cap.</p>
	<p>From the cor. of secs. 7, 12, 13 and 18, on the E. bdy. of the Tp., hereinbefore described.</p> <p>N. 89°59' W., bet. secs. 12 and 13.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p>
40.02	<p>The 1/4 sec. cor. of secs. 12 and 13, monumented with an iron post, 1 in. diam., firmly set, projecting 2 ins. above the ground, with brass cap mkd. 1/4 S12 S13 1908. Add the marks T29N R15E 1998 to the brass cap.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS									
40.07	<p>N. 89°58' W., beginning new measurement.</p> <p>The cor. of secs. 11, 12, 13 and 14.</p> <hr/>								
40.05	<p>N. 0°01' W., bet. secs. 11 and 12.</p> <p>Over broken terrain through sagebrush and grasses.</p> <p>The 1/4 sec. cor. of secs. 11 and 12, monumented with an iron post, 1 in. diam, firmly set, projecting 5 ins. above the ground with the brass cap mkd. 1/4 S11 S12 1908. Add the marks T29N R15E 1998 to the brass cap.</p> <hr/>								
40.02	<p>N. 0°01' E., beginning new measurement.</p> <p>Point for cor. of secs. 1, 2, 11 and 12, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table border="1" style="margin: auto;"> <tr> <td colspan="2" style="padding: 2px;">T29N R15E</td> </tr> <tr> <td style="padding: 2px;">S 2</td> <td style="padding: 2px;">S 1</td> </tr> <tr> <td style="padding: 2px;">S11</td> <td style="padding: 2px;">S12</td> </tr> <tr> <td colspan="2" style="padding: 2px;">1999</td> </tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <hr/>	T29N R15E		S 2	S 1	S11	S12	1999	
T29N R15E									
S 2	S 1								
S11	S12								
1999									
39.60	<p>From the cor. of secs. 1, 6, 7 and 12, on the E. bdy. of the Tp., hereinbefore described.</p> <p>N. 89°56' W., bet. secs. 1 and 12.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p> <p>E. edge of cultivated field, bears N. and S.</p>								
40.09	<p>Point for the 1/4 sec. cor. of secs. 1 and 12, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. below the surface of the ground, with brass cap mkd.</p>								

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
<p>41.70</p> <p>80.18</p>	<p style="text-align: center;">T29N R15E S 1 1/4 — S12 1999</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located in cultivated field.</p> <p>W. edge of cultivated field, bears N. and S.</p> <p>The cor. of secs. 1, 2, 11 and 12.</p>
<p>40.02</p> <p>43.00</p> <p>79.98</p>	<p>N. 0°11' E. bet. secs. 1 and 2.</p> <p>Over broken terrain through sagebrush and grasses.</p> <p>Point for the 1/4 sec. cor. of secs. 13 and 14, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T29N R15E 1/4 S 2 S 1 1998</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Wash, drains E.</p> <p>The cor. of secs. 1, 2, 35 and 36, on the N. bdy. of the Tp., hereinbefore described.</p>
	<p>From the stan. cor. of secs. 34 and 35, on the S. bdy. of the Tp., hereinbefore described.</p> <p>N. 0°01' E., bet. secs. 34 and 35.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.99	<p>The 1/4 sec. cor. of secs. 34 and 35, monumented with an iron post, 1 in. diam., firmly set, projecting 11 ins. above the ground with the brass cap mkd. 1/4 S34 S35 1908. Add the marks T29N R15E 1998 to the brass cap.</p> <hr/> <p>N. 0°01' W., beginning new measurement.</p>
39.94	<p>The cor. of secs. 26, 27, 34 and 35, monumented with an iron post, 2 ins. diam, firmly set, projecting 16 ins. above the ground, with brass cap mkd. T29N R15E S27 S26 S34 S35 1908. Add the marks 1998 to the brass cap.</p> <hr/> <p>From the cor. of secs. 25, 26, 35 and 36.</p> <p>S. 89°54' W., bet. secs. 26 and 35.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p>
40.01	<p>Point for the 1/4 sec. cor. of secs. 26 and 35, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T29N R15E S26 1/4 — S35 1999</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
80.02	<p>The cor. of secs. 26, 27, 34 and 35.</p> <hr/> <p>N. 0°01' E., bet. secs. 26 and 27.</p> <p>Over broken terrain.</p>
39.93	<p>The 1/4 sec. cor. of secs. 26 and 27, monumented with an iron post, 1 in. diam, firmly set, 20 ins. below the ground, with the upper 22 ins. of iron post broken off, with brass cap mkd. 1/4 S27 S26 1908, and witnessed with a mound of stone 2 ft. base, 18 ins. high, W. of cor.</p> <p>At the cor. point</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T29N R15E 1/4 S27 S26 1998</p> <p>Deposit the iron post with brass cap inside stainless steel post.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on W. slope of ridge, bears NE. and SW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°03' W., beginning new measurement.</p>
40.09	<p>The cor. of secs. 22, 23, 26 and 27, monumented with an iron post, 2 ins. diam., firmly set, projecting 8 ins. above the ground, with brass cap mkd. T29N R15E S22 S23 S27 S26 1908, and witnessed with a scattered mound of stone, W. of cor. Add the marks 1998 to the brass cap.</p> <p>from which the original bearing trees:</p> <ul style="list-style-type: none"> A dead juniper, 14 in. diam., bears N. 32 1/4° E., 123 lks. dist., mkd. T29N R15E S23 BT on open blaze. A juniper, 12 in. diam., bears S. 6° E., 49 lks. dist., mkd. T29N R15E S26 BT on open blaze. A juniper, 24 in. diam., bears S. 42 1/4° W., 88 lks. dist., mkd. T29N R15E S27 BT on open blaze. <p>Rebuild mound of stone, 3 ft. base, 18 ins. high, W. of cor.</p> <hr/> <p>From the cor. of secs. 23, 24, 25 and 26.</p> <p>S. 89°58' W., bet. secs. 23 and 26.</p> <p>Over broken terrain.</p>
39.92	<p>The 1/4 sec. cor. of secs. 23 and 26, determined from the remaining original bearing tree:</p> <ul style="list-style-type: none"> A juniper, 18 in. diam., bears S. 11° E., 28 lks. dist., mkd. 1/4 S26 BT on open blaze. <p>At the cor point</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T29N R15E S23 1/4 — S26 1999</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 30 ft. E. of two track road, bears NE. and SW.</p> <p style="text-align: center;">_____</p> <p>S. 89°58' W., beginning new measurement.</p>
39.95	<p>The cor. of secs. 22, 23, 26 and 27.</p> <hr/> <p>N. 0°05' W., bet. secs. 22 and 23.</p> <p>Over broken terrain.</p>
39.97	<p>The 1/4 sec. cor. of secs. 22 and 23, monumented with an iron post, 1 in. diam., firmly set, 6 ins. below the ground, with brass cap mkd. 1/4 S22 S23 1908. Add the marks 1998 to the brass cap.</p> <p>from which the original bearing trees:</p> <p style="padding-left: 40px;">A dead juniper, 6 in. diam., bears N. 30° E., 16 lks. dist., mkd. 1/4 S23 BT on open blaze.</p> <p style="padding-left: 40px;">A pinon pine, 16 in. diam., bears S. 7° W., 113 lks. dist., mkd. 1/4 S22 BT on open blaze.</p> <hr/> <p>N. 0°07' W., beginning new measurement.</p>
39.94	<p>The cor. of secs. 14, 15, 22 and 23, monumented with an iron post, 2 ins. diam., firmly set, projecting 14 ins. above the ground, with brass cap mkd. T29N R15E S15 S14 S22 S23 1908. Add the marks 1998 to the brass cap.</p> <p>from which the original bearing trees:</p> <p style="padding-left: 40px;">A juniper, 8 in. diam., bears N. 71° E., 46 lks. dist., mkd. 1/4 S14 BT on open blaze.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS

A juniper, 14 in. diam., bears S. $51\ 3/4^\circ$ E., 112 lks. dist., mkd. $1/4$ S23 BT on open blaze.

A juniper, 9 in. diam., bears S. $52\ 1/4^\circ$ W., 120 lks. dist., mkd. $1/4$ S22 BT on open blaze.

A juniper, 11 in. diam., bears N. $28\ 3/4^\circ$ W., 73 lks. dist., mkd. $1/4$ S15 BT on open blaze.

Raised a supporting mound of stone, 4 ft. base, to top.

From the cor. of secs. 13, 14, 23 and 24.

S. $89^\circ 55'$ W., bet. secs. 14 and 23.

Along top of mesa.

39.96

The $1/4$ sec. cor. of secs. 14 and 23, determined from the remaining original bearing tree:

A juniper, 8 in. diam., bears N. 42° E., 48 lks. dist., mkd. $1/4$ S14 BT on open blaze.

At the cor point

Set a stainless steel post, 28 ins. long, $2\ 1/2$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T29N R15E

S14

$1/4$ —

S23

1999

Deposit a magnet in a $1 \times 1 \times 2\ 5/8$ ins. white plastic case beneath the stainless steel post.

S. $89^\circ 47'$ W., beginning new measurement.

39.96

The cor. of secs. 14, 15, 22 and 23.

N. $0^\circ 02'$ W., bet. secs. 14 and 15.

Over broken terrain.

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.14	<p>The 1/4 sec. cor. of secs. 14 and 15, monumented with an iron post, 1 in. diam, firmly set, projecting 12 ins. above the ground, with brass cap mkd. 1/4 S15 S14 1908. Add the marks T29N R15E 1998 to the brass cap.</p> <hr/> <p>N. 0°05' E., beginning new measurement.</p>
40.01	<p>The cor. of secs. 10, 11, 14 and 15, monumented with an iron post, 2 ins. diam., firmly set, projecting 2 ins. above the ground, with brass cap mkd. T29N R15E S10 S11 S15 S14 1908. Add the marks 1998 to the brass cap.</p> <p>from which the remaining original bearing trees:</p> <p style="padding-left: 40px;">A juniper, 10 in. diam., bears S. 49 3/4° E., 110 lks. dist., incorrectly mkd. 1/4 S15 BT on open blaze. (Record: 59 lks. dist.)</p> <p style="padding-left: 40px;">A juniper, 12 in. diam., bears S. 52 1/2° W., 118 lks. dist., incorrectly mkd. 1/4 S10 BT on open blaze. (Record: Pinon pine, S. 88 1/4° W., 63 lks. dist.)</p>
	<p>From the cor. of secs. 11, 12, 13 and 14.</p> <p>WEST, bet. secs. 11 and 14.</p> <p>Over broken terrain.</p>
39.93	<p>Point for the 1/4 sec. cor. of secs. 11 and 14, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T29N R15E S11 1/4 — S14 1999</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
79.86	<p>The cor. of secs. 10, 11, 14 and 15.</p> <hr/> <p>N. 0°13' W., bet. secs. 10 and 11.</p> <p>Over broken terrain.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.11	<p>The 1/4 sec. cor. of secs. 10 and 11, determined from the original bearing trees:</p> <p style="padding-left: 40px;">A pinon pine, 12 in. diam., bears EAST, 128 lks. dist., with illegible scribe marks on partially healed blaze.</p> <p style="padding-left: 40px;">A juniper, 16 in. diam., bears S. 54° W., 122 lks. dist., mkd. 1/4 S10 BT on open blaze.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T29N R15E 1/4 S10 S11 1999</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on the E. slope of ridge, bears N. and S.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°04' E., beginning new measurement.</p>
39.98	<p>Point for cor. of secs. 2, 3, 10 and 11, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T29N R15E S 3 S 2 ----- S10 S11 1999</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
	<p>From the cor. of secs. 1, 2, 11 and 12.</p> <p>N. 89°59' W., bet. secs. 2 and 11.</p> <p>Over broken terrain.</p>
39.97	<p>Point for the 1/4 sec. cor. of secs. 2 and 11, at proportionate dist.; there is no remaining evidence of the orig. cor.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T29N R15E S 2 1/4 — S11 1999</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>79.94 The cor. of secs. 2, 3, 10 and 11.</p>
	<p>N. 0°06' E. bet. secs. 2 and 3.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p> <p>39.98 Point for the 1/4 sec. cor. of secs. 2 and 3, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T29N R15E 1/4 S 3 S 2 1998</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>80.00 The cor. of secs. 2, 3, 34 and 35, on the N. bdy. of the Tp., hereinbefore described.</p>
	<p>From the stan. cor. of secs. 33 and 34, on the S. bdy. of the Tp., hereinbefore described.</p> <p>N. 0°03' W., bet. secs. 33 and 34.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p> <p>39.98 The 1/4 sec. cor. of secs. 33 and 34, monumented with an iron post, 1 in. diam., firmly set, projecting 1 in. above the ground, with brass cap mkd. 1/4 S33 S34 1908. Add the marks T29N R15E 1998 to the brass cap.</p> <p style="text-align: center;">_____</p> <p>N. 0°04' W., beginning new measurement.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.97	<p>The cor. of secs. 27, 28, 33 and 34, monumented with an iron post, 2 ins. diam., firmly set, projecting 15 ins. above the ground, with brass cap mkd. T29N R15E S28 S27 S33 S34 1908. Add the marks 1998 to the brass cap.</p>
	<p>From the cor. of secs. 26, 27, 34 and 35.</p> <p>WEST, bet. secs. 27 and 34.</p> <p>Over broken terrain.</p>
40.07	<p>The 1/4 sec. cor. of secs. 27 and 34, monumented with an iron post, 1 in. diam., firmly set, projecting 5 ins. above the ground, with brass cap mkd. 1/4 S27 S34 1908, and witnessed with a mound of stone, W. of cor. Add the marks T29N R15E 1998 to the brass cap.</p> <p>Cor. is located on S. slope of ridge, bears N. and S.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 89°59' W., beginning new measurement.</p>
40.02	<p>The cor. of secs. 27, 28, 33 and 34.</p> <hr/> <p>N. 0°01' E., bet. secs. 27 and 28.</p> <p>Over broken terrain.</p>
39.94	<p>The 1/4 sec. cor. of secs. 27 and 28, monumented with an iron post, 1 in. diam., firmly set, 26 ins. below the ground, with brass cap mkd. 1/4 S28 S27 1908.</p> <p>from which the original bearing trees:</p> <p style="padding-left: 40px;">A juniper, 16 in. diam., bears S. 35 3/4° E., 170 lks. dist., mkd. 1/4 S27 BT on open blaze.</p> <p style="padding-left: 40px;">A juniper, 14 in. diam., bears S. 78 1/2° W., 185 lks. dist., mkd. 1/4 S28 BT on open blaze.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over the iron post, with brass cap mkd.</p> <p style="text-align: center;">T29N R15E 1/4 S28 S27 1999</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <hr/> <p>N. 0°03' W., beginning new measurement.</p>
40.03	<p>The cor. of secs. 21, 22, 27 and 28, monumented with an iron post, 2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd. T29N R15E S21 S22 S28 S27 1908. Add the marks 1998 to the brass cap.</p> <hr/>
	<p>From the cor. of secs. 22, 23, 26 and 27.</p> <p>S. 89°57' W., bet. secs. 22 and 27.</p> <p>Over broken terrain.</p>
40.00	<p>The 1/4 sec. cor. of secs. 22 and 27, monumented with an iron post, 1 in. diam., firmly set, projecting 2 ins. above the ground, with brass cap mkd. 1/4 S22 S27 1908. Add the marks T29N R15E 1998 to the brass cap.</p> <p>from which the original bearing trees:</p> <p style="padding-left: 40px;">A juniper, 12 in. diam., bears N. 46 3/4° E., 93 lks. dist., mkd. 1/4 S22 BT on open blaze.</p> <p style="padding-left: 40px;">A juniper, 10 in. diam., bears S. 1° E., 112 lks. dist., mkd. 1/4 S27 BT on open blaze.</p> <hr/>
40.08	<p>S. 89°59' W., beginning new measurement.</p> <p>The cor. of secs. 21, 22, 27 and 28.</p> <hr/>
40.04	<p>N. 0°03' W., bet. secs. 21 and 22.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p> <p>Point for the 1/4 sec. cor. of secs. 21 and 22, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T29N R15E 1/4 S21 S22 1998</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS									
80.08	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Point for the cor. of secs. 15, 16, 21 and 22, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>T29N</td><td>R15E</td></tr> <tr><td>S16</td><td>S15</td></tr> <tr><td>S21</td><td>S22</td></tr> <tr><td colspan="2">1999</td></tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>	T29N	R15E	S16	S15	S21	S22	1999	
T29N	R15E								
S16	S15								
S21	S22								
1999									
40.00	<p>From the cor. of secs. 14, 15, 22 and 23.</p> <p>N. 89°54' W., bet. secs. 15 and 22.</p> <p>Point for the 1/4 sec. cor. of secs. 15 and 22, at proportionate dist.; there is no remaining evidence of the orig. cor. Cor. falls in wash.</p> <p>From this point, the point selected for the witness cor. to the 1/4 sec. cor. of secs. 15 and 22, bears N. 6°30' W., 0.95 chs. dist.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>W C</td></tr> <tr><td>T29N R15E</td></tr> <tr><td>S15</td></tr> <tr><td>1/4 ↓ —</td></tr> <tr><td>S22</td></tr> <tr><td>1999</td></tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>	W C	T29N R15E	S15	1/4 ↓ —	S22	1999		
W C									
T29N R15E									
S15									
1/4 ↓ —									
S22									
1999									
80.00	<p>The cor of secs. 15, 16, 21 and 22.</p> <hr/> <p>N. 0°02' E., bet. secs. 15 and 16.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p>								

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.04	<p>Point for the 1/4 sec. cor. of secs. 15 and 16, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T29N R15E 1/4 S16 S15 1999</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
80.08	<p>The cor. of secs. 9, 10, 15 and 16, monumented with an iron post, 2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd. T29N R15E S9 S10 S16 S15 1908. Add the marks 1998 to the brass cap.</p>
40.01	<p>From the cor. of secs. 10, 11, 14 and 15.</p> <p>N. 89°54' W., bet. secs. 10 and 15.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p> <p>The 1/4 sec. cor. of secs. 10 and 15, monumented with an iron post, 1 in. diam., firmly set, 7 ins. below the ground, with the upper 30 ins. of iron post lying loose alongside, with brass cap mkd. 1/4 S10 S15 1908.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, in a supporting mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T29N R15E S10 1/4 — S15 1999</p> <p>from which</p> <p style="text-align: center;">An X B0, chiseled on a boulder, 3 X 4 X 8 ft., bears N. 72 1/4° W., 34 lks. dist.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.97	<p>Bury iron post alongside stainless steel post.</p> <hr/> <p>WEST, beginning new measurement.</p> <p>The cor. of secs., 9, 10, 15 and 16.</p>
40.03	<p>N. 0°01' W., bet. secs. 9 and 10.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p> <p>The 1/4 sec. cor. of secs. 9 and 10, monumented with an iron post, 1 in. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd. 1/4 S9 S10 1908. Add the marks T29N R15E 1998 to the brass cap.</p> <p>from which the remaining original bearing tree:</p> <p style="padding-left: 40px;">A juniper, 12 in. diam., bears S. 8° E., 11 lks. dist., mkd. 1/4 S10 BT on open blaze.</p> <hr/> <p>NORTH, beginning new measurement.</p>
40.02	<p>The cor. of secs. 3, 4, 9 and 10, monumented with an iron post, 2 ins. diam., firmly set, 1 in. below the ground, with brass cap mkd. T29N R15E S4 S3 S9 S10 1908. Add the marks 1998 to the brass cap.</p>
39.96	<p>From the cor. of secs. 2, 3, 10 and 11.</p> <p>S. 89°53' W., bet. secs. 3 and 10.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p> <p>The 1/4 sec. cor. of secs. 3 and 10, monumented with an iron post, 1 in. diam., firmly set, 42 ins. below the ground, with brass cap mkd. 1/4 S3 S10 1908.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground over the iron post, with brass cap mkd.</p> <p style="text-align: center;">T29N R15E S 3 1/4 — S10 1999</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.91	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <hr/> <p>N. 89°51' W., beginning new measurement.</p> <p>The cor. of secs. 3, 4, 9 and 10.</p>
40.04	<p>N. 0°04' W., bet. secs. 3 and 4.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p> <p>The 1/4 sec. cor. of secs. 3 and 4, monumented with an iron post, 1 in. diam., firmly set, 2 ins. below the ground, with brass cap mkd. 1/4 S4 S3 1908. Add the marks T29N R15E 1998 to the brass cap.</p> <hr/> <p>NORTH, beginning new measurement.</p>
39.94	<p>The cor. of secs. 3, 4, 33 and 34, on the N. bdy. of the Tp., hereinbefore described.</p> <hr/> <p>From the true point for the stan. cor. of secs. 32 and 33, on the S. bdy. of the Tp., hereinbefore described.</p> <p>N. 0°02' W., bet. secs. 32 and 33.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p>
39.95	<p>The 1/4 sec. cor. of secs. 32 and 33, monumented with an iron post, 1 in. diam., firmly set, 18 ins. below the ground, with upper 15 ins. of iron post lying loose alongside, with brass cap mkd. 1/4 S32 S33 1908.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground to bed rock, in a mound of stone, 2 1/2 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T29N R15E 1/4 S32 S33 1999</p> <p>from which the original bearing trees:</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>A juniper, 16 in. diam., bears S. 42 1/4° E., 70 lks. dist., mkd. 1/4 S33 BT on open blaze.</p>
	<p>A juniper, 12 in. diam., bears S. 23 1/2° W., 225 lks. dist., mkd. 1/4 S32 BT on open blaze.</p>
	<p>Bury the iron post alongside the stainless steel post.</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
	<p>_____</p> <p>N. 0°01' W., beginning new measurement.</p>
36.00	<p>Barbed wire fence, 4 strands, bears NW. and SE.</p>
39.30	<p>Two track road, bears SE. and NW.</p>
39.97	<p>The cor. of secs. 28, 29, 32 and 33, monumented with an iron post, 2 ins. diam., firmly set, 6 ins. below the ground, with brass cap mkd. T29N R15E S28 S29 S32 S33 1908. Add the marks 1998 to the brass cap.</p>
	<p>_____</p> <p>From the cor. of secs. 27, 28, 33 and 34.</p> <p>S. 89°57' W., bet. secs. 28 and 33.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p>
39.94	<p>The 1/4 sec. cor. of secs. 28 and 33, monumented with an iron post, 1 in. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd. 1/4 S28 S33 1908. Add the marks T29N R15E 1998 to the brass cap.</p>
	<p>from which the original bearing trees:</p> <p>A juniper, 12 in. diam., bears N. 65 3/4° E., 85 lks. dist., mkd. 1/4 S28 BT on open blaze.</p> <p>A juniper, 14 in. diam., bears S. 16 1/2° E., 34 lks. dist., mkd. 1/4 S33 BT on open blaze.</p>
	<p>_____</p> <p>S. 89°57' W., beginning new measurement.</p>
40.02	<p>The cor. of secs. 28, 29, 32 and 33</p> <p>_____</p> <p>N. 0°02' W., bet. secs. 28 and 29.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Over rolling sandy terrain through sagebrush and grasses.
37.60	Two track road, bears SE. and NW.
40.03	The 1/4 sec. cor. of secs. 28 and 29, monumented with an iron post, 1 in. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd. 1/4 S29 S28 1908. Add the marks T29N R15E 1998 to the brass cap. <hr/>
	N. 0°02' W., beginning new measurement.
40.02	The cor. of secs. 20, 21, 28 and 29, monumented with an iron post, 2 ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd. T29N R15E S20 S21 S29 S28 1908. Add the marks 1998 to brass cap. <hr/>
	From the cor. of secs. 21, 22, 27 and 28.
	N. 89°59' W., bet. secs. 21 and 28.
	Over rolling sandy terrain through sagebrush and grasses.
39.98	The 1/4 sec. cor. of secs. 21 and 28, monumented with an iron post, 1 in. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd. 1/4 S21 S28 1908. Add the marks T29N R15E 1998 to the brass cap. <hr/>
	N. 89°59' W., beginning new measurement.
39.99	The cor. of secs. 20, 21, 28 and 29. <hr/>
	N. 0°03' W., bet. secs. 20 and 21.
	Over rolling sandy terrain through sagebrush and grasses.
40.03	The 1/4 sec. cor. of secs. 20 and 21, monumented with an iron post, 1 in. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd. 1/4 S20 S21 1908. Add the marks T29N R15E 1998 to the brass cap. <hr/>
	N. 0°02' W., beginning new measurement.

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.05	<p>The cor. of secs. 16, 17, 20 and 21, monumented with an iron post, 2 ins. diam., firmly set, projecting 7 ins. above the ground, with brass cap mkd. T29N R15E S17 S16 S20 S21 1908. Add the marks 1998 to the brass cap.</p>
39.96	<p>From the cor. of secs. 15, 16, 21 and 22.</p> <p>WEST, bet. secs. 16 and 21.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p> <p>Point for the 1/4 sec. cor. of secs. 16 and 21, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T29N R15E S16 1/4 — S21 1999</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Raised a mound of stone, 3 ft. base, 2 ft. high, N. of cor.</p>
79.92	<p>The cor. of secs. 16, 17, 20 and 21.</p>
40.04	<p>N. 0°04' W., bet. secs. 16 and 17.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p> <p>Point for the 1/4 sec. cor. of secs. 16 and 17, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T29N R15E 1/4 S17 S16 1999</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
80.08	<p>The cor. of secs. 8, 9, 16 and 17, monumented with an iron post, 2 ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd. T29N R15E S8 S9 S17 S16 1908. Add the marks 1998 to the brass cap.</p>
40.03	<p>From the cor. of secs. 9, 10, 15 and 16.</p> <p>WEST, bet. secs. 9 and 16.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p> <p>Point for the 1/4 sec. cor. of secs. 9 and 16, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T29N R15E S 9 1/4 — S16 1999</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Raised a mound of stone, 2 ft. base, 1 ft. high, N. of cor.</p>
80.06	<p>The cor. of secs. 8, 9, 16 and 17.</p> <hr/> <p>N. 0°02' W., bet. secs. 8 and 9.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p>
40.05	<p>The 1/4 sec. cor. of secs. 8 and 9, monumented with an iron post, 1 in. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd. 1/4 S8 S9 1908. Add the marks T29N R15E 1998 to the brass cap.</p> <p>Cor. is located on the N. edge of two track road, bears E. and W.</p> <hr/> <p>N. 0°02' W., beginning new measurement.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.04	<p>The cor. of secs. 4, 5, 8 and 9, monumented with an iron post, 2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd. T29N R15E S5 S4 S8 S9 1908. Add the marks 1998 to the brass cap.</p>
	<p>From the cor. of secs. 3, 4, 9 and 10.</p> <p>N. 89°58' W., bet. secs. 4 and 9.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p>
40.05	<p>The 1/4 sec. cor. of secs. 4 and 9, monumented with an iron post, 1 in. diam., firmly set, projecting 10 ins. above the ground, with brass cap mkd. 1/4 S4 S9 1908. Add the marks T29N R15E 1998 to the brass cap.</p>
	<p>N. 89°58' W., beginning new measurement.</p>
40.04	<p>The cor. of secs. 4, 5, 8 and 9.</p>
	<p>N. 0°01' W., bet. secs. 4 and 5.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p>
40.05	<p>Point for the 1/4 sec. cor. of secs. 4 and 5, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T29N R15E 1/4 S 5 S 4 1999</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
79.98	<p>The cor. of secs. 4, 5, 32 and 33, on the N. bdy. of the Tp., hereinbefore described.</p> <p>From the stan. cor. of secs. 31 and 32, on the S. bdy. of the Tp., hereinbefore described.</p> <p>N. 0°02' W., bet. secs. 31 and 32.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.03	<p>Point for the 1/4 sec. cor. of secs. 31 and 32, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T29N R15E 1/4 S31 S32 1999</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
80.06	<p>The cor. of secs. 29, 30, 31 and 32, monumented with an iron post, 2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd. T29N R15E S30 S29 S31 S32 1908. Add the marks 1998 to the brass cap.</p>
	<p>From the cor. of secs. 28, 29, 32 and 33.</p> <p>N. 89°56' W., bet. secs. 29 and 32.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p>
39.96	<p>The 1/4 sec. cor. of secs. 29 and 32, monumented with an iron post, 1 in. diam., firmly set, projecting 7 ins. above the ground, with brass cap mkd. 1/4 S29 S32 1908, and witnessed with a mound of stone, 3 ft. base, 2 1/2 ft. high, W. of cor. Add the marks T29N R15E 1998 to the brass cap.</p>
	<p>N. 89°57' W., beginning new measurement.</p>
39.95	<p>The cor. of secs. 29, 30, 31 and 32.</p>
	<p>S. 89°56' W., bet. secs. 30 and 31.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p>
40.00	<p>Point for the 1/4 sec. cor. of secs. 30 and 31, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
79.88	<p style="text-align: center;">T29N R15E S30 1/4 — S31 1998</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>The cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp., hereinbefore described.</p>
13.70	<p>From the cor. of secs. 29, 30, 31 and 32.</p> <p>N. 0°02' W., bet. secs. 29 and 30.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p> <p>Barbed wire fence, 4 strand, bears SE. and NW.</p>
40.04	<p>The 1/4 sec. cor. of secs. 29 and 30, monumented with an iron post, 1 in. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd. 1/4 S30 S29 1908. Add the marks T29N R15E 1998 to the brass cap.</p>
40.02	<p style="text-align: center;">—————</p> <p>N. 0°01' W., beginning new measurement.</p> <p>The cor. of secs. 19, 20, 29 and 30, monumented with an iron post, 2 ins. diam., firmly set, projecting 5 ins. above the ground, with brass cap mkd. T29N R15E S19 S20 S30 S29 1908. Add the marks 1998 to the brass cap.</p>
39.95	<p>From the cor. of secs. 20, 21, 28 and 29.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p> <p>N. 89°56' W., bet. secs. 20 and 29.</p> <p>The 1/4 sec. cor. of secs. 20 and 29, monumented with an iron post, 1 in. diam., 10 ins. long, filled with concrete, firmly set, 20 ins. below the ground.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T29N R15E S20 1/4 — S29 1998</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the iron post alongside the stainless steel post.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 89°56' W., beginning new measurement.</p>
39.94	The cor. of secs. 19, 20, 29 and 30.
	<p>S. 89°56' W., bet. secs. 19 and 30.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p>
40.02	The 1/4 sec. cor. of secs. 19 and 30, monumented with an iron post, 1 in. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd. 1/4 S19 S30 1908. Add the marks T29N R15E 1998 to the brass cap.
	<p>S. 89°56' W., beginning new measurement.</p>
39.81	The cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp., hereinbefore described.
	<p>From the cor. of secs. 19, 20, 29 and 30.</p> <p>N. 0°02' W., bet. secs. 19 and 20.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p>
40.07	The 1/4 sec. cor. of secs. 19 and 20, monumented with an iron post, 1 in. diam., firmly set, projecting 5 ins. above the ground, with brass cap mkd. 1/4 S19 S20 1908. Add the marks T29N R15E 1998 to the brass cap.
	<p>N. 0°01' W., beginning new measurement.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.04	<p>The cor. of secs. 17, 18, 19 and 20, monumented with an iron post, 2 ins. diam., firmly set, projecting 2 ins. above the ground, with brass cap mkd. T29N R15E S18 S17 S19 S20 1908. Add the marks 1998 to the brass cap.</p>
39.93	<p>From the cor. of secs. 16, 17, 20 and 21.</p> <p>N. 89°55' W., bet. secs. 17 and 20.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p> <p>The 1/4 sec. cor. of secs. 17 and 20, monumented with an iron post, 1 in. diam., 18 ins. long, filled with concrete, firmly set, 4 ins. below the ground.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T29N R15E S17 1/4 — S20 1998</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the iron post alongside the stainless steel post.</p> <p style="text-align: center;">_____</p> <p>N. 89°54' W., beginning new measurement.</p>
39.93	<p>The cor. of secs. 17, 18, 19 and 20.</p>
40.03	<p>S. 89°54' W., bet. secs. 18 and 19.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p> <p>Point for the 1/4 sec. cor. of secs. 18 and 19, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
79.76	<p style="text-align: center;">T29N R15E S18 1/4 — S19 1998</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>The cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp., hereinbefore described.</p>
40.04	<p>From the cor. of secs. 17, 18, 19 and 20.</p> <p>N. 0°02' W., bet. secs. 17 and 18.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p> <p>Point for the 1/4 sec. cor. of secs. 17 and 18, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p>
80.08	<p style="text-align: center;">T29N R15E 1/4 S18 S17 1998</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>The cor. of secs. 7, 8, 17 and 18, monumented with an iron post, 2 ins. diam., firmly set, projecting 5 ins. above the ground, with brass cap mkd. T29N R15E S7 S8 S18 S17 1908. Add the marks 1998 to the brass cap.</p>
39.89	<p>From the cor. of secs. 8, 9, 16 and 17.</p> <p>N. 89°55' W., bet. secs. 8 and 17.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p> <p>Point for the 1/4 sec. cor. of secs. 8 and 17, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
79.78	<p style="text-align: center;">T29N R15E S 8 1/4 — S17 1998</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>The cor. of secs. 7, 8, 17 and 18.</p>
40.03	<p>S. 89°53' W., bet. secs. 7 and 18.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p> <p>Point for the 1/4 sec. cor. of secs. 7 and 18, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
79.70	<p style="text-align: center;">T29N R15E S 7 1/4 — S18 1998</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>The cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp., hereinbefore described.</p>
40.06	<p>From the cor. of secs. 7, 8, 17 and 18.</p> <p>N. 0°04' W., bet. secs. 7 and 8.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p> <p>The 1/4 sec. cor. of secs. 7 and 8, monumented with an iron post, 1 in. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd. 1/4 S7 S8 1908. Add the marks T29N R15E 1998 to the brass cap.</p>
40.05	<p>N. 0°02' W., beginning new measurement.</p> <p>The cor. of secs. 5, 6, 7 and 8, monumented with an iron post, 2 ins. diam., firmly set, projecting 5 ins. above the ground,</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>with brass cap mkd. T29N R15E S6 S5 S7 S8 1908. Add the marks 1998 to the brass cap.</p>
39.89	<p>From the cor. of secs. 4, 5, 8 and 9.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p> <p>N. 89°54' W., bet. secs. 5 and 8.</p> <p>Point for the 1/4 sec. cor. of secs. 5 and 8, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T29N R15E S 5 1/4 — S 8 1999</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
79.78	<p>The cor. of secs. 5, 6, 7 and 8.</p>
40.03	<p>S. 89°51' W., bet. secs. 6 and 7.</p> <p>Over rolling sandy terrain through sagebrush and grasses.</p> <p>Point for the 1/4 sec. cor. of secs. 6 and 7, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T29N R15E S 6 1/4 — S 7 1999</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
79.60	<p>The cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp., hereinbefore described.</p>

Dependent Resurvey of the Subdivisional Lines,
T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona

CHAINS	
	From the cor. of secs. 5, 6, 7 and 8.
	N. 0°14' W., bet. secs. 5 and 6.
	Over rolling sandy terrain through sagebrush and grasses.
40.05	The 1/4 sec. cor. of secs. 5 and 6, monumented with an iron post, 1 in. diam., firmly set, projecting 10 ins. above the ground, with brass cap mkd. 1/4 S6 S5 1908. Add the marks T29N R15E 1998 to the brass cap.
	N. 0°14' W., beginning new measurement.
39.80	The cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp., hereinbefore described.
General Description	
<p>This survey is located on the Hopi Reservation, near the town of Hotevilla. The E. boundary of the township passes over Third Mesa, where Hotevilla is located.</p>	
<p>A wide variety of terrain is found in the area. Many of the lower areas are used for dry land farming of drought resistant varieties of corn and beans. Much of the township contains rolling sand dunes and grasslands. The remainder of the township is rocky and mountainous.</p>	
<p>Timber in the higher areas consists of juniper and pinon pine. There are a number of peach and apple orchards scattered throughout the area. The grasslands are used for the grazing of cattle, horses and sheep.</p>	
<p>Elevation ranges from about 5500 to 6500 feet above sea level.</p>	
<p>No evidence of mineral activity was noted.</p>	
<p>The mean magnetic declination of 12 1/2° E., was derived from the United States Geological Survey computer program "MAGPOINT", utilizing the Regional Magnetic Field Model for Epoch 1995 for the dates of survey.</p>	

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Daniel L. Maxey	Land Surveyor
W. William Foster	Surveying Technician
Cheryl A. Hansen	Surveying Technician
Robert J. Lyle	Surveying Technician
Mark Searles	Surveying Technician
Matthew J. Christensen	Surveying Aid

CERTIFICATE OF SURVEY

I, Joe R. Salazar, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of Special Instructions bearing date of the 28th day of May, 1998, I have dependently resurveyed the Seventh Standard Parallel North through Range 15 East (S. bdy), the east, west and north boundaries and the subdivisional lines, of Township 29 North, Range 15 East, of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

6/29/2000
(Date)

Joe R. Salazar
(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Arizona State Office
Phoenix, Arizona

The foregoing field notes of the dependent resurvey of the Seventh Standard Parallel North through Range 15 East (S. bdy.), the east, west and north boundaries and the subdivisional lines of Township 29 North, Range 15 East, Gila and Salt River Meridian, Arizona, executed by Joe R. Salazar, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

July 17, 2000
(Date)

Kenny D. Ramirez
(Chief Cadastral Surveyor of Arizona)

~~CERTIFICATE OF TRANSCRIPT~~

~~I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in T. 29 N., R. 15 E., Gila and Salt River Meridian, Arizona, is a true copy of the original field notes.~~

~~_____~~
~~(Date)~~

~~_____~~
~~(Chief Cadastral Surveyor of Arizona)~~