

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FIELD NOTES  
OF THE

---

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH AND EAST BOUNDARIES

---

AND A PORTION OF THE SUBDIVISIONAL LINES,

---

THE SUBDIVISION OF SECTION 15

---

AND

---

THE METES-AND-BOUNDS SURVEY OF

---

THE MOUNT TRUMBULL WILDERNESS AREA BOUNDARY

---

TOWNSHIP 35 NORTH, RANGE 8 WEST

---

Of the Gila and Salt River Meridian,  
In the State of Arizona

---

EXECUTED BY  
Gordon R. Bubel, Cadastral Surveyor

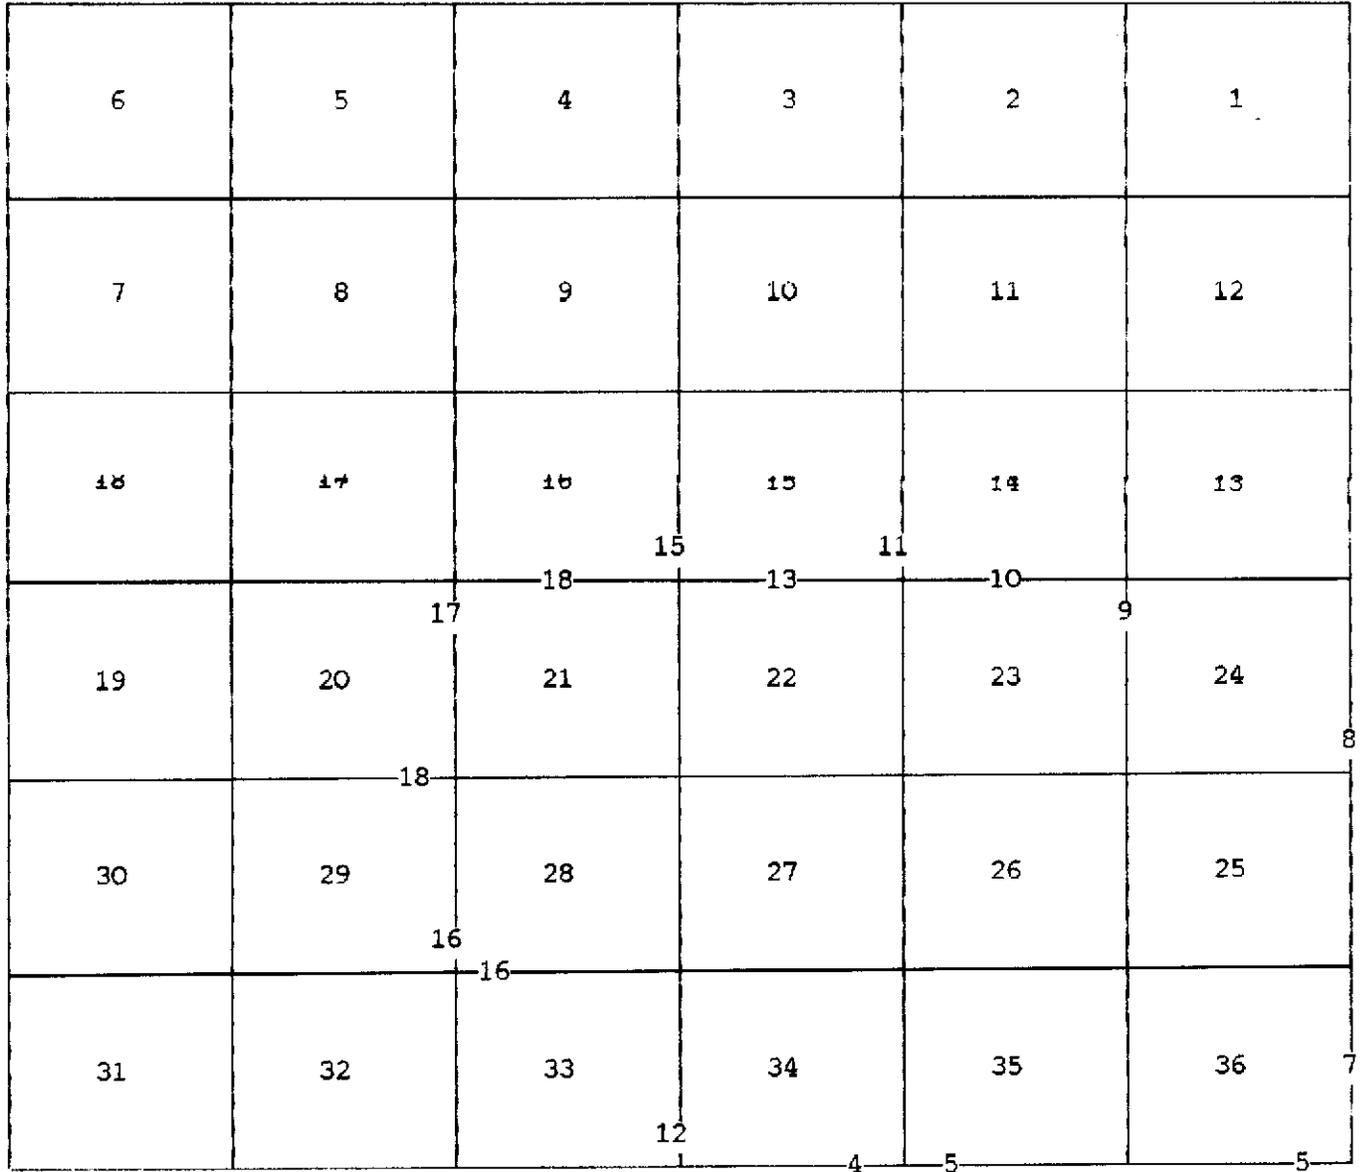
---

Under Special Instructions dated July 30, 1996, approved July 30, 1996, which provided for the surveys included under Group Number 806, and assignment instructions dated August 1, 1996.

Survey Commenced August 13, 1996  
Survey Completed July 16, 1997

INDEX DIAGRAM

TOWNSHIP 35 NORTH, RANGE 8 WEST,



Subdivision of section 15  
Metes-and-Bounds Survey

pp. 19-22  
pp. 22-100

## T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

## CHAINS

The following field notes are those of the dependent resurvey of a portion of the south and east boundaries and a portion of the subdivisional lines, the subdivision of section 15 and the metes-and-bounds survey of the Mount Trumbull Wilderness Area Boundary, in Township 35 North, Range 8 West, Gila and Salt River Meridian, Arizona.

The history of surveys pertaining to this resurvey is as follows:

William B. Kimmel and Dupree R. Averill surveyed the south boundary in 1917. Dupree R. Averill surveyed the east boundary and the subdivisional lines in 1917.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions dated July 30, 1996, for Group No. 806, Arizona.

Preliminary to the resurvey, the lines of the original survey were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The directions of all lines were determined by direct hour angle observations on the sun, and refer to the true meridian. Distances and angles were measured with a Sokia SET 2BII total station instrument.

The geographic position of the cor. of Tps. 34 and 35 N., Rs. 7 and 8 W. was determined by the technique of differential positioning using the Ashtech MXII Geodetic Positioning System. U.S. Coast and Geodetic Survey triangulation station "SAGE 1953" was used as a control station.

Latitude: 36° 22' 58.35" N. Longitude: 113° 05' 34.98" W.  
NAD 83 (1992)

The mean magnetic declination of 13 1/2° E. was derived from U.S. Geological Survey computer program MAGPOINT, utilizing the Regional Magnetic Field Model for Epoch 1995 for the dates of the survey.

---

Dependent Resurvey of a Portion of the South Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">Restoring the survey executed by William B. Kimmel and Dupree R. Averill, in 1917</p> <hr style="width: 20%; margin: auto;"/>
33.20	<p>Beginning at the 1/4 sec. cor. of secs. 3 and 34, on the S. bdy. of the Tp., monumented with an iron post, 1 in. diam., firmly set, projecting 16 ins. above ground, in a mound of stone, 2 ft. base, 1 ft. high, with brass cap mkd. 1/4 S34 S3 1917.</p> <p>from which</p> <p style="padding-left: 40px;">A dead ponderosa pine, 20 ins. diam., bears S. 55 1/2° E., 90 lks. dist., with rotted out blaze. (Record: 88 lks. dist.)</p> <p style="padding-left: 40px;">A root hole, bears N. 6° W., 61 lks. dist., with a dead and downed ponderosa pine, 17 ins. diam., alongside, with no marks visible.</p> <p>Add the marks T35N R8W T34N 1917 to the brass cap.</p> <p>N. 89°52' E., bet. secs. 3 and 34, on the S. bdy. of the Tp.</p> <p>Over gently rolling land, through medium pine and juniper timber.</p> <p>Point for AP 20, sec. 34, identical with AP 1, sec. 3, T. 34 N., R. 8 W., on the Mount Trumbull Wilderness Area Edy.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 16 ins. in the ground, to bedrock, in a supporting mound of stone, 4 ft. base, to top with aluminum cap mkd.</p>
39.93	<div style="text-align: center;"> <p>T35N R8W MTWA</p> <p>S34 / AP20</p> <hr style="width: 50%; margin: auto;"/> <p>S3 / AP1</p> <p>T34N R8W 1997</p> </div> <p>The cor. of secs. 2, 3, 34 and 35, on the Mount Trumbull Wilderness Area Edy., monumented with an iron post, 2 ins. diam., firmly set, in a mound of stone, 4 ft. base, 3 ft. high, with brass cap mkd. T35N R8W S34 S35 S3 S2 T34N 1917.</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine stump, 17 ins. diam., bears N. 30 1/2° E., 233 lks. dist., with no marks visible. (Record: N. 29 3/4° E., 232 lks. dist.)</p>

Dependent Resurvey of a Portion of the South Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>A ponderosa pine, 32 ins. diam., bears S. 53 3/4° E., 147 lks. dist., with healed over blaze.</p> <p>A root hole, bears S. 13 1/2° W., 97 lks. dist., with a dead and downed ponderosa pine, 30 ins. diam., alongside, no marks visible.</p> <p>A ponderosa pine, 26 ins. diam., bears N. 59 1/2° W., 90 lks. dist., with healed over blaze.</p> <p>Add the marks 1996 to the brass cap.</p>
8.50	<p>N. 89°56' E., bet. secs. 2 and 35.</p> <p>Over mountainous land, through medium pine and juniper timber.</p> <p>Point for AP 4, sec. 35, identical with AP 1, sec. 2, T. 34 N., R. 8 W., on the Mount Trumbull Wilderness Area Bdy.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 30 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W MTWA S35 AP4 S2 AP1 T34N R8W 1997</p> </div>
39.85	<p>The 1/4 sec. cor. of secs. 2 and 35, monumented with an iron post, 1 in. diam., firmly set, projecting 10 ins. above ground, with brass cap mkd. 1/4 S35 S2 1917.</p> <p>from which</p> <p>A root hole, bears S. 42° W., 86 lks. dist., with a dead and downed pinyon pine, 12 ins. diam., alongside, with illegible scribe mark.</p> <p>A pinyon pine, 17 ins. diam., bears N. 27 1/2° W., 45 lks. dist., with illegible scribe marks visible on partially healed blaze. (Record: N. 29° W., 47 lks. dist.)</p> <p>Add the marks T35N R8W T34N 1996 to the brass cap.</p> <p>From the 1/4 sec. cor. of secs. 1 and 36, on the S. bdy. of the Tp., monumented with an iron post, 1 in. diam., firmly set,</p>

Dependent Resurvey of a Portion of the South Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS																			
	<p>projecting 20 ins. above ground, in a mound of stone, 3 ft. base, 1 ft. high, with brass cap mkd. 1/4 S36 S1 1997.</p> <p>from which</p> <p>A pinyon pine, 11 ins. diam., bears N. 46 1/2° E., 36 lks. dist., mkd. 1/4 S36 BT, on a partially healed over blaze.</p> <p>A forked juniper, 16 ins. diam., at base, bears S. 49° W., 41 lks. dist., mkd. 1/4 S 1 BT, on a 7 ins. diam. limb. (Record: Cedar)</p> <p>Add the marks T35N R8W T34N R8W 1997 to the brass cap.</p> <p>S. 89°59' E., bet. secs. 1 and 36, on the S. bdy. of the Tp.</p> <p>Descend over mountainous land, through heavy pine timber.</p>																		
26.09	<p>Point for AP 1, sec. 36, identical with AP 40, sec. 1, T. 34 N., R. 8 W., on the Mount Trumbull Wilderness Area Bdy.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 22 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center; margin: 20px 0;"> <table border="0"> <tr><td></td><td>T35N R8W</td><td></td></tr> <tr><td></td><td>AP1 / S36</td><td></td></tr> <tr><td>MTWA</td><td>—</td><td></td></tr> <tr><td></td><td>AP40 / S1</td><td></td></tr> <tr><td></td><td>T34N</td><td></td></tr> <tr><td></td><td>1997</td><td></td></tr> </table> </div>		T35N R8W			AP1 / S36		MTWA	—			AP40 / S1			T34N			1997	
	T35N R8W																		
	AP1 / S36																		
MTWA	—																		
	AP40 / S1																		
	T34N																		
	1997																		
40.25	<p>The cor. of Tps. 34 and 35 N., Rs. 7 and 8 W., monumented with an iron post, 3 ins. diam., firmly set, projecting 18 ins. above ground, with a mound of stone 3 ft. base, 2 ft. high, to the W., with brass cap mkd. T35N R8W R7W S36 S31 S1 S6 T34N 1917.</p> <p>from which</p> <p>A pinyon pine, 17 ins. diam., bears N. 72 1/2° E., 151 lks. dist., mkd. T35N R7W S31 BT. (Record: N. 72° E., 152 lks. dist.)</p> <p>A pinyon pine, 16 ins. diam., bears S. 23 1/2° E., 49 lks. dist., mkd. T34N R7W S6 BT. (Record: S. 25 1/2° E., 50 lks. dist.)</p> <p>A juniper, 15 ins. diam., bears S. 51 1/4° W., 42 lks. dist., erroneously mkd. T34N R8W S2 BT. (Record: Cedar, S. 49° W.)</p>																		

Dependent Resurvey of a Portion of the South Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>A pinyon pine, 16 ins. diam., bears N. 46 1/4° W., 147 lks. dist., mkd. T35N R8W S36 BT. (Record: N. 24 1/4° W.)</p> <p>Add the marks 1997 to the brass cap.</p>
	<hr/> <p>Dependent Resurvey of a Portion of the East Boundary, T. 35 N. R. 8 W., Gila and Salt River Meridian, Arizona</p> <hr/>
	<p>Restoring the survey executed by Dupree R. Averill, in 1917</p> <hr/>
	<p>From the cor. of Tps. 34 and 35 N., Rs. 7 and 8 W., hereinbefore described.</p> <p>N. 0°13' W., bet. secs. 31 and 36, on the E. bdy. of the Tp.</p> <p>Along easterly slope of Mt. Trumbull, through chained area.</p>
40.00	<p>The 1/4 sec. cor. of secs. 31 and 36, monumented with an iron post, 1 in. diam., firmly set, projecting 14 ins. above ground, with brass cap mkd. 1/4 S36 S31 1917.</p> <p>from which</p> <p>A pinyon pine, 13 ins. diam., bears N. 69° E., 70 lks. dist., mkd. 1/4 S31 BT.</p> <p>A pinyon pine, 16 ins. diam., bears N. 41 1/2° W., 39 lks. dist., mkd. 1/4 S36 BT.</p> <p>Add the marks T35N R8W R7W 1997 to the brass cap.</p> <hr/>
23.14	<p>N. 0°13' E., beginning new measurement.</p> <p>Point for AP 29, sec. 36 identical with AP 1, sec. 31, T. 35 N., R. 7 W., on the Mount Trumbull Wilderness Area Bdy.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 11 ins. in the ground, to bedrock, in a supporting mound of stone, 4 ft. base, to top with aluminum cap mkd.</p>

Dependent Resurvey of a Portion of the East Boundary,  
T. 35 N., R. 8 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.08	<div data-bbox="820 289 1003 506" data-label="Diagram"> </div> <p>The cor. of secs. 25, 30, 31 and 36, monumented with an iron post, 2 ins. diam., firmly set, projecting 6 ins. above ground, in a mound of stone, 3 1/2 ft. base to top, with brass cap mkd. T35N R8W R7W S25 S30 S36 S31 1917.</p> <p>from which</p> <ul style="list-style-type: none"> <li>A pinyon pine, 10 ins. diam., bears S. 60° E., 94 lks. dist., mkd. T35N R7W S31 BT. (Record: S. 61° E.)</li> <li>A juniper, 24 ins. diam., bears S. 76 1/2° W., 50 lks. dist., mkd. T35N R8W S36 BT. (Record: Cedar, S. 83° W., 56 lks. dist.)</li> <li>A root hole, bears N. 55° W., 84 lks. dist., with fallen pinyon pine, 19 ins. diam., alongside, mkd. T35N R8W S35 BT.</li> </ul> <p>Add the marks 1997 to the brass cap.</p> <hr/> <p>From the cor. of secs. 19, 24, 25 and 30, monumented with an iron post, 2 ins. diam., firmly set, projecting 16 ins. above ground, in a mound of stone, 3 ft. base, 1 ft. high, with brass cap mkd. T35N R8W R7W S24 S19 S25 S30 1917.</p> <p>from which</p> <ul style="list-style-type: none"> <li>A pinyon pine, 10 ins. diam., bears N. 61 1/4° E., 155 lks. dist., mkd. T35N R7W S19 BT. (Record: 149 lks. dist.)</li> <li>A pinyon pine, 13 ins. diam., bears S. 78° E., 106 lks. dist., mkd. T35N R7W S30 BT. (Record: S 78 1/2° E., 107 lks. dist.)</li> <li>A root hole, bears S. 21 1/4° W., 234 lks. dist., with fallen pinyon pine, 7 ins. diam., alongside, mkd. T35N R8W S25 BT.</li> <li>A pinyon pine, 10 ins. diam., bears N. 70° W., 31 lks. dist., mkd. T35N R8W S24 BT. (Record: 30 lks. dist.)</li> </ul> <p>Add the marks 1997 to the brass cap.</p>

Dependent Resurvey of a Portion of the East Boundary,  
T. 35 N., R. 8 E., Gila and Salt River Meridian, Arizona

CHAINS															
3.52	<p>N. 0°01' E., bet. secs. 19 and 24, on the E. bdy. of the Tp. Along easterly slope of Mt. Trumbull, through medium pine timber.</p> <p>Point for AP 1, sec. 24 identical with AP 5, sec. 19, T. 35 N., R. 7 W., on the Mount Trumbull Wilderness Area Bdy.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 23 ins. in the ground, to bedrock, in a mound of stone, 2 ft. base, 2 ft. high, with aluminum cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td colspan="2">T35N</td></tr> <tr><td>R8W</td><td>R7W</td></tr> <tr><td>S24</td><td>S19</td></tr> <tr><td colspan="2">—</td></tr> <tr><td>AP1</td><td>AP5</td></tr> <tr><td colspan="2">MTWA</td></tr> <tr><td colspan="2">1997</td></tr> </table> </div> <p>Cor. is located on W. edge of chained area.</p>	T35N		R8W	R7W	S24	S19	—		AP1	AP5	MTWA		1997	
T35N															
R8W	R7W														
S24	S19														
—															
AP1	AP5														
MTWA															
1997															
40.07	<p>The 1/4 sec. cor. of secs. 19 and 24, monumented with an iron post, 1 in. diam., firmly set, projecting 12 ins. above ground, with brass cap mkd. 1/4 S24 S19 1917.</p> <p>from which</p> <ul style="list-style-type: none"> <li>A pinyon pine, 18 ins. diam., bears S. 61° E., 111 lks. dist., with healed blaze. (Record: S. 62° E.)</li> <li>A pinyon pine, 17 ins. diam., bears N. 62 1/4° W., 100 lks. dist., with illegible scribe marks, on a partially healed over blaze. (Record: N. 61 1/2° W.)</li> </ul> <p>Add the marks T35N R8W R7W 1997 to the brass cap.</p>														
<hr/> <p>Dependent Resurvey of a Portion of the Subdivisional Lines, T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona</p> <hr/>															
<p>Restoring the survey executed by Dupree R. Averill, in 1917</p> <hr/>															
<p>From the 1/4 sec. cor. of secs. 23 and 24, monumented with an iron post, 1 in. diam., firmly set, projecting 13 ins. above ground, with brass cap mkd. 1/4 S23 S24 1917.</p> <p>from which</p>															

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>A pinyon pine, 15 ins. diam., bears S. 84° E., 58 lks. dist., mkd. 1/4 S24 BT.</p>
	<p>A pinyon pine, 12 ins. diam., bears N. 89° W., 35 lks. dist., mkd. 1/4 S23 BT.</p>
	<p>Add the marks T35N R8W 1997 to the brass cap.</p>
	<p>N. 0°09' E., bet. secs. 23 and 24.</p>
	<p>Descend over mountainous land, through heavy pine timber.</p>
37.26	<p>Point for AP 1, sec. 23, identical with AP 57, sec. 24, on the Mount Trumbull Wilderness Area Bdy., not monumented.</p>
40.09	<p>The cor. of secs. 13, 14, 23 and 24, monumented with an iron post, 2 ins. diam., firmly set, projecting 20 ins. above ground in a mound of stone, 4 ft. base, to top, with brass cap mkd. T35N R8W S14 S13 S23 S24 1917.</p>
	<p>from which</p>
	<p>A pinyon pine, 11 ins. diam., bears N. 44° E., 60 lks. dist., mkd. T35N R8W S13 BT. (Record: N. 47° E.)</p>
	<p>A dead and standing pinyon pine, 14 ins. diam., bears S. 50 1/2° E., 146 lks. dist., mkd. T35N R8W S24 BT. (Record: S. 46° E.)</p>
	<p>A pinyon pine, 12 ins. diam., bears S. 43° W., 55 lks. dist., mkd. N R8W S23 BT, on a partially healed blaze. (Record: S. 46° W.)</p>
	<p>A pinyon pine stump, 30 ins. diam., bears N. 78 1/2° W., 107 lks. dist., mkd. T35N R8W S14 BT. (Record: N. 77° W.)</p>
	<p>Add the marks 1997 to the brass cap.</p>
	<hr/> <p>S. 89°41' W., bet. secs. 14 and 23.</p>
	<p>Along northerly slope of Mount Trumbull, through moderate pine timber.</p>
27.22	<p>Point for AP 1, sec. 14, identical with AP 11, sec. 23, on the Mount Trumbull Wilderness Area Bdy., not monumented.</p>
39.81	<p>The 1/4 sec. cor. of secs. 14 and 23, on the Mount Trumbull Wilderness Area Bdy., monumented with an iron post, 1 in. diam., firmly set, projecting 13 ins. above ground, in a scattered mound of stone, with brass cap mkd. 1/4 S14 S23 1917.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>from which</p> <p>A root hole bears N. 53° E., 50 lks. dist., with fallen pinyon pine, 19 ins. diam., alongside, mkd. T35N R8W S14 BT. (Record: 41 lks. dist.)</p> <p>A pinyon pine, 8 ins. diam., bears S. 13 1/4° E., 105 lks. dist., mkd. 1/4 S23 BT. (Record: S. 16° W., 90 lks. dist.)</p> <p>Add the marks T35N R8W 1997 to the brass cap and rebuild the mound of stone, 3 ft. base, to top.</p> <p>Cor. is located in a barbed wire fence, 4 strands, extends S. and W.</p> <hr/> <p>S. 89°45' W., beginning new measurement, on the Mount Trumbull Wilderness Area Bdy.</p> <p>Along 4 strand barbed wire fence, through moderate pine and juniper timber.</p>
39.84	<p>The cor. of secs. 14, 15, 22 and 23, monumented with an iron post, 2 ins. diam., firmly set, projecting 18 ins. above ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd. T35N R8W S15 S14 S22 S23 1917.</p> <p>from which</p> <p>A dead oak, 6 ins. diam., bears N. 65° E., 67 lks. dist., mkd. N R8W S14 BT, on a decayed blaze.</p> <p>A ponderosa pine, 23 ins. diam., bears S. 55 1/2° E., 135 lks. dist., with healed over blaze.</p> <p>A juniper, 30 ins. diam., bears S. 56 1/2° W., 115 lks. dist., mkd. T35N R8W S22 BT. (Record: Cedar)</p> <p>A pinyon pine, 20 ins. diam., bears N. 40° W., 175 lks. dist., mkd. T35N R8W S15 BT.</p> <p>Add the marks 1997 to the brass cap.</p> <p>Cor. is located in a barbed wire fence, 4 strands, bears E. and W.</p> <hr/> <p>N. 0°01' E., bet. secs. 14 and 15.</p> <p>Descending, through chained area.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
19.97	<p>The S. 1/16 sec. cor. of secs. 14 and 15, established by Roger Bundy, Arizona Registered Land Surveyor No. 23943, in 1996, monumented with a 1/2 in. diam., rebar, firmly set, projecting 1 1/2 ins. above ground. This is accepted as a careful and faithful determination of the cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T35N R8W S 1/16 S15   S14 1997</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Deposit the rebar, 18 ins. long, inside the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/>
	<p>N. 0°01' E., beginning new measurement.</p>
0.05	<p>Barbed wire fence, 4 strands, bears E. and W., leave chained area.</p>
6.00	<p>Center of bladed road, 18 lks. wide, bears E. and WSW.</p>
19.97	<p>The 1/4 sec. cor. of secs. 14 and 15, monumented with an iron post, 1 in. diam., firmly set, projecting 13 ins. above ground, with brass cap mkd. 1/4 S15 S14 1917.</p> <p>from which</p> <p style="padding-left: 40px;">A pinyon pine, 16 ins. diam., bears S. 76 1/2° E., 9 lks. dist., mkd. 1/4 S14 BT.</p> <p style="padding-left: 40px;">A pinyon pine, 16 ins. diam., bears N. 76 1/2° W., 39 lks. dist., mkd. 1/4 S15 BT.</p> <p>Add the marks T35N R8W 1997 to the brass cap.</p> <hr style="width: 60%; margin: 10px auto;"/> <p>From the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp., monumented with an iron post, 2 ins. diam., firmly set, projecting 12 ins. above ground, with brass cap mkd. T35N R8W S33 S34 S4 S3 T34N 1917.</p>
	<p>from which</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>A root hole bears, S. 22° E., 76 lks. dist., with a dead and downed ponderosa pine, 12 ins. diam., alongside, with no marks visible.</p>
	<p>A ponderosa pine, 27 ins. diam., bears N. 72° W., 46 lks. dist., with healed over blaze. (Record: 38 lks. dist.)</p>
	<p>Add the marks 1996 to the brass cap.</p>
	<p>N. 0°11' E., bet. secs. 33 and 34.</p>
	<p>Over mountainous land, through medium pine and juniper timber.</p>
31.96	<p>Point for AP 1, sec. 34, identical with AP 35, sec. 33, on the Mount Trumbull Wilderness Area Bdy., not monumented.</p>
39.98	<p>The 1/4 sec. cor. of secs. 33 and 34, monumented with an iron post, 1 in. diam., firmly set, projecting 9 ins. above ground, with brass cap mkd. 1/4 S33 S34 1917.</p>
	<p>from which</p>
	<p>A juniper, 14 ins. diam., bears S. 80 1/4° E., 23 lks. dist., mkd. 1/4 S34 BT. (Record: Cedar, S. 76 1/2° E., 22 lks. dist.)</p>
	<p>A pinyon pine, 18 ins. diam., bears S. 32° W., 56 lks. dist., with healed over blaze.</p>
	<p>Add the marks T35N R8W 1996 to the brass cap.</p>
	<p>Cor. is located at the intersection of barbed wire fences, four strands, extends E. and S.</p>
	<p>From the cor. of secs. 14, 15, 22 and 23.</p>
	<p>N. 89°40' W., bet. secs. 15 and 22, on the Mount Trumbull Wilderness Area Bdy.</p>
	<p>Along four strand barbed wire fence, through moderate pine timber.</p>
19.945	<p>The E. 1/16 sec. cor. of secs. 15 and 22, established by Roger Bundy, Arizona Registered Land Surveyor No. 23943, in 1996, monumented with a 1/2 in. diam., rebar, firmly set, projecting 6 ins. above ground, with 1 in. diam., yellow plastic cap mkd. RLS 23943. This is accepted as a careful and faithful determination of the cor. position.</p>
	<p>At the cor. point</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground; to bedrock, in a supporting mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T35N R8W S15 E 1/16 — S22 1997</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Invert and deposit, rebar 18 ins. long inside the stainless steel post.</p> <p>Cor. is located on the N. slope of Mount Trumbull, in a four strand barbed wire fence, bears E. and W,</p> <hr style="width: 20%; margin: auto;"/> <p>N. 89°40' W., beginning new measurement.</p> <p>Leave the Mount Trumbull Wilderness Area Bdy.</p>
19.945	<p>The 1/4 sec. cor. of secs. 15 and 22, monumented with an iron post, 1 in. diam., firmly set, projecting 21 ins. above ground, in a scattered mound of stone, with brass cap mkd. 1/4 S15 S22 1917.</p> <p>from which</p> <p style="padding-left: 40px;">A pinyon pine, 14 ins. diam., bears N. 49 1/2° E., 94 lks. dist., mkd. S15 BT, on a partially healed over blaze. (Record: N. 40° E., 83 lks. dist.)</p> <p style="padding-left: 40px;">A pinyon pine, 16 ins. diam., bears S. 15 1/2° E., 129 lks. dist., mkd. S22 BT, on a partially healed over blaze. (Record: S. 10° E., 122 lks. dist.)</p> <p>Add the marks T35N R8W 1997 to the brass cap and rebuild the mound of stone, 4 ft. base to top.</p> <p>Cor. is located in a barbed wire fence, four strands, bears E. and W.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 89°47' W., beginning new measurement.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
39.98	<p>The cor. of secs. 15, 16, 21 and 22, monumented with an iron post, 2 in. diam., firmly set, projecting 18 ins. above ground, in a mound of stone, 2 ft. base, 1 ft. high, with brass cap mkd. T35N R8W S16 S15 S21 S22 1917.</p> <p>from which</p> <p>A ponderosa pine, 19 ins. diam., bears N. 14° E., 81 lks. dist., with healed over blaze. (Record: 79 lks. dist.)</p> <p>A pinyon pine, 14 ins. diam., bears S. 11 1/2° E., 157 lks. dist., with illegible scribe marks, on partially healed over blaze. (Record: S. 13 3/4° E., 158 lks. dist.)</p> <p>A pinyon pine, 19 ins. diam., bears S. 61 1/2° W., 72 lks. dist., erroneously mkd. T36N R8W S22 BT, on an open blaze. (Record: S. 58° W., 73 lks. dist.)</p> <p>A ponderosa pine, 26 ins. diam., bears N. 14° W., 120 lks. dist., with healed over blaze. (Record: Pinyon, N. 16° W., 119 lks. dist.)</p> <p>Add the marks 1997 to the brass cap.</p> <p>Cor. is located in a barbed wire fence, four strands, extends E. and W.</p>
	<hr/>
	<p>N. 0°15' E., bet. secs. 15 and 16.</p>
	<p>Descend over mountainous land, through medium pine timber.</p>
23.88	<p>Point for AP 1, sec. 16 identical with AP 18, sec. 15, on the Mount Trumbull Wilderness Area Bdy., not monumented.</p>
39.92	<p>The 1/4 sec. cor. of secs. 15 and 16, monumented with an iron post, 1 in. diam., firmly set, projecting 24 ins. above ground, in a mound of stone, 5 ft. base, to top, with brass cap mkd. 1/4 S16 S15 1917.</p> <p>from which</p> <p>A root hole, bears N. 84 3/4° E., 154 lks. dist., with a dead and downed pinyon pine, 24 ins. diam., alongside, with no marks visible. (Record: N. 82° E.)</p> <p>A pinyon pine, 16 ins. diam., bears S. 11° W., 129 lks. dist., mkd. 1/4 S16 BT. (Record: 130 lks. dist.)</p> <p>Add the marks T35N R8W 1996 to the brass cap.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From the 1/4 sec. cor. of secs. 28 and 33, monumented with an iron post, 1 in. diam., firmly set, projecting 22 ins. above ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd. 1/4 S28 S33 1917.</p>
	<p>from which</p>
	<p>A juniper, 17 ins. diam., bears S. 8 1/2° E., 26 lks. dist., mkd. 1/4 S33 BT. (Record: Cedar, S. 6 1/2° W., 27 lks. dist.)</p>
	<p>A pinyon pine, 9 ins. diam., bears N. 28 1/2° W., 40 lks. dist., with healed over blaze. (Record: Cedar.)</p>
	<p>Add the marks T35N R8W 1996 to the brass cap.</p>
	<p>S. 89°56' W., bet. secs. 28 and 33.</p>
	<p>Over mountainous land, through medium pine and juniper timber.</p>
33.58	<p>Point for AP 1, sec. 33, identical with AP 3, sec. 28, on the Mount Trumbull Wilderness Area Bdy., not monumented.</p>
40.00	<p>The cor. of secs. 28, 29, 32 and 33, monumented with an iron post, 2 ins. diam., firmly set, projecting 12 ins. above ground, with brass cap mkd. T35N R8W S29 S28 S32 S33 1917.</p>
	<p>from which</p>
	<p>A forked juniper, 19 ins. diam. at base, bears N. 25 1/4° E., 440 lks. dist., mkd. 35N R8W S28 BT, on partially healed blaze. (Record: Cedar.)</p>
	<p>A juniper, 17 ins. diam., bears S. 29° E., 115 lks. dist., mkd. T35N R8W S33 BT on partially healed blaze. (Record: Cedar.)</p>
	<p>A juniper, 20 ins. diam., bears S. 83 1/2° W., 318 lks. dist., with healed over blaze. (Record: Cedar.)</p>
	<p>A juniper, 48 ins. diam., bears N. 29 1/2° W., 437 lks. dist., mkd. T35N R8W S29 BT. (Record: Cedar.)</p>
	<p>Add the marks 1996 to the brass cap.</p>
	<hr/> <p>North, bet. secs. 28 and 29.</p>
	<p>Over mountainous land, through medium pine and juniper timber.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
4.95	Point for AP 1, sec. 28, identical with AP 19, sec. 29, on the Mount Trumbull Wilderness Area Bdy., not monumented.
39.97	<p>The 1/4 sec. cor. of secs. 28 and 29, monumented with an iron post, 1 in. diam., firmly set, projecting 20 ins. above ground, in a mound of stone, 3 ft. base, 1 ft. high, with brass cap mkd. 1/4 S29 S28 1917.</p> <p>from which</p> <p style="padding-left: 40px;">A forked juniper, 35 ins. diam., at base, bears S. 43° E., 116 lks. dist., mkd. 1/4 S28 BT, on 8 ins. diam. limb. (Record: Cedar.)</p> <p style="padding-left: 40px;">A juniper, 10 ins. diam., bears N. 72° W., 76 lks. dist., mkd. 4 S29 BT on a partially healed blaze. (Record: Cedar.)</p> <p>Add the marks T35N R8W 1996 to the brass cap.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 20 and 21, monumented with an iron post, 1 in. diam., firmly set, projecting 24 ins. above ground, in a mound of stone, 3 1/2 ft. base, 1 ft. high, with brass cap mkd. 1/4 S20 S21 1917.</p> <p>from which</p> <p style="padding-left: 40px;">A pinyon pine, 14 ins. diam., bears N. 84° E., 36 lks. dist., mkd. 1/4 S21 BT.</p> <p style="padding-left: 40px;">A juniper, 12 ins. diam., bears N. 72° W., 12 lks. dist., mkd. 1/4 S20 BT. (Record: Cedar.)</p> <p>Add the marks T35N R8W 1996 to the brass cap.</p> <p>N. 0°06' E., bet. secs. 20 and 21.</p> <p>Over mountainous land, through medium pine and juniper timber.</p>
32.14	Point for AP 1, sec. 20, identical with AP 5, sec. 21, on the Mount Trumbull Wilderness Area Bdy., not monumented.
39.99	<p>The cor. of secs. 16, 17, 20 and 21, monumented with an iron post, 2 ins. diam., firmly set, projecting 16 ins. above ground, with brass cap mkd. T35N R8W S17 S16 S20 S21 1917.</p> <p>from which</p> <p style="padding-left: 40px;">A pinyon pine, 8 ins. diam., bears N. 11° E., 76 lks. dist., mkd. T35N R8W S16 BT.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>A root hole bears N. 31° W., 93 lks. dist., with a dead and downed pinyon pine, 12 ins. diam., alongside, mkd. T35N R8W S17 BT.</p> <p>Add the marks 1996 to the brass cap.</p> <p>Cor. is located in a barbed wire fence, four strands, bears E. and W.</p>
	<hr/> <p>From the cor. of secs. 15, 16, 21 and 22.</p> <p>S. 89°53' W., bet. secs. 16 and 21.</p> <p>Over mountainous land, through medium pine and juniper timber, along a 4 strand barbed wire fence.</p>
39.72	<p>The 1/4 sec. cor. of secs. 16 and 21, monumented with an iron post, 1 in. diam., firmly set, projecting 20 ins. above ground, in a mound of stone, 3 1/2 ft. base, 1 ft. high, with brass cap mkd. 1/4 S16 S21 1917.</p> <p>from which</p> <p>A pinyon pine, 10 ins. diam., bears N. 43 1/2° E., 64 lks. dist., mkd. 1/4 S16 BT. (Record: N. 49° E.)</p> <p>A pinyon pine, 9 ins. diam., bears S. 6 1/4° E., 60 lks. dist., mkd. 4 S21 BT on partially healed blaze. (Record: S. 12° E., 61 lks. dist.)</p> <p>Add the marks T35N R8W 1996 to the brass cap.</p> <p>Cor. is located in a barbed wire fence, four strands, bears E. and W.</p>
33.80	<hr/> <p>S. 89°41' W., beginning new measurement.</p> <p>Point for AP 1, sec. 21, identical with AP 18, sec. 16, on the Mount Trumbull Wilderness Area Bdy., not monumented.</p>
40.01	<p>The cor. of secs. 16, 17, 20 and 21.</p> <hr/> <p>From the cor. of secs. 20, 21, 28 and 29, monumented with an iron post, 2 in. diam., firmly set, projecting 16 ins. above ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd. T35N R8W S20 S21 S29 S28 1917.</p> <p>from which</p>



Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>A pinyon pine, 17 ins. diam., bears N. 36 1/2° E., 42 lks. dist., mkd. T35N R8W S21 BT on partially healed blaze. (Record: N. 41° E.)</p> <p>A pinyon pine, 16 ins. diam., bears S. 66° E., 85 lks. dist., with healed over blaze.</p> <p>A pinyon pine, 15 ins. diam., bears S. 7° W., 68 lks. dist., with illegible scribe marks, on partially healed over blaze. (Record: S. 6° W., 70 lks. dist.)</p> <p>A pinyon pine, 16 ins. diam., bears N. 66 1/2° W., 38 lks. dist., with healed over blaze. (Record: 36 lks. dist.)</p> <p>Add the marks 1996 to the brass cap.</p> <p>West, bet. secs. 20 and 29.</p> <p>Over mountainous land, through medium pine and juniper timber.</p>
30.53	Point for AP 1, sec. 29, identical with AP 12, sec. 20, on the Mount Trumbull Wilderness Area Bdy., not monumented.
39.98	<p>The 1/4 sec. cor. of secs. 20 and 29, monumented with an iron post, 1 in. diam., firmly set, projecting 18 ins. above ground, with brass cap mkd. 1/4 S20 S29 1917.</p> <p>Add the marks T35N R8W 1996 to the brass cap.</p> <p>Cor. is located in a barbed wire fence, four strands, extends N., S., and W.</p>
<hr/> <p>Subdivision of Section 15, T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona</p> <hr/>	
	<p>From the 1/4 sec. cor. of secs. 15 and 22.</p> <p>N. 0°03' W., on the N. and S. center line of sec. 15.</p>
17.00	Intersect line 9-10, sec. 15, of the Mount Trumbull Wilderness Area Bdy.
19.95	Point for the center S. 1/16 sec. cor. of sec. 15, not monumented.
30.55	Center of bladed road, 18 lks. wide, bears SSE and NNW.
39.90	Point for the center 1/4 sec. cor. of sec. 15, at intersection with the E. and W. center line of sec. 15.

Subdivision of Section 15,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T35N R8W C1/4 S15 1997</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
79.92	<p>The 1/4 sec. cor. of secs. 10 and 15, monumented with an iron post, 1 in. diam., firmly set, projecting 24 ins. above ground, in a mound of stone, 3 ft. base, 1 1/2 ft. high, with brass cap mkd. 1/4 S10 S15 1917.</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 12 ins. diam., bears S. 31 1/2° E., 142 lks. dist., mkd. 1/4 S15 BT. (Record: Cedar, S. 29° E., 134 lks. dist.)</p> <p style="padding-left: 40px;">A ponderosa pine, 30 ins. diam., bears S. 86° W., 94 lks. dist., with healed blaze. (Record: N. 89 1/4° W., 101 lks. dist.)</p> <p>Cor. is located in a barbed wire fence, three strands, extends E. and W.</p>
19.965	<hr/> <p>From the 1/4 sec. cor. of secs. 14 and 15.</p> <p>N. 89°44' W., on the E. and W. center line of sec. 15.</p> <p>Point for the center E. 1/16 sec. cor. of sec. 15, not monumented.</p>
39.93	<p>The center 1/4 sec. cor. of sec. 15.</p>
79.70	<p>The 1/4 sec. cor. of secs. 15 and 16.</p>
	<hr/> <p style="text-align: center;">SE 1/4</p> <hr/> <p>From the E. 1/16 sec. cor. of secs. 15 and 22.</p> <p>N. 0°01' W., on the N. and S. center line of the SE 1/4 of sec. 15, on the Mount Trumbull Wilderness Area Bdy.</p> <p>Descending, through medium pine and juniper timber.</p>

Subdivision of Section 15,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
7.86	<p>Point for AP 3, sec 15, on the Mount Trumbull Wilderness Area Bdy.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
	<div style="text-align: center;">  <p>T35N R8W E S15 AP3 MTWA E 1997</p> </div> <p>From this cor. point, the terminus of a 5 strand barbed wire fence, extending N. 5° E., bears N. 12°38' W., 30 lks. dist.</p> <p>Leave Mount Trumbull Wilderness Area Bdy., enter chained area.</p>
9.13	Barbed wire fence, five strand, bears N. 5° E. and S. 5° W.
19.96	<p>Point for the SE 1/16 sec. cor. of sec. 15, at intersection with the E. and W. center line of the SE 1/4 of sec. 15.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p>
	<div style="text-align: center;">  <p>T35N R8W SE 1/16 S15 1997</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on nearly level land, within dense sage.</p> <p>From this cor. point, the cor. of a four strand barbed wire fences, bears N. 86°19' E., 1.00 ch. dist., with fences extending E. and S. 5° W.</p>
39.92	<p>The point for the center E. 1/16 sec. cor.</p> <hr/> <p>From the S. 1/16 sec. cor. of secs. 14 and 15.</p> <p>N. 89°42' W., on the E. and W. center line of the SE 1/4 of sec. 15.</p> <p>Over nearly level land, through dense sage.</p>




Subdivision of Section 15,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
18.10	Bladed road, 18 lks. wide, bears SE and NW.
18.97	Barbed wire fence, four strand, bears N. 5° E. and S. 5° W.
19.955	The SE 1/16 sec. cor. of sec. 15.
39.91	The point for the center S. 1/16 sec. cor. of sec. 15.
<hr/> <p>Metes-and-Bounds Survey of the Mount Trumbull Wilderness Area Boundary, T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona</p> <hr/>	
<hr/> <p>In Section 24</p> <hr/>	
<p>From AP 1, sec. 24, identical with AP 5, sec. 19, T. 35 N., R. 7 W., on the E. bdy. of the Tp., hereinbefore described.</p>	
<p>From this cor. point, the cor. of secs. 19, 24, 25 and 30, bears S. 0°01' W., 3.52 chs. dist.</p>	
<p>N. 86°32' W., on line 1-2, sec. 24, of the metes-and-bounds survey of the Mount Trumbull Wilderness Area Rdy.</p>	
<p>Along westerly edge of chained area.</p>	
1.76	Point for AP 2, sec. 24.
<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 27 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>	
<p>T35N R8W S24 AP2 MTWA 1997</p> <hr/>	
<p>S. 72°57' W., on line 2-3, sec. 24.</p>	
<p>Along westerly edge of chained area.</p>	
1.59	Point for AP 3, sec. 24.
<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 24 ins. in the ground, in a mound of stone, 2 1/2 ft. base, to top, with aluminum cap mkd.</p>	

Metes-and-Bounds Survey of the  
 Mount Trumbull Wilderness Area Boundary,  
 T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T35N R8W S24</p> <hr style="width: 10%; margin: auto;"/> <p style="text-align: center;">AP3 MTWA 1997</p> <hr style="width: 30%; margin: auto;"/> <p>S. 89°26' W., on line 3-4, sec. 24.            Along westerly edge of chained area.</p>
2.07	<p>Point for AP 4, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 29 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
	<p style="text-align: center;">T35N R8W S24</p> <hr style="width: 10%; margin: auto;"/> <p style="text-align: center;">AP4 MTWA 1997</p> <hr style="width: 30%; margin: auto;"/> <p>N. 66°37' W., on line 4-5, sec. 24.            Along westerly edge of chained area.</p>
1.93	<p>Point for AP 5, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 18 ins. in the ground, to bedrock, in a mound of stone, 4 ft. base, 2 ft. high, with aluminum cap mkd.</p>
	<p style="text-align: center;">T35N R8W S24</p> <hr style="width: 10%; margin: auto;"/> <p style="text-align: center;">AP5 MTWA 1997</p> <hr style="width: 30%; margin: auto;"/> <p>S. 72°28' W., on line 5-6, sec. 24.            Along westerly edge of chained area.</p>
2.93	<p>Point for AP 6, sec. 24.</p>

Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W S24</p>  <p>AP6 MTWA 1997</p> </div> <p>N. 75°11' W., on line 6-7, sec. 24. Along westerly edge of chained area.</p>
1.29	<p>Point for AP 7, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 18 ins. in the ground, to bedrock, in a mound of stone, 3 1/2 ft. base, 2 ft. high, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W S24</p>  <p>AP7 MTWA 1997</p> </div> <p>N. 18°06' E., on line 7-8, sec. 24. Along westerly edge of chained area.</p>
5.33	<p>Point for AP 8, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 30 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W AP8 MTWA S24</p>  <p>1997</p> </div> <p>N. 49°58' E., on line 8-9, sec. 24. Along westerly edge of chained area.</p>
2.30	<p>Point for AP 9, sec. 24.</p>




Metes-and-Bounds Survey of the  
 Mount Trumbull Wilderness Area Boundary,  
 T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 31 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W            AP9            MTWA / S24            1997</p> <hr/> </div> <p>N. 52°24' E., on line 9-10, sec. 24.            Along westerly edge of chained area.</p>
3.63	<p>Point for AP 10, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 29 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W            AP10            MTWA / S24            1997</p> <hr/> </div> <p>N. 13°04' E., on line 10-11, sec. 24.            Along westerly edge of chained area.</p>
3.15	<p>Point for AP 11, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W            AP11            MTWA / S24            1997</p> <hr/> </div> <p>N. 26°19' W., on line 11-12, sec. 24.            Along westerly edge of chained area.</p>
2.51	<p>Point for AP 12, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>




Metes-and-Bounds Survey of the  
 Mount Trumbull Wilderness Area Boundary,  
 T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
3.66	<div data-bbox="795 283 982 451" data-label="Diagram"> <p>T35N R8W          AP12          MTWA S24          1997</p> </div> <hr/> <p>N. 9°40' W., on line 12-13, sec. 24.</p> <p>Along westerly edge of chained area.</p> <p>Point for AP 13, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 29 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
1.82	<div data-bbox="795 829 982 997" data-label="Diagram"> <p>T35N R8W          AP13          MTWA S24          1997</p> </div> <hr/> <p>N. 38°08' W., on line 13-14, sec. 24.</p> <p>Along westerly edge of chained area.</p> <p>Point for AP 14, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
4.68	<div data-bbox="812 1365 998 1533" data-label="Diagram"> <p>T35N R8W          AP14          MTWA S24          1997</p> </div> <hr/> <p>N. 66°44' W., on line 14-15, sec. 24.</p> <p>Along westerly edge of chained area.</p> <p>Point for AP 15, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>




Metes-and-Bounds Survey of the  
 Mount Trumbull Wilderness Area Boundary,  
 T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	
2.95	<p>N. 54°43' W., on line 15-16, sec. 24.</p> <p>Along westerly edge of chained area.</p> <p>Point for AP 16, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
	
2.16	<p>N. 60°44' W., on line 16-17, sec. 24.</p> <p>Along westerly edge of chained area.</p> <p>Point for AP 17, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
	
2.71	<p>N. 31°56' W., on line 17-18, sec. 24.</p> <p>Along westerly edge of chained area.</p> <p>Point for AP 18, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 29 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>




Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<div style="text-align: center;">  </div> <hr/> <p>N. 22°05' W., on line 18-19, sec. 24.</p> <p>Along westerly edge of chained area.</p>
5.02	<p>Point for AP 19, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 29 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;">  </div> <hr/> <p>N. 52°21' W., on line 19-20, sec. 24.</p> <p>Along westerly edge of chained area.</p>
4.50	<p>Point for AP 20, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 18 ins. in the ground, to bedrock, in a mound of stone, 3 1/2 ft. base, 2 ft. high, with aluminum cap mkd,</p> <div style="text-align: center;">  </div> <hr/> <p>N. 40°50' E., on line 20-21, sec. 24.</p> <p>Along westerly edge of chained area.</p>
2.89	<p>Point for AP 21, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 30 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>

Metes-and-Bounds Survey of the  
 Mount Trumbull Wilderness Area Boundary,  
 T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<div style="text-align: center;">  </div> <p>N. 43°31' E., on line 21-22, sec. 24.</p> <p>Along westerly edge of chained area.</p>
2.33	<p>Point for AP 22, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 32 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;">  </div> <p>N. 14°07' E., on line 22-23, sec. 24.</p> <p>Along westerly edge of chained area.</p>
1.92	<p>Point for AP 23, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 26 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;">  </div> <p>N. 12°00' W., on line 23-24, sec. 24.</p> <p>Along westerly edge of chained area.</p>
0.97	<p>Point for AP 24, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 27 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>



Metes-and-Bounds Survey of the  
 Mount Trumbull Wilderness Area Boundary,  
 T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
1.20	<div data-bbox="836 283 990 472" style="text-align: center;"> <p>T35N R8W</p>  </div> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 72°08' W., on line 24-25, sec. 24.</p> <p>Along westerly edge of chained area.</p> <p>Point for AP 25, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 29 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
2.94	<div data-bbox="836 850 990 1039" style="text-align: center;"> <p>T35N R8W</p>  </div> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 15°23' W., on line 25-26, sec. 24.</p> <p>Along westerly edge of chained area.</p> <p>Point for AP 26, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
4.47	<div data-bbox="836 1438 990 1627" style="text-align: center;"> <p>T35N R8W</p>  </div> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 5°39' E., on line 26-27, sec. 24.</p> <p>End of chained area, enter medium pine and juniper timber.</p> <p>Point for AP 27, sec. 24.</p>

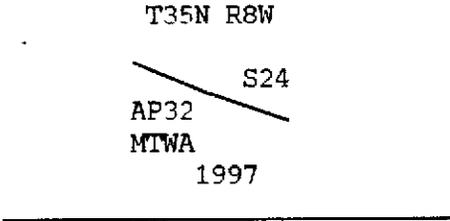
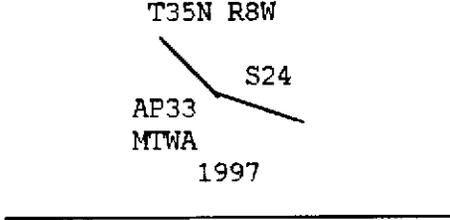
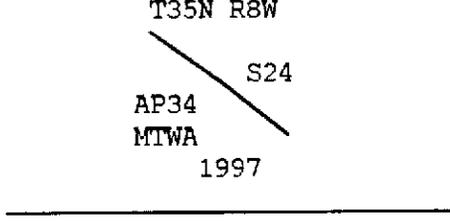
Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W</p> <p>AP27 } S24</p> <p>MTWA }</p> <p>1997</p> <hr/> </div> <p>N. 0°16' W., on line 27-28, sec. 24.</p> <p>Through medium pine and juniper timber.</p>
2.15	<p>Point for AP 28, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 27 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W</p> <p>AP28 } S24</p> <p>MTWA }</p> <p>1997</p> <hr/> </div> <p>N. 0°46' W., on line 28-29, sec. 24.</p> <p>Through medium pine and juniper timber.</p>
3.38	<p>Point for AP 29, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 29 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W</p> <p>AP29 } S24</p> <p>MTWA }</p> <p>1997</p> <hr/> </div> <p>N. 8°40' W., on line 29-30, sec. 24, approximately 45 lks. southerly from the center of a track road.</p>




Metes-and-Bounds Survey of the  
 Mount Trumbull Wilderness Area Boundary,  
 T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
2.22	<p>Through medium pine and juniper timber.</p> <p>Point for AP 30, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 26 ins. in the ground, in a mound of stone, 2 1/2 ft. base, to top, with aluminum cap mkd.</p> <div data-bbox="836 535 998 724" style="text-align: center;"> <p>T35N R8W</p>  </div> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 62°26' W., on line 30-31, sec. 24.</p> <p>Through medium pine and juniper timber.</p>
4.07	<p>Point for AP 31, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 12 ins. in the ground, to bedrock, in a supporting mound of stone, 4 ft, base, to top with aluminum cap mkd.</p> <div data-bbox="836 1113 998 1302" style="text-align: center;"> <p>T35N R8W</p>  </div> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 59°34' W., on line 31-32, sec. 24.</p> <p>Through medium pine and juniper timber.</p>
2.96	<p>Point for AP 32, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>

Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<div style="text-align: center;">  <p>T35N R8W S24 AP32 MTWA 1997</p> </div> <p>N. 58°25' W., on line 32-33, sec. 24.</p> <p>Through medium pine and juniper timber.</p>
3.65	<p>Point for AP 33, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 30 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
	<div style="text-align: center;">  <p>T35N R8W S24 AP33 MTWA 1997</p> </div> <p>N. 34°06' W., on line 33-34, sec. 24.</p> <p>Through medium pine and juniper timber.</p>
2.33	<p>Point for AP 34, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
	<div style="text-align: center;">  <p>T35N R8W S24 AP34 MTWA 1997</p> </div> <p>N. 35°11' W., on line 34-35, sec. 24.</p> <p>Through medium pine and juniper timber.</p>
3.63	<p>Point for AP 35, sec. 24.</p>



Metes-and-Bounds Survey of the  
 Mount Trumbull Wilderness Area Boundary,  
 T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 12 ins. in the ground, to bedrock, in a supporting mound of stone, 4 ft. base, to top with aluminum cap mkd.</p> <div data-bbox="836 409 998 598" style="text-align: center;"> <p>T35N R8W</p>  </div> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 73°16' W., on line 35-36, sec. 24.</p> <p>Through medium pine and juniper timber, sec. 24.</p> <p>1.48 Point for AP 36, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 24 ins. in the ground, in a mound of stone, 2 1/2 ft. base, to top, with aluminum cap mkd.</p> <div data-bbox="836 976 998 1165" style="text-align: center;"> <p>T35N R8W</p>  </div> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 57°28' W., on line 36-37, sec. 24.</p> <p>Through medium pine and juniper timber.</p> <p>1.87 Point for AP 37, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 24 ins. in the ground, in a mound of stone, 3 ft. base, to top, with aluminum cap mkd.</p> <div data-bbox="836 1554 998 1722" style="text-align: center;"> <p>T35N R8W</p>  </div> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 80°05' W., on line 37-38, sec. 24.</p> <p>Through medium pine and juniper timber.</p>




Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
2.79	<p>Point for AP 38, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W S24</p>  <p>AP38 MTWA 1997</p> </div>
	<p>S. 75°17' W., on line 38-39, sec. 24.</p> <p>Through medium pine and juniper timber.</p>
2.60	<p>Point for AP 39, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 30 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W S24</p>  <p>AP39 MTWA 1997</p> </div>
	<p>N. 51°43' W., on line 39-40, sec. 24.</p> <p>Through medium pine and juniper timber.</p>
2.31	<p>Point for AP 40, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 26 ins. in the ground, in a mound of stone, 2 ft. base, to top, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W S24</p>  <p>AP40 MTWA 1997</p> </div>
	<p>N. 61°38' W., on line 40-41, sec. 24.</p>



Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	Through medium pine and juniper timber.
2.32	Point for AP 41, sec. 24.
	Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 31 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.
	<p style="text-align: center;">T35N R8W S24</p>  <p style="text-align: center;">AP41 MTWA 1997</p>
	N. 69°38' W., on line 41-42, sec. 24.
	Through medium pine and juniper timber.
1.92	Point for AP 42, sec. 24.
	Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 26 ins. in the ground, in a mound of stone, 2 1/2 ft. base, to top, with aluminum cap mkd.
	<p style="text-align: center;">T35N R8W S24</p>  <p style="text-align: center;">AP42 MTWA 1997</p>
	S. 89°52' W., on line 42-43, sec. 24.
	Through medium pine and juniper timber.
4.30	Point for AP 43, sec. 24.
	Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 25 ins. in the ground, in a mound of stone, 2 1/2 ft. base, to top, with aluminum cap mkd.




Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<div style="text-align: center;">  <p>T35N R8W S24</p> <p>AP43 MTWA 1997</p> </div> <p>N. 67°22' W., on line 43-44, sec. 24.</p> <p>Through medium pine and juniper timber.</p>
1.43	<p>Point for AP 44, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 26 ins. in the ground, in a mound of stone, 2 1/2 ft. base, to top, with aluminum cap mkd.</p>
	<div style="text-align: center;">  <p>T35N R8W S24</p> <p>AP44 MTWA 1997</p> </div> <p>S. 84°22' W., on line 44-45, sec. 24.</p> <p>Through medium pine and juniper timber.</p>
2.90	<p>Point for AP 45, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 25 ins. in the ground, in a mound of stone, 2 1/2 ft. base, to top, with aluminum cap mkd.</p>
	<div style="text-align: center;">  <p>T35N R8W S24</p> <p>AP45 MTWA 1997</p> </div> <p>N. 46°38' W., on line 45-46, sec. 24.</p> <p>Through medium pine and juniper timber.</p>
3.03	<p>Point for AP 46, sec. 24.</p>


Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 26 ins. in the ground, in a mound of stone, 2 1/2 ft. base, to top, with aluminum cap mkd.</p> <div data-bbox="834 415 987 604" style="text-align: center;"> <p>T35N R8W S24</p>  <p>AP46 MTWA 1997</p> </div> <hr data-bbox="711 630 1161 640"/> <p>N. 66°20' W., on line 46-47, sec. 24.</p> <p>Through medium pine and juniper timber.</p>
1.28	<p>Point for AP 47, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 23 ins. in the ground, in a mound of stone, 3 ft. base, to top, with aluminum cap mkd.</p> <div data-bbox="854 989 1023 1178" style="text-align: center;"> <p>T35N R8W S24</p>  <p>AP47 MTWA 1997</p> </div> <hr data-bbox="711 1207 1161 1218"/> <p>S. 23°59' W., on line 47-48, sec. 24.</p> <p>Through medium pine and juniper timber.</p>
1.47	<p>Point for AP 48, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 26 ins. in the ground, in a mound of stone, 2 1/2 ft. base, to top, with aluminum cap mkd.</p> <div data-bbox="857 1562 1026 1751" style="text-align: center;"> <p>T35N R8W S24</p>  <p>AP48 MTWA 1997</p> </div> <hr data-bbox="711 1774 1161 1785"/> <p>S. 53°30' W., on line 48-49, sec. 24.</p> <p>Through medium pine and juniper timber.</p>




Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
2.34	<p>Point for AP 49, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 26 ins. in the ground, in a mound of stone, 2 1/2 ft. base, to top, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W S24</p>  <p>AP49 MTWA 1997</p> </div> <p>N. 61°57' W., on line 49-50, sec. 24.</p> <p>Through medium pine and juniper timber.</p>
2.14	<p>Point for AP 50, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 26 ins. in the ground, in a mound of stone, 2 1/2 ft. base, to top, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W S24</p>  <p>AP50 MTWA 1997</p> </div> <p>N. 87°15' W., on line 50-51, sec. 24.</p> <p>Through medium pine and juniper timber.</p>
1.24	<p>Point for AP 51, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W S24</p>  <p>AP51 MTWA 1997</p> </div> <p>N. 62°53' W., on line 51-52, sec. 24.</p>


Metes-and-Bounds Survey of the  
 Mount Trumbull Wilderness Area Boundary,  
 T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
4.21	<p>Through medium pine and juniper timber.</p> <p>Point for AP 52, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W S24</p>  <p>AP52 MTWA 1997</p> </div> <p>N. 69°20' W., on line 52-53, sec. 24.</p> <p>Through medium pine and juniper timber.</p>
1.33	<p>Point for AP 53, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 24 ins. in the ground, in a mound of stone, 2 1/2 ft. base, to top, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W S24</p>  <p>AP53 MTWA 1997</p> </div> <p>S. 68°39' W., on line 53-54, sec. 24.</p> <p>Through medium pine and juniper timber.</p>
1.51	<p>Point for AP 54, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 26 ins. in the ground, in a mound of stone, 2 1/2 ft. base, to top, with aluminum cap mkd.</p>




Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T35N R8W S24</p>  <p style="text-align: center;">AP54 MTWA 1997</p> <hr/> <p>N. 67°25' W., on line 54-55, sec. 24.</p> <p>Through medium pine and juniper timber.</p>
5.68	<p>Point for AP 55, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 23 ins. in the ground, in a mound of stone, 3 ft. base, to top, with aluminum cap mkd.</p> <p style="text-align: center;">T35N R8W S24</p>  <p style="text-align: center;">AP55 MTWA 1997</p> <hr/> <p>S. 89°17' W., on line 55-56, sec. 24.</p> <p>Through medium pine and juniper timber.</p>
1.81	<p>Point for AP 56, sec. 24.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 24 ins. in the ground, in a mound of stone, 3 ft. base, to top, with aluminum cap mkd.</p> <p style="text-align: center;">T35N R8W S24</p>  <p style="text-align: center;">AP56 MTWA 1997</p> <hr/> <p>S. 53°53' W., on line 56-57, sec. 24.</p> <p>Through medium pine and juniper timber.</p>
2.70	<p>The point for AP 57, sec. 24, identical with AP 1, sec. 23, on the line bet. secs. 23 and 24, not monumented.</p>



Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From this point, the cor. of secs. 13, 14, 23 and 24, bears N. 0°09' E., 2.83 chs. dist., hereinbefore described.</p>
	<p style="text-align: center;">In Section 23</p>
	<p>From the point for AP 1, sec. 23, identical with AP 57, sec. 24, on the line bet. secs. 23 and 24.</p> <p>S. 53°53' W., on line 1-2, sec. 23, of the metes-and-bounds survey of the Mount Trumbull Wilderness Area Bdy., approximately 45 lks. southerly from the center of a track road.</p> <p>Through medium pine and juniper timber.</p>
3.77	<p>Point for AP 2, sec. 23.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 25 ins. in the ground, in a mound of stone, 3 ft. base, to top, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W S23</p>  <p>AP2 MTWA 1997</p> </div> <p>N. 86°38' W., on line 2-3, sec. 23.</p> <p>Through medium pine and juniper timber.</p>
0.68	<p>Point for AP 3, sec. 23.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W S23</p>  <p>AP3 MTWA 1997</p> </div> <p>N. 49°00' W., on line 3-4, sec. 23.</p> <p>Through medium pine and juniper timber.</p>



Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
5.68	<p>Point for AP 4, sec. 23.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 24 ins. in the ground, in a mound of stone, 2 1/2 ft. base, to top, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W S23</p>  </div>
	<p>N. 76°02' W., on line 4-5, sec. 23.</p>
	<p>Through medium pine and juniper timber.</p>
3.12	<p>Point for AP 5, sec. 23.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 25 ins. in the ground, in a mound of stone, 2 ft. base, to top, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W S23</p>  </div>
	<p>N. 84°05' W., on line 5-6, sec. 23.</p>
	<p>Through medium pine and juniper timber.</p>
2.92	<p>Point for AP 6, sec. 23.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W S23</p>  </div>
	<p>S. 68°04' W., on line 6-7, sec. 23.</p>




Metes-and-Bounds Survey of the  
 Mount Trumbull Wilderness Area Boundary,  
 T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	Through medium pine and juniper timber.
4.35	Point for AP 7, sec. 23.
	Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 31 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.
	<p style="text-align: center;">T35N R8W S23</p> 
	S. 54°32' W., on line 7-8, sec. 23.
	Through medium pine and juniper timber.
3.14	Point for AP 8, sec. 23.
	Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 22 ins. in the ground, to bedrock, in a mound of stone, 3 ft. base, to top, with aluminum cap mkd.
	<p style="text-align: center;">T35N R8W S23</p> 
	S. 77°13' W., on line 8-9, sec. 23.
	Through medium pine and juniper timber.
2.55	Point for AP 9, sec. 23.
	Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 21 ins. in the ground, to bedrock, in a mound of stone, 3 ft. base, to top, with aluminum cap mkd.



Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<div style="text-align: center;">  <p>T35N R8W S23</p> <p>AP9 MTWA 1997</p> </div> <hr/> <p>N. 45°28' W., on line 9-10, sec. 23.</p> <p>Through medium pine and juniper timber.</p>
5.80	<p>Point for AP 10, sec. 23.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 26 ins. in the ground, in a mound of stone, 3 ft. base, to top, with aluminum cap mkd.</p>
	<div style="text-align: center;">  <p>T35N R8W S23</p> <p>AP10 MTWA 1997</p> </div> <hr/> <p>N. 52°22' W., on line 10-11, sec. 23.</p> <p>Through medium pine and juniper timber.</p>
0.06	<p>The point for AP 11, sec. 23, identical with AP 1, sec. 14, on the line bet. secs. 14 and 23, not monumented.</p> <p>From this point, the 1/4 sec. cor. of secs. 14 and 23, bears S. 89°41' W., 12.59 chs. dist.</p>
	<div style="text-align: center;"> <p>In Section 14</p> <hr/> </div> <p>From the point for AP 1, sec. 14, identical with AP 11, sec. 23, on the line bet. secs. 14 and 23.</p> <p>N. 52°22' W., on line 1-2, sec. 14, of the metes-and-bounds survey of the Mount Trumbull Wilderness Area Bdy., approximately 45 lks. southerly from the center of a track road.</p> <p>Through medium pine and juniper timber.</p>
3.83	<p>Point for AP 2, sec. 14.</p>



Metes-and-Bounds Survey of the  
 Mount Trumbull Wilderness Area Boundary,  
 T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 21 ins. in the ground, to bedrock, in a mound of stone, 3 ft. base, to top, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W S14</p>  <p>AP2 MTWA 1997</p> </div> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 73°29' W., on line 2-3, sec. 14.</p> <p>Through medium pine and juniper timber.</p>
3.82	<p>Point for AP 3, sec. 14.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 24 ins. in the ground, in a mound of stone, 3 ft. base, to top, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W S14</p>  <p>AP3 MTWA 1997</p> </div> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 58°16' W., on line 3-4, sec. 14.</p> <p>Through medium pine and juniper timber.</p>
4.16	<p>Point for AP 4, sec. 14.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 23 ins. in the ground, in a mound of stone, 3 ft. base, to top, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W S14</p>  <p>AP4 MTWA 1997</p> </div> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 22°39' W., on line 4-5, sec. 14.</p> <p>Leave track road, thence through medium pine and juniper timber.</p>

Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
6.15	<p>Point for AP 5, sec. 14, identical with the 1/4 sec. cor. of secs. 14 and 23, hereinbefore described.</p> <hr/> <p style="text-align: center;">In Section 15</p> <hr/> <p>From AP 3, sec. 15, on the N. and S. center line of the SE 1/4 of sec. 15.</p> <p>From this cor. point, the E. 1/16 sec. cor. of secs. 15 and 22, bears S. 0°01' E., 7.86 chs. dist., hereinbefore described.</p> <p>S. 61°09' W., on line 3-4, sec. 15, of the metes-and-bounds survey of the Mount Trumbull Wilderness Area Bdy.</p> <p>Along N. toe slope of Mount Trumbull.</p>
1.45	<p>Point for AP 4, sec. 15.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;">  <p>T35N R8W S15</p> <p>AP4 MTWA 1997</p> </div> <hr/> <p>N. 63°22' W., on line 4-5, sec. 15.</p> <p>Along N. toe slope of Mount Trumbull.</p>
3.63	<p>Point for AP 5, sec. 15.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;">  <p>T35N R8W S15</p> <p>AP5 MTWA 1996</p> </div> <hr/> <p>N. 70°58' W., on line 5-6, sec. 15.</p>

Metes-and-Bounds Survey of the  
 Mount Trumbull Wilderness Area Boundary,  
 T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
4.68	<p>Along N. toe slope of Mount Trumbull.</p> <p>Point for AP 6, sec. 15.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div data-bbox="852 541 987 730" style="text-align: center;"> <p>T35N R8W S15</p>  <p>AP6 MTWA 1996</p> </div> <hr data-bbox="714 756 1144 766"/> <p>N. 43°29' W., on line 6-7, sec. 15.</p> <p>Along N. toe slope of Mount Trumbull.</p>
4.94	<p>Point for AP 7, sec. 15.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 30 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div data-bbox="852 1117 987 1306" style="text-align: center;"> <p>T35N R8W S15</p>  <p>AP7 MTWA 1996</p> </div> <hr data-bbox="714 1333 1144 1344"/> <p>N. 40°58' W., on line 7-8, sec. 15.</p> <p>Along N. toe slope of Mount Trumbull.</p>
3.88	<p>Point for AP 8, sec. 15.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div data-bbox="795 1690 993 1879" style="text-align: center;"> <p>T35N R8W S15</p>  <p>AP8 MTWA 1996</p> </div> <hr data-bbox="714 1900 1144 1911"/>




Metes-and-Bounds Survey of the  
 Mount Trumbull Wilderness Area Boundary,  
 T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
3.61	<p>N. 85°54' W., on line 8-9, sec. 15.</p> <p>Along N. toe slope of Mount Trumbull.</p> <p>Point for AP 9, sec. 15.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W S15</p> <hr/> <p>AP9 MTWA 1996</p> <hr/> </div>
1.47	<p>N. 88°47' W., on line 9-10, sec. 15.</p> <p>Along N. toe slope of Mount Trumbull.</p> <p>Intersect the N. and S. centerline of sec. 15.</p> <p>From this point, the 1/4 sec. cor. of secs. 15 and 22, bears S. 0°03' E., 17.00 chs. dist., hereinbefore described.</p>
5.12	<p>Point for AP 10, sec. 15.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 30 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W S15</p> <hr/> <p>AP10 MTWA 1996</p> <hr/> </div>
3.81	<p>N. 89°02' W., on line 10-11, sec. 15.</p> <p>Along N. toe slope of Mount Trumbull.</p> <p>Point for AP 11, sec. 15.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 29 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>

Metes-and-Bounds Survey of the  
 Mount Trumbull Wilderness Area Boundary,  
 T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T35N R8W S15</p> <hr style="width: 10%; margin: auto;"/> <p style="text-align: center;">AP11 MTWA 1996</p> <hr style="width: 10%; margin: auto;"/> <p>S. 38°59' W., on line 11-12, sec. 15.            Along N. toe slope of Mount Trumbull.</p>
4.23	<p>Point for AP 12, sec. 15.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 30 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
	<p style="text-align: center;">T35N R8W S15</p> <hr style="width: 10%; margin: auto;"/> <p style="text-align: center;">AP12 MTWA 1996</p> <hr style="width: 10%; margin: auto;"/> <p>S. 73°13' W., on line 12-13, sec. 15.            Along N. toe slope of Mount Trumbull.</p>
6.59	<p>Point for AP 13, sec. 15.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 23 ins. in the ground, in a mound of stone, 2 ft. base, to top, with aluminum cap mkd.</p>
	<p style="text-align: center;">T35N R8W S15</p> <hr style="width: 10%; margin: auto;"/> <p style="text-align: center;">AP13 MTWA 1996</p> <hr style="width: 10%; margin: auto;"/> <p>N. 56°06' W., on line 13-14, sec. 15.            Along N. toe slope of Mount Trumbull.</p>
5.73	<p>Point for AP 14, sec. 15.</p>

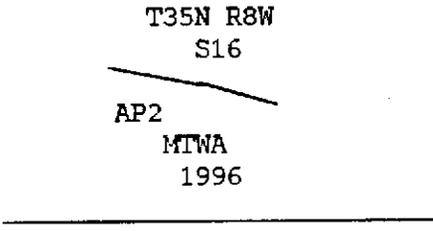
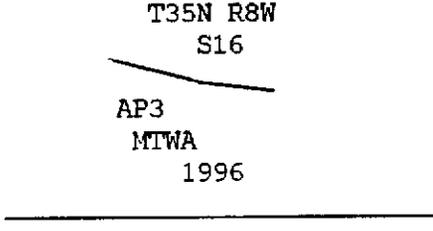
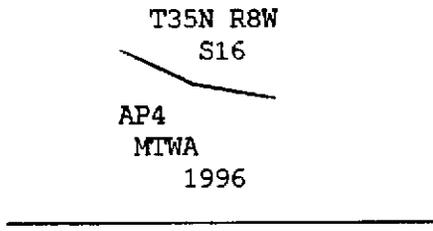
Metes-and-Bounds Survey of the  
 Mount Trumbull Wilderness Area Boundary,  
 T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 29 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W S15</p>  <p>AP14 MTWA 1996</p> </div> <hr/> <p>N. 57°30' W., on line 14-15, sec. 15.</p> <p>Along N. toe slope of Mount Trumbull.</p>
4.40	<p>Point for AP 15, sec. 15.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 27 ins. in the ground, in a mound of stone 2 ft. base, 1 ft. high, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W S15</p>  <p>AP15 MTWA 1996</p> </div> <hr/> <p>S. 84°06' W., on line 15-16, sec. 15.</p> <p>Along N. toe slope of Mount Trumbull.</p>
5.52	<p>Point for AP 16, sec. 15.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 26 ins. in the ground, in a mound of stone 3 ft. base, 2 ft. high, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W S15</p>  <p>AP16 MTWA 1996</p> </div> <hr/> <p>N. 68°00' W., on line 16-17, sec. 15.</p> <p>Along N. toe slope of Mount Trumbull.</p>



Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
7.60	<p>Point for AP 17, sec. 15.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 29 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div data-bbox="824 474 987 663" style="text-align: center;"> <p>T35N R8W S15 AP17 MTWA 1996</p> </div>
1.34	<p>N. 39°45' W., on line 17-18, sec. 15.</p> <p>The point for AP 18, sec. 15, identical with AP 1, sec. 16, on the line bet. secs. 15 and 16, not monumented.</p> <p>From this point, the 1/4 sec. cor. of secs. 15 and 16, bears N. 0°15' E., 16.04 chs. dist., hereinbefore described.</p> <hr/> <p style="text-align: center;">In Section 16</p> <hr/> <p>From the point for AP 1, sec. 16, identical with AP 18, sec. 15, on the line bet. secs. 15 and 16.</p> <p>N. 39°45' W., on line 1-1A, sec. 16, of the metes-and-bounds survey of the Mount Trumbull Wilderness Area Edy., approximately 45 lks. southerly from the center of a track road.</p> <p>Through medium pine and juniper timber.</p>
6.39	<p>Point for AP1A, sec. 16.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 26 ins. in the ground, in a mound of stone 2 1/2 ft. base, to top, with aluminum cap mkd.</p> <div data-bbox="824 1556 987 1745" style="text-align: center;"> <p>T35N R8W S16 AP1A MTWA 1996</p> </div>
9.73	<p>N. 63°16' W., on line 1A-2, sec. 16.</p> <p>Point for AP 2, sec. 16.</p>




Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 29 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <p style="text-align: center;">T35N R8W S16</p>  <p style="text-align: center;">AP2 MTWA 1996</p> <hr/> <p>N. 76°05' W., on line 2-3, sec. 16.</p>
6.48	<p>Point for AP 3, sec. 16.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 33 ins. in the ground, with aluminum cap mkd.</p> <p style="text-align: center;">T35N R8W S16</p>  <p style="text-align: center;">AP3 MTWA 1996</p> <hr/> <p>N. 65°14' W., on line 3-4, sec. 16.</p>
10.59	<p>Point for AP 4, sec. 16.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 26 ins. in the ground, in a mound of stone, 2 1/2 ft. base, to top, with aluminum cap mkd.</p> <p style="text-align: center;">T35N R8W S16</p>  <p style="text-align: center;">AP4 MTWA 1996</p> <hr/> <p>N. 43°34' W., on line 4-5, sec. 16.</p>
8.61	<p>Point for AP 5, sec. 16.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 25 ins. in the ground, in a mound of stone, 2 1/2 ft. base, to top, with aluminum cap mkd.</p>

Metes-and-Bounds Survey of the  
 Mount Trumbull Wilderness Area Boundary,  
 T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T35N R8W S16</p> 
4.50	<p>N. 78°06' W., on line 5-6, sec. 16.</p> <p>Point for AP 6, sec. 16.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 25 ins. in the ground, in a mound of stone, 2 1/2 ft. base, to top, with aluminum cap mkd.</p>
	<p style="text-align: center;">T35N R8W S16</p> 
2.10	<p>S. 77°27' W., on line 6-7, sec. 16.</p> <p>Point for AP 7, sec. 16.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 27 ins. in the ground, in a mound of stone, 2 1/2 ft. base, to top, with aluminum cap mkd.</p>
	<p style="text-align: center;">T35N R8W S16</p> 
3.60	<p>S. 57°58' W., on line 7-8, sec. 16.</p> <p>Point for AP 8, sec. 16.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 26 ins. in the ground, in a mound of stone, 2 1/2 ft. base, to top, with aluminum cap mkd.</p>

Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<div style="text-align: center;">  </div> <hr style="width: 20%; margin: 10px auto;"/>
	<p>S. 55°12' W., on line 8-9, sec. 16, approximately 45 lks., easterly from the center of an improved graded road.</p>
4.17	<p>Point for AP 9, sec. 16.</p>
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 30 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
	<div style="text-align: center;">  </div> <hr style="width: 20%; margin: 10px auto;"/>
	<p>S. 31°18' W., on line 9-10, sec. 16.</p>
5.02	<p>Point for AP 10, sec. 16.</p>
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 30 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
	<div style="text-align: center;">  </div> <hr style="width: 20%; margin: 10px auto;"/>
	<p>S. 23°49' W., on line 10-11, sec. 16.</p>
5.88	<p>Point for AP 11, sec. 16.</p>
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 30 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>



Metes-and-Bounds Survey of the  
 Mount Trumbull Wilderness Area Boundary,  
 T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<div data-bbox="852 283 1015 472" style="text-align: center;"> <p>T35N R8W S16 AP11 MTWA 1996</p> </div> <hr style="width: 20%; margin: 10px auto;"/> <p data-bbox="406 535 998 577">S. 34°11' W., on line 11-12, sec. 16.</p> <p data-bbox="406 598 1437 640">Leave graded road, thence through medium pine and juniper timber.</p> <p data-bbox="259 661 803 703">5.50 Point for AP 12, sec. 16.</p> <p data-bbox="406 724 1404 798">Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 34 ins. in the ground, with aluminum cap mkd.</p>
	<div data-bbox="852 829 1015 1018" style="text-align: center;"> <p>T35N R8W S16 AP12 MTWA 1996</p> </div> <hr style="width: 20%; margin: 10px auto;"/> <p data-bbox="406 1081 998 1123">S. 69°30' W., on line 12-13, sec. 16.</p> <p data-bbox="406 1144 998 1186">Along W. toe slope of Mount Trumbull.</p> <p data-bbox="259 1207 803 1249">9.80 Point for AP 13, sec. 16.</p> <p data-bbox="406 1270 1404 1365">Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 27 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
	<div data-bbox="852 1396 1015 1585" style="text-align: center;"> <p>T35N R8W S16 AP13 MTWA 1996</p> </div> <hr style="width: 20%; margin: 10px auto;"/> <p data-bbox="406 1648 998 1690">S. 27°38' W., on line 13-14, sec. 16.</p> <p data-bbox="406 1711 998 1753">Along W. toe slope of Mount Trumbull.</p> <p data-bbox="259 1774 803 1816">8.50 Point for AP 14, sec. 16.</p>



Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div data-bbox="852 415 1015 604" style="text-align: center;"> <p>T35N R8W S16 AP14 MTWA 1996</p> </div> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 2°30' W., on line 14-15, sec. 16. Along W. toe slope of Mount Trumbull.</p>
4.16	<p>Point for AP 15, sec. 16.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 27 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div data-bbox="852 989 1015 1178" style="text-align: center;"> <p>T35N R8W S16 AP15 MTWA 1996</p> </div> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 17°06' W., on line 15-16, sec. 16. Along W. toe slope of Mount Trumbull.</p>
5.46	<p>Point for AP 16, sec. 16.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 11 ins. in the ground, to bedrock, in a mound of stone, 3 ft. base, 2 ft. high, with aluminum cap mkd.</p> <div data-bbox="852 1566 1015 1755" style="text-align: center;"> <p>T35N R8W S16 AP16 MTWA 1996</p> </div> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 33°44' W., on line 16-17, sec. 16. Along W. toe slope of Mount Trumbull.</p>




Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
4.47	<p>Point for AP 17, sec. 16.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 27 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;">  </div> <p>S. 9°49' W., on line 17-18, sec. 16.</p> <p>Along W. toe slope of Mount Trumbull.</p>
3.64	<p>The point for AP 18, sec. 16, identical with AP 1, sec. 21, on the line bet. secs. 16 and 21, not monumented.</p> <p>From this point, the cor. of secs. 16, 17, 20 and 21, bears S. 89°41' W., 6.21 chs. dist., hereinbefore described.</p> <hr/> <p style="text-align: center;">In Section 21</p> <hr/> <p>From the point for AP 1, sec. 21, identical with AP 18, sec. 16, on the line bet. secs. 16 and 21.</p> <p>S. 9°49' W., on line 1-2, sec. 21, of the metes-and-bounds survey of the Mount Trumbull Wilderness Area Bdy.</p> <p>Along W. toe slope of Mount Trumbull.</p>
0.45	<p>Point for AP 2, sec. 21.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 22 ins. in the ground, in a mound of stone, 3 ft. base, to top, with aluminum cap mkd.</p> <div style="text-align: center;">  </div> <p>S. 3°38' E., on line 2-3, sec. 21.</p>




Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	Along W. toe slope of Mount Trumbull.
4.31	Point for AP 3, sec. 21.
	Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 25 ins. in the ground, in a mound of stone, 2 1/2 ft. base, to top, with aluminum cap mkd.
	
	S. 54°40' W., on line 3-4, sec. 21.
	Along W. toe slope of Mount Trumbull.
3.94	Point for AP 4, sec. 21.
	Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 19 ins. in the ground, in a mound of stone, 3 ft. base, to top, with aluminum cap mkd.
	
	S. 75°01' W., on line 4-5, sec. 21.
3.32	The point for AP 5, sec. 21, identical with AP 1, sec. 20, on the line bet. secs. 20 and 21, not monumented.
	From this point, the cor. of secs. 16, 17, 20 and 21, bears N. 0°06' E., 7.85 chs. dist.
	<hr/> <p style="text-align: center;">In Section 20</p> <hr/>
	From the point for AP 1, sec. 20, identical with AP 5, sec. 21, on the line bet. secs. 20 and 21.
	S. 75°01' W., on line 1-1A, sec. 20, of the metes-and-bounds survey of the Mount Trumbull Wilderness Area Bdy.




Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
1.41	<p>Along W. toe slope of Mount Trumbull.</p> <p>Point for AP1A, sec. 20.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 22 ins. in the ground, in a mound of stone, 2 1/2 ft. base, to top, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W S20</p>  <p>AP1A MTWA 1996</p> </div>
9.56	<p>S. 58°54' W., on line 1A-2, sec. 20.</p> <p>Along W. toe slope of Mount Trumbull.</p> <p>Point for AP 2, sec. 20.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 15 ins. in the ground, to bedrock, in a mound of stone, 3 ft. base, to top, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W S20</p>  <p>AP2 MTWA 1996</p> </div>
7.93	<p>S. 50°46' W., on line 2-3, sec. 20.</p> <p>Along W. toe slope of Mount Trumbull.</p> <p>Point for AP 3, sec. 20.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 27 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W S20</p>  <p>AP3 MTWA 1996</p> </div>
	<p>S. 10°40' W., on line 3-4, sec. 20.</p>

Metes-and-Bounds Survey of the  
 Mount Trumbull Wilderness Area Boundary,  
 T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
10.97	<p>Along W. toe slope of Mount Trumbull.</p> <p>Point for AP 4, sec. 20.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 27 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;">  <p>T35N R8W S20 AP4 MTWA 1996</p> </div> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 27°07' W., on line 4-5, sec. 20.</p> <p>Along W. toe slope of Mount Trumbull.</p>
6.90	<p>Point for AP 5, sec. 20.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;">  <p>T35N R8W S20 AP5 MTWA 1996</p> </div> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 40°04' W., on line 5-6, sec. 20.</p> <p>Along W. toe slope of Mount Trumbull.</p>
6.47	<p>Point for AP 6, sec. 20.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 25 ins. in the ground, in a mound of stone, 2 ft. base, to top, with aluminum cap mkd.</p> <div style="text-align: center;">  <p>T35N R8W S20 AP6 MTWA 1996</p> </div> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 4°25' W., on line 6-7, sec. 20.</p>




Metes-and-Bounds Survey of the  
 Mount Trumbull Wilderness Area Boundary,  
 T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
6.69	<p>Along W. toe slope of Mount Trumbull.</p> <p>Point for AP 7, sec. 20.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 25 ins. in the ground, in a mound of stone, 2 ft. base, to top, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W            S20</p>  </div> <hr style="width: 25%; margin: 10px auto;"/> <p>S. 6°33' E., on line 7-8, sec. 20.</p> <p>Along W. toe slope of Mount Trumbull.</p>
7.73	<p>Point for AP 8, sec. 20.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 25 ins. in the ground, in a mound of stone, 2 ft. base, to top, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W            S20</p>  </div> <hr style="width: 25%; margin: 10px auto;"/> <p>S. 15°57' W., on line 8-9, sec. 20.</p> <p>Along W. toe slope of Mount Trumbull.</p>
3.89	<p>Point for AP 9, sec. 20.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 18 ins. in the ground, to bedrock, in a mound of stone, 2 ft. base, to top, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W            S20</p>  </div> <hr style="width: 25%; margin: 10px auto;"/> <p>S. 16°58' W., on line 9-10, sec. 20.</p>

Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
10.44	<p>Along W. toe slope of Mount Trumbull.</p> <p>Point for AP 10, sec. 20.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 27 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
	<p style="text-align: center;">T35N R8W S20 / AP10           MTWA           1996</p> <hr style="width: 20%; margin: auto;"/>
5.99	<p>S. 25°52' W., on line 10-11, sec. 20.</p> <p>Along W. toe slope of Mount Trumbull.</p> <p>Point for AP 11, sec. 20.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 27 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
	<p style="text-align: center;">T35N R8W S20 / AP11           MTWA           1996</p> <hr style="width: 20%; margin: auto;"/>
6.52	<p>S. 6°56' E., on line 11-12, sec. 20.</p> <p>The point for AP 12, sec. 20, identical with AP 1, sec. 29, on the line bet. secs. 20 and 29, not monumented.</p> <p>From this point, the 1/4 sec. cor. of secs. 20 and 29, bears West, 9.45 chs. dist.</p>
	<p style="text-align: center;">In Section 29</p> <hr style="width: 20%; margin: auto;"/>
	<p>From the point for AP 1, sec. 29, identical with AP 12, sec. 20, on the line bet. secs. 20 and 29.</p> <p>S. 6°56' E., on line 1-1A, sec. 29, of the metes-and-bounds survey of the Mount Trumbull Wilderness Area Bdy.</p> <p>Along W. toe slope of Mount Trumbull.</p>




Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
0.82	<p>Point for AP1A, sec. 29.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 29 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;">  </div> <hr style="width: 25%; margin: 10px auto;"/> <p>S. 5°12' W., on line 1A-2, sec. 29.</p>
4.65	<p>Point for AP 2, sec. 29.</p> <p>Along W. toe slope of Mount Trumbull.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 27 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;">  </div> <hr style="width: 25%; margin: 10px auto;"/> <p>S. 7°50' W., on line 2-3, sec. 29.</p>
4.57	<p>Point for AP 3, sec. 29.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 12 ins. in the ground, to bedrock, in a mound of stone, 3 ft. base, 1 ft. high with aluminum cap mkd.</p> <div style="text-align: center;">  </div> <hr style="width: 25%; margin: 10px auto;"/> <p>S. 35°29' E., on line 3-4, sec. 29.</p>

Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
11.12	<p>Point for AP 4, sec. 29.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 27 ins. in the ground, in a mound of stone, 2 ft. base, 1 ft. high, with aluminum cap mkd.</p> <div data-bbox="824 478 1023 634" style="text-align: center;"> </div> <hr style="width: 25%; margin: 10px auto;"/> <p>S. 6°38' E., on line 4-5, sec. 29.</p> <p>Along W. toe slope of Mount Trumbull.</p>
7.43	<p>Point for AP 5, sec. 29.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 29 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div data-bbox="824 1020 1023 1176" style="text-align: center;"> </div> <hr style="width: 25%; margin: 10px auto;"/> <p>S. 4°20' E., on line 5-6, sec. 29.</p> <p>Along W. toe slope of Mount Trumbull.</p>
4.14	<p>Point for AP 6, sec. 29.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div data-bbox="857 1558 1023 1743" style="text-align: center;"> </div> <hr style="width: 25%; margin: 10px auto;"/> <p>N. 89°27' E., on line 6-7, sec. 29.</p> <p>Along W. toe slope of Mount Trumbull.</p>

Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
2.29	<p>Point for AP 7, sec. 29.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 27 ins. in the ground, in a mound of stone, 2 ft. base, 1 ft. high, with aluminum cap mkd.</p> <div data-bbox="829 478 1015 667" style="text-align: center;"> <p>T35N R8W MTWA AP7</p>  </div> <hr style="width: 25%; margin: 10px auto;"/> <p>S. 34°38' E., on line 7-8, sec. 29.</p> <p>Along W. toe slope of Mount Trumbull.</p>
2.12	<p>Point for AP 8, sec. 29.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 27 ins. in the ground, in a mound of stone, 2 ft. base, 1 ft. high, with aluminum cap mkd.</p> <div data-bbox="849 1052 1015 1241" style="text-align: center;"> <p>T35N R8W MTWA AP8</p>  </div> <hr style="width: 25%; margin: 10px auto;"/> <p>S. 28°58' W., on line 8-9, sec. 29.</p>
5.64	<p>Point for AP 9, sec. 29.</p> <p>Along W. toe slope of Mount Trumbull.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div data-bbox="824 1623 1015 1780" style="text-align: center;"> <p>T35N R8W MTWA AP9</p>  </div> <hr style="width: 25%; margin: 10px auto;"/> <p>S. 26°17' E., on line 9-10, sec. 29.</p>




Metes-and-Bounds Survey of the  
 Mount Trumbull Wilderness Area Boundary,  
 T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
4.40	<p>Along W. toe slope of Mount Trumbull.</p> <p>Point for AP 10, sec. 29.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 26 ins. in the ground, in a mound of stone, 2 ft. base, 1 ft. high, with aluminum cap mkd.</p> <div data-bbox="824 541 1023 697" style="text-align: center;"> <p>T35N R8W            S29 \ MTWA                  AP10                  1996</p> <hr style="width: 20%; margin: auto;"/> </div> <p>S. 28°17' E., on line 10-11, sec. 29.</p> <p>Along W. toe slope of Mount Trumbull.</p>
4.46	<p>Point for AP 11, sec. 29.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 29 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div data-bbox="824 1081 1023 1236" style="text-align: center;"> <p>T35N R8W            S29 \ MTWA                  AP11                  1996</p> <hr style="width: 20%; margin: auto;"/> </div> <p>S. 30°35' E., on line 11-12, sec. 29.</p> <p>Along W. toe slope of Mount Trumbull.</p>
5.56	<p>Point for AP 12, sec. 29.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div data-bbox="824 1621 1023 1776" style="text-align: center;"> <p>T35N R8W            S29 \ MTWA                  AP12                  1996</p> <hr style="width: 20%; margin: auto;"/> </div> <p>S. 18°57' E., on line 12-13, sec. 29.</p>


Metes-and-Bounds Survey of the  
 Mount Trumbull Wilderness Area Boundary,  
 T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
5.63	<p>Along W. toe slope of Mount Trumbull.</p> <p>Point for AP 13, sec. 29.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div data-bbox="812 535 1015 703" style="text-align: center;"> <p>T35N R8W            MTWA            S29 AP13            1996</p> <hr style="width: 20%; margin: auto;"/> </div> <p>S. 31°25' E., on line 13-14, sec. 29.</p> <p>Along W. toe slope of Mount Trumbull.</p>
3.45	<p>Point for AP 14, sec. 29.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 30 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div data-bbox="812 1081 1015 1249" style="text-align: center;"> <p>T35N R8W            MTWA            S29 AP14            1996</p> <hr style="width: 20%; margin: auto;"/> </div> <p>S. 18°40' E., on line 14-15, sec. 29.</p> <p>Along W. toe slope of Mount Trumbull.</p>
2.45	<p>Point for AP 15, sec. 29.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 30 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div data-bbox="812 1617 1015 1785" style="text-align: center;"> <p>T35N R8W            MTWA            S29 AP15            1996</p> <hr style="width: 20%; margin: auto;"/> </div> <p>S. 24°22' E., on line 15-16, sec. 29.</p>

Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	Through dense sage.
4.94	Point for AP 16, sec. 29.
	Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.
	
	Cor. is located 150 lks. N. of improved graded road.
	S. 37°45' E., on line 16-17, sec. 29.
	Through dense sage.
5.21	Point for AP 17, sec. 29.
	Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 29 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.
	
	Cor. is located 150 lks. N. of improved graded road.
	S. 39°25' E., on line 17-18, sec. 29.
5.37	Point for AP 18, sec. 29.
	Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 29 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.
	




Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Cor. is located 150 lks. N. of improved graded road.</p> <hr/> <p>S. 60°32' E., on line 18-19, sec. 29.</p> <p>3.57 The point for AP 19, sec. 29, identical with AP 1, sec. 28, on the line bet. secs. 28 and 29, not monumented.</p> <p>From this point, the cor. of secs. 28, 29, 32 and 33, bears South, 4.95 chs. dist., hereinbefore described.</p>
	<hr/> <p style="text-align: center;">In Section 28</p> <hr/> <p>From the point for AP 1, sec. 28, identical with AP 19, sec. 29, on the line bet. secs. 28 and 29.</p> <p>S. 60°32' E., on line 1-2, sec. 28, of the metes-and-bounds survey of the Mount Trumbull Wilderness Area Bdy., approximately 150 lks. northerly of an improved graded road.</p> <p>Through medium pine and juniper timber.</p> <p>3.91 Point for AP 2, sec. 28.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 22 ins. in the ground, in a mound of stone, 2 ft. base, 1 ft. high, with aluminum cap mkd.</p> <div style="text-align: center;">  </div>
	<hr/> <p>S. 44°57' E., on line 2-3, sec. 28.</p> <p>Through medium pine and juniper timber.</p> <p>4.26 The point for AP 3, sec. 28, identical with AP 1, sec. 33, on the line bet. secs. 28 and 33, not monumented.</p> <p>From this point, the cor. of secs. 28, 29, 32 and 33, bears S. 89°56' W. 6.42 chs. dist., hereinbefore described.</p> <hr/> <p style="text-align: center;">In Section 33</p> <hr/>




Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
3.95	<p>From the point for AP 1, sec. 33, identical with AP 3, sec. 28, on the line bet. secs. 28 and 33.</p> <p>S. 44°57' E., on line 1-1A, sec. 33, of the metes-and-bounds survey of the Mount Trumbull Wilderness Area Bdy., approximately 150 lks. northerly of an improved graded road.</p> <p>Point for AP 1A, sec. 33.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 29 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div data-bbox="824 695 1003 856" style="text-align: center;"> </div>
6.04	<p>S. 50°37' E., on line 1A-2, sec. 33.</p> <p>Through medium pine and juniper timber.</p> <p>Point for AP 2, sec. 33.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div data-bbox="824 1241 1003 1402" style="text-align: center;"> </div>
9.15	<p>S. 56°12' E., on line 2-3, sec. 33.</p> <p>Through medium pine and juniper timber.</p> <p>Point for AP 3, sec. 33.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 29 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>



Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
5.46	<div style="text-align: center;">  </div> <hr style="width: 25%; margin: 10px auto;"/> <p>S. 56°51' E., on line 3-4, sec. 33.</p> <p>Through medium pine and juniper timber.</p> <p>Point for AP 4, sec. 33.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 29 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
7.66	<div style="text-align: center;">  </div> <hr style="width: 25%; margin: 10px auto;"/> <p>S. 63°17' E., on line 4-5, sec. 33.</p> <p>Through medium pine and juniper timber.</p> <p>Point for AP 5, sec. 33.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 30 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
5.09	<div style="text-align: center;">  </div> <hr style="width: 25%; margin: 10px auto;"/> <p>S. 55°44' E., on line 5-6, sec. 33.</p> <p>Through medium pine and juniper timber.</p> <p>Point for AP 6, sec. 33.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 31 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>

Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<div style="text-align: center;">  </div> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 58°14' E., on line 6-7, sec. 33.</p> <p>Through medium pine and juniper timber.</p>
5.84	<p>Point for AP 7, sec. 33.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 30 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
	<div style="text-align: center;">  </div> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 59°07' E., on line 7-8, sec. 33.</p> <p>Through medium pine and juniper timber.</p>
4.85	<p>Point for AP 8, sec. 33.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 29 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
	<div style="text-align: center;">  </div> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 22°42' E., on line 8-9, sec. 33.</p> <p>Leave graded road, thence along westerly edge of abandoned sawmill site.</p>
2.78	<p>Point for AP 9, sec. 33.</p>




Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 27 ins. in the ground, in a mound of stone, 2 ft. base, 1 ft. high, with aluminum cap mkd.</p> <div data-bbox="852 409 998 598" style="text-align: center;"> <p>T35N R8W MTWA AP9</p>  </div> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 40°35' E., on line 9-10, sec. 33.</p> <p>Along westerly edge of abandoned sawmill site.</p>
3.03	<p>Point for AP 10, sec. 33.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 30 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div data-bbox="852 987 998 1176" style="text-align: center;"> <p>T35N R8W MTWA AP10</p>  </div> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 45°48' E., on line 10-11, sec. 33.</p> <p>Along northerly edge of abandoned sawmill site.</p>
1.93	<p>Point for AP 11, sec. 33.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 26 ins. in the ground, in a mound of stone, 2 ft. base, 1 ft. high, with aluminum cap mkd.</p> <div data-bbox="828 1554 1039 1711" style="text-align: center;"> <p>T35N R8W MTWA AP11</p>  </div> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 6°45' W., on line 11-12, sec. 33.</p> <p>Along easterly edge of abandoned sawmill site.</p>

Metes-and-Bounds Survey of the  
 Mount Trumbull Wilderness Area Boundary,  
 T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
4.19	<p>Point for AP 12, sec. 33.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W            MTWA            S33 AP12            1996</p> <hr/> </div> <p>N. 70°59' E., on line 12-13, sec. 33.</p> <p>Along edge of tree line.</p>
2.80	<p>Point for AP 13, sec. 33.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 29 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W            MTWA            AP13            S33            1996</p> <hr/> </div> <p>N. 81°23' E., on line 13-14, sec. 33.</p> <p>Along edge of tree line.</p>
4.70	<p>Point for AP 14, sec. 33.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 29 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>

Metes-and-Bounds Survey of the  
 Mount Trumbull Wilderness Area Boundary,  
 T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T35N R8W            MTWA            AP14</p>  <p style="text-align: center;">S33            1996</p> <hr style="width: 20%; margin: auto;"/>
2.08	<p>N. 40°48' E., on line 14-15, sec. 33.</p> <p>Along edge of tree line.</p> <p>Point for AP 15, sec. 33.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 30 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
	<p style="text-align: center;">T35N R8W            MTWA            AP15</p>  <p style="text-align: center;">S33            1996</p> <hr style="width: 20%; margin: auto;"/>
7.10	<p>N. 22°51' E., on line 15-16, sec. 33.</p> <p>Along W. edge of pipeline site.</p> <p>Point for AP 16, sec. 33.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 29 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
	<p style="text-align: center;">T35N R8W            MTWA            AP16</p>  <p style="text-align: center;">S33            1996</p> <hr style="width: 20%; margin: auto;"/>
3.08	<p>N. 16°45' E., on line 16-17, sec. 33.</p> <p>Along W. edge of pipeline site.</p> <p>Point for AP 17, sec. 33.</p>




Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 29 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div data-bbox="852 409 1015 567" style="text-align: center;"> <p>T35N R8W MTWA AP17 / S33 1996</p> <hr style="width: 20%; margin: auto;"/> </div> <p>S. 58°49' E., on line 17-18, sec. 33.</p> <p>Along N. edge of pipeline site.</p>
1.56	<p>Point for AP 18, sec. 33.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 26 ins. in the ground, in a mound of stone, 2 ft. base, 1 ft. high, with aluminum cap mkd.</p> <div data-bbox="836 945 1015 1134" style="text-align: center;"> <p>T35N R8W MTWA AP18 / S33 1996</p> <hr style="width: 20%; margin: auto;"/> </div> <p>S. 13°46' W., on line 18-19, sec. 33.</p> <p>Along E. edge of pipeline site.</p>
0.88	<p>Point for AP 19, sec. 33.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 27 ins. in the ground, in a mound of stone, 2 ft. base, 1 ft. high, with aluminum cap mkd.</p> <div data-bbox="836 1522 1015 1680" style="text-align: center;"> <p>T35N R8W MTWA AP19 / S33 1996</p> <hr style="width: 20%; margin: auto;"/> </div> <p>S. 40°25' W., on line 19-20, sec. 33.</p> <p>Along E. edge of pipeline site.</p>
1.70	<p>Point for AP 20, sec. 33.</p>




Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W S33 / MTWA           AP20           1996</p> <hr/> </div> <p>S. 24°30' W., on line 20-21, sec. 33. Along E. edge of pipeline site.</p>
6.12	<p>Point for AP 21, sec. 33.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 24 ins. in the ground, in a mound of stone, 2 ft. base, 1 ft. high, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W S33 &lt; MTWA           AP21           1996</p> <hr/> </div> <p>S. 17°47' E., on line 21-22, sec. 33. Along E. edge of pipeline site.</p>
2.19	<p>Point for AP 22, sec. 33.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 23 ins. in the ground, in a mound of stone, 2 ft. base, 2 ft. high, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T35N R8W S33 / MTWA           AP22           1996</p> <hr/> </div> <p>S. 31°09' E., on line 22-23, sec. 33. Along N. side of underground pipeline.</p>
4.48	<p>Point for AP 23, sec. 33.</p>

Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 29 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;">  </div> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 13°23' E., on line 23-24, sec. 33. Along N. side of underground pipeline.</p> <p>3.54 Point for AP 24, sec. 33.</p>
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 29 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;">  </div> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 13°21' E., on line 24-25, sec. 33. Along N. side of underground pipeline.</p> <p>2.06 Point for AP 25, sec. 33.</p>
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 29 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div style="text-align: center;">  </div> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 53°09' E., on line 25-26, sec. 33.</p> <p>2.02 Point for AP 26, sec. 33. Along N. side of underground pipeline.</p>




Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 27 ins. in the ground, in a mound of stone, 2 ft. base, 1 ft. high, with aluminum cap mkd.</p> <div data-bbox="820 415 1023 577" style="text-align: center;"> <p>T35N R8W MTWA AP26</p>  </div> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 72°13' E., on line 26-27, sec. 33. Along W. edge of dump site.</p> <p>1.58 Point for AP 27, sec. 33.</p>
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 26 ins. in the ground, in a mound of stone, 2 ft. base, 1 ft. high, with aluminum cap mkd.</p> <div data-bbox="836 955 998 1144" style="text-align: center;"> <p>T35N R8W MTWA AP27</p>  </div> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 52°55' E., on line 27-28, sec. 33. Along N. edge of dump site.</p> <p>1.35 Point for AP 28, sec. 33.</p>
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 26 ins. in the ground, in a mound of stone, 2 ft. base, 1 ft. high, with aluminum cap mkd.</p> <div data-bbox="836 1522 998 1690" style="text-align: center;"> <p>T35N R8W MTWA AP28</p>  </div> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 29°51' W., on line 28-29, sec. 33. Along E. edge of dump site.</p> <p>1.90 Point for AP 29, sec. 33.</p>



Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 26 ins. in the ground, in a mound of stone, 1 ft. base, 1 ft. high, with aluminum cap mkd.</p> <div data-bbox="820 415 1015 571" style="text-align: center;"> <p>T35N R8W S33 / MTWA           AP29           1996</p> <hr style="width: 20%; margin: auto;"/> </div> <p>S. 41°03' W., on line 29-30, sec. 33.</p> <p>Through medium pine timber.</p>
1.68	<p>Point for AP 30, sec. 33.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 29 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div data-bbox="836 955 1031 1113" style="text-align: center;"> <p>T35N R8W S33 / MTWA           AP30           1996</p> <hr style="width: 20%; margin: auto;"/> </div> <p>S. 46°15' E., on line 30-31, sec. 33.</p> <p>Along N. side of underground pipeline.</p>
3.03	<p>Point for AP 31, sec. 33.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 16 ins. in the ground, in a mound of stone, 3 ft. base, 2 ft. high, with aluminum cap mkd.</p> <div data-bbox="836 1501 998 1680" style="text-align: center;"> <p>T35N R8W           MTWA           AP31 S33 /           1996</p> <hr style="width: 20%; margin: auto;"/> </div> <p>S. 55°26' E., on line 31-32, sec. 33.</p> <p>Along N. side of underground pipeline.</p>
3.56	<p>Point for AP 32, sec. 33.</p>




Metes-and-Bounds Survey of the  
 Mount Trumbull Wilderness Area Boundary,  
 T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 30 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div data-bbox="828 409 998 598" style="text-align: center;"> <p>T35N R8W MTWA AP32</p>  </div> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 50°42' E., on line 32-33, sec. 33.</p> <p>Along N. side of underground pipeline.</p>
3.14	<p>Point for AP 33, sec. 33.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 29 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div data-bbox="828 976 998 1165" style="text-align: center;"> <p>T35N R8W MTWA AP33</p>  </div> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 68°23' E., on line 33-34, sec. 33.</p> <p>Along N. side of underground pipeline.</p>
3.66	<p>Point for AP 34, sec. 33.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 30 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div data-bbox="828 1543 998 1732" style="text-align: center;"> <p>T35N R8W MTWA AP34</p>  </div> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 58°27' E., on line 34-35, sec. 33.</p> <p>Along N. side of underground pipeline.</p>




Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
3.24	<p>The point for AP 35, sec. 33, identical with AP 1, sec. 34, on the line bet. secs. 33 and 34, not monumented.</p> <p>From this point, the 1/4 sec. cor. of secs. 33 and 34, bears N. 0°11' E., 8.02 chs. dist., hereinbefore described.</p>
<hr/> <p>In Section 34</p> <hr/>	
	<p>From the point for AP 1, sec. 34, identical with AP 35, sec. 33, on the line bet. secs. 33 and 34.</p> <p>S. 58°27' E., on line 1-1A, sec. 34, of the metes-and-bounds survey of the Mount Trumbull Wilderness Area Bdy., approximately 45 lks. northerly of an underground pipe line.</p>
2.16	<p>Point for AP 1A, sec. 34</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 27 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
	
	<p>S. 64°45' E., on line 1A-2, sec. 34.</p>
3.23	<p>Point for AP 2, sec. 34.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
	
	<p>S. 49°12' E., on line 2-3, sec. 34.</p>
2.72	<p>Point for AP 3, sec. 34.</p>




Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 27 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div data-bbox="836 415 982 604" style="text-align: center;"> <p>T35N R8W MTWA AP3</p>  <p>S34 1996</p> </div> <hr style="width: 20%; margin: 10px auto;"/>
	<p>S. 44°10' E., on line 3-4, sec. 34.</p>
5.96	<p>Point for AP 4, sec. 34.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 27 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div data-bbox="836 926 982 1115" style="text-align: center;"> <p>T35N R8W MTWA AP4</p>  <p>S34 1996</p> </div> <hr style="width: 20%; margin: 10px auto;"/>
	<p>S. 36°53' E., on line 4-5, sec. 34.</p>
3.81	<p>Point for AP 5, sec. 34.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 32 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div data-bbox="836 1434 982 1623" style="text-align: center;"> <p>T35N R8W MTWA AP5</p>  <p>S34 1996</p> </div> <hr style="width: 20%; margin: 10px auto;"/>
	<p>S. 81°33' E., on line 5-6, sec. 34.</p>
4.60	<p>Point for AP 6, sec. 34.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 20 ins. in the ground, to bedrock, in a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, with aluminum cap mkd.</p>

Metes-and-Bounds Survey of the  
 Mount Trumbull Wilderness Area Boundary,  
 T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<div style="text-align: center;"> <p>T35N R8W            MTWA            AP6</p>  <p>S34            1996</p> </div> <hr/>
4.31	<p>S. 78°50' E., on line 6-7, sec. 34.</p> <p>Point for AP 7, sec. 34.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
	<div style="text-align: center;"> <p>T35N R8W            MTWA            AP7</p>  <p>S34            1996</p> </div> <hr/>
2.94	<p>S. 58°17' E., on line 7-8, sec. 34.</p> <p>Point for AP 8, sec. 34.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 30 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
	<div style="text-align: center;"> <p>T35N R8W            MTWA            AP8</p>  <p>S34            1996</p> </div> <hr/>
5.18	<p>S. 39°59' E., on line 8-9, sec. 34.</p> <p>Point for AP 9, sec. 34.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 30 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>




Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<div style="text-align: center;">  </div>
5.44	<p>S. 56°24' E., on line 9-10, sec. 34.</p> <p>Point for AP 10, sec. 34.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 24 ins. in the ground, to bedrock, in a mound of stone, 2 ft. base, to top, with aluminum cap mkd.</p>
	<div style="text-align: center;">  </div>
4.55	<p>S. 86°17' E., on line 10-11, sec. 34.</p> <p>Point for AP 11, sec. 34.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 27 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
	<div style="text-align: center;">  </div>
4.46	<p>N. 71°55' E., on line 11-12, sec. 34.</p> <p>Point for AP 12, sec. 34.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 33 ins. in the ground, with aluminum cap mkd.</p>



Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T35N R8W MTWA AP12</p> <hr style="width: 10%; margin: auto;"/> <p style="text-align: center;">S34 1996</p> <p>Raise a mound of stone, 2 1/2 ft. base, 1 ft. high, N. of cor.</p> <hr style="width: 20%; margin: auto;"/> <p>S. 87°50' E., on line 12-13, sec. 34.</p>
4.46	<p>Point for AP 13, sec. 34.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 27 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <p style="text-align: center;">T35N R8W MTWA AP13</p> <hr style="width: 10%; margin: auto;"/> <p style="text-align: center;">S34 1996</p> <hr style="width: 20%; margin: auto;"/> <p>N. 75°33' E., on line 13-14, sec. 34.</p>
4.55	<p>Point for AP 14, sec. 34.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 27 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <p style="text-align: center;">T35N R8W MTWA AP14</p> <hr style="width: 10%; margin: auto;"/> <p style="text-align: center;">S34 1996</p> <hr style="width: 20%; margin: auto;"/> <p>S. 68°22' E., on line 14-15, sec. 34.</p>
5.00	<p>Point for AP 15, sec. 34.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 27 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>


Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T35N R8W MTWA AP15</p>  <hr style="width: 20%; margin: auto;"/>
5.11	<p>S. 57°33' E., on line 15-16, sec. 34.</p> <p>Point for AP 16, sec. 34.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
	<p style="text-align: center;">T35N R8W MTWA AP16</p>  <hr style="width: 20%; margin: auto;"/>
5.40	<p>S. 69°29' E., on line 16-17, sec. 34, approximately 150 lks. northerly of an improved graded road.</p> <p>Point for AP 17, sec. 34.</p> <p>Set an aluminum drive rod, 72 ins. long, 3/4 in. diam., 68 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
	<p style="text-align: center;">T35N R8W MTWA AP17</p>  <hr style="width: 20%; margin: auto;"/>
4.57	<p>S. 52°11' E., on line 17-18, sec. 34.</p> <p>Point for AP 18, sec. 34.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 34 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>

Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T35N R8W MTWA AP18</p>  <p style="text-align: center;">S34 1996</p> <hr/>
5.36	<p>S. 59°12' E., on line 18-19, sec. 34.</p> <p>Point for AP 19, sec. 34.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 20 ins. in the ground, to bedrock, in a mound of stone, 3 1/2 ft. base, to top, with aluminum cap mkd.</p>
	<p style="text-align: center;">T35N R8W MTWA AP19</p>  <p style="text-align: center;">S34 1996</p> <hr/>
0.80	<p>S. 75°46' E., on line 19-20, sec. 34.</p> <p>AP 20, sec. 34, identical with AP 1, sec. 3, T. 34 N., R. 8 W., on the line bet. secs. 3 and 34, on the S. bdy. of the Tp. hereinbefore described.</p> <p>From this point, the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp. bears N. 89°52' E., 6.73 chs. dist., hereinbefore described.</p> <hr/>
	<p style="text-align: center;">In Section 35</p> <hr/> <p>From the point for AP 1, sec, 35, identical with AP 3 sec. 3, T. 34 N., R. 8 W. and the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp., hereinbefore described.</p> <p>N. 62°03' E., on line 1-2, sec. 35.</p> <p>Along N. side of wash.</p> <p>4.55 Point for AP 2, sec. 35.</p> <p>Set an aluminum drive rod, 72 ins. long, 3/4 in. diam., 63 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>

Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T35N R8W MTWA AP2</p>  <hr style="width: 20%; margin: 10px auto;"/> <p>S. 70°16' E., on line 2-3, sec. 35. Along N. side of wash.</p>
3.35	<p>Point for AP 3, sec. 35.</p> <p>Set an aluminum drive rod, 72 ins. long, 3/4 in. diam., 60 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
	<p style="text-align: center;">T35N R8W MTWA AP3</p>  <hr style="width: 20%; margin: 10px auto;"/> <p>S. 53°12' E., on line 3-4, sec. 35. Along N. side of wash.</p>
1.66	<p>AP 4, sec. 35, identical with AP 1, sec. 2, T. 34 N., R. 8 W., on the line bet. secs. 2 and 35, on the S. bdy. of the Tp., hereinbefore described.</p> <p>From this cor. point, the cor. of secs. 2, 3, 34 and 35, bears S. 89°56' W., 8.50 chs. dist., hereinbefore described.</p>
	<hr style="width: 80%; margin: 0 auto;"/> <p style="text-align: center;">In Section 36</p> <hr style="width: 80%; margin: 10px auto;"/> <p>From AP 1, sec. 36, identical with AP 40, sec. 1, T. 34 N., R. 8 W., on the line bet. secs. 1 and 36, on the S. bdy. of the Tp., hereinbefore described.</p> <p>N. 11°29' E., on line 1-2, sec. 36. Along W. edge of chained area.</p>
1.06	<p>Point for AP 2, sec. 36.</p>



Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 24 ins. in the ground, in a mound of stone, 2 ft. base, to top, with aluminum cap mkd.</p> <div data-bbox="831 409 1031 567" style="text-align: center;"> </div> <p>N. 25°22' W., on line 2-3, sec. 36.</p> <p>Along W. edge of chained area.</p> <p>6.53 Point for AP 3, sec. 36.</p>
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 28 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div data-bbox="831 955 1031 1113" style="text-align: center;"> </div> <p>N. 0°12' E., on line 3-4, sec. 36.</p> <p>Along W. edge of chained area.</p> <p>5.46 Point for AP 4, sec. 36.</p>
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 25 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div data-bbox="831 1491 1031 1648" style="text-align: center;"> </div> <p>N. 55°30' W., on line 4-5, sec. 36.</p> <p>Through a strip of pine and juniper timber.</p> <p>9.91 Point for AP 5, sec. 36.</p>

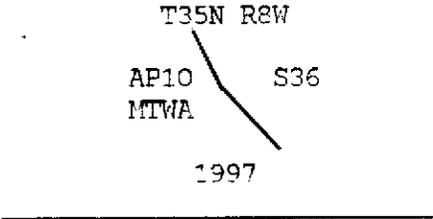
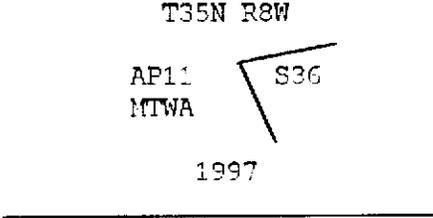
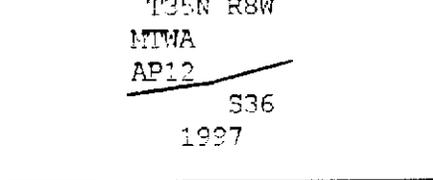
Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 26 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
	<div style="text-align: center;"> <p>T35N R8W</p> <p>AP5     S36</p> <p>MTWA     1997</p> </div> <hr style="width: 20%; margin: 10px auto;"/>
	<p>N. 41°48' E., on line 5-6, sec. 36.</p>
	<p>Along W. edge of chained area.</p>
1.25	<p>Enter pine and juniper timber, edge bears NNE and SSW.</p>
2.23	<p>Point for AP 6, sec. 36.</p>
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 23 ins. in the ground, in a mound of stone, 2 ft. base, to top, with aluminum cap mkd.</p>
	<div style="text-align: center;"> <p>T35N R8W</p> <p>AP6     S36</p> <p>MTWA     1997</p> </div> <hr style="width: 20%; margin: 10px auto;"/>
	<p>N. 33°29' W., on line 6-7, sec. 36.</p>
0.50	<p>Leave pine and juniper timber, thence along W. edge of chained area.</p>
4.05	<p>Point for AP 7, sec. 36.</p>
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 24 ins. in the ground, in a mound of stone, 2 ft. base, to top, with aluminum cap mkd.</p>
	<div style="text-align: center;"> <p>T35N R8W</p> <p>AP7     S36</p> <p>MTWA     1997</p> </div> <hr style="width: 20%; margin: 10px auto;"/>
	<p>N. 67°58' E., on line 7-8, sec. 36.</p>
	<p>Along W. edge of chained area.</p>

Metes-and-Bounds Survey of the  
 Mount Trumbull Wilderness Area Boundary,  
 T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
4.92	<p>Point for AP 8, sec. 36.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 25 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div data-bbox="836 478 1031 640" style="text-align: center;"> <p>T35N R8W            MTWA            AP8      S36</p>  <p>1997</p> </div> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 60°14' E., on line 8-9, sec. 36.</p> <p>Along W. edge of chained area.</p>
3.14	<p>Point for AP 9, sec. 36.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 11 ins. in the ground, to bedrock, in a mound of stone, 4 ft. base, to top, with aluminum cap mkd.</p> <div data-bbox="836 1020 1031 1207" style="text-align: center;"> <p>T35N R8W</p>  <p>1997</p> </div> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 47°16' W., on line 9-10, sec. 36.</p> <p>Through a strip of pine and juniper timber.</p>
4.97	<p>Point for AP 10, sec. 36.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 21 ins. in the ground, in a mound of stone, 3 ft. base, to top, with aluminum cap mkd.</p>

Metes-and-Bounds Survey of the  
 Mount Trumbull Wilderness Area Boundary,  
 T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	 <p>N. 31°40' W., on line 10-11, sec. 36.        Along W. edge of chained area.</p>
2.47	<p>Point for AP 11, sec. 36.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 27 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
	 <p>N. 70°25' E., on line 11-12, sec. 36.        Through medium pine and juniper timber.</p>
3.88	<p>Point for AP 12, sec. 36.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 11 ins. in the ground, to bedrock, in a mound of stone, 3 1/2 ft. base, to top, with aluminum cap mkd.</p>
	 <p>N. 65°11' E., on line 12-13, sec. 36.        Through medium pine and juniper timber.</p>
4.37	<p>Point for AP 13, sec. 36.</p>

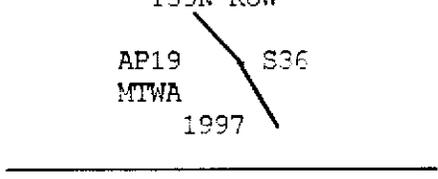
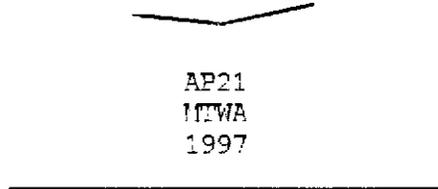
Metes-and-Bounds Survey of the  
 Mount Trumbull Wilderness Area Boundary,  
 T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 24 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
	<p style="text-align: center;">T35N R8W            MTWA            AP13  <hr style="width: 10%; margin: auto;"/>S36            1997</p>
	<p>N. 56°44' E., on line 13-14, sec. 36.</p>
	<p>Along W. edge of chained area.</p>
3.85	<p>Point for AP 14, sec. 36.</p>
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 26 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p>
	<p style="text-align: center;">T35N R8W            MTWA            AP14  <hr style="width: 10%; margin: auto;"/>S36            1997</p>
	<p>N. 67°27' E., on line 14-15, sec. 36.</p>
	<p>Along W. edge of chained area.</p>
4.23	<p>Point for AP 15, sec. 36.</p>
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 18 ins. in the ground, to bedrock, in a mound of stone, 2 1/2 ft. base, to top, with aluminum cap mkd.</p>
	<p style="text-align: center;">T35N R8W            MTWA            AP15  <hr style="width: 10%; margin: auto;"/>S36            1997</p>
	<p>N. 56°59' E., on line 15-16, sec. 36.</p>
	<p>Along W. edge of chained area.</p>
2.69	<p>Point for AP 16, sec. 36.</p>



Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 15 ins. in the ground, to bedrock, in a mound of stone, 3 1/2 ft. base, to top, with aluminum cap mkd.</p> <div data-bbox="836 409 990 567" style="text-align: center;"> <p>T35N R8W MTWA AP16 S36 1997</p>  </div> <p>N. 13°37' W., on line 16-17, sec. 36.</p> <p>Through a strip of pine and juniper timber.</p>
5.65	<p>Point for AP 17, sec. 36.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 7 ins. in the ground, to bedrock, in a supporting mound of stone, 3 ft. base, to top, with aluminum cap mkd.</p> <div data-bbox="820 955 1023 1113" style="text-align: center;"> <p>T35N R8W AP17 MTWA S36 1997</p>  </div> <p>N. 69°35' W., on line 17-18, sec. 36.</p> <p>Along W. edge of chained area.</p>
1.96	<p>Point for AP 18, sec. 36.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 27 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div data-bbox="820 1491 1023 1648" style="text-align: center;"> <p>T35N R8W AP18 MTWA S36 1997</p>  </div> <p>N. 39°07' W., on line 18-19, sec. 36.</p> <p>Along W. edge of chained area.</p>
3.43	<p>Point for AP 19, sec. 36.</p>

Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 9 ins. in the ground, to bedrock, in a supporting mound of stone, 4 ft. base, to top, with aluminum cap mkd.</p> <div data-bbox="820 409 1015 577" style="text-align: center;"> <p>T35N R8W AP19 S36 MTWA 1997</p>  </div> <p>N. 48°45' W., on line 19-20, sec. 36.</p> <p>Through a strip of pine and juniper timber.</p>
3.15	<p>Point for AP 20, sec. 36.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 26 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div data-bbox="836 945 982 1176" style="text-align: center;"> <p>T35N R8W S36 AP20 MTWA 1997</p>  </div> <p>S. 60°17' W., on line 20-21, sec. 36.</p> <p>Through a strip of pine and juniper timber.</p>
1.32	<p>Point for AP 21, sec. 36.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 30 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div data-bbox="836 1554 1015 1785" style="text-align: center;"> <p>T35N R8W S36 AP21 MTWA 1997</p>  </div> <p>N. 73°11' W., on line 21-22, sec. 36.</p>


Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
1.90	<p>Along W. edge of chained area.</p> <p>Point for AP 22, sec. 36.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 19 ins. in the ground, to bedrock, in a mound of stone, 3 ft. base, to top, with aluminum cap mkd.</p> <div data-bbox="824 535 1003 688" style="text-align: center;"> <p>T35N R8W</p> <p>AP22  S36</p> <p>MTWA</p> <p>1997</p> </div> <hr style="width: 20%; margin: 10px auto;"/>
5.24	<p>N. 51°02' E., on line 22-23, sec. 36.</p> <p>Along W. edge of chained area.</p> <p>Point for AP 23, sec. 36.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 27 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.</p> <div data-bbox="824 1081 1036 1270" style="text-align: center;"> <p>T35N R8W</p> <p>AP23  S36</p> <p>MTWA</p> <p>1997</p> </div> <hr style="width: 20%; margin: 10px auto;"/>
4.40	<p>N. 74°11' E., on line 23-24, sec. 36.</p> <p>Along W. edge of chained area.</p> <p>Point for AP 24, sec. 36.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 19 ins. in the ground, to bedrock, in a mound of stone, 3 1/2 ft. base, to top, with aluminum cap mkd.</p> <div data-bbox="824 1648 1039 1806" style="text-align: center;"> <p>T35N R8W</p> <p>MTWA</p> <p>AP24  S36</p> <p>1997</p> </div> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 71°14' E., on line 24-25, sec. 36.</p>

Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

CHAINS	
	Along W. edge of chained area.
3.82	Point for AP 25, sec. 36.
	Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 27 ins. in the ground, encircled with a collar of stone, with aluminum cap mkd.
	<p style="text-align: center;">T35N R8W MTWA AP25      S36</p>  <p style="text-align: center;">1997</p> <hr style="width: 20%; margin: auto;"/>
	N. 73°53' E., on line 25-26, sec. 36.
	Along W. edge of chained area.
3.40	Point for AP 26, sec. 36.
	Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 11 ins. in the ground, to bedrock, in a supporting mound of stone, 3 ft. base, to top, with aluminum cap mkd.
	<p style="text-align: center;">T35N R3W MTWA AP26      S36</p>  <p style="text-align: center;">1997</p> <hr style="width: 20%; margin: auto;"/>
	N. 10°36' W., on line 26-27, sec. 36.
	Along W. edge of chained area.
4.41	Point for AP 27, sec. 36.
	Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 10 ins. in the ground, to bedrock, in a supporting mound of stone, 3 ft. base, to top, with aluminum cap mkd.
	<p style="text-align: center;">T35N R8W MTWA AP27      S36</p>  <p style="text-align: center;">1997</p> <hr style="width: 20%; margin: auto;"/>
	N. 34°44' E., on line 27-28, sec. 36.

Metes-and-Bounds Survey of the  
Mount Trumbull Wilderness Area Boundary,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

<p>CHAINS</p> <p>0.99</p> <p>1.97</p>	<p>Along W. edge of chained area.</p> <p>Point for AP 28, sec. 36.</p> <p>Set an aluminum drive rod, 36 ins. long, 3/4 in. diam., 12 ins. in the ground, to bedrock, in a supporting mound of stone, 3 ft. base, to top, with aluminum cap mkd.</p> <div style="text-align: center;">  </div> <p>N. 84°38' E., on line 28-29, sec. 36.</p> <p>Along W. edge of chained area.</p> <p>AP 29, sec. 36 identical with AP 1, sec. 31, T 35 N., R. 7 W., on the line bet. secs. 31 and 36, on the E. bdy. of the Tp., hereinbefore described.</p> <p>From this point, the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the Tp. bears N. 0°13' E., 16.94 chs. dist., hereinbefore described.</p>
<p>GENERAL DESCRIPTION</p>	
<p>The area embraced by this survey lies on the southern end of the Uinkaret Plateau and is within the Uinkaret Mountains. Located approximately six miles north of the boundary to the Grand Canyon National Park, in Mohave County. Elevations range from 5200 to 8000 ft. above sea level.</p> <p>Mount Trumbull is a basalt capped mesa, with pinyon pine, ponderosa pine and junipers dominating the slopes. The lower elevations are predominantly occupied by sage.</p> <p>Access is provided by Arizona State Road 389 to Mohave County Road 5 (Mt. Trumbull Rd).</p> <p>Ranching, hunting and hiking are the principal uses of the land.</p>	

## T. 35 N., R. 8 W., Gila and Salt river Meridian, Arizona

CHAINS

Description of the Mount Trumbull Wilderness Area Bdy.,  
T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona

The following is for informational purposes only.

Beginning at Angle Point 1, sec. 24, identical with Angle Point 5, sec. 19, T. 35 N., R. 7 W., on the line bet. secs. 19 and 24, on the E. bdy. of the Tp.

thence N. 86°32' W., 1.76 chs. dist. to Angle Point 2, sec. 24;  
 thence S. 72°57' W., 1.59 chs. dist. to Angle Point 3, sec. 24;  
 thence S. 89°26' W., 2.07 chs. dist. to Angle Point 4, sec. 24;  
 thence N. 66°37' W., 1.93 chs. dist. to Angle Point 5, sec. 24;  
 thence S. 72°28' W., 2.93 chs. dist. to Angle Point 6, sec. 24;  
 thence N. 75°11' W., 1.29 chs. dist. to Angle Point 7, sec. 24;  
 thence N. 18°06' E., 5.33 chs. dist. to Angle Point 8, sec. 24;  
 thence N. 49°58' E., 2.30 chs. dist. to Angle Point 9, sec. 24;  
 thence N. 52°24' E., 3.63 chs. dist. to Angle Point 10, sec. 24;  
 thence N. 13°04' E., 3.15 chs. dist. to Angle Point 11, sec. 24;  
 thence N. 26°19' W., 2.51 chs. dist. to Angle Point 12, sec. 24;  
 thence N. 9°40' W., 3.66 chs. dist. to Angle Point 13, sec. 24;  
 thence N. 38°08' W., 1.82 chs. dist. to Angle Point 14, sec. 24;  
 thence N. 66°44' W., 4.68 chs. dist. to Angle Point 15, sec. 24;  
 thence N. 54°43' W., 2.95 chs. dist. to Angle Point 16, sec. 24;  
 thence N. 60°44' W., 2.16 chs. dist. to Angle Point 17, sec. 24;  
 thence N. 31°56' W., 2.71 chs. dist. to Angle Point 18, sec. 24;  
 thence N. 22°05' W., 5.02 chs. dist. to Angle Point 19, sec. 24;  
 thence N. 52°21' W., 4.50 chs. dist. to Angle Point 20, sec. 24;  
 thence N. 40°50' E., 2.89 chs. dist. to Angle Point 21, sec. 24;  
 thence N. 43°31' E., 2.33 chs. dist. to Angle Point 22, sec. 24;  
 thence N. 14°07' E., 1.92 chs. dist. to Angle Point 23, sec. 24;  
 thence N. 12°00' W., 0.97 chs. dist. to Angle Point 24, sec. 24;  
 thence N. 72°08' W., 1.20 chs. dist. to Angle Point 25, sec. 24;  
 thence N. 15°23' W., 2.94 chs. dist. to Angle Point 26, sec. 24;  
 thence N. 5°39' E., 4.47 chs. dist. to Angle Point 27, sec. 24;  
 thence N. 0°16' W., 2.15 chs. dist. to Angle Point 28, sec. 24;  
 thence N. 0°46' W., 3.38 chs. dist. to Angle Point 29, sec. 24;  
 thence N. 8°40' W., 2.22 chs. dist. to Angle Point 30, sec. 24;  
 thence N. 62°26' W., 4.07 chs. dist. to Angle Point 31, sec. 24;  
 thence N. 59°34' W., 2.96 chs. dist. to Angle Point 32, sec. 24;  
 thence N. 58°25' W., 3.65 chs. dist. to Angle Point 33, sec. 24;  
 thence N. 34°06' W., 2.33 chs. dist. to Angle Point 34, sec. 24;  
 thence N. 35°11' W., 3.63 chs. dist. to Angle Point 35, sec. 24;  
 thence N. 73°16' W., 1.48 chs. dist. to Angle Point 36, sec. 24;  
 thence N. 57°28' W., 1.87 chs. dist. to Angle Point 37, sec. 24;  
 thence N. 80°05' W., 2.79 chs. dist. to Angle Point 38, sec. 24;  
 thence S. 75°17' W., 2.60 chs. dist. to Angle Point 39, sec. 24;  
 thence N. 51°43' W., 2.31 chs. dist. to Angle Point 40, sec. 24;

## T. 35 N., R. 8 W., Gila and Salt river Meridian, Arizona

CHAINS	
	thence N. 61°38' W., 2.32 chs. dist. to Angle Point 41, sec. 24;
	thence N. 69°38' W., 1.92 chs. dist. to Angle Point 42, sec. 24;
	thence S. 89°52' W., 4.30 chs. dist. to Angle Point 43, sec. 24;
	thence N. 67°22' W., 1.43 chs. dist. to Angle Point 44, sec. 24;
	thence S. 84°22' W., 2.90 chs. dist. to Angle Point 45, sec. 24;
	thence N. 46°38' W., 3.03 chs. dist. to Angle Point 46, sec. 24;
	thence N. 66°20' W., 1.28 chs. dist. to Angle Point 47, sec. 24;
	thence S. 23°59' W., 1.47 chs. dist. to Angle Point 48, sec. 24;
	thence S. 53°30' W., 2.34 chs. dist. to Angle Point 49, sec. 24;
	thence N. 61°57' W., 2.14 chs. dist. to Angle Point 50, sec. 24;
	thence N. 87°15' W., 1.24 chs. dist. to Angle Point 51, sec. 24;
	thence N. 62°53' W., 4.21 chs. dist. to Angle Point 52, sec. 24;
	thence N. 69°20' W., 1.33 chs. dist. to Angle Point 53, sec. 24;
	thence S. 68°39' W., 1.51 chs. dist. to Angle Point 54, sec. 24;
	thence N. 67°25' W., 5.68 chs. dist. to Angle Point 55, sec. 24;
	thence S. 89°17' W., 1.81 chs. dist. to Angle Point 56, sec. 24;
	thence S. 53°53' W., 2.70 chs. dist. to Angle Point 57, sec. 24;
	identical with Angle Point 1, sec. 23, on the line bet. secs. 23 and 24;
	thence S. 53°53' W., 3.77 chs. dist. to Angle Point 2, sec. 23;
	thence N. 86°38' W., 0.68 ch. dist. to Angle Point 3, sec. 23;
	thence N. 49°00' W., 5.68 chs. dist. to Angle Point 4, sec. 23;
	thence N. 76°02' W., 3.12 chs. dist. to Angle Point 5, sec. 23;
	thence N. 84°05' W., 2.92 chs. dist. to Angle Point 6, sec. 23;
	thence S. 68°04' W., 4.35 chs. dist. to Angle Point 7, sec. 23;
	thence S. 54°32' W., 3.14 chs. dist. to Angle Point 8, sec. 23;
	thence S. 77°13' W., 2.55 chs. dist. to Angle Point 9, sec. 23;
	thence N. 45°28' W., 5.80 chs. dist. to Angle Point 10, sec. 23;
	thence N. 52°22' W., 0.06 ch. dist. to Angle Point 11, sec. 23;
	identical with Angle Point 1, sec. 14, on the line bet. secs. 14 and 23;
	thence N. 52°22' W., 3.83 chs. dist. to Angle Point 2, sec. 14;
	thence N. 73°29' W., 3.82 chs. dist. to Angle Point 3, sec. 14;
	thence N. 58°16' W., 4.16 chs. dist. to Angle Point 4, sec. 14;
	thence S. 22°39' W., 6.15 chs. dist. to Angle Point 5, sec. 14;
	identical the 1/4 sec. cor. of secs. 14 and 23;
	thence S. 89°45' W., 39.84 chs. dist., bet. secs. 14 and 23, to the cor. of secs. 14, 15, 22 and 23, identical with Angle Point 6, sec. 14, and Angle Point 1, sec. 15;
	thence N. 89°40' W., 19.945 chs. dist. bet. secs. 15 and 22, to the E. 1/16 sec. cor. of secs. 15 and 22, identical with Angle Point 2, sec. 15;
	thence N. 0°01' W., 7.86 chs. dist., on the north and south center line of the SE 1/4 of sec. 15, to Angle Point 3, sec. 15.
	thence S. 61°09' W., 1.45 chs. dist. to Angle Point 4, sec. 15;
	thence N. 63°22' W., 3.63 chs. dist. to Angle Point 5, sec. 15;
	thence N. 70°58' W., 4.68 chs. dist. to Angle Point 6, sec. 15;
	thence N. 43°29' W., 4.94 chs. dist. to Angle Point 7, sec. 15;
	thence N. 40°58' W., 3.88 chs. dist. to Angle Point 8, sec. 15;
	thence N. 85°54' W., 3.61 chs. dist. to Angle Point 9, sec. 15;

## T. 35 N., R. 8 W., Gila and Salt river Meridian, Arizona

CHAINS	
	thence N. 88°47' W., 5.12 chs. dist. to Angle Point 10, sec. 15;
	thence N. 89°02' W., 3.81 chs. dist. to Angle Point 11, sec. 15;
	thence S. 88°59' W., 4.23 chs. dist. to Angle Point 12, sec. 15;
	thence S. 73°13' W., 6.59 chs. dist. to Angle Point 13, sec. 15;
	thence N. 56°06' W., 5.73 chs. dist. to Angle Point 14, sec. 15;
	thence N. 57°30' W., 4.40 chs. dist. to Angle Point 15, sec. 15;
	thence S. 84°06' W., 5.52 chs. dist. to Angle Point 16, sec. 15;
	thence N. 68°00' W., 7.60 chs. dist. to Angle Point 17, sec. 15;
	thence N. 39°45' W., 1.34 chs. dist. to Angle Point 18, sec. 15;
	identical with Angle Point 1, sec. 16, on the line bet. secs. 15 and 16;
	thence N. 39°45' W., 6.39 chs. dist. to Angle Point 1A, sec. 16;
	thence N. 63°16' W., 9.73 chs. dist. to Angle Point 2, sec. 16;
	thence N. 76°05' W., 6.48 chs. dist. to Angle Point 3, sec. 16;
	thence N. 65°14' W., 10.59 chs. dist. to Angle Point 4, sec. 16;
	thence N. 43°34' W., 8.61 chs. dist. to Angle Point 5, sec. 16;
	thence N. 78°06' W., 4.50 chs. dist. to Angle Point 6, sec. 16;
	thence S. 77°27' W., 2.10 chs. dist. to Angle Point 7, sec. 16;
	thence S. 57°58' W., 3.60 chs. dist. to Angle Point 8, sec. 16;
	thence S. 55°12' W., 4.17 chs. dist. to Angle Point 9, sec. 16;
	thence S. 31°18' W., 5.02 chs. dist. to Angle Point 10, sec. 16;
	thence S. 23°49' W., 5.88 chs. dist. to Angle Point 11, sec. 16;
	thence S. 34°11' W., 5.50 chs. dist. to Angle Point 12, sec. 16;
	thence S. 69°30' W., 9.80 chs. dist. to Angle Point 13, sec. 16;
	thence S. 27°38' W., 8.50 chs. dist. to Angle Point 14, sec. 16;
	thence S. 2°30' W., 4.16 chs. dist. to Angle Point 15, sec. 16;
	thence S. 17°06' W., 5.46 chs. dist. to Angle Point 16, sec. 16;
	thence S. 33°44' W., 4.47 chs. dist. to Angle Point 17, sec. 16;
	thence S. 9°49' W., 3.64 chs. dist. to Angle Point 18, sec. 16;
	identical with Angle Point 1, sec. 21, on the line bet. secs. 16 and 21;
	thence S. 9°49' W., 0.45 ch. dist. to Angle Point 2, sec. 21;
	thence S. 3°38' E., 4.31 chs. dist. to Angle Point 3, sec. 21;
	thence S. 54°40' W., 3.94 chs. dist. to Angle Point 4, sec. 21;
	thence S. 75°01' W., 3.32 chs. dist. to Angle Point 5, sec. 21;
	identical with Angle Point 1, sec. 20, on the line bet. secs. 20 and 21;
	thence S. 75°01' W., 1.41 chs. dist. to Angle Point 1A, sec. 20;
	thence S. 58°54' W., 9.56 chs. dist. to Angle Point 2, sec. 20;
	thence S. 50°46' W., 7.93 chs. dist. to Angle Point 3, sec. 20;
	thence S. 10°40' W., 10.97 chs. dist. to Angle Point 4, sec. 20;
	thence S. 27°07' W., 6.90 chs. dist. to Angle Point 5, sec. 20;
	thence S. 40°04' W., 6.47 chs. dist. to Angle Point 6, sec. 20;
	thence S. 4°25' W., 6.69 chs. dist. to Angle Point 7, sec. 20;
	thence S. 6°33' E., 7.73 chs. dist. to Angle Point 8, sec. 20;
	thence S. 15°57' W., 3.89 chs. dist. to Angle Point 9, sec. 20;
	thence S. 16°58' W., 10.44 chs. dist. to Angle Point 10, sec. 20;
	thence S. 25°52' W., 5.99 chs. dist. to Angle Point 11, sec. 20;
	thence S. 6°56' E., 6.52 chs. dist. to Angle Point 12, sec. 20;
	identical with Angle Point 1, sec. 29, on the line bet. secs. 20 and 29;

## T. 35 N., R. 8 W., Gila and Salt river Meridian, Arizona

## CHAINS

thence S. 6°56' E., 0.82 ch. dist. to Angle Point 1A, sec. 29;  
 thence S. 5°12' W., 4.65 chs. dist. to Angle Point 2, sec. 29;  
 thence S. 7°50' W., 4.57 chs. dist. to Angle Point 3, sec. 29;  
 thence S. 35°29' E., 11.12 chs. dist. to Angle Point 4, sec. 29;  
 thence S. 6°38' E., 7.43 chs. dist. to Angle Point 5, sec. 29;  
 thence S. 4°20' E., 4.14 chs. dist. to Angle Point 6, sec. 29;  
 thence N. 89°27' E., 2.29 chs. dist. to Angle Point 7, sec. 29;  
 thence S. 34°38' E., 2.12 chs. dist. to Angle Point 8, sec. 29;  
 thence S. 28°58' W., 5.64 chs. dist. to Angle Point 9, sec. 29;  
 thence S. 26°17' E., 4.40 chs. dist. to Angle Point 10, sec. 29;  
 thence S. 28°17' E., 4.46 chs. dist. to Angle Point 11, sec. 29;  
 thence S. 30°35' E., 5.56 chs. dist. to Angle Point 12, sec. 29;  
 thence S. 18°57' E., 5.63 chs. dist. to Angle Point 13, sec. 29;  
 thence S. 31°25' E., 3.45 chs. dist. to Angle Point 14, sec. 29;  
 thence S. 18°40' E., 2.45 chs. dist. to Angle Point 15, sec. 29;  
 thence S. 24°22' E., 4.94 chs. dist. to Angle Point 16, sec. 29;  
 thence S. 37°45' E., 5.21 chs. dist. to Angle Point 17, sec. 29;  
 thence S. 39°25' E., 5.37 chs. dist. to Angle Point 18, sec. 29;  
 thence S. 60°32' E., 3.57 chs. dist. to Angle Point 19, sec. 29;  
 identical with Angle Point 1, sec. 28, on the line bet.  
 secs. 28 and 29;  
 thence S. 60°32' E., 3.91 chs. dist. to Angle Point 2, sec. 28;  
 thence S. 44°57' E., 4.26 chs. dist. to Angle Point 3, sec. 28;  
 identical with Angle Point 1, sec. 33, on the line bet.  
 secs. 28 and 33;  
 thence S. 44°57' E., 3.95 chs. dist. to Angle Point 1A, sec. 33;  
 thence S. 50°37' E., 6.04 chs. dist. to Angle Point 2, sec. 33;  
 thence S. 56°12' E., 9.15 chs. dist. to Angle Point 3, sec. 33;  
 thence S. 56°51' E., 5.46 chs. dist. to Angle Point 4, sec. 33;  
 thence S. 63°17' E., 7.66 chs. dist. to Angle Point 5, sec. 33;  
 thence S. 55°44' E., 5.09 chs. dist. to Angle Point 6, sec. 33;  
 thence S. 58°14' E., 5.84 chs. dist. to Angle Point 7, sec. 33;  
 thence S. 59°07' E., 4.85 chs. dist. to Angle Point 8, sec. 33;  
 thence N. 22°42' E., 2.78 chs. dist. to Angle Point 9, sec. 33;  
 thence N. 40°35' E., 3.03 chs. dist. to Angle Point 10, sec. 33;  
 thence S. 45°48' E., 1.93 chs. dist. to Angle Point 11, sec. 33;  
 thence S. 6°45' W., 4.19 chs. dist. to Angle Point 12, sec. 33;  
 thence N. 70°59' E., 2.80 chs. dist. to Angle Point 13, sec. 33;  
 thence N. 81°23' E., 4.70 chs. dist. to Angle Point 14, sec. 33;  
 thence N. 40°48' E., 2.08 chs. dist. to Angle Point 15, sec. 33;  
 thence N. 22°51' E., 7.10 chs. dist. to Angle Point 16, sec. 33;  
 thence N. 16°45' E., 3.08 chs. dist. to Angle Point 17, sec. 33;  
 thence S. 58°49' E., 1.56 chs. dist. to Angle Point 18, sec. 33;  
 thence S. 13°46' W., 0.88 ch. dist. to Angle Point 19, sec. 33;  
 thence S. 40°25' W., 1.70 chs. dist. to Angle Point 20, sec. 33;  
 thence S. 24°30' W., 6.12 chs. dist. to Angle Point 21, sec. 33;  
 thence S. 17°47' E., 2.19 chs. dist. to Angle Point 22, sec. 33;  
 thence S. 31°09' E., 4.48 chs. dist. to Angle Point 23, sec. 33;  
 thence S. 13°23' E., 3.54 chs. dist. to Angle Point 24, sec. 33;  
 thence S. 13°21' E., 2.06 chs. dist. to Angle Point 25, sec. 33;

## T. 35 N., R. 8 W., Gila and Salt river Meridian, Arizona

## CHAINS

thence S. 53°09' E., 2.02 chs. dist. to Angle Point 26, sec. 33;  
 thence N. 72°13' E., 1.58 chs. dist. to Angle Point 27, sec. 33;  
 thence S. 52°55' E., 1.35 chs. dist. to Angle Point 28, sec. 33;  
 thence S. 29°51' W., 1.90 chs. dist. to Angle Point 29, sec. 33;  
 thence S. 41°03' W., 1.68 chs. dist. to Angle Point 30, sec. 33;  
 thence S. 46°15' E., 3.03 chs. dist. to Angle Point 31, sec. 33;  
 thence S. 55°26' E., 3.56 chs. dist. to Angle Point 32, sec. 33;  
 thence S. 50°42' E., 3.14 chs. dist. to Angle Point 33, sec. 33;  
 thence S. 68°23' E., 3.66 chs. dist. to Angle Point 34, sec. 33;  
 thence S. 58°27' E., 3.24 chs. dist. to Angle Point 35, sec. 33;

identical with Angle Point 1, sec. 34, on the line bet.  
 secs. 33 and 34;

thence S. 58°27' E., 2.16 chs. dist. to Angle Point 1A, sec. 34;  
 thence S. 64°45' E., 3.23 chs. dist. to Angle Point 2, sec. 34;  
 thence S. 49°12' E., 2.72 chs. dist. to Angle Point 3, sec. 34;  
 thence S. 44°10' E., 5.96 chs. dist. to Angle Point 4, sec. 34;  
 thence S. 36°53' E., 3.81 chs. dist. to Angle Point 5, sec. 34;  
 thence S. 81°33' E., 4.60 chs. dist. to Angle Point 6, sec. 34;  
 thence S. 78°50' E., 4.31 chs. dist. to Angle Point 7, sec. 34;  
 thence S. 58°17' E., 2.94 chs. dist. to Angle Point 8, sec. 34;  
 thence S. 39°59' E., 5.18 chs. dist. to Angle Point 9, sec. 34;  
 thence S. 56°24' E., 5.44 chs. dist. to Angle Point 10, sec. 34;  
 thence S. 86°17' E., 4.55 chs. dist. to Angle Point 11, sec. 34;  
 thence N. 71°55' E., 4.46 chs. dist. to Angle Point 12, sec. 34;  
 thence S. 87°50' E., 4.46 chs. dist. to Angle Point 13, sec. 34;  
 thence N. 75°33' E., 4.55 chs. dist. to Angle Point 14, sec. 34;  
 thence S. 68°22' E., 5.00 chs. dist. to Angle Point 15, sec. 34;  
 thence S. 57°33' E., 5.11 chs. dist. to Angle Point 16, sec. 34;  
 thence S. 69°29' E., 5.40 chs. dist. to Angle Point 17, sec. 34;  
 thence S. 52°11' E., 4.57 chs. dist. to Angle Point 18, sec. 34;  
 thence S. 59°12' E., 5.36 chs. dist. to Angle Point 19, sec. 34;  
 thence S. 75°46' E., 0.80 ch. dist. to Angle Point 20, sec. 34;

identical with Angle Point 1, sec. 3, T. 34 N., R. 8 W., on  
 the line bet. secs. 3 and 34, on the S. bdy. of the Tp.

From the cor. of secs. 2, 3, 34 and 35, Tps. 34 and 35 N.,  
 R. 8 W., identical with Angle Point 1, sec. 35, and Angle  
 Point 3, sec. 3, T. 34 N., R. 8 W., on the S. bdy. of the Tp.

thence N. 62°03' E., 4.55 chs. dist. to Angle Point 2, sec. 35;  
 thence S. 70°16' E., 3.35 chs. dist. to Angle Point 3, sec. 35;  
 thence S. 53°12' E., 1.66 chs. dist. to Angle Point 4, sec. 35;  
 identical with Angle Point 1, sec. 2, T. 34 N., R. 8 W., on  
 the line bet. secs. 2 and 35, on the S. bdy. of the Tp.

From Angle Point 1, sec. 36, identical with Angle Point 40,  
 sec. 1, T. 34 N., R. 8 W., on the line bet. secs. 1 and 36, on  
 the S. bdy. of the Tp.

## T. 35 N., R. 8 W., Gila and Salt river Meridian, Arizona

CHAINS	
	thence N. 11°29' E., 1.06 chs. dist. to Angle Point 2, sec. 36;
	thence N. 25°22' W., 6.53 chs. dist. to Angle Point 3, sec. 36;
	thence N. 0°12' E., 5.46 chs. dist. to Angle Point 4, sec. 36;
	thence N. 55°30' W., 9.91 chs. dist. to Angle Point 5, sec. 36;
	thence N. 41°48' E., 2.23 chs. dist. to Angle Point 6, sec. 36;
	thence N. 33°29' W., 4.05 chs. dist. to Angle Point 7, sec. 36;
	thence N. 67°58' E., 4.92 chs. dist. to Angle Point 8, sec. 36;
	thence N. 60°14' E., 3.14 chs. dist. to Angle Point 9, sec. 36;
	thence N. 47°16' W., 4.97 chs. dist. to Angle Point 10, sec. 36;
	thence N. 31°40' W., 2.47 chs. dist. to Angle Point 11, sec. 36;
	thence N. 70°25' E., 3.88 chs. dist. to Angle Point 12, sec. 36;
	thence N. 65°11' E., 4.37 chs. dist. to Angle Point 13, sec. 36;
	thence N. 56°44' E., 3.85 chs. dist. to Angle Point 14, sec. 36;
	thence N. 67°27' E., 4.23 chs. dist. to Angle Point 15, sec. 36;
	thence N. 56°59' E., 2.69 chs. dist. to Angle Point 16, sec. 36;
	thence N. 13°37' W., 5.66 chs. dist. to Angle Point 17, sec. 36;
	thence N. 69°35' W., 1.96 chs. dist. to Angle Point 18, sec. 36;
	thence N. 39°07' W., 3.43 chs. dist. to Angle Point 19, sec. 36;
	thence N. 48°45' W., 3.15 chs. dist. to Angle Point 20, sec. 36;
	thence S. 60°17' W., 1.32 chs. dist. to Angle Point 21, sec. 36;
	thence N. 73°11' W., 1.90 chs. dist. to Angle Point 22, sec. 36;
	thence N. 51°02' E., 5.24 chs. dist. to Angle Point 23, sec. 36;
	thence N. 74°11' E., 4.40 chs. dist. to Angle Point 24, sec. 36;
	thence N. 71°14' E., 3.82 chs. dist. to Angle Point 25, sec. 36;
	thence N. 73°53' E., 3.40 chs. dist. to Angle Point 26, sec. 36;
	thence N. 10°36' W., 4.41 chs. dist. to Angle Point 27, sec. 36;
	thence N. 34°44' E., 0.99 ch. dist. to Angle Point 28, sec. 36;
	thence N. 84°38' E., 1.97 chs. dist. to Angle Point 29, sec. 36;
	identical with Angle Point 1, sec. 31, T. 35 N., R. 7 W., on the line bet. secs. 31 and 36, on the E. bdy. of the Tp.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Cheryl A. Hansen	Surveying Technician
W. William Foster	Surveying Technician
Mark R. Searles	Surveying Technician

CERTIFICATE OF SURVEY

I, Gordon R. Bubel, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of Special Instructions bearing date of the 30th day of July, 1996, I have dependently resurveyed a portion of the south and east boundaries and a portion of the subdivisional lines, subdivided section 15, and executed the metes-and-bounds survey of the Mount Trumbull Wilderness Area Boundary, in Township 35 North, Range 8 West, of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

12/7/99  
(Date)

Gordon R. Bubel  
(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT  
Arizona State Office  
Phoenix, Arizona

The foregoing field notes of the dependent resurvey of a portion of the south and east boundaries and a portion of the subdivisional lines, the subdivision of section 15, and the metes-and-bounds survey of the Mount Trumbull Wilderness Area Boundary, in Township 35 North, Range 8 West, Gila and Salt River Meridian, Arizona, executed by Gordon R. Bubel, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

September 5, 2000  
(Date)

Kenny D. Ravnikar  
(Chief Cadastral Surveyor of Arizona)

~~CERTIFICATE OF TRANSCRIPT~~

~~I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in T. 35 N., R. 8 W., Gila and Salt River Meridian, Arizona, is a true copy of the original field notes.~~

~~\_\_\_\_\_  
(Date)~~

~~\_\_\_\_\_  
(Chief Cadastral Surveyor of Arizona)~~