

NOV 18 1922

MINERAL SURVEY No. 3868

1

Arizona

Land District.

FIELD NOTES

OF THE SURVEY OF THE MINING CLAIM OF

The Stargo Mines, Inc.

KNOWN AS THE

STARGO, TRIANGLE, TECOLATE, and ZACATECAS Lodes

Copper Mountain

Mining District,

Greenlee

County, Arizona

Sections 21-22 and 28, ^{Unapproved} Township T. 4 S., Range 29 E.

Surveyed under instructions dated September 18, 19 22

by

J. N. Stevens

U. S. Mineral Surveyor.

Claim located See location notices, 19

Survey commenced September 23, 1922

Survey completed September 28, 19 22

Address of claimant John H. Page & Co. Box 117, Phoenix, Arizona

DATES OF AMENDED LOCATIONS.

See location notices

7 T. R.

Feet.

MINERAL SURVEY NO. 3868

STARGO LODE.

Beginning at Cor. No. 1, identical with Loc. Mon. and with Cor. No. 1, Triangle lode of this survey. An iron pipe 1 in. dia. with brass cap 2 ins. sq. on top, 18 ins. above ground, set 18 ins. in the ground. Stamped with cross (X)1-S-1-TRI-3868, with mound of stone 3 1/2 ft. base by 3 ft. high alongside, whence the 1/4 Cor. bet. Secs. 21-22, T.4 S. R.29 E., G. & S.R. M., bears N.24 51'E. 448.45 ft.

Cor. No. 2, Sur. No. 3304, June lode, claimant unknown, bears N.58° 49'E. 270.04 ft.

No other bearings available.

Thence N.74° 35'W.

Va. 13° 30'E.

260.0 Gulch bears southerly.

300.0 To N. end center. A pine post 4 ins. sq. by 4 ft. high, set firmly in the ground and surrounded with mound of stone 3 1/2 ft. base by 3 ft. high, scribed N-Cr-S.

370.0 Road bears northerly and southerly.

442.31 Intersect line 4-1, Zacatecas lode of this survey, N.30°58'E. 401.63 ft. from Cor. No.4.

600.0 To Cor. No. 2, identical with the Loc. Mon.

An iron pipe, 1 in. dia. with brass cap 2 ins. sq. on top, 18 ins. above ground, set 18 ins. in the ground. Stamped with cross (X)2-S-3868, with mound of stone 3 1/2 ft. base by 3 ft. high alongside.

Cor. No. 4, Zacatecas lode of this survey, bears S.8 03'W. 390.15 ft.

U.S.L.M. No. 1654 bears N. 21° 53' 20" W., 7764.7 ft.

No other bearings are available.

Thence S.20 41'W.

Va. 13 30'E.

346.32 Intersect line 3-4, Zacatecas lode of this survey, N.47°22'W. 92 ft. from Cor. No. 4.

1474.25 Intersect line 3-4, Tecolote lode of this survey, S.47°02'W. 291.48 ft. from Cor. No.4.

1500.0 To Cor. No. 3, identical with the Loc. Mon.

Feet

MINERAL SURVEY NO. 3868

STARGO LODE, continued.

An iron pipe, 1 in. dia. with brass cap 2 ins. sq. on top, 18 ins. above ground, set 18 ins. in the ground. Stamped with cross (X)3-S-3868, with mound of stone 3 1/2 ft. ^{base by 3 ft.} high alongside.

No bearings available.

Thence S.74° 35'E.

Va. 13° 30'E.

300.0 To S. end center. A pine post 4 ins. sq. by 4 ft. high, set firmly in the ground and surrounded with mound of stone 3 1/2 ft. base by 3 ft. high, scribed S-Cr-S.

600.0 To Cor. No. 4, identical with Cor. No. 4, Triangle lode, and on line 4-1, Tecolote lode, both of this survey, S. 42° 58' E. 522.36 ft. from Cor. No. 4 said Tecolote lode. *also identical with the Loc. Mon.*

An iron pipe, 1 in. dia. with brass cap 2 ins. sq. on top, 18 ins. above ground, set 18 ins. in the ground. Stamped with cross (X)4-S-4-TRI-3868, with mound of stone 3 1/2 ft. base by 3 ft. high alongside.

No bearings available.

Thence N.20° 41'E.

Va. 13° 30'E.

400.0 Gulch bears southeasterly.

1500.0 To Cor. No. 1, the place of beginning.

TRIANGLE LODE.

Beginning at Cor. No. 1, identical with Cor. No. 1, Stargo lode of this survey, heretofore described, and with the Loc. Mon.

1/4 Cor. bet. Secs. 21-22, T.4S. R.29 E., G.&S.R. M., bears N.24° 51'E. 448.45 ft.

U.S.L.M. No. 1654 brs N. 25° 15' W., 8142.0 ft.
Thence S.42° 58'E.

Va. 13° 30'E.

300.0 To N. end center. A pine post 4 ins. sq. by 4 ft. high, set firmly in the ground and surrounded with mound of stone 3 1/2 ft. base by 3 ft. high, scribed N-Cr-TRI.

Feet

MINERAL SURVEY NO. 3868

TRIANGLE LODE, continued.

600.0 To Cor. No. 2, identical with the Loc. Mon.

An iron pipe, 1 in. dia. with brass cap 2 ins. sq. on top, 18 ins. above ground, set 18 ins. in the ground. Stamped with cross (X)2-TRI-3868, with mound of stone 3 1/2 ft. base by 3 ft. high alongside.

No bearings available.

Thence S.20° 41'W.

Va. 13° 30'E.

1500.0 To Cor. No. 3, identical with the Loc. Mon., and on line⁴⁻¹ Tecolote lode of this survey, 377.64 ft. from Cor. No. 1.

An iron pipe, 1 in. dia. with brass cap 2 ins. sq. on top, 18 ins. above ground, set 18 ins. in the ground. Stamped with cross (X)3-TRI-3868, with mound of stone 3 1/2 ft. base by 3 ft. high alongside.

No bearings available.

Thence N.42° 58'W.

Va. 13° 30'E.

200.0 Gulch bears southeasterly.

300.0 To S.end center. A pine post 4 ins. sq. by 4 ft. high, set firmly in the ground and surrounded with mound of stone 3 1/2 ft. base, by 3 ft. high, scribed S.-Cr.-TRI.

600.0 To Cor. No. 4, identical with the Loc. Mon., and with Cor. No. 4, Stargo lode of this survey, heretofore described.

Thence N.20° 41'E.

Va. 13° 30'E.

400.0 Gulch bears southeasterly.

1500.0 To Cor. No. 1, the place of beginning.

Feet

MINERAL SURVEY NO. 3868

TECOLATE LODGE.

Beginning at Cor. No. 1, identical with the Loc. Mon. An iron pipe, 1 in. dia. with brass cap 2 ins. sq. on top, 18 ins. above ground, set 18 ins. in the ground. Stamped with cross (X)1-TEC-3868 with mound of stone 3 1/2 ft. base 3 ft. high alongside, whence the Cor. to Secs. 21-22-27-28, T.4 S. R.29 E., G.& S.R. M., bears S.23° 13'E. 134.8 ft.

No other bearings available.

Thence S.47° 02'W.

Va. 13° 30'E.

300.0 To E.end center. A pine post 4 ins. sq. by 4 ft. high, set firmly in the ground and surrounded with mound of stone 3 1/2 ft. base by 3 ft. high, scribed E-Cr-TEC.

600.0 To Cor. No. 2

An iron pipe 1 in. dia. with brass cap 2 ins. sq. on top, 18 ins. above ground, set 18 ins. in the ground. Stamped with cross (X)2-TEC-3868, with mound of stone 3 1/2 ft. base by 3 ft. high alongside, whence Loc. Mon. bears S.23° W. 17.2 ft.

No other bearings available.

Thence N.42° 58'W.

Va. 13° 30'E

170.0 Gulch drains southerly.

1500.0 To Cor. No. 3, identical with the Loc. Mon.

An iron pipe, 1 in. dia. with brass cap 2 ins. sq. on top, 18 ins. above ground, set 18 ins. in the ground. Stamped with cross (X)3-TEC-3868, with mound of stone 3 1/2 ft. base by 3 ft. high alongside.

No bearings available.

Thence N.47° 02'E.

Va. 13° 30'E.

300.0 To W.end center. A pine post 4 ins. sq. by 4 ft. high, set firmly in ground and surrounded with mound of stone 3 1/2 ft. base by 3 ft. high, scribed W-Cr-TEC.

Feet

MINERAL SURVEY NO. 3868

TECOLATE LODE, continued.

- 308.52 Intersect line 2-3, Stargo lode of this survey, at N. 20° 41' E.
25.75 ft. from Cor. No. 3
- 600.0 To Cor. No. 4, identical with the Loc. Mon.
An iron pipe, 1 in. dia. with brass cap 2 ins. sq. on top,
18 ins. above ground, set 18 ins. in the ground, stamped with
cross (X) 4-TEC-3868, with mound of stone 3 1/2 ft. base by 3 ft.
high alongside, whence ~~U.S.L.M. No. 1654 bears N. 17° 05' 10" W., 8772.4 ft.~~
Cor. No. 3, Stargo lode of this survey, heretofore described,
bears S. 44° 57' W. 314.75 ft.
U.S.L.M. No. 1654 bears N. 17° 08' 53" W. 8775.31 ft.
No other bearings available.
Thence S. 42° 58' E.
Va. 13° 30' E.
- 522.36 Cor. Nos 4-4, Stargo and Triangle lodes respectively, both of this
survey, heretofore described.
- 822.36 S. end center, Triangle lode of this survey, heretofore described,
on line.
- 922.36 Gulch bears southeasterly.
- 1122.36 Cor. No. 3, Triangle lode of this survey, heretofore described, on
line.
- 1500.0 To Cor. No. 1, the place of beginning.

ZACATECAS LODE.

Beginning at Cor. No. 1. An iron pipe 1 in. dia. with brass
cap 2 ins. sq. on top, 18 ins. above ground, set 18 ins. in the
ground. Stamped with cross (X) 1-Z-3868, with mound of stone 3 1/2 ft.
base by 3 ft. high alongside, whence the 1/4 Cor. bet. Secs. 21-22,
T. 4 S. R. 29 E., G. & S. R. M., bears N. 85° 47' 30" E. 462.87 ft.

Cor. No. 2, Sur. No. 3304, June lode, claimant unknown, bears
S. 65° 11' E. 555.5 ft.

Loc. Mon. bears N. 30° 58' E. 121.6 Ft.

No other bearings available.

Feet

MINERAL SURVEY NO. 3868

ZACATECAS LCDE, continued.

Thence N.47° 22'W.

Va. 13° 30'E.

9.65 Intersect line 2-3, Sur. No. 3304, June lode, at N.64° 53'W. 564.7ft. from Cor. No. 2

90.0 Road bears northerly and southerly.

294.0 To N. end center. A pine post 4 ins. sq. by 4 ft. high, set firmly in the ground and surrounded with mound of stone 3 1/2 ft. base by 3 ft. high, scribed N.-Cr.-Z, whence Loc. Mon. bears N.30° 58'E. 121.6 ft.

588.0 To Cor. No. 2. A n iron pipe 1 in. dia. with brass cap 2 ins. sq. on top, 18 ins. above ground, set 18 ins. in the ground. Stamped with cross (X)2-Z-3868, with mound of stone 3 1/2 ft. base by 3 ft. high alongside, whence Loc. Mon. bears N.30° 58'E. 121.6 ft.

U.S.L.M. No. 1654 brs. N.22° 46' 10" W., 7148.8 ft.

No other bearings are available

Thence S.30° 58'W.

Va. 13° 30'E.

175.0 Intersect line 2-3, Sur. No. 3304, June lode, at S.64° 53'E. 242.93 ft. from Cor. No. 3 and N.64° 53'W. 1134.07 ft. from Cor. No. 2.

699.46 To Cor. No. 3, identical with the Loc. Mon.

An iron pipe, 1 in. dia., with brass cap 2 ins. sq. on top, 18 ins. above ground, set 18 ins. in the ground, stamped with cross (X)3-Z-3868, with mound of stone 3 1/2 ft. base by 3 ft. high alongside.

No bearings available.

Thence S.47° 22'E.

Va. 13° 30'E.

294.0 To S. end center. A pine post 4 ins. sq. by 4 ft. high, set firmly in ground and surrounded with mound of stone 3 1/2 ft. base by 3 ft. high, scribed S-Cr-Z.

496.0 Intersect line 2-3, Stargo lode of this survey, at S.20° 41'W. 346.32 ft. from Cor. No. 2

Feet

MINERAL SURVEY NO. 3868

ZACATECAS LODE, continued.

588.0 To Cor. No. 4, identical with the Loc. Mon.
 An iron pipe, 1 in. dia. with brass cap 2 ins. sq. on top, 18 ins. above ground, set 18 ins. in the ground, stamped with cross (X)4-Z-3868, with mound of stone 3 1/2 ft. base by 3 ft. high alongside; whence Cor. No. 2, Stargo lode of this survey, heretofore described, bears N.8° 03'E. 390.15 ft.

No other bearings available.

Thence N.30° 58'E.

Va. 13° 30'E.

401.63 Intersect line 1-2, Stargo lode of this survey at S.74° 35'E.
 157.69 ft. from Cor. No. 2

640.0 Road bears northerly and southerly.

699.46 To Cor. No. 1, the place of beginning.

LODE LINES.

As near as can be determined from the present developments the veins of the several locations embraced in this claim extend as follows from their respective discovery points:-

Stargo lode, 675 ft., N.20° 41'E., and 825 ft. S.20° 41'W.

Triangle lode, 475 ft. S.20° 41'W., and 1025 ft. N.20° 41'E.

Tecolate lode, 347 ft. S.42° 58'E., and 1153 ft. N.42° 58'W.

Zacatecas lode, 20 ft. S.30° 58'W., and 679.46 ft. N.30° 58'E.

AREA.

Acres

Total area, Stargo lode, - - - - - 20.574

Area in conflict with:-

Zacatecas lode of this survey, - - - - - 1.040 ✓

Tecolate lode of this survey, - - - - - 1.924 ✓

Total area, Triangle lode, - - - - - 18.514 ✓

Total area, Tecolate lode, - - - - - 20.661 ✓

Total area, Zacatecas lode, - - - - - 9.247 ✓

Area in conflict with:

Sur. No. 3304, June lode - - - - - 1.157 ✓

MINERAL SURVEY NO. 3868

The survey of each lode of this location is identical with the respective amended location except as shown in the foregoing field notes.

LOCATION.

This survey is located in the S.E. 1/4, and the S.E. 1/4 of the N.E. 1/4 of Sec. 21,^{unapproved,} the N.E. 1/4 of the N.E. 1/4 of Sec. 28,^{unapproved,} and the W. 1/2 of the S.W. 1/4 of Sec. 22,^{unapproved,} T.4 S., R.29 E., G. & S.R. M.

EXPENDITURE OF FIVE HUNDRED DOLLARS.

I certify that the value of the labor and the improvements made upon, or for the benefit of each of the locations embraced in said mining claim by the claimant or its grantors, is not less than five hundred dollars, and that said improvements consist of:

STARGO LODGE.

No. 1 The discovery shaft of the Stargo lode, the center of which, being the discovery point, is on the center line, 675 ft. from the center of line 1-2, 4 x 6 ft., 100 ft. deep

Value \$1000.00

No. 2. A shaft, timbered, 5 x 8 ft., 200 ft. deep, center of which bears from Cor. No. 4, N. 10° 34' W., 545.0 ft.

Total value, \$4000.00 An undivided 1/4 interest herein is assigned to this lode.

Value \$1000.00

This shaft being centrally located is a practicable and feasible main working shaft for the group, as by drifting and cross-cutting therefrom in different directions, towards and under the several claims of this group, the entire group may be advantageously developed and ore extracted therefrom. This improvement is therefore a common improvement for the benefit of each claim of this group and an undivided 1/4 interest of the total value of this improvement (\$1000.00) is properly accredited to each lode claim of the group.

The bottom of this shaft, at its present depth, is below the surface of each claim of this group, making it possible to extend

MINERAL SURVEY NO. 3868

EXPENDITURE OF FIVE HUNDRED DOLLARS, continued.
STARGO LODE.

cross-cuts and drifts from this shaft and intersect the ore bodies lying under each claim.

No. 3. A shaft, the center of which bears from Cor. No. 4, N. 14° 19' W., 450.0 ft., 4 by 6 ft., 100 ft. deep.

Value \$1000.00

TRIANGLE LODE.

No. 1. The discovery shaft, the center of which being the discovery point, is on the center line 475 ft. from the center of line 3-4, 4 by 6 ft., 20 ft. deep.

Value \$200.00

No. 2. A tunnel, the mouth of which bears from Cor. No. 4 N. 66° E. 260 ft., 4 by 6 ft., running N. 44° E. 150 ft. to face.

Value \$1500.00

No. 3. A shaft, the center of which bears from Cor. No. 4 E. N. 76° 30' E. 135 ft., 4 by 6 ft., 10 ft. deep.

Value \$100.00

No. 4. A shaft, the center of which bears from Cor. No. 4 S. 76° 30' E. 110 ft., 4 by 6 ft., 40 ft. deep.

Value \$400.00

An undivided 1/4 interest in Improvement No. 2, Stargo lode, heretofore described, is credited to this lode.

Value \$1000.00

TECOLATE LODE.

No. 1. A shaft, the center of which being the discovery point of this lode is on the center line 347 ft. from the center of line 1-2 of this lode, 4 by 6 ft., 20 ft. deep.

Value \$200.00

No. 2. A shaft, the center of which bears S. 19° E. 620 ft. from Cor. No. 4 of this lode, 5 by 8 ft., 100 ft. deep.

Value \$2000.00

MINERAL SURVEY NO. 3868

EXPENDITURE OF FIVE HUNDRED DOLLARS, continued.
TECOLATE LODE.

No. 3. A shaft, the center of which bears from Cor. No. 1 of this lode S.86° W! 285 ft., 4 by 6 ft., 10 ft. deep.

Value \$100.00

No. 4. A shaft, the center of which bears S.82° W. 66 ft. from point on line 4-1, 522.36 ft. from Cor. No. 4, 4 by 6 ft. 20 ft. deep.

Value \$200.00

A n undivided 1/4 interest in Improvement No. 2, Stargo lode, heretofore described, is credited to this lode.

Value \$1000.00

ZACATECAS LODE.

No. 1. The discovery point on the center line 20 ft. from the center of line 3-4. A monument of stone 3 1/2 ft. base by 3 ft. high.

No Value.

No. 2. A cut, the mouth of which bears from Cor. No. 4 N.37° W. 120 ft., 5 ft. wide, 10 ft. face, course N.40° W. 25 ft. to face. From face of cut, a tunnel, 4 by 6 ft., runs N.40° W. 4 ft. to face.

Value, Cut and Tunnel \$250.00

An undivided 1/4 interest in Improvement No. 2, Stargo lode, heretofore described, is credited to this lode.

Value \$1000.00

OTHER IMPROVEMENTS.

A frame iron-clad Mill, 36 by 114 ft. course of long side N.88° E. the S.W. cor. of which bears N.65° 30' E. 280 ft. from Cor. No. 4, Tecolate lode.

A frame iron-clad Power House, 34 by 60 ft. course of long side N.12° W., the S.W. cor. of which bears N.50° W. 320 ft. from Cor. No. 4, Tecolate lode.

A frame dwelling house, 29 by 36 ft. course of long side N.2° W. the N.E. cor. of which bears S.85° 30' W. 116 ft. from Cor. No. 1, Zacatecas lode.

A frame dwelling house, 18 by 36 ft. course of long side N.18° W. the S.E. cor. of which bears N.85° 30' W. 115 ft. from Cor. No. 1, Zacatecas lode. All belonging to claimant herein.

MINERAL SURVEY NO. 3868

INSTRUMENT.

This survey was made with a Gurley mountain transit, the courses were deflected from the true meridian as determined by direct solar observations, the distances were measured with a 500 ft. steel tape.

REPORT.

The lode line of each location of this claim was run directly upon the ground, and the corners were established by running around the claims. All tie lines were run directly upon the ground.

The 1/4 Cor. bet. Secs. 21-22, T. 4 S. R. 29 E., unapproved is an iron pipe 1 in. diam. with brass cap on top, stamped 1/4 S. 21-22.

The Cor. to Secs. 21-22-27-28 unapproved is an iron pipe 1 1/2 ins. diam. with brass cap on top, stamped T.4 S. R. 29 E. S. 21-22-27-28.

U.S.L.M. No. 1654 is a pine post 6 ins. sq. by 8 ft. high, ~~surrounde~~ surrounded with md. of stone 6 ft. base by 4 1/2 ft. high, scribed U.S.L.M. No. 1654.

Cor. No.2, Sur. No. 3304, June lode, consists of a pine post 4 by 6 ins., 4 ft. above ground, properly set and scribed, 2-J-3304.

No evidence of Cor. No.3 of the above survey remains. Line 2-3 was therefore calculated from the records.

There being no Notary Public within long distance, great delay and expense would result from strict compliance with the rule. I therefore proceeded to administer the necessary oath to my assistant.

ADJOINING CLAIMS.

On the North by Sur. No. 3304, June lode, claimant unknown; Stargo Extension lode, unsur., and El Paso lode, unsur. both claimant herein.

On the East by Stargo Extension lode, unsur., El Paso lode, unsur. and Silver Bonanza lode, unsur. All claimant herein.

On the South by Buster Brown lode unsur. Silver Gem lode, unsur. and Canton lode unsur. All claimant herein.

On the West by Buster Brown lode, unsur. Silver Gem lode, unsur., Canton lode, unsur. Cuba lode, unsur. Nevada lode, unsur., and Nevada No.2 lode unsur. All claimant herein. Also Sur. No. 3304 June lode.

FINAL OATHS FOR SURVEYS.

LIST OF NAMES.

A list of the names of the individuals employed by T.N. Stevens
 United States Mineral Surveyor, to assist in running, measuring, and marking the lines, corners, and
 boundaries described in the foregoing field notes of the survey of the mining claim of _____

THE STARGO MINES, INC.,
 known as the STARGO, TRIANGLE, TECOLATE, and ZACATECAS Lodes
 and showing the respective capacities in which they acted.

_____ Sam T. Aiton _____, *Chainman.*
 _____, *Chainman.*
 _____, *Acman.*
 _____, *Flagman.*

FINAL OATHS OF ASSISTANTS.

~~We~~, I, Sam T. Aiton,
~~and~~ _____, do solemnly swear that ^I ~~we~~ assisted T.N. Stevens
 _____, United States Mineral Surveyor, in marking the corners and surveying
 the boundaries of the mining claim of THE STARGO MINES, INC.,

 known as the STARGO, TRIANGLE, TECOLATE and ZACATECAS Lodes
 represented in the foregoing field notes as having been surveyed by said mineral surveyor and under his
 direction; and that said survey has been in all respects, to the best of ^{my} ~~our~~ knowledge and belief, faithfully
 and correctly executed, and the corner and boundary monuments established according to law and the instruc-
 tions furnished by the United States Surveyor-General for Arizona

Sam T Aiton _____, *Chainman.*
 _____, *Chainman.*
 _____, *Acman.*
 _____, *Flagman.*

Subscribed and sworn to by the above-named persons before me this 28 th
 day of September _____, 1922

T.N. Stevens

 United States Mineral Surveyor

4-686.

FINAL OATH OF U. S. MINERAL SURVEYOR.


I, T. N. Stevens, U. S. Mineral Surveyor,
do solemnly swear that, in pursuance of instructions received from the United States
Surveyor General for Arizona, dated
September 18, 1922, I have, in strict conformity to the laws of the
United States, the official regulations and instructions thereunder, and the instructions
of said Surveyor General, faithfully and correctly executed the survey of the Mining
Claim of The Stargo Mines, Inc.
....., known as the
STARGO, TRIANGLE, TECOLATE and ZACATECAS Lodes,
situate in Copper Mountain Mining District,
Greenlee County, Arizona, in Sections
21-22 and 28 ^{Unapproved} Township No. 4 S., Range No. 29 E. G. & S. R. M.,
and designated as Survey No. 3868, as represented
in the foregoing field notes, which accurately show the boundaries of said mining claim
as distinctly marked by monuments on the ground, and described in the attached copy
of the location certificate, which was received by me from the Surveyor General with
said instructions, and that all the corners of said survey have been established and per-
petuated in strict accordance with the law, official regulations and instructions there-
under; and I do further solemnly swear that the foregoing are the true and original
field notes of said survey and my report therein, and that the labor expended and
improvements made upon said mining claim by claimant or its grantors
are as therein fully stated, and that the character, extent, location, and itemized value
thereof are specified therein with particularity and full detail, and that no portion of
said labor or improvements so credited to this claim has been included in the estimate
of expenditures upon any other claim.

T. N. Stevens
U. S. Mineral Surveyor.

Subscribed and sworn to by the said T. N. Stevens
U. S. Mineral Surveyor, before me a notary public in and
for Pima Co, Arizona this 16th
day of October, 1922

*My com expires
Feb 19, 1924*

W. Augworthy
Notary Public, Pima Co, Arizona

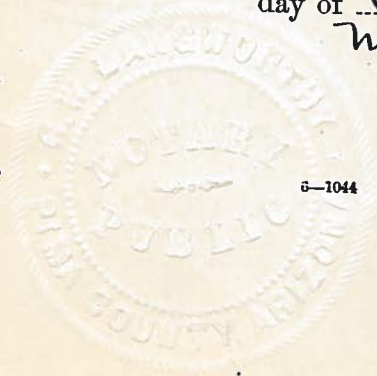

U. S. SURVEYOR-GENERAL'S FINAL CERTIFICATE ON FIELD NOTES.

Department of the Interior,
OFFICE OF U. S. SURVEYOR-GENERAL,

Phoenix, Arizona,

November 22, 1922.

I, U. S. Surveyor-General for District of Arizona do hereby certify that the foregoing transcript of the Field Notes, return and approval of the survey of the mining claim of

The Stargo Mines, Inc.
known as the STARGO, TRIANGLE, TECOLATE, and ZACATECAS Lodes
situate in Copper Mountain

Mining District, Greenlee County, Arizona

in Sections 21, 22, 28, Unapproved, Township No. 4 S., Range No. 29 E., and

designated as Survey No. 3868, has been correctly copied from the originals on file in this office; that said Field Notes furnish such an accurate description of said mining claim as will, if incorporated into a patent, serve fully to identify the premises, and that such reference is made therein to natural objects or permanent monuments as will perpetuate and fix the locus thereof.

And I further certify that five hundred dollars' worth of labor has been expended or improvements made upon said mining claim or for each of said claims by claimant or its grantors, and that said improvements consist of 10 shafts, 1 cut and 2 tunnels, total value \$10,950

and that no portion of said labor or improvements has been included in the estimate of expenditures upon any other claim.

I further certify that the plat thereof, filed in the U. S. Land Office at Phoenix, Arizona, is correct and in conformity with the foregoing Field Notes.

Frank P. Trott

United States Surveyor-General for Arizona.

4-687

**SURVEYOR GENERAL'S CERTIFICATE OF APPROVAL OF FIELD NOTES
AND SURVEY OF MINING CLAIM**

**DEPARTMENT OF THE INTERIOR
OFFICE OF U. S. SURVEYOR GENERAL**

Phoenix, Arizona,

November 22, 1922

I, U. S. Surveyor General for District of Arizona

do hereby certify that the foregoing and hereto attached Field Notes and Return of the Survey of the Mining Claim of

The Stargo Mines, Inc.

, known as the

STARGO, TRIANGLE, TECOLATE, and ZACATECAS Lodes

situate in Copper Mountain mining district,

Greenlee County, Arizona

in Sections 21, 22, 28, Unapp'd Township No. 4 S., Range No. 29 E.

, designated as Survey No. 3868

executed by T. N. Stevens, U. S. Mineral

Surveyor, September 23 - 28, 1922, under my instructions dated


September 18, 1922, have been critically examined and the necessary

corrections and explanations made, and the said Field Notes and Return, and the survey they describe,

are hereby approved. The certified copy of the location certificate filed by the applicant for survey is

on file in this office and a true copy of said certified copy of said location certificate is included and

made a part of the transcript of the field notes.



U. S. Surveyor General for Arizona.