

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT



MINERAL SURVEY NO. 4355

Arizona Land District.

FIELD NOTES

Of The Survey Of The Mining Claim Of

B. L. Snyder and G. G. McKhann

Known As The

Victory # 1

Winifred Mining District,

Maricopa County, Arizona.

Section s 22 & 27, Township 4 N., Range 3 E., G. & S.R.M.

Surveyed under order dated March 20, 1951

by Ralph L. Motz
Mineral Surveyor.


Claim located January 10, 1942, 19

Survey commenced April 19, 1951

Survey completed April 20, 1951

Address of claimants B. L. Snyder and G. G. McKhann
15 East Monroe St., Phoenix, Ariz.

DATES OF AMENDED LOCATIONS

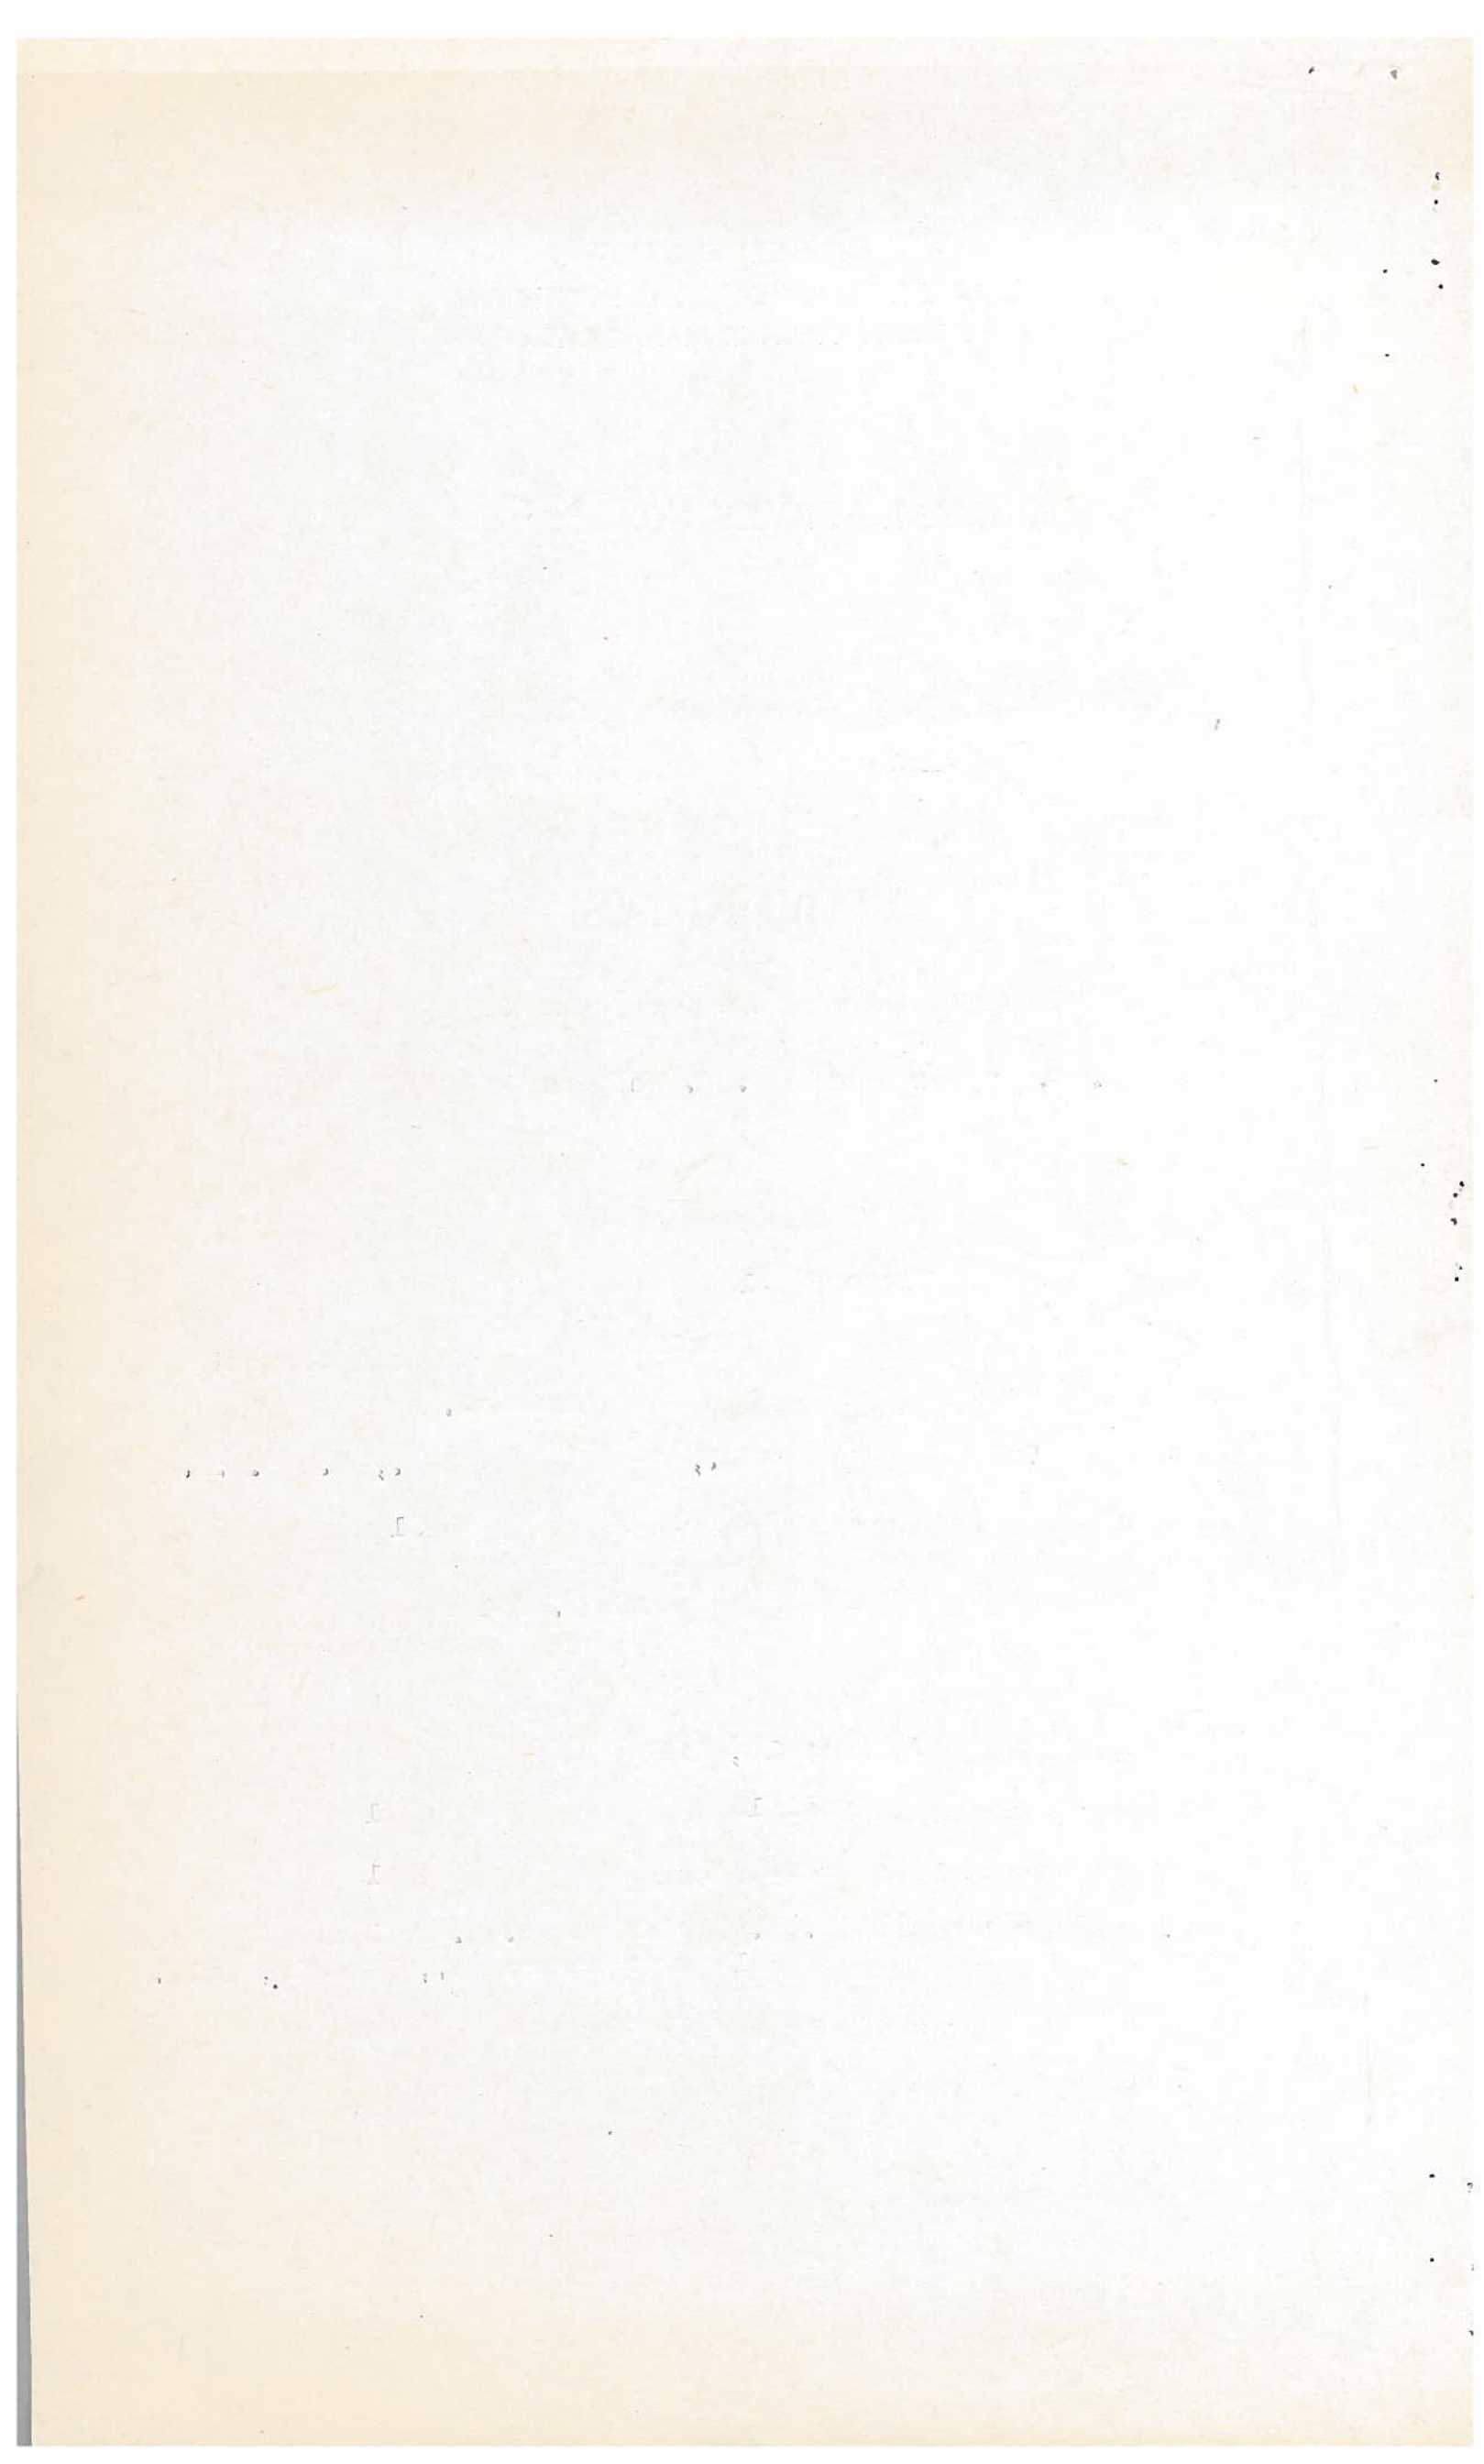

This survey was made with a C. L. Berger & Sons precise transit, with horizontal limb 6.25 ins. diam., having two double opposite verniers, and full vertical circle, 5 ins. diam., having one double vernier, the verniers read to one minute of arc; the eye-piece is equipped with a colored glass slide in a detachable prismatic eye-piece for making direct observations upon the sun. The instrument was in good condition at the time of the survey and all adjustments were in good order.

All azimuths in this record were determined by the method of deflection angles referred to the meridian determined by the following observation:

April 20, 1951, at Cor. No. 1 of the Victory # 1 lode in latitude 33° 40' N., and longitude 112° 02' W., I made a series of eight altitude observations upon the sun for azimuth at approximately equal time intervals, four each with the telescope in direct and reversed positions, observing opposite limbs of the sun, and reading the horizontal angle from Cor. No. 2 of the Victory # 1 lode to the sun.

Mean time of observation,
 105th meridian standard time - - - - 7h. 35m., A. M.
 Declination of the sun at mean time
 of observation - - - - - 11° 22' 45.8" N.
 Mean observed vertical angle to
 sun's center - - - - - 20° 14' 30"
 Mean horizontal angle from reference
 point to sun's center - - - - - 56° 34' S-E
 True bearing to reference point - - - S. 33° 00' W.

The lines were measured with a Keuffel & Esser steel tape, 300 feet in length, graduated to feet, tenths and hundredths of feet for the entire length; a Keuffel & Esser steel tape, 100 feet in length, graduated to feet, tenths and hundredths of feet for the entire length. Both tapes were compared to a Lufkin standard tape at the time of beginning the survey and found correct.

All lines and connections of the survey were run by direct methods.

The magnetic declination observed at each corner of the survey gave a uniform value of 14° 40' E.

Survey No. 4355

VICTORY # 1 lode.

At Cor. No. 1 of the Victory # 1 lode

Set an iron pipe, 1 inch diameter, 3 feet long, 16 inches in the ground in a mound of stones, with brass cap, 3 inches square, 1 inch faces, mkd. V1-1-4355; from which

The 1/4 section corner of Secs. 22 and 27, T. 4 N., R. 3 E., G. & S. R. M. bears N. 9° 41' E., 413.6 ft. dist.; an iron post, 1 inch diameter, with brass cap, 15 inches above ground, firmly set and marked as described in the official record.

A granite rock in place, 24 x 25 inches, 20 inches

Feet	
	above ground, bears S. 33° 00' W., 29.8 ft. dist., mkd. BO x V1-1-4355
	A granite rock in place, 36 x 73 inches, 72 ins. above ground, bears N. 33° 00' E., 29.8 ft. dist., mkd. BO X V1-1-4355
	Thence S. 33° 00' W.,
300	Lode line; discovery point bears N. 57° 37' W., 700 ft. dist.
390	Center of road, bears N. 20° W., and, S. 20° E.
530	Center of road, bears N. 66° W., and, S. 85° E.
600	Cor. No. 2
	Situated on line 1-2 of Survey No. 1906 Sultan lode.
	Set an iron pipe, 1 inch diameter, 3 feet long, 18 inches in the ground in a mound of stones, with brass cap, 3 inches square, with 1 inch faces, mkd. V1-2-4355
	Thence N. 57° 01' W.,
330	Center of road, bears N. 82° W., and, S. 82° E.
900	Cor. No. 3
	Identical with Cor. No. 1 of the Sultan lode and Cor. No. 2 of the Kruger lode, both of Sur. No. 1906
	A granite rock, 7 x 7 inches, 7 inches above ground, firmly set, mkd. 1906 - S1 - K2 - V1-3-4355; from which a monument of rocks bears northwesterly 2 ft.
	Thence N. 58° 31' W.
358	Center of road, bears N. 3° W., and, S. 19° E.
409	Center of road, bears N. 48° E., and, S. 48° W.
600	Cor. No. 4
	Situated on line 1-2 of Survey No. 1906 Kruger lode
	Set a granite rock, 6 x 8 ins., 28 inches long, 20 ins. in the ground, mkd. V1-4-4355; from which
	A monument of rocks bears northwesterly 2 feet.
	A granite ledge, 72 x 76 ins., 49 ins. above ground, bears N. 33° 00' E., 55.7 ft. dist., mkd. BO X V1-4-4355
	A granite ledge, 37 x 43 ins., 43 ins. above ground, bears N. 35° 35' W., 32.5 ft. dist., mkd. BO X V1-4-4355
	Thence N. 33° 00' E.,
300	Lode line; discovery point bears S. 57° 37' E., 800 ft. dist.
600	Cor. No. 5
	Set a granite rock, 5 x 15 ins., 28 inches long, 16 inches in the ground, mkd. V1-5-4355; from which

Feet	
	A monument of rocks bears northwesterly 3 feet dist.
	Cor. No. 2 of Survey No. 3740 Santa Rosa lode, bears S. 57° 12' E., 516.0 ft.
	Thence S. 57° 32' E.
165	Road, bears N. 19° E. and S. 19° W.
486.0	Intersect line 2-3 of Survey No. 3740 Santa Rosa lode, at a point from which Cor. No. 2 bears S. 50° 29' E., 30.23 ft. dist.
517.23	Intersect line 1-2 of Survey No. 3740 Santa Rosa lode, at a point from which Cor. No. 2 bears S. 50° 52' W., 3.95 ft. dist.
1030	Center of road, bears S. 11° E., and, N. 11° W.
1500	Cor. No. 1, and place of beginning.

AREAS	acres
Total area, Victory # 1 lode - - - - -	20.497 ✓
Area in conflict with	
Survey No. 3740 Santa Rosa lode - - - - -	0.001 ✓

LOCATION

This survey is located in the SW 1/4 of Sec. 22 and the NW 1/4 of Sec. 27, both of T. 4 N., R. 3 E., G. & S. R. M.

The survey of this claim is identical with its location as marked on the ground.

EXPENDITURES

The improvements and the value of the labor and improvements made upon this lode location by the claimants or their grantors are as follows:-

- No. 1 Discovery point is an iron stained quartz veins in granite.
- No. 2 A trench, the south end of which bears S. 57° 37' E., 155 ft. from a point on line 4-5 of the Victory # 1 lode 300 ft. from Cor. No. 4; 3 x 3 feet in size, running N. 35° E., 6 ft. to north end.
Value \$20
- No. 3 A trench, the south end of which bears S. 57° 37' E., 140 ft. from a point on line 4-5 of the Victory # 1 lode 300 ft. from Cor. No. 4; 4 x 7 feet in size, running N. 15° E., 45 ft. to north end.
Value \$250
- No. 4 A trench, the north end of which bears S. 49° 30' E., 160 ft. from a point on line 4-5 of the Victory # 1 lode 300 ft. from Cor. No. 4; 4 x 4 feet in size, running S. 35° W., 10 ft. to south end.
Value \$45
- No. 5 A trench, the west end of which bears N. 73° 35' E., 155 ft. from Cor. No. 4 of the Victory # 1 lode;

- 2 x 3 feet in size, running N. 65° E., 100 ft. to the east end
Value \$500
- No. 6 A shaft, the center of which bears N. 84° 15' E., 175 ft. from Cor. No. 4 of the Victory # 1 lode; 8 x 10 feet in size, 4 ft. deep.
Value \$80.
- No. 7 A shaft, the center of which bears EAST 155 ft. from Cor. No. 4 of the Victory # 1 lode; 5 x 7 feet in size, 5 ft. deep
Value \$40.
- No. 8 A trench, the west end of which bears S. 19° 30' E., 340 ft. from Cor. No. 8 of the Victory # 1 lode; 4 x 6 feet in size, running S. 22° E., 30 ft., thence S. 85° E., 25 ft. to east end
Value \$250
- No. 9 A trench, the north end of which bears S. 33° 45' E., 510 ft. from Cor. No. 5 of the Victory # 1 lode; 2 x 2 feet in size, running S. 10° E., 15 ft. to south end
Value \$20
- No. 10 A shaft, the center of which bears S. 29° E., 570 feet from Cor. No. 5 of the Victory # 1 lode; 4 x 7 feet in size, 10 ft. deep
Value \$75
- No. 11 A shaft, the center of which bears S. 30° 30' E., 590 feet from Cor. No. 5 of the Victory # 1 lode; 7 x 7 feet in size, 5 feet deep
Value \$60
- No. 12 A shaft, the center of which bears S. 57° 37' E., 535 feet from a point on line 4-5 of the Victory # 1 lode 300 ft. from Cor. No. 4; 4 x 7 feet in size, 12 feet deep
Value \$90
- No. 13 A shaft, the center of which bears S. 36° 30' E., 605 feet from Cor. No. 5 of the Victory # 1 lode; 7 x 7 feet deep
Value \$60
- No. 14 A shaft, the center of which bears S. 35° 45' E., 650 feet from Cor. No. 5 of the Victory # 1 lode; 7 x 14 feet in size, 10 feet deep, at bottom of shaft is a drift, 4 x 6 ft. in size, running N. 15° E., 7 ft. to breast
Value \$300

OTHER CORNER DESCRIPTIONS AND SUPPLEMENTAL DATA.

Sur. No. 1906, Kruger lode: Cor. No. 1 is a granite rock, firmly set, Cor. No. 2 has been described. Line 1-2 was found to be S. 58° 51' E., 1175 ft.
Sultan lode: Cor. No. 2 is a granite rock, firmly set. Line 1-2 was found to be S. 57° 01' E., 1497 ft.

Sur. No. 3740, Santa Rosa lode: Cor's. 1, 2 and 3 are iron pipes with brass caps, firmly set. Lines 1-2 and 2-3 are correct, as approved.

FIELD ASSISTANTS.

Jackson L. Clark

Chainman.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

CERTIFICATE OF SURVEYOR

I, Ralph L. Motz, Mineral Surveyor,
 hereby certify upon honor that in pursuance of an order received from the
Bureau of Land Management, at Albuquerque, New Mexico.
 dated March 20, 1951, I have faithfully and correctly executed the survey
 of the mining claim of B. L. Snyder and G. G. McKhann
 known as the Victory # 1 lode
 (lode, placer, or millsite)
 situate in Winifred Mining District
Maricopa County, T. 4 N., R. 3 E.,
G. & S. R. M. Meridian, Arizona, and designated
 (State)
 as Survey No. 4355, which is represented in the fore-
 going field notes as having been executed by me and under my direction, and that said
 survey has been made in strict conformity with said order, the Manual of Instructions
 for the Survey of the Public Lands of the United States, and in the specific manner
 described in the foregoing field notes, and I do further certify that the labor ex-
 pended and improvements made upon or for the benefit of the lode
 (lode or placer)
 location— embraced in the said mining claim by claimants or their grantors
 are fully stated in my report therein, and that the character, extent, location, and
 itemized value thereof are specified therein with particularity and full detail, and
 that no portion of, or interest in, said labor and improvements so credited to this
 claim has been included in the estimate of expenditures upon any other claim.

Bisbee, Arizona.
(Place)

Ralph L. Motz
(Mineral Surveyor)

May 9, 1951.
(Date)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
CENTRAL OFFICE OF SURVEYOR

TO THE SURVEYOR GENERAL
WASHINGTON, D. C.

FROM THE SURVEYOR
[Name]

RE: [Subject]

1. [Text]

2. [Text]

3. [Text]

4. [Text]

5. [Text]

CERTIFICATE OF APPROVAL OF FIELD NOTES AND SURVEY OF
MINING CLAIM

UNITED STATES
DEPARTMENT OF THE INTERIOR

~~GENERAL LAND OFFICE~~

~~MINERAL SURVEY OFFICE~~

Bureau of Land Management
Division of Engineering

At Albuquerque, New Mexico

June 6, 1951

I, Geo. H. Well Cadastral Engineer at Albuquerque, New Mexico

do hereby certify that the foregoing and hereto attached Field Notes and Return of the Survey of the
Mining Claim of B.L. Snyder and G.G. McKhann

....., known as the

VICTORY # 1 lode

situate in Winifred mining district,

Maricopa County, Arizona

in Section s 22 and 27, Township No. 4 North, Range No. 3 East

G. & S.R. Mer., designated as Survey No. 4355

executed by Ralph L. Motz, Mineral

Surveyor, April 19 to April 20, 1951, under my instructions dated

March 20, 1951, have been critically examined and the necessary

corrections and explanations made, and the said Field Notes and Return, and the Survey they describe,

are hereby approved. The certified copy of the location certificate filed by the applicant for survey is

included and made a part of these field notes.

Geo. H. Well

Office Cadastral Engineer.

