

Form 4-683  
(January 1963)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FIELD NOTES

Mineral Survey number

4630

State

Arizona

Land District

Arizona

Of the Survey of the Mining Claim of *(name and address of Claimant)*

BS&K Mining Company, an Arizona Corporation  
c/o Albert H. Mackenzie, Attorney-at-Law  
1104 Security Center - 222 North Central Avenue  
Phoenix, Arizona 85004

Known as the *(name of group, if any)*

CONSISTING OF LOCATIONS NAMED AND LOCATED AS FOLLOWS

NAME OF LOCATION	DATE	
	LOCATED	AMENDED
BS&K No. 1	5-20-65	
BS&K No. 3	5-20-65	
BS&K No. 4	5-20-65	
BS&K No. 5	6-14-65	
BS&K No. 13	7-14-65	
Nevada No. 2	7-27-54	
New York	5-1-49	

Mining district			County	
Silver Bell			Pima	
Section	Township	Range	Meridian	Survey under order dated
28 & 33	11 South	8 East	Gila & Salt River	Sept 13, 1965
Survey commenced		Survey completed	Name of Mineral Surveyor	
Oct 6, 1965		Nov 10, 1965	Am. Oct 1 & 28, 1965 Robert L. Frazer	

FIELD NOTES  
 BUREAU OF LAND MANAGEMENT  
 DEPARTMENT OF THE INTERIOR  
 WYOMING STATE

Section  
 Township  
 Range

On the survey of the Mining Claim of [Name] and heirs of [Name] BSR Mining Company, an Arizona Corporation  
 c/o Albert M. Schenck, Attorney-at-Law  
 1111 Broadway, Denver - 132 North Central Avenue  
 Phoenix, Arizona 85004

LOCATION OF LOCATIONS NAMED AND LOCATED BY FOLLOWING

DATE	NAME OF LOCATION
5-20-65	BSR No. 1
5-20-65	BSR No. 2
5-20-65	BSR No. 4
5-14-65	BSR No. 5
7-14-65	BSR No. 13
7-27-64	BSR No. 2
5-1-65	BSR No. 1

Survey Date: 5/1/65  
 Surveyed by: [Name]  
 Section: 33  
 Township: 11 N  
 Range: 2 E

F E E T

This survey was made with Wilde T-2 Theodolites Nos 55949 and 92997, reading to 1 second of arc.

Measurements were made with Cubic Electrotape units Nos 205 and 206, and with a Lufkin 200 ft. steel tape. All equipment was in good condition and adjustment.

All angular values are the mean of two sets of angles in direct and inverse position, turned clockwise from the distant foresight.

Electrotape measurements were made reciprocally, and values are the mean of measurement by both units.

Taped traverses were short, and checked by angles turned to control points at end of traverses. "Hanging" lines were angularly controlled by closing the horizon, and by two tape readings.

Electrotape measurements were made to at least one point on each end of each claim. Position of these points was checked by measuring the angle at the point being located, from the foresight station to some other control point. This result was compared to calculated bearing values for these lines.

On September 22, 1965 (PM), and September 23, 1965 (AM), at latitude  $32^{\circ} 26' 30''$  N, Longitude  $111^{\circ} 32' 30''$  W (from U.S.G.S. Quadrangle Map "Vaca Hills"), at the corner common to Sections 28, 29, 32, 33 of T-11-S, R-8-E, G. & S.R.B. & M., I observed Polaris at Eastern Elongation and at upper culmination. The angles were turned clockwise from the star to a 2-1/2 in. diam. lead capped pipe stamped "U.S.M.S. 4330-Cor 4 - J26" (Hereafter referred to as "J26").

At Eastern Elongation I measured two sets of angles in direct and inverse position, all of which were identical. At upper culmination a single angle was turned, which differed by  $0^{\circ} 00' 11''$ . I used the angular value at Eastern Elongation to establish bearings for this survey.

Time of E. Elong. Sept 22, 1965 8:22 PM MST  
 Time of U. Culm. Sept 23, 1965 2:19 AM MST

Ave. Angle meridian to J-26 at E.E.	189° 11' 45"
Correction to Meridian	+1° 03' 34"
Meridian to J-26	<u>190° 15' 19"</u>
Angle-Meridian to J-26 at upper culmination	<u>190° 15' 30"</u>
Difference	0° 00' 11"

FEET

A closed traverse by Electrotape over control points encompassing the survey area was made. Control points are 5/8 in. reinforcing steel bars 15 in. long driven to 12 in. minimum depth, with a cast aluminum cap firmly affixed thereon, and appropriately stamped. Copies of survey diagram and adjustment and computation are submitted herewith.

The position of final corners was checked in field by comparison of a field angle turned at the corner between two control points with the difference in calculated bearings from these points to the corner.

An aerial photograph, with control points marked in field to show thereon, was enlarged to scale of 1" = 200'. Scaling between control points on finished photo showed maximum scale error of about 3%.

Scaled road and drainage intersections from photo. Protracted approximate bearings.

Magnetic bearing observed at all cors. of survey. Mean Magnetic Declination is 12° 30' East.

-----  
BS&K NO. 3 LODE

At cor. No. 1, identical with location mon. of this survey, a 5/8 in. steel bar, and 4 x 4 post in a stone mon.

Set a 5/8 in. steel bar, 30 in. long, with a cast aluminum cap firmly affixed thereon, driven in the ground and surrounded by stones, Stamped. USMS 4630 - BSK 3-1; from which

The corner of Secs 28, 29, 32, 33, T-11-S, R-8-E, bears N 48° 43' 47" W, 1729.2 ft. dist. A GLO brass-capped pipe, 2 in. in diam. 10 in. above ground. Firmly set in a N-S fence line, stamped as in the official record.

The 1/4 cor. common to secs 32 & 33, bears S 40° 50' 02" W, 1985.52 ft. dist., a GLO brass-capped pipe, 1 in. in dia., 10 in. above ground, firmly set in a N-S fence line, stamped as in the official record.

Cor. No. 3, survey No. 2790, Rex, bears N 51° 20' 21" W, 465.86 ft. dist.

FEET	
	Thence N 67° 02' 45" E
150	Road bears N 15° E, S. 15° W
294.78	Intersect line 1-2, BS&K No. 5, of this survey at a point from which Cor. No. 1 bears S 19° 56' 48" E, 275.32 ft. dist.
298.45	Intersect lode line, disc. Mon., a 4 x 4 post bears S 22° 56' 31" E, 98.3 ft. dist.
598.45	Corner No. 2. Identical with Cor. No. 1, BS&K No. 4, of this survey.  Set a 5/8 in. steel bar, 30 in. long with a cast aluminum cap affixed thereon, driven 15 in. in the ground and surrounded by stones, Stamped USMS 4630 - BSK-3-2, 4-1 from which  Cor. No. 1, BS&K No. 5, of this survey, bears S 26° 12' 34" W, 420.46 ft. dist.  The corresponding loc. Mon. of this claim, a 5/8 in. steel bar and 4 x 4 post, bears N 67° 02' 28" E, 1.60 ft. dist.
	Thence S 22° 56' 31" E
165.0	Road bears N 70° E, S 70° W
291.53	Intersect line 4-1 of BS&K No. 5, of this survey at a point from which corner No. 1 bears S 70° 01' 52" W, 318.48 ft. dist.
1260.0	Road bears N 70° E, S 70° W.
1375.0	Arroyo 25' wide, drains N 65° W.
1378.55	Intersect record line 2-3 of survey 2791, King, at a point from which the record position of cor. 2 bears N 50° 40' W 322.56 ft. dist. (cor. No. 2 falls in a wash, not found). Existing cor. No. 3 bears S 50° 40' E, 1176.25 ft. dist.
1497.21	Cor. No. 3, identical with cor. No. 4 of BS&K No. 4 of this survey.  Set a 5/8 in. steel bar, 30 in. long with a cast aluminum cap affixed thereon, driven 15 in. in the ground and surrounded by stones, stamped USMS 4630-BSK 3-3, 4-4 from which the corresponding location cor., this claim, a 5/8" steel bar & 4 x 4 post bears S 45° 03' 35" E, 2.72 ft. dist.
	Thence S 67° 02' 45" W
300.00	Intersect lode line at a point from which the disc. mon. bears N 22° 56' 31" W, 1398.91 ft. dist.

FEET	
598.45	<p>Cor. No. 4</p> <p>Set a 5/8 in. steel bar, 30 in. long with a cast aluminum cap affixed thereon, driven 15 in. in the ground and surrounded by stones, stamped USMS 4630-BSK 3-4, from which the corresponding location Mon., a 5/8 in. bar and 4 x 4 post bears S 8° 18' 54" E, 2.32 ft. dist.</p> <p>Cor. No. 1, survey 2791, King, bears N 54° 01' 44" W, 256.81 ft. dist.</p> <p>Thence N 22° 56' 31" W</p>
135	Center of road bears N 50° W, S 50° E
262.02	<p>Intersect record line 1-2 of survey 2791 - King, at a point from which record position of cor. No. 2 bears N 49° 27' 00" E, 470.43 ft. dist. (cor. not found) existing Cor. No. 1 bears S 49° 27' 00" W, 139.12 ft. dist.</p>
345.97	<p>Intersect line 4-1 of survey 2790 - Rex at a point from which cor. No. 4 bears N 39° 54' 32" E, 346.51 ft. dist.</p>
620.0	Center of arroyo 30' wide, drains N 50° W.
885.0	Center of road, bears N 58° W, S 58° E
950.0	Center of road, bears N 30° E, S 30° W
1210.0	Center of road, bears North, South
1320.43	<p>Intersect line 3-4, of sur. 2790, Rex, at a point from which cor. No. 4 bears S 43° 37' 59" E, 872.63 ft. dist.</p>
1497.21	Cor. No. 1, and place of beginning.
	<p>-----</p> <p>BS&amp;K NO. 4 LODE</p> <p>Cor. No. 1, identical with Cor. No. 2, BS&amp;K No. 3 of this survey.</p> <p>Set a 5/8 in. steel bar, 30 in. long with a cast aluminum cap affixed thereon, driven 15 in. in the ground and surrounded by stones, stamped USMS 4630 - BSK 4-1, 3-2 from which the cor. of Secs 28, 29, 32, 33, as previously described bears N 63° 53' 11" W, 2061.13 ft. dist.</p> <p>The corresponding loc. Mon. this claim, a 5/8 in. steel bar and 4 x 4 post bears N 67° 02' 28" E, 1.60 ft. dist.</p> <p>Cor. No. 1, BS&amp;K No. 5, of this survey bears S 26° 12' 34" W, 420.46 ft. dist.</p>

FEET	
	Thence N 67° 02' 45" E
180	Center of Road, bears N 88° E, S 88° W
268.62	Intersect lode line at a point from which the disc. mon. a 4 x 4 post and 5/8 in. steel pin bears S 22° 56' 31" E, 299.21 ft. dist.
381.36	Intersect line 4-1, New York, of this survey at a point from which Cor. No. 4 bears S 88° 21' 47" E, 484.10 ft. dist.
515	Center of road bears N 55° W, S 55° E
566.41	Cor. No. 2 Set a 5/8 in. steel bar, 30 in. long with a cast aluminum cap affixed thereon, driven 15 in. in the ground and surrounded by stones, Stamped USMS 4630 - BSK 4-2, from which the corresponding loc. Mon. for this claim, a 5/8 in. steel bar and 4 x 4 post bears N 9° 58' 25" W, 1.25 ft. dist.
	Thence S 22° 56' 31" E
84.68	Intersect Line 4-1, New York of this survey, from which Cor. No. 4 bears S 88° 21' 47" E, 280.61 ft. dist.
125	Center of road bears S 80° E, N 40° W
321.07	Intersect Line 4-1, BS&K No. 5, of this survey, at a point from which Cor. No. 4 bears N 70° 01' 52" E, 614.24 ft. dist.
1480	Center of Road, Junction bears East and N 70° W
1497.21	Cor. No. 3, identical with Loc. Mon. Set a 5/8 in. steel bar, 30 in. long with a cast aluminum cap affixed thereon, driven 15 in. in the ground and surrounded by stones, Stamped USMS 4630-BSK 4-3
	Thence S 67° 02' 45" W
297.79	Intersect lode line at a point from which the disc. Mon. bears N 22° 56' 31" W, 1198.00 ft. dist.
460	Center of Arroyo. 30' wide drains N 40° W.
504.05	Intersect the record line of Line 2-3, survey 2791, King, from which existing Cor. No. 3 bears S 50° 40' E, 1042.21 ft. dist.
566.41	Cor. 4, identical with Cor. No. 3, BS&K No. 3, of this survey, a 5/8 in. steel bar, 30 in. long with a cast aluminum cap affixed thereon, driven 15 in. in the ground and surrounded by stones, stamped USMS 4630 BSK 4-4, 3-3. Corresponding Loc. Mon., a 5/8 in. steel bar and 4 x 4 post bears S 45° 03' 35" E, 2.72 ft. dist.

FEET	
	Thence N 22° 56' 31" W
118.66	Intersect line 2-3, sur. 2791, King, at a point from which existing Cor. No. 3 bears S 50° 40' E, 1176.25 ft. dist.
122.21	Center of Arroyo 25' wide drains N 65° W.
237.21	Center of road bears S 70° W, N 70° E.
1205.68	Intersect line 4-1, BS&K No. 5, of this survey at a point from which Cor. No. 1 bears S 70° 01' 52" W, 318.48 ft. dist.
1332.21	Center of road bears N 70° E, S 70° W
1497.21	Cor. No. 1 and place of beginning.
	----- BS&K NO. 5 LODE
	At Cor. No. 1, identical with location set a 5/8 in. steel bar, 30 in. long with a cast aluminum cap affixed thereon, driven 15 in. in the ground and surrounded by stones, Stamped USMS 4630 BSK 5-1, from which the Cor. of Secs. 28, 29, 32, 33, as previously described, bears N 52° 21' 10" W, 2102.89 ft. dist.
	Common Cor. No. 2, BS&K No. 3 and Cor. No. 1 BS&K No. 4 bears N 26° 12' 34" E, 420.46 ft. dist.
	Thence N 19° 56' 48" W
15.0	Center of road bears N 30° E, S 30° W
275.32	Intersect Line 1-2, BS&K No. 3, of this survey at a point from which Cor. No. 2 bears N 67° 02' 45" E, 303.67 ft. dist.
300.00	Intersect Lode line at a point from which Disc. Mon. bears N 70° 02' 17" E, 99.95 ft. dist.
360.0	Center of road, bears N 60° E, S 60° W.
450.0	Enter wash 20 ft. wide drains N 20° W from S 30" W
500.0	Leave wash 20 ft. wide drains N 50° W from N 20° W
581.88	Intersect line 4-1, New York of this survey at a point from which Cor. No. 1 bears N 88° 21' 47" W, 278.22 ft. dist.
600.00	Cor. No. 2 identical with Loc. Mon. Set a 5/8 in. steel bar, 30 in. long with a cast aluminum cap affixed thereon, driven 15 in. in the ground and surrounded by stones, Stamped USMS 4630 - BSK 5-2 from which Cor. No. 1, New York of this survey bears S 88° 05' 14" W, 272.08 ft. dist. Cor. falls on side of wash.



FEET	
	Thence N 70° 02' 29" E
15.0	Set witness Cor. 5/8 in. steel bar, 30 in. long with a cast aluminum cap affixed thereon, driven 15 in. in the ground and surrounded by stones, Stamped USMS 4630, BS&K 5, W-C 15'
187.0	Center of wash 10 ft. wide, drains N 25° W.
555.0	Center of road bears N 70° W, S 70° E
582.20	Intersect line 4-1, BS&K No. 13, of this survey at a point from which Cor. No. 4 bears S 22° 50' 25" E, 287.04 ft. dist.
970.0	Junction of washes, drains N 37° W, from S 37° E, and South
1176.40	Intersect line 2-3, BS&K No. 13, of this survey at a point from which Cor. No. 3 bears S 22° 47' 07" E, 257.32 ft. dist.
1312.62	Intersect line 3-4, New York, of this survey at a point from which Cor. No. 3 bears N 0° 57' 22" E, 99.00 ft. dist.
1489.90	Set witness Cor. 5/8 in. steel bar, 30 in. long with a cast aluminum cap affixed thereon, driven 15 in. in the ground and surrounded by stones, Stamped USMS 4630 W.C. BSK 5-3 10'
1499.90	Cor. 3 falls in wash, drains N 35° W, identical with location  Set a 5/8 in. steel bar, 30 in. long with a cast aluminum cap affixed thereon, driven 15 in. in the ground and surrounded by stones, stamped USMS 4630-BSK 5-3.  The 1/4 cor. common to Secs. 28 and 33 bears N 47° 50' 30" W, 307.89 ft. dist. A GLO brass-capped pipe, 1 in. in dia., 8 in. above ground, firmly set, stamped as in the official record.
	Thence S 19° 56' 48" E
299.91	Intersect lode line at a point from which the disc. Mon. bears S 70° 02' 17" W, 1399.95 ft. dist.
535.0	Center of arroyo 30 ft. wide, drains West
599.73	Cor. No. 4, identical with location. Set a 5/8 in. steel bar, 30 in. long with a cast aluminum cap affixed thereon, driven 15 in. in the ground and surrounded by stones, stamped USMS 4630-BSK 5-4
	Thence S 70° 01' 52" W
290.0	Center of road bears N 80° W, S 80° E
614.24	Intersect line 2-3, BS&K No. 4, of this survey at a point from which Cor. No. 2 bears N 22° 56' 31" W, 321.07 ft. dist.

FEET	
1181.42	Intersect common line 2-3 BS&K No. 3 and 4-1 BS&K No. 4 of this survey at a point from which common cor. No. 2 and 1 bears N 22° 56' 31" W, 291.53 ft. dist.
1499.90	Cor. No. 1 and place of beginning
	-----
	NEW YORK LODGE
	At Cor. No. 1
	Set a 5/8 in. steel bar, 30 in. long with a cast aluminum cap affixed thereon, driven 15 in. in the ground and surrounded by stones, stamped USMS 4630-N.Y.-1 from which the corresponding location Mon., a 4 x 4 post, bears S 7° 16' 24" W, 19.55 ft. dist.
	The cor. of Secs. 28, 29, 32, 33, as previously described bears N 58° 27' 22" W, 1394.46 ft. dist.
	Cor. No. 2 BS&K No. 5 of this survey, bears N 88° 05' 14" E, 272.08 ft. dist.
	Cor. No. 4, Nevada No. 2, of this survey, bears N 40° 18' 38" E, 240.95 ft. dist.
	Thence N 0° 57' 22" E
300.00	Intersect lode line at a point from which Disc. shaft bears S 88° 20' 11" E, 749.0 ft. dist.
455.0	Center of road bears N 25° E, S 25° W
582.92	Corner No. 2.
	Set a 5/8 in. steel bar, 30 in. long with a cast aluminum cap affixed thereon, driven 15 in. in the ground and surrounded by stones, stamped USMS 4630-N.Y. -2, from which the corresponding loc. Mon., a 4 x 4 post bears N 88° 57' 34" W, 4.84 ft. dist.
	Thence S 88° 58' 41" E
46.55	Intersect line 4-1, Nevada No. 2, of this survey at a point from which Cor. No. 4 bears S 14° 02' 33" E, 410.54 ft. dist.
60.0	Center of road, bears N 25° E, S 25° W.
185.0	Center of arroyo 15 ft. wide, drains N 20° E.
300.0	Center of arroyo 10 ft. wide, drains N 70° W.

FEET	
656.52	Intersect line 4-1, BS&K No. 13, of this survey at a point from which Cor. No. 4 bears S 22° 50' 25" E, 681.27 ft. dist.
658.59	Intersect line 2-3, Nevada No. 2, of this survey at a point from which Cor. No. 3 bears S 15° 47' 24" E, 277.20 ft. dist.
1055.0	Center of arroyo 30 ft. wide drains North.
1305.66	Intersect line 2-3, BS&K No. 13, of this survey at a point from which Cor. No. 3 bears S 22° 47' 07" E, 418.83 ft. dist.
1497.89	<p>Cor. No. 3</p> <p>Set a 5/8 in. steel bar, 30 in. long with a cast aluminum cap affixed thereon, driven 15 in. in the ground and surrounded by stones, stamped USMS 4630-N.Y.-3 from which corresponding loc. Mon., a 4 x 4 post bears N 55° 21' 28" E, 2.60 ft. dist.</p> <p>The 1/4 cor. common to Secs. 28 and 33 bears N 17° 25' 30" W, 179.82 ft. dist. a GLO brass-capped pipe, 1 in. in dia., 8 in. above ground, firmly set, stamped as in the official record.</p> <p>Thence S 0° 57' 22" W</p>
99.00	Intersect line 2-3, BS&K No. 5, of this survey at a point from which Cor. No. 3 bears N 70° 02' 29" E, 187.28 ft. dist.
299.70	Intersect lode line at a point from which the Disc. shaft bears N 88° 20' 11" W, 749.01 ft. dist.
565.0	Center of arroyo, 30 ft. wide drains N 60° W.
599.00	<p>Cor. No. 4</p> <p>Set a 5/8 in. steel bar, 30 in. long with a cast aluminum cap affixed thereon, driven 15 in. in the ground and surrounded by stones, stamped USMS 4630-N.Y.-4, from which corresponding Loc. Mon., a 4 x 4 post, bears S 87° 56' 52" E, 4.16 ft. dist.</p> <p>Cor. No. 3, BS&amp;K No. 13 bears N 5° 17' 16" W, 217.12 ft. dist.</p> <p>Cor. No. 2, BS&amp;K No. 4, bears N 74° 39' 38" W, 325.08 ft. dist.</p> <p>Thence N 88° 21' 47" W</p>
280.61	Intersect line 2-3, BS&K No. 4, of this survey, at a point from which Cor. No. 2 bears N 22° 56' 31" W, 84.68 ft. dist.
190.0	Center of Arroyo, drains N 50° W
300.0	Center of road bears N 40° W, S 40° E
484.10	Intersect line 1-2, BS&K No. 4 of this survey at a point from which Cor. No. 2 bears N 67° 02' 45" E, 185.05 ft. dist.

499.97	Intersect line 3-4, BS&K No. 13, of this survey at a point from which Cor. No. 4 bears S 67° 10' 30" W, 72.73 ft. dist.
579.88	Intersect line 4-1, BS&K No. 13, of this survey at a point from which Cor. No. 4 bears S 22° 50' 25" E, 33.09 ft. dist.
740.0	Center of arroyo drains N 85° W.
1219.77	Intersect line 1-2, BS&K No. 5, of this survey at a point from which Cor. No. 2 bears N 19° 56' 48" W, 18.12 ft. dist.
1235.0	Center of arroyo 5 ft. wide, drains North.
1442.0	Center of arroyo 8 ft. wide, drains N 10° W.
1497.99	Cor. No. 1 and place of beginning.
	----- BS&K NO. 13 LODE
	At cor. No. 1, identical with Loc. Mon., set a 5/8 in. steel bar, 30 in. long with a cast aluminum cap affixed thereon, driven 15 in. in the ground and surrounded by stones, stamped USMS 4630-BSK 13-1 from which the cor. of secs. 28, 29, 32, 33, as previously described bears S 68° 55' 43" W, 1648.45 ft. dist.
	Cor. No. 1, BS&K No. 1, of this survey bears S 56° 19' 16" E, 78.07 ft. dist.
	Cor. No. 2, Nevada No. 2, of this survey bears N 0° 49' 18" W, 394.91 ft. dist.
	Thence N 67° 10' 30" E
40.0	Center of road, bears N 50° W, S 65° E
42.92	Intersect line 4-1, BS&K No. 1, of this survey at a point from which Cor. No. 1 bears S 22° 58' 27" E, 65.11 ft. dist.
102.78	Intersect line 2-3, Nevada No. 2, of this survey at a point from which Cor. No. 2, bears N 15° 47' 24" W, 368.92 ft. dist.
294.64	Intersect lode line at a point from which Disc. Mon. bears S 22° 47' 12" E, 283.6 ft. dist. Corresponding Loc. Mon., a 4 x 4 post bears N 52° 34' 09" E, 5.25 ft. dist.
345.0	Center of arroyo 40 ft. wide drains N 55° W.
594.64	Cor. No. 2

FEET	
	<p>Set a 5/8 in. steel bar, 30 in. long with a cast aluminum cap affixed thereon, driven 15 in. in the ground and surrounded by stones, stamped USMS 4630 - BSK 13-2 corresponding Loc. Mon., a 4 x 4 post, bears N 52° 42' 30" E, 5.30 ft. dist.</p> <p style="text-align: center;">Thence S 22° 47' 07" E</p>
585.0	Center of road bears N 60° E, S 60° W
1077.38	Intersect line 2-3, New York, of this survey at a point from which Cor. No. 3 bears S 88° 58' 41" E, 192.23 ft. dist.
1238.89	Intersect line 2-3, BS&K No. 5, of this survey at a point from which True Point for Cor. No. 3 bears N 70° 02' 29" E, 323.49 ft. dist.
1496.21	<p>Cor. No. 3</p> <p>Set a 5/8 in. steel bar, 30 in. long with a cast aluminum cap affixed thereon, driven 15 in. in the ground and surrounded by stones, stamped USMS 4630 - BSK 13-3 from which corresponding Loc. Mon., a 4 x 4 post, bears S 67° 10' 19" E, 5.06 ft. dist.</p> <p>Cor. 3, New York, bears N 4° 28' 58" E, 383.89 ft. dist.</p> <p>Cor. 3, BS&amp;K No. 5, bears N 30° 27' 01" E, 403.28 ft. dist.</p> <p style="text-align: center;">Thence S 67° 10' 30" W</p>
125.0	Center of arroyo 40 ft. wide, drains North.
225.0	Center of arroyo drains N 10° W
300.00	<p>Intersect lode line at a point from which Disc. Mon. bears N 22° 47' 12" W, 1212.62 ft. dist.</p> <p style="text-align: center;">Corresponding Loc. Mon., a 4 x 4 post, bears N 83° 24' 40" E, 6.23 ft. dist.</p>
380.0	Center of road bears N 60° W, S 60° E
520.51	Intersect line 4-1, New York, of this survey at a point from which Cor. No. 4 bears S 88° 21' 47" E, 499.97 ft. dist.
593.24	<p>Cor. No. 4</p> <p>Set a 5/8 in. steel bar, 30 in. long with a cast aluminum cap affixed thereon, driven 15 in. in the ground and surrounded by stones, stamped USMS 4630, BSK 13-4 corresponding Loc. Mon., a 4 x 4 post, bears S 21° 37' 34" W, 2.49 ft. dist.</p>

FEET	
	Thence N 22° 50' 25" W
33.09	Intersect line 4-1, New York of this survey at a point from which Cor. No. 4 bears S 88° 21' 47" E, 579.88 ft. dist.
275.0	Center of road bears N 70° W, S 70° E
287.04	Intersect line 2-3, BS&K No. 5, of this survey at a point from which Cor. No. 2 bears S 70° 02' 29" W, 582.20 ft. dist.
665.18	Intersect line 2-3, Nevada No. 2 of this survey at a point from which Cor. No. 3 bears S 15° 47' 24" E, 261.83 ft. dist.
681.27	Intersect line 2-3, New York, of this survey at a point from which Cor. No. 3 bears S 88° 58' 41" E, 841.37 ft. dist.
825.0	Center of road bears N 45° E, S 45° W
1315.0	Center of road bears N 80° E, S 80° W
1431.02	Intersect line 1-2, BS&K No. 1, of this survey at a point from which Cor. No. 1 bears N 67° 02' 57" E, 43.07 ft. dist.
1496.23	Cor. 1 and place of beginning.
	-----
	NEVADA NO. 2 LODE
	At Cor. No. 1, identical with stone loc. Mon., set a 5/8 in. steel bar, 30 in. long, with a cast aluminum cap firmly affixed thereon, driven into the ground, and surrounded by stones, stamped USMS 4630 NEV 2-1, from which: The cor. of secs. 28, 29, 32, 33, as previously described bears S 48° 27' 39" W, 1320.91 ft. dist.
	Cor. No. 2, BS&K No. 1, bears S 6° 19' 59" E. 563.88 ft. dist.
	Thence N 78° 24' 12" E
190.0	Center of road bears N 60° W, S 60° E
263.95	Intersect lode line at a point from which Disc. Mon., a 4 x 4 post in masonry bears S 15° 26' 56" E, 602.54 ft. dist.
	A stone mon., reputedly a witness cor., for center end location (on Northerly side of large wash,) bears N 12° 05' 44" W, 164.49 ft. dist.
415.0	Center of arroyo 50' wide drains N 45° W

FEET	
447.07	Intersect line 4-1, BS&K No. 1, of this survey at a point from which Cor. No. 1 bears S 22° 58' 27" E, 452.31 ft. dist.
555.19	Cor. No. 2, identical with stone Loc. Mon. Set a 5/8 in. steel bar, 30 in. long, with a cast aluminum cap firmly affixed thereon, driven in the ground and surrounded by stones, stamped USMS 4630-NEV 2-2, from which Cor. No. 1 of BS&K No. 13 bears S 0° 49' 18" E, 394.91 ft. dist.  Thence S 15° 47' 24" E
80.0	Center of arroyo 50 ft. wide, drains N 70° W
368.92	Intersect line 1-2, BS&K No. 13, of this survey at a point from which Cor. No. 1 bears S 67° 10' 30" W, 102.78 ft. dist.
435.0	Center of road bears N 60° W, S 60° E
565.0	Center of road bears N 80° E, S 80° W
1040.0	Center of road bears N 45° E, S 45° W
1190.90	Intersect line 2-3, New York, of this survey at a point from which Cor. No. 2 bears N 88° 58' 41" W, 658.59 ft. dist.
1206.27	Intersect line 4-1, BS&K No. 13, of this survey at a point from which Cor. No. 4 bears S 22° 50' 25" E, 665.18 ft. dist.
1468.10	Cor. No. 3  Set a 5/8 in. steel bar, 30 in. long, with a cast aluminum cap firmly affixed thereon, driven into the ground and surrounded by stones, stamped USMS 4630 - NEV 2-3.  Thence S 78° 24' 12" W
80.0	Center of road bears N 35° W, S 50° E
300.00	Intersect lode line at a point from which Disc. Mon. bears N 15° 26' 56" W, 864.95 ft. dist.
365.0	Center of Arroyo 10 ft. wide drains N 25° W
550.0	Center of arroyo 10 ft. wide drains North
600.00	Cor. No. 4  Set a 5/8 in. steel bar, 30 in. long, with a cast aluminum cap firmly affixed thereon, driven in the ground and surrounded by stones, stamped USMS 4630-NEV 2-4  Cor. No. 1, New York, bears S 40° 18' 38" W, 240.95 ft. dist.

FEET	
	Thence N 14° 02' 33" W
195.0	Center of arroyo 20 ft. wide drains N 20° E
385.0	Center of road bears N 30° E, S 30° W
410.54	Intersect line 2-3, New York, of this survey at a point from which Cor. No. 2 bears N 88° 58' 41" W, 46.55 ft. dist.
918.59	Intersect line 1-2, BS&K No. 1, of this survey at a point from which Cor. No. 2 bears S 67° 02' 57" W, 76.56 ft. dist.
1320.0	Center of arroyo 30 ft. wide drains N 50° W
1465.51	Cor. No. 1 and place of beginning.
	-----
	BS&K NO. 1 LODE
	At Cor. No. 1, identical with location set a 5/8 in. steel bar, 30 in. long with a cast aluminum cap affixed thereon, driven 15 in. into the ground and surrounded by stones, stamped USMS 4630-BSK 1-1, from which the Cor. of Secs. 28, 29, 32, 33 as previously described bears S 71° 05' 05" W, 1694.71 ft. dist.
	Cor. No. 1, BS&K No. 13 bears N 56° 19' 16" W, 78.07 ft. dist.
	Thence S 67° 02' 57" W
43.07	Intersect line 4-1, BS&K No. 13, of this survey at a point from which Cor. No. 1 bears N 22° 50' 25" W, 65.21 ft. dist.
299.76	Intersect lode line at a point from which Disc. Mon. bears N 22° 58' 27" W, 650.08 ft. dist.
350.0	Center of arroyo, 50 ft. wide, drains N 30° W
523.20	Intersect line 4-1, Nevada No. 2, of this survey at a point from which Cor. No. 1 bears N 14° 02' 33" W, 546.92 ft. dist.
599.76	Cor. No. 2. Identical with location. Set a 5/8 in. steel bar, 30 in. long with a cast aluminum cap affixed thereon, driven 15 in. into the ground and surrounded by stones, stamped USMS 4630-BSK 1-2



FEET	
	Thence N 22° 58' 27" W
645.0	Center of arroyo 50 ft. wide drains N 70° W
745.0	Center of road bears N 60° W and East
1499.57	Cor. No. 3. Identical with location. Set a 5/8 in. steel bar, 30 in. long with a cast aluminum cap affixed thereon, driven 15 in. into the ground and surrounded by stones, stamped USMS 4630 BSK 1-3
	Thence N 67° 02' 57" E
235.0	Center of arroyo 50 ft. wide drains N 40° W
300.00	Intersect lode line at a point from which Disc. Mon. bears S 22° 58' 27" E, 849.49 ft. dist.
599.76	Cor. No. 4, identical with location. Set a 5/8 in. steel bar, 30 in. long with a cast aluminum cap affixed thereon, driven 15 in. into the ground and surrounded by stones, stamped USMS 4630 BSK 1-4
	Thence S 22° 58' 27" E
935.0	Center of road bears N 80° W, N 80° E
1047.26	Intersect line 1-2, Nevada No. 2, of this survey at a point from which Cor. No. 2 bears N 78° 24' 12" E, 108.12 ft. dist.
1065.0	Center of arroyo, 50 ft. wide, drains N 70° W
1434.46	Intersect line 1-2, BS&K No. 13, of this survey at a point from which Cor. No. 1 bears S 67° 10' 30" W, 42.92 ft. dist.
1440.0	Center of road bears N 52° W, S 60° E
1499.57	Cor. No. 1 and place of beginning.
	-----
	<u>AREAS</u>
	<u>Acres</u>
	Total Area, BS&K No. 1 Lode 20.647
	Area in conflict with:
	Nevada No. 2, Lode 5.520
	BS&K No. 13, Lode 0.064
	Nevada No. 2 exclusive of its conflict with BS&K No. 13 5.456
	Total Area, BS&K No. 3 Lode 20.569
	Area in conflict with:
	Sur. No. 2791, King, Lode 4.330
	Sur. No. 2790, Rex, Lode 3.449
	BS&K No. 5, Lode 2.023

FEET	AREAS	Acres
	Total Area, BS&K No. 4 Lode	19.468
	Area in conflict with:	
	Sur. No. 2791, King, Lode	0.085
	BS&K No. 5, Lode	3.983
	New York, Lode	0.180
	BS&K No. 5, exclusive of its conflict with New York	3.803
	Total Area, BS&K No. 5 Lode	20.655
	Area in conflict with:	
	New York Lode	7.273
	BS&K No. 13 Lode	3.707
	BS&K No. 13 exclusive of its conflict with New York	0.028
	BS&K No. 4, Lode	3.983
	BS&K No. 4, Lode exclusive of its conflict with New York	3.803
	BS&K No. 3, Lode	2.023
	Total Area, BS&K No. 13	20.401
	Area in conflict with:	
	Nevada No. 2 Lode	0.980
	BS&K No. 1 Lode	0.064
	Nevada No. 2, exclusive of its conflict with BS&K No. 1	0.916
	BS&K No. 5 Lode	3.707
	New York, Lode	7.467
	New York, exclusive of its conflict with BS&K No. 5	3.788
	Nevada No. 2 exclusive of its conflict with New York	0.980
	Total Area, New York, Lode	20.321
	Area in conflict with:	
	Nevada No. 2, Lode	4.689
	BS&K No. 13, Lode	7.467
	Nevada No. 2, exclusive of its conflict with BS&K No. 13	4.689
	BS&K No. 13, exclusive of its conflict with BS&K No. 5	3.788
	BS&K No. 5, Lode	7.273
	BS&K No. 4, Lode	0.180
	BS&K No. 5, exclusive of its conflict with BS&K No. 13	3.594
	BS&K No. 5, exclusive of its conflict with BS&K No. 13 and BS&K No. 4	3.414
	Total Area, Nevada No. 2, Lode	19.415
	Area in conflict with:	
	BS&K No. 13, Lode	0.980
	New York, Lode	4.689
	BS&K No. 13, exclusive of its conflict with New York	0.980
	(Note: Conflict of New York and BS&K No. 13 is 15 sq. ft. = 0.000343 Acre)	
	BS&K No. 1, Lode	5.520
	BS&K No. 1 exclusive of its conflict with BS&K No. 13	5.456

FEET	
	<b>LOCATION</b>
	<p>This survey is located in Secs. 28 and 33, T-11-S, R-8-E. Gila &amp; Salt River Base and Meridian.</p>
	<p>Survey of all lodes are identical with, or wholly within the location cors. as found on the ground, as shown in notes.</p>
	<b>EXPENDITURES</b>
	<p>The improvements and value of labor and improvements made upon or for the benefit of each of the lode locations embraced in said mining claim by the claimant or its grantors is as follows:</p>
	<u>BS&amp;K NO. 3 LODE</u>
No. 1	<p>The discovery Mon. is on the lode line, 98.3 ft. from a pt. on line 1-2, 298.45 ft. from Cor. No. 1; a 4 x 4 post</p>
	Value - None
No. 2	<p>A discovery shaft, the center of which bears S 22° 04' 09" E, 110.00 ft. dist. from a pt. on line 1-2, 298.45 ft. from Cor. No. 1, 6' x 10' in size, 8' deep, blasted in rock</p>
	Value - \$125.00
No. 3	<p>A core drill hole, the center of which bears S 43° 01' 29" E, 75.37 ft. dist. from a point on line 1-2, 298.45 ft. from Cor. No. 1, 2 in. core, 182 ft. deep @ \$6.50 per ft.</p>
	Value - \$1183.00
	Total Expenditure \$1308.00
	<u>BS&amp;K NO. 4 LODE</u>
No. 1	<p>The discovery Mon. is on the lode line, 299.21 ft., from a pt. on Line 1-2, 268.62 ft. from Cor. No. 1, a 4 x 4 post and 5/8 in. steel bar.</p>
	Value - None
No. 2	<p>A Disc. shaft, the center of which bears S 22° 35' 14" E, 290.92 ft. dist. from a pt. on Line 1-2, 268.62 ft. dist. from Cor. No. 1; 6' x 7' in size, 8' deep, blasted in rock.</p>
	Value - \$100.00

FEET	
No. 3	<p>A core drill hole, the center of which bears S 3° 47' 40" E, 190.68 ft. Dist. from a pt. on Line 1-2, 268.62 ft. from Cor. No. 1, 2 in. core, 170 ft. deep @ \$6.50 per ft.</p> <p>Value - \$1105.00</p> <p>Total Expenditure \$1205.00</p>
<u>BS&amp;K NO. 1 LODE</u>	
No. 1	<p>The discovery Mon. is on the Lode line 650.58 ft. from a pt. on Line 1-2, 299.76 ft. from Cor. No. 1, a 4 x 4 post and 5/8 in. steel bar.</p> <p>Value - None</p>
No. 2	<p>A discovery shaft, the center of which bears N 23° 06' 55" W, 639.0 ft. from a point on Line 1-2, 299.76 ft. from Cor. No. 1; 12' x 12' in size, 8' deep, blasted in rock</p> <p>Value - \$125.00</p>
No. 3	<p>A core drill hole, the center of which bears N 20° 50' 40" W, 590.68 ft. dist. from a pt. on Line 1-2, 299.76 ft. from Cor. No. 1, 2 in. core, 100 ft. deep, @ \$6.50 per ft.</p> <p>Value - \$650.00</p> <p>Total Expenditure \$775.00</p>
<u>NEW YORK LODE</u>	
No. 1	<p>A discovery shaft, the center of which bears S 88° 20' 11" E, 749.0 ft. dist. from a point on Line 1-2, 300.00 ft. from Cor. No. 1; 4' x 6' in size, 8 ft. deep blasted in rock.</p> <p>Value - \$100.00</p>
No. 2	<p>Disc. Mon. bears S 87° 27' 44" E, 752.36 ft. Dist. from a point on Line 1-2; 300.0 ft. from Cor. No. 1, A 4 x 4 post</p> <p>Value - None</p>
No. 3	<p>A core drill hole, the center of which bears S 82° 32' 30" E, 882.64 ft. dist. from a point on line 1-2, 300.0 ft. from Cor. No. 1, 2 in. core, 206 ft. deep @ \$6.50 per ft.</p> <p>Value - \$1339.00</p> <p>Total Expenditure \$1439.00</p>

FEET	
	<p><u>BS&amp;K NO. 13 LODE</u></p> <p>No. 1     The discovery Mon. is on the lode line, 283.60 ft. from a pt. on line 1-2, 294.64 ft. from Cor. No. 1; a 4 x 4 post.  Value - None</p> <p>No. 2     A discovery shaft, the center of which bears S 25° 02' 57" E, 285.0 ft. dist. from a point on Line 1-2, 294.64 ft. from Cor. No. 1; 6' x 8' in size, 8' deep, blasted in rock.  Value - \$100.00</p> <p>No. 3     A core drill hole, the center of which bears S 9° 31' 47" E, 546.26 ft. dist. from a point on line 1-2, 294.64 ft. from Cor. No. 1; 2 in. core, 167 ft. deep, @ \$6.50 per foot.  Value - \$1085.00</p> <p style="text-align: center;">Total Expenditure \$1185.00</p>
	<p><u>BS&amp;K NO. 5 LODE</u></p> <p>No. 1     The disc. mon. is on the Lode line 99.95 ft. dist. from a point on Line 1-2, 300.00 ft. from Cor. No. 1, a 4 x 4 post and 5/8 in. steel bar.  Value - None</p> <p>No. 2     A discovery shaft bears N 70° 43' 58" E, 106.75 ft. dist. from a point on line 1-2, 300.00 ft. from Cor. No. 1, 6' x 8' in size, 8' deep, blasted in rock.  Value - \$125.00.</p> <p style="text-align: center;">Claimant will file supplemental proof of expenditure of at least \$500.00 prior to expiration of period of publication.</p>
	<p><u>NEVADA NO. 2 LODE</u></p> <p>No. 1     The disc. Mon is on the lode line 602.54 ft. from a pt. on line 1-2, 263.95 ft. from Cor. No. 1, a 4 x 4 post.  Value - None</p> <p>No. 2     A discovery cut bears S 37° 25' 46" E, 684.29 ft. dist., from Cor. No. 1, a cut in the side of a wash, 8' x 12' in size, 7' deep, in rock.  Value - \$100.00</p>

(This form bound at left)

FEET

No. 3

A core drill hole bears S 42° 32' 26" E, 742.07 ft. dist., from Cor. No. 1, 2 in. core, 151 feet deep, @ \$6.50 per ft.

Value - \$1081.50

Total Expenditure \$1181.50

OTHER CORNER DESCRIPTIONS AND SUPPLEMENTAL DATA

BS&K LODES 1, 3, 4, 5

All location and discovery corners are 5/8 in. deformed bars, 15 in. long, driven 12 in. or more deep. A 4 x 4 post in a stone mound is placed immediately beside the bar.

BS&K 13, NEW YORK

Location and discovery cors. are 4 x 4 posts in stone mounds,

NEVADA NO. 2.

Location cors. are stone mounds.

Surv 2790, Rex; Cors No. 1 and 2 are 2 in. pipes with 2-1/2 in. lead caps firmly set in stone mounds. Line 1-2 was found to be N 43° 40' 54" W, 1500.3 ft. instead of N 43° 40' W, 1500 ft. as approved. Line 3-4 was found to be S 43° 37' 59" E, 1499.803 ft. instead of S 43° 40' E, 1500 ft. as approved.

Line 4-1 was found to be S 39° 54' 32" W, 592.9 ft. instead of S 39° 50' W, 593.3 ft. as approved. Cors No. 3 and 4 are well-built stone monuments of the same size and character as Cors 1 and 2. Pipes not in place. Set a 5/8 in. bar in center of same for definite point. Line 2-3 was found to be N 39° 58' 52" E, 594.1 ft. instead of N 39° 50' E, 593.3 ft. as approved.

Surv 2791, King; Cor. No. 1 is a 2 in. lead-capped pipe firmly set in a stone mound. Cor. No. 4 is a well-built stone monument; as for Cor. No. 1, pipe not in place. Set a 5/8 in. bar in center of same for definite point.

FEET

Lines 1-2 and 2-3 were projected to a calculated intersection for missing point No. 2, using the record bearings of each line. Thus, line 1-2 was calculated to be N 49° 27' E, 609.546 ft. instead of N 49° 27' E, 609.0 ft. as approved. Line 2-3 was calculated to be S 50° 40' E, 1498.812 ft., instead of S 50° 40' E, 1500.0 ft. as approved.

Cor. No. 3 is a firmly set stone, scribed 3K-2791 on West face. Position for Cor. No. 2 falls in a wash, not found, no witness cor. Called in survey notes.

Line 3-4 found to be S 49° 23' 14" W, 609.7 ft. instead of S 49° 27' W, 609 ft.

Line 4-1 found to be N 50° 39' 27" W, 1499.5 ft. instead of N 50° 40' W 1500 ft.

Sur. 2791, Columbia. Cor. No. 2 is a 2" pipe and lead cap firmly set in a stone mon.

Cor. No. 3 is a stone mon. Same size & character Cor. No. 2, pipe not in place.

Other cors. not found.

FEET

Lines 1-1 and 2-3 were corrected to a calculated intersection for first point. Using the record bearings of each line, line 1-2 was calculated to be 129° 27' at 509.245 ft. Instead of 129° 27' at 509.8 ft. as approved. Line 2-3 was calculated to be 2° 40' at 129.812 ft. instead of 2° 50' at 129.8 ft. as approved.

Cor. No. 3 is a firmly set stone. 3-2501 on west face, position for cor. No. 3. Falls in a wash, not found, no witness cor. Called in survey notes.

Line 3-4 found to be 2° 40' at 609.7 ft. instead of 2° 50' at 609.8 ft.

Line 4-1 found to be 2° 40' at 129.812 ft. instead of 2° 50' at 129.8 ft.

Cor. No. 2701, Columbia, cor. No. 2. 2" iron and lead cap, found in a second point.

Cor. No. 2 is a stone with size 2" cap. Cor. No. 2, 2" iron and lead cap.

Other cor. not found.



UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

CERTIFICATE OF SURVEYOR

Name of Mineral Surveyor <b>ROBERT L. FRAZER</b>	Date <b>November 9, 1965</b>
---	---------------------------------

I HEREBY CERTIFY That in pursuance of an order received from the Division of Engineering, Bureau of Land Management at Phoenix, Arizona dated Sept. 13, Amended Oct. 1 & 28, 1965, I have carefully executed the survey of the claim of BS&K Mining Co. c/o A.H. Mackenzie, 222 N. Central Av. Phoenix, Ariz. known as the (lode, placer, or mill site) BS&K Nos. 1, 3, 4, 5, & 13, Nevada No. 2, New York, Lodes situated in Sections 28 and 33 Township 11S, Range 8E, Gila and Salt River Base and Meridian, in the State of Arizona

This survey, designated as number 4630, has been executed by me and under my direction and has been made in strict conformity with said order, the Manual of Instructions for the Survey of Public Lands of the United States, and in the specific manner described in the foregoing field notes.

I FURTHER CERTIFY That the labor expended and improvements made upon and for the benefit of the (lode or placer) location(s) embraced in the said mining claim by claimant(s) or grantors are fully stated in my report. The character, extent, location, and itemized value are specified in full detail. No portion of, or interest in, said labor and improvements so credited to this claim has been included in the estimate of expenditures upon any other claim.

*Robert L. Frazer*  
Robert L. Frazer

P.O. Box 1711, Tucson, Arizona  
(Location)

(Signature of Mineral Surveyor)

CERTIFICATE OF APPROVAL

Office <b>Arizona State Office</b>
Location <b>Phoenix, Arizona</b>
Date <b>February 3, 1966</b>

The foregoing field notes of mineral survey number 4630, in Sections 28 and 33 Township 11 S., Range 8 E., Gila and Salt River Meridian, in the State of Arizona, executed by Robert L. Frazer, Mineral Surveyor, under order dated September 13, 1965, & Amended October 1, 1965 & October 28, 1965, having been critically examined and the necessary corrections made prior to their certification by the surveyor, the field notes and the survey therein described are hereby approved.

*Riley E. Foreman*  
Riley E. Foreman  
(Authorized Signature)

*Riley E. Foreman*  
Acting State Director  
(Title)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of field notes of the above described mineral survey number is a true copy of the original field notes.

(Authorized Signature)

(Title)

Title 18, U. S. C. section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious, or fraudulent statements or representations as to any matter within its jurisdiction.

CERTIFICATE OF SURVEY

November 2, 1955

ROBERT L. FRASER

Division of Land Management  
Department of the Interior  
Bureau of Land Management  
Phoenix, Arizona

The following is a true and correct copy of the original survey as shown to me by the surveyor, Robert L. Fraser, on the 2nd day of November, 1955, at Phoenix, Arizona.

*Robert L. Fraser*

Robert L. Fraser

R. L. Fraser, Surveyor

CERTIFICATE OF SURVEY

Survey No. 1000  
Date of Survey  
November 2, 1955

The following is a true and correct copy of the original survey as shown to me by the surveyor, Robert L. Fraser, on the 2nd day of November, 1955, at Phoenix, Arizona.

*Robert L. Fraser*

Robert L. Fraser

*Robert L. Fraser*

Robert L. Fraser

CERTIFICATE OF SURVEY

The following is a true and correct copy of the original survey as shown to me by the surveyor, Robert L. Fraser, on the 2nd day of November, 1955, at Phoenix, Arizona.

SUPPLEMENTAL FIELD NOTES MINERAL SURVEY NO. 4630

F E E T

EXPENDITURES

BS&K NO. 5 LODE

No. 3


A 6-1/2 drill hole, the center of which bears S 52° 47' 57" E, 236.34 Ft. from Cor. No. 2; 6-1/2 in. diam., 140 ft. deep, @ \$3.75 per foot.

VALUE - \$525.00

The foregoing Supplemental Field Notes, covering Expenditure No. 3, B S & K No. 5 lode, Mineral Survey No. 4630, have been received and made a part of the official Field Notes for Mineral Survey No. 4630, and are hereby accepted.

MAY 5 - 1968

Date

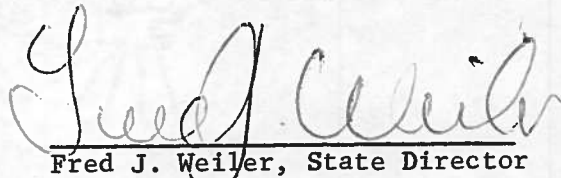  
Fred J. Weiler, State Director

FEET

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

27

REPORT OF EXPENDITURES UPON MINING CLAIM,  
FILED BY MINERAL SURVEYOR  
AFTER RETURN OF SURVEY

I, Robert L. Frazer, Mineral Surveyor,  
do certify that in pursuance of instructions received from Bureau of Land Management,  
dated February 14, 1966, I have made a personal and thorough examination upon the premises,  
to ascertain the value of the labor expended and improvements made by claimant. ~~X~~  
~~XXXXX~~ upon the mining claim of BS & K Mining Co., an Arizona Corporation  
c/o Albert H. Mackenzie, Attorney-at-Law, 1104 Security Center - 222 N.  
Central Ave., Phoenix, Ariz., known as the BS & K No. 5 Lode  
Silver Bell  
mining district, Pima  
County, Arizona, in Section 33, Township  
No. 11 South, Range No. 8 East, surveyed by me  
in Oct. & Nov., 1965, and designated as Survey No. 4630  
(October 6 to November 10)  
that the value of the labor so expended and improvements so made are as fully stated in my report of said exam-  
ination, hereto attached; that the character, extent, location, and itemized value of said improvements are speci-  
fied therein with particularity and full detail; and that no portion of said labor or improvements, so credited  
to this claim has been included in the estimate of expenditures upon any other claim.

I certify that the statements made by me in this report are true, complete, and correct to the best of my knowledge and belief, and are made in good faith.<sup>1</sup>

*Robert L. Frazer*  
Robert L. Frazer

April 28, 1966

Mineral Surveyor.

<sup>1</sup>Title 18, U. S. C., sec. 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

REPORT OF EARLY ACQUISITION UNDER MINING CLAIMS  
MADE BY MINERAL SURVEYOR  
AFTER RETURN OF SURVEY

REPORT NO. 1000

ACQUISITION OF MINING CLAIMS BY EARLY ACQUISITION UNDER MINING CLAIMS

ACQUISITION OF MINING CLAIMS BY EARLY ACQUISITION UNDER MINING CLAIMS

ACQUISITION OF MINING CLAIMS BY EARLY ACQUISITION UNDER MINING CLAIMS

ACQUISITION OF MINING CLAIMS BY EARLY ACQUISITION UNDER MINING CLAIMS

ACQUISITION OF MINING CLAIMS BY EARLY ACQUISITION UNDER MINING CLAIMS

ACQUISITION OF MINING CLAIMS BY EARLY ACQUISITION UNDER MINING CLAIMS

ACQUISITION OF MINING CLAIMS BY EARLY ACQUISITION UNDER MINING CLAIMS

ACQUISITION OF MINING CLAIMS BY EARLY ACQUISITION UNDER MINING CLAIMS

ACQUISITION OF MINING CLAIMS BY EARLY ACQUISITION UNDER MINING CLAIMS

ACQUISITION OF MINING CLAIMS BY EARLY ACQUISITION UNDER MINING CLAIMS

ACQUISITION OF MINING CLAIMS BY EARLY ACQUISITION UNDER MINING CLAIMS

ACQUISITION OF MINING CLAIMS BY EARLY ACQUISITION UNDER MINING CLAIMS

ACQUISITION OF MINING CLAIMS BY EARLY ACQUISITION UNDER MINING CLAIMS

ACQUISITION OF MINING CLAIMS BY EARLY ACQUISITION UNDER MINING CLAIMS

ACQUISITION OF MINING CLAIMS BY EARLY ACQUISITION UNDER MINING CLAIMS

ACQUISITION OF MINING CLAIMS BY EARLY ACQUISITION UNDER MINING CLAIMS

ACQUISITION OF MINING CLAIMS BY EARLY ACQUISITION UNDER MINING CLAIMS

ACQUISITION OF MINING CLAIMS BY EARLY ACQUISITION UNDER MINING CLAIMS

*[Handwritten signature]*

\_\_\_\_\_  
Mineral Surveyor

THIS REPORT WAS PREPARED BY THE BUREAU OF LAND MANAGEMENT, DEPARTMENT OF THE INTERIOR, WASHINGTON, D. C.

## AMENDED FIELD NOTES OF MINERAL SURVEY NO. 4630

FEET

In accordance with Amended Order for Survey, issued by the Bureau of Land Management on August 3, 1970, I have surveyed the Nevada No. 2 and New York lode claims of Mineral Survey No. 4630 in accordance with Amended Location Notices for these two claims, dated and recorded July 17, 1970. The locations of the Nevada No. 2 and New York lode claims were made by the Claimant, B S & K Mining Company, as described in the Amended Location Notices, in pursuance of the terms of a judgment entered in the Superior Court of Arizona, Pima County, on August 22, 1968, in Civil Cause No. 98311. The parties in that action subsequently agreed upon the areas set forth in the Amended Location Notices of said two claims, and my survey is identical with the respective amended locations as marked on the ground.


The field notes of Mineral Survey No. 4630, approved February 3, 1966, are hereby amended as set forth below:

Cover page entitled "Field Notes"

Substitute the attached cover page marked Mineral Survey number 4630 Amd.

Pages 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21 and 22

Substitute the attached pages, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, all marked Survey No. 4630 Amd.

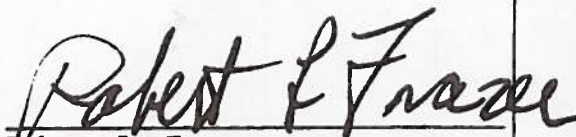

Robert L. Frazer  
U. S. Mineral Surveyor  
P. O. Box 1711  
Tucson, Arizona

November 1, 1970

The foregoing field notes of mineral survey number 4630 AMD., executed by Robert L. Frazer, Mineral Surveyor, under Amended Order dated August 3, 1970, having been critically examined and the necessary corrections made prior to their certification by the surveyor, the field notes and the survey therein described are hereby approved.

June 8, 1971



State Director

12

FEET



UNITED STATES DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
ARIZONA STATE OFFICE

9605 (942)  
M.S. 4630

---

NOTICE OF CANCELLATION OF MINERAL SURVEY

The New York, BS&K No. 3 and Nevada No. 2 lodes, Mineral Survey No. 4630, located in sections 28 and 33, Township 11 South, Range 8 East, Gila and Salt River Meridian, Arizona, are hereby canceled.

These lodes were relinquished by ASARCO Incorporated in a memo dated March 23, 1992.

This cancellation was necessitated to facilitate a proposed land exchange with ASARCO Incorporated and to clear the record.

The Mineral Survey Plat should be noted as follows:

"New York, BS&K No. 3 and Nevada No. 2 lodes, M.S. 4630 were canceled March 23, 1992, by memo 9605 (942) M.S. 4630, which is now a part of the original field notes."

March 23, 1992  
Date

  
\_\_\_\_\_  
Chief Cadastral Surveyor of Arizona

0805 1941  
M.S. 4538

ALASKA STATE DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
ALASKA STATE OFFICE

WARRANT OF EXEMPTION OF FEDERAL LANDS

The land shown on the map is situated in the Township 12 North, Range 12 East, and Section 12, Alaska. It is situated in the Township 12 North, Range 12 East, and Section 12, Alaska. It is situated in the Township 12 North, Range 12 East, and Section 12, Alaska.

This land is being relinquished by the State of Alaska in accordance with the provisions of the Act of August 10, 1955, Public Law 54-407, 70 Stat. 1091, and the Act of August 10, 1955, Public Law 54-407, 70 Stat. 1091.

This relinquishment is being made in accordance with the provisions of the Act of August 10, 1955, Public Law 54-407, 70 Stat. 1091, and the Act of August 10, 1955, Public Law 54-407, 70 Stat. 1091.

The Bureau of Land Management, Department of the Interior, is hereby notified that the State of Alaska has relinquished the above described land.

This warrant is being issued in accordance with the provisions of the Act of August 10, 1955, Public Law 54-407, 70 Stat. 1091, and the Act of August 10, 1955, Public Law 54-407, 70 Stat. 1091.

*James T. Miller*  
Special Agent in Charge

Warrant No. 1000  
1955