

Form 3400-11  
(September 1967)  
(formerly 4-683)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

Mineral Survey number	4774
State	ARIZONA
Land District	ARIZONA

FIELD NOTES

Of the Survey of the Mining Claim of *(name and address of Claimant)*  
Continental Oil Co., c/o John C. Lacey, Verity & Smith,  
Attorneys at Law, Suite 902, Transamerica Building,  
117 North Church Ave., Tucson, AZ 85701

Known as the *(name of group, if any)*

FLOR

CONSISTING OF LOCATIONS NAMED AND LOCATED AS FOLLOWS

NAME OF LOCATION	DATE	
	LOCATED	AMENDED
Flor 101	2/3/70	10/21/70
Flor. #102	2/3/70	10/21/70
Flor 103	2/3/70	10/21/70
Flor 104	2/3/70	10/21/70
Flor 105	2/3/70	2/21/70
Flor #106	2/3/70	10/21/70
Flor 107	2/3/70	10/21/70
Flor #108	2/3/70	10/21/70 7/22/74
Flor 109	2/3/70	10/21/70
Flor 110	2/3/70	10/21/70
Flor 111	2/3/70	10/21/70
Flor #112	2/3/70	10/21/70 7/22/74
Flor 113	2/3/70	10/21/70
Flor #114	2/3/70	10/21/70 7/22/74
Flor 115	2/3/70	10/21/70
Flor 116	2/3/70	10/21/70
Flor 117	2/3/70	10/21/70
Flor 118	2/3/70	10/21/70

Mining district			County	
Gila Crossing			Pinal	
Section	Township	Range	Meridian	Survey under order dated
28	4 South	9 East	Gila & Salt River	Dec. 27, 1973
Survey commenced		Survey completed	Name of Mineral Surveyor	
March 11, 1974		Sept. 30, 1974	AMD. Sept. 3, 1974 Robert L. Frazer	

ARIZONA  
ARIZONA

John C. Dacey, Verily & Smith,  
202, Tennessee Building,  
Jackson, AR 72101

10/21/70	2/3/70	101
10/21/70	2/3/70	102
10/21/70	2/3/70	103
10/21/70	2/3/70	104
2/21/70	2/3/70	105
10/21/70	2/3/70	106
10/21/70	2/3/70	107
10/21/70	2/3/70	108
10/21/70	2/3/70	109
10/21/70	2/3/70	110
10/21/70	2/3/70	111
10/21/70	2/3/70	112
10/21/70	2/3/70	113
10/21/70	2/3/70	114
10/21/70	2/3/70	115
10/21/70	2/3/70	116
10/21/70	2/3/70	117
10/21/70	2/3/70	118
10/21/70	2/3/70	119
10/21/70	2/3/70	120

Final  
John C. Dacey, Verily & Smith  
202, Tennessee Building  
Jackson, AR 72101

FEET

This survey was made with a Wilde T-2 theodolite, Serial No. 92997, with automatic vertical indexing and microscopic angle-reading capabilities enabling the instrument man to read angles, either horizontal or vertical, to 1 sec. of arc. Distances greater than 500 feet were measured with electronic distance measuring equipment, a Hewlett-Packard Model 3800 Distance Meter, having a range of 10,000 feet and an absolute accuracy of 0.01 feet plus the distance measured divided by 100,000 in the normal operating temperature range. Both of these instruments were in good condition at the time of the survey and all adjustments were in good order.

Due to the contiguity of this survey and their inclusion in the North 1/2 of sec. 28, a traverse was made of the North 1/2 of sec. 28. Closure was in the proportion of 1:88,497. Angular values, horizontal and vertical, is the mean of direct and inverse observation from the distant signal. Based on the before-mentioned traverse, the bearing of the sec. line common to secs. 28 and 29 was determined as follows:

March 28, 1974, at the cor. of secs. 20, 21, 28 and 29, T.4S., R.9E., Gila and Salt River Meridian, according to the official record thereof, in Latitude 33°03'36" N., Longitude 111°26'18" W., (as determined by scaling from U.S.G.S. quadrangle, FLORENCE, dated 1965) I made two observations of Polaris, with the following results.

Observation No. 1

Ave. 105th Meridian  
time = 9:40:48 p.m.  
G.C.T. (Mar. 29th) = 4:40:48  
L.H.A. = 113°30.9'  
Ave. clockwise angle,  
mark to Polaris = 178°52'21"  
Bearing of Polaris  
(West of Mer.) = + 0°55'35"  
  
Horiz. angle, mark  
to Polaris = 179°47'56"  
  
Bearing, West line  
of N. 1/2 Sec. 28 = S. 0°12'04" W.

FEET

Observation No. 2

Ave. 105th Meridian  
 time = 9:54:50 p.m.  
 G.C.T. (Mar. 29th) = 4:54:50  
 L.H.A. = 117°02.0'  
 Ave. clockwise angle,  
 mark to Polaris = 178°53'56"  
 Bearing of Polaris  
 (West of Mer.) = + 0°54'00"

Horiz. angle, mark  
 to Polaris = 179°47'56"

Bearing, West line of  
 N. 1/2 Sec. 28 = S. 0°12'04" W.

Used the average of the above data; sec.  
 line, sec. cor. to 1/4 sec. cor., S.  
 0°12'04" W., as a basis of bearings for  
 this survey.

The lines were measured with either a  
 Lufkin steel tape or with the afore-  
 mentioned electronic distance meter. The  
 tape was 200 feet in length, graduated  
 every foot for 200 ft., with an added  
 foot on the zero end graduated in tenths  
 and hundredths; the tape was compared  
 with a 100.00 foot standard tape at the  
 time of beginning the survey, and found  
 to be correct. Distances were read  
 twice with E.D.M. equipment. Chained  
 distances were also measured twice.

The average magnetic declination was de-  
 termined to be 14°30' E.

---

 Mineral Survey No. 4774
 

---

## FLOR 101 LODE

At Cor. No. 1 of the Flor 101 lode.

Set a steel pin, 5/8 in. diam., 30 ins.  
 long, 16 ins. in the ground, with alumi-  
 num cap mkd. MS 4774 Flor 101-1; from  
 which

The 1/4 sec. cor. of secs. 28 and  
 29, T.4S., R.9E., G. & S.R.M.,  
 Arizona, bears N. 0°12'04" E.,  
 1.66 ft. dist., monumented with  
 an iron post, 1 in. diam., 3 ins.  
 above ground, firmly set, with  
 brass cap properly mkd.

FEET	
	<p>The cor. of secs. 20, 21, 28 and 29, T.4S., R.9E., G. &amp; S.R.M., Arizona, bears N. 0°12'04" E., 2641.97 ft. dist., monumented with an iron post, 2 ins. diam., 22 ins. above ground, firmly set, with brass cap properly mkd., stone mound alongside.</p> <p style="text-align: right;">Thence N. 0°12'04" E., bet. secs. 28 and 29.</p>
1.66	<p>The 1/4 sec. cor. of secs. 28 and 29, heretofore described.</p>
715.31	<p>The center of a 30 ft. wide graded road, bears N. 76° E. and S. 76° W.</p>
901.31	<p>The centerline of an electrical transmission line, bears N. 75°34' E. and S. 75°34' W.</p>
950.	<p>Wash, 20 ft. wide, drains S. 70° W.</p>
1182.07	<p>Cor. No. 2, identical with Cor. No. 1 of the Flor. #102 lode of this survey.</p>
	<p>The location monument, a 2 in. diam. brass disc, set in a 4 in. diam. concrete filled pipe, projecting 6 ins. above ground, with brass disc mkd. MS 4774 Flor 101-2 102-1.</p> <p style="text-align: right;">Thence S. 89°54'40" E.</p>
30.	<p>Wash, 20 ft. wide, drains S. 30° E.</p>
299.72	<p>Lode line; discovery point bears S. 0°12'04" W., 50.0 ft. dist.</p>
599.72	<p>Cor. No. 3, identical with Cor. No. 4 of the Flor. #102, Cor. No. 2 of the Flor 104 and Cor. No. 2 of the Flor 103 lodes of this survey.</p>
	<p>Set a steel pin, 5/8 in. diam., 30 ins. long, 16 ins. in the ground, with aluminum cap mkd. MS 4774 Flor 101-3 102-4 104-2 103-2; from which</p> <p style="text-align: center;">A cor. of the location bears S. 6°30' W., 2.3 ft. dist.</p> <p style="text-align: right;">Thence S. 0°12'04" W.</p>
125.	<p>The centerline of an electrical transmission line, bears N. 75°34' E. and S. 75°34' W.</p>
316.	<p>The center of a 30 ft. wide graded road, bears N. 76° E. and S. 76° W. In a dip for a wash which drains S. 15° W.</p>

(This form bound on left side)

FEET	
1180.60	Intersect the E-W centerline of sec. 28, at a point from which the 1/4 sec. cor. of secs. 28 and 29 bears N. 89°53'35" W., 599.72 ft. dist.
1182.07	Cor. No. 4, identical with Cor. No. 1 of the Flor 103 lode of this survey.  Set a steel pin, 5/8 in. diam., 30 ins. long, 16 ins. in the ground, with aluminum cap mkd. MS 4774 Flor 101-4 103-1; from which  A cor. of the location bears South, 3.5 ft. dist.  Thence N. 89°54'40" W.
160.	Wash, 20 ft. wide, drains S. 10° W.
300.00	Lode line; discovery point bears N. 0°12'04" E., 1132.07 ft. dist.
599.72	Cor. No. 1, and place of beginning.
FLOR. #102 LODE	
Beginning at Cor. No. 1 of the Flor. #102 lode, identical with Cor. No. 2 of the Flor 101 lode of this survey; from which	
The cor. of secs. 20, 21, 28 and 29, bears N. 0°12'04" E., 1459.9 ft. dist., heretofore described.	
Thence N. 0°12'04" E., bet. secs. 28 and 29.	
30.	Wash, 20 ft. wide, drains S. 30° E.
1190.	Center of an old road, bears N. 60° W. and S. 60° E.
1313.31	The centerline of a 6 in. diam. gas transmission line, bears N. 42° 47'04" E. and S. 42°47'04" W.
1459.90	Cor. No. 2, identical with the cor. of secs. 20, 21, 28 and 29, heretofore described.  Thence S. 89°54'40" E., bet. secs. 21 and 28.
134.97	The centerline of a 6 in. diam. gas transmission line, bears N. 42°47'04" E. and S. 42°47'04" W.
299.72	Lode line; discovery point bears S. 0°12'04" W., 1409.9 ft. dist.

FEET	
599.72	<p>Cor. No. 3, identical with Cor. No. 3 of the Flor 104 lode of this survey.</p> <p>The location monument, a 2 in. diam. brass disc, set in a 4 in. diam. concrete filled pipe, projecting 8 ins. above ground, with brass disc mkd. MS 4774 Flor 102-3 104-3.</p> <p style="text-align: center;">Thence S. 0°12'04" W.</p>
500.	<p>Center of an old road, bears N. 77° W. and S. 77° E.</p>
1459.90	<p>Cor. No. 4, identical with Cor. No. 2 of the Flor 104, Cor. No. 2 of the Flor 103 and Cor. No. 3 of the Flor 101 lodes of this survey.</p> <p style="text-align: center;">Thence N. 89°54'40" W.</p>
300.00	<p>Lode line; discovery point bears N. 0° 12'04" E., 50.0 ft. dist.</p>
569.72	<p>Wash, 20 ft. wide, drains S. 30° E.</p>
599.72	<p>Cor. No. 1, and place of beginning.</p>
<p>FLOR 103 LODE</p>	
	<p>Beginning at Cor. No. 1 of the Flor 103 lode, identical with Cor. No. 4 of the Flor 101 lode of this survey; from which</p> <p style="text-align: center;">The 1/4 sec. cor. of secs. 28 and 29, bears N. 89°45'10" W., 599.72 ft. dist., heretofore described.</p> <p style="text-align: center;">Thence N. 0°12'04" E.</p>
1.47	<p>Intersect the E-W centerline of sec. 28, at a point from which the 1/4 sec. cor. of secs. 28 and 29 bears N. 89°53'35" W., 599.72 ft. dist.</p>
866.07	<p>The center of a 30 ft. wide graded road, bears N. 76° E. and S. 76° W. In a dip for a wash which drains S. 15° W.</p>
1057.07	<p>The centerline of an electrical transmission line, bears N. 75° 34' E. and S. 75°34' W.</p>
1182.07	<p>Cor. No. 2, identical with Cor. No. 3 of the Flor 101, Cor. No. 4 of the Flor. #102 and Cor. No. 2 of the Flor 104 lodes of this survey.</p> <p style="text-align: center;">Thence S. 89°54'40" E.</p>
75.	<p>Wash, 20 ft. wide, drains S. 10° W.</p>

(This form bound on left side)



FEET	
300.00	Lode line; discovery point bears S. 0°12'04" W., 50.0 ft. dist.
482.	The centerline of an electrical transmission line, bears N. 75° 34' E. and S. 75°34' W.
600.00	<p>Cor. No. 3, identical with Cor. No. 1 of the Flor 104, Cor. No. 2 of the Flor #106 and Cor. No. 2 of the Flor 105 lodes of this survey.</p> <p>Set a steel pin, 5/8 in. diam., 30 ins. long, 16 ins. in the ground, with aluminum cap mkd. MS 4774 Flor 103-3 104-1 106-2 105-2; from which</p> <p style="padding-left: 40px;">A cor. of the locations bears S. 0°14' W., 2.7 ft. dist.</p> <p style="padding-left: 40px;">Thence S. 0°12'04" W.</p>
165.0	The center of a 30 ft. wide graded road, bears N. 76° E. and S. 76° W.
1180.79	Intersect the E-W centerline of sec. 28, at a point from which the 1/4 sec. cor. of secs. 28 and 29 bears N. 89°53'35" W., 1199.72 ft. dist.
1182.07	<p>Cor. No. 4, identical with Cor. No. 1 of the Flor 105 lode of this survey.</p> <p>Set a steel pin, 5/8 in. diam., 30 ins. long, 16 ins. in the ground, with aluminum cap mkd. MS 4774 Flor 103-4 105-1; from which</p> <p style="padding-left: 40px;">A cor. of the location bears S. 1°30' E., 3.6 ft. dist.</p> <p style="padding-left: 40px;">Thence N. 89°54'40" W.</p>
300.00	Lode line; discovery point bears N. 0°12'04" E., 1132.07 ft. dist.
530.	Center of an old road, bears North and South.
600.00	Cor. No. 1, and place of beginning.
FLOR 104 LODE	
<p>Beginning at Cor. No. 1 of the Flor 104 lode, identical with Cor. No. 2 of the Flor #106, Cor. No. 2 of the Flor 105 and Cor. No. 3 of the Flor 103 lodes of this survey; from which</p>	



FEET	
	<p>The cor. of secs. 20, 21, 28 and 29, bears N. 39°15'25" W., 1887.8 ft. dist., heretofore described.</p> <p style="text-align: center;">Thence N. 89°54'40" W.</p>
118.	The centerline of an electrical transmission line, bears N. 75°34' E. and S. 75°34' W.
300.00	Lode line; discovery point bears N. 0°12'04" E., 50.0 ft. dist.
525.	Wash, 20 ft. wide, drains S. 10° W.
600.00	Cor. No. 2, identical with Cor. No. 2 of the Flor 103, Cor. No. 3 of the Flor 101 and Cor. No. 4 of the Flor. #102 lodes of this survey.
	Thence N. 0°12'04" E.
959.90	Center of an old road, bears N. 77° W. and S. 77° E.
1459.90	Cor. No. 3, identical with Cor. No. 3 of the Flor. #102 lode of this survey.
	Thence S. 89°54'40" E., bet. secs. 21 and 28.
90.	Wash, 20 ft. wide, drains S. 5° W.
300.00	Lode line; discovery point bears S. 0°12'04" W., 1409.9 ft. dist.
600.00	Cor. No. 4, identical with Cor. No. 3 of the Flor #106 lode of this survey.
	The location monument, a 2 in. diam. brass disc, set in a 4 in. diam. concrete filled pipe, projecting 8 ins. above ground, with brass disc mkd. MS 4774 Flor 104-4 106-3.
	Thence S. 0°12'04" W.
630.	Center of an old road, bears S. 77° E. and N. 77° W.
1428.90	The centerline of an electrical transmission line, bears N. 75°34' E. and S. 75°34' W.
1459.90	Cor. No. 1, and place of beginning.
<hr/>	
FLOR 105 LODE	
Beginning at Cor. No. 1 of the Flor 105 lode, identical with Cor. No. 4 of the Flor 103 lode of this survey; from which	

FEET	
	<p>The 1/4 sec. cor. of secs. 28 and 29, bears N. 89°49'55" W., 1199.72 ft. dist., heretofore described.</p> <p>Thence N. 0°12'04" E.</p>
1.28	Intersect the E-W centerline of sec. 28, at a point from which the 1/4 sec. cor. of secs. 28 and 29 bears N. 89°53'35" W., 1199.72 ft. dist.
1017.07	The center of a 30 ft. wide graded road, bears N. 76° E. and S. 76° W.
1182.07	<p>Cor. No. 2, identical with Cor. No. 3 of the Flor 103, Cor. No. 1 of the Flor 104 and Cor. No. 2 of the Flor #106 lodes of this survey.</p> <p>Thence S. 89°54'40" E.</p>
300.00	Lode line; discovery point bears S. 0°12'04" W., 172.0 ft. dist.
500.00	<p>Point selected for witness Cor. No. 3, identical with Cor. No. 1 of the Flor #106, Cor. No. 2 of the Flor #108 and Cor. No. 2 of the Flor 107 lodes of this survey.</p> <p>Set a steel pin, 5/8 in. diam., 30 ins. long, 16 ins. in the ground, with aluminum cap mkd. MS 4774 W.C. Flor 105-3 106-1 108-2 107-2.</p>
600.00	<p>Cor. No. 3, identical with Cor. No. 1 of the Flor #106, Cor. No. 2 of the Flor #108 and Cor. No. 2 of the Flor 107 lodes of this survey, falls in a graded road impractical to monument.</p> <p>Thence S. 0°12'04" W.</p>
14.	The center of a 30 ft. wide graded road, bears N. 76° E. and S. 76° W.
1180.98	Intersect the E-W centerline of sec. 28, at a point from which the 1/4 sec. cor. of secs. 28 and 29 bears N. 89°53'35" W., 1799.72 ft. dist.
1182.07	<p>Cor. No. 4, identical with Cor. No. 1 of the Flor 107 lode of this survey.</p> <p>Set a steel pin, 5/8 in. diam., 30 ins. long, 16 ins. in the ground, with aluminum cap mkd. MS 4774 Flor 105-4 107-1.</p> <p>Thence N. 89°54'40" W.</p>
300.00	Lode line; discovery point bears N. 0°12'04" E., 1010.07 ft. dist.
590.	Center of an old road, bears N. 20° E. and S. 20° W.

FEET	
600.00	Cor. No. 1, and place of beginning
<hr/> FLOR #106 LODE	
Beginning at Cor. No. 1 of the Flor #106 lode, identical with Cor. No. 2 of the Flor #108, Cor. No. 2 of the Flor 107 and Cor. No. 3 of the Flor 105 lodes of this survey, falls in a graded road impractical to monument; from which	
<p style="text-align: center;">The cor. of secs. 20, 21, 28 and 29, bears N. 50°49'05" W., 2315.17 ft. dist., heretofore described.</p>	
<p style="text-align: center;">Thence N. 89° 54'40" W.</p>	
100.00	Witness Cor. No. 1, identical with Cor. No. 2 of the Flor #108, Cor. No. 2 of the Flor 107 and Cor. No. 3 of the Flor 105 lodes of this survey, heretofore described.
300.00	Lode line; discovery point bears N. 0°12'04" E., 137.0 ft. dist.
600.00	Cor. No. 2, identical with Cor. No. 2 of the Flor 105, Cor. No. 3 of the Flor 103 and Cor. No. 1 of the Flor 104 lodes of this survey.
<p style="text-align: center;">Thence N. 0°12'04" E.</p>	
31.	The centerline of an electrical transmission line, bears N. 75°34' E. and S. 75°34' W.
829.90	Center of an old road, bears N. 77° W. and S. 77° E.
1459.90	Cor. No. 3, identical with Cor. No. 4 of the Flor 104 lode of this survey.
<p style="text-align: center;">Thence S. 89°54'40" E., bet. secs. 21 and 28.</p>	
213.91	A railroad right of way line, bears S. 51°30'56" E. and N. 51°30'56" W.
300.00	Lode line; discovery point bears S. 0°12'04" W., 1322.9 ft. dist.
374.92	A railroad centerline, bears S. 51°30'56" E. and N. 51°30'56" W.
535.93	A railroad right of way line, bears S. 51°30'56" E. and N. 51°30'56" W.
600.00	Cor. No. 4, identical with Cor. No. 3 of the Flor #108 lode of this survey.

(This form bound on left side)

FEET	
	<p>Set a steel pin, 5/8 in. diam., 30 ins. long, 16 ins. in the ground, with aluminum cap mkd. MS 4774 Flor 106-4 108-3; from which</p> <p style="padding-left: 40px;">A cor. of the location bears S. 89°55' E., 1.3 ft. dist.</p> <p style="padding-left: 80px;">Thence S. 0°12'04" W.</p>
50.70	A railroad right of way line, bears N. 51°30'56" W. and S. 51°30'56" E.
178.10	A railroad centerline, bears N. 51°30'56" W. and S. 51°30'56" E.
305.49	A railroad right of way line, bears N. 51°30'56" W. and S. 51°30'56" E.
795.	Center of an old road, bears S. 77° E. and N. 77° W.
1273.90	The centerline of an electrical transmission line, bears N. 75°34' E. and S. 75°34' W.
1459.90	Cor. No. 1, and place of beginning.
FLOR 107 LODE	
	<p>Beginning at Cor. No. 1 of the Flor 107 lode, identical with Cor. No. 4 of the Flor 105 lode of this survey; from which</p> <p style="padding-left: 40px;">The 1/4 sec. cor. of secs. 28 and 29, bears N. 89°51'30" W., 1799.72 ft. dist., heretofore described.</p> <p style="padding-left: 80px;">Thence N. 0°12'04" E.</p>
1.09	Intersect the E-W centerline of sec. 28, at a point from which the 1/4 sec. cor. of secs. 28 and 29 bears N. 89°53'35" W., 1799.72 ft. dist.
1168.07	The center of a 30 ft. wide graded road, bears N. 76° E. and S. 76° W.
1182.07	Cor. No. 2, identical with Cor. No. 3 of the Flor 105, Cor. No. 1 of the Flor #106 and Cor. No. 2 of the Flor #108 lodes of this survey, falls in a graded road impractical to monument, witnessed N. 89°54'40" W., 100.0 ft. dist.
	Thence S. 89°54'40" E.
56.	The center of a 30 ft. wide graded road, bears N. 76° E. and S. 76° W.
270.	Wash, 20 ft. wide, drains S. 10° E.

FEET	
300.00	Lode line; discovery point bears S. 0°12'04" W., 50.0 ft. dist.
600.00	Cor. No. 3, identical with Cor. No. 1 of the Flor #108, Cor. No. 2 of the Flor 110 and Cor. No. 2 of the Flor 109 lodes of this survey.  Set a steel pin, 5/8 in. diam., 30 ins. long, 16 ins. in the ground, with aluminum cap mkd. MS 4774 Flor 107-3 108-1 110-2 109-2; from which  A cor. of the location bears S. 16° W., 5.5 ft. dist.  Thence S. 0°12'04" W.
1181.17	Intersect the E-W centerline of sec. 28, at a point from which the 1/4 sec. cor. of secs. 28 and 29 bears N. 89°53'35" W., 2399.72 ft. dist.
1182.07	Cor. No. 4, identical with Cor. No. 1 of the Flor 109 lode of this survey.  Set a steel pin, 5/8 in. diam., 30 ins. long, 16 ins. in the ground, with aluminum cap mkd. MS 4774 Flor 107-4 109-1; from which  A cor. of the location bears South, 4.5 ft. dist.  Thence N. 89°54'40" W.
300.00	Lode line; discovery point bears N. 0°12'04" E., 1132.07 ft. dist.
550.	Wash, 20 ft. wide, drains S. 20° W.
600.00	Cor. No. 1, and place of beginning.
<hr/> FLOR #108 LODE <hr/>	
	Beginning at Cor. No. 1 of the Flor #108 lode, identical with Cor. No. 2 of the Flor 110, Cor. No. 2 of the Flor 109 and Cor. No. 3 of the Flor 107 lodes of this survey; from which  The cor. of secs. 20, 21, 28 and 29, bears N. 58° 33' 55" W., 2806.46 ft. dist., heretofore described.  Thence N. 89°54'40" W.
300.00	Lode line; discovery point bears N. 0°12'04" E., 330.0 ft. dist.
330. 544.	Wash, 20 ft. wide, drains S. 10° E. The center of a 30 ft. wide graded road, bears N. 76° E. and S. 76° W.

(This form bound on left side)

FEET	
600.00	<p>Cor. No. 2, identical with Cor. No. 2 of the Flor 107, Cor. No. 3 of the Flor 105 and Cor. No. 1 of the Flor #106 lodes of this survey, falls in a graded road, impractical to monument, witnessed N. 89°54'40" W., 100.0 ft. dist.</p> <p style="text-align: center;">Thence N. 0°12'04" E.</p>
186.	<p>The centerline of an electrical transmission line, bears N. 75°34' E. and S. 75°34' W.</p>
664.90	<p>Center of an old road, bears N. 77° W. and S. 77° E.</p>
1154.41	<p>A railroad right of way line, bears N. 51°30'56" W. and S. 51°30'56" E.</p>
1281.80	<p>A railroad centerline, bears N. 51°30'56" W. and S. 51°30'56" E.</p>
1409.20	<p>A railroad right of way line, bears N. 51°30'56" W. and S. 51°30'56" E.</p>
1459.90	<p>Cor. No. 3, identical with Cor. No. 4 of the Flor #106 lode of this survey.</p> <p style="text-align: center;">Thence S. 89°54'40" E., bet. secs. 21 and 28.</p>
300.00	<p>Lode line; discovery point bears S. 0°12'04" W., 1129.9 ft. dist.</p>
600.00	<p>Cor. No. 4, identical with Cor. No. 3 of the Flor 110 lode of this survey.</p> <p>Set a steel pin, 5/8 in. diam., 30 ins. long, 16 ins. in the ground, with aluminum cap mkd. MS 4774 Flor 108-4 110-3; from which</p> <p style="text-align: center;">A cor. of the location bears S. 89°55' E., 1.3 ft. dist.</p> <p style="text-align: center;">Thence S. 0°12'04" W.</p>
290.	<p>The center of an earth dam, bears East and West.</p>
525.44	<p>A railroad right of way line, bears N. 51°30'56" W. and S. 51°30'56" E.</p>
652.84	<p>A railroad centerline, bears N. 51°30'56" W. and S. 51°30'56" E.</p>
780.23	<p>A railroad right of way line, bears N. 51°30'56" W. and S. 51°30'56" E.</p>
960.	<p>Center of an old road, bears N. 77° W. and S. 77° E.</p>
1118.90	<p>The centerline of an electrical transmission line, bears N. 75°34' E. and S. 75°34' W.</p>



FEET	
1322.90	The center of a 30 ft. wide graded road, bears N. 76° E. and S. 76° W.
1459.90	Cor. No. 1, and place of beginning.
<hr/> <p>FLOR 109 LODE</p>	
	Beginning at Cor. No. 1 of the Flor 109 lode, identical with Cor. No. 4 of the Flor 107 lode of this survey; from which
	The 1/4 sec. cor. of secs. 28 and 29, bears N. 89°52'15" W., 2399.72 ft. dist., heretofore described.
	Thence N. 0°12'04" E.
0.90	Intersect the E-W centerline of sec. 28, at a point from which the 1/4 sec. cor. of secs. 28 and 29 bears N. 89°53'35" W., 2399.72 ft. dist.
1182.07	Cor. No. 2, identical with Cor. No. 3 of the Flor 107, Cor. No. 1 of the Flor #108 and Cor. No. 2 of the Flor 110 lodes of this survey.
	Thence S. 89°54'40" E.
300.00	Lode line; discovery point bears S. 0°12'04" W., 50.0 ft. dist.
475.	Center of a bladed road, bears S. 20° W. and N. 20° E.
600.00	Cor. No. 3, identical with Cor. No. 1 of the Flor 110, Cor. No. 2 of the Flor #112 and Cor. No. 2 of the Flor 111 lodes of this survey.
	Set a steel pin, 5/8 in. diam., 30 ins. long, 16 ins. in the ground, with aluminum cap mkd MS 4774 Flor 109-3 110-1 112-2 111-2; from which
	A cor. of the location bears South, 4.0 ft. dist.
	Thence S. 0°12'04" W.
1181.35	Intersect the E-W centerline of sec. 28, at a point from which the 1/4 sec. cor. of secs. 28 and 29 bears N. 89°53'35" W., 2999.72 ft. dist.
1182.07	Cor. No. 4, identical with Cor. No. 1 of the Flor 111 lode of this survey.
	Set a steel pin, 5/8 in. diam., 30 ins. long, 16 ins. in the ground, with aluminum cap mkd. MS 4774 Flor 109-4 111-1.

(This form bound on left side)



FEET	
	Thence N. 89°54'40" W.
300.00	Lode line; discovery point bears N. 0°12'04" E., 1132.07 ft. dist.
510.	Center of a bladed road, bears S. 10° E. and N. 10° W.
575.	Center of a bladed road, bears N. 20° E. and S. 20° W.
600.00	Cor. No. 1, and place of beginning.
FLOR 110 LODE	
	Beginning at Cor. No. 1 of the Flor 110 lode, identical with Cor. No. 2 of the Flor #112, Cor. No. 2 of the Flor 111 and Cor. No. 3 of the Flor 109 lodes of this survey; from which
	The cor. of secs. 21, 22, 27 and 28, T.4S., R.9E., G. & S.R.M., Arizona, bears N. 57°31'20" E., 2712.2 ft. dist., monumented with an iron post, 2 ins. diam., 22 ins. above ground, firmly set, with brass cap properly mkd., stone mound alongside.
	Thence N. 89°54'40" W.
125.	Center of a bladed road, bears S. 20° W. and N. 20° E.
300.00	Lode line; discovery point bears N. 0°12'04" E., 50.0 ft. dist.
600.00	Cor. No. 2, identical with Cor. No. 2 of the Flor 109, Cor. No. 3 of the Flor 107 and Cor. No. 1 of the Flor #108 lodes of this survey.
	Thence N. 0°12'04" E.
137.	The center of a 30 ft. wide graded, road, bears N. 76° E. and S. 76° W.
341.	The centerline of an electrical transmission line, bears N. 75°34' E. and S. 75°34' W.
499.90	Center of an old road, bears N. 77° W. and S. 77° E.
679.67	A railroad right of way line, bears N. 51°30'56" W. and S. 51°30'56" E. The point of a curve of 2010.08 ft. radius bears S. 51°30'56" E., 49.16 ft. dist.

FEET	
807.06	A railroad centerline, bears N. 51°30'56" W. and S. 51°30'56" E. The point of a curve of 1910.08 ft. radius bears S. 51°30'56" E., 128.08 ft. dist.
934.46	A railroad right of way line, bears N. 51°30'56" W. and S. 51°30'56" E. The point of a curve of 1810.08 ft. radius bears S. 51°30'56" E., 207.01 ft. dist.
1169.90	The center of an earth dam, bears East and West.
1459.90	Cor. No. 3, identical with Cor. No. 4 of the Flor #108 lode of this survey.  Thence S. 89°54'40" E., bet. secs. 21 and 28.
60.	Wash, 30 ft. wide, drains S. 25° W.
241.60	The proportioned position for the 1/4 sec. cor. of secs. 21 and 28. No monument recovered.
300.00	Lode line; discovery point bears S. 0°12'04" W., 1409.9 ft. dist.
600.00	Cor. No. 4, identical with Cor. No. 3 of the Flor #112 lode of this survey.  The location monument, a 2 in. diam. brass disc, set in a 4 in. diam. concrete filled pipe, projecting 8 ins. above ground, with brass disc mkd. MS 4774 Flor 110-4 112-3.  Thence S. 0°12'04" W.
909.93	A railroad right of way line, at a point on a curve of 1810.08 ft. radius, 508.06 ft. dist. on the arc of the curve, through a central angle of 16°04'55", Southeasterly from the point of curve.
930.	Center of a road, bears S. 70° E. and N. 70° W.
963.90	The centerline of an electrical transmission line, bears N. 75°34' E. and S. 75°34' W.
1017.06	A railroad centerline, at a point on a curve of 1910.08 ft. radius, 576.61 ft. dist. on the arc of the curve, through a central angle of 17°17'47", Southeasterly from the point of curve.

FEET	
1124.18	A railroad right of way line, at a point on a curve of 2010.08 ft. radius, 645.16 ft. dist. on the arc of the curve, through a central angle of 18°23'24", Southeasterly from the point of curve.
1234.90	The center of a 30 ft. wide graded road, at a point on a curve concave to the South.
1459.90	Cor. No. 1, and place of beginning.
FLOR 111 LODE	
Beginning at Cor. No. 1 of the Flor 111 lode, identical with Cor. No. 4 of the Flor 109 lode of this survey; from which	
The 1/4 sec. cor. of secs. 27 and 28, T.4S., R.9E. G. & S.R.M., Arizona, bears S. 89°54'40" E., 2266.63 ft. dist., monumented with an iron post, 1 in. diam., 3 ins. above ground, firmly set, with brass cap properly mkd., stone mound alongside.	
Thence N. 0°12'04" E.	
0.72	Intersect the E-W centerline of sec. 28, at a point from which the 1/4 sec. cor. of secs. 28 and 29 bears N. 89°53'35" W., 2999.72 ft. dist.
1182.07	Cor. No. 2, identical with Cor. No. 3 of the Flor 109, Cor. No. 1 of the Flor 110 and Cor. No. 2 of the Flor #112 lodes of this survey.
Thence S. 89°54'40" E.	
300.00	Lode line; discovery point bears S. 0°12'04" W., 50.0 ft. dist.
600.00	Cor. No. 3, identical with Cor. No. 1 of the Flor #112, Cor. No. 2 of the Flor #114 and Cor. No. 2 of the Flor 113 lodes of this survey.
Set a steel pin, 5/8 in. diam., 30 ins. long, 16 ins. in the ground, with aluminum cap mkd. MS 4774 Flor 111-3 112-1 114-2 113-2; from which	
A cor. of the location bears S. 12°30' W., 7.6 ft. dist.	
Thence S. 0°12'04" W.	

FEET	
1181.54	Intersect the E-W centerline of sec. 28, at a point from which the 1/4 sec. cor. of secs. 28 and 29 bears N. 89°53'35" W., 3599.72 ft. dist.
1182.07	Cor. No. 4, identical with Cor. No. 1 of the Flor 113 lode of this survey.  Set a steel pin, 5/8 in. diam., 30 ins. long, 16 ins. in the ground, with aluminum cap mkd. MS 4774 Flor 111-4 113-1; from which  A cor. of the location bears S. 5° E., 4.6 ft. dist.  Thence N. 89°54'40" W.
300.00	Lode line; discovery point bears N. 0°12'04"E., 1132.07 ft. dist.
600.00	Cor. No. 1, and place of beginning.
<hr/>	
FLOR #112 LODE	
	Beginning at Cor. No. 1 of the Flor #112 lode, identical with Cor. No. 2 of the Flor #114, Cor. No. 2 of the Flor 113 and Cor. No. 3 of the Flor 111 lodes of this survey; from which  The cor. of secs. 21, 22, 27 and 28, bears N. 49°11'45" E., 2230.05 ft. dist., heretofore described.  Thence N. 89°54'40" W.
300.00	Lode line; discovery point bears N. 0°12'04" E., 50.0 ft. dist.
600.00	Cor. No. 2, identical with Cor. No. 2 of the Flor 111, Cor. No. 3 of the Flor 109 and Cor. No. 1 of the Flor 110 lodes of this survey.  Thence N. 0°12'04" E.
225.	The center of a 30 ft. wide graded road, at a point on a curve concave to the South.

FEET	
335.72	A railroad right of way line, at a point on a curve of 2010.08 ft. radius, 178.33 ft. dist. on the arc of the curve, through a central angle of 5°04'59", Northwesterly from the point of tangency.
442.84	A railroad centerline, at a point on a curve of 1910.08 ft. radius, 205.91 ft. dist. on the arc of the curve, through a central angle of 6°10'36", Northwesterly from the point of tangency.
496.	The centerline of an electrical transmission line, bears N. 75°34' E. and S. 75°34' W.
529.90	Center of a road, bears N. 70° W. and S. 70° E.
549.97	A railroad right of way line, at a point on a curve of 1810.08 ft. radius, 233.5 ft. dist. on the arc of the curve, through a central angle of 7°23'28", Northwesterly from the point of tangency.
1459.90	Cor. No. 3, identical with Cor. No. 4 of the Flor 110 lode of this survey.  Thence S. 89°54'40" E., bet. secs. 21 and 28.
300.00	Lode line; discovery point bears S. 0°12'04" W., 1409.9 ft. dist.

FEET	
600.00	<p>Cor. No. 4, identical with Cor. No. 3 of the Flor #114 lode of this survey.</p> <p>The location monument, a 2 in. diam. brass disc, set in a 4 in. diam. concrete filled pipe, projecting 8 ins. above ground, with brass disc mkd. MS 4774 Flor 112-4 114-3.</p> <p style="text-align: center;">Thence S. 0°12'04" W.</p>
800.	<p>Center of a road, bears N. 75° E. and S. 75° W.</p>
808.90	<p>The centerline of an electrical transmission line bears N. 75°34' E. and S. 75°34' W.</p>
1085.30	<p>A railroad right of way line, bears N. 74°59'19" W. and S. 74°59'19" E. The point of tangency of a curve of 1810.08 ft. radius bears N. 74°59'19" W., 391.71 ft. dist.</p>
1188.74	<p>A railroad centerline, bears N. 74°59'19" W. and S. 74°59'19" E. The point of tangency of a curve of 1910.08 ft. radius bears N. 74°59'19" W., 418.15 ft. dist.</p>
1292.17	<p>A railroad right of way line, bears N. 74°59'19" W. and S. 74°59'19" E. The point of tangency of a curve of 2010.08 ft. radius bears N. 74°59'19" W., 444.59 ft. dist.</p>
1353.90	<p>The center of a 30 ft. wide graded road, bears S. 75° E. and N. 75° W.</p>
1459.90	<p>Cor. No. 1, and place of beginning.</p>
<hr/> <p>FLOR 113 LODE</p>	
<p>Beginning at Cor. No. 1 of the Flor 113 lode, identical with Cor. No. 4 of the Flor 111 lode of this survey; from which</p>	
<p style="text-align: center;">The 1/4 sec. cor. of secs. 27 and 28, bears S. 89°54'40" E., 1666.63 ft. dist., heretofore described.</p>	
<p style="text-align: center;">Thence N. 0°12'04" E.</p>	
0.53	<p>Intersect the E-W centerline of sec. 28, at a point from which the 1/4 sec. cor. of secs. 28 and 29 bears N. 89°53'35" W., 3599.72 ft. dist.</p>
1182.07	<p>Cor. No. 2, identical with Cor. No. 3 of the Flor 111, Cor. No. 1 of the Flor #112 and Cor. No. 2 of the Flor #114 lodes of this survey.</p>



FEET	
	Thence S. 89°54'40" E.
300.00	Lode line; discovery point bears S. 0°12'04" W., 162.0 ft. dist.
397.	The centerline of a 24 ft. wide asphalt paved road, bears N. 75° W. and S. 75° E.
600.00	Cor. No. 3, identical with Cor. No. 1 of the Flor #114, Cor. No. 2 of the Flor 116 and Cor. No. 2 of the Flor 115 lodes of this survey.  Set a steel pin, 5/8 in. diam., 30 ins. long, 16 ins. in the ground, with aluminum cap mkd. MS 4774 Flor 113-3 114-1 116-2 115-2; from which  A cor. of the location bears S. 12° W., 9.3 ft. dist.  Thence S. 0°12'04" W.
54.	The centerline of a 24 ft. wide asphalt paved road, bears S. 75° E. and N. 75° W.
1122.07	Wash, 20 ft. wide, drains S. 15° W.
1181.73	Intersect the E-W centerline of sec. 28, at a point from which the 1/4 sec. cor. of secs. 28 and 29 bears N. 89°53'35" W., 4199.72 ft. dist.
1182.07	Cor. No. 4, identical with Cor. No. 1 of the Flor 115 lode of this survey.  Set a steel pin, 5/8 in. diam., 30 ins. long, 16 ins. in the ground, with aluminum cap mkd. MS 4774 Flor 113-4 115-1; from which  A cor. of the location bears South, 5.0 ft. dist.  Thence N. 89°54'40" W.
10.	Wash, 20 ft. wide, drains S. 15° W.
300.00	Lode line; discovery point bears N. 0°12'04" E., 1020.07 ft. dist.
600.00	Cor. No. 1, and place of beginning.
	<hr/> FLOR #114 LODE
	Beginning at Cor. No. 1 of the Flor #114 lode, identical with Cor. No. 2 of the Flor 116, Cor. No. 2 of the Flor 115 and Cor. No. 3 of the Flor 113 lodes of this survey; from which



FEET	
	<p>The cor. of secs. 21, 22, 27 and 28, bears N. 36°43'40" E., 1819.4 ft. dist., heretofore described.</p> <p>Thence N. 89°54'40" W.</p>
203.	The centerline of a 24 ft. wide asphalt paved road, bears N. 75° W. and S. 75° E.
300.00	Lode line; discovery point bears N. 0°12'04" E., 360.0 ft. dist.
600.00	<p>Cor. No. 2, identical with Cor. No. 2 of the Flor 113, Cor. No. 3 of the Flor 111 and Cor. No. 1 of the Flor #112 lodes of this survey.</p> <p>Thence N. 0°12'04" E.</p>
106.	The center of a 30 ft. wide graded road, bears N. 75° W. and S. 75° E.
167.73	A railroad right of way line, bears N. 74°59'19" W. and S. 74°59'19" E.
271.16	A railroad centerline, bears N. 74°59'19" W. and S. 74°59'19" E.
374.60	A railroad right of way line, bears N. 74°59'19" W. and S. 74°59'19" E.
651.	The centerline of an electrical transmission line, bears N. 75°34' E. and S. 75°34' W.
659.90	Center of a road, bears N. 75° E. and S. 75° W.
1459.90	<p>Cor. No. 3, identical with Cor. No. 4 of the Flor #112 lode of this survey.</p> <p>Thence S. 89°54'40" E., bet. secs. 21 and 28.</p>
300.00	Lode line; discovery point bears S. 0°12'04" W., 1099.9 ft. dist.
600.00	<p>Cor. No. 4, identical with Cor. No. 3 of the Flor 116 lode of this survey.</p> <p>Set a steel pin, 5/8 in. diam., 30 ins. long, 16 ins. in the ground, with aluminum cap mkd. MS 4774 Flor 114-4 116-3; from which</p> <p>A cor. of the location bears North, 0.3 ft. dist.</p> <p>Thence S. 0°12'04" W.</p>
590.	Wash, 10 ft. wide, drains S. 50° E.

(This form bound on left side)

FEET	
653.90	The centerline of an electrical transmission line, bears N. 75°34' E. and S. 75°34' W.
660	Center of a road, bears N. 80° E. and S. 80° W.
1245.12	A railroad right of way line, bears N. 74°59'19" W. and S. 74°59'19" E.
1348.56	A railroad centerline, bears N. 74°59'19" W. and S. 74°59'19" E.
1451.99	A railroad right of way line, bears N. 74°59'19" W. and S. 74°59'19" E.
1459.90	Cor. No. 1, and place of beginning
FLOR 115 LODE	
Beginning at Cor. No. 1 of the Flor 115 lode, identical with Cor. No. 4 of the Flor 113 lode of this survey; from which	
The 1/4 sec. cor. of secs. 27 and 28, bears S. 89°54'40" E., 1066.63 ft. dist., heretofore described.	
Thence N. 0°12'04" E.	
0.34	Intersect the E-W centerline of sec. 28, at a point from which the 1/4 sec. cor. of secs. 28 and 29 bears N. 89°53'35" W., 4199.72 ft. dist.
60.	Wash, 20 ft. wide, drains S. 15° W.
1128.07	The centerline of a 24 ft. wide asphalt paved road, bears N. 75° W. and S. 75° E.
1182.07	Cor. No. 2, identical with Cor. No. 3 of the Flor 113, Cor. No. 1 of the Flor #114 and Cor. No. 2 of the Flor 116 lodes of this survey.
Thence S. 89°54'40" E.	
29.71	A railroad right of way line, bears N. 74°59'19" W. and S. 74°59'19" E.
300.00	Lode line; discovery point bears S. 0°12'04" W., 305.0 ft. dist.
418.04	A railroad centerline, bears N. 74°59'19" W. and S. 74°59'19" E.
480.	Washes pond at railroad, no defined drainage.
600.00	Cor. No. 3, identical with Cor. No. 1 of the Flor 116, Cor. No. 2 of the Flor 118 and Cor. No. 2 of the Flor 117 lodes of this survey.

FEET	
	<p>Set a steel pin, 5/8 in. diam., 30 ins. long, 16 ins. in the ground, with aluminum cap mkd. MS 4774 Flor 115-3 116-1 118-2 117-2; from which</p> <p style="padding-left: 40px;">A cor. of the location bears S. 23° W., 11.7 ft. dist.</p> <p style="padding-left: 80px;">Thence S. 0°12'04" W.</p>
48.47	A railroad centerline, bears N. 74°59'19" W. and S. 74°59'19" E.
151.90	A railroad right of way line, bears S. 74°59'19" E. and N. 74°59'19" W.
214.	The centerline of a 24 ft. wide asphalt paved road, bears N. 75° W. and S. 75° E.
1181.92	Intersect the E-W centerline of sec. 28, at a point from which the 1/4 sec. cor. of secs. 28 and 29 bears N. 89°53'35" W., 4799.72 ft. dist.
1182.07	<p>Cor. No. 4, identical with Cor. No. 1 of the Flor 117 lode of this survey.</p> <p>Set a steel pin, 5/8 in. diam., 30 ins. long, 16 ins. in the ground, with aluminum cap mkd. MS 4774 Flor 115-4 117-1; from which</p> <p style="padding-left: 40px;">A cor. of the location bears S. 3° E., 5.0 ft. dist.</p> <p style="padding-left: 80px;">Thence N. 89°54'40" W.</p>
300.00	Lode line; discovery point bears N. 0°12'04" E., 877.07 ft. dist.
600.00	Cor. No. 1, and place of beginning.
<hr/> <p>FLOR 116 LODE</p>	
	<p>Beginning at Cor. No. 1 of the Flor 116 lode, identical with Cor. No. 2 of the Flor 118, Cor. No. 2 of the Flor 117 and Cor. No. 3 of the Flor 115 lodes of this survey; from which</p> <p style="padding-left: 40px;">The cor. of secs. 21, 22, 27 and 28, bears N. 18°29'35" E., 1538.6 ft. dist., heretofore described.</p> <p style="padding-left: 80px;">Thence N. 89°54'40" W.</p>
120.	Washes pond at railroad, no defined drainage.
181.96	A railroad centerline, bears N. 74°59'19" W. and S. 74°59'19" E.

(This form bound on left side)

FEET	
300.00	Lode line; discovery point bears N. 0°12'04" E., 165.0 ft. dist.
570.29	A railroad right of way line, bears N. 74°59'19" W. and S. 74°59'19" E.
600.00	Cor. No. 2, identical with Cor. No. 2 of the Flor 115, Cor. No. 3 of the Flor 113 and Cor. No. 1 of the Flor #114 lodes of this survey.
	Thence N. 0°12'04" E.
7.91	A railroad right of way line, bears N. 74°59'19" W. and S. 74°59'19" E.
111.34	A railroad centerline, bears N. 74°59'19" W. and S. 74°59'19" E.
214.78	A railroad right of way line, bears N. 74°59'19" W. and S. 74°59'19" E.
799.90	Center of a road, bears N. 80° E. and S. 80° W.
806.	The centerline of an electrical transmission line, bears N. 75°34' E. and S. 75°34' W.
869.90	Wash, 10 ft. wide, drains S. 50° E.
1459.90	Cor. No. 3, identical with Cor. No. 4 of the Flor #114 lode of this survey.
	Thence S. 89°54'40" E., bet. secs. 21 and 28.
300.00	Lode line; discovery point bears S. 0°12'04" W., 1294.9 ft. dist.
400.	Wash, 10 ft. wide, drains S. 25° E.
600.00	Cor. No. 4, identical with Cor. No. 3 of the Flor 118 lode of this survey.
	The location monument, a 2 in. diam. brass disc, set in a 4 in. diam. concrete filled pipe, projecting 6 ins. above ground, with brass disc mkd. MS 4774 Flor 116-4 118-3.
	Thence S. 0°12'04" W.
50.	Wash, 10 ft. wide, drains S. 30° W.
470	Wash, 10 ft. wide, drains S. 45° E.
498.90	The centerline of an electrical transmission line, bears S. 75°34' W. and N. 75°34' E.
510.	Center of a road, bears N. 75° E. and S. 75° W.

FEET	
670.	Wash, 10 ft. wide, drains S. 10° W.
1404.93	A railroad right of way line, bears S. 74°59'19" E. and N. 74°59'19" W.
1459.90	Cor. No. 1, and place of beginning.
FLOR 117 LODE	
Beginning at Cor. No. 1 of the Flor 117 lode, identical with Cor. No. 4 of the Flor 115 lode of this survey; from which	
The 1/4 sec. cor. of secs. 27 and 28, bears S. 89°54'40" E., 466.63 ft. dist., heretofore described.	
Thence N. 0°12'04" E.	
0.15	Intersect the E-W centerline of sec. 28, at a point from which the 1/4 sec. cor. of secs. 28 and 29 bears N. 89°53'35" W., 4799.72 ft. dist.
968.07	The centerline of a 24 ft. wide asphalt paved road, bears N. 75° W. and S. 75° E.
1030.17	A railroad right of way line, bears N. 74°59'19" W. and S. 74°59'19" E.
1133.60	A railroad centerline, bears N. 74°59'19" W. and S. 74°59'19" E.
1182.07	Cor. No. 2, identical with Cor. No. 3 of the Flor 115, Cor. No. 1 of the Flor 116 and Cor. No. 2 of the Flor 118 lodes of this survey.
Thence S. 89°54'40" E.	
206.37	A railroad right of way line, bears S. 74°59'19" E. and N. 74°59'19" W.
300.00	Lode line; discovery point bears S. 0°12'04" E., 350.0 ft. dist.
473.91	Cor. No. 3, identical with Cor. No. 1 of the Flor 118 lode of this survey.
Set a steel pin, 5/8 in. diam., 30 ins. long, 16 ins. in the ground, with aluminum cap mkd. MS 4774 Flor 117-3 118-1; from which	
A cor. of the location bears S. 84°28' E., 124.0 ft. dist.	
Thence S. 0°33'15" W., bet. secs. 27 and 28.	
71.14	A railroad right of way line, bears S. 74°59'19" E. and N. 74°59'19" W.

(This form bound on left side)

FEET	
174.41	A railroad centerline, bears N. 74°59'19" W. and S. 74°59'19" E.
277.68	A railroad right of way line, bears S. 74°59'19" E. and N. 74°59'19" W.
340.	The centerline of a 24 ft. wide asphalt paved road, bears S. 75° E. and N. 75° W.
940.	Center of a bladed road, bears S. 45° W. and N. 45° E.
1182.10	<p>Cor. No 4, identical with the 1/4 sec. cor. of secs. 27 and 28, heretofore described; from which</p> <p style="padding-left: 40px;">A cor. of the location bears S. 89°56' E., 133.0 ft. dist.</p> <p style="padding-left: 40px;">Thence N. 89°54'40" W.</p>
166.63	Lode line; discovery point bears N. 0°12'04" E., 832.07 ft. dist.
250.	Center of a bladed road, bears S. 45° W. and N. 45° E.
466.63	Cor. No. 1, and place of beginning.
FLOR 118 LODE	
Beginning at Cor. No. 1 of the Flor 118 lode, identical with Cor. No. 3 of the Flor 117 lode of this survey; from which	
<p style="padding-left: 40px;">The cor. of secs. 21, 22, 27 and 28, bears N. 0°33'15" E., 1459.95 ft. dist., heretofore described.</p> <p style="padding-left: 40px;">Thence N. 89°54'40" W.</p>	
173.91	Lode line; discovery point bears N. 0°12'04" E., 50.0 ft. dist.
267.54	A railroad right of way line, bears N. 74°59'19" W. and S. 74°59'19" E.
473.91	Cor. No. 2, identical with Cor. No. 2 of the Flor 117, Cor. No. 3 of the Flor 115 and Cor. No. 1 of the Flor 116 lodes of this survey.
Thence N. 0°12'04" E.	
54.97	A railroad right of way line, bears N. 74°59'19" W. and S. 74°59'19" E.
789.90	Wash, 10 ft. wide, drains S. 10° W.
949.90	Center of a road, bears N. 75° E. and S. 75° W.



FEET	
961.	The centerline of an electrical transmission line, bears N. 75° 34' E. and S. 75°34' W.
989.90	Wash, 10 ft. wide, drains S. 45° E.
1409.90	Wash, 10 ft. wide, drains S. 30° W.
1459.90	Cor. No. 3, identical with Cor. No. 4 of the Flor 116 lode of this survey.  Thence S. 89°54'40" E., bet. secs. 21 and 28.
20.	Wash, 10 ft. wide, drains S. 30° W.
300.00	Lode line; discovery point bears S. 0°12'04" W., 1409.9 ft. dist.
482.91	Cor. No. 4, identical with the cor. of secs. 21, 22, 27 and 28, heretofore described; from which  A cor. of the location bears S. 89°54' E., 117.0 ft. dist.  Thence S. 0°33'15" W., bet. secs. 27 and 28.
373.95	The centerline of an electrical transmission line, bears N. 75°34' E. and S. 75°34' W.
380.	Center of a road, bears N. 75° E. and S. 75° W.
1459.95	Cor. No. 1, and place of beginning.
<hr/> Mineral Survey No. 4774 <hr/>	
AREAS	
	<u>Acres</u>
Total area, Flor 101 lode...	16.274
Area in conflict with -	
S. 1/2 Sec. 28 .....	0.022
Total area, Flor. #102 lode.	20.099
Total area, Flor 103 lode...	16.282
Area in conflict with -	
S. 1/2 Sec. 28 .....	0.019
Total area, Flor 104 lode...	20.109
Total area, Flor 105 lode...	16.282
Area in conflict with -	
S. 1/2 Sec. 28 .....	0.016
Total area, Flor #106 lode..	20.109
Area in conflict with -	
Railroad right of way .....	1.317

(This form bound on left side)



FEET	AREAS	Acres
	Total area, Flor 107 lode...	16.282
	Area in conflict with -	
	S. 1/2 Sec. 28 .....	0.014
	Total area, Flor #108 lode..	20.109
	Area in conflict with -	
	Railroad right of way .....	3.510
	Total area, Flor 109 lode ..	16.282
	Area in conflict with -	
	S. 1/2 Sec. 28 .....	0.011
	Total area, Flor 110 lode ..	20.109
	Area in conflict with -	
	Railroad right of way .....	3.236
	Total area, Flor 111 lode... 16.282	
	Area in conflict with -	
	S. 1/2 Sec. 28 .....	0.009
	Total area, Flor #112 lode.. 20.109	
	Area in conflict with -	
	Railroad right of way .....	2.865
	Total area, Flor 113 lode... 16.282	
	Area in conflict with -	
	S. 1/2 Sec. 28 .....	0.006
	Total area, Flor #114 lode.. 20.109	
	Area in conflict with -	
	Railroad right of way .....	2.849
	Total area, Flor 115 lode... 16.282	
	Area in conflict with -	
	S. 1/2 Sec. 28 .....	0.003
	Railroad right of way .....	0.994
	Total area, Flor 116 lode... 20.109	
	Area in conflict with -	
	Railroad right of way .....	1.855
	Total area, Flor 117 lode... 12.761	
	Area in conflict with -	
	S. 1/2 Sec. 28 .....	0.001
	Railroad right of way .....	2.115
	Total area, Flor 118 lode .. 16.034	
	Area in conflict with -	
	Railroad right of way .....	0.130

LOCATION

This survey is located in sec. 28, of T.4S., R.9E., Gila and Salt River Base and Meridian.

The survey of the Flor 101, Flor. #102, Flor 103 thru 105, Flor #106, Flor 107, Flor #108, Flor 109 thru 111, Flor #112, Flor 113, Flor #114 and Flor 115 thru 118 lodes are wholly within the amended locations as marked on the ground. Differences with the corners of the amended locations are to the extent previously shown.

FEET	EXPENDITURES
	<p>The improvements and the value of the labor and improvements made upon or for the benefit of each of the lode locations embraced in said mining claim by the claimant or its grantors are as follows:</p>
No. 1	<p>The discovery point of the Flor 101 lode, is on the lode line 50 ft. from a point on line 2-3, 299.72 ft. from Cor. No. 2. Value, none.</p>
No. 2	<p>A drill hole, designated #309 by claimant, center of which bears N. 59°20'25" E., 213 ft. from Cor. No. 1 Flor 101 lode, 4 in. diam., 1220 ft. deep. Value of 1220 ft. at \$5.54 per ft., \$6,758.80</p>
No. 1	<p>The discovery point of the Flor. #102 lode, is on the lode line 50 ft. from a point on line 4-1, 300.0 ft. from Cor. No. 4. Value, None.</p>
No. 2	<p>A drill hole, designated #313 by claimant, center of which bears N. 59°50'05" E., 470 ft. from Cor. No. 1 Flor. #102 lode, 4 in. diam., 1101 ft. deep. Value of 1101 ft. at \$5.60 per ft., \$6,165.60</p>
No. 1	<p>The discovery point of the Flor 103 lode, is on the lode line 50 ft. from the center of line 2-3. Value, None.</p>
No. 2	<p>A drill hole, designated #151 by claimant, center of which bears N. 31°34'20" E., 126 ft. from Cor. No. 1 Flor 103 lode, 4 in. diam., 900 ft. deep. Value of 900 ft. at \$5.00 per ft., \$4,500.00</p>
No. 1	<p>The discovery point of the Flor 104 lode, is on the lode line 50 ft. from the center of line 1-2. Value, None.</p>
No. 2	<p>A drill hole, designated #193 by claimant, center of which bears N. 0°17'15" W., 677 ft. from Cor. No. 1 Flor 104 lode, 4 in. diam., 780 ft. deep. Value of 780 ft. at \$5.10 per ft., \$3,978.00</p>

FEET		
No. 1	The discovery point of the Flor 105 lode, is on the lode line 172 ft. from the center of line 2-3. Value, None.	
No. 2	A drill hole, designated #153 by claimant, center of which bears N. 77°08'30" E., 494 ft. from Cor. No. 1 Flor 105 lode, 4 in. diam., 671 ft. deep. Value of 671 ft. at \$5.07 per ft.,	\$3,401.97
No. 1	The discovery point of the Flor #106 lode is on the lode line 137 ft. from the center of line 1-2. Value, None.	
No. 2	A drill hole, designated #315 by claimant, center of which bears N. 2°31'35" E., 614 ft. from Witness Cor. No. 1 Flor #106 lode, 4 in. diam., 404 ft. deep. Value of 404 ft. at \$4.94 per ft.,	\$1,995.76
No. 1	The discovery point of the Flor 107 lode, is on the lode line 50 ft. from the center of line 2-3. Value, None.	
No. 2	A drill hole, designated #316 by claimant, center of which bears N. 31°12'45" E., 123 ft. from Cor. No. 1 Flor 107 lode, 4 in. diam., 335 ft. deep. Value of 335 ft. at \$5.76 per ft.,	\$1,929.60
No. 1	The discovery point of the Flor #108 lode, is on the lode line 330 ft. from the center of line 1-2. Value, None.	
No. 2	A drill hole, designated #201 by claimant, center of which bears N. 12°52'40" W., 529 ft. from Cor. No. 1 Flor #108 lode, 4 in. diam., 320 ft. deep. Value of 320 ft. at \$5.08 per ft.,	\$1,625.60
No. 1	The discovery point of the Flor 109 lode, is on the lode line 50 ft. from the center of line 2-3. Value, None.	
No. 2	A drill hole, designated #144 by claimant, center of which bears N. 70°59'25" E., 302 ft. from Cor. No. 1 Flor 109 lode, 4 in. diam., 360 ft. deep. Value of 360 ft. at \$4.99 per ft.,	\$1,796.40

FEET		
No. 1	The discovery point of the Flor 110 lode, is on the lode line 50 ft. from the center of line 1-2. Value, None.	
No. 2	A drill hole, designated #314 by claimant, center of which bears N. 22°57'25" W., 333 ft. from Cor. No. 1 Flor 110 lode, 4 in. diam., 310 ft. deep. Value of 310 ft. at \$5.10 per ft.,	\$1,581.00
No. 1	The discovery point of the Flor 111 lode, is on the lode line 50 ft. from the center of line 2-3. Value, None.	
No. 1	The discovery point of the Flor #112 lode, is on the lode line 50 ft. from the center of line 1-2. Value, None.	
No. 1	The discovery point of the Flor 113 lode, is on the lode line 162 ft. from the center of line 2-3. Value, None.	
No. 2	A drill hole, designated #152 by claimant, center of which bears N. 40°56'30" E., 124 ft. from Cor. No. 1 Flor 113 lode, 4 in diam., 355 ft. deep. Value of 355 ft. at \$5.02 per ft.,	\$1,782.10
No. 1	The discovery point of the Flor #114 lode, is on the lode line 360 ft. from the center of line 1-2. Value, None.	
No. 2	A drill hole, designated #312 by claimant, center of which bears N. 32°30'30" W., 378 ft. from Cor. No. 1 Flor #114 lode, 4 in. diam., 300 ft. deep. Value of 300 ft. at \$5.09 per ft.,	\$1,527.00
No. 1	The discovery point of the Flor 115 lode, is on the lode line 305 ft. from the center of line 2-3. Value, None.	
No. 2	A drill hole, designated #203 by claimant, bears N. 31°13'35" E., 1074 ft. from Cor. No. 1 Flor 115 lode, 4 in diam., 340 ft. deep. Value of 340 ft. at \$5.18 per ft.,	\$1,761.20
No. 1	The discovery point of Flor 116 lode, is on the lode line 165 ft. from the center of line 1-2. Value, None.	

(This form bound on left side)

FEET		
No. 2	<p>A drill hole, designated #317 by claimant, center of which bears N. 59°21'20" W., 443 ft. from Cor. No. 1 Flor 116 lode, 4 in. diam., 305 ft. deep. Value of 305 ft. at \$5.14 per ft.,</p>	\$1,567.70
No. 1	<p>The discovery point of the Flor 117 lode, is on the lode line 350 ft. from a point on line 2-3, 300.0 ft. from Cor. No. 2. Value, None.</p>	
No. 2	<p>A drill hole, designated #310 by claimant, center of which bears N. 36°09'40" E., 646 ft. from Cor. No. 1 Flor 117 lode, 4 in. diam., 300 ft. deep. Value of 300 ft. at \$5.09 per ft.,</p>	\$1,527.00
No. 1	<p>The discovery point of the Flor 118 lode, is on the lode line 50 ft. from a point on line 1-2, 173.91 ft. from Cor. No. 1. Value, None.</p>	
No. 2	<p>A drill hole, designated #200 by claimant, center of which bears N. 8°54'50" W., 633 ft. from Cor. No. 1 Flor 118 lode, 4 in. diam., 300 ft. deep. Value of 300 ft. at \$5.22 per ft.,</p>	\$1,566.00
	<p>An interest in a common improvement described as follows:</p>	
	<p>A drill hole, designated as #198 by claimant, center of which bears N. 32°29'35" W., 775 ft. from Cor. No. 1 Flor #112 lode, 4" diam., 340 ft. deep. Value of 340 ft. at \$5.02 per ft., Value of 1/2 interest,</p>	\$1,706.80 \$ 853.40
	<p>This improvement is for the development of the Flor 111 and Flor #112 lodes of this survey, which are contiguous lode claims owned in common within the range of benefit of said drill hole.</p>	
	<p>Five hundred dollars or more has been expended in this improvement in such a manner as tends to the development of the aforesaid two lodes of this survey subsequent to their location and to the time since which common ownership and contiguity have prevailed; therefore an undivided one-half interest in its value is hereby credited to each of said lodes.</p>	
	<p>Except as above stated, no portion or interest in this improvement has been credited heretofore as patent expenditures to any lode claim.</p>	

FEET

OTHER CORNER DESCRIPTIONS  
AND SUPPLEMENTAL DATA

The line bet. the 1/4 sec. cor. of secs. 27 and 28 and the cor. of secs. 21, 22, 27 and 28 bears N. 0°33'15" E., 2642.05 ft. dist. instead of N. 0°33' E., 2642.64 ft. dist., as approved. The line bet. the cor. of secs. 21, 22, 27 and 28 and the cor. of secs. 20, 21, 28 and 29 bears N. 89°54'40" W., 5282.63 ft. dist. instead of N. 89°55' W., 5286.6 ft. dist., as approved. The line bet. the 1/4 sec. cor. of secs. 28 and 29 and the cor. of secs. 20, 21, 28 and 29 bears N. 0°12'04" E., 2640.31 ft. dist. instead of N. 0°08' E., 2640.66 ft. dist., as approved.

FIELD ASSISTANTS

Name	Capacity
Harry L. Myers	Instrumentman
Joseph Domler	Instrumentman
Edmond Butler	Rod-chainman



FEET		
<p>Other corners described and substantiated by the line between the 1/4 sec. 17 and 18 and the cor. of sec. 17, 18 and 19 bears N. 89° 51' 30" E. 1000.00 ft. dist. instead of 1000.00 ft. dist., as approved. The line between the cor. of sec. 17, 18 and 19 and the cor. of sec. 17, 18 and 19 bears N. 89° 54' 40" W. 1000.00 ft. dist. instead of N. 89° 51' 30" W. 1000.00 ft. dist., as approved. The line between the 1/4 sec. cor. of sec. 17, 18 and 19 and the cor. of sec. 17, 18 and 19 bears N. 89° 51' 30" E. 1000.00 ft. dist. instead of N. 89° 51' 30" E. 1000.00 ft. dist., as approved.</p>	<p>FIELD ASSISTANTS</p>	
<p>Inspectionman</p>	<p>Name Larry M. Myers</p>	
<p>Inspectionman</p>	<p>Joseph Dowler</p>	
<p>Inspectionman</p>	<p>Edmond Butler</p>	



UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

CERTIFICATE OF SURVEYOR

Name of Mineral Surveyor <b>Robert L. Frazer</b>	Date <b>Sept. 30, 1974</b>
---	-------------------------------

I HEREBY CERTIFY That in pursuance of an order received from the Bureau of Land Management, at Phoenix, Arizona, dated 12/27/73 Amd. 9/3/74, 1974, I have carefully executed the survey of the claim of Continental Oil Co. known as the (lode, placer, or mill-site) Flor lodes \*(see below) situated in Sec. 28 Township 4 S., Range 9 E., Gila and Salt River Meridian, in the State of Arizona

This survey, designated as number 4774, has been executed by me and under my direction and has been made in strict conformity with said order, the Manual of Instructions for the Survey of Public Lands of the United States, and in the specific manner described in the foregoing field notes.

I FURTHER CERTIFY That the labor expended and improvements made upon and for the benefit of the (lode or placer) lode location(s) embraced in the said mining claim by claimant(s) or its grantors are fully stated in my report. The character, extent, location, and itemized value are specified in full detail. No portion of, or interest in, said labor and improvements so credited to this claim has been included in the estimate of expenditures upon any other claim.

\*Flor 101, Flor. # 102, Flor 103, Flor 104, Flor 105, Flor # 106, Flor 107, Flor #108, Flor 109, Flor 110, Flor 111, Flor #112, Flor 113, Flor #114, Flor 115, Flor 116, Flor 117, Flor 118

P.O. Box 1711, Tucson, AZ 85702  
(Location)

*Robert L. Frazer*  
(Signature of Mineral Surveyor)

CERTIFICATE OF APPROVAL

Office Arizona State Office
Location Phoenix, Arizona
Date February 9, 1976

The foregoing field notes of mineral survey number 4774, in Section 28, Township 4 S., Range 9 E., Gila and Salt River Meridian, in the State of Arizona, executed by Robert L. Frazer, Mineral Surveyor, under order dated Dec. 27, 1973 & Amended Sept. 3, 1974, having been critically examined and the necessary corrections made prior to their certification by the surveyor, the field notes and the survey therein described are hereby approved.

*Boyd S. Owens*  
(Authorized Signature)  
Boyd S. Owens

Chief, Br. of Cadastral Survey  
(Title)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of field notes of the above described mineral survey number is a true copy of the original field notes.

(Authorized Signature) (Title)

Title 18, U. S. C. section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious, or fraudulent statements or representations as to any matter within its jurisdiction.



UNITED STATES DEPARTMENT OF THE INTERIOR 9605 (956)  
BUREAU OF LAND MANAGEMENT M.S. 4774  
ARIZONA STATE OFFICE

---

NOTICE OF CANCELLATION OF MINERAL SURVEY

The Flor 101, Flor #102, Flor 103, Flor 104, Flor 105, Flor #106, Flor 107, Flor #108, Flor 109, Flor 110, Flor 111, Flor #112, Flor 113, Flor #114, Flor 115, Flor 116, Flor 117, and Flor 118 lodes, Mineral Survey No. 4774, located in section 28, Township 4 South, Range 9 East, Gila and Salt River Meridian, Arizona, are hereby canceled.

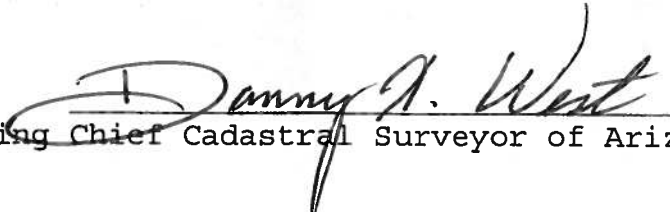
These claims have not been filed with the Arizona State Office, Bureau of Land Management, in accordance with Section 314, 90 STAT. 2769, (43 U.S.C. 1744).

This cancellation was necessitated to clear the record.

The Mineral Survey Plat should be noted as follows:

Flor 101, Flor #102, Flor 103, Flor 104, Flor 105, Flor #106, Flor 107, Flor #108, Flor 109, Flor 110, Flor 111, Flor #112, Flor 113, Flor #114, Flor 115, Flor 116, Flor 117, and Flor 118 lodes, M.S. 4774, were canceled September 8, 2010, by memo 9605 (956) M.S. 4774, which is now a part of the original field notes."

September 8, 2010  
Date

  
Acting Chief Cadastral Surveyor of Arizona

