

Form 3400-11
(September 1967)
(formerly 4-683)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Mineral Survey number
4792

State
Arizona

Land District
Arizona

FIELD NOTES

Of the Survey of the Mining Claim of *(name and address of Claimant)*

Anamax Mining Company
P. O. Box 127
Sahuarita, Arizona 85629

Known as the *(name of group, if any)*

CONSISTING OF LOCATIONS NAMED AND LOCATED AS FOLLOWS.

NAME OF LOCATION	DATE	
	LOCATED	AMENDED
Wedge	3/28/55	
Wedge No 2	9/1/55	
Merchant Mine	1/1/1893	
Tailor	9/18/08	

Mining district Helvetia			County Pima	
Section 25 & 30	Township 18 South	Range 15 & 16 East	Meridian G. & S.R.M.	Survey under order dated 5/2/77
Survey commenced 5/3/77		Survey completed 9/1/78	Name of Mineral Surveyor Harvey W. Smith	

1915
1916
1917
1918
1919

1920
1921
1922

1923

1924

1925
1926
1927

1928

1929

1930

1931

1932
1933
1934
1935

1936
1937
1938
1939

1940

1941

1942

1943

1944

1945

1946

1947

1948

1949

1950

FEET	
	<p>This survey was made with a Swiss Kern theodolite, Model DKM 1, No. 77769, having horizontal and vertical circles, 50 mm. diam. The circles are graduated in degrees and 20-minute increments. An optical micrometer, adjustable to the vertical and horizontal circles, permits the reading of angles direct to 10-second accuracy and estimating to one-second accuracy. The instrument was in good condition at the time of the survey and all adjustments were in good order.</p> <p>All azimuths in this record were determined by the method of horizontal-angles-right referred to the meridian determined by the following observation:</p> <p>April 6, 1978, at Cor. No. 3 of the Wedge No. 2 lode, latitude $31^{\circ}50'06.2''N.$, longitude $110^{\circ}45'36.8''W.$, elevation 5320 ft. above sea level, and temperature $75^{\circ}F.$, make a series of six altitude observations on the sun for azimuth at approximately equal time intervals, three each with the telescope in direct and reversed positions, observing opposite limbs of the sun, and reading the horizontal angle from a reference point about 600 ft. southeastward SW. to the sun.</p> <p style="margin-left: 40px;">Mean time of observation, 105th meridian standard time = $3^h28^m13^s$ p.m.</p> <p style="margin-left: 40px;">Declination of sun at mean time of observation = $6^{\circ}35'28.8''N.$</p> <p style="margin-left: 40px;">Mean observed vertical angle to sun's center = $36^{\circ}08'47''$</p> <p style="margin-left: 40px;">Mean horizontal angle from reference point to sun's center = $141^{\circ}48'59''S-W$</p> <p style="margin-left: 40px;">True bearing to reference point = $S.68^{\circ}26'06''E.$</p> <p>The lines were measured with a Lufkin steel tape, 300 ft. in length, graduated every foot for 299 ft. and the remaining foot graduated to tenths and hundredths; the tape was compared to an Invar standard tape at the beginning of the survey and found to be correct. In addition to the steel tape, a K & E Autoranger infrared distance measuring unit was used to measure some of the lines. Its accuracy was checked against a line measured with the foregoing steel tape.</p> <p>All lines and connections of this survey were run by direct methods.</p> <p>The magnetic declination observed at each corner of the survey gave a uniform value of $13^{\circ}30'E.$</p>
	<p>Mineral Survey No. 4792</p>

(This form bound on left side)

FEET	MERCHANT MINE LODE
	<p>At Cor. No. 1 of the Merchant Mine lode, on line 1-2, M.S. No. 1297A, Dan Webster lode.</p> <p>Set an iron post, 24 ins. long, 3/4 ins. diam., 12 ins. in the ground, in a concrete and rock base, with a brass cap firmly secured to the iron post, mkd. X M.M. 1 U.S.M.S. 4792; from which</p> <p>The cor. of secs. 25, 30, 31 and 36, T.18 S., Rs.15 & 16 E., G.& S.R.M., bears S.0°36'31"E., 2,409.14 ft. dist., monumented with an iron post, 2 ins. diam., 12 ins. above ground, firmly set, with a brass cap properly mkd.</p> <p>A cairn stands adjacent to the iron post.</p> <p>No local bearing objects or bearing trees available.</p> <p>Thence S.27°12'35"W.</p>
5.19	Intersect line 1-2 Tailor lode of this survey.
296.50	Lode line and discovery point.
340.	Center of unimproved dirt road, 16 ft. wide, bears N.36°30'W. and S.52°E.
530.	Center of unimproved dirt road, 16 ft. wide, bears N.29°W. and S.29°E.
593.00	<p>Cor. No. 2, on line 1-2, M.S. No. 1297A, Dan Webster lode and on line 1-2 Wedge lode of this survey.</p> <p>Set an iron post, 30 ins. long, 3/4 ins. diam., 18 ins. in the ground, in a concrete and rock base, with a brass cap firmly secured to the iron post, mkd. X M.M.2 U.S.M.S. 4792; from which</p> <p>Cor. No. 1, M.S. No. 1297A, Dan Webster lode, identical with Cor. No. 2 Potomac lode of the same survey, bears S.27°12'35"W., 149.36 ft. dist.</p> <p>A cairn stands adjacent to the iron post.</p> <p>No local bearing objects or bearing trees available.</p> <p>Thence N.68°08'55"W.</p>
551.64	Cor. No. 1 Wedge lode, identical with Cor. No. 1 Wedge No. 2 lode both of this survey.
1,096.02	Intersect line 5-1, M.S. No. 1297A, Falls lode, at a point from which Cor. No. 5, identical with Cor. No. 1 Ajax Consolidated lode of the same survey bears N.20°17'11"E., 497.07 ft. dist.

FEET	
1,151.64	Cor. No. 4 Wedge No. 2 lode of this survey.
1,371.94	Cor. No. 3.
	Set an iron post, 30 ins. long, 3/4 ins. diam., 18 ins. in the ground, in a concrete and rock base, with a brass cap firmly secured to the iron post, mkd. X M.M.3 U.S.M.S. 4792; from which
	Cor. No. 5, M.S. No. 1297A, Falls lode, identical with Cor. No. 1 Ajax Consolidated lode of the same survey, bears N.49°39'24"E., 561.75 ft. dist.
	A wood post, 4 X 4 ins. in size, 4 ft. above ground, sets adjacent to the iron post.
	No local bearing objects or bearing trees available.
	Thence N.27°12'35"E.
296.50	Lode line; discovery point bears S.68°08'55"E., 1,371.94 ft. dist.
576.91	Intersect line 4-5, M.S. No. 1297A, Falls lode, common with line 1-2 Ajax Consolidated lode of the same survey, at a point from which Cor. No. 5 identical with Cor. No. 1 Ajax Consolidated lode bears S.47°45'E., 222.42 ft. dist.
593.00	Cor. No. 4.
	Set an iron post, 30 ins. long, 3/4 ins. diam., 18 ins. in the ground, in a concrete and rock base, with a brass cap firmly secured to the iron post, mkd. X M.M.4 U.S.M.S. 4792; from which
	A cairn stands adjacent to the iron post.
	No local bearing objects or bearing trees available.
	Thence S.68°08'55"E.
201.55	Intersect line 5-1, M.S. No. 1297A, Ajax Consolidated lode, common with line 2-3 Cuba lode of the same survey, at a point from which Cor. No. 1, identical with Cor. No. 5 of the Falls lode of the same survey, bears S.18°32'W., 93.67 ft.; thence S.19°52'46"W., 120.31 ft. dist. to Cor. No. 2 Cuba lode.
492.27	Intersect line 2-3 Tailor lode of this survey.
582.36	Intersect line 4-1, M.S. No. 1297A, Cuba lode, at a point from which Cor. No. 1 bears S.30°36'15"W., 206.49 ft. dist.
1,371.94	Cor. No. 1, and place of beginning.

(This form bound on left side)

FEET		
	TAILOR LODE	
	At Cor. No. 1 of the Tailor lode.	
	Set an iron post, 30 ins. long, 3/4 ins. diam., 18 ins. in the ground, in a concrete and rock base, with a brass cap firmly secured to the iron post, mkd. X T. 1 U.S.M.S. 4792; from which	
	The cor. of secs. 25, 30, 31 and 36 bears S.0°27'20"W., 2,391.20 ft. dist.; heretofore described.	
	A cairn stands adjacent to the iron post.	
	No local bearing objects or bearing trees available.	
	Thence N.74°13'W.	
48.81	Intersect line 1-2, M.S. No. 1297A, Dan Webster lode, at a point from which Cor. No. 2, identical with Cor. No. 2 Patrick Henry lode of the same survey, bears N.27°12'35"E., 647.95 ft. dist. and Cor. No. 1 Merchant Mine lode of this survey, bears N. 27°12'35" E., 5.19 ft. dist.	
856.36	Intersect line 4-1, M.S. No. 1297A, Cuba lode, at a point from which Cor. No. 1 bears S.30°36'15"W., 114.90 ft. dist.	
939.50	Cor. No. 2.	
	Set an iron post, 30 ins. long, 3/4 ins. diam., 18 ins. in the ground, in a concrete and rock base, with a brass cap firmly secured to the iron post, mkd. X T.2 U.S.M.S. 4792; from which	
	Cor. No. 1, M.S. No. 1297A, Cuba lode bears S.10°02'22"E., 123.39 ft. dist.	
	A cairn stands adjacent to the iron post.	
	No local bearing objects or bearing trees available.	
	Thence N.25°36'15"E.	
99.53	Intersect line 4-1 Merchant Mine lode of this survey.	
300.00	Lode line; discovery point bears S.74°13'E., 639.50 ft. dist.	
560.50	Cor. No. 3.	
	Set an iron post, 30 ins. long, 3/4 ins. diam., 18 ins. in the ground, in a concrete and rock base, with a brass cap firmly secured to the iron post, mkd. X T.3 U.S.M.S. 4792; from which	
	A cairn stands adjacent to the iron post.	

FEET	
	<p>No local bearing objects or bearing trees available.</p> <p style="text-align: center;">Thence S.74°13'E.</p>
133.67	Intersect line 4-1, M.S. No. 1297A, Cuba lode, at a point from which Cor. No. 1 bears S.30°36'15"W., 686.19 ft. dist.
906.72	Intersect line 1-2, M.S. No. 1297A, Dan Webster lode, at a point from which Cor. No. 2, identical with Cor. No. 2 Patrick Henry lode of the same survey, bears N.27°12'35"E., 84.49 ft. dist.
939.50	<p>Cor. No. 4.</p> <p>Set an iron post, 30 ins. long, 3/4 ins. diam., 18 ins. in the ground, in a concrete and rock base, with a brass cap firmly secured to the iron post, mkd. X T.4 U.S.M.S. 4792; from which</p> <p style="text-align: center;">Cor. No. 2, M.S. No. 1297A, Dan Webster lode, identical with Cor. No. 2 of the Patrick Henry lode of the same survey, bears N.4°49'14"E., 84.36 ft. dist.</p> <p style="text-align: center;">A cairn stands adjacent to the iron post.</p> <p>No local bearing objects or bearing trees available.</p> <p style="text-align: center;">Thence S.25°36'15"W.</p>
260.50	Lode line; discovery point bears N.74°13'W., 300.00 ft. dist.
560.50	Cor. No.1, and place of beginning.
	<p>WEDGE LODE</p> <p>At Cor. No. 1 of the Wedge lode, identical with Cor. No. 1 of the Wedge No. 2 lode, and on line 2-3 Merchant Mine lode, both of this survey.</p> <p>Set an iron post, 30 ins. long, 3/4 ins. diam., 18 ins. in the ground, in a concrete and rock base, with a brass cap firmly secured to the iron post, mkd. X W.1 W.2 1 U.S.M.S. 4792; from which</p> <p style="text-align: center;">The cor. of secs. 25, 30, 31 and 36 bears S.21°10'57"E., 2,238.17 ft. dist.; heretofore described.</p> <p style="text-align: center;">A cairn stands adjacent to the iron post.</p> <p>No local bearing objects or bearing trees available.</p> <p style="text-align: center;">Thence S.68°08'55"E.</p>
300.00	Lode line; discovery point bears S.33°59'40"W., 300.00 ft. dist.

FEET		
551.64	Intersect line 1-2, M.S. No. 1297A, Dan Webster lode, at a point from which Cor. No. 1, identical with Cor.No. 2 Potomac lode of the same survey, bears S.27°12'35"W., 149.36 ft. dist. and Cor. No. 2 Merchant Mine lode of this survey.	
600.00	<p>Cor. No. 2.</p> <p>Set an iron post, 30 ins. long, 3/4 ins. diam., 18 ins. in the ground, in a concrete and rock base, with a brass cap firmly secured to the iron post, mkd. X W.2 U.S.M.S. 4792; from which</p> <p>Cor. No. 1, M.S. No. 1297A Dan, Webster lode, identical with Cor. No. 2 Potomac lode of the same survey, bears S.44°35'09"W., 161.23 ft. dist.</p> <p>A cairn stands adjacent to the iron post.</p> <p>No local bearing objects or bearing trees available.</p> <p>Thence S.33°59'40"W.</p>	
156.93	Intersect line 4-1, M.S. No. 1297A, Dan Webster lode, common with line 2-3 Potomac lode of the same survey, at a point from which Cor. No. 1, identical with Cor. No. 2 Potomac lode, bears N.59°00'15"W., 29.67 ft. dist.	
520.	Center of unimproved dirt road, 16 ft. wide, bears N.59°W. and S.43°E.	
666.	Center of unimproved dirt road, 16 ft. wide, bears N.50°W. and S.50°E.	
1,062.12	Intersect line 3-4, M.S. No. 4718 (unapproved), Santa Rita Fraction lode, at a point from which Cor. No. 4 bears N.73°30'13"E., 136.82 ft. dist.	
1,327.03	<p>Cor. No. 3, identical with Cor. No. 4, M.S. No. 1297A, Central lode.</p> <p>Found the original wood post, 4 X 4 ins., 2 ft. above ground. I was able to partially identify the data inscribed on the post. To make a more permanent monument, I removed the post and</p> <p>Set an iron post, 30 ins. long, 3/4 ins. diam., 18 ins. in the ground, in a concrete and rock base, with a brass cap firmly secured to the iron post, mkd. X C.4 U.S.M.S. 1297A W.3 U.S.M.S. 4792; from which</p> <p>Cor. No. 4, M.S. No. 4718 (unapproved), Santa Rita Fraction lode bears N.47°13'01"E., 380.57 ft. dist.</p> <p>A wood post, 4 X 4 ins. in size, 4 ft. above ground, sets adjacent to the iron post.</p>	

FEET	
	<p>No local bearing objects or bearing trees available.</p> <p style="text-align: center;">Thence N.68°08'55"W.</p>
46.71	Intersect line 1-2, M.S. No. 1297A, Potomac lode, at a point from which Cor. No. 2, identical with Cor. No. 1 Dan Webster lode of the same survey, bears N.34°46'26"E., 1,178.48 ft. dist.
271.65	Intersect line 3-4, M.S. No. 4718 (unapproved), Santa Rita Fraction lode, at a point from which Cor. No. 4 bears N.73°30'13"E., 554.25 ft. dist.
300.00	Lode line; discovery point bears N.33°59'40"E., 1,027.03 ft. dist.
600.00	<p>Cor. No. 4.</p> <p>Set an iron post, 30 ins. long, 3/4 ins. diam., 18 ins. in the ground, in a concrete and rock base, with a brass cap firmly secured to the iron post, mkd. X W.4 U.S.M.S. 4792; from which</p> <p style="text-align: center;">A cairn stands adjacent to the iron post.</p> <p>No local bearing objects or bearing trees available.</p> <p style="text-align: center;">Thence N.33°59'40"E.</p>
301.75	Intersect line 2-3 Wedge No. 2 lode of this survey.
458.	Center of unimproved dirt road, 16 ft. wide, bears N. 41°W. and S.41°E.
545.	Center of unimproved dirt road, 16 ft. wide, bears N.42°30'W. and S.42°30'E.
609.31	Intersect line 3-4, M.S. No. 1297A, Central lode, at a point from which Cor. No. 4, identical with Cor. No. 3 of the Wedge lode of this survey, bears S.16°31'52"E., 759.90 ft. dist.
875.	Center of unimproved dirt road, 16 ft. wide, bears N.74°W. and S.36°E.
885.	Center of unimproved dirt road, 16 ft. wide, bears N.36°W. and S.36°E.
1,327.03	Cor. No. 1, and place of beginning.
	<p>WEDGE No. 2 LODE</p> <p>Beginning at Cor. No. 1 of the Wedge No. 2 lode, identical with Cor. No. 1 of the Wedge lode and on line 2-3 Merchant Mine lode, both of this survey.</p>

FEET	
	Thence S.17°07'03"W.
442.	Center of unimproved dirt road, 16 ft. wide, bears N.86°E. and S.86°W.
803.	Center of unimproved dirt road, 16 ft. wide, bears N.72°W. and S.77°30'E.
878.	Center of unimproved dirt road, 16 ft. wide, bears N.72°W. and S.72°E.
999.86	Intersect line 3-4, M.S. No. 1297A, Central lode, at a point from which Cor. No. 3 bears N.16°31'52"W., 914.96 ft. dist.
1,005.77	Cor. No. 2. Set an iron post, 30 ins. long, 3/4 ins. diam., 18 ins. in the ground, in a concrete and rock base, with a brass cap firmly secured to the iron post, mkd. X W.2 2 U.S.M.S. 4792; from which A cairn stands adjacent to the iron post. No local bearing objects or bearing trees available. Thence N.68°08'55"W.
298.68	Intersect line 4-1 Wedge lode of this survey.
300.00	Lode line; discovery point bears N.17°07'03"E., 780.77 ft. dist.
600.00	Cor. No. 3, identical with Cor. No. 1, M.S. No. 1297A, Falls lode. Found the original wood post, 4 X 4 ins., 2 ft. above ground. I was able to partially identify the data inscribed on the post. To make a more permanent monument, I removed the post and Set an iron post, 30 ins. long, 3/4 ins. diam., 18 ins. in the ground, in a concrete and rock base, with a brass cap firmly secured to the iron post, mkd. X F.1 U.S.M.S. 1297A W.2 3 U.S.M.S. 4792; from which Cor. No. 3, M.S. No. 1297A, Central lode bears N.24°20'17"E., 723.80 ft. dist. A wood post, 4 X 4 ins. in size, 4 ft. above ground, sets adjacent to the iron post. No local bearing objects or bearing trees available. Thence N.17°07'03"E.
323.	Center of unimproved dirt road, 16 ft. wide, bears N.76°W. and S.76°E.

FEET	
657.47	Intersect line 2-3, M.S. No. 1297A, Central lode, at a point from which Cor. No. 3 bears N.73°27'13"E., 109.30 ft. dist.
893.	Center of unimproved dirt road, 16 ft. wide, bears N.88°E. and S.88°W.
1,005.77	Cor. No. 4, on line 2-3 Merchant Mine lode of this survey. Set an iron post, 30 ins. long, 3/4 ins. diam., 18 ins. in the ground, in a concrete and rock base, with a brass cap firmly secured to the iron post, mkd. X W.2 4 U.S.M.S. 4792; from which A cairn stands adjacent to the iron post. No local bearing objects or bearing trees available. Thence S.68°08'55"E.
55.62	Intersect line 5-1, M.S. No. 1297A, Falls lode, at a point from which Cor. No. 1, identical with Cor. No. 3 Wedge No. 2 lode of this survey, bears S.20°17'11"W., 1,002.72 ft. dist.
300.00	Lode line; discovery point bears S.17°07'03"W., 225. ft. dist.
600.00	Cor. No. 1, and place of beginning.
Mineral Survey No. 4792	
	AREAS Acres
	Total area, Merchant Mine lode ----18.595
	Area in conflict with ---
	M.S. No. 1297A Cuba lode ----- 1.724
	M.S. No. 1297A Falls lode ----- 2.966
	M.S. No. 1297A Ajax Consolidated lode -- 0.256
	Total area, Tailor lode -----11.912
	Area in conflict with ---
	M.S. No. 1297A Dan Webster lode ----- 0.517
	M.S. No. 1297A Cuba lode ----- 1.374
	Merchant Mine lode of this survey ----- 1.055
	Merchant Mine lode of this survey exclusive of its conflict with M.S. No. 1297A
	Cuba lode ----- 0.868
	Total area, Wedge lode -----17.870
	Area in conflict with ---
	M.S. No. 1297A Dan Webster lode ----- 0.136
	M.S. No. 1297A Potomac lode ----- 1.014
	M.S. No. 1297A Central lode ----- 4.102
	M.S. No. 1297A Central lode exclusive of its conflict with M.S. No. 1297A Potomac lode ----- 4.078
	M.S. No. 4718 (unapproved) Santa Rita
	Fraction lode ----- 0.808

(This form bound on left side)

FEET	
	<p>M.S. No. 4718 (unapproved) Santa Rita Fraction lode exclusive of its conflict with:</p> <p style="padding-left: 2em;">(1) M.S. No. 1297A Potomac lode - 0.561 (2) M.S. No. 1297A Central lode - 0.396 (3) M.S. No. 1297A Potomac and Central lodes ----- 0.174 Total area, Wedge No. 2 lode -----13.806 Area in conflict with ---</p> <p>M.S. No. 1297A Falls lode ----- 0.640 M.S. No. 1297A Central lode ----- 5.701 M.S. No. 1297A Falls lode exclusive of its conflict with M.S. No. 1297A Central lode ----- 0.355 Wedge lode of this survey ----- 3.436 Wedge lode of this survey exclusive of its conflicts with M.S. No. 1297A Central lode ----- 2.391</p> <p style="text-align: center;">LOCATION</p> <p>This survey is located in the NE 1/4 and SE 1/4 sec. 25, T.18S., R.15E., and the NW 1/4 and SW 1/4 of sec. 30, T.18S., R.16E., G. & S.R.M. The survey of the Merchant Mine, Tailor, Wedge and Wedge No. 2 lodes is identical with the respective location as marked on the ground.</p> <p style="text-align: center;">EXPENDITURES</p> <p>The improvements and the value of the labor and improvements made upon or for the benefit of each of the lode locations embraced in said mining claim by the claimant or its grantors are as follows:</p> <p>No. 1 The discovery point of the Merchant Mine lode is on the lodeline and line 1-2, at a point 296.50 ft. from Cor. No. 1. Value, None</p> <p>No. 1 The discovery point of the Tailor lode is on the lodeline, 300.00 ft. from a point on line 4-1, 260.50 ft. from Cor. No. 4. Value, None</p> <p>No. 1 The discovery point of the Wedge lode is on the lodeline, 300.00 ft. from a point on line 1-2, 300.00 ft. from Cor. No. 1. Value, None</p> <p>No. 1 The discovery point of the Wedge No. 2 lode is on the lodeline, 225.00 ft. from a point on line 4-1, 300.00 ft. from Cor. No. 4. Value, None</p> <p>An interest in a common improvement described as follows:</p>

FEET	
	<p>A drilling program to delineate a copper ore body underlying these claims. As the terrain is rather rugged and the potential ore at considerable depth, drilling is the only logical way to explore and delineate the ore horizon.</p> <p>Following is a list of drill holes describing each and giving its location within a particular lode and its value:</p> <p>A drill hole, No. A 887, bears N.18°57'W. 334. ft. from Cor. No. 1 Tailor lode; BX in size, 133 ft. deep. Value \$1,220.50</p> <p>A drill hole, No. A 811, bears S.52°47'W. 335. ft. from Cor. No. 1 Merchant Mine lode; NX-BX in size, 1,807 ft. deep. Value \$11,128.52</p> <p>A drill hole, No. A 744 bears S.80°29'W. 1,125. ft. from Cor. No. 1 Merchant Mine lode; NX in size, 1,041 ft. deep. Value \$7,626.06</p> <p>A drill hole, No. A 803 bears S.56°43'E. 550. ft. from Cor. No. 1 Wedge No. 2 lode; NX in size, 1,889 ft. deep. Value \$14,765.80</p> <p>A drill hole, No. A 857 bears S.20°48'E. 292. ft. from Cor. No. 1 Wedge lode; NX in size, 1,633 ft. deep. Value \$12,868.11</p> <p>A drill hole, No. A 805 bears S.2°09'W. 748. ft. from Cor. No. 1 Wedge lode; NX in size, 1,526 ft. deep. Value \$9,875.20</p> <p>Value of drill holes, \$57,484.19 Value of one-fourth interest, \$14,371.05</p> <p>Five hundred dollars or more has been expended in these improvements in such a manner as tends to the development of each lode of this survey subsequent to its location and to the time since which common ownership and contiguity have prevailed, therefore, an undivided one-fourth interest in their value is hereby credited to each of the said lodges of this survey.</p> <p>No portion of or interest in these improvements has been credited heretofore as patent expenditures to any lode claim.</p> <p style="text-align: center;">OTHER IMPROVEMENTS</p> <p style="text-align: center;">None</p> <p style="text-align: center;">OTHER CORNER DESCRIPTIONS AND SUPPLEMENTAL DATA</p>

FEET	
	<p>M.S. No. 1297A Dan Webster lode: Cor. Nos. 1, 2, and 4 are wood posts 4 X 4 ins., 2 ft. above ground, standing in a mound of stones. The posts are slightly loose in the ground or stones. The inscribed data are partially identifiable. Cor. No.1 is identical with Cor. No. 2 of the Potomac lode of the same survey and Cor. No. 2 is identical with Cor. No. 2 of the Patrick Henry lode of the same survey. Cor. No. 4, identical with Cor. No. 3 of the Potomac lode of the same survey and Cor. Nos. 3 and 4, M.S. No. 4718 (unapproved), Santa Rita #s 4 and 8A lodes respectively. Line 1-2 was found to be N.27°12'35"E., 1,385.12 ft. instead of N.27°30'E., 1380.00 ft. as approved. Line 4-1, common with line 2-3 Potomac lode of the same survey, was found to be N.59°00'15"W., 599.66 ft. instead of N.58°35'W., 600.00 ft. as approved.</p> <p>M.S. No. 1297A Potomac lode: Cor. No. 1 is a wood post 4 X 4 ins., 2 ft. above ground. Cor. Nos. 2 and 3 described above. Line 1-2 was found to be N.34°46'26"E., 1,505.62 ft. instead of N.35°10'E., 1,500.00 ft. as approved. Line 2-3 described above.</p> <p>M.S. No. 1297A Central lode: Cor. No. 4, identical with Cor. No. 3 of the Wedge lode of this survey described above. Cor. Nos. 1, 2 and 3 are wood posts, 4 X 4 ins., 2 ft. above ground, standing in a mound of stones. The posts are slightly loose in the ground or stones. The inscribed data are partially identifiable. Line 2-3 was found to be N.73°27'13"E., 598.36 ft. instead of N.73°30'E., 600.00 ft. as approved. Line 3-4 was found to be S.16°31'52"E., 1,298.61 ft. instead of S.16°30'E., 1300.00 ft. as approved. Line 4-1 was found to be S.73°29'08"W., 597.60 ft. instead of S.73°30'W., 600.00 ft. as approved.</p> <p>M.S. No. 1297A Falls lode: Cor. No. 1, identical with Cor. No. 3 of the Wedge No. 2 lode of this survey described above. Cor. No. 4, identical with Cor. No. 2 of the Ajax Consolidated lode of the same survey, could not be found. Cor. No. 5, identical with Cor. No. 1 of the Ajax Consolidated lode of the same survey, is a wood post, 4 X 4 ins., 2 ft. above ground, standing in a mound of stones. The post is slightly loose in the ground or stones. The inscribed data is partially identifiable. Line 4-5 is shown as approved. Line 5-1 was found to be S.20°17'11"W., 1,499.79 ft. instead of S.20°25'W., 1,500.00 ft. as approved.</p> <p>M.S. No. 1297A Ajax Consolidated lode: Cor. Nos. 1 and 2 described above. Cor. No. 5, identical with Cor. No. 3 of the Cuba lode and Cor. No. 4 of the Hilo Consolidated lode, both of the same survey, is a wood post 4 X 4 ins., 2 ft. above ground, standing in a mound of stones. The post is slightly loose in the stones or ground. Line 1-2 described above. Line 5-1 was found to be S.18°32'W., 1,112.04 ft. instead of S.18°59'W., 1,108.40 ft. as approved.</p>

FEET	<p>M.S. No. 1297A Cuba lode: Cor. No. 3 described above. Cor. Nos. 1, 2 and 4 are wood posts, 4 X 4 ins., 2 ft. above ground. The posts are slightly loose in the stones or ground. The inscribed data are partially identifiable. Line 1-2 was found to be N.69°46'42"W., 339.96 ft. instead of N.69°35'W., 333.00 ft. as approved. Line 2-3 was found to be N.19°52'46"E., 120.31 ft., thence N.18°32'E., 1,112.04 ft. instead of N.18°59'E., 1,232.00 ft. as approved. Line 4-1 was found to be S.30°36'15'W., 1,251.61 ft. instead of S.31°16'W., 1,253.90 ft. as approved.</p>					
	<p>MEMORANDUM</p> <p>None</p>					
	<p style="text-align: center;">FIELD ASSISTANTS</p> <table style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left; width: 50%;">Name</th> <th style="text-align: left; width: 50%;">Capacity</th> </tr> </thead> <tbody> <tr> <td>Kent Miller</td> <td>Assistant Instrumentman</td> </tr> <tr> <td>Charles Najarian</td> <td>Chainman- Axeman</td> </tr> </tbody> </table>	Name	Capacity	Kent Miller	Assistant Instrumentman	Charles Najarian
Name	Capacity					
Kent Miller	Assistant Instrumentman					
Charles Najarian	Chainman- Axeman					

(This form bound on left side)

F E E T

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

CERTIFICATE OF SURVEYOR

14

Name of Mineral Surveyor Harvey W. Smith	Date Sept. 6, 1978
---	-----------------------

I HEREBY CERTIFY That in pursuance of an order received from the Chief, Branch of Cadastral Survey, Bureau of Land Management, at Phoenix, Arizona, dated May 2, 1977, I have carefully executed the survey of the claim of Anamax Mining Company known as the (lode, placer, or mill site) Wedge, Wedge No 2, Tailor & Merchant Mine lodes situated in Pima County, Secs. 25 and 30, Township 18 S., Range s 15 & 16 E., G. & S. R. Meridian, in the State of Arizona.

This survey, designated as number 4792, has been executed by me and under my direction and has been made in strict conformity with said order, the Manual of Instructions for the Survey of Public Lands of the United States, and in specific manner described in the foregoing field notes.

I FURTHER CERTIFY That the labor expended and improvements made upon and for the benefit of the (lode or placer) Wedge, Wedge No 2, Tailor & Merchant Mine lode location(s) embraced in the said mining claim by claimant(s) or their grantors are fully stated in my report. The character, extent, location, and itemized value are specified in full detail. No portion of, or interest in, said labor and improvements so credited to this claim has been included in the estimate of expenditures upon any other claim.

Paradise Valley, Arizona
(Location)

Harvey W. Smith
(Signature of Mineral Surveyor)

CERTIFICATE OF APPROVAL

Office Arizona State Office
Location Phoenix, Arizona
Date July 25, 1979

The foregoing field notes of mineral survey number 4792, in Secs. 25 & 30, Range s 15 & 16 E., Gila and Salt Meridian, in the State of Arizona, executed by Harvey W. Smith, River, Mineral Surveyor, under order dated May 2, 1977, having been critically examined and the necessary corrections made prior to their certification by the surveyor, the field notes and the survey therein described are hereby approved.

Boyd S. Owens
Boyd S. Owens (Authorized Signature)


Chief, Branch of Cadastral Survey
(Title)

CERTIFICATE OF TRANSCRIPT

I HEREBY CERTIFY That the foregoing transcript of field notes of the above-described mineral survey number is a true copy of the original field notes.

(Authorized Signature) (Title)

Title 18, U.S.C. section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious, or fraudulent statements or representations as to any matter within its jurisdiction.

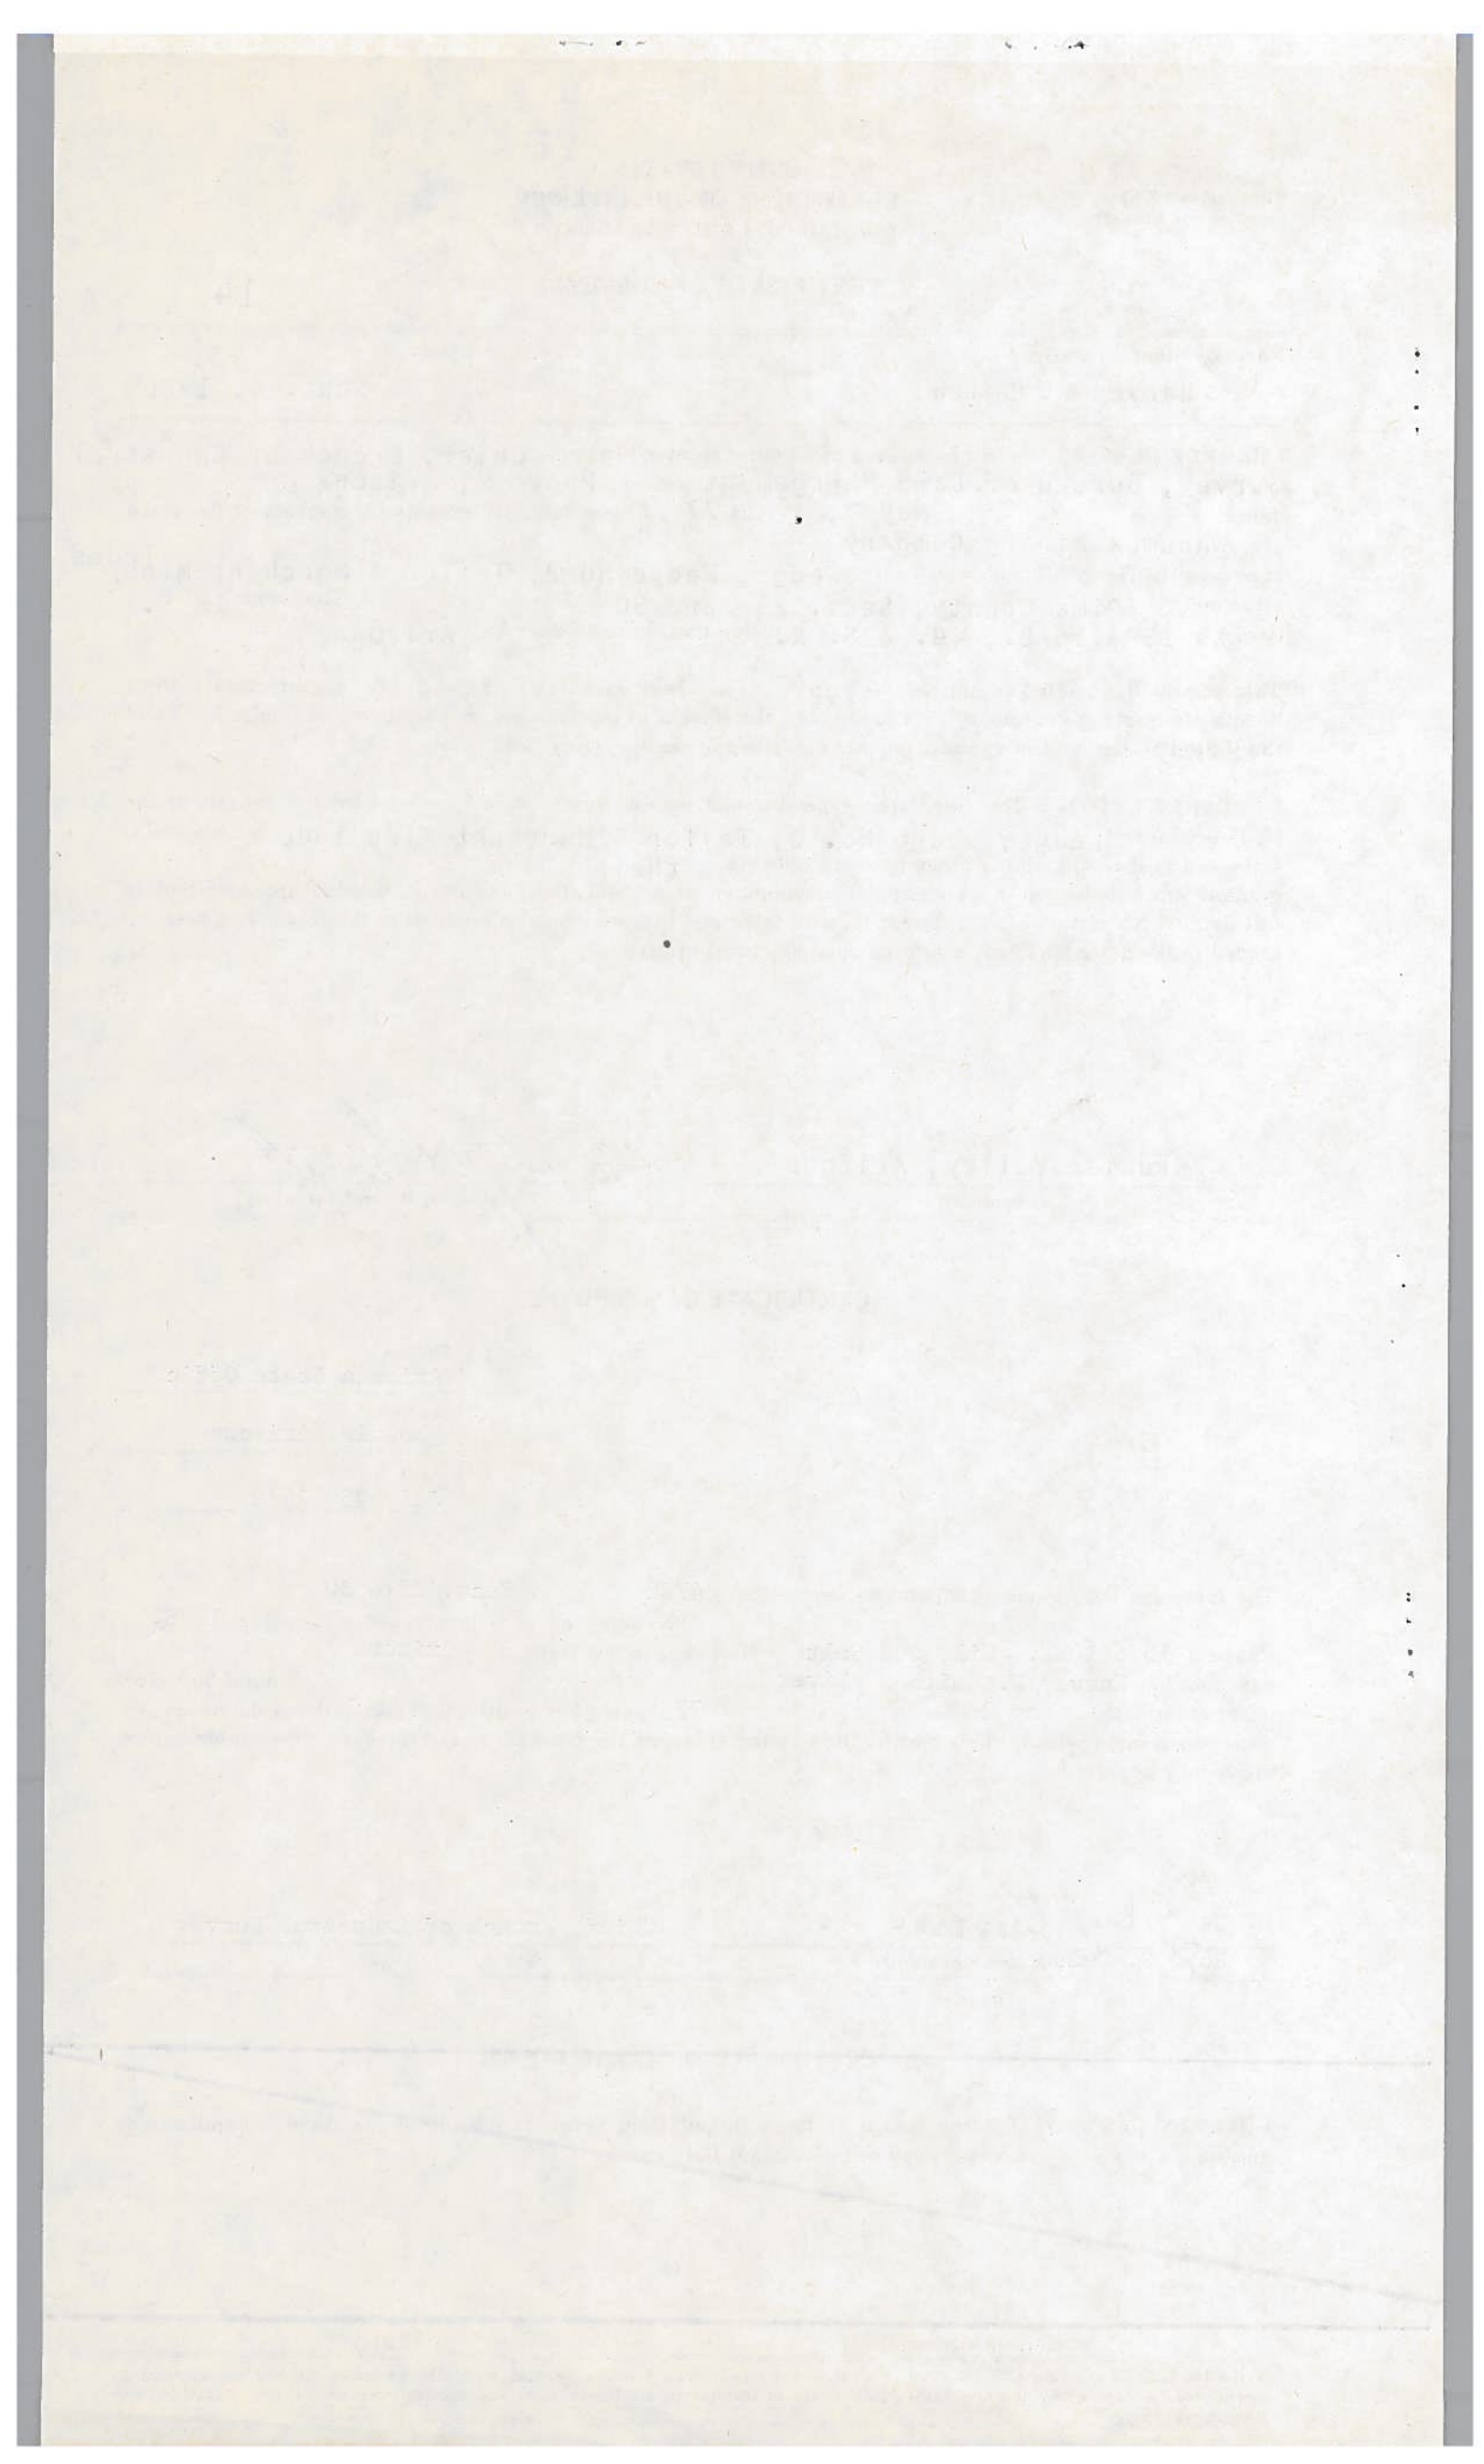

UNITED STATES DEPARTMENT OF THE INTERIOR 9605 (956)
BUREAU OF LAND MANAGEMENT M.S. 4792
ARIZONA STATE OFFICE

NOTICE OF CANCELLATION OF MINERAL SURVEY

The Merchant Mine and Tailor lodes, Mineral Survey No. 4792, located in sections 25 and 30, Township 18 South, Ranges 15 and 16 East, Gila and Salt River Meridian, Arizona, are hereby canceled.


These claims have not been filed with the Arizona State Office, Bureau of Land Management, in accordance with Section 314, 90 STAT. 2769, (43 U.S.C. 1744).

This cancellation was necessitated to clear the record.

The Mineral Survey Plat should be noted as follows:

"Merchant Mine and Tailor M.S. 4792 were canceled July 12, 2012, by memo 9605 (956) M.S. 4792, which is now a part of the original field notes."

July 12, 2012
Date


Chief Cadastral Surveyor of Arizona

