

SUBDIVISION

T 23 S R 21 E

~~1~~

II

PH. CONTZEN
U. S. DEP. SUR

No. 982

BOOK 982

4-671

FIELD NOTES
GENERAL LAND OFFICE.

982

Indexed Book 981

60

Township 23S R. 21E

6	91	5	64	4	3	2	1
89	88	63					
7	86	8	62	9	10	11	12
84	83	60					
18	82	17	16	15	14	13	
80	79						
19	77	20	21	22	23	24	
75	74						
30	72	29	28	27	26	25	
71	69						
31	66	32	33	34	35	36	

Subdivision of S 23 S, R 21 E Continued

Chains

N 89° 57' W, on a true line bet sres
9, and 16.

Over level and gently rolling land.

40.04 Set a redwood post, 3 ft long, 4 ins
sq, with marked stone, 24 ins in
the ground, for $\frac{1}{4}$ sec ev, marked
 $\frac{1}{4}$ S 9 on N. and S 16 on S faces; dig
pits 18 x 18 x 12 ins, E and W of post,
3 ft dist, and raise a mound of
earth, 3 $\frac{1}{2}$ ft base, 1 $\frac{1}{2}$ ft high, N. of
ev.

58.60 Dry wash, 90 lbs wide, course N.
Easterly.

80.08 Thr ev of sres 8, 9, 16 and 17.
Land, level and gently rolling.
Soil, sandy and gravelly; 1st and
2nd rats.

No timber.

Subdivision of R 23 S, R 21 E - Continued

Chains

1000' W bet sees 8 and 9.
Over level land

4000 Set a redwood post, 3 ft long, 4
ins sq, with marked stone, 24 ins
in the ground, for $\frac{1}{4}$ sec cor, marked
 $\frac{1}{4}$ S 8 on W and S 9 on E faces; dig
pits 18x18x12 ins, N and S of post,
3 ft dirt, and raise a mound of
earth $3\frac{1}{2}$ ft base, $1\frac{1}{2}$ ft high, W
of cor.

8000 Set a redwood post, 3 ft long, 4
ins sq, with marked stone, 24 ins
in the ground, for cor of sees 4,
5, 8 and 9, marked
R 23 S, S 4 on NE
R 21 E, S 9 on SE
S 8 on SW and
S 5 on NW faces with 5 notches
on S and 4 notches on E edge.

Subdivision of P 23 S. R 21 E - Contained
Chain

dig pits 18x18x12 ins, in each sec,
5 1/2 ft dist, and raise a mound of
earth, 4 ft base, 2 ft high, W
of cor.

Land, level.

Soil, sandy and gravelly 1st and
2nd rate.

No timber.

S 89° 54' E, on a random line bet
secs 4 and 9.

4000 Set temp 1/4 sec cor.

8004 Intersect N and S line 5 lks N of
of cor of secs 3, 4, 9 and 10

Shiner Run

N 89° 55' W, on a true line bet
secs 4 and 9.

Over level land.

29.00 Road, bears N 85° W, and S 85° E.

4002 Set a redwood post, 3 ft long, 4

Subdivision of S 23 S, R 21 E - Continued
Chain

- ins sq, with marked stons, 24 ins in the ground, for $\frac{1}{4}$ sec cor, marked $\frac{1}{4}$, S 4 on N and S 9 on S faers; dig pits 18x18x12 ins, E and W of post, 3 ft dist, and raise a mound of earth, $3\frac{1}{2}$ ft base, 12 ft high, N of cor.
- 8004 Thr cor of secs 4, 5, 8 and 9.
Land, level.
Soil, gravelly; sand matr.
No timber.

N. 0° 02' W on a random line bet secs 4 and 5.

79.00 Set trap $\frac{1}{4}$ sec cor

79.52 Intersect N. bdy of S 1/4 5 lbs W of cor of secs 4, 5, 32 and 33, as heretofore described.

Plumer Brun

South on a true line bet secs 4

Subdivision of P 23 S, R 21 E - Continued

Chain

and 5.

Over level land.

24.60 Road, bears N. Westerly and S
Easterly.25.40 Dry wash, 30 lbs wide, course N.
Easterly.39.82 Set a granite stone, 18x8x6 ins, 12 ins
in the ground, for $\frac{1}{4}$ sec cor,
marked $\frac{1}{4}$ 5 on W and 4 on E. faces;
dig pits 18x18x12 ins, N and S of
stone, 3 ft ft dist, and raise a
mound of earth, 3 $\frac{1}{2}$ ft base, 2 $\frac{1}{2}$ ft
high, W of cor.46.80 Dry wash, 40 lbs wide, course N.
Easterly.79.00 Road, bears N. Easterly, and S.
Westerly.79.82 The cor of sres 4, 5, 8 and 9.
Level, level.

Subdivision of P 23 S, R 21 E - continued
Chains

Soil, gravelly and rocky; 3rd rate.
No timber.

December 12, 1901.

December 13, 1901. At 8^h 30^m a.m.
I met, Post off 31.23 on the lat
arc, 23° 08' S on the decl arc, and
determined a true meridian with
the solar at the ev of sres 5, 6, 31
and 32, on the S leg of the N^o,
as heretofore described.

Phaner Drum

N^o 3' N, bet sres 31 and 32.

Over mountainous land.

Descending.

- 26.00 Foot, canyon, 1 ch wide, course Easterly.
35.00 Wire fence, bars E, and W.
35.30 Road, bars Easterly and Westerly.
35.90 Wire fence, bars E and W.

Subdivision of S 23 S, R 21 E - Continued

Chains

- 37.00 Descend to Ash Canyon.
- 40.00 Fort.
- Set a sandstone 18 x 12 x 8 ins, 12 ins in the ground, foot 1/4 sec cor, marked 1/4 S 31 on W and 32 on E. faces, from which an oak 10 ins diam, bears $73\frac{1}{2}^{\circ}$ W, 79 lbs dist, marked 1/4 S 31, B. 7.
- A sycamore 12 ins diam, bears N. 36. E, 109 lbs dist, marked 1/4 S 32, B. 7.
- 40.50 Ash creek, 20 lbs wide, course Easterly.
- 41.70 Leave Ash canyon and enter flat
- 43.70 Wire fence, bears E and W.
- 45.00 Old stone chimney, bears 20 lbs E; spring bears 4 1/2 lbs W.
- 48.50 Wire fence, bears E and W, and ascend E slope of ridge.
- 53.00 Top of ridge, bears N. W. Easterly and S. E. westerly.

Subdivision of P 23 S, R 21 E - Continued
 chains W.C.

54.00 ¹ Gurnis ranch house bears 10 chs E
 and disend.

71.00 Foot of ascent.

74.00 Stampis ranch houses on both sides
 this point.

82.00 Set a sandstone 15x10x10 ins, 12 ins
 in the ground, for cor of sres 29, 30, 31
 and 32, marked with 1 notch on S
 and 5 notches on E. edges, from which
 an oak 24 ins diam, bears $N 25\frac{1}{2}^{\circ} E$, 117
 lks dist, marked P 23 S, R 21 E, S 29,
 B. 7.

An oak 8 ins diam, bears $S 87\frac{1}{2}^{\circ} E$, 115
 lks dist, marked P 23 S, R 21 E, S 32,
 B. 7.

An oak 8 ins diam, bears $S 10^{\circ} W$, 27
 lks dist, marked P 23 S, R 21 E, S 31,
 B. 7.

An oak 10 ins diam, bears $N 79\frac{3}{4}^{\circ} W$.

Subdivision of P 23 S, R 21 E - Continued

Chains

61 lbs dist, marked P 23 S, R 21 E,
S 30, B. 77.

Land, mountainous and level.

Soil, gravelly and rocky; 2nd and
4th rate.Timber, oak, and some sycamore in
Ash canyon.

Mountainous land, 72.00 lbs.

East on a random line bet sres

29 and 32.

40.00 Set temp $\frac{1}{4}$ sec cor.79.78 Intersect N and S line 8 lbs N of
cor of sres 28, 29, 32 and 33.

Phaner Brun

N 89° 57' W, on a true line bet sres
29 and 32

Over rolling land.

12.40 Extra oak timber, runs Northw and

Subdivision of S 23, T 21, E - Continued
Chains

- 31.86 Dry wash, 40 lbs wide, course northerly
Sutherly.
- 36.00 Dry wash, 50 lbs wide, course N.
Easterly.
- 38.46 Wire fence, bars N.W. and S.E.
- 39.89 Set a sandstone 18x10x6 ins, 12 ins in
the ground, for $\frac{1}{4}$ sec cor. marked
 $\frac{1}{4}$ 29 on N. and 32 on S faces, from
which an oak 12 ins diam, bears
N. 7° W, 292 lbs dist, marked $\frac{1}{4}$ S 29. B.T.
An oak 12 ins diam, bears S. 16° W, 236
lbs dist. marked $\frac{1}{4}$ S 32. B.T.
- 42.25 Dry wash, 50 lbs wide, course N.
Easterly.
- 47.00 Road, bars N. and S.
- 49.26 Wire fence, bars N. and S
- 49.78 The cor of secs 29, 30, 31, and 32.
Land, rolling.
Soil, gravelly; end and 3rd rate.

Subdivision of P 23 S, R 21 E - Continued.

Chains

Pine, oak.

West on a true line bet secs 30 and 31.

Over level land

22.00 Gulch, 30 lbs wide, course N.

Easterly

29.00 Foot of mountain, and ascend E. slope

40.00 Set a porphyry stone, 18 x 12 x 8 ins, 12 ins in the ground, for $\frac{1}{4}$ sec cor, marked $\frac{1}{4}$ 30 on N. and 31 on S faces; from

which an oak 12 ins diam, bears N. 67° E, 62 lbs dist, marked $\frac{1}{4}$ S 30, B. 7.

An oak 12 ins diam, bears S. 25° E, 34 lbs dist, marked $\frac{1}{4}$ S 31, B. 7.

At this point I discontinue on account of high and abrupt mountains.

Land, level and mountainous

Soil, gravelly and rocky; 2nd and 4th rates.

Subdivision 123 S. 16 21 E. - Continued

Chain

Timber, oak.

Mountainous land, 11.00 chs.

11003' W, bet secs 29 and 30.

Over rolling land.

Through dense oak undergrowth.

19.00 Dry wash, 30 lbs wide, course N. Easterly

24.00 Wire fence, bars Easterly and Westerly.

33.00 Dry wash, 15 lbs wide, course N. Easterly.

40.00 Set a granite stone $18 \times 8 \times 5$ ins, 12 ins in the ground, for $\frac{1}{4}$ sec cor, marked $\frac{1}{4}$ 30 on W. and 29 on E. faces; from which an oak 6 ins diam, bars S. $41\frac{1}{2}^{\circ}$ E, 48 lbs dist, marked $\frac{1}{4}$ S 29, 13.57.

An oak 5 ins diam, bars S. 72° W, 8 lbs dist, marked $\frac{1}{4}$ S, 30, 13.57.

50.00 Road to spring, bars N. Westerly and S. Easterly.

60.00 Dry wash, 15 lbs wide, course Easterly.

Subdivision of P23 S, R21 E - Continued.

Chain

House

69.00 Drury's ~~spring~~, bears 10 chs E.

71.20 Wire fence, bears E. and W.

80.00 Set a pine post, 8 ft long, 4 ins sq,
with marked stone, 24 ins in the
ground, for cor of secs 19, 20, 29, and
30, marked

P23 S, S20 on N.E.

R21 E, S29 on S.E.

S30 on S.W. and

S19 on N.W. faces with 2 notches
on S. and 5 notches on E. edges,
from which an oak 8 ins diam
bears $71\frac{3}{4}^{\circ}$ E, 35 lbs dist, marked

P23 S, R21 E, S20, B. 57.

An oak 4 ins diam, bears S. 71° E,
98 lbs dist, marked P23 S, R21 E,
S29, B. 57.An oak 5 ins diam, bears S. 7° W, 7
lbs dist, marked P23 S, R21 E, S30, B. 57.

Subdivision of S 23 S, R 21 E - Continued
Chains

An oak 12 ins diam, bears $N 37\frac{1}{2}^{\circ} W$
257 lks dist, marked S 23 S, R 21 E,
S 19, B. 71.

Land, rolling.

Soil, gravelly; 2nd and 3rd rate.

Pink, oak. Undergrowth, oak.

Dense undergrowth, 8000 lbs.

$S 89^{\circ} 54' E$, on a random line bet secs
20 and 29.

4.00 Set trap $\frac{1}{4}$ sec cor.

79.80 Intersect N. and S. line 16 lks N.
of cor of secs 20, 21, 28 and 29.

Shance S run

$N 89^{\circ} 50' W$, on a true line bet secs
20 and 29.

Over rolling land

21.00 Dry wash, 20 lks wide, course N . Easterly

39.90 Set a pine post, 3 ft long, 4 ins sq, with

Subdivision of S 23 S, R 21 E - Continued
 Chain

marked stone, 24 ins in the ground,
 for $\frac{1}{4}$ sec cor, marked $\frac{1}{4}$ S 20 on N,
 and S 29 on S faces; dig pits 18x18x12
 ins, E. and W. of post, 3 ft. dist, and
 raise a mound of earth, $3\frac{1}{2}$ ft. base,
 $1\frac{1}{2}$ ft. high, ^N of cor.

63.10 Road to Lowry's, bars N. Westerly and
 S. Easterly.

64.80 Wire fence, bars N. and S. and
 enter oak undergrowth.

70.70 Wash, ^(D) 20 lbs wide, course N. Easterly.

79.80 She cor of sees 19, 29, 29 and 30.

Land, rolling.

Soil, gravelly; 3rd rate.

Timber, oak. Undergrowth, oak.

West on a random line bet sees
 19 and 30.

4.000 Set 1/4 sec cor.

Subdivision of T 23 S, R 21 E - Continued

Chain

79.28

Intersect W bdy of $\frac{1}{4}$ S 8 lks S of
cor of sres 19, 24, 25 and 30, as heretofore
described.

Planes Run

S $89^{\circ}57'$ E, on a true line bet sres 19
and 30.

Ascending along E. slope of high ridge,
bearing E. and W.

21.00

Top of S.E. spur of high ridge, descend

39.28

Point for $\frac{1}{4}$ sec cor falls on granite
boulder in place, $4 \times 4 \times 2$ ft above
ground, on which

cut a cross (x) at the exact corner
point for $\frac{1}{4}$ sec cor, marked $\frac{1}{4}$ 19 on
N. and 30 on S. sides of cross, from
which an oak 10 ins diam, bears N.
 10° E, 255 lks dist, marked $\frac{1}{4}$ S. 19, 13.77.

An oak 8 ins diam, bears S $78^{\circ}40'$, 89
lks dist, marked $\frac{1}{4}$ S 30, 13.77.

Subdivision of S 23 S. R 21 E - Continued

Chains	
48.10	Dry wash, 15 lbs wide, course N. Easterly.
59.60	Wire fence, bars N. W. and S. E.
60.20	Dry wash, 20 lbs wide, course, Westerly
79.28	The cor of sres 19, 20, 29, and 30. Land, mountainous. Soil, gravelly and rocky; 2nd and 3rd rate. Timber, oak; undergrowth, oak Mountainous land, 79.28 chs. December 13, 1901.
	No 03' W, bet sres 19, and 20. Over rolling land. Through oak timber and dense un- dergrowth.
21.40	Wire fence, bars N. E. and S. W
28.70	Dry wash, 20 lbs wide, course N. Easterly.
40.00	Set a sandstone 18x10x6 ins, 12 ins

Subdivision of S 23 S, R 21 E - Continued
Chain

in the ground, for $\frac{1}{4}$ sec cor, marked
 $\frac{1}{4}$ 19 on W, and 20 on E. faces, from
which an oak 10 ins diam, bears
S $65\frac{1}{2}^{\circ}$ E, 80 lks dist, marked $\frac{1}{4}$ S 20,
B. 7.

An oak 14 ins diam, bears S 11° W,
93 lks dist, marked $\frac{1}{4}$ S 19, B. 7.

42.60 Wire fence, bears N. E. and S. W.

48.50 Wire fence, bears N. W. and S. E.

49.20 Dry wash, 20 lks wide, course N.
Easterly

52.00 Large oak timber, bears N. Westerly
and S. Easterly.

80.00 Set a granite stone, $20 \times 12 \times 12$ ins, 14
ins in the ground, for cor of sec 17,
18, 19 and 20, marked with 3 notches on
S and 5 notches on E. edges, and
raise a mound of stone 2 ft base, $1\frac{1}{2}$ ft
high, W of cor. Pits impracticable.

Subdivision of S 23 S, R 21 E - continued
Chain

Land, rolling.

Soil, gravelly; 3rd rate.

Timber, oak; undergrowth, oak.

Rare undergrowth, 8.00 ch.

S 89°50' E, on a random line bet sres
17 and 20.

4.00 Set trip $\frac{1}{4}$ sec cor

79.80 Intersect N. and S. line 5 lbs S of
cor of sres 16, 17, 20 and 21.

Shiner Run

N. 89°52' W, on a true line bet sres 17
and 20.

Over gently rolling land

30.20 Dry wash, 120 lbs wide, course
N. N. E. astraly.

39.90 Set a granite stone, 18 x 10 x 8 ins, 12
ins in the ground, for $\frac{1}{4}$ sec. cor.
marked $\frac{1}{4}$ 17 on N. and 20 on S.

Subdivision of S 23 S, R 21 E - continued.

Chains

faces; dig pits 18x18x12 ins, E. and
W. of stone, 3 ft dist, and raise a
mound of earth $3\frac{1}{2}$ base, $1\frac{1}{2}$ ft high,
N of cor.

62.77 Road, bars Northwly and Southwly.

79.80 The cor of secs 17, 18, 19 and 20

Land, gently rolling.

Soil, gravelly; 3rd rate.

No timber.

N $89^{\circ}57'W$ on a random line bet
secs 18 and 19.

40.00 Set temp $\frac{1}{4}$ sec cor.

79.22 Intersect W bdy of Sp 8 lks N. of
cor of secs 13, 18, 19 and 24, as heretofore
described.

Plumer Run

East on a true line bet secs 18
and 19.

Subdivision of S 23 S, R 21 E - Continued

Chain

- Over rolling land
through dense timber.
- 16.00 Orchard and ruins of old house
bars 12 chs N.
- 20.00 Grave dense timber, bars Northwaly
and Southwaly
- 24.00 Ditch, 10 lks wide, course S Easterly.
- 34.00 Dry wash, 20 lks wide, course S. E.
- 39.22 Set a sandstone 18x10x6 ins, 12 ins in
the ground, for $\frac{1}{4}$ sec cor, marked
 $\frac{1}{4}$ 18 on N. and 19 on S faces; dig pits
18x18x12 ins, E. and W. of ~~sec~~^{cor}, 3 ft dist,
and raise a mound of earth, $3\frac{1}{2}$ ft
base, $1\frac{1}{2}$ ft high N. of cor.
- 47.50 Wire fence, bars N. and S
- 79.22 3rd cor of sres 17, 18, 19 and 20.
Land, rolling and level.
Soil, gravelly and stony; 3rd and
4th rats.

Subdivision of S 23 S, R 21 E - Continued
Chains

Timber, oak.

Heavily timbered land, 20.00 chs.

N 0° 03' W, bet sees 17 and 18.

Over gently rolling land.

25.90 Dry wash, 25 lbs wide, course N.
Easterly.

40.00 Set a granite stone, 18 x 8 x 6 ins, 12 ins
in the ground, for $\frac{1}{4}$ sec cor, marked
 $\frac{1}{4}$ 18 on W, and 17 on E faces, dig
pits 18 x 18 x 12 ins, N and S of ~~stone~~^{stone},
3 ft dist, and raise a mound of earth
3 $\frac{1}{2}$ ft base, 1 $\frac{1}{2}$ ft high, W of cor.

41.00 Dry wash, 25 lbs wide, course N.
Easterly.

70.05 Road, bears N. Westerly and S Easterly

80.00 Set a granite stone 18 x 10 x 8 ins, 12
ins in the ground, for cor of sees
7, 8, 17, and 18, marked with 4

Subdivision of 823 S, R. & E - continued
Chains

notches on S and 5 notches on E
edges, and raise a mound of stone
2 ft base, 1½ ft high, W of cor.

Pits impracticable.

Land, gently rolling.

Soil, gravelly; 3rd rate.

Timber, some sycamore along wash.

S 89° 52' E, on a random line bet
sres 8 and 17.

40.00 Set temp ¼ sec cor.

80.18 Enter set N. and S line 8 lbs S of
cor of sres 8, 9, 16, and 17.

Shiner Run

N 89° 55' W, on a true line bet sres
8 and 17.

Over level and gently rolling land.

40.09 Set a granite stone 18 x 10 x 8 ins, 12
ins in the ground, for ¼ sec cor.

Subdivision of P 23 S, R 21 E - continued
Chains

- marked $\frac{1}{4}$ 8 on N. and 17 on S
faces, and raise a mound of stone
2 ft base, $\frac{1}{2}$ ft high, N of cor.
~~See impracticable~~
- 53.75 Road, cross N. Easterly and S
Westerly
- 80.18 The cor of sees 7, 8, 17 and 18.
Land, level and gently rolling.
Soil, gravelly and rocky; 3rd rate.
No timber.

Westward random line bet sees
7 and 18.

14000 Set trap $\frac{1}{4}$ sec cor.

79.15 Intersect W bdy of Sp 7 lks S of
cor of sees 7, 12, 13 and 18, as heretofore
described.

Shaner Run

S 89° 57' E, on a true line bet sees 7
and 18.

Subdivision of S 23 S, R 21 E - continued
Chains

Over mountainous land

Descending.

24.00 Foot of descent

31.98 Wire fence, bears N and S

38.15 Dry wash, 10 lks wide, course N,
Easterly.

39.15 Set a granite stone, 18 x 8 x 6 ins, 12
in the ground, for $\frac{1}{4}$ sec cor, marked
 $\frac{1}{4}$ 7 on N and 18 on S faces; dig
pits 18 x 18 x 12 ins, E and W of
~~stone~~
foot, 3 ft dist, and raise a
mound of earth, 3 $\frac{1}{2}$ base, 1 $\frac{1}{2}$ ft
high, N of cor; and enter gently
rolling land.

45.95 Telephone line bears N 27° E, and
S 27° W.

58.15 Road, bears N, Easterly and S
Westerly.

73.45 Road to Pt Unachua, bears

Subdivision of P 23 S, R 21 E - Continued
Chains

79.15 N. Westerly and S. Easterly.
The cor of sees 7, 8, 17 and 18.
Land, level and mountainous
Soil, gravelly and rocky; 3rd and
4th rate.
Sinder, scattering oak on West of line
Mountainous land 24.00, chs.
December 14, 1901.

4.000 No. 03 W, bet sees 7, and 8.
Over gently rolling land.
Set a granite stone 18 x 8 x 6 ins, 12 ins
in the ground, for $\frac{1}{4}$ sec cor, marked
 $\frac{1}{4}$ 7 on W, and 8 on E. faces; dig pits
18 x 18 x 12 ins, N, and S of stone, 3 ft
dist, and raise a mound of earth
3 $\frac{1}{2}$ ft base, 1 $\frac{1}{2}$ ft high, W of cor.
45.00 Road, bears N. Westerly and S.
Easterly.

Subdivision of S 23 S, R 21 E - Continued

Chains

- 57.00 Telephone line bears $N 27^{\circ} E$ and
 $S 27^{\circ} W$.
- 54.00 Dry wash, 50 lbs wide, course S
 Easterly.
- 55.00 Road, bears N Westerly and S
 Easterly, junction of roads bears
 50 lbs West.
- 58.00 Road, bears N Easterly and S.
 Westerly.
- 65.00 Dry wash, 50 lbs wide, course S
 Easterly.
- 8.00 Set a sandstone $18 \times 10 \times 8$ ins, 12 ins
 in the ground, for cor of sec
 5, 6, 7 and 8, marked with 5 notches
 on S and E edges, dig pits $18 \times 18 \times 12$
 ins, in each sec, $5 \frac{1}{2}$ ft dist, and
 raise a mound of earth 4 ft base,
 2 ft high, W. of cor.
 Land, gently rolling.

Subdivision of P 23 S, R 21 E - Continued

Chains

Soil, gravelly; sand and ord rate.
No timber.

S 89° 55' E, on a random line bet
secs 5 and 8

4000 Set temp $\frac{1}{4}$ sec cor.

8016 Intersect N. and S line 12 chs ~~N.~~^S of
cor of secs 4, 5, 8, and 9.

Shiner / Prun

West on a true line bet secs 5 and 8

Over level land

1.96 Road, bars N. Easterly and S
Westerly

24.26 Wire fence bars N. Easterly and
S. Westerly.

32.06 Wire fence, bars N. Westerly and
S Easterly.

38.00 Windmill, bars 5 chs N.

40.08 Set a granite stone, 18 x 8 x 6 ins, 12 ins

Subdivision of S 23 S, R 21 E - cont

Chains

in the ground, for $\frac{1}{4}$ sec cor, marked
 $\frac{1}{4}$ 5 on N and 3 on S faces; dig pits
 18 x 18 x 12 ins, E and W of post, 3 ft
 dist, and raise a mound of earth,
 $3\frac{1}{2}$ ft base, $1\frac{1}{2}$ ft high, N of cor.

53.00 Dry wash, 2 chs wide course N.

Easterly.

65.00 Telephone line crs. N. E. and S. W.

77.86 Road, crs. N. Easterly and S. Westerly.

80.16 The cor of secs 5, 6, 7 and 8

Land, level.

Soil, gravelly; 2nd and 3rd rate.

No timber.

N $89^{\circ}57'W$, on a random line bet
 secs 6 and 7.

41.00 Set temp $\frac{1}{4}$ sec cor.

79.04 Intersect W. bdy of S 20 lbs ^{N.} of
 of cor of secs 5, 6, 7 and 12, as here-
 tofore described.

Subdivision of Secs 5, 6, 7, E - Continued

Chains

Thimer Prism

N 89° 56' E, on a true line bet sres 6
and 7.

Over level land.

.60 Dry wash, 1 ch wide, course N. 85° E,

89.04 Set a granite stone, 18 x 10 x 8 ins, 12
ins in the ground, for $\frac{1}{4}$ sec cor,
marked 4 6 on N. and 7 on S faces,
dig pits 18 x 18 x 12 ins, E and W of
~~stone~~
post, 3 ft dist, and raise a mound
of earth $3\frac{1}{2}$ ft base, $1\frac{1}{2}$ ft high, N of
cor.

64.00 Dry wash, 30 lbs wide, course N.
Easterly.

79.04 Pls cor of sres 5, 6, 7, and 8.

Land, level.

Soil, gravelly and rocky; 3rd rate.

Timber, some ash, sycamore and
Walnut along wash

Subdivision of S 23 S, R 21 E - Continued

Chains

N⁰⁰0⁰ W, on a random line bet
secs 5 and 6.

4100 Set temp $\frac{1}{4}$ sec cor

79.90 Intersect N. bdy of Sp 26 lks ~~E~~^W
of cor of secs 5, 6, 31 and 32, as
heretofore described.

Plumer Burn

S⁰⁰0⁰ W, on a true line bet secs 5
and 6.

Over level and gently rolling land

39.90 Set a granite stone 18x8x6 ins, 12 ins
in the ground, for $\frac{1}{4}$ sec cor.

marked 46 on W and 5 on E
faces; dig pits 18x18x12 ins, N
and S of stone, 3 ft dist, and raise
a mound of earth, 3 $\frac{1}{2}$ ft base, 1 $\frac{1}{2}$ ft
high, W of cor.

4440 Dry wash, 20 lks wide, course N
Easterly.

- 4650 Dry wash, 20 lks wide, course N.
Easterly
- 5990 Dry wash, 30 lks wide, course N.
Easterly
- 7150 Dry wash, 30 lks wide, course N.
Easterly
- 7990 Sh. cor of sres 5, 6, 7 and 8.
Ground, level and gently rolling
Soil, gravelly and rocky, 3rd rate.
No timber.

December 15, 1901.

General Description.

- -

The greater portion of this Sp is level and gently rolling, covered with rich and nutritious grasses. The extreme southwest is mountainous. There is some good oak

timber on the mountains, and
ash, walnut and sycamore in
to h canyon. There are settlers
living in sec 31 and 32. In
sec 8 there is a well, windmill
and stock corral.


Philip Couzner

U. S. Deputy Surveyor.

List of Names.

No. 982

A List of the Names of the Individuals
 employed by *Philip Couzgen*
 U. S. Deputy Surveyor, to assist in running, meas-
 uring and marking the lines and corners described
 in the foregoing Field Notes of the survey of the
 subdivision lines
 of T. 23 S. R. 21 E

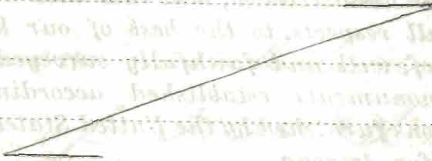

of the Gila and Salt River Base and Meridian, in
 the Territory of Arizona, showing the respective
 capacities in which they acted.

C. Bartholmey Chainman.

Owen Brown Chainman.

Chainman.

Chainman.

W. W. Miller Axeman.

Axeman.

Chas. Pogue Flagman.

Final Oath of Assistants.

We hereby certify that we assisted *Philip*
Coutzen U. S. Deputy Surveyor, in
 surveying all those parts or portions of the
subdivisional lines
of T. 23 S. R. 21 E

of the Gila and Salt River Base and Meridian, in
 the Territory of Arizona, as are represented in the
 foregoing field notes as having been surveyed by him
 and under his direction; and that said Survey has
 been in all respects, to the best of our knowledge
 and belief, well and faithfully surveyed, and the
 corner monuments established according to the
 instructions furnished by the United States Surveyor
 General for Arizona.

Casimir R. Barthelmy Chainman.
Owen Brown Chainman.

..... Chainman.

..... Chainman.

..... Axeman.

W. J. Miller Axeman.


Chas Poque Flagman. #

Sworn to and subscribed before me, this *16*.....

day of *December*....., 18*90*

Thomas A. Norton

Notary Public.

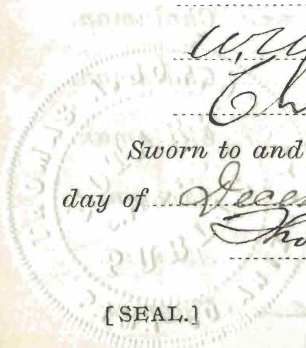

[SEAL.]

Final Oath of U. S. Deputy Surveyor.

I, *Philip Cortzer*

U. S. Deputy Surveyor, do solemnly swear that in
 pursuance of ~~a contract~~ ^{in special instructions Hugh} received from ~~Royal A.~~
^{Price} Johnson, United States Surveyor-General for Ari-
 zona, bearing date of the *18th* day of

November, 18*90*, I have well, faith-
 fully, and truly, in my own proper person, and in
 strict conformity with the instructions furnished by
 the United States Surveyor-General for Arizona,
 the Manual of Surveying Instructions, and the
 laws of the United States, surveyed all those parts

or portions of the *subdivisional*
lines of T. 23 S. R. 21 E

of the Gila and Salt River Base and Meridian, in
 the Territory of Arizona, as are represented in the
 foregoing Field Notes as having been surveyed by
 me and under my direction; and I do further
 solemnly swear that all the corners of said surveys
 have been established and perpetuated in strict
 accordance with the Manual of printed instructions,
 the special instructions of the United States Sur-
 veyor-General for Arizona, and in the specific

manner described in the field notes, and that the foregoing are the true Field Notes of such survey; and should any fraud be detected I will suffer the penalty of perjury, under the provisions of an act of Congress approved August 8, 1846.

Philip Conz
U. S. Deputy Surveyor.

Sworn to and subscribed before me this 30

day of Dec. 1851

Thomas A. Norton
Notary Public

sw
-
-
-
-
of
th
fo.
ar
be
ar
co
in
G



BOOK 982



APPROVAL.

OFFICE OF U. S. SURVEYOR GENERAL,

Tucson, Arizona, Feby. 5, 1902.


The foregoing field notes of survey of

Subdivisions T_p 23 R 21 E

Gila & Salt River Meridian,

executed by Philip Cortzen, Dep. Sur.under his Special Instructions of Nov. 18, 1901,

having been critically examined, and the necessary corrections and explanations made, the said field notes and the surveys they describe, are hereby approved.

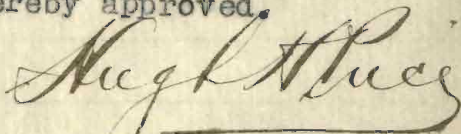

U. S. Surveyor General for Arizona