

Reced with E. N. Darlings letter May 21. 1870

1944

BOOK 1944

Arizona

1944

1944

Surveys in Navajo Indian Reservation

Field Notes of the Exterior Lines of Townships No 2, 3, 4, 5 and 6 North Range 6 West and Townships 1, 2, 3, 6 and 7 North Range 7 West of the Navajo Special Meridian in the Territories of New Mexico and Arizona; surveyed under the directions of

Hon Jos. S. Wilson, Commissioner of the General Land Office, by Chnd. N. Darling, U.S. Surveyor, under his contract, dated Washington D.C. April 29<sup>th</sup> 1869 and subsequent special instructions, dated Washington D.C. May 4<sup>th</sup> 1870

1944

1944

1944

1944

127

128  
1A  
BOOK 1944

Commenced Nov. 1<sup>st</sup> and Completed  
April 26<sup>th</sup> 1870

Names of Assistants.

North A. Haight. Compassman.

Adam Whisker }  
William Burgess } Chainmen.


William Wallace }  
William Clark } Cornermen.

Measuring chain compared with  
Standard as per manual  
instructions

---



# Index.

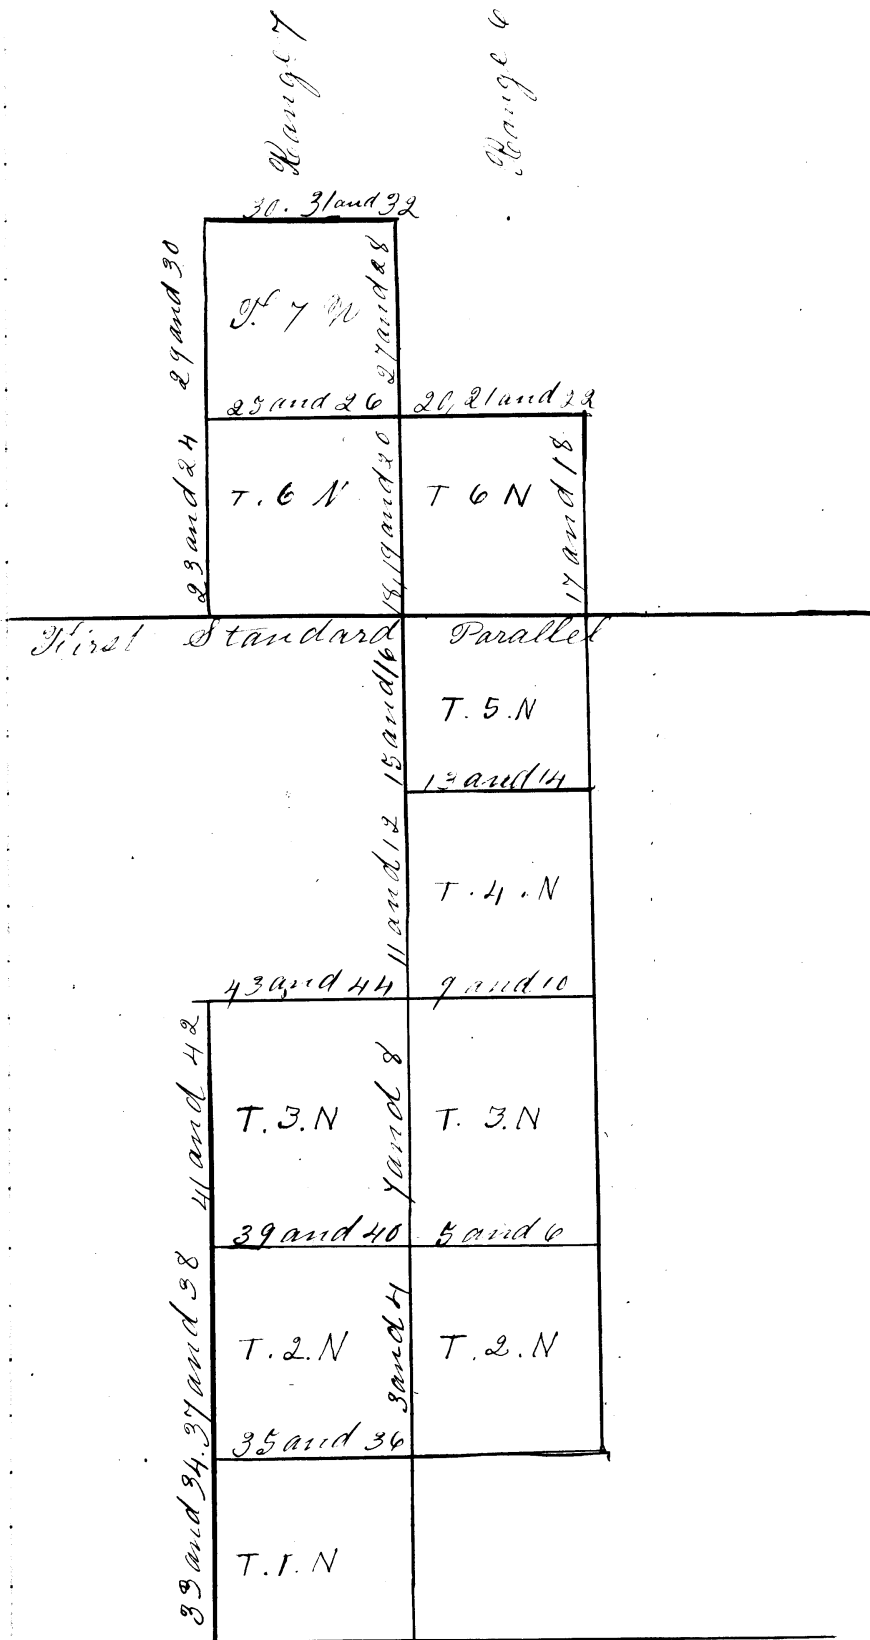

South Boundary of Navajo Reservation

Field Notes of the Exterior Line of Township 2 North

130

Chains. Links.

BOOK 1944

From corner to Township 1 and 2 North Ranges 6 and 7 West North on West Boundary of Township 2 North, Range 6 West as follows,

North on West Boundary of sec. 31.  
 $\frac{1}{4}$   $13^{\circ}45'$  East

40 00 Set sand stone,  $16 \times 12 \times 4$ , for  $\frac{1}{4}$  sec. cor, as per instructions.

80 00 Set sand stone,  $14 \times 12 \times 3$ , marked as per instructions, for the corner to secs, 25, 30, 31, and 36.

Surface gently rolling. Scattering Pinon and Cedar, 3<sup>rd</sup> rate Soil 2<sup>nd</sup> rate.

North on West Boundary of sec. 30.  
 $\frac{1}{4}$   $13^{\circ}45'$  East.

17 50 Creek, 13 eks. wide, course N. E.

40 00 Set charred post, built mound and dug pits, for  $\frac{1}{4}$  sec. cor, as per instructions

80 00 Set sand stone,  $18 \times 12 \times 4$ , marked as per instructions, for the corner to secs. 19, 24, 25 and 30.

Surface rolling. Scattering Pinon and Cedar, 3<sup>rd</sup> rate Soil 2<sup>nd</sup> rate.

North on West Boundary of sec. 19.  
 $\frac{1}{4}$   $13^{\circ}45'$  East.

23 00 Indian trail, bears N. W. and S. E.

38 00 Ascend bluff, bears East and West

40 00 Set sand stone,  $14 \times 12 \times 3$ , for  $\frac{1}{4}$  sec. cor, as per instructions. From which yellow pine 2 ins. in dia. bears S.  $45^{\circ}$  W distant 10 eks.

80 00 Deposited, marked stone set charred post marked, built mound and dug pits, as per instructions, for the corner to secs. 13, 18, 19 and 24

Surface rolling. Open Pine timber, 1<sup>st</sup> rate Soil 1<sup>st</sup> rate.

Range 6 West of the Navajo Special Meridian

BOOK 121  
1944

Chains, Links. North on West Boundary of sec. 18.  
To 1345 East.

- 40 00 Set sand stone, 16x12x4, for 1/4 sec. cor. as per instructions
- 80 00 Set sand stone, 18x12x3, marked as per instructions, for the corner to secs 7, 12, 13 and 18. Surface rolling. Open Pine timber, 1<sup>st</sup> rate Soil 2<sup>nd</sup> rate.

North on West Boundary of sec. 7.  
To 1345 East.

- 40 00 Set charred post, built mound and dug pits, for 1/4 sec. cor. as per instructions.
- 80 00 Set sand stone, 14x12x3, marked as per instructions, for the corner to secs 1, 6, 7, and 12. Surface rolling. Open Pine timber, 1<sup>st</sup> rate. Soil 1<sup>st</sup> rate.

North on West Boundary of sec. 6.  
To 1345 East.

- 40 00 Set sand stone, 18x12x4, for 1/4 sec. cor. as per instructions.
- 80 00 Deposited marked stone, set charred post marked, built mound and dug pits, as per instructions, for the corner to secs 1, 6, 31 and 36 and Townships 2 and 3 North, Ranges 6 and 7 West.  
From which  
Pine, 24 ins, in dia., bears N 28 W. distant 150 lbs  
Pine, 30 ins, in dia, bears S 24 E distant 125 lbs  
Pine, 24 ins, in dia, bears N 71 E distant 100 lbs.  
Pine, 18 ins, in dia, bears S 64 N. distant 80 lbs.  
Surface gently rolling Open Pine 1<sup>st</sup> rate  
Soil 1<sup>st</sup> rate.

Then East on Randon between Townships 2 and 3 North, Range 6 West, setting temporary half mile and mile corners at every 40 and 80 chs To 1345 East. At

Chains Links. BOOK 1944

479.44 chs. intersect Range Line 10 chs. North of corner to Townships 2 and 3 North Ranges 5 and 6 West of the Navajo Special Meridian. Therefore the correction will be 5 chs. East and 1<sup>23</sup>/<sub>3</sub> chs. South per mile. Then West on True Line between Townships 2 and 3. North, Range 6 West of the Navajo Special Meridian, as follows,

West on True Line between secs 1 and 36.  
7<sup>1</sup>/<sub>2</sub> 1344. East.

- 40 00 Set charred post, built mound and dug pits for  $\frac{1}{4}$  sec. cor., as per instructions
- 80 00 Set sand stone, 14x10x8, marked as per instructions, for the corner to secs. 1, 2, 35 and 36.

Surface rolling Scattering Pinon and Cedar, 3<sup>rd</sup> rate Soil 2<sup>nd</sup> rate.

West on True Line between secs. 2 and 35.  
7<sup>1</sup>/<sub>2</sub> 1345 East.

- 40 00 Set sand stone, 24x10x4. for  $\frac{1}{4}$  sec. cor., as per instructions
- 80 00 Set sand stone, 14x12x3, marked as per instructions, for the corner to secs. 2, 3, 34 and 35.

Surface rolling. Scattering Pinon and Cedar, 3<sup>rd</sup> rate Soil 2<sup>nd</sup> rate.

West on True Line between secs 3 and 34  
7<sup>1</sup>/<sub>2</sub> 1345 East.

- 40 00 Set sand stone, 14x12x4. for  $\frac{1}{4}$  sec. cor. as per instructions
- 70 00 Enter canon, course S. S. E.
- 80 00 Set sand stone, 14x10x6. marked as per instructions, for the corner to secs 3, 4, 33 and 34

Surface gently rolling Scattering Pinon

Chains, Links, and Cedar, 3<sup>rd</sup> rate, Soil 2<sup>nd</sup> rate.

West on True Line between secs 4 and 33  
T<sub>1344</sub> East.

- 10 00 Leave canon, course S. S. E.
- 40 00 Set sand stone, 18 x 10 x 4, for 1/4 sec cor, as per instructions.
- 80 00 Set sand stone, 14 x 10 x 6, marked as per instructions, for the corner to secs 4, 5, 32 and 33.

Surface rolling, Scattering Piñon and Cedar 3<sup>rd</sup> rate Soil 2<sup>nd</sup> rate.

West on True Line between secs. 5 and 32  
T<sub>1344</sub> East.

- 25 00 Cañon, course North.
- 36 00 Leave same.
- 40 00 Set sand stone, 18 x 12 x 3, for 1/4 sec cor, as per instructions
- 47 00 Enter canon course S. S. E.
- 58 00 Leave same.
- 60 00 Trail, bears North and South.
- 80 00 Set sand stone, 14 x 12 x 3, marked as per instructions for the corner to secs 5, 6, 31 and 32.

Surface rolling Open Pine timber, 2<sup>nd</sup> rate.  
Soil 2<sup>nd</sup> rate.

West on True Line between secs. 6 and 31.  
T<sub>1344</sub> East.

- 40 00 Set sand stone, 16 x 12 x 4, for 1/4 sec. cor, as per instructions.
  - 79 44 Corner to Townships 2 and 3 North, Ranges 6 and 7 West
- Surface gently rolling. Open Pine Soil 2<sup>nd</sup> rate

General Description

This Township is scatteringly covered with Piñon, Cedar and Pine Soil 2<sup>nd</sup> rate.



Chains. Links.  
 BOOK 1944

From corner to Townships 2 and 3  
 North, Range 6 and 7 West, North on  
 West Boundary of Township 3 North,  
 Range 6 West, as follows,  
 North on West Boundary of sec. 31.  
 Va 1355' East.

40 00 Set sand stone 14x12x3 for 1/4 sec. cor, as  
 per instructions. From which, a pine  
 20 ins in dia N 14° E, distant 35 lks

80 00 Set sand stone, 16x10x6, marked as per  
 instructions, for the corner to secs 29, 30,  
 31 and 36.

Surface rolling. Open Pine timber 1<sup>st</sup>  
 rate Soil 2<sup>nd</sup> rate.

North on West Boundary of sec. 30.  
 Va 1355' East.

40 00 Set charred post, built mound and dug  
 pits, for 1/4 sec. cor, as per instructions.

A pine, 12 ins in dia, bears S 46° W, distant 23 lks

80 00 Set sand stone, 14x12x3, marked as per  
 instructions for the corner to secs. 19, 24, 25,  
 and 30. From which, a pine 20 ins in dia,  
 bears S 15° W, distant 64 lks

Surface rolling. Open Pine timber, 1<sup>st</sup> rate.  
 Soil 2<sup>nd</sup> rate.

North on West Boundary of sec. 19.  
 Va 1355' East

40 00 Set sand stone, 18x12x4. for 1/4 sec. cor, as  
 per instructions. From which, a pine  
 20 ins in dia, bears N 40° E, distant 25 lks.

80 00 Set sand stone, 16x12x4, marked as per  
 instructions for the corner to secs 13, 18,  
 19 and 24. From which

A pine, 30 ins in dia, bears S 50° W, distant 56 lks

A pine, 20 ins in dia, bears N 38° W, distant 40 lks

Surface rolling Scattering Pinon  
 and Cedar 3<sup>rd</sup> rate  
 Soil 1<sup>st</sup> rate.

Chains Links.

North on West Boundary of sec. 18.  
 $\frac{1}{4}$  1355' East.

40 00

Set sand stone, 14x12x4, for  $\frac{1}{4}$  sec cor., as per instructions. From which a pine 15 ins. in dia, bears N. 50 E. distant 60 lbs.

80 00

Set sand stone, 18x14x4, marked as per instructions, for the corner to secs. 7, 12, 13 and 18

A pine 36 ins in dia, bears S 48 W, distant 75 lbs.

A pine, 30 ins in dia, bears N. 47 E distant 90 lbs.

Surface rolling. Open Pine timber, 1<sup>st</sup> rate. Soil 2<sup>nd</sup> rate.

North on West Boundary of sec. 7.  
 $\frac{1}{4}$  1355' East.

40 00

Set charred post, built mound and dug pits for  $\frac{1}{4}$  sec. cor., as per instructions.

80 00

Deposited marked stone, set charred post marked, built mound and dug pits, as per instructions, for the corner to secs. 1, 6, 7 and 12.

North on West Boundary of sec. 6.  
 $\frac{1}{4}$  1355' East.

40 00

Set sand stone, 14x12x3, for  $\frac{1}{4}$  sec. cor., as per instructions.

80 00

Set sand stone, 16x12x4 marked as per instructions, for the corner to secs. 1, 6, 31 and 36, and Townships 3 and 4 North.

Ranges 6 and 7 West.

Surface rolling. Scattering Pine, Piñon and Cedar 3<sup>rd</sup> rate

Soil. 2<sup>nd</sup> rate.

BOOK 1944

Chains .. Links ..

From corner to Townships 3 and 4 North, Ranges 6 and 7 West, North on West Boundary of Township 4 North, Range 6 West of the Navajo Special Meridian, as follows

North on West Boundary of sec. 31.  
7/8 1355' East.

40 00 Set sand stone, 16x10x6, for 1/4 sec. cor. as per instructions.

80 00 Set sand stone, 18x12x6, marked as per instructions, for the corner to secs. 25, 30, 31 and 36.

Surface rolling. Scattering Pinon and Cedar, 3<sup>rd</sup> rate. Soil 2<sup>nd</sup> rate.

---

North on West Boundary of sec. 30.  
7/8 1355' East.

40 00 Set sand stone, 18x10x4, for 1/4 sec. cor. as per instructions.

80 00 Set sand stone, 16x14x3, marked as per instructions, for the corner to secs. 19, 24, 25 and 30.

Surface gently rolling. Scattering Pinon and Cedar, 3<sup>rd</sup> rate. Soil 2<sup>nd</sup> rate.

---

North on West Boundary of sec. 19.  
7/8 1355' East.

40 00 Set charred post, built mound and dug pits, for 1/4 sec. cor. as per instructions.

80 00 Set sand stone 14x12x3, marked as per instructions, for the corner to secs. 13, 18, 19 and 24.

Surface rolling. Scattering Pinon and Cedar, 3<sup>rd</sup> rate. Soil 2<sup>nd</sup> rate.

---

North on West Boundary of sec. 18.  
7/8 1355' East.

40 00 Set charred post, built mound or dug pits.

Chains Links.

for  $\frac{1}{4}$  sec cor. as per instructions.  
 Set sand stone, 16x14x3, marked as per instructions. for the corner to secs 7, 12, 13 and 18.  
 Surface rolling. Scattering Piñon and Cedar 3<sup>rd</sup> rate. Soil 2<sup>nd</sup> rate.

North on West Boundary of sec. 7.  
 Va 1355 East.

40 00 Set sand stone. 16x12x4, for  $\frac{1}{4}$  sec. cor. as per instructions. From which, a pine 20 ins in dia, bears S. 22. W, distant 60 lks.

80 00 Set sand stone, 14x12x4, marked. as per instructions, for the corner to secs. 11, 6, 7 and 12.  
 From which a pine, 15 ins in dia, bears N 38. E, distant 82 lks  
 Surface, rolling. Scattering Pine timber 1<sup>st</sup> rate. Soil 2<sup>nd</sup> rate.

North on West Boundary of sec. 6.  
 Va 1355 East.

40 00 Set sand stone, 14x12x3, for  $\frac{1}{4}$  sec cor, as per instructions.

80 00 Set sand stone, 16x14x4, marked as per instructions, for the corner to Townships 4 and 5 North, Ranges 6 and 7 W.  
 Surface rolling. Scattering Piñon and Cedar, 3<sup>rd</sup> rate. Soil 2<sup>nd</sup> rate.

East on Random between Townships 4 and 5 North, Range 6 West, setting temporary half mile and mile corners at every 40 and 80 chs. Va 1355 East. At 477. 80 chs. intersect Range Line 18 lks. South of corners to Townships 4 and 5 North Ranges 5 and 6 West. Therefore the correction will be 2.20 lks East and 3 lks North per mile.  
 Then West on True Line between Townships 4 and 5 North, Range 6 West, as follows.

Chains.	BOOK .1944 Links.	
		West on True Line between secs. 1 and 26 1/4 1356' East.
3	00	Enter timber, bears North and South.
40	00	Set sand stone, 14x12x3, for 1/4 sec. cor., as per instructions.
80	00	Set sand stone, 24x10x6, marked as per instructions for the corner to secs. 1, 2, 35 and 36. Surface rolling. Scattering Pinon and Cedar, 3 <sup>d</sup> rate. Soil 2 <sup>nd</sup> rate.
<hr/>		
		West on True Line between secs. 2 and 35. 1/4 1355' East.
40	00	Set sand stone, 14x12x3, for 1/4 sec. cor., as per instructions.
80	00	Set sand stone, 18x10x3, marked as per instructions, for the corner to secs. 2, 3, 34 and 35. Surface broken. Scattering Pinon and Cedar, 3 <sup>d</sup> rate. Soil 2 <sup>nd</sup> rate.
<hr/>		
		West on True Line between secs. 3 and 34. 1/4 1356' East.
40	00	Set sand stone, 16x12x6, for 1/4 sec. cor., as per instructions.
80	00	Set sand stone, 16x10x4, marked as per instructions, for the corner to secs. 3, 4, 33 and 34. Surface broken. Scattering Pinon and Cedar, 3 <sup>d</sup> rate.
<hr/>		
		West on True Line between secs. 4 and 33. 1/4 1356' East.
40	00	Set sand stone, 14x12x10, for 1/4 sec. cor., as per instructions.
80	00	Set sand stone, 18x12x6, marked as per instructions, for the corner to secs. 4, 5, 32 and 33.

Chains Links. Surface broken Scattering Pinon and Cedar, 3<sup>rd</sup> rate. Soil 2<sup>nd</sup> rate.

West on True Line between secs 5<sup>th</sup> and 32.  
 Ya 1356' East.

40 00 Set sand stone, 14x12x8, for 1/4 sec. cor, as per instructions.

57 00 Trail, bears North and South.

80 00 Set sand stone, 18x12x4 marked as per instructions, for the corner to secs. 5, 6, 31 and 32.

Surface broken. Scattering Pinon and Cedar 3<sup>rd</sup> rate. Soil 2<sup>nd</sup> rate.

West on True Line between secs. 6 and 31  
 Ya 1356' East.

19 00 Creek, 10 lbs wide, course North

40 00 Set sand stone, 14x12x3, for 1/4 sec cor, as per instructions.

77 80 Corner to secs 1, 6, 31 and 36 and Townships 4 and 5 North, Ranges 6 and 7 West.

Surface rolling Scattering Pinon and Cedar, 3<sup>rd</sup> rate Soil 2<sup>nd</sup> rate.

### General Description

This Township is mostly scatteringly covered with Pinon, Cedar and Pine, 3<sup>rd</sup> rate. The Surface is generally rolling and soil 2<sup>nd</sup> rate. It is well adapted to farming and grazing purposes especially the latter.

Field Notes of the Exterior Lines of Township 5 North.

142

Chains	BOOK Links	1944 From corner to Townships 4 and 6. North, Ranges 6 and 7 West North on West Boundary of Township 5 North Range 6 West, as follows;
		North on West Boundary of sec. 31. 7 $\frac{1}{4}$ 1355' East.
40	01	Set sand stone, 16x12x4, for $\frac{1}{4}$ sec. cor, as per instructions.
80	00	Set sand stone, 14x12x6 marked as per instructions, for the corner to secs 25, 30, 31 and 36. Surface rolling Scattering Pinon and Cedar, 3 $\frac{1}{2}$ rate Soil 2 $\frac{1}{2}$ rate.
		North on West Boundary of sec. 30. 7 $\frac{1}{4}$ 1355' East.
40	00	Set sand stone, 14x12x3, for $\frac{1}{4}$ sec. cor, as per instructions.
80	00	Set sand stone, 16x12x8, marked as per instructions, for the corner to secs. 19, 24, 25 and 30. Surface rolling. Scattering Pinon and Cedar 3 $\frac{1}{2}$ rate Soil 2 $\frac{1}{2}$ rate.
		North on West Boundary of sec. 19. 7 $\frac{1}{4}$ 1355' East.
28	00	Canon course N.E.
38	00	Leave same.
40	00	Set sand stone, 16x14x6, for $\frac{1}{4}$ sec. cor, as per instructions.
80	00	Set sand stone, 14x12x4, marked as per instructions for the corner to secs 18, 18, 19 and 24. Surface rolling. Scattering Pinon and Cedar, 3 $\frac{1}{2}$ rate Soil 2 $\frac{1}{2}$ rate.

Chains Links. North on West Boundary of sec. 18.  
 $\frac{1}{4}$  1355' East.  
 15 00 Canon, Course S. W.  
 27 00 Leave same.  
 40 00 Set sand stone, 20x10x3, for  $\frac{1}{4}$  sec. cor.,  
 as per instructions.  
 80 00 Set sand stone, 10x12x6 marked as per  
 instructions, for the corner to secs. 7,  
 12, 13 and 18.  
 Surface rolling. Scattering Pinon  
 and Cedar, 3<sup>rd</sup> rate Soil 2<sup>nd</sup> rate.

---

North on West Boundary of sec. 7.  
 $\frac{1}{4}$  1355' East.  
 40 00 Set sand stone, 16x12x4 for  $\frac{1}{4}$  sec. cor.,  
 as per instructions.  
 80 00 Set sand stone, 14x12x6 marked as per  
 instructions, for the corner to secs. 6,  
 7 and 12.  
 Surface gently rolling. Scattering  
 Pinon and Cedar, 3<sup>rd</sup> rate Soil 2<sup>nd</sup> rate.

---

North on West Boundary of sect.  
 $\frac{1}{4}$  1355' East.  
 40 00 Set sand stone, 18x12x3, for  $\frac{1}{4}$  sec cor., as  
 per instructions.  
 79 80 Intersect First Standard Parallel 1600 chs  
 East of Standard corner to Township 6.  
 North, Ranges 6 and 7 West and set  
 sand stone, 20x12x4 marked "C.C."; for  
 the Closing Corner to Township 5  
 North, Ranges 6 and 7 West.  
 Surface rolling. Scattering Pinon  
 and Cedar, 3<sup>rd</sup> rate. Soil. rate.

---

General Description  
 The land in this Township is mostly  
 scatteringly covered with Pinon, Cedar  
 and Pine. Surface generally rolling  
 and soil 2<sup>nd</sup>; 1<sup>st</sup> 3<sup>rd</sup> rate.



Field Notes of the Exterior Lines of Township 6 North  
1944

BOOK 1944

Chains

Links

From corner to Township 6 North, Ranges 5 and 6 West, North on East Boundary of Township 6 North, Range 6 West, as follows;

North, on East Boundary of sec. 36.  
1/4 1355' East.

40 00 Set sand stone, 20x16x4, for 1/4 sec. cor, as per instructions.

80 00 Set sand stone, 18x16x4, marked as per instructions, for the corner to secs. 25, 30, 31 and 36.

Surface broken. Scattering Piñon and Cedar, 3<sup>rd</sup> rate. Soil 2<sup>nd</sup> rate.

North on East Boundary of sec. 25.  
1/4 1355' East.

40 00 Set sand stone, 18x14x10, for 1/4 sec. cor, as per instructions.

80 00 Set sand stone, 16x12x6, marked as per instructions, for the corner to secs. 19, 24, 25 and 30.

Surface broken. Scattering Piñon and Cedar, 3<sup>rd</sup> rate. Soil 2<sup>nd</sup> rate.

North on West Boundary of sec. 24.  
1/4 1355' East.

30 00 Leave Bluff, bears East and West.

40 00 Set sand stone, 18x10x4, for 1/4 sec. cor, as per instructions.

42 00 Creek, 10 fms. wide, course S. N.

80 00 Set sand stone, 16x12x3, marked as per instructions, for the corner to secs. 13, 18, 19 and 24.

Surface rolling. Scattering Piñon and Cedar, 3<sup>rd</sup> rate. Soil 2<sup>nd</sup> rate.

Chains Links North on East Boundary of sec. 10.  
 $\frac{1}{4}$  13° 55' East.

32 00 Foot of clay bluff, bears N.E. and S.W.

40 00 Set sand stone, 10x14x3, for  $\frac{1}{4}$  sec. cor., as per instructions.

80 00 Set sand stone, 14x12x4, marked as per instructions, for the corner to secs. 7, 12, 13 and 18.

Surface rolling. Scattering Piñon and Cedar, 3<sup>rd</sup> rate. Soil 2<sup>nd</sup> rate.

---

North on East Boundary of sec. 12.  
 $\frac{1}{4}$  13° 55' East.

23 00 Foot of Bluff.

40 00 Set sand stone 18x16x6 for  $\frac{1}{4}$  sec. cor., as per instructions.

80 00 Set sand stone, 20x12x4, marked as per instructions, for the corner to secs. 1, 6, 7 and 12.

Surface, 3<sup>rd</sup> rate. Soil 2<sup>nd</sup> rate.

---

North on East Boundary of sec. 1  
 $\frac{1}{4}$  13° 55' East.

Set sand stone, 14x12x8, for  $\frac{1}{4}$  sec. cor., as per instructions.

Set sand stone 16x12x4 marked as per instructions for the corner to Townships 6 and 7 North Ranges 5 and 6 West.

Surface broken. Scattering Piñon and Cedar, 3<sup>rd</sup> rate. Soil 2<sup>nd</sup> rate.

---

From corner to Township 6 North, Ranges 6 and 7 West, North on West Boundary of Township 6 North, Range 6 West of the Navajo Special Meridian, as follows.

North on West Boundary of sec. 31.  
 $\frac{1}{4}$  13° 55' East.

Chains. Links.

40

00

Set sand stone, 16x12x4, for  $\frac{1}{4}$  sec cor, as per instructions.

57

00

Trail, bears N.W and S.E.

80

00

Set sand stone, 14x12x8, marked as per instructions, for the corner to secs. 25, 30, 31 and 36.

Surface rolling. Scattering Pine and Pinon, 3<sup>rd</sup> rate. Soil 2<sup>nd</sup> rate.

North on West Boundary of sec. 30.  
 $\frac{1}{4}$  1355 East.

40

00

Set sand stone, 14x12x8, for  $\frac{1}{4}$  sec. cor, as per instructions.

80

00

Set sand stone, 16x12x4, marked as per instructions for the corner to secs. 19, 24, 25 and 30.

Surface rolling. Scattering Pinon and Cedar, 3<sup>rd</sup> rate. Soil 2<sup>nd</sup> rate.

North on West Boundary of sec. 19.  
 $\frac{1}{4}$  1355 East.

40

00

Set charred post, built mound and dug pits, for  $\frac{1}{4}$  sec. cor, as per instructions.

80

00

Set sand stone, 14x12x3, marked as per instructions, for the corner to secs. 13, 18, 19 and 24. From which,

A pine, 10 ins in dia, bears S. 10° E distant 81 lbs.

A pine, 24 ins in dia, bears N. 50° W. distant 200 lbs.

Surface gently rolling Open Pine timber, 4<sup>th</sup> rate. Soil 2<sup>nd</sup> rate.

North on West Boundary of sec. 18.  
 $\frac{1}{4}$  1355 East.

40

00

Set charred post built mound and dug pits. for  $\frac{1}{4}$  sec cor, as per instructions.

80

00

Set sand stone, 14x12x3, marked as per instructions for the corner to secs. 7, 12, 13 and 18

Chains Links Surface gently rolling Open Pine  
timber, 1<sup>st</sup> rate Soil 1<sup>st</sup> rate.

North on West Boundary of sec. 7.  
Ta 13° 55' East.

40 00 Set charred post, built mound and dug  
pits, for 1/4 sec. cor, as per instructions.

80 00 Set sand stone, 10x12x3, marked as per  
instructions, for the corner to secs. 1,  
6, 7 and 12.

Surface gently rolling. Scattering  
Piñon and Cedar, 3<sup>rd</sup> rate. Soil 2<sup>nd</sup> rate.

North on West Boundary of sec. 6.  
Ta 13° 55' East.

40 00 Set sand stone, 14x12x3, for 1/4 sec. cor.,  
as per instructions.

80 00 Set sand stone, 10x14x3, marked as per  
instructions, for the corner to secs.  
1, 6, 31 and 36. and Townships 6 and 7.

North, Ranges 6 and 7 West.

Surface rolling Scattering Piñon  
and Cedar, 3<sup>rd</sup> rate. Soil 2<sup>nd</sup> rate.

East on Random between Townships 6  
and 7 North, Range 6 West, setting tem-  
porary half mile and mile corners at  
every 40 and 80 chs. Ta 13° 55' East. At 480.06 chs.  
intersect Range Lines 24 chs. North of corner  
to Townships 6 and 7 North, Ranges 5 and 6.  
West. Therefore the correction will be 6 chs.  
West and 4 chs South per mile. Then  
West on True Line, between Townships  
6 and 7 North Range 6 West, as follows,

West on True Line between secs 1 and 36.  
Ta 13° 53' East.

40 00 Set sand stone, 10x12x6, for 1/4 sec. cor, as  
per instructions

BOOK 1944

Chains. Links.  
80 00

Set sand stone, 10x14x4, marked as per instructions. for the corner to secs 1, 2, 35 and 36.

Surface broken. Scattering Pinon and Cedar, 3<sup>rd</sup> rate. Soil 2<sup>nd</sup> rate.

West on True Line between secs 2 and 35.  
1/4 1353 East.

40 00 Set sand stone, 4x12x3, for 1/4 sec. cor, as per instructions.

80 00 Set sand sand, 10x12x10, marked as per instructions, for the corner to secs. 2, 3, 34 and 35.

Surface broken. Scattering Pinon and Cedar 3<sup>rd</sup> rate. Soil 2<sup>nd</sup> rate.

West on True Line between secs. 3 and 34.  
1/4 1353 East

40 00 Set sand stone, 18x10x6, for 1/4 sec. cor, as per instructions.

80 00 Set sand stone, 10x12x3, marked as per instructions, for the corner to secs 3, 4, 33 and 34.

Surface broken. Scattering Pinon. and Cedar, 3<sup>rd</sup> rate Soil 2<sup>nd</sup> rate.

West on True Line between secs 4 and 33.  
1/4 1353 East.

40 00 Set sand stone, 14x12x8, for 1/4 sec cor, as per instructions. From which, a pine 24 ins in dia; bears S 60 E. distant 20 lks.

80 00 Deposited marked stone, set charred post. marked, built mound and dug pits, as per instructions, for the corner to secs 4, 5, 32 and 33. From which a pine, 20 ins in dia, bears N. 80 E distant 33 1/2 lks. A pine, 30 ins, in dia, bears S. 50 W. distant 10 lks

Chains. Links. Surface rolling. Open Pine timber  
1<sup>st</sup> rate. Soil 2<sup>nd</sup> rate.

---

West on True Line between secs 5 and 32.  
1/4 1353' East.

40 00 Set charred post, built mound and  
dug pits, for 1/4 sec. cor., as per instructions

80 00 Deposited marked stone, set charred  
post, marked. built mound and dug  
pits, as per instructions, for the cor-  
ner to secs. 5, 6, 31 and 32.

Surface rolling. Scattering Piñon  
and Cedar, 3<sup>rd</sup> rate. Soil 2<sup>nd</sup> rate.

---

West on True Line between secs 6 and 31.  
1/4 1353' East.

40 00 Set sand stone, 14x12x8, for 1/4 sec. cor., as  
per instructions.

80 06 Corner to Townships 6 and 7 North,  
Ranges 6 and 7 West.

Surface rolling Scattering Piñon and  
Cedar 3<sup>rd</sup> rate Soil 2<sup>nd</sup> rate.

---

General Description.

The land in this Township is  
mostly scatteringly covered with,  
Piñon, Cedar and Pine, 3<sup>rd</sup> rate  
Surface generally rolling and soil  
2<sup>nd</sup>, 1<sup>st</sup> and 3<sup>rd</sup> rate.

It is well adapted to grazing  
and large portions of it to  
farming purposes.

---

BOOK 1944

Chains, Links.

From corner to Township 6 North, Ranges 7 and 8 West, North on West Boundary of Township 6 North, Range 7 West, as follows,

North on West Boundary of sec. 31.  
T<sub>a</sub> 13° 55' East.

40 00 Set sand stone, 18x12x6, for  $\frac{1}{4}$  sec. cor., as per instructions.

80 00 Set sand stone, 16x10x8, marked as per instructions, for the corner to secs. 24, 30, 31 and 36.

Surface rolling. Scattering Pinon and Cedar, 3 $\frac{1}{4}$  rate. Soil 2 $\frac{1}{4}$  rate.

North on West Boundary of sec. 30.  
T<sub>a</sub> 13° 55' East.

40 00 Set charred post, built mound and dug pits for  $\frac{1}{4}$  sec. cor., as per instructions.

80 00 Set sand stone, 18x12x4, marked as per instructions, for the corner to secs. 19, 24, 25 and 30.

Surface rolling. Scattering Pinon and Cedar, 3 $\frac{1}{4}$  rate. Soil 2 $\frac{1}{4}$  rate.

North on West Boundary of sec. 19.  
T<sub>a</sub> 13° 55' East.

40 00 Set sand stone, 14x12x3, for  $\frac{1}{4}$  sec. cor., as per instructions.

80 00 Deposited marked stone, set charred post marked, built mound and dug pits, as per instructions, for the corner to secs. 13, 18, 19 and 24.

Surface gently rolling. Scattering Pinon and Cedar, 3 $\frac{1}{4}$  rate. Soil 2 $\frac{1}{4}$  rate.

Chains, Links. North on West Boundary of sec. 18.  
 $N 13^{\circ} 55'$  East.

40 00 Set sand stone, 10x14x4, for  $\frac{1}{4}$  sec. cor.,  
 as per instructions.

80 00 Set sand stone, 18x16x10, marked as  
 per instructions, for the corner to  
 secs. 7, 12, 13 and 18.  
 Surface rolling. Scattering Pinon  
 and Cedar, 3<sup>d</sup> rate. Soil 2<sup>nd</sup> rate.

North on West Boundary of sec. 9.  
 $N 13^{\circ} 55'$  East.

20 00 Canon, course West.

40 00 Place for  $\frac{1}{4}$  sec. cor., in canon Imprac-  
 ticable to establish same

55 00 Line leaves canon.

80 00 Set sand stone 24x14x10, marked as  
 per instructions, for the corner to  
 secs. 6, 7 and 12.  
 Surface broken. Scattering Pinon  
 and Cedar 3<sup>d</sup> rate. Soil 2<sup>nd</sup> rate

North on West Boundary of sec. 6.  
 $N 13^{\circ} 55'$  East.

40 00 Set sand stone, 18x10x6, for  $\frac{1}{4}$  sec cor., as  
 per instructions.

80 00 Set sand stone, 10x14x2, marked as per  
 instructions, for the corner to.  
 Townships 6 and 7 North, Ranges 7 and 8  
 West. Surface rolling. Scattering Pinon  
 and Cedar, 3<sup>d</sup>. Soil 2<sup>nd</sup> rate.

East on Random between Townships  
 6 and 7 North, Range 7 West, setting tem-  
 porary half mile and mile corners at  
 every 40 and 80 chs.  $N 13^{\circ} 55'$  East. At 479' rocks  
 intersect Range Line 15 lks North of cor.  
 to Townships 6 and 7 North, Ranges 6 and 7 West.  
 Therefore the correction will be 30 lks East and



BOOK 1944

Chains Links

and 2 1/2 cks. South per mile. Then West on True Line between Townships 6 and 7 North, Range 7 West as follows,

West on True Line between secs 1 and 36.  
Ta 13° 54' East.

40 00 Set charred post, built mound and dug pits, for 1/4 sec cor as per instructions.

80 00 Set sand stone, 14x12x3, marked as per instructions for the corner to secs. 1, 2, 35 and 36.

Surface rolling. Scattering Piñon and Cedar, 3<sup>rd</sup> rate. Soil 2<sup>nd</sup> rate.

West on True Line between secs 2 and 35.  
Ta 13° 54' East.

34 50 Trail bears North and South.

40 00 Set sand stone 10x12x8, for 1/4 sec. cor, as per instructions.

42 00 Creek 2 cks wide, course S.W.

80 00 Set sand stone, 10x14x4, marked as per instructions, for the corner to secs. 2, 3, 34 and 35.

Surface rolling. Scattering Piñon and Cedar, 3<sup>rd</sup> rate. Soil 2<sup>nd</sup> rate.

West on True Line, between secs. 3 and 34.  
Ta 13° 54' East.

40 00 Set sand stone, 20x10x8, for 1/4 sec. cor, as per instructions.

80 00 Set sand stone 18x10x12, marked as per instructions, for the corner to secs. 3, 4, 33 and 34.

Surface rolling Scattering Piñon and Cedar, 3<sup>rd</sup> rate, Soil 2<sup>nd</sup> rate.

West on True Line, between secs 4 and 33.  
Ta 13° 54' East.

Chains. Links.

40 00

Set charred post, built mound and dug pits, for  $\frac{1}{4}$  sec. cor, as per instructions.

80 00

Deposited marked stone, set charred post marked, built mound and dug pits, as per instructions, for the corner to sees 4, 5, 32 and 33.

Surface rolling. Scattering Pinon and Cedar  $3\frac{1}{2}$  rate. Soil  $2\frac{1}{2}$  rate.

40 00

West on True Line between sees 5 and 32.  
Ta 13<sup>54</sup>' East.

Set sand stone, 10x12x3, for  $\frac{1}{4}$  sec. cor, as per instructions.

80 00

Set, sand stone, 10x10x3, marked as per instructions, for the corner to sees 5, 6, 31 and 32.

Surface rolling. Scattering Pinon and Cedar,  $3\frac{1}{2}$  rate. Soil  $2\frac{1}{2}$  rate.

40 00

West on True Line between sees 6 and 31.  
Ta 13<sup>54</sup>' East.

Set sand stone, 18x14x6, for  $\frac{1}{4}$  sec. cor, as per instructions.

79 77

Corner to Townships 6 and 7 North, Ranges 7 and 8 West.

Surface rolling. Scattering Pinon and Cedar,  $3\frac{1}{2}$  rate. Soil  $2\frac{1}{2}$  rate.

General Description

The land in this Township is mostly scatteringly covered with Pinon, Pine and Cedar,  $3\frac{1}{2}$  rate. The surface is generally rolling and soil  $2\frac{1}{2}$  rate.

It is well adapted to farming and grazing purposes, to the latter especially.

Field Notes of the Exterior Line of Township 7 North

154

BOOK 1944

Chains. Links.

From the corner to Townships 6 and 7 North, Ranges 6 and 7 West. North on East Boundary of Township 7 North Range 7 West. as follows

North on East Boundary of sec 36.  
 $\frac{1}{2}$  13° 55' East.

- 40 00 Set sand stone, 10x12x4, for  $\frac{1}{4}$  sec. cor, as per instructions.
  - 42 00 Creek, 20 lbs. wide course N. S. W.
  - 80 00 Set sand stone, 14x12x3, marked as per instructions, for the corner to secs 25, 30, 31 and 36.
- Surface rolling. Scattering *timber* 3<sup>rd</sup> rate Soil 2<sup>nd</sup> rate.

North on East Boundary of sec. 25.  
 $\frac{1}{2}$  13° 55' East.

- 40 00 Set sand stone, 10x12x4, for  $\frac{1}{4}$  sec. cor, as per instructions.
  - 43 00 Foot of Bluff, bears East.
  - 80 00 Set sand stone, 18x14x6, marked as per instructions, for the corner to secs. 19, 24, 25 and 30.
- Soil rolling. Scattering *Pinon* and Cedar, 3<sup>rd</sup> rate. Soil 2<sup>nd</sup> rate.

North on East Boundary of sec. 24.  
 $\frac{1}{2}$  13° 55' East.

- 40 00 Set sand stone, 20x10x4, for  $\frac{1}{4}$  sec. cor, as per instructions.
  - 50 00 Foot of Bluff. bears N. W. and S. E.
  - 80 00 Set sand stone, 10x10x8, marked as per instructions, for the corner to secs 13, 18, 19 and 24.
- Surface rolling Scattering *Pinon* and Cedar 3<sup>rd</sup> rate.  
 Soil 2<sup>nd</sup> rate.

Chains Links.		
	North on East Boundary of sec. 13. T <sub>4</sub> 13° 55' East.	
40 00	Set sand stone, 18x12x4, for 1/4 sec. cor, as per instructions.	
80 00	Set sand stone, 20x10x6, marked as per instructions, for the corner to secs 7, 12, 13 and 18.	
	Surface broken, Scattering Piñon and Cedar, 3 <sup>d</sup> rate. Soil 2 <sup>nd</sup> rate	
<hr/>		
	North on East Boundary of sec. 12. T <sub>4</sub> 13° 55' East.	
40 00	Set sand stone, 14x12x3, for 1/4 sec. cor, as per instructions.	
80 00	Set sand stone, 20x12x10, marked as per instructions for the corner to secs 4, 6, 7 and 12.	
	Surface broken, Scattering Piñon and Cedar, 3 <sup>d</sup> rate. Soil 3 <sup>d</sup> rate.	
<hr/>		
	North on East Boundary of sec. 1. T <sub>4</sub> 13° 55' East.	
40 00	Set sand stone 18x12x6, for 1/4 sec. cor, as per instructions.	
80 00	Set sand stone, 18x10x10, marked as per instructions, for the corner to Town- ships 7 and 8 North, Ranges 6 and 7 West. Surface rolling. Scattering Piñon and Cedar, 3 <sup>d</sup> rate. Soil 2 <sup>nd</sup> rate.	
<hr/>		
	From corner to Township 6 and 7 North Range 7 and 8 West, North on West Boundary of Township 7 North, Range 7 West, as follows:	
	North on West Boundary of sec. 31. T <sub>4</sub> 13° 55' East.	

150 Field Notes of the Exterior Line of Township 7 North

Chains.	BOOK Links.	1944
40	00	Set sand stone 10x10x6, for 1/4 sec. cor., as per instructions.
80	00	Set sand stone 14x12x3, marked as per instructions, for the corner to sees 25, 30, 31 and 36. Surface rolling. Scattering Pinon and Cedar, 3 <sup>rd</sup> rate Soil 2 <sup>nd</sup> rate.
North on West Boundary of sec. 30. Va 13° 55' East.		
40	00	Set charred post, built mound and dug pits, for 1/4 sec. cor., as per instructions
80	00	Set sand stone 14x12x3, marked as per instructions, for the corner to sees 19, 24, 25 and 30. Surface rolling. Scattering Pinon and Cedar, 3 <sup>rd</sup> rate Soil 2 <sup>nd</sup> rate.
North on West Boundary of sec. 19. Va 13° 55' East.		
40	00	Set sand stone 10x10x6, for 1/4 sec. cor., as per instructions.
80	00	Set sand stone 14x12x3, marked as per instructions, for the corner to sees 13, 18, 19 and 24. Surface rolling. Scattering Pinon and Cedar, 3 <sup>rd</sup> rate Soil 2 <sup>nd</sup> rate.
North on West Boundary of sec. 18. Va 13° 55' East.		
40	00	Set sand stone 10x12x6, for 1/4 sec. cor., as per instructions.
80	00	Deposited marked stone, set charred post marked built mound and dug pits as per instructions, for the corner to sees 7, 12, 13 and 18. Surface rolling. Scattering Pinon and Cedar 3 <sup>rd</sup> rate Soil 2 <sup>nd</sup> rate.

Chains, Links.

North on West Boundary of sec. 7  
 $\frac{1}{4}$  1355' East.

40 00

Set charred post built mound and dug pit for  $\frac{1}{4}$  sec. cor., as per instructions.

80 00

Set sand stone, 14x12x3, marked as per instructions, for the corner to secs. 1, 7 and 12.

Surface gently rolling. Soil 1st rate Prairie.

North on West Boundary of sec. 6.  
 $\frac{1}{4}$  1355' East.

40 00

Set sand stone, 18x12x10, for  $\frac{1}{4}$  sec. cor., as per instructions.

80 00

Set sand stone, 14x12x8 marked as per instructions, for the corner to secs. 1, 6, 31 and 36, and Townships 7 and 8 North, Ranges 7 and 8 West.

Surface gently rolling. Soil 1st rate Prairie.

East on Random between Townships 7 and 8 North, Range 7 West, setting temporary half-mile and mile corners at every 40 and 80 chs  $\frac{1}{4}$  1355' East. At 478.10 chs. intersect Range Line 48 lbs. North of corner to Townships 7 and 8 North, Ranges 6 and 7 West. Therefore the correction will be 1.90 chs East and 8 lbs South per mile. Then West on True Line between Townships 7 and 8 North Range 7 West as follows,

West on True Line between 22 and 36.  
 $\frac{1}{4}$  1352' East.

35 00

Foot of Bluff, bears North and South.

40 00

Set sand stone, 18x12x3, for  $\frac{1}{4}$  sec. cor., as per instruction.

BOOK 1944

Chas. J. Jenks.

80 00 Set sand stone, 16x12x3, marked as per instructions for the corner to secs. 1, 2, 35 and 36.  
Surface gently rolling. Scattering Piñon and Cedar, 3<sup>rd</sup> rate. Soil 2<sup>nd</sup> rate.

West on True Line between secs 2 and 35.  
T<sub>13</sub> 52' East.

16 50 Creek 4 lbs. wide, course N. W.  
40 00 Set sand stone, 16x12x4, for 1/4 sec, cor, as per instructions.  
80 00 Set sand stone, 16x10x8, marked as per instructions, for the corner to secs. 2, 3, 34 and 35.  
Surface gently rolling. Scattering Piñon and Cedar, 3<sup>rd</sup> rate. Soil 2<sup>nd</sup> rate.

West on True Line between secs. 3 and 34.  
T<sub>13</sub> 52' East.

40 00 Set sand stone, 14x12x4 for 1/4 sec, cor, as per instructions.  
67 00 Trail, bears North and South.  
80 00 Set sand stone 16x12x4, marked as per instructions, for the corner to secs, 3, 4, 33 and 34.  
Surface rolling. Scattering Piñon and Cedar, 3<sup>rd</sup> rate. Soil 2<sup>nd</sup> rate.

West on True Line between secs 4 and 33.  
T<sub>13</sub> 52' East.

30 00 Enter prairie, bears North and South  
40 00 Set sand stone, 18x14x3, for 1/4 sec, cor, as per instructions.  
81 00 Deposited marked stone set charred post marked, built mound and dug pits as per instructions for the corner to secs 4, 5, 32 and 33.

Chains. 22 1/2 s. Surface rolling, mostly prairie soil 2<sup>nd</sup> rate.

West on True Line between sec. 5 and 32.  
T<sub>a</sub> 13<sup>5</sup> 2' East.

40 00  
80 00

Set charred post, built mound and dug pits for 1/4 sec. cor., as per instructions.  
Set sand stone, 10x12x3, marked as per instructions, for the corner to sec. 5, 6, 31 and 32.

Surface gently rolling Scattering Pine. Soil 1<sup>st</sup> rate.

West on True Line between sec. 6 & 31.  
T<sub>a</sub> 13<sup>5</sup> 2' East.

40 00  
78 10

Set sand stone, 14x12x4, for 1/4 sec. cor., as per instructions  
Corner to Townships 7 and 8 North Range 7 and 8 West.

Surface gently rolling Prairie.  
Soil 1<sup>st</sup> rate.

General Description.

The land in this Township, is for the most part scatteringly covered with Pine Piñon and Cedar 3<sup>d</sup> rate. The surface is generally rolling. The soil 2<sup>nd</sup>, 1<sup>st</sup> and 3<sup>d</sup> rate.

It is well adapted to grazing and large portions of it to farming purposes.



Field Notes of the Exterior Lines of Township 1 North

160

BOOK 1944

Chains Links

From corners to Township 1 North, Ranges 7 and 8 West, North on West Boundary of Township 1 North, Range 7 West, as follows,

North on West Boundary of sec. 31,  
N 13° 45' East.

40 00 Set sand stone, 14x12x10, for 1/4 sec. cor, as per instructions.

80 00 Set sand stone, 16x12x4, marked as per instructions, for the corner to secs. 25, 30, 31 and 36.

Surface gently rolling Open Pine timber, 1<sup>st</sup> rate. Soil 1<sup>st</sup> rate.

North on West Boundary of sec 30.  
N 13° 45' East

40 00 Set charred post, built mound and dug pit, for 1/4 sec cor, as per instructions.

80 00 Set sand stone, 16x12x4, marked as per instructions, for the corner to secs. 19, 24, 25 and 30. From which A pine 12 ins. in dia, bears S 27° East 68 lks

Surface gently rolling Open Pine timber, 1<sup>st</sup> rate Soil 2<sup>nd</sup> rate.

North on West Boundary of sec. 19.  
N 13° 45' East.

40 00 Set sand stone, 14x12x3, for 1/4 sec. cor, as per instructions.

67 00 Creek 10 lks wide. Course West.

80 00 Set sand stone, 14x12x3, marked as per instructions. for the corner to secs. 13, 18, 19 and 24. From which A pine, 24 ins. in dia, bears N 83° East dist. 47 lks

Surface rolling. Open Pine timber 1<sup>st</sup> rate. Soil 1<sup>st</sup> rate.

Chains	Links	
		North on West Boundary of sec. 18. Ta 13° 45' East.
40	00	Set sand stone, 14x12x4 for 1/4 sec cor, as per instructions.
80	00	Set sand stone, 10x14x4, marked as per instructions for the corner to sees 7, 12, 13 and 18. From which A pine 10 ins. in dia, bears S 60 East 10 cks Surface rolling. Open Pine timber 1st rate Soil 1st rate

		North on West Boundary of sec. 7. Ta 13° 45' East.
40	00	Set sand stone, 10x12x10, for 1/4 sec cor, as per instructions.
80	00	Set sand stone, 18x10x4, marked as per instructions, for the corner to sec. 1, 6, 7 and 12. surface rolling. Open Pine timber. Soil 1st rate

		North on West Boundary of sec. 6. Ta 13° 45' East.
10	00	Canon, Course S. W
24	00	Leave same.
40	00	Set sand stone, 18x10x8, for 1/4 sec. cor, as per instructions. Set sand stone, 16x15x8, marked as per instructions, for the corner to Townships 1 and 2 North Ranges 7 and 8 West. Surface broken. Open Pine timber, 1st rate Soil 2nd rate.

East on Randon between Townships 1 and 2 North, Range 7 West, setting temporary half mile and mile corners at every 40 and 80 cks Ta 13° 45' East. At 480, 10 Intersect Range Line 25 cks South of corners to Townships 1 and 2 North. Range 6 and 7 West. Therefore

BOOK 1944

Chains Links.

the correction will be 10 cks West and 4 1/2 cks North per mile. Then West on True Line between Townships 1 and 2 North Range 7 West, as follows.  
Ta 13<sup>4</sup> 47' East.

40 00 Set sand stone, 10x12x4, for 1/4 sec. cor, as per instructions.

45 00 Sand stone bluff, 50 ft. high bears North and South.

80 00 Deposited marked stone, set charred post marked, built mound dug pits as per instructions, for the corner to sees. 1, 2, 35 and 36.

Surface rolling. Scattering Pinon and Cedar, 3<sup>rd</sup> rate Soil 2<sup>nd</sup> rate.

West on True line, between sees. 2 & 35.  
Ta 13<sup>4</sup> 47' East.

40. 00 Set charred post, built mound dug pits, for 1/4 sec. cor, as per instructions.

80. 00 Deposited marked stone, set charred post, marked, built mound and dug pits, as per instructions, for the corner to sees 2, 3, 34 and 35. From which, A pine 24 ins in dia, bears N. 9<sup>o</sup> W. distant 5 cks. Surface gently rolling. Open Pine timber, 1<sup>st</sup> rate Soil 1<sup>st</sup> rate.

West on True Line between sees. 3 & 34.  
Ta 13<sup>4</sup> 47' East.

40. 00 Set sand stone, 10x12x4 for 1/4 sec. cor, as per instructions. From which, a pine 30 ins. in. dia, bears S. 6<sup>o</sup> E. distant 12 cks

80. 00 Set sand stone 10x14x4, marked as per instructions for the corner to sees 3, 4, 33 & 34

Surface gently rolling. Open Pine 1<sup>st</sup> rate Soil 1<sup>st</sup> rate.

Chains. Links.

West on True Line between Secs 4 & 33.  
To 13<sup>th</sup> 47' East.

40 00

Set sand stone, 18x12x10 for 1/4 sec. cor as per instructions

80 00

Set sand stone 16x12x4, marked as per instructions for the corner to Secs. 4, 5, 32 and 33.

Surface rolling. Open Pine timber 1<sup>st</sup> rate. Soil 1<sup>st</sup> rate.

40 00

West on True Line between Secs 5 & 32.  
Set sand stone, 14x12x8, for 1/4 sec cor. as per instructions.

80 00

Set sand stone, 18x12x8, marked as per instructions, for the corner to Secs. 5, 6, 31 and 32.

A pine, 30 ins in dia, bears S 28° E distant 50 lbs. Surface broken. Open Pine timber, 1<sup>st</sup> rate Soil 1<sup>st</sup> rate.

40 00

West on True Line between Secs. 6 & 31  
To 13<sup>th</sup> 47' East.

Set sand stone, 14x12x10 for 1/4 sec cor as per instructions

53 00

Creek 10 lbs wide, course South.

80 10

Corner to Townships 142 North Range 7 and 8 West.

Surface rolling. Open Pine timber, 1<sup>st</sup> rate Soil 2<sup>nd</sup> rate

General Description

The land in this township is generally scatteringly covered with Pine, 1<sup>st</sup> rate, and Cedar and Pinon, 2<sup>nd</sup> rate. Surface for the most part, rolling. Soil 2<sup>nd</sup>, 1<sup>st</sup> and 3<sup>rd</sup> rate.

It is well adapted to agricultural purposes.

BOOK 1944

Chains Links

From corner to Townships 1 and 2 North, Ranges 7 and 8 West North on West 1/2 Boundary of Township 2 North Range 7 West, as follows

North on West 1/2 Boundary of Sec. 31. Ta 1345 East.

40 00 Set sand stone, 16x12x4, for 1/4 sec cor, as per instructions. From which, a pine 36 ins in dia, bears N 47 W, dist, 15 lbs

80 00 Set sand stone, 18x12x10, marked as per instructions, for the corner to secs. 25, 30, 31, and 36.

Surface rolling. Scattering Pine and Pinon, 3<sup>rd</sup> rate Soil 2<sup>nd</sup> rate.

North on West 1/2 Boundary of Sec. 30. Ta 1345 East

40 00 Set charred post built mound and dug pits, for 1/4 sec cor, as per instruction

80 00 Set sand stone 18x10x8, marked as per instructions, for the corner to secs. 19, 24, 25 and 30.

Surface rolling Scattering Pine and Pinon 3<sup>rd</sup> rate Soil 2<sup>nd</sup> rate.

North on West 1/2 Boundary of sec. 19. Ta 1345 East.

40 00 Set sand stone 14x12x3 for 1/4 sec Cor. as per instructions. From which a Pine 30 ins. in dia, bears N 47 E, distant 47 lbs.

80 00 Set sand stone, 16x14x6, marked as per instructions, for the corner to secs. 13, 18, 19 and 24.

Surface rolling. Open Pine timber 1<sup>st</sup> rate Soil 2<sup>nd</sup> rate.

Chain s. Link s.

North on West Boundary of sec. 18.  
To 13<sup>45</sup>' East.

40 00

Set sand stone, 14x12x4, for 1/4 sec cor as per instructions. From which a pine, 20 ins in dia, bears S 13 E distant 25 lks

80 00

Set sand stone, 10x14x8, marked as per instructions, for the corner to secs. 7, 12, 13, & 18.  
Surface rolling. Open Pine timber. 1<sup>st</sup> rate Soil 2<sup>nd</sup> rate.

North on West Boundary of sec. 7.  
To 13<sup>45</sup>' East.

40 00

Set charred post, built mound and dug pits, for 1/4 sec cor, as per instructions.

80 00

Set sand stone, 10x12x4, marked as per instructions, for the corner to secs. 1, 6, 7 and 12.  
Surface rolling, Scattering Pinon & Cedar, 3<sup>rd</sup> rate, Soil 2<sup>nd</sup> rate.

North on West Boundary of sec. 6.  
To 13<sup>45</sup>' East.

40 00

Set sand stone, 10x12x4, for 1/4 sec. cor, as per instructions.

80 00

Set sand stone, 10x14x4, marked as per instructions, for the corner to Townships 2 and 3 North, Ranges 7 and 8 West. From which  
A pine, 12 ins in dia, bears S 21 W, distant 54 lks.  
A pine, 15 ins in dia bears N 37 W distant 70 lks  
A pine, 36 ins. in dia bears N 63 E, distant 15 lks.  
Surface rolling. Scattering Pine and Pinon, 3<sup>rd</sup> rate, Soil 2<sup>nd</sup> rate.

East on Randon between Townships 2 and 3 North, Range 7 West, setting temporary half mile and mile corners at every 40 and 8 chs. To 13<sup>45</sup> E. At 479.20 chs intersect Range Line 30 chs. South.

BOOK 1944

chains. Links.

of corner to Townships 2 and 3 North, Ranges 6 and 7 West. Therefore the correction will be 80 lks. East and 5 lks. North per mile. Then West on True Line, between Townships 2 and 3 North Ranges 7 West, as follows,

West on True Line between secs 1 & 36.  
Va 13° 47' East.

40 00

Set sand stone, 14 x 12 x 3, for 1/4 sec. cor., as per instructions.

80 .00

Set stone stone, 16 x 12 x 4, marked as per instructions, for the corner to secs 1, 2, 35 and 36.

Surface rolling. Open Pine timber 1<sup>st</sup> rate. Soil 2<sup>nd</sup> rate.

West on True Line between secs 2 and 35.  
Va 13° 47' East.

40 00

Set sand stone, 14 x 12 x 3 for 1/4 sec. cor., as per instructions. From which a pine 10 ins in dia, bears S 11° W. distant 19 lks.

80 .00

Set sand stone 14 x 12 x 4 marked as per instructions for the corner to secs 2, 3, 34 and 35.

Surface rolling. Open Pine timber 1<sup>st</sup> rate. Soil 2<sup>nd</sup> rate.

West on True Line between secs. 3 & 34.  
Va 13° 47' East.

40 00

Set sand stone 16 x 12 x 4, for 1/4 sec cor as per instructions

45 00

Enter prairie, bears N.W. and S.E.

80 00

Deposited marked stone, set charred post marked, built mound and dug pits as per instructions, for the corner to secs 3, 4, 33 and 34.

Surface gently rolling Partly prairie. Soil 2<sup>nd</sup> rate.

Chains Links.

West on True Line between Secs 4 & 33  
To 13<sup>47</sup>' East.

41 00  
80 00

Set charred post built mound and dug pits for  $\frac{1}{4}$  sec. cor., as per instructions  
Deposited marked stone set charred post, marked, built mound and dug pits as per instructions for the corner to Secs. 4, 5, 32 and 33.  
Surface, gently rolling Prairie.  
Soil 1<sup>st</sup> rate.

West on True Line between Secs 5 & 32  
To 13<sup>47</sup>' East.

4 00  
27 00  
40 00  
80 00

Trail, bears N. W. and S. E.  
Enter timber, bears N. W. and S. E.  
Set sand stone, 16x12x4, for  $\frac{1}{4}$  sec. cor., as per instructions  
Set sand stone, 18x12x8 marked as per instructions, for the corner to Secs 5, 6, 31 and 32.  
Surface rolling  $\frac{1}{4}$  prairie  
Soil 2<sup>nd</sup> rate.

West on true Line between Secs 6 & 31  
To 13<sup>47</sup>' East.

40 00  
79 20

Set sand stone 14x12x3, for  $\frac{1}{4}$  sec. cor., as per instructions  
Corner to Townships 2 and 3 North, Ranges 7 and 8 West  
Surface rough. Scattering Pinon and Creek, 3<sup>rd</sup> rate. Soil 2<sup>nd</sup> rate.

General Description.

The land in this Township is generally scatteringly covered with timber, principally Pinon and Cedar 3<sup>rd</sup> rate. Surface mostly rolling. Soil 2<sup>nd</sup>, 3<sup>rd</sup> and 1<sup>st</sup> rate.  
It is well adapted to farming and grazing purposes especially the latter.



BOOK 1944

chains

links

From the corner to Townships 2 & 3 North, Ranges 7 and 8 West, North on West Boundary of Township 3 North Range 7 West, as follows;

North on West Boundary of sec. 31.  
Ta 13<sup>55</sup> East.

40 00

Set sand stone 16x12x4 for  $\frac{1}{4}$  sec. cor., as per instructions

80 00

Set sand stone 18x12x10, marked as per instructions, for the corner to sees 25, 30, 31 and 36.

Surface rough. Scattering Pine and Pinon, 3<sup>rd</sup> rate. Soil 2<sup>nd</sup> rate.

North on West Boundary of sec. 31.  
Ta 13<sup>55</sup> East

40 00

Set sand stone, 16x12x3, for  $\frac{1}{4}$  sec. cor., as per instructions

80 00

Set sand stone, 14x12x10, marked as per instructions for the corner to sees 19, 24, 25 and 30.

Surface gently rolling. Scattering Pine and Pinon. 3<sup>rd</sup> rate. Soil 2<sup>nd</sup> rate.

North on West Boundary of sec. 19.  
Ta 13<sup>55</sup> East.

40 00

Set sand stone 14x12x8, for  $\frac{1}{4}$  sec cor as per instructions

44 50

Trail bears N.W and S.E.

80 00

Set sand stone, 16x12x4, marked as per instructions for the corner to sees 13, 18, 19 and 24.

Surface gently rolling Open Pine timber, 1<sup>st</sup> rate. Soil 1<sup>st</sup> rate.

North on West Boundary of sec. 18.  
Ta 13<sup>55</sup> East.

BOOK 1944

Chains	Links	
40	00	Set sand stone, 14x12x3, for $\frac{1}{4}$ sec cor as per instructions. From which, a pine 24 ins. in dia, bears S15° E. distant 27 lks.
80	00	Set sand stone 16x12x4, marked as per instructions, for the corner to secs. 7, 12, 13 and 18. From which A pine, 24 ins in dia, bears S16° E dist 38 lks A pine, 20 ins in dia, bears N17° W distant 45 lks. Surface <sup>with</sup> rolling Scattering Pine timber 1 <sup>st</sup> rate Soil 1 <sup>st</sup> rate.

North on West Boundary of sec. 7.  
To 13°55' East.

40	00	Set sand stone, 16x12x6, for $\frac{1}{4}$ sec cor, as per instructions.
80	00	Set sand stone, 14x12x10, marked as per instructions, for the corner to secs 1, 6, 7 and 12. From which, a pine 30 ins. in dia, bears S7° E, distant 10 lks. Surface rolling Scattering Pine and Pinon 3 <sup>rd</sup> rate. Soil 2 <sup>nd</sup> rate.

North on West Boundary of sec. 6.  
To 13°55' East.

40	00	Set sand stone, 16x10x4, for $\frac{1}{4}$ sec. cor, as per instructions
80	00	Set sand stone, 16x12x8, marked as per instructions, for the corner to secs 1, 6, 31 and 36. and Townships 3 and 4 North, Ranges 7 and 8 West. From which A pine 20 ins in dia bears S.3° E. distant 170 lks. Surface rolling Scattering Pinon and Pine 3 <sup>rd</sup> rate Soil 2 <sup>nd</sup> rate.

East on Bandon Between Townships 3 and 4 North, Range 7 West, setting temporary half mile and mile corners at every 40 and 80 chs. To 13°55' East. At 478.10 chs intersect Range Line 25 lks. North of corner to

BOOK 1944

chains . links .

to Townships 3 and 4 North, Ranges 6 and 7 West Therefore the correction will be 190 chs. East  $4\frac{1}{2}$  lbs. South per mile. Then West on True Line between Townships 3 and 4 North, Range 7 West, as follows,

West on True Line between secs 14 & 36  
To 13<sup>53</sup>' East.

40 00 Set sand stone, 14x12x3, for  $\frac{1}{4}$  sec. cor., as per instructions.

80 00 Set sand stone, 18x14x4, marked as per instructions, for the corner to secs. 1, 2, 35 and 36.

Surface rolling. Scattering Pinon and Cedar, 3<sup>rd</sup> rate. Soil 2<sup>nd</sup> rate.

West on True Line, between secs 2 and 35.  
To 13<sup>53</sup>' East.

40 00 Set sand stone, 14x12x3, for  $\frac{1}{4}$  sec cor., as per instructions.

80 00 Set sand stone, 18x12x6, marked as per instructions for the corner to secs. 2, 3, 34 and 35.

Surface rolling. Scattering Pinon and Cedar, 3<sup>rd</sup> rate Soil 2<sup>nd</sup> rate.

West on True Line between secs 3 and 34.  
To 13<sup>53</sup>' East.

40 00 Set sand stone, 14x12x6, for  $\frac{1}{4}$  sec cor., as per instructions.

80 00 Set sand stone, 18x12x8, marked as per instructions for the corner to secs 3, 4, 33 and 34.

Surface rolling Scattering Pinon and Cedar, 3<sup>rd</sup> rate. Soil 2<sup>nd</sup> rate.

chains	links	
		West on True Line, between secs 4 & 33. To 13° 53' East.
40	00	Set sand stone, 10x14x10, for 1/4 sec cor as per instructions.
80	00	Set sand stone, 14x12x3, marked as per instructions, for the corner to secs. 4, 5, 32 and 33. Surface hilly. Scattering Pinon and Cedar 3 <sup>rd</sup> rate. Soil 2 <sup>nd</sup> rate

		West on True Line between secs. 5 and 35. To 13° 53' East.
40	00	Set sand stone, 10x12x4, for 1/4 sec cor, as per instructions.
80	00	Set sand stone, 14x12x3, marked as per instructions, for the corner to secs. 5, 6, 31 and 32. Surface 3 <sup>rd</sup> rate. Soil 2 <sup>nd</sup> rate.

		West on True Line between secs 6 & 31. To 13° 53' East,
40	00	Set sand stone, 10x12x4, for 1/4 sec. cor, as per instructions
78	10	Corner to Townships 3 and 4 North, Ranges 7 and 8 West. Surface rough. Scattering Pinon and Cedar, 3 <sup>rd</sup> rate. Soil 2 <sup>nd</sup> rate.

General Description  
The land in this Township is mostly  
scatteringly covered with Pine, Pinon  
and Cedar, 3<sup>rd</sup> rate. The surface is  
generally rolling and Soil 2<sup>nd</sup> rate.  
It is well adapted to  
both farming and grazing pur-  
poses.

We hereby certify that we assisted  
 Chas. N. Darling, U. S. Surveyor, in  
 surveying the Exterior Lines of  
 Townships no 2, 3, 4, 5 and 6 North Range  
 6 West and Townships 1, 2, 3, 6 and 7  
 North, Range 7 West of the Navajo  
 Special Meridian, in the Territories  
 of New Mexico and Arizona, and  
 that said Exterior Lines have been  
 in all respect to the East of our  
 knowledge and belief, well and  
 faithfully surveyed and the  
 boundary monuments planted  
 according to the instructions fur-  
 nished by the Commissioner of  
 the General Land Office of the  
 United States.

North. A. Haight — Compassman.

Adam Whicker }  
 William Burgess } Chainmen.

William Wallace }  
 William Clark } Cornermen.

Subscribed and sworn to by the  
 above named persons, before me, a  
 Notary Public, for the County of  
 Bemallio, Territory of New Mexico,  
 this 30<sup>th</sup> day of April 1870.

Thomas W. Hearry  
 Notary Public.

I, Chud N. Darling, U. S. Surveyor, do solemnly swear that in pursuance of a contract with Hon. Jos. S. Wilson, Commissioner of the General Land Office, dated Washington D. C. April 29<sup>th</sup> 1869, and subsequently special instructions, dated May 4<sup>th</sup> 1870, and in strict conformity to the Laws of the United States and instructions furnished by the Commissioner of the General Land Office of the United States, I have faithfully surveyed the Exterior Lines of Townships no 2, 3, 4, 5 and 6 North, Range 6 West and Townships 1, 2, 3, 6 and 7 North, Range 7 West of the Navajo Special Meridian, in the Territories of New Mexico and Arizona and do further solemnly swear that the foregoing are the true and original field notes of such survey

Chud N. Darling.  
U. S. Surveyor.

Subscribed by said Chud N. Darling  
U. S. Surveyor and sworn to before  
me, a Justice of the Peace, for

Wm Martin (seal)

Department of the Interior.  
General Land Office.  
March 7. 1871.

The foregoing field notes of the survey of Townships 2. 3. 4. 5 and 6 North. Range 6 West and Townships 1. 2. 3. 6 and 7 North. Range 7 West of the Navajo Special Meridian, in the Territories of New Mexico and Arizona, executed by Enoch A. Darling, U.S. Surveyor, under his contract of April 29. 1869. and Special Instructions dated May 4. 1870. in the months of March and April. 1870. having been critically examined, the necessary corrections and explanations made, the said notes and the surveys they describe, are hereby approved.

Willis Drummond.  
Commissioner.

Department of the Interior  
General Land Office  
February 26<sup>th</sup> 1871

A True Copy

*[Signature]*  
Commissioner