

# FIELD NOTES

OF THE SURVEY OF THE

Section Lines and Subdivisional  
1/16 section lines of

FRAC. TOWNSHIP 9 NORTH - RANGE 20 WEST

COLORADO RIVER INDIAN RESERVATION

Of the Gila and Salt River Meridian,

In the State of Arizona

EXECUTED BY

GUY P. HARRINGTON

In the capacity of U.S. Surveyor, under instructions dated Nov. 23, 1910,  
issued by the Commissioner of the General Land Office to A.F. Dunnington,  
Topographer in Charge of Indian Surveys

~~issued by the United States Surveyor General to govern surveys included in~~  
~~Group No. \_\_\_\_\_, which were approved by the Commissioner of the General Land~~  
~~Office, \_\_\_\_\_, 191\_\_\_\_, pursuant to authority contained in the Act of~~  
~~Congress dated \_\_\_\_\_, 191\_\_\_\_.~~

Survey commenced December 6, 1911

Survey completed December 20, 1911

1A  
1B

BOOK 2365

INDEX DIAGRAM.

Trac. Township 9 North, Range 20 West

6	5	4	3	2	1	150
					147 147 26 54 58 148	149 149 148
7	8	9	10	11	12	
				57 55 24 54 80 82		20 23 22
18	17	16	15	14	13	
	141 106 104	107 106 106	81 81 45	50 48 18		21 14
	133 137 135	103 102 101	79 74 76	40 44 43	18	17 16
	140 139	132 134 96	100 72	75 38	42 13	15
	129 131	121 125	91 95	67 71	34 37	8 12
	129 119	124 122 90	94 93 66	70 68 33	36 35 7	11 9
	115 118	109 113	84 88	61 65	29 32	3 6
	117 116	112 111	87 86	64 60 62	31 27 30	5 4

Meanders, Pgs. 141 to 145.

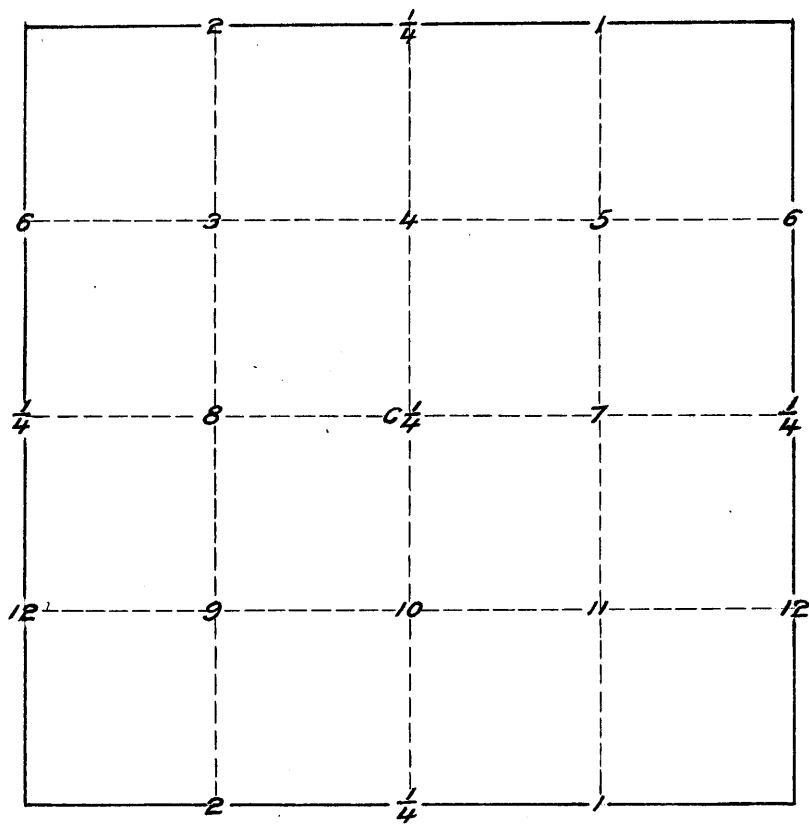


Diagram of a section, illustrating the numbering system of the 1/16 section corners.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

Survey commenced Dec. 6, 1911, by Guy P. Harrington, U.S. Surveyor, and executed with Young & Sons light mountain transits, Nos. 8388 and 8394 with solar attachments. The horizontal limbs are provided with two double verniers placed opposite each other reading to single minutes of arc, which is also the least count of the verniers of the latitude and declination arcs.

The iron posts used in this survey, unless otherwise described, are 3 ft. long, 1 inch in diameter, and are set 26 ins. in the ground. The posts are pointed and driven, filled with cement, and fitted with brass caps.

Dec. 6, 1911. At my camp which is in Sec. 14, T. 9 N.,

R. 20 W., Arizona, at 6h 23.5m p.m., l.m.t., I observe Polaris in position and mark the direction of the sight upon the ground. Lat.  $34^{\circ} 07' N.$  Long.  $114^{\circ} 18' W.$

Time observation,	Dec. 6, 1911,	6h 23.5m
Time U.C. Polaris,	Dec. 6, 1911,	8h 30.2m
	Hour angle	2h 06.7m

From Table VII of the Manual, the corresponding azimuth is  $0^{\circ} 44' E.$

Dec. 7, 1911. At 7 a.m., I turn  $0^{\circ} 44'$  to the West from the line of observation of Polaris, and mark the meridian thus established by permanent points. This meridian is used for testing the solar instruments while subdividing T. 9 N., R. 20 W.

Dec. 7, 1911. At 8 a.m., l.m.t., I set off  $34^{\circ} 04\frac{1}{2}'$  on the lat. arc,  $22^{\circ} 29\frac{1}{4}' S.$  on the decl. arc, and determine a meridian with the solar at the S.C. of secs. 35 and 36, on 2nd Standard Parallel N.

Thence I run

N.  $0^{\circ} 01' W.$  bet. secs. 35 and 36.

Over nearly level land, through mesquite and quail brush.

20.00 Set an iron post for the  $1/16$  sec. cor. No. 12, bet. secs. 35 and 36, ( $S.\frac{1}{2}$ ) with brass cap stamped

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

1/16 S 35 in W. half  
 S 36 in E. half  
 No 12 1911 in S.

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist.,  
 and raise a mound of earth 3½ ft. base, 1½ ft. high,  
 W. of cor.

25.50 Road, brs. N. 50° E. and S. 50° W.

40.00 Set an iron post for the ¼ sec. cor. bet. secs. 35 and 36,  
 with brass cap stamped

¼ S 35 in W. half  
 S 36 in E. half  
 1911 in S., from which

A mesquite 6 ins. dia. brs. N. 82° 45' E., 125 lks. dist.  
 Mkd. ¼ S 36 B T.

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist.,  
 and raise a mound of earth 3½ ft. base, 1½ ft. high,  
 W. of cor.

60.00 Set an iron post for 1/16 sec. cor. No. 6, bet. secs. 35  
 and 36 (N. ¼), with brass cap stamped

1/16 S 35 in W. half  
 S 36 in E. half  
 No 6 1911 in S.

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist.,  
 and raise a mound of earth 3½ ft. base, 1½ ft. high,  
 W. of cor.

80.00 Set an iron post for the cor. of secs. 25, 26, 35 and 36,  
 with brass cap stamped

T 9 N S 25 in NE. quadrant  
 R 20 W S 36 in SE. quadrant  
 S 35 in SW. quadrant  
 S 26 in NW. quadrant  
 1911 in S.  
 1 notch on S. and 1 notch on E. edge,

from which

A mesquite 18 ins. dia. brs. S. 57° 15' W., 115 lks. dist.  
 Mkd. T 9 N R 20 W S 35 B T.

Dig pits 18x18x12 ins. in each sec. 5½ ft. dist., and  
 raise a mound of earth 4 ft. base, 2 ft. high, W. of  
 cor.

Land, nearly level, - agricultural.  
 Soil, sandy loam, 1st rate.  
 Scattering mesquite and quail brush.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

From the cor. of secs. 25, 26, 35 and 36, I run  
East on a random line bet. secs. 25 and 36, setting temp.  
cors. at intervals of 20.00 chs.

79.96 Falls 3 lks. N. of the cor. of secs. 25, 30, 31 and 36,  
on E. bdy. of Tp.

Thence I run

N. 89° 59' W. on a true line bet. secs. 25 and 36.

Over nearly level mesa land, through scattering mesquite.

11.40 Leave mesa, bearing N. and S.; enter level bottom land.

19.99 Set an iron post for 1/16 sec. cor. No. 1, bet. secs. 25  
and 36 (E.  $\frac{1}{4}$ ) with brass cap stamped

1/16 S 25 in N. half  
S 36 No 1 1911 in S. half,

from which

A mesquite 18 ins. dia. brs. S. 67° 40' W., 172 lks. dist.  
Mkd. 1/16 S 36 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high,  
N. of cor.

39.98 Set an iron post for the  $\frac{1}{4}$  sec. cor. bet. secs. 25 and 36,  
with brass cap stamped

$\frac{1}{4}$  S 25 in N. half  
S 36 1911 in S. half, from which

A mesquite 8 ins dia brs. S. 22° 15' W., 105 lks. dist.  
Mkd.  $\frac{1}{4}$  S 36 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high,  
N. of cor.

42.00 Road, brs. N. 40° E. and S. 30° W.

59.22 Mesquite tree, 14 ins. dia., on line.

59.97 Set an iron post for 1/16 sec. cor. No. 2, bet. secs. 25  
and 36 (W.  $\frac{1}{4}$ ) with brass cap stamped

1/16 S 25 in N. half  
S 36 No 2 1911 in S. half,

from which

A mesquite 14 ins dia brs. East 75 lks. dist.  
Mkd. 1/16 S 25 B T.

Subdivision of frac. T. 9 N., R. 20 W.

Chains

Dig pits 18x18x12 ins. E. and W. of cor., 3 ft. dist., and raise a mound of earth 3½ ft. base, 1½ ft. high, N. of cor.

79.96 The cor. of secs. 25, 26, 35 and 36.

Land, nearly level mesa and bottom land. - agricultural and grazing.  
Soil, sandy loam, 1st rate.  
Scattering mesquite brush.

---

From 1/16 sec. cor. No. 12, bet. secs. 35 and 36, (S.½)

I run

East on a random line through the S. half of sec. 36, setting temp. cors. at intervals of 20.00 chs.

80.00 Intersect the 1/16 sec. cor. No. 12, bet. secs. 31 and 36, (S.½) on E. bdy. of Tp.

Thence I run

West on a true line through the middle of the S. half of sec. 36.

Over gently rolling mesa.

20.00 Set an iron post for 1/16 sec. cor. No. 11, in center of the SE¼ of sec. 36, with brass cap stamped

1/16 S 36 in N. half  
No 11 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3½ ft. base, 1½ ft. high, N. of cor.

26.00 Leave mesa, enter bottom land, brs. NE. and SW.

40.00 Set an iron post for 1/16 sec. cor. No. 10, bet. the SE. and SW. quarters of sec. 36, with brass cap stamped

1/16 S 36 in N. half  
No 10 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3½ ft. base, 1½ ft. high, N. of cor.

60.00 Set an iron post for 1/16 sec. cor. No. 9, in center of the SW¼ of sec. 36, with brass cap stamped

Subdivision of frac. T. 9 N., R. 20 W.

Chains

1/16 S 36 in N. half  
No 9 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.

80.00 The 1/16 sec. cor. No. 12, bet. secs. 35 and 36 (S. 1/2).

Land, gently rolling mesa, and nearly level bottom land, -  
grazing.  
Soil, sandy loam, 1st rate.

-----

From the 1/4 sec. cor. bet. secs. 35 and 36, I run  
East on a random line through the middle of sec. 36,  
setting temp. cors. at intervals of 20.00 chs.

79.96 Intersect the 1/4 sec. cor. bet. secs. 31 and 36, on E.  
bdy. of Tp.

Thence I run

West on a true line through the middle of sec. 36.  
Over gently rolling land, descending from mesa.

19.99 Set an iron post for 1/16 sec. cor. No. 7, bet. the NE.  
and SE. quarters of sec. 36, with brass cap stamped

1/16 S 36 in N. half  
No 7 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.

22.00 Bottom of descent from mesa; enter bottom land, brs. S.  
and N. 20° E.

39.98 Set an iron post for center 1/4 sec. cor. of sec. 36, with  
brass cap stamped C 1/4 S 36 1911.

Dig pits 18x18x12 ins. E., W., and S. of cor., 3 ft.,  
and N. of cor. 7 ft. dist., and raise a mound of earth  
4 ft. base, 2 ft. high, N. of post.

59.97 Set an iron post for 1/16 sec. cor. No. 8, bet. the NW.  
and SW. quarters of sec. 36, with brass cap stamped

1/16 S 36 in N. half  
No 8 1911 in S. half



## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

62.55 Road, brs. N. 30° E. and S. 30° W.

79.96 The ¼ sec. cor. bet. secs. 35 and 36.

Land, gently rolling and nearly level bottom, - grazing  
and agricultural.  
Soil, sandy loam, 1st rate.

-----  
From the 1/16 sec. cor. No. 6, bet. secs. 35 and 36 (N. ½)

I run

East on a random line through the middle of the N. half  
of sec. 36, setting temp. cors. at intervals of 20.00  
chs.

79.96 Falls 5 lks. N. of the 1/16 sec. cor. No. 6, bet. secs.  
31 and 36 (N. ½) on E. bdy. of Tp.

Thence I run

N. 89° 58' W. on a true line through the middle of the  
N. half of sec. 36.

Over gently rolling mesa land.

19.99 Set an iron post for 1/16 sec. cor. No. 5, in center of  
the NE¼ of sec. 36, with brass cap stamped

1/16 S 36 in N. half  
No 5 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

21.00 Leave mesa, brs. N. 10° E. and S. 10° W.

Enter bottom land.

39.98 Set an iron post for 1/16 sec. cor. No. 4, bet. the NE.  
and NW. quarters of sec. 36, with brass cap stamped

1/16 S 36 in N. half  
No 4 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

51.80 Road, brs. N. 15° E. and S. 15° W.

59.97 Set an iron post for 1/16 sec. cor. No. 3, in center of the NW $\frac{1}{4}$  of sec. 36, with brass cap stamped

1/16 S 36 in N. half  
No 3 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.

79.96 The 1/16 sec. cor. No. 6, bet. secs. 35 and 36 (N. $\frac{1}{2}$ )

Land, level and rolling, - grazing and agricultural. Soil, sandy, 2nd rate.

Dec. 7, 1911. At the cor. of secs. 25, 26, 35 and 36, I set off 22° 32 $\frac{1}{2}$ ' S. on the decl. arc, and at 11h 51m 11s a.m., l.m.t., observe the sun on the meridian; the resulting lat. is 34° 05'; the proper lat.

Thence I run

N. 0° 01' W. bet. secs. 25 and 26.

Over nearly level land, through scattering brush.

20.00 Set an iron post for 1/16 sec. cor. No. 12, bet. secs. 25 and 26, with brass cap stamped

1/16 S 26 in W. half  
S 25 in E. half  
No 12 1911 in S.

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high, W. of cor.

40.00 Set an iron post for the  $\frac{1}{4}$  sec. cor. bet. secs. 25 and 26, with brass cap stamped

$\frac{1}{4}$  S 26 in W. half  
S 25 in E. half  
1911 in S., from which

A mesquite 10 ins dia. brs. N. 45° 30' E., 72 lks. dist. Mkd.  $\frac{1}{4}$  S 25 B T.

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high, W. of cor.

Subdivision of frac. T. 9 N., R. 20 W.

Chains

50.20 Road, brs. N. 30° E. and S. 30° W.

60.00 Set an iron post for 1/16 sec. cor. No. 6, bet. secs. 25 and 26 (N. 1/2) with brass cap stamped

1/16 S 26 in W. half  
S 25 in E. half  
No 6 1911 in S.

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, W. of post.

68.00 Road, brs. N. 15° W. and S. 15° E.

80.00 Set an iron post for the cor. of secs. 23, 24, 25 and 26, with brass cap stamped

T 9 N S 24 in NE. quadrant  
R 20 W S 25 in SE. quadrant  
S 26 in SW. quadrant  
S 23 in NW. quadrant

1911 in S.  
2 notches on S. and 1 notch on E. edge,

from which

A mesquite 11 ins. dia. brs. N. 57° E., 245 lks. dist.  
Mkd. T 9 N R 20 W S 24 B T.

Dig pits 18x18x12 ins. in each sec. 5 1/2 ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor.

Land, nearly level, - agricultural.  
Soil, sandy loam, 1st rate.  
Scattering mesquite, arrow weed and quail brush.

-----

From the cor. of secs. 23, 24, 25 and 26, I run S. 89° 59' E. on a random line bet. secs. 24 and 25, setting temp. cors. at intervals of 20.00 chs.

79.96 Falls 12 lks. S. of the cor. of secs. 19, 24, 25 and 30, on E. bdy. of Tp.

Thence I run

S. 89° 56' W. on a true line bet. secs. 24 and 25.

Over nearly level bottom land, through scattering brush.

19.95 Small draw, drains S. 20° W.

19.99 Set an iron post for 1/16 sec. cor. No. 1, bet. secs. 24 and 25 (E. 1/2) with brass cap stamped

Subdivision of frac. T. 9 N., R. 20 W.

Chains

1/16 S 24 in N. half  
S 25 No 1 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.

38.98 Set an iron post for 1/4 sec. cor. bet. secs. 24 and 25,  
with brass cap stamped

1/4 S 24 in N. half  
S 25 1911 in S. half, from which

A mesquite 18 ins. dia. brs. S. 68° 45' W., 97 lks. dist.  
Mkd. 1/4 S 25 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.

59.97 Set an iron post for 1/16 sec. cor. No. 2, bet. secs. 24  
and 25 (W. 1/4) with brass cap stamped

1/16 S 24 in N. half  
S 25 No 2 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.

74.00 Road, brs. N. 45° W. and S. 45° E.

79.96 The cor. of secs. 23, 24, 25 and 26.

Land, nearly level bottom land, - agricultural.  
Soil, sandy loam, 1st rate.  
Scattering mesquite and arrow weed.

-----  
From 1/16 sec. cor. No. 12, bet. secs. 25 and 26 (S. 1/4)

I run

S. 89° 59' E. on a random line through the middle of the S.  
half of sec. 25, setting temp. cors. at intervals of 20  
chs.

79.96 Intersect the 1/16 sec. cor. No. 12, bet. secs. 25 and 30  
(S. 1/4) on E. bdy. of Tp.

Thence I run

N. 89° 59' W. on a true line through the middle of the  
S. half of sec. 25.

Subdivision of frac. T. 9 N., R. 20 W.

Chains

Descending from mesa.

4.00 Bottom of descent, brs. N. 10° E. and S. 10° W. Enter level bottom.

19.99 Set an iron post for 1/16 sec. cor. No. 11, in center of the SE $\frac{1}{4}$  of sec. 25, with brass cap stamped

1/16 S 25 in N. half  
No 11 1911 in S. half, from which

A mesquite 6 ins. dia. brs. N. 73° 50' E., 95 lks. dist.  
Mkd. 1/16 S 25 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.

24.70 Road, brs. N. 35° E. and S. 35° W.

39.98 Set an iron post for 1/16 sec. cor. No. 10, bet. the SE. and SW. quarters of sec. 25, with brass cap stamped

1/16 S 25 in N. half  
No 10 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.

55.00 Dim road, brs. N. 30° W. and S. 30° E.

59.97 Set an iron post for 1/16 sec. cor. No. 9, in center of the SW $\frac{1}{4}$  of sec. 25, with brass cap stamped

1/16 S 25 in N. half  
No 9 1911 in S. half, from which

A mesquite 8 ins. dia. brs. S. 74° 45' W., 53 lks. dist.  
Mkd. 1/16 S 25 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.

79.98 The 1/16 sec. cor. bet. secs. 25 and 26. (S.  $\frac{1}{2}$ ).

Land, nearly level bottom, - agricultural.  
Soil, sandy loam, 1st rate.  
Scattering brush of arrow weed.

-----  
From the  $\frac{1}{4}$  sec. cor. bet. secs. 25 and 26, I run S. 89° 59' E. on a random line through the middle of sec. 25; setting temp. cors. at intervals of 20.00 chs.

Subdivision of frac. T. 9 N., R. 20 W.

Chains

79.96 Falls 7 lks. N. of the  $\frac{1}{4}$  sec. cor. bet. secs. 25 and 30,  
on E. bdy. of Tp.

Thence I run

N. 89° 56' W. on a true line through the middle of sec. 25.  
Over nearly level bottom land.

1.50 Road, brs. N. 20° E. and S. 30° W.

19.99 Set an iron post for 1/16 sec. cor. No. 7, bet. the NE.  
and SE. quarters of sec. 25, with brass cap stamped

1/16 S 25 in N. half  
No 7 1911 in S. half, from which

A mesquite 10 ins. dia. brs. N. 30° 30' E., 86 lks. dist.  
Mkd. 1/16 S 25 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high,  
N. of cor.

39.98 Set an iron post for center  $\frac{1}{4}$  sec. cor. of sec. 25, with  
brass cap stamped C  $\frac{1}{4}$  S 25 1911.

Dig pits 18x18x12 ins. E., W., and S. of cor., 3 ft.,  
and N. of cor. 7 ft. dist., and raise a mound of earth  
4 ft. base, 2 ft. high, N. of post.

59.97 Set an iron post for 1/16 sec. cor. No. 8, bet. the NW.  
and SW. quarters of sec. 25, with brass cap stamped

1/16 S 25 in N. half  
No 8 1911 in S. half, from which

A mesquite 11 ins. dia. brs. S. 8° 30' W., 175 lks. dist.  
Mkd. 1/16 S 25 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high,  
N. of cor.

64.50 Road, brs. N. 20° W. and S. 20° E.

79.96 The  $\frac{1}{4}$  sec. cor. bet. secs. 25 and 26.

Land, nearly level bottom, - agricultural.  
Soil, sandy loam, 1st rate.  
Scattering brush of arrow weed and mesquite.

---

From 1/16 sec. cor. No. 6, bet. secs. 25 and 26 (N.  $\frac{1}{2}$ )

I run

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

S. 89° 59' E. on a random line through the middle of the N. half of sec. 25, setting temp. cors. at intervals of 20.00 chs.

79.96 Falls 9 lks. N. of the 1/16 sec. cor. No. 6, bet. secs. 25 and 30 (N.½) on E. bdy. of Tp.

Thence I run

N. 89° 55' W. on a true line through the middle of the N. half of sec. 25.

Over nearly level bottom land.

19.99 Set an iron post for the 1/16 sec. cor. No. 5, in the center of the NE¼ of sec. 25, with brass cap stamped

1/16 S 25 in N. half  
No 5 1911 in S. half

Dig pits 18x18x12 ins. N. and W. of cor. 3 ft. dist., and raise a mound of earth 3½ ft. base, 1½ ft. high, N. of cor.

39.98 Set an iron post for 1/16 sec. cor. No. 4, bet. the NE. and NW. quarters of sec. 25, with brass cap stamped

1/16 S 25 in N. half  
No 4 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3½ ft. base, 1½ ft. high, N. of cor.

59.97 Set an iron post for 1/16 sec. cor. No. 3, in the center of the NW¼ of sec. 25, with brass cap stamped

1/16 S 25 in N. half  
No 3 1911 in S. half, from which

A mesquite 6 ins. dia. brs, S. 35° 15' E., 138 lks. dist.  
Mkd. 1/16 S 25 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3½ ft. base, 1½ ft. high, N. of cor.

79.20 Road, brs. N. and S.

79.96 The 1/16 sec. cor. No. 6, bet. secs. 25 and 26 (N.½).

Land, nearly level bottom, - agricultural.  
Soil, sandy loam, 1st rate.  
Scattering brush of arrow weed.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

Dec. 8, 1911. At 8 a.m., l.m.t., I set off  $34^{\circ} 06'$  on the lat. arc,  $22^{\circ} 35\frac{1}{2}'$  S. on the decl. arc, and determine a meridian with the solar at the cor. of secs. 23, 24, 25 and 26.

Thence I run

N.  $0^{\circ} 01'$  W. bet. secs. 23 and 24.

Over nearly level land, through scattering brush.

- 5.75 Road, brs. N.  $65^{\circ}$  W. and S.  $65^{\circ}$  E.
- 20.00 Set an iron post for  $1/16$  sec. cor. No. 12, bet. secs. 23 and 24 (S.  $\frac{1}{2}$ ) with brass cap stamped
- $1/16$  S 23 in W. half  
 S 24 in E. half  
 No 12 1911 in S.
- Dig pits  $18 \times 18 \times 12$  ins. N. and S. of cor. 3 ft. dist., and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.
- 40.00 Set an iron post for  $\frac{1}{4}$  sec. cor. bet. secs. 23 and 24, with brass cap stamped
- $\frac{1}{4}$  S 23 in W. half  
 S 24 in E. half  
 1911 in S., from which
- A mesquite 10 ins. dia. brs. S.  $88^{\circ}$  E., 15 lks. dist.  
 Mkd.  $\frac{1}{4}$  S 24 B T.
- Dig pits  $18 \times 18 \times 12$  ins. N. and S. of cor. 3 ft. dist., and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.
- 60.00 Set an iron post for  $1/16$  sec. cor. No. 6, bet. secs. 23 and 24 (N.  $\frac{1}{2}$ ) with brass cap stamped
- $1/16$  S 23 in W. half  
 S 24 in E. half  
 No 6 1911 in S.
- Dig pits  $18 \times 18 \times 12$  ins. N. and S. of cor. 3 ft. dist., and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.
- 75.40 Road in dry slough, brs. N.  $70^{\circ}$  W. and S.  $70^{\circ}$  E.
- 80.00 Set an iron post for the cor. of secs. 13, 14, 23 and 24, with brass cap stamped



Subdivision of frac. T. 9 N., R. 20 W.

Chains

T 9 N S 13 in NE. quadrant  
R 20 W S 24 in SE. quadrant  
S 23 in SW. quadrant  
S 14 in NW. quadrant

1911 in S.  
3 notches on S. and 1 notch on E. edge,

from which

A mesquite 18 ins. dia. brs. S. 8°30'E., 210 lks. dist.  
Mkd. T 9 N R 20 W S 24 B T.

Dig pits 18x18x12 ins. in each sec. 5½ ft. dist., and  
raise a mound of earth 4 ft. base, 2 ft. high, W. of  
cor.

Land, level, - agricultural.  
Soil, sandy and adobe, 1st rate.  
Scattering brush of arrow weed and quail.

-----  
From the cor. of secs. 13, 14, 23 and 24, I run  
N. 89° 56' E. on a random line bet. secs. 13 and 24,  
setting temp. cors. at intervals of 20.00 chs.

79.92 Falls 9 lks. N. of the cor. of secs. 13, 18, 19 and 24,  
on E. bdy. of Tp.

Thence I run

West on a true line bet. secs. 13 and 24.

Over nearly level mesa.

19.98 Set an iron post for 1/16 sec. cor. No. 1, bet. secs. 13  
and 24 (E. ¼) with brass cap stamped

1/16 S 13 in N. half  
S 24 No 1 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

27.00 Small wash, course S.

29.00 Leave mesa; descend 40 foot bank.

31.00 Enter level bottom land, brs. NW. and SE.

39.96 Set an iron post for ¼ sec. cor. bet. secs. 13 and 24,  
with brass cap stamped

¼ S 13 in N. half  
S 24 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.

59.94 Set an iron post for 1/16 sec. cor. No. 2, bet. secs. 13  
and 24, (W.  $\frac{1}{4}$ ) with brass cap stamped

1/16 S 13 in N. half  
S 24 No 2 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.

79.92 The cor. of secs. 13, 14, 23 and 24.

Land, level river bottom and level mesa, - agricultural.  
Soil, adobe in river bottom, 1st rate; sandy on mesa,  
2nd rate.

-----  
From 1/16 sec. cor. No. 12, bet. secs. 23 and 24 (S.  $\frac{1}{4}$ )

I run

N.  $89^{\circ} 56'$  E. on a random line through the S. half of  
sec. 24, setting temp. cors. at intervals of 20.00 chs.

80.00 Falls 18 lks. N. of 1/16 sec. cor. No. 12, bet. secs. 19  
and 24 (S.  $\frac{1}{4}$ ) on E. bdy. of Tp.

Thence I run

N.  $89^{\circ} 56'$  W. on a true line through the middle of the  
S. half of sec. 24.

Over nearly level bottom land, through scattering mes-  
quite and arrow weed.

20.00 Set an iron post for 1/16 sec. cor. No. 11, in center of  
the SE  $\frac{1}{4}$  of sec. 24, with brass cap stamped

1/16 S 24 in N. half  
No 11 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.

29.00 Small draw, drains S.

40.00 Set an iron post for 1/16 sec. cor. No. 10, bet. the SE.  
and SW. quarters of sec. 24, with brass cap stamped

1/16 S 24 in N. half  
No 10 1911 in S. half, from which

Subdivision of frac. T. 9 N., R. 20 W.

Chains

A mesquite 24 ins. dia. brs. N. 6° 30' W., 65 lks. dist.  
Mkd. 1/16 S 24 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.

60.00 Set an iron post for 1/16 sec. cor. No. 9, in center of  
the SW 1/4 of sec. 24, with brass cap stamped

1/16 S 24 in N. half  
No 9 1911 in S. half, from which

A mesquite 18 ins. dia. brs. N. 15° 50' W., 61 lks. dist.  
Mkd. 1/16 S 24 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.

80.00 The 1/16 sec. cor. No. 12, bet. secs. 23 and 24 (S. 1/4)

Land, nearly level bottom.  
Soil, adobe, 1st rate.  
Scattering brush of mesquite and arrow weed.

-----  
From the 1/4 sec. cor. bet. secs. 23 and 24, I run  
N. 89° 56' E. on a random line through the middle of  
sec. 24, setting temp. cors. at intervals of 20.00 chs.

79.96 Falls 18 lks. N. of the 1/4 sec. cor. bet. secs. 19 and 24,  
on E. bdy. of Tp.

Thence I run

N. 89° 56' W. on a true line through the middle of sec.  
24.

Over gently rolling mesa.

1.00 Small wash, course S. 45° W.

2.00 Leave mesa, brs. N. 15° W. and S. 15° E. Enter bottom  
land.

19.99 Set an iron post for 1/16 sec. cor. No. 7, bet. the NE.  
and SE. quarters of sec. 24, with brass cap stamped

1/16 S 24 in N. half  
No 7 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,

Subdivision of frac. T. 9 N., R. 20 W.

Chains

N. of cor.

39.98 Set an iron post for the center  $\frac{1}{4}$  sec. cor. of sec. 24, with brass cap stamped C  $\frac{1}{4}$  S 24 1911.

Dig pits 18x18x12 ins. E., W., and S. 3 ft., and N. of cor. 7 ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, N. of cor.

47.35 Small wash, course S.

59.97 Set an iron post for 1/16 sec. cor. No. 8, bet. the SW. and NW. quarters of sec. 24, with brass cap stamped

1/16 S 24 in N. half  
No 8 1911 in S. half, from which

A mesquite 15 ins. dia brs. N. 12° 30' W., 93 lks. dist.  
Mkd. 1/16 S 24 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3  $\frac{1}{2}$  ft. base, 1  $\frac{1}{2}$  ft. high, N. of cor.

79.96 The  $\frac{1}{4}$  sec. cor. bet. secs. 23 and 24.

Land, nearly level bottom and gently rolling mesa. Soil, adobe and sandy loam, 1st rate. Scattering brush of mesquite and arrow weed.

-----  
From 1/16 sec. cor. No. 6, bet. secs. 23 and 24 (N.  $\frac{1}{2}$ )

I run

N. 89° 56' E. on a random line through the middle of the N. half of sec. 24, setting temp. cors. at intervals of 20 chs.

79.96 Falls 5 lks. N. of 1/16 sec. cor. No. 6, bet. secs. 19 and 24 (N.  $\frac{1}{2}$ ) on E. bdy. of Tp.

Thence I run

S. 89° 58' W. on a true line through the middle of the N. half of sec. 24.

Over nearly level mesa land.

14.00 Leave mesa; enter nearly level bottom land, brs. N. and S.

19.99 Set an iron post for 1/16 sec. cor. No. 5, in the center of the NE  $\frac{1}{4}$  of sec. 24, with brass cap stamped

1/16 S 24 in N. half  
No 5 1911 in S. half

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.

39.98 Set an iron post for 1/16 sec. cor. No. 4, bet. the NE.  
and NW. quarters of sec. 24, with brass cap stamped

1/16 S 24 in N. half  
No 4 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.

59.97 Set an iron post for 1/16 sec. cor. No. 3, in the center  
of the NW $\frac{1}{4}$  of sec. 24, with brass cap stamped

1/16 S 24 in N. half  
No 3 1911 in S. half, from which

A mesquite 30 ins dia. brs. S.  $9^{\circ}45'$  W., 20 lks. dist.  
Mkd. 1/16 S 24 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.

79.96 The 1/16 sec. cor. No. 6, bet. secs. 23 and 24 (N. $\frac{1}{2}$ ).

Land, level mesa and river bottom, - agricultural.  
Soil, adobe on river bottom; sandy on mesa, 1st rate.  
Scattering brush of mesquite, sage, arrow weed and quail.

Dec. 8, 1911. At the cor. of secs. 13, 14, 23 and 24,  
I set off  $22^{\circ} 39'$  S. on the decl. arc, and at 11h 51m  
37s a.m., l.m.t., observe the sun on the meridian; the  
resulting lat. is  $34^{\circ} 06\frac{1}{2}'$ , the proper lat.

Thence I run

N.  $0^{\circ} 01'$  W. bet. secs. 13 and 14.

Over nearly level river bottom land, through scattering  
brush.

20.00 Set an iron post for 1/16 sec. cor. No. 12, bet. secs. 13  
and 14 (S. $\frac{1}{2}$ ) with brass cap stamped

1/16 S 14 in W. half  
S 13 in E. half  
No 12 1911 in S.

Subdivision of frac. T. 9 N., R. 20 W.

Chains

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

40.00 Set an iron post for the 1/4 sec. cor. bet. secs. 13 and 14, with brass cap stamped

1/4 S 14 in W. half  
S 13 in E. half  
1911 in S.

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

48.25 Road, brs. N. 75° E. and S. 75° W.

52.00 Road, brs. E. and W.

56.90 Road, brs. S. 75° W. and N. 75° E.

60.00 Set an iron post for 1/16 sec. cor. No. 6, bet. secs. 13 and 14 (N. 1/2) with brass cap stamped

1/16 S 14 in W. half  
S 13 in E. half  
No 6 1911 in S.

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

80.00 Set an iron post for the cor. of secs. 11, 12, 13 and 14, with brass cap stamped

T 9 N S 12 in NE. quadrant  
R 20 W S 13 in SE. quadrant  
S 14 in SW. quadrant  
S 11 in NW. quadrant  
1911 in S.

4 notches on S. and 1 notch on E. edge

Dig pits 18x18x12 ins. in each sec. 5 1/2 ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor.

Land, nearly level bottom. (Agricultural).  
Soil, adobe and sandy loam, 1st rate.  
Scattering brush of mesquite and arrow weed.

-----  
From the cor. of secs. 11, 12, 13 and 14, I run  
East on a random line bet. secs. 12 and 13, setting temp.

Subdivision of frac. T. 9 N., R. 20 W.

Chains

cors. at intervals of 20.00 chs.

79.92 Intersect the cor. of secs. 7, 12, 13 and 18, on E. bdy. of Tp.

Thence I run

West on a true line bet. secs. 12 and 13.

Over nearly level mesa.

19.98 Set an iron post for 1/16 sec. cor. No. 1, bet. secs. 12 and 13 (E. 1/4) with brass cap stamped

1/16 S 12 in N. half  
S 13 No 1 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

39.96 Set an iron post for the 1/4 sec. cor. bet. secs. 12 and 13, with brass cap stamped

1/4 S 12 in N. half  
S 13 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

57.45 Road, brs. N. and S.

58.15 Small wash, course S.

59.94 Set an iron post for 1/16 sec. cor. No. 2, bet. secs. 12 and 13 (W. 1/4) with brass cap stamped

1/16 S 12 in N. half  
S 13 No 2 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

64.65 Small wash, course S.

69.90 Leave mesa; descend to bottom land, brs. NW. and SE.

70.90 Enter bottom land, brs. N. and S.

79.92 The cor. of secs. 11, 12, 13 and 14.

Land, nearly level mesa and bottom land, - agricultural. Soil, adobe and sandy, 1st rate. Scattering sage and arrow weed.

Subdivision of frac. T. 9 N., R. 20 W.

Chains

From the 1/16 sec. cor. No. 12, bet. secs. 13 and 14 (S. 1/2)  
I run

East on a random line through the middle of the S. half  
of sec. 13, setting temp. corners at intervals of 20  
chs.

79.92 Intersect the 1/16 sec. cor. No. 12, bet. secs. 13 and 18  
(S. 1/2) on E. bdy. of Tp.

Thence I run

West on a true line through the middle of the S. half of  
sec. 13.

Over gently rolling mesa.

19.98 Set an iron post for 1/16 sec. cor. No. 11, in the center  
of the SE 1/4 of sec. 13, with brass cap stamped

1/16 S 13 in N. half  
No 11 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.

39.96 Set an iron post for 1/16 sec. cor. No. 10, bet. the SE.  
and SW. quarters of sec. 13, with brass cap stamped

1/16 S 13 in N. half  
No 10 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.

46.00 Leave mesa. Descend to bottom land.

49.00 Enter bottom land, brs. NW. and SE.

59.94 Set an iron post for 1/16 sec. cor. No. 9, in the center  
of the SW 1/4 of sec. 13, with brass cap stamped

1/16 S 13 in N. half  
No 9 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.

79.92 The 1/16 sec. cor. No. 12, bet. secs. 13 and 14 (S. 1/2)



Subdivision of frac. T. 9 N., R. 20 W.

Chains.

Land, gently rolling mesa and level bottom, - agricultural.  
Soil, adobe and sandy, 1st rate.

-----  
From the  $\frac{1}{4}$  sec. cor. bet. secs. 13 and 14, I run  
East on a random line through the middle of sec. 13,  
setting temp. cors. at intervals of 20.00 chs.

79.92 Falls 8 lks. S. of the  $\frac{1}{4}$  sec. cor. bet. secs. 13 and 18.

Thence I run

S. 89° 57' W. on a true line through the middle of sec.  
13.

Over gently rolling mesa.

19.98 Set an iron post for 1/16 sec. cor. No. 7, bet. the NE. and  
SE. quarters of sec. 13, with brass cap stamped

1/16 S 13 in N. half  
No 7 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high,  
N. of cor.

39.96 Set an iron post for the center  $\frac{1}{4}$  sec. cor. of sec. 13,  
with brass cap stamped C  $\frac{1}{4}$  S 13 1911.

Dig pits 18x18x12 ins. E., W., and S. of cor., 3 ft.,  
and N., 7 ft. dist., and raise a mound of earth 4 ft.  
base, 2 ft. high, N. of post.

49.25 Small wash, course S. 45° W.

56.00 Leave mesa and descend to bottom land.

57.00 Bottom of descent, brs. N. 10° W. and S. 10° E.

59.94 Set an iron post for 1/16 sec. cor. No. 8, bet. the NW. and  
SW. quarters of sec. 13, with brass cap stamped

1/16 S 13 in N. half  
No 8 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high,  
N. of cor.

79.92 The  $\frac{1}{4}$  sec. cor. bet. secs. 13 and 14.

Land, gently rolling mesa and bottom land, - agricultural.  
Soil, adobe and sandy, 1st rate.  
Scattering chaparral, sage brush and arrow weed.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

From 1/16 sec. cor. No. 6, bet. secs. 13 and 14 (N.  $\frac{1}{4}$ )

I run

East on a random line through the middle of the N. half of sec. 13, setting temp. cors. at intervals of 20.00 chs.

79.92 Falls 5 lks. S. of the 1/16 sec. cor. No. 6, bet. secs. 13 and 18 (N.  $\frac{1}{4}$ ), on E. bdy. of Tp.

Thence I run

S. 89° 58' W. on a true line through the middle of the N. half of sec. 13.

Over gently rolling mesa.

19.98 Set an iron post for 1/16 sec. cor. No. 5, in the center of the NE  $\frac{1}{4}$  of sec. 13, with brass cap stamped

1/16 S 13 in N. half  
No 5 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3  $\frac{1}{2}$  ft. base, 1  $\frac{1}{2}$  ft. high, N. of cor.

39.96 Set an iron post for 1/16 sec. cor. No. 4, bet. the NE. and NW. quarters of sec. 13, with brass cap stamped

1/16 S 13 in N. half  
No 4 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3  $\frac{1}{2}$  ft. base, 1  $\frac{1}{2}$  ft. high, N. of cor.

59.94 Set an iron post for 1/16 sec. cor. No. 3, in center of the NW  $\frac{1}{4}$  of sec. 13, with brass cap stamped

1/16 S 13 in N. half  
No 3 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3  $\frac{1}{2}$  ft. base, 1  $\frac{1}{2}$  ft. high, N. of cor.

Leave mesa, brs. N. 20° W. and S. 20° E. Enter bottom land.

66.00 Road, brs. N. 30° E. and S. 30° W.

79.92 The 1/16 sec. cor. No. 6, bet. secs. 13 and 14 (N.  $\frac{1}{4}$ )

## Subdivision of frac. T. 9 N., R. 20 W.

Chains

Land, gently rolling mesa and nearly level bottom, -  
 agricultural.  
 Soil, sandy on mesa; adobe on bottom; 1st rate.  
 Scattering chaparral, sage and arrow weed.

-----

From the cor. of secs. 11, 12, 13 and 14, I run  
 N. 0° 01' W. bet. secs. 11 and 12.  
 Over nearly level river bottom.

- 5.50 Fence corner, brs. W., 25 lks. dist. Fences bear N. 30° W.  
 and S. 15° W.
- 16.00 Leave bottom land, and ascend to
- 19.00 Mesa, brs. N. 30° W. and S. 30° E.
- 20.00 Set an iron post for 1/16 sec. cor. No. 12, bet. secs. 11  
 and 12 (S. 1/2) with brass cap stamped
- 1/16 S 11 in W. half  
 S 12 in E. half  
 No 12 1911 in S.
- Build a mound of stone 2 ft. base, 1 1/2 ft. high, W. of  
 cor.
- 30.00 Parker-Blythe telephone line, brs. N. 45° E. and S. 45° W.
- 36.00 Road, brs. N. 55° E. and S. 30° W.
- 40.00 Set an iron post for 1/4 sec. cor. bet. secs. 11 and 12,  
 with brass cap stamped
- 1/4 S 11 in W. half  
 S 12 in E. half  
 1911 in S.
- Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist.,  
 and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
 W. of cor.
- 42.00 Road, brs. NE. and SW.
- 48.10 Road, brs. S. 30° E. and N. 30° W.
- 60.00 Set an iron post for 1/16 sec. cor. No. 6, bet. secs. 11  
 and 12, (N. 1/2) with brass cap stamped
- 1/16 S 11 in W. half  
 S 12 in E. half  
 No 6 1911 in S.
- Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist.,  
 and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
 W. of cor.

## Subdivision of frag. T. 9 N., R. 20 W.

## Chains

66.70 Road, brs. N. 30° E. and S. 30° W.

80.00 Set an iron post for the cor. of secs. 1, 2, 11 and 12,  
with brass cap stamped

T 9 N S 1 in NE. quadrant  
R 20 W S 12 in SE. quadrant  
S 11 in SW. quadrant  
S 2 in NW. quadrant

1911 in S.

5 notches on S. and 1 notch on E. edge

Dig pits 18x18x12 ins. in each sec. 5½ ft. dist., and  
raise a mound of earth 4 ft. base, 2 ft. high, W. of  
cor.

Land, nearly level bottom and gently rolling mesa.  
Soil, sandy and adobe, 1st rate.  
Scattering chaparral and sage.

-----  
From the cor. of secs. 1, 2, 11 and 12, I run

East on a random line bet. secs. 1 and 12.

40.00 Set temp. ¼ sec. cor.

79.96 Falls 5 lks. S. of the cor. of secs. 1, 6, 7 and 12, on  
E. bdy. of Tp.

Thence I run

S. 89° 58' W. on a true line bet. secs. 1 and 12.

Over slightly rolling mesa, through Parker townsite.

11.85 Road, brs. S. and N. 20° E.

12.70 Road, brs. S. 10° E. and N. 10° W.

13.95 Road, brs. N. 30° W. and S. 30° E.

20.50 Road and wire fence, brs. S. 30° E. and N. 30° W.

21.65 Wire fence cor., on line. Fences bear N. 30° E. and  
S. 60° W.

26.65 Road, brs. N. and S.

27.95 Road, brs. N. 65° E. and S. 65° W.

28.35 Church, brs. S., 1 ch. dist.

29.65 Wire fence, brs. N., 10 lks. dist. Fences bear N. 20° W.,  
and S. 70° W.

32.15 Wire fence cor., brs. N., 30 lks. dist. Fences bear  
N. 20° W. and E.

39.45 Road, brs. S. 25° W. and N. 25° E.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

39.98 Set an iron post for  $\frac{1}{4}$  sec. cor. bet. secs. 1 and 12,  
with brass cap stamped

$\frac{1}{4}$  S 1 in N. half  
S 12 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.

55.99 Intersect the W. bdy. of Parker Townsite, 6.91 chs.  
N.  $0^{\circ} 29'$  W. of the old cor. of secs. 5, 6, 31 and 32,  
on line bet. Tps. 2 and 3 N., R. 1 E., Colorado River  
Base and Meridian.

Set an iron post for C.C. of secs. 1 and 12, with brass  
cap stamped

P.T. on N. half  
T 9 N S 12 in SW. quadrant  
R 20 W S 1 in NW. quadrant  
C C in W.  
1911 in S.

Dig pits 24x18x12 ins. crosswise on each line N., and  
S., 3 ft., and W. of cor. 7 ft. dist., and raise a  
mound of earth 4 ft. base, 2 ft. high, W. of cor.

79.96 The cor. of secs. 1, 2, 11 and 12.

Land, gently rolling mesa, - agricultural.  
Soil, sandy, 1st rate.  
Scattering sage and chaparral.

Note: Although Sec. 12 is classed as agricultural land,  
it is not under irrigation; plant now being constructed.

-----  
From the cor. of secs. 1, 2, 11 and 12, I run  
N.  $0^{\circ} 01'$  W. on a true line bet. secs. 1 and 2.

Over gently rolling mesa.

From this cor., the water tower at the Agency School, brs.

N.  $32^{\circ} 18'$  W.

10.25 Road, brs. N.  $70^{\circ}$  E. and S.  $70^{\circ}$  W.

18.00 Road, to the Agency School, brs. E. and W.

20.00 New Agency buildings bear W. about 9 chs. dist.

31.11 Water Tower at Agency School, brs. S.  $66^{\circ} 43'$  W.

33.60 Road, brs. N.  $45^{\circ}$  E. and S.  $45^{\circ}$  W.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

40.00 Set an iron post for  $\frac{1}{4}$  sec. cor. bet. secs. 1 and 2, with  
brass cap stamped

$\frac{1}{4}$  S 2 in W. half  
S 1 in E. half  
1911 in S.

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
W. of cor.

54.25 Left bank of Colorado River, course S.  $45^{\circ}$  W.

Set an iron post for M.C. of frac. secs. 1 and 2, with  
brass cap stamped

M C in N. half  
T 9 N S 2 in SW. quadrant  
R 20 W S 1 in SE. quadrant  
1911 in S.  
1 notch on E. edge

from which

A willow 10 ins. dia. brs. N.  $62^{\circ}$  W., 53 lks. dist.  
Mkd. T 9 N R 20 W S 2 M C B T.

Dig a pit 36x36x12 ins. S ft. S. of cor., and raise a  
mound of earth 4 ft. base, 2 ft. high, S. of post.

Land, level mesa, - agricultural.  
Soil, sandy loam, 1st rate.

Dec. 9, 1911. At 8 a.m., l.m.t., I set off  $34^{\circ} 04\frac{1}{2}'$  on  
the lat. arc,  $22^{\circ} 42'$  S. on the decl. arc, and deter-  
mine a meridian with the solar at the S C. of secs. 34  
and 35, on 2nd Standard Parallel N.

Thence I run

N.  $0^{\circ} 01'$  W. bet. secs. 34 and 35.

Over nearly level bottom land, through scattering brush.

16.00 Parker-Ehrenberg road, brs. N.  $60^{\circ}$  E. and S.  $60^{\circ}$  W.

20.00 Set an iron post for  $1/16$  sec. cor. No. 12, bet. secs. 34  
and 35 (S.  $\frac{1}{4}$ ) with brass cap stamped

$1/16$  S 34 in W. half  
S 35 in E. half  
No 12 1911 in S., from which

A mesquite 20 ins. dia. brs. S.  $18^{\circ} 15'$  W., 187 lks. dist.  
Mkd.  $1/16$  S 34 B T.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
W. of cor.

40.00 Set an iron post for  $\frac{1}{4}$  sec. cor. bet. secs. 34 and 35,  
with brass cap stamped

$\frac{1}{4}$  S 34 in W. half  
S 35 in E. half  
1911 in S., from which

A mesquite 10 ins. dia. brs. N.  $82^{\circ}$  E., 32 lks. dist.  
Mkd.  $\frac{1}{4}$  S 35 B T.

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
W. of cor.

60.00 Set an iron post for  $1/16$  sec. cor. No. 6, bet. secs. 34  
and 35 (N.  $\frac{1}{2}$ ) with brass cap stamped

$1/16$  S 34 in W. half  
S 35 in E. half  
No 6 1912 in S.

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
W. of cor.

61.20 Wood road, brs. N.  $75^{\circ}$  W. and S.  $75^{\circ}$  E.

80.00 Set an iron post for the cor. of secs. 26, 27, 34 and 35,  
with brass cap stamped

T 9 N S 26 in NE. quadrant  
R 20 W S 35 in SE. quadrant  
S 34 in SW. quadrant  
S 27 in NW. quadrant  
1911 in S.

1 notch on S. and 2 notches on E. edges

Dig pits 18x18x12 ins. in each sec.  $5\frac{1}{2}$  ft. dist., and  
raise a mound of earth 4 ft. base, 2 ft. high, W. of  
cor.

Land, nearly level, - agricultural and grazing.  
Soil, adobe and sandy loam, 1st rate.  
Scattering mesquite, sage and quail brush.

-----  
From the cor. of secs. 26, 27, 34 and 35, I run  
East on a random line bet. secs. 26 and 35, setting temp.  
cors. at intervals of 20.00 chs.

Subdivision of frac. T. 9 N., R. 20 W.

Chains

80.00 Falls 3 lks. N. of the cor. of secs. 25, 26, 35 and 36.  
Thence I run  
N. 89° 59' W. on a true line bet. secs 26 and 35.  
Over level land, through scattering brush.

12.60 Road, brs. N. and S.

20.00 Set an iron post for 1/16 sec. cor. No. 1, bet. secs. 26  
and 35 (E. 1/2) with brass cap stamped

1/16 S 26 in N. half  
S 35 No 1 1911 in S. half,

from which

A mesquite 18 ins. dia. brs. N. 79° E., 115 lks. dist.  
Mkd. 1/16 S 26 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.

35.50 Parker-Ehrenberg road, brs. N. 25° E. and S. 25° W.

40.00 Set an iron post for the 1/4 sec. cor. bet. secs. 26 and  
35, with brass cap stamped

1/4 S 26 in N. half  
S 35 1911 in S. half, from which

A mesquite 10 ins. dia. brs. S. 30° E., 18 lks. dist.  
Mkd. 1/4 S 35 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.

60.00 Set an iron post for 1/16 sec. cor. No. 2, bet. secs. 26  
and 35 (W. 1/2) with brass cap stamped

1/16 S 26 in N. half  
S 35 No 2 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.

80.00 The cor. of secs. 26, 27, 34 and 35.

Land, nearly level, - agricultural and grazing.  
Soil, adobe, and sandy, 1st rate.  
Scattering mesquite, arrow weed and quail brush.

-----



## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

From 1/16 sec. cor. No. 12, bet. secs. 34 and 35 (S.  $\frac{1}{2}$ )

I run

East on a random line through the middle of the S. half of sec. 35, setting temp. corners at intervals of 20.00 chs.

80.08 Falls 3 lks. N. of the 1/16 sec. cor. No. 12, bet. secs. 35 and 36 (S.  $\frac{1}{2}$ ).

Thence I run

N. 89° 59' W. on a true line through the middle of the S. half of sec. 35.

Over nearly level land, through scattering brush.

8.00 Road, brs. N. 40° E. and S. 40° W.

13.45 Road, brs. N. and S.

20.02 Set an iron post for 1/16 sec. cor. No. 11, in center of the SE  $\frac{1}{4}$  of sec. 35, with brass cap stamped

1/16 S 35 in N. half  
No 11 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3  $\frac{1}{2}$  ft. base, 1  $\frac{1}{2}$  ft. high, N. of cor.

40.04 Set an iron post for 1/16 sec. cor. No. 10, bet. the SE. and SW. quarters of sec. 35, with brass cap stamped

1/16 S 35 in N. half  
No 10 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3  $\frac{1}{2}$  ft. base, 1  $\frac{1}{2}$  ft. high, N. of cor.

60.06 Set an iron post for 1/16 sec. cor. No. 9, in the center of the SW  $\frac{1}{4}$  of sec. 35, with brass cap stamped

1/16 S 35 in N. half  
No 9 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3  $\frac{1}{2}$  ft. base, 1  $\frac{1}{2}$  ft. high, N. of cor.

75.25 Parker-Threnberg road, brs. S. 45° W. and N. 45° E.

80.08 The 1/16 sec. cor No. 12, bet. secs. 34 and 35 (S.  $\frac{1}{2}$ ).

Subdivision of frac. T. 9 N., R. 20 W.

Chains

Land, level, - agricultural.  
Soil, adobe, 1st rate, and sandy loam, 1st rate.  
Scattering mesquite, arrow weed and quail brush.

-----  
From the  $\frac{1}{4}$  sec. cor. bet. secs. 34 and 35, I run  
East on a random line through the middle of sec. 35,  
setting temp. cors. at intervals of 20.00 chs.

80.08 Falls 12 lks. N. of the  $\frac{1}{4}$  sec. cor. bet. secs. 35 and 36,  
Thence I run  
N. 89° 55' W. on a true line through the middle of sec. 35.  
Over nearly level land, through scattering brush.

13.05 Road, brs. N. and S.

20.02 Set an iron post for the 1/16 sec. cor. No. 7, bet. the  
NE. and SE. quarters of sec. 35, with brass cap  
stamped

1/16 S 35 in N. half  
No 7 1911 in S. half, from which

A mesquite 12 ins. dia. brs. N. 1 $\frac{1}{4}$ ° E., 146 lks. dist.  
Mkd. 1/16 S 35 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high,  
N. of cor.

40.04 Set an iron post for center  $\frac{1}{4}$  sec. cor. of sec. 35, with  
brass cap stamped C  $\frac{1}{4}$  S 35 1911, from which

A mesquite 24 ins. dia. brs. S. 71° 30' W., 99 lks. dist.  
Mkd. C  $\frac{1}{4}$  S 35 B T.

Dig pits 18x18x12 ins. E., W., and S. of cor., 3 ft.,  
and N. of cor. 7 ft. dist., and raise a mound of earth  
4 ft. base, 2 ft. high, N. of post.

52.10 Road, brs. N. 10° E. and S. 10° W.

55.75 Parker-Ehrenberg road, brs. N. 10° E. and S. 10° W.

60.06 Set an iron post for 1/16 sec. cor. No. 8, bet. the NW.  
and SW. quarters of sec. 35, with brass cap stamped

1/16 S 35 in N. half  
No 8 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 $\frac{1}{2}$  ft. base. 1 $\frac{1}{2}$  ft. high.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

N. of cor.

80.08 The  $\frac{1}{4}$  sec. cor. bet. secs. 34 and 35.

Land, nearly level, - agricultural.  
Soil, adobe and sandy loam, 1st rate.  
Scattering mesquite, quail brush and arrow weed.

-----  
From  $\frac{1}{16}$  sec. cor. No. 6, bet. secs. 34 and 35 (N.  $\frac{1}{2}$ )

I run

East on a random line through the middle of the N. half of  
sec. 35, setting temp. cors. at intervals of 20.00 chs.

80.08 Falls 9 lks. N. of the  $\frac{1}{16}$  sec. cor. No. 6, bet. secs.  
35 and 36 (N.  $\frac{1}{2}$ ).

Thence I run

N.  $89^{\circ} 56'$  W. on a true line through the middle of the  
N. half of sec. 35.

Over nearly level land, through scattering brush.

15.30 Road, brs. S. and N.  $20^{\circ}$  E.

20.02 Set an iron post for the  $\frac{1}{16}$  sec. cor. No. 5, in center  
of the NE  $\frac{1}{4}$  of sec. 35, with brass cap stamped

$\frac{1}{16}$  S 35 in N. half  
No 5 1911 in S. half, from which

A mesquite 24 ins. dia. brs. N.  $77^{\circ}$  E., 145 lks. dist.  
Mkd.  $\frac{1}{16}$  S 35 B T.

Dig pits  $18 \times 18 \times 12$  ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.

40.04 Set an iron post for  $\frac{1}{16}$  sec. cor. No. 4, bet. the NE.  
and NW. quarters of sec. 35, with brass cap stamped

$\frac{1}{16}$  S 35 in N. half  
No 4 1911 in S. half

Dig pits  $18 \times 18 \times 12$  ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.

45.05 Parker-Ehrenberg road, brs. N.  $45^{\circ}$  E. and S.  $45^{\circ}$  W.

60.06 Set an iron post for  $\frac{1}{16}$  sec. cor. No. 3, in the center  
of the NW  $\frac{1}{4}$  of sec. 35, with brass cap stamped

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

1/16 S 35 in N. half  
No 3 1911 in S. half, from which

A mesquite 24 ins. dia. brs. S. 28° 45' E., 63 lks. dist.  
Mkd. 1/16 S 35 B T.

Dig pits 18x18x12 ins. N. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

80.08 The 1/16 sec. cor. No. 6, bet. secs. 34 and 35 (N.½).

Land, nearly level, - agricultural and grazing.  
Soil, adobe and sandy, 1st rate.  
Scattering mesquite and arrow weed.

-----  
Dec. 9, 1911. At the cor. of secs. 26, 27, 34 and 35, I  
set off 22° 45½' S. on the decl. arc, and at 11h 52m 3s  
a.m., l.m.t., observe the sun on the meridian; the re-  
sulting lat. is 34° 05', the proper lat.

Thence I run

N. 0° 01' W. bet. secs. 26 and 27.

Over nearly level land, through scattering brush.

20.00 Set an iron post for 1/16 sec. cor. No. 12, bet. secs. 26  
and 27 (S.½) with brass cap stamped

1/16 S 27 in W. half  
S 26 in E. half  
No 12 1911 in S.

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
W. of cor.

40.00 Set an iron post for ¼ sec. cor. bet. secs. 26 and 27,  
with brass cap stamped

¼ S 27 in W. half  
S 26 in E. half  
1911 in S.

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist., and  
raise a mound of earth 3½ ft. base, 1½ ft. high, W. of  
cor.

60.00 Set an iron post for the 1/16 sec. cor. No. 6, bet. secs.  
26 and 27 (N.½) with brass cap stamped

1/16 S 27 in W. half  
S 26 in E. half  
No 6 1911 in S.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
W. of cor.

80.00 Set an iron post for the cor. of secs. 22, 23, 26 and 27,  
with brass cap stamped

T 9 N S 23 in NE. quadrant  
R 20 W S 26 in SE. quadrant  
S 27 in SW. quadrant  
S 22 in NW. quadrant

1911 in S.

2 notches on S. and 2 notches on E. edge

Dig pits 18x18x12 ins. in each sec. 5½ ft. dist., and  
raise a mound of earth 4 ft. base, 2 ft. high, W. of cor.

Land, slightly rolling, - sand dunes, - grazing.  
Soil, sandy, 2nd rate.  
Scattering mesquite and arrow weed.

-----

From the cor. of secs. 22, 23, 26 and 27, I run  
S. 89° 59' E. on a random line bet. secs. 23 and 26,  
setting temp. cors. at intervals of 20.00 chs.

80.00 Intersect the cor. of secs. 23, 24, 25 and 26.

Thence I run

N. 89° 59' W. on a true line bet. secs. 23 and 26.

Over nearly level land, through scattering brush.

1.25 Road, brs. N. and S.

13.00 Parker-Ehrenberg road, brs. N. and S. 20° E.

20.00 Set an iron post for 1/16 sec. cor. No. 1, bet. secs. 23  
and 26 (E. ½) with brass cap stamped

1/16 S 23 in N. half  
S 26 No 1 1911 in S. half,

from which

A mesquite 12 ins. dia. brs. N. 88° 15' E., 41 lks. dist.  
Mkd. 1/16 S 23 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

40.00 Set an iron post for ¼ sec. cor. bet. secs. 23 and 26,  
with brass cap stamped

## Subdivision of frac. T. 9 N., R. 20 W.

Chains

$\frac{1}{4}$  S 23 in N. half  
S 26 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.

54.35 Reclamation Service survey line, brs. N. and S.

60.00 Set an iron post for 1/16 sec. cor. No. 2, bet. secs 23  
and 26 (W. $\frac{1}{2}$ ) with brass cap stamped

$\frac{1}{16}$  S 23 in N. half  
S 26 1911 No 2 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.

80.00 The cor. of secs. 22, 23, 26 and 27.

Land, nearly level, - agricultural and grazing.  
Soil, sandy, 1st rate.  
Scattering mesquite and arrow weed.

From 1/16 sec. cor. No. 12, bet. secs. 26 and 27 (S. $\frac{1}{2}$ )

I run

S. 89° 59' E. on a random line through the S. half of  
sec. 26, setting temp. cors. at intervals of 20.00 chs.

80.00 Falls 5 lks. N. of the 1/16 sec. cor. No. 12, bet. secs.  
25 and 26 (S. $\frac{1}{2}$ ) .

Thence I run

N. 89° 57' W. on a true line through the middle of the  
S. half of sec. 26.

Over nearly level land, through scattering brush.

8.40 Road, brs. N. and S.

20.00 Set an iron post for 1/16 sec. cor. No. 11, in the center  
of the SE $\frac{1}{4}$  of sec, 26, with brass cap stamped

$\frac{1}{16}$  S 26 in N. half  
No 11 1911 in S. half, from which

A mesquite 12 ins. dia. brs. S. 56 $\frac{1}{2}$ ° W., 6 lks. dist.  
Mkd.  $\frac{1}{16}$  S 26 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

N. of cor.

20.25 Parker-Ehrenberg road, brs. N. 30° E. and S. 30° W.

40.00 Set an iron post for 1/16 sec. cor. No. 10, bet. the SE. and SW. quarters of sec. 26, with brass cap stamped

1/16 S 26 in N. half  
No 10 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3½ ft. base, 1½ ft. high, N. of cor.

53.82 Reclamation Service survey line, brs. N. and S.

60.00 Set an iron post for 1/16 sec. cor. No. 9, in the center of the SW¼ of sec. 26, with brass cap stamped

1/16 S 26 in N. half  
No 9 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3½ ft. base, 1½ ft. high, N. of cor.

80.00 The 1/16 sec. cor. No. 12, bet. secs. 26 and 27 (S.½).

Land, nearly level, - agricultural and grazing.  
Soil, adobe, 1st rate.  
Scattering mesquite and arrow weed.-

-----  
From the ¼ sec. cor. bet. secs. 26 and 27, I run S. 89° 59' E. on a random line through the middle of sec. 26, setting temp. cors. at intervals of 20.00 chs.

79.96 Falls 9 lks. S. of the ¼ sec. cor. bet. secs. 25 and 26.

Thence I run

S. 89° 57' W. on a true line through the middle of sec. 26.

Over nearly level land, through scattering brush.

3.45 Road, brs. N. 15° E. and S. 15° W.

7.45 Road, brs. N. and S.

10.20 Parker-Ehrenberg road, brs. N. 15° E. and S. 15° W.

19.99 Set an iron post for 1/16 sec. cor. No. 7, bet. the NE. and SE. quarters of sec. 26, with brass cap stamped

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

1/16 S 26 in N. half  
No 7 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

39.98 Set an iron post for center ¼ sec. cor. of sec. 26, with  
brass cap stamped O ¼ S 26 1911.

Dig pits 18x18x12 ins. E., W., and S. of cor., 3 ft.,  
and N. of cor. 7 ft. dist., and raise a mound of earth  
4 ft. base, 2 ft. high, N. of post.

54.03 Intersect the Colorado River Principal Meridian 7.39 chs.  
N. 0° 35' W. of the ¼ sec. cor. bet. secs. 19 and 24,  
T. 2 N. I destroy the old cor.

59.97 Set an iron post for 1/16 sec. cor. No. 8, bet. the NW.  
and SW. quarters of sec. 26, with brass cap stamped

1/16 S 26 in N. half  
No 8 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

79.96 The ¼ sec. cor. bet. secs. 26 and 27.

Land, nearly level, - agricultural and grazing.  
Soil, adobe and sandy, 1st rate.  
Scattering mesquite and arrow weed.

-----  
From the 1/16 sec. cor. No. 8, bet. secs. 26 and 27 (N. ½)

I run

S. 89° 59' E. on a random line through the middle of the  
N. half of sec. 26, setting temp. cors. at intervals  
of 20.00 chs.

80.00 Falls 9 lks. S. of the 1/16 sec. cor. bet. secs. 25 and 26  
(N. ½).

Thence I run

S. 89° 57' W. on a true line through the middle of the  
N. half of sec. 26.

Over nearly level land, through scattering brush.



## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

- 6.50 Parker-Ehrenberg road, brs. N. and S.
- 20.00 Set an iron post for 1/16 sec. cor. No. 5, in the center of the NE $\frac{1}{4}$  of sec. 26, with brass cap stamped
- 1/16 S 26 in N. half  
No 5 1911 in S. half
- Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.
- 40.00 Set an iron post for 1/16 sec. cor. No. 4, bet. the NE. and NW. quarters of sec. 26, with brass cap stamped
- 1/16 S 26 in N. half  
No 4 1911 in S. half
- Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.
- 60.00 Set an iron post for 1/16 sec. cor. No. 3, in the center of the NW $\frac{1}{4}$  of sec. 26, with brass cap stamped
- 1/16 S 26 in N. half  
No 3 1911 in S. half
- Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.
- 80.00 The 1/16 sec. cor. No. 6, bet. secs. 26 and 27 (N. $\frac{1}{2}$ )
- Land, nearly level, - agricultural and grazing.  
Soil, adobe, 1st rate.  
Scattering mesquite, arrow weed and sage brush.
- 
- Dec. 11, 1911. At 8 a.m., l.m.t., I set off 34° 06' on the lat. arc, 22° 54' S. on the decl. arc, and determine a meridian with the solar at the cor. of secs. 22, 23, 26 and 27.
- Thence I run
- N. 0° 01' W. bet. secs. 22 and 23.
- Over slightly rolling land, through scattering brush.
- 20.00 Set an iron post for 1/16 sec. cor. No. 12, bet. secs. 22 and 23 (S. $\frac{1}{2}$ ) with brass cap stamped

Subdivision of frag. T. 9 N., R. 20 W.

Chains

1/16 S 22 in W. half  
S 23 in E. half  
No 12 1911 in S.

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
W. of cor.

20.75 Old ditch, course S. 35° W.

31.00 Parker-Ehrenberg road, brs. N. 30° E. and S. 30° W.

40.00 Set an iron post for 1/4 sec. cor. bet. secs. 22 and 23,  
with brass cap stamped

1/4 S 22 in W. half  
S 23 in E. half  
1911 in S.

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
W. of cor.

41.10 Parker-Blythe telephone line, brs. N. 15° E. and S. 15° W.

48.70 Road, brs. S. 45° E. and N.

56.00 Same road, brs. S. and N. 10° E.

56.90 Road, brs. N. 35° E. and S. 35° W.

60.00 Set an iron post for 1/16 sec. cor. No. 6, bet. secs. 22  
and 23 (N. 1/4) with brass cap stamped

1/16 S 22 in W. half  
S 23 in E. half  
No 6 1911 in S.

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
W. of cor.

60.75 Road, brs. N. 10° E. and S. 10° W.

62.75 Road, brs. N. 50° E. and S. 50° W.

71.90 Road, brs. N. 75° E. and S. 75° W.

72.25 Road, brs. N. 65° E. and S. 35° W.

75.10 Road, brs. N. 35° E. and W.

79.50 Road, brs. E. and W.

80.00 Set an iron post for the cor. of secs. 14, 15, 22 and 23,  
with brass cap stamped

Subdivision of frac. T. 9 N., R. 20 W.

Chains

T 9 N S 14 in NE. quadrant  
R 20 W S 23 in SE. quadrant  
S 22 in SW. quadrant  
S 15 in NW. quadrant

1911 in S.

3 notches on S. and 2 notches on E. edge

Dig pits 18x18x12 ins. in each sec. 5½ ft. dist., and  
raise a mound of earth 4 ft. base, 2 ft. high, W. of  
cor.

Land, nearly level, - agricultural and grazing.

Soil, adobe, 1st rate.

Scattering brush of mesquite and arrow weed.

-----  
From the cor. of secs. 14, 15, 22 and 23, I run  
S. 89° 59' E. on a random line bet. secs. 14 and 23,  
setting temp. cors. at intervals of 20.00 chs.

80.00 Falls 14 lks. S. of the cor. of secs. 13, 14, 23 and 24,

Thence I run

S. 89° 55' W. on a true line bet. secs. 14 and 23.

Over nearly level land, through scattering brush.

8.00 Road, brs. N. 65° W. and S. 65° E.

16.85 Road, brs. N. 15° W. and S. 15° E.

20.00 Set an iron post for 1/16 sec. cor. No. 1, bet. secs. 14  
and 23 (E. ¼) with brass cap stamped

1/16 S 14 in N. half  
S 23 No 1 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

35.07 Road, brs. N. 20° W. and S. 20° E.

36.90 Road, brs. N. 60° W. and S. 60° E.

40.00 Set an iron post for ¼ sec. cor. bet. secs. 14 and 23,  
with brass cap stamped

¼ S 14 in N. half  
S 23 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

- 41.50 Group of Indian cabins, brs. N., 5 chs. dist.
- 55.20 Intersect the Colorado River Principal Meridian 7.69 chs.  
N. 0° 32' W. of old cor. of secs. 7, 12, 13 and 18,  
T. 2 N.
- 56.50 Old irrigation ditch, course S. 40° W.
- 57.00 Road, brs. N. 55° E. and S. 40° W. Wire fence parallel to  
road, 25 lks. N.
- 57.75 Road, brs. N. 80° W. and S. 80° E. Cor. of wire fence  
brs. N., 50 lks. dist. Fences bear N. 80° W. and E.
- 60.00 Set an iron post for 1/16 sec. cor. No. 2 bet. secs. 14  
and 23 (W. 1/2) with brass cap stamped  
1/16 S 14 in N. half  
S 23 No 2 1911 in S. half  
Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.
- 65.60 Road, brs. N. and S.
- 66.50 Parker-Blythe telephone line, brs. N. 25° E. and S. 25° W.
- 68.00 Indian cabin brs. N., 3.50 chs. dist.
- 69.20 Road, brs. N. 75° E. and N. 30° E. and S. 30° W.
- 71.50 Road, brs. N. and S.
- 77.35 Road, brs. N. 30° W. and S. 30° E.
- 77.75 Road, brs. N. and S.
- 80.00 The cor. of secs. 14, 15, 22 and 23.  
Land, nearly level, - agricultural.  
Soil, sandy and adobe, 1st rate.  
Scattering brush of mesquite and arrow weed.
- 
- From 1/16 sec. cor. No. 12, bet. secs. 22 and 23 (S. 1/2)  
I run  
S. 89° 59' E. on a random line through the middle of the  
S. half of sec. 23, setting temp. cors. at intervals of  
20.00 chs.
- 79.96 Falls 3 lks. N. of the 1/16 sec. cor. No. 12, bet. secs.  
23 and 24 (S. 1/2).

Subdivision of frac. T. 9 N., R. 20 W.

Chains

Thence I run

N. 89° 58' W. on a true line through the middle of the S. half of sec. 23.

Over nearly level land, through scattering brush.

6.10 Road, brs. N. 30° W. and S. 30° E.

15.00 Parker-Ehrenberg road, brs. N. and S.

19.99 Set an iron post for 1/16 sec. cor. No. 11, in the center of the SE $\frac{1}{4}$  of sec. 23, with brass cap stamped

1/16 S 23 in N. half  
No 11 1911 in S. half

Dig pits 18x18x12 ins. N. and W. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.

29.40 Old irrigation ditch, course S. 30° E.

39.98 Set an iron post for 1/16 sec. cor. No. 10, bet. the SE. and SW. quarters of sec. 23, with brass cap stamped

1/16 S 23 in N. half  
No 10 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.

59.97 Set an iron post for 1/16 sec. cor. No. 9, in the center of the SW $\frac{1}{4}$  of sec. 23, with brass cap stamped

1/16 S 23 in N. half  
No 9 1911 in S. half, from which

A mesquite 16 ins. dia. brs. S. 80° E., 22 lks. dist. Mkd. 1/16 S 23 B T.

Dig pits 18x18x12 ins. N. and W. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.

79.96 The 1/16 sec. cor. No. 12, bet. secs. 22 and 23 (S. $\frac{1}{2}$ )

Land, nearly level, - agricultural.  
Soil, adobe and sandy, 1st rate.  
Scattering brush of mesquite, sage and alkali weed.

-----  
From the  $\frac{1}{2}$  sec. cor. bet. secs. 22 and 23, I run  
S. 89° 59' E. on a random line through the middle of sec.

Subdivision of frac. T. 9 N., R. 20 W.

Chains

23, setting temp. cors. at intervals of 20.00 chs.

80.00 Falls 8 lks. S. of the  $\frac{1}{4}$  sec. cor. bet. secs. 23 and 24.

Thence I run

S. 89° 58' W. on a true line through the middle of sec. 23.

Over nearly level land, through scattering brush.

10.15 Road, brs. N. 20° W. and S. 20° E.

14.70 Parker-Ehrenberg road, brs. N. and S.

20.00 Set an iron post for  $\frac{1}{16}$  sec. cor. No. 7, bet. the NE. and SE. quarters of sec. 23, with brass cap stamped

$\frac{1}{16}$  S 23 in N. half  
No 7 1911 in S. half, from which

A mesquite 12 ins. dia. brs. S. 4 $\frac{1}{2}$ ° E., 33 lks. dist.  
Mkd.  $\frac{1}{16}$  S 23 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high,  
N. of cor.

40.00 Set an iron post for center  $\frac{1}{4}$  sec. cor. of sec. 23, with  
brass cap stamped C  $\frac{1}{4}$  S 23 1911.

Dig pits 18x18x12 ins. E., W., and S. 3 ft., and N. of  
cor. 7 ft. dist., and raise a mound of earth 4 ft. base,  
2 ft. high, N. of post.

54.00 Dry slough, brs. N. 80° W. and S. 85° E.

59.00 Dry slough, brs. N. 80° W. and S. 80° E.

60.00 Set an iron post for  $\frac{1}{16}$  sec. cor. No. 8, bet. the NW. and SW. quarters of sec. 23, with brass cap stamped

$\frac{1}{16}$  S 23 in N. half  
No 8 1911 in S. half, from which

A mesquite 8 ins. dia. brs. N. 10 $\frac{1}{2}$ ° E., 48 lks. dist.  
Mkd.  $\frac{1}{16}$  S 23 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high,  
N. of cor.

69.00 Old irrigation ditch, course S. 30° W.

74.60 Road, brs. N. 45° E. and S. 45° W.

76.00 Road, brs. N. 30° E. and S. 30° W.

80.00 The  $\frac{1}{4}$  sec. cor. bet. secs. 22 and 23.

Land, nearly level, - agricultural.

Subdivision of frac. T. 9 N., R. 20 W.

Chains

Soil, adobe and sandy loam, 1st rate.  
Scattering brush of mesquite and arrow weed.

-----  
From the 1/16 sec. cor. No. 6, bet. secs. 22 and 23 (N. 1/2)

I run

S. 89° 59' E. on a random line through the middle of the  
N. half of sec. 23, setting temp. cors. at intervals of  
20.00 chs.

80.00 Falls 3 lks. S. of the 1/16 sec. cor. No. 6, bet. secs. 23  
and 24 (N. 1/2).

Thence I run

West on a true line through the middle of the N. half of  
sec. 23.

Over nearly level land, through scattering brush.

16.10 Parker-Ehrenberg road, brs. N. and S.

17.00 Road, brs. N. 65° W. and S. 65° E.

20.00 Set an iron post for 1/16 sec. cor. No. 5, in the center  
of the NE 1/4 of sec. 23, with brass cap stamped

1/16 S 23 in N. half  
No 5 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.

40.00 Set an iron post for 1/16 sec. cor. No. 4, bet. the NE  
and NW. quarters of sec. 23, with brass cap stamped

1/16 S 23 in N. half  
No 4 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.

60.00 Set an iron post for 1/16 sec. cor. No. 3, in the center  
of the NW 1/4 of sec. 23, with brass cap stamped

1/16 S 23 in N. half  
No 3 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

- 65.50 Old irrigation ditch, brs. N. and S.  
 70.60 Road, brs. N. and S.  
 72.25 Parker-Blythe telephone line, brs. N. 15° E. and S. 15° W.  
 78.40 Road, brs. N. 40° E. and S. 40° W.  
 80.00 The 1/16 sec. cor. No. 6, bet. secs. 22 and 23 (N. ½)  
 Land, nearly level, - agricultural.  
 Soil, adobe and sandy loam, 1st rate.  
 Scattering brush of sage and mesquite, and arrow weed.
- 
- Dec. 11, 1911. At the cor. of secs. 14, 15, 22 and 23,  
 I set off 22° 56½' S. on the decl. arc, and at 11h 52m  
 57s a.m., l.m.t., observe the sun on the meridian; the  
 resulting lat. is 34° 06½', the proper lat.
- Thence I run  
 N. 0° 01' W. bet. secs. 14 and 15.  
 Over nearly level bottom land, through scattering brush.
- 4.54 Road, brs. N. 50° E. and S. 50° W.  
 4.80 Road, brs. E. and W.  
 6.50 Road, brs. N. 20° E. and S. 20° W.  
 8.50 Road, brs. N. 20° W. and S. 20° E.  
 12.90 Road, brs. E. and W.  
 17.25 Roads bear N. 75° E. and S. 75° W.; and N. 30° W. and  
 S. 30° E.  
 19.90 Road, brs. N. 45° E. and S. 45° W.  
 20.00 Set an iron post for 1/16 sec. cor. No. 12, bet. secs. 14  
 and 15, (S. ½) with brass cap stamped  
 1/16 S 15 in W. half  
 S 14 in E. half  
 No 12 1911 in S.  
 Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist.,  
 and raise a mound of earth 3½ ft. base, 1½ ft. high,  
 W. of cor.
- 21.40 Road, brs. N. 40° E. and S. 40° W.  
 32.50 Road, brs. E. and W.  
 35.00 Indian Cabin, brs. E., 1 ch. dist.  
 38.10 Road, brs. N. 45° E. and S. 45° W.



Subdivision of frac. T. 9 N., R. 20 W.

Chains

40.00 Set an iron post for  $\frac{1}{4}$  sec. cor. bet. secs. 14 and 15, with brass cap stamped

$\frac{1}{4}$  S 15 in W. half  
S 14 in E. half  
1911 in S.

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist., and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

44.70 Road, brs. E. and W.

50.90 Road, brs. N. 10° E. and S. 10° W.

60.00 Set an iron post for 1/16 sec. cor. No. 6, bet. secs. 14 and 15 (N.  $\frac{1}{2}$ ) with brass cap stamped

1/16 S 15 in W. half  
S 14 in E. half  
No 6 1911 in S., from which

A cottonwood 10 ins. dia. brs. S. 85° E., 8 lks. dist.  
Mkd. 1/16 S 14 B T.  
A cottonwood 10 ins. dia. brs. S. 54° 15' W., 48 lks. dist.  
Mkd. 1/16 S 15 B T.

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist., and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

80.00 Set an iron post for the cor. of secs. 10, 11, 14 and 15, with brass cap stamped

T 9 N S 11 in NE. quadrant  
R 20 W S 14 in SE. quadrant  
S 15 in SW. quadrant  
S 10 in NW. quadrant  
1911 in S.  
4 notches on S. and 2 notches on E. edge,

from which

A willow 6 ins. dia. brs. N. 72° 30' W., 31 lks. dist.  
Mkd. T 9 N R 20 W S 10 B T.

Dig pits 18x18x12 ins. in each sec.  $5\frac{1}{2}$  ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor.

Land, nearly level, bottom land, - agricultural.  
Soil, adobe and sandy loam, 1st rate.  
Dense brush of arrow weed and scattering cottonwood timber.

-----  
From the cor. of secs. 10, 11, 14 and 15, I run

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

- N. 89° 55' E. on a random line bet. secs. 11 and 14,  
setting temp. cors. at intervals of 20.00 chs.
- 80.00 Falls 24 lks. N. of the cor. of secs. 11, 12, 13 and 14,  
Thence I run  
N. 89° 55' W. on a true line bet. secs. 11 and 14.  
Over nearly level bottom land, through scattering brush.
- 16.25 Road, brs. N. 10° E. and S. 10° W.
- 20.00 Set an iron post for 1/16 sec. cor. No. 1, bet. secs. 11  
and 14 (E. 1/4) with brass cap stamped  
1/16 S 11 in N. half  
S 14 No 1 1911 in S. half  
Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.
- 26.75 Corral and old agency stock yards, bear S., 1 ch. dist.
- 27.60 Parker-Ehrenberg road, brs. N. 40° E. and S. 40° W.
- 27.80 Parker-Blythe telephone line, brs. N. 40° E. and S. 40° W.
- 28.30 Road, brs. N. 10° E. and S. 10° W.
- 29.00 Wire fence, brs. N. 15° E. and S. 10° W.
- 33.00 Old agency buildings bear S., 6 chs. dist.
- 35.60 Irrigation ditch, course S.
- 36.25 Wire fence, brs. N. 80° W. and S. 80° E.
- 37.50 Road, brs. N. 80° W. and S. 80° E.
- 39.00 Wire fence, brs. N. 80° W. and S. 80° E. Enter field.
- 40.00 Set an iron post for the 1/4 sec. cor. bet. secs. 11 and  
14, with brass cap stamped  
1/4 S 11 in N. half  
S 14 1911 in S. half, from which  
A cottonwood 10 ins. dia. brs. N. 77° W., 141 lks. dist.  
Mkd. 1/4 S 11 B T.  
Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.
- 40.40 Wire fence, brs. N. and S. Leave field.
- 41.50 Old irrigation ditch, brs. N. 15° W. and S. 15° E.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

- 41.75 Wire fence, brs. N. 15° W. and S. 15° E. Enter field.
- 46.35 Lateral ditch, course S.
- 46.40 Wire fence, brs. N. and S.
- 49.00 Leave field, brs. N. and S.
- 49.10 Lateral ditch, course S.
- 49.45 Fence, brs. N. and S. Enter field.
- 57.50 Indian cabin on line.
- 58.00 Wire fence, brs. N. and S. Leave field.
- 60.00 Set an iron post for 1/16 sec. cor. No. 2, bet. secs. 11  
and 14 (W.  $\frac{1}{2}$ ) with brass cap stamped  
1/16 S 11 in N. half  
S 14 N 2 1911 in S. half  
Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high,  
N. of cor.
- 64.50 Road, brs. N. 35° E. and S. 35° W.  
Indian cabin, brs. N. 4.50 chs. dist.
- 67.00 Enter thick arrow weed, brs. N. and S.
- 68.00 Indian cabin, brs. N., 2 chs. dist.
- 68.90 Wire fence, brs. N. and S.
- 69.25 Leave thick arrow weed, enter field, brs. N. and S.
- 74.00 Leave field, enter brush, brs. N. and S.
- 80.00 The cor. of secs. 10, 11, 14 and 15.  
Land, nearly level, - agricultural. 29.20 chs. under  
cultivation.  
Soil, adobe and sandy loam, 1st rate.  
50.80 chs. of brush.
- 
- From 1/16 sec. cor. No. 12, bet. secs. 14 and 15 (S.  $\frac{1}{2}$ )  
I run  
N. 89° 55' E. on a random line through the middle of the  
S. half of sec. 14, setting temp. cors. at intervals  
of 20.00 chs.
- 80.00 Falls 22 lks. N. of the 1/16 sec. cor. No. 12, bet. secs.  
13 and 14 (S.  $\frac{1}{2}$ ).  
Thence I run  
N. 89° 56' W. on a true line through the S. half of sec.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

14.

Over nearly level land, through scattering brush.

20.00 Set an iron post for 1/16 sec. cor. No. 11, in the center of the SE $\frac{1}{4}$  of sec. 14, with brass cap stamped

1/16 S 14 in N. half  
No 11 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.

24.45 Road, brs. N. 10° W. and S. 10° E.

33.00 Road, brs. N. 45° E. and S. 45° W.

35.85 Lateral ditch, brs. N. and S.

36.40 Road, brs. N. 5° E. and S. 5° W.

36.95 Fence, brs. N. 8° E. and S. 5° W.

40.00 Set an iron post for 1/16 sec. cor. No. 10, bet. the SE. and SW. quarters of sec. 14, with brass cap stamped

1/16 S 14 in N. half  
No 10 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.

40.65 Irrigation ditch and wire fence, bear N. 65° W. and S. 65° E.

49.50 Wire fence, brs. N. 60° W. and S. 60° E.

50.70 Wire fence, brs. N. 15° E. and S. 15° W.

51.05 Irrigation ditch, brs. N. 10° E. and S. 10° W.

55.36 Old  $\frac{1}{4}$  sec. cor. bet. secs. 7 and 12, brs. N. 0° 29' W., 12.20 chs. dist., which I destroy.

56.15 Fence, brs. N. 75° W. and S. 75° E.

58.60 Old irrigation ditch, brs. N. and S.

59.10 Wire fence, brs. N. and S.

59.65 Parker-Blythe telephone line, brs. N. 10° E. and S. 10° W.

60.00 Set an iron post for 1/16 sec. cor. No. 9, in center of the SW $\frac{1}{4}$  of sec. 14, with brass cap stamped

1/16 S 14 in N. half  
No 9 1911 in S. half

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

62.50 Indian cabin, brs. S., 1 ch. dist.

62.50 Road, brs. N. and S.

68.80 Road, brs. N. 40° E. and S. 40° W.

69.55 Road, brs. N. and S.

72.85 Road, brs. N. 75° E. and S. 75° W.

74.05 Road, brs. N. and S.

75.00 Road, brs. N. 50° E. and S. 50° W.

77.15 Road, brs. N. 25° W. and S. 25° E.

79.95 Road, brs. N. 45° E. and S. 45° W.

80.00 The 1/16 sec. cor. No. 12, bet. secs. 14 and 15 (S.½)

Land, nearly level bottom, - agricultural.  
Soil, adobe and sandy, 1st rate.  
Scattering mesquite, quail and sage brush, and arrow weed.

-----

From the ¼ sec. cor. bet. secs. 14 and 15, I run  
N. 89° 55' E. on a random line through the middle of  
sec. 14, setting temp. cors. at intervals of 20.00 chs.

80.04 Falls 24 lks. N. of the ¼ sec. cor. bet. secs. 13 and 14.

Thence I run

N. 89° 55' W. on a true line through the middle of sec.  
14.

Over nearly level land, through scattering brush.

20.01 Set an iron post for 1/16 sec. cor. No. 7, bet. the NE.  
and SE. quarters of sec. 14, with brass cap stamped

1/16 S 14 in N. half  
No 7 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

23.00 Road, brs. N. and S.

23.30 Road, brs. N. 30° E. and S. 30° W.

29.20 Old well on line.

Subdivision of frac. T. 9 N., R. 20 W.

**Mhains**

- 30.30 Road, brs. N. 60° E. and S. 60° W.
- 33.00 Old irrigation ditch, course S.
- 33.70 Parker-Ehrenberg road, brs. N. 10° W. and S.
- 38.95 Wire fence, brs. N. and S. Enter field.
- 34.40 Indian cabin, brs. S., 50 lks. dist.
- 38.00 Irrigation lateral ditch, brs. S. 70° W. and N. 70° E.
- 38.30 Fence, brs. S. 70° W. and N. 70° E.
- 40.02 Set an iron post for center  $\frac{1}{4}$  sec. cor. of sec. 14, with  
brass cap stamped C  $\frac{1}{4}$  S 14 1911.  
Dig pits 18x18x12 ins. E., W., and S. of cor., 3 ft.,  
and N. of cor. 7 ft. dist., and raise a mound of earth  
4 ft. base, 2 ft. high, N. of post.
- 43.50 Wire fence, brs. N. and S. Leave field.
- 43.60 Irrigation ditch, brs. N. and S.
- 43.75 Wire fence, brs. N. and S. Enter field.
- 48.00 Leave field, brs. N. and S.
- 50.00 Parker-Blythe telephone line, brs. N. 15° E. and S. 15° W.
- 53.85 Wire fence cor. Fences bear N. 20° E., S. 20° W., and  
S. 85° E.
- 53.95 Lateral ditch, brs. N. 20° E. and S. 20° W.
- 57.90 Indian cabin, brs. S., 5 lks. dist.
- 60.03 Set an iron post for  $\frac{1}{16}$  sec. cor. No. 8, bet. the SW.  
and NW. quarters of sec. 14, with brass cap stamped  
 $\frac{1}{16}$  S 14 in N. half  
No 8 1911 in S. half  
Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.  
Group of Indian cabins, brs. S. 2 chs. dist.
- 62.50 Indian cabin, brs. N., 2 chs. dist.
- 63.00 Road, brs. N. and S.
- 64.25 Road, brs. N. 30° E. and S. 30° W.
- 64.50 Wire fence, brs. N. 30° E. and S. 30° W. Enter field.
- 65.50 Indian cabin, brs. S., 1 ch. dist.
- 65.75 Lateral ditch, course S.



## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

- 40.00 Set an iron post for 1/16 sec. cor. No. 4, bet. the NE. and NW. quarters of sec. 14, with brass cap stamped
- 1/16 S 14 in N. half  
No 4 1911 in S. half, from which
- A cottonwood 30 ins. dia. brs. S. 50 $\frac{1}{2}$ ° W., 117 lks. dist.  
Mkd. 1/16 S 14 B T.
- Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.
- 42.00 Wire fence, brs. N. 10° W. and S. 10° E.  
Lateral ditch, brs. N. and S.
- 42.25 Lateral ditch, brs. NE. and SW.
- 44.00 Wire fence cor. on line. Fences bear S. and S. 80° E.
- 45.50 Lateral ditch, brs. N. and S.
- 46.00 Parker-Blythe telephone line, brs. N. 30° E. and S. 30° W.
- 48.15 Lateral ditch, brs. N. 20° E. and S. 20° W.
- 49.75 Chicken house, brs. S., 15 lks. dist.
- 50.50 Indian cabins, bear N., 50 and 150 lks. respectively.
- 52.00 Road, brs. N. 35° E. and S. 35° W.
- 54.00 Road, brs. N. 10° E. and S. 10° W.
- 54.40 Wire fence cor., brs. S., 10 lks. dist. Fences bear N. 75° W. and S. 65° W.
- 56.35 Indian cabin, brs. S., 30 lks. dist.
- 57.05 Fence, brs. N. 10° E. and S. 10° W.
- 58.45 Fence, brs. N. 65° W. and S. 65° E.
- 60.00 Set an iron post for 1/16 sec. cor. No. 3, in the center of the NW $\frac{1}{4}$  of sec. 14, with brass cap stamped
- 1/16 S 14 in N. half  
No 3 1911 in S. half
- Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.
- 60.25 Enter field, brs. N. and S.
- 66.80 Lateral ditch, brs. S. 55° E. and N. 55° W.
- 68.15 Lateral ditch, brs. S. 15° W. and N. 15° E.



Subdivision of frac. T. 9 N., R. 20 W.

Chains

- 71.15 Fence, brs. N. 15° E. and S. 15° W. Leave field.
- 71.35 Road, brs. N. 15° E. and S. 15° W.
- 73.00 Indian cabin, brs. N., 1 ch. dist.
- 74.00 Enter thick arrow weed brush, brs. N. and S.
- 76.75 Leave thick arrow weed, enter mesquite brush, brs. N. and S.
- 77.20 Road, brs. N. and S. Leave brush, same bearing.
- 80.00 The 1/16 sec. cor. No. 6, bet. secs. 14 and 15 (N. 1/2).  
Land, nearly level, - agricultural, 21.85 chs.; under cultivation, 58.15 chs.  
Soil, adobe and sandy loam, 1st rate.  
Brush of mesquite, arrow weed and quail.

-----

From the cor. of secs. 10, 11, 14 and 15, I run  
N. 0° 01' W. on a true line bet. secs. 10 and 11.  
Over nearly level bottom land, through thick arrow weed and  
and cottonwood.

- 5.80 Left bank of Colorado River,  
Set an iron post for M.C. of frac. secs. 10 and 11, with  
brass cap stamped

M C in N. half  
T 9 N S 10 in SW. quadrant  
R 20 W S 11 in SE. quadrant  
1911 in S.  
2 notches on E. edge

Dig a pit 36x36x12 ins. 8 ft. S. of cor., and raise a  
mound of earth 4 ft. base, 2 ft. high, S. of post.

Land, nearly level, - agricultural.  
Soil, adobe, 1st rate.  
Dense brush of arrow weed and cottonwood.

-----

From the cor. of secs. 1, 2, 11 and 12, I run  
N. 89° 55' W. on a true line bet. secs. 2 and 11.  
Over gently rolling mesa, through scattering brush.

- 1.80 Roads bear N. and S., and N. 15° W.
- 5.00 Road, brs. N. 20° W. and S. 20° E.
- 8.25 Small wash, course N. 35° W. Heads 2 chs., S. 30° E.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

- 9.70 Same wash, course S. 35° W.
- 9.70 Road, brs. N. 45° E. and S. 45° W.
- 18.00 Leave mesa, brs. N. and S.
- 20.00 Set an iron post for 1/16 sec. cor. No. 1, bet. secs. 2 and 11 (W. 1/2) with brass cap stamped
- 1/16 S 11 in N. half  
No 1 1911 in S. half
- Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.
- 21.50 Enter bottom land, brs. NW. and SE.
- 24.00 Road, brs. N. and S.
- 28.25 Old irrigation ditch, brs. N. 25° E. and S. 35° W.
- 29.00 Irrigation ditch, brs. N. 35° E. and S. 35° W.
- 29.10 Wire fence, brs. N. 35° E. and S. 35° W.
- Enter field.
- 30.00 Lateral ditch, brs. N. 75° W. and S. 75° E.
- 34.60 Indian cabin, brs. N., 1 ch. dist.
- 36.30 Wire fence, brs. N. 40° E. and S. 40° W. Leave field.
- 37.00 Road, brs. N. and S.
- 37.15 Left bank of Colorado River, course S. 40° W.
- Set an iron post for M.C. of frac. secs. 2 and 11, with brass cap stamped
- M C in W. half  
T 9 N S 2 in NE. quadrant  
R 20 W S 11 in SE. quadrant  
1911 in S.  
5 notches on S. edge
- Dig a pit 36x36x12 ins. 8 ft. E. of cor., and raise a mound of earth 4 ft. base, 2 ft. high, E. of post.
- Land, gently rolling mesa and nearly level river bottom, agricultural and grazing.  
Soil, adobe, 1st rate.  
Scattering sage and quail brush.
- 
- From 1/16 sec. cor. No. 12, bet. secs. 11 and 12 (S. 1/2)
- I run
- N. 89° 55' W. on a true line through the middle of the

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

S. half of sec. 11.

Leave mesa and descend to nearly level river bottom land.

2.50 Indian cabin, brs. S., 25 lks. dist.

Enter bottom land, brs. NW. and SE.

6.00 Indian cabin, brs. N., 1 ch. dist.

7.60 Wire fence, brs. N. 55° W. and S. 55° E. Enter field.

9.40 Wire fence, brs. N. 30° E. and S. 30° W. Leave field.

9.55 Road, brs. N. 30° E. and S. 30° W.

9.70 Parker-Blythe telephone line, brs. N. 45° E. and S. 45° W.

9.90 Fence, brs. N. 30° E. and S. 30° W. Enter yard.

11.00 Indian cabin, brs. N., 150 lks. dist.

11.10 Wire fence, brs. N. 50° W. and S. 50° E.

Enter cultivated field.

13.50 Lateral ditch, brs. S. 50° E. and N. 50° W.

20.00 Set an iron post for 1/16 sec. cor. No. 11, in center of the SE.  $\frac{1}{4}$  of sec. 11, with brass cap stamped

1/16 S 11 in N. half  
No 11 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3  $\frac{1}{2}$  ft. base, 1  $\frac{1}{2}$  ft. high, N. of cor.

24.00 Fence, brs. N. 60° W. and S. 60° E.

24.20 Lateral ditch, brs. N. 60° W. and S. 60° E.

Leave cultivated field.

40.00 Set an iron post for 1/16 sec. cor. No. 10, bet. the SE. and SW. quarters of sec. 11, with brass cap stamped

1/16 S 11 in N. half  
No 10 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3  $\frac{1}{2}$  ft. base, 1  $\frac{1}{2}$  ft. high, N. of cor.

41.20 Lateral ditch, brs. S. 5° E. and N. 5° W.

41.35 Irrigation ditch, brs. N. and S.

43.80 Road, brs. N. and S.

45.00 Old irrigation ditch, brs. N. and S.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

- 49.35 Road, brs. N. 30° E. and S. 30° W.
- 54.25 Wire fence, brs. N. and S.
- 57.75 Enter cultivated field, brs. N. and S.
- 60.00 Set an iron post for 1/16 sec. cor. No. 9, in center of the SW $\frac{1}{4}$  of sec. 11, with brass cap stamped
- 1/16 S 11 in N. half  
No 9 1911 in S. half
- Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.
- 60.50 Lateral ditch, brs. N. 10° E. and S. 10° W.
- 60.55 Wire fence, brs. N. and S. Leave field.
- 60.75 Road, brs. N. and S.
- 63.50 Wire fence, brs. N. and S.
- 64.00 Dry slough, brs. N. and S.
- 71.30 Left bank of Colorado River, course S. 75° W.
- Set an iron post for 1/16 M.C. of frac. sec. 11, with brass cap stamped
- M C in W. half  
1/16 S 11 in E. half  
1911 in S., from which
- A willow 10 ins dia. brs. S. 69 $\frac{1}{2}$ ° W., 49 lks. dist.  
Mkd. 1/16 S 11 M C B T.
- Dig a pit 36x36x12 ins. 8 ft. E. of cor., and raise a mound of earth 4 ft. base, 2 ft. high, E. of post.
- Land, nearly level bottom, - agricultural; 17.70 chs. under cultivation.  
Soil, adobe, and sandy loam, 1st rate.  
Scattering brush, 53.60 chs.
- 
- From the  $\frac{1}{4}$  sec. cor. bet. secs. 11 and 12, I run N. 89° 55' W. on a true line through the middle of sec. 11. Over gently rolling mesa land.
- 8.75 Leave mesa, brs. N. 10° W. and S. 10° E.
- Enter bottom land.
- 15.80 Road, brs. N. 15° W. and S. 15° E.
- 20.00 Set an iron post for 1/16 sec. cor. No. 7, bet. the NE. and SE. quarters of sec. 11. with brass cap stamped

Subdivision of frac. T. 9 N., R. 20 W.

Chains

1/16 S 11 in N. half  
No 7 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.

40.00 Set an iron post for center 1/4 sec. cor. of sec. 11, with  
brass cap stamped C 1/4 S 11 1911.

Dig pits 18x18x12 ins. E., W., and S., 3 ft., and N. of  
cor. 7 ft. dist., and raise a mound of earth 4 ft. base,  
2 ft. high, N. of post.

41.00 Wire fence, brs. N. 70° W. and S. 70° E. Enter field.

42.25 Wire fence, brs. N. 35° E. and S. 35° W. Leave field.

43.40 Irrigation ditch, brs. N. 35° E. and S. 35° W.

46.00 Road, brs. N. 20° W. and S. 20° E.

57.25 Road, brs. N. 20° E. and S. 20° W.

57.50 Left bank of Colorado River, course S. 45° W.

Set an iron post for 1/16 M.C. of frac. sec. 11, with  
brass cap stamped

1/16 S 11 in E. half  
M C in W. half  
1911 in S.

Dig a pit 36x36x12 ins. 8 ft. E. of cor., and raise a  
mound of earth 4 ft. base, 2 ft. high, E. of post.

Land, gently rolling mesa and nearly level river bottom,  
agricultural; 1.25 chs. under cultivation.  
Soil, adobe and sandy loam, 1st rate.  
Scattering brush of quail and sage, 56.25 chs.

-----  
From 1/16 sec. cor. No. 6, bet. secs. 11 and 12, (N. 1/2)

I run

N. 89° 55' W. on a true line through the middle of the  
N. half of sec. 11.

Over gently rolling mesa, through scattering brush.

2.00 Road, brs. N. 20° E. and S. 20° W.

2.40 Road, brs. N. and S.

14.00 Leave mesa, brs. N. 5° W. and S. 5° E. Descend to  
bottom land.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

- 18.00 Enter bottom land, brs. N. 5° W. and S. 5° E.
- 20.00 Set an iron post for 1/16 sec. cor. No. 5, in the center of the NE $\frac{1}{4}$  of sec. 11, with brass cap stamped
- 1/16 S 11 in N. half  
No 5 1911 in S. half
- Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.
- 21.50 Road, brs. N. 15° W. and S. 30° E.
- 35.00 Old irrigation ditch, brs. N. 35° E. and S. 35° W.
- 35.80 Irrigation ditch, brs. N. 25° E. and S. 25° W.
- 36.00 Wire fence, brs. N. 25° E. and S. 25° W.
- Enter cultivated field.
- 36.05 Lateral ditch, brs. N. 35° E. and S. 35° W.
- 40.00 Set an iron post for 1/16 sec. cor. No. 4, bet. the NE. and NW. quarters of sec. 11, with brass cap stamped
- 1/16 S 11 in N. half  
No 4 1911 in S. half
- Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.
- 40.10 Lateral ditch, brs. N. 35° E. and S. 35° W.
- 43.85 Lateral ditch, brs. N. 35° E. and S. 35° W.
- 44.70 Wire fence, brs. N. 25° E. and S. 25° W.
- 45.95 Road, brs. N. 25° E. and S. 25° W.
- 47.90 Left bank of Colorado River, course S. 30° W.
- Set an iron post for 1/16 M.C. of frac. sec. 11, with brass cap stamped
- M C in W. half  
1/16 S 11 in E. half  
1911 in S.
- Dig a pit 36x36x12 ins. 8 ft. E. of cor., and raise a mound of earth 4 ft. base, 2 ft. high, E. of post.
- Land, gently rolling mesa and nearly level bottom land, - agricultural and grazing.  
Soil, adobe and sandy loam, 1st rate.  
Scattering brush of sage, quail and arrow weed.

Subdivision of frac. T. 9 N., R. 20 W.

Chains

Dec. 12, 1911. At 8 a.m., l.m.t., I set off 34° 04½' on the lat. arc, 22° 58' S. on the decl. arc, and determine a meridian with the solar at the S C. of secs. 33 and 34, on 2nd Standard Parallel N.

Thence I run

N. 0° 02' W. bet. secs. 33 and 34.

Over nearly level bottom land, through scattering brush.

5.15 Drain, course W.

20.00 Set an iron post for the 1/16 sec. cor. No. 12, bet. secs. 33 and 34 (S.½) with brass cap stamped

1/16 S 33 in W. half  
S 34 in E. half  
No 12 1911 in S., from which

A mesquite 24 ins. dia. brs. S. 73° E., 241 lks. dist.  
Mkd. 1/16 S 34 B T.

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist., and raise a mound of earth 3½ ft. base, 1½ ft. high, W. of cor.

40.00 Set an iron post for ¼ sec. cor. bet. secs. 33 and 34, with brass cap stamped

¼ S 33 in W. half  
S 34 in E. half  
1911 in S., from which

A mesquite 24 ins. dia. brs. S. 4° 55' E., 77 lks. dist.  
Mkd. ¼ S 34 B T.  
A mesquite 6 ins. dia. brs. N. 29° W., 39 lks. dist.  
Mkd. ¼ S 33 B T.

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist., and raise a mound of earth 3½ ft. base, 1½ ft. high, W. of cor.

60.00 Set an iron post for 1/16 sec. cor. No. 6, bet. secs. 33 and 34 (N.½) with brass cap stamped

1/16 S 33 in W. half  
S 34 in E. half  
No 6 1911 in S.

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist., and raise a mound of earth 3½ ft. base, 1½ ft. high, W. of cor.

A mesquite 6 ins. dia. brs. S. 80° 50' E., 32 lks. dist.  
Mkd. 1/16 S 34 B T.

Subdivision of frac. T. 9 N., R. 20 W.

Chains

A mesquite 6 ins. dia. brs. N. 9°30' W., 51 lks. dist.  
Mkd. 1/16 S 33 B T.

60.80 Parker-Blythe telephone line, brs. N. 40° E. and S. 40° W.

65.20 Small drain, course E.

77.20 Road, brs. N. 60° E. and S. 60° W.

80.00 Set an iron post for the cor. of secs. 27, 28, 33 and 34,  
with brass cap stamped

T 9 N S 27 in NE. quadrant  
R 20 W S 34 in SE. quadrant  
S 33 in SW. quadrant  
S 28 in NW. quadrant

1911 in S.

1 notch on S. and 3 notches on E. edges,

from which

A mesquite 18 ins. dia. brs. N. 26°15' E., 54 lks. dist.  
Mkd. T 9 N R 20 W S 27 B T.

Dig pits 18x18x12 ins. in each sec. 5½ ft. dist., and  
raise a mound of earth 4 ft. base, 2 ft. high, W. of  
cor.

Land, nearly level, - agricultural.  
Soil, sandy loam, 1st rate.  
Scattering brush of mesquite and sage.

-----  
From the cor. of secs. 27, 28, 33 and 34, I run  
East on a random line bet. secs. 27 and 34, setting temp.  
cors. at intervals of 20.00 chs.

80.04 Falls 9 lks. S. of the cor. of secs. 26, 27, 34 and 35.

Thence I run

S. 89° 56' W. on a true line bet. secs. 27 and 34.

Over nearly level bottom land, through scattering brush.

18.00 Road, brs. N. 50° W. and S. 50° E.

20.01 Set an iron post for 1/16 sec. cor. No. 1, bet. secs. 27  
and 34 (E. ½) with brass cap stamped

1/16 S 27 in N. half  
S 34 No 1 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

35.00 Old irrigation ditch, brs. N. and S.



## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

- 36.00 Road, brs. N. and S.
- 40.02 Set an iron post for  $\frac{1}{4}$  sec. cor. bet. secs. 27 and 34,  
with brass cap stamped
- $\frac{1}{4}$  S 27 in N. half  
S 34 1911 in S. half
- Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.
- 41.10 Road, brs. N. 10° E. and S. 10° W.
- 42.00 Old irrigation ditch, brs. N. 10° E. and S. 10° W.
- 56.10 Road, brs. N. 65° W. and S. 65° E.
- 57.65 Road, brs. N. 20° W. and S. 20° E.
- 60.03 Set an iron post for 1/16 sec. cor. No. 2, bet. secs. 27  
and 34 (W.  $\frac{1}{4}$ ) with brass cap stamped
- 1/16 S 27 in N. half  
S 34 No 2 1911 in S. half
- Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.
- 64.00 Slough, 2 chs. wide, brs. N. and S.
- 68.00 Parker-Blythe telephone line, brs. N. 40° E. and S. 40° W.
- 71.00 Road, brs. N. and S.
- 77.00 Road, brs. N. and S. 30° W.
- 80.04 The cor. of secs. 27, 28, 33 and 34.
- Land, nearly level, - agricultural and grazing.  
Soil, sandy loam, 1st rate.  
Scattering brush of mesquite and sage.
- 
- From the 1/16 sec. cor. No. 12, bet. secs. 33 and 34 (S  $\frac{1}{4}$ )  
I run
- East on a random line through the middle of the S. half of  
sec. 34, setting temp. cors. at intervals of 20.00 chs.
- 80.00 Falls 3 lks. S. of the 1/16 sec. cor. No. 12, bet. secs.  
34 and 35 (S  $\frac{1}{4}$ ).
- Thence I run
- S. 89° 59' W. on a true line through the middle of the

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

S. half of sec. 34.

Over nearly level bottom land, through scattering brush.

20.00 Set an iron post for 1/16 sec. cor. No. 11, in the center of the SE $\frac{1}{4}$  of sec. 34, with brass cap stamped

1/16 S 34 in N. half  
No 11 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.

33.90 Old irrigation ditch, brs. N. 10° E. and S. 10° W.

38.75 Road, brs. N. 5° W. and S. 5° E.

40.00 Set an iron post for 1/16 sec. cor. No. 10, bet. the SE $\frac{1}{4}$  and SW $\frac{1}{4}$  quarters of sec. 34, with brass cap stamped

1/16 S 34 in N. half  
No 10 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.

43.50 Dry slough, 150 chs. wide, brs. N. and S.

60.00 Set an iron post for 1/16 sec. cor. No. 9, in center of the SW $\frac{1}{4}$  of sec. 34, with brass cap stamped

1/16 S 34 in N. half  
No 9 1911 in S. half, from which

A mesquite 18 ins. dia. brs. S. 18° 45' W., 138 lks. dist.  
Mkd. 1/16 S 34 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.

80.00 The 1/16 sec. cor. No. 12, bet. secs. 33 and 34 (S. $\frac{1}{2}$ ).

Land, nearly level bottom, - agricultural.  
Soil, adobe and sandy loam, 1st rate.  
Scattering brush of mesquite and sage.

-----  
From the  $\frac{1}{4}$  sec. cor. bet. secs. 33 and 34, I run East on a random line through the middle of sec. 34. setting temp. cors. at intervals of 20.00 chs.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

- 80.00 Falls 5 lks. S. of the  $\frac{1}{4}$  sec. cor. bet. secs. 34 and 35.  
Thence I run  
S. 89° 58' W. on a true line through the middle of sec. 34.  
Over nearly level bottom land, through scattering brush.
- 20.00 Set an iron post for  $\frac{1}{16}$  sec. cor. No. 7, bet. the NE.  
and SE. quarters of sec. 34, with brass cap stamped  
 $\frac{1}{16}$  S 34 in N. half  
No 7 1911 in S. half  
Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.
- 29.50 Old irrigation ditch, brs. N. and S.
- 39.80 Road, brs. N. and S.
- 40.00 Set an iron post for center  $\frac{1}{4}$  sec. cor. of sec. 34, with  
brass cap stamped C  $\frac{1}{4}$  S 34 1911, from which  
A mesquite 16 ins. dia. brs. S. 36° E., 150 lks. dist.  
Mkd. C  $\frac{1}{4}$  S 34 B T.  
Dig pits 18x18x12 ins. E., W. and S., 3 ft., and N. of  
cor. 7 ft. dist., and raise a mound of earth 4 ft. base,  
2 ft. high, N. of post.
- 45.00 Dry slough, 2.00 chs. wide, brs. N. 15° W. and S. 15° E.
- 59.40 Road, brs. N. 30° W. and S. 30° E.
- 60.00 Set an iron post for  $\frac{1}{16}$  sec. cor. No. 8, bet. the NW.  
and SW. quarters of sec. 34, with brass cap stamped  
 $\frac{1}{16}$  S 34 in N. half  
No 8 1911 in S. half, from which  
A mesquite 10 ins. dia. brs. N. 73° 15' W., 88 lks. dist.  
Mkd.  $\frac{1}{16}$  S 34 B T.  
Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.
- 71.10 Road, brs. N. 30° W. and S. 30° E.
- 80.00 The  $\frac{1}{4}$  sec. cor. bet. secs. 33 and 34.  
Land, nearly level, - agricultural.  
Soil, adobe and sandy loam, 1st rate.  
Scattering brush of mesquite, quail and sage.
-

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

- From the 1/16 sec. cor. No. 6, bet. secs. 33 and 34 (N.  $\frac{1}{2}$ )  
I run  
East on a random line through the middle of the N. half  
of sec. 34, setting temp. cors. at intervals of 20 chs.
- 80.04 Falls 10 lks. S. of the 1/16 sec. cor. No. 6, bet. secs.  
34 and 35 (N.  $\frac{1}{2}$ ).
- Thence I run  
S. 89° 56' W. on a true line through the middle of the  
N. half of sec. 34.
- Over nearly level bottom land, through scattering brush.
- 20.01 Set an iron post for 1/16 sec. cor. No. 5, in the center  
of the NE  $\frac{1}{4}$  of sec. 34, with brass cap stamped
- 1/16 S 34 in N. half  
No 5 1911 in S. half
- Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3  $\frac{1}{2}$  ft. base, 1  $\frac{1}{2}$  ft. high,  
N. of cor.
- 31.50 Old irrigation ditch, brs. N. 20° W. and S. 20° E.
- 40.02 Set an iron post for the 1/16 sec. cor. No. 4, bet. the  
NE. and NW. quarters of sec. 34, with brass cap  
stamped
- 1/16 S 34 in N. half  
No 4 1911 in S. half
- Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3  $\frac{1}{2}$  ft. base, 1  $\frac{1}{2}$  ft. high,  
N. of cor.
- 44.00 Road, brs. N. 10° W. and S. 10° E.
- 48.40 Road, brs. N. 50° W. and S. 50° E.
- 50.00 Dry slough, 2 chs. wide, brs. N. 25° W. and S. 25° E.
- 52.00 Road, brs. N. and S.
- 60.03 Set an iron post for 1/16 sec. cor. No. 3, in the center  
of the NW  $\frac{1}{4}$  of sec. 34, with brass cap stamped
- 1/16 S 34 in N. half  
No 3 1911 in S. half
- Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3  $\frac{1}{2}$  ft. base, 1  $\frac{1}{2}$  ft. high,

## Subdivision of frac. T.9 N., R.20 W.

## Chains

N. of cor.

- 65.00 Dim road, brs. N. and S.  
 69.50 Dim road, brs. N. 10° E. and S. 10° W.  
 80.04 The 1/16 sec. cor. No. 6, bet. secs. 33 and 34 (N.½).

Land, nearly level bottom, - agricultural.  
 Soil, adobe and sandy loam, 1st rate.  
 Scattering mesquite, quail, sage and arrow weed brush.

-----  
 Dec. 12, 1911. At the cor. of secs. 27, 28, 33 and 34,  
 I set off 23° 01½' S. on the decl. arc, and at 11h 53m  
 15s a.m., l.m.t., observe the sun on the meridian; the  
 resulting lat. is 34° 05', the proper lat.

Thence I run

N. 0° 02' W. bet. secs. 27 and 28.

Over nearly level bottom land, through scattering brush.

- 20.00 Set an iron post for 1/16 sec. cor. No. 12, bet. secs.  
 27 and 28 (S.½) with brass cap stamped

1/16 S 28 in W. half  
 S 27 in E. half  
 No 12 1911 in S.

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist.,  
 and raise a mound of earth 3½ ft. base, 1½ ft. high,  
 W. of cor.

- 21.30 Small drain, course S. 40° W.

- 40.00 Set an iron post for ¼ sec. cor. bet. secs. 27 and 28,  
 with brass cap stamped

¼ S 28 in W. half  
 S 27 in E. half  
 1911 in S.

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist.,  
 and raise a mound of earth 3½ ft. base, 1½ ft. high,  
 W. of cor.

- 50.95 Small draw, course E.

- 60.00 Set an iron post for 1/16 sec. cor. No. 6, bet. secs. 27  
 and 28 (N.½) with brass cap stamped

1/16 S 28 in W. half  
 S 27 in E. half  
 No 6 1911 in S., from which

## Subdivision of frac. T.9 N., R.20 W.

## Chains

A mesquite 24 ins. dia. brs. N. 13° 45' E., 106 lks. dist.  
Mkd. 1/16 S 27 B T.

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
W. of cor.

71.50 Road, brs. N. 30° W. and S. 30° E.

80.00 Set an iron post for the cor. of secs. 21, 22, 27 and 28,  
with brass cap stamped

T 9 N S 22 in NE. quadrant  
R 20 W S 27 in SE. quadrant  
S 28 in SW. quadrant  
S 21 in NW. quadrant

1911 in S.

2 notches on S. and 3 notches on E. edges,

from which

A mesquite 10 ins. dia. brs. S. 74° E., 153 lks. dist.  
Mkd. T 9 N R 20 W S 27 B T.

Dig pits 18x18x12 ins. in each sec. 5½ ft. dist., and  
raise a mound of earth 4 ft. base, 2 ft. high, W. of  
cor.

Land, nearly level bottom, - agricultural and grazing.  
Soil, sandy, 2nd rate.  
Scattering brush of mesquite, sage and greasewood.

From the cor. of secs. 21, 22, 27 and 28, I run  
N. 89° 56' E. on a random line bet. secs. 22 and 27,  
setting temp. cors. at intervals of 20.00 chs.

80.08 Intersect the cor. of secs. 22, 23, 26 and 27.

Thence I run

S. 89° 56' W. on a true line bet. secs. 22 and 27.

Over nearly level land, through scattering brush.

11.45 Old irrigation ditch, brs. N. 35° E. and S. 35° W.

12.00 Road in dry slough, brs. N. 35° E. and S. 45° W.

14.70 Parker-Blythe telephone line, brs. N. 20° E. and S. 20° W.

20.02 Set an iron post for 1/16 sec. cor. No. 1, bet. secs. 22  
and 27 (E. ¼) with brass cap stamped

1/16 S 22 in N. half  
S 27 No 1 1911 in S. half

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

25.75 Road, brs. N. 45° E. and S. 45° W.

28.90 Road, brs. N. 40° E. and S. 40° W.

37.70 Road, brs. N. and S.

40.04 Set an iron post for ¼ sec. cor. bet. secs. 22 and 27,  
with brass cap stamped

¼ S 22 in N. half  
S 27 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

42.70 Road, brs. N. 30° E. and S. 30° W.

60.06 Set an iron post for 1/16 sec. cor. No. 2, bet. secs. 22  
and 27 (W.½), with brass cap stamped

1/16 S 22 in N. half  
S 27 No 2 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

80.08 The cor. of secs. 21, 22, 27 and 28.

Land, nearly level, - agricultural and grazing.  
Soil, sandy, 1st rate.  
Scattering brush of mesquite, sage, and arrow weed.

-----  
From the 1/16 sec. cor. No. 12, bet. secs. 27 and 28 (S½)

I run

N. 89° 56' E. on a random line through the S. half of  
sec. 27, setting temp. cors. at intervals of 20 chs.

80.08 Falls 9 lks. N. of the 1/16 sec. cor. No. 12, bet. secs.  
26 and 27 (S.½).

Thence I run

West on a true line through the middle of the S. half of  
sec. 27.

Over nearly level land, through scattering brush.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

- 20.02 Set an iron post for 1/16 sec. cor. No. 11, in the center of the SE $\frac{1}{4}$  of sec. 27, with brass cap stamped
- 1/16 S 27 in N. half  
No 11 1911 in S. half
- Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.
- 32.50 Old irrigation ditch, brs. N. 20° E. and S. 20° W.
- 40.04 Set an iron post for 1/16 sec. cor. No. 10, bet. the SE. and SW. quarters of sec. 27, with brass cap stamped
- 1/16 S 27 in N. half  
No 10 1911 in S. half, from which
- A mesquite 14 ins. dia. brs. N. 77 $\frac{1}{2}$ ° E., 44 lks. dist.  
Mkd. 1/16 S 27 B T.
- Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.
- 42.00 Road, brs. N. 5° W. and S. 5° E.
- 46.50 Road, brs. N. 15° W. and S. 15° E.
- 50.60 Parker-Blythe telephone line, brs. N. 40° E. and S. 40° W.
- 60.06 Set an iron post for 1/16 sec. cor. No. 9, in the center of the SW $\frac{1}{4}$  of sec. 27, with brass cap stamped
- 1/16 S 27 in N. half  
No 9 1911 in S. half
- Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.
- 61.65 Road, brs. N. 10° W. and S. 10° E.
- 64.00 Road, in dry slough, brs. N. 65° E. and S. 65° W.
- 80.06 The 1/16 sec. cor. No. 12, bet. secs. 27 and 28 (S. $\frac{1}{4}$ ).
- Land, nearly level, - grazing.  
Soil, sandy, 2nd rate.  
Scattering brush of mesquite, quail, and sage.
- 
- From the  $\frac{1}{4}$  sec. cor. bet. secs. 27 and 28, I run N. 89° 56' E. on a random line through the middle of sec. 27, setting temp. cors. at intervals of 20.00 chs.



Subdivision of frac. T. 9 N., R. 20 W.

Chains

80.08 Falls 9 lks. N. of the  $\frac{1}{4}$  sec. cor. bet. secs. 26 and 27.

Thence I run

West on a true line through the middle of sec. 27.

Over nearly level land, through scattering brush.

20.02 Set an iron post for  $\frac{1}{16}$  sec. cor. No. 7, bet. the NE. and SE. quarters of sec. 27, with brass cap stamped

$\frac{1}{16}$  S 27 in N. half  
No 7 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.

27.00 Old irrigation ditch, brs. N. 20° E. and S. 20° W.

35.40 Parker-Blythe telephone line, brs. N. 40° E. and S. 40° W.

40.04 Set an iron post for the center  $\frac{1}{4}$  sec. cor. of sec. 27, with brass cap stamped C  $\frac{1}{4}$  S 27 1911.

Dig pits 18x18x12 ins. E., W., and S., 3 ft., and N. of cor. 7 ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, N. of post.

A mesquite 14 ins. dia. brs. S. 29 $\frac{1}{4}$ ° E., 84 lks. dist.  
Mkd. C  $\frac{1}{4}$  S 27 B T.

43.10 Road, brs. N. and S.

53.10 Road, brs. N. 60° E. and S. 10° E.

54.75 Road, brs. N. 60° E. and S. 60° W.

60.06 Set an iron post for  $\frac{1}{16}$  sec. cor. No. 8, bet. the NW. and SW. quarters of sec. 27, with brass cap stamped

$\frac{1}{16}$  S 27 in N. half  
No 8 1911 in S. half, from which

A mesquite 20 ins. dia. brs. N. 83° W., 160 lks. dist.  
Mkd.  $\frac{1}{16}$  S 27 B T.

A mesquite 14 ins. dia. brs. S. 29 $\frac{1}{4}$ ° E., 84 lks. dist.  
Mkd.  $\frac{1}{16}$  S 27 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.

64.35 Road, brs. N. 25° W. and S. 25° E.

68.60 Road, brs. N. 25° W. and S. 25° E.

Dry slough, brs. N. 25° W. and S. 25° E.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

80.08 The  $\frac{1}{4}$  sec. cor. bet. secs. 27 and 28.

Land, rolling sand dunes, - grazing.  
Soil, sandy, 2nd rate.  
Scattering brush of mesquite, quail, sage and arrow weed.

-----

From the  $\frac{1}{16}$  sec. cor. No. 6, bet. secs. 27 and 28 (N.  $\frac{1}{2}$ )

I run

N.  $89^{\circ} 56'$  E. on a random line through the middle of the  
N. half of sec. 27, setting temp. cors. at intervals of  
20.00 chs.

80.08 Falls 3 lks. N. of the  $\frac{1}{16}$  sec. cor. No. 6, bet. secs.  
26 and 27 (N.  $\frac{1}{2}$ ).

Thence I run

S.  $89^{\circ} 57'$  W. on a true line through the middle of the  
N. half of sec. 27.

Over nearly level land, through scattering brush.

20.02 Set an iron post for  $\frac{1}{16}$  sec. cor. No. 5, in the center  
of the NE  $\frac{1}{4}$  of sec. 27, with brass cap stamped

$\frac{1}{16}$  S 27 in N. half  
No 5 1911 in S. half

Dig pits  $18 \times 18 \times 12$  ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.

21.30 Old irrigation ditch, brs. N.  $40^{\circ}$  E. and S.  $40^{\circ}$  W.

21.75 Parker-Blythe telephone line, brs. N.  $18^{\circ}$  E. and S.  $18^{\circ}$  W.

40.04 Set an iron post for  $\frac{1}{16}$  sec. cor. No. 4, bet. the NE.  
and NW. quarters of sec. 27, with brass cap stamped

$\frac{1}{16}$  S 27 in N. half  
No 4 1911 in S. half

Dig pits  $18 \times 18 \times 12$  ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.

40.60 Road, brs. N.  $20^{\circ}$  E., S.  $15^{\circ}$  W., and S.  $30^{\circ}$  W.

60.06 Set an iron post for  $\frac{1}{16}$  sec. cor. No. 3, in the center  
of the NW  $\frac{1}{4}$  of sec. 27, with brass cap stamped

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

1/16 S 27 in N. half  
No 3 1911 in S. half, from which

A mesquite 12 ins. dia. brs. S.  $56\frac{1}{2}^{\circ}$  W., 170 lks. dist.  
Mkd. 1/16 S 27 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.

75.20 Road, brs. N. and S.

80.08 The 1/16 sec. cor. No. 6, bet. secs. 27 and 28 (N.  $\frac{1}{2}$ ).

Land, rolling sand dunes, - grazing.  
Soil, sandy, 2nd rate.  
Scattering mesquite, arrow weed and quail brush.

Dec. 13, 1911. At 9 a.m., l.m.t., I set off  $34^{\circ} 06'$  on  
the lat. arc,  $23^{\circ} 04\frac{1}{2}'$  S. on the decl. arc, and deter-  
mine a meridian with the solar, at the cor. of secs.  
21, 22, 27 and 28.

Thence I run

N.  $0^{\circ} 02'$  W. bet. secs. 21 and 22.

Over nearly level land, through scattering brush.

7.70 Small drain, course S.  $60^{\circ}$  W.

16.10 Road, brs. N.  $75^{\circ}$  E. and S.  $75^{\circ}$  W.

20.00 Set an iron post for 1/16 sec. cor. No. 12, bet. secs.  
21 and 22 (S.  $\frac{1}{2}$ ) with brass cap stamped

1/16 S 21 in W. half  
S 22 in E. half  
No 12 1911 in S., from which

A mesquite 6 ins. dia. brs. S.  $48^{\circ} 30'$  E., 83 lks. dist.  
Mkd. 1/16 S 22 B T.

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
W. of cor.

22.00 Road, brs. N.  $40^{\circ}$  E. and S.  $40^{\circ}$  W.

27.90 Small wash, course S.  $50^{\circ}$  W.

30.55 Small wash, course S.  $50^{\circ}$  W.

34.70 Road, brs. S.  $80^{\circ}$  W. and N.  $80^{\circ}$  E.

40.00 Set an iron post for the  $\frac{1}{2}$  sec. cor. bet. secs. 21 and

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

22, with brass cap stamped

$\frac{1}{4}$  S 21 in W. half  
 S 22 in E. half  
 1911 in S., from which

A willow 7 ins. dia. brs. N.  $2^{\circ}$  W., 117 lks. dist.  
Mkd.  $\frac{1}{4}$  S 21 B T.

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
W. of cor.

41.40 Small wash, course E.

44.10 Road, brs. E. and W.

46.10 Road, brs. E. and W.

48.25 Wire fence, brs. E. and W.

54.00 Enter slough, brs. E. and W.

55.25 Leave slough, brs. E. and W.

57.40 Fence, brs. N.  $50^{\circ}$  E. and S.  $50^{\circ}$  W.

57.50 Road, brs. N.  $50^{\circ}$  E. and S.  $50^{\circ}$  W.

60.00 Set an iron post for  $1/16$  sec. cor. No. 6, bet. secs. 21

and 22 (N.  $\frac{1}{2}$ ) with brass cap stamped

$1/16$  S 21 in W. half  
 S 22 in E. half  
 No 6 1911 in S., from which

A willow 10 ins. dia. brs. N.  $57^{\circ}40'$  W., 84 lks. dist.  
Mkd.  $1/16$  S 21 B T.

A willow 8 ins. dia. brs. N.  $14^{\circ}50'$  E., 58 lks. dist.  
Mkd.  $1/16$  S 22 B T.

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
W. of cor.

73.65 Road, brs. N.  $45^{\circ}$  E. and S.  $45^{\circ}$  W.

80.00 Set an iron post for the cor. of secs. 15, 16, 21 and 22,

with brass cap stamped

T 9 N S 15 in NE. quadrant  
 R 20 W S 22 in SE. quadrant  
           S 21 in SW. quadrant  
           S 16 in NW. quadrant  
 1911 in S.

3 notches on S. and 3 notches on E. edge,

from which

A willow 10 ins. dia. brs. N.  $49^{\circ}05'$  E., 29 lks. dist.  
Mkd. T 9 N R 20 W S 15 B T.

A willow 8 ins. dia. brs. S.  $58^{\circ}15'$  E., 74 lks. dist.  
Mkd. T 9 N R 20 W S 22 B T.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

Dig pits 18x18x12 ins. in each sec.  $5\frac{1}{2}$  ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor.

Land, nearly level, - agricultural.  
Soil, adobe, 1st rate.  
Scattering brush of mesquite, willow and arrow weed.

-----

From the cor. of secs. 15, 16, 21 and 22, I run N.  $89^{\circ} 56'$  E. on a random line bet. secs. 15 and 22, setting temp. cors. at intervals of 20.00 chs.

80.08 Falls 3 lks. N. of the cor. of secs. 14, 15, 22 and 23.

Thence I run

S.  $89^{\circ} 57'$  W. on a true line bet. secs. 15 and 22.

Over nearly level land, through scattering brush.

6.50 Road, brs. N.  $60^{\circ}$  E. and S.  $60^{\circ}$  W.

14.70 Road, brs. N.  $15^{\circ}$  E. and S.  $15^{\circ}$  W.

16.00 Indian cabin, brs. N., 50 lks. dist.

16.80 Indian cabin, brs. S., 50 lks. dist.

17.60 Dry slough, 1 ch. wide, brs. N.  $40^{\circ}$  E. and S.  $40^{\circ}$  W.

20.02 Set an iron post for  $1/16$  sec. cor. No. 1, bet. secs. 15 and 22, ( $N. \frac{1}{2}$ ) with brass cap stamped

$1/16$  S 15 in N. half  
S 22 No 1 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.

24.50 Fence, brs. N.  $70^{\circ}$  W. and S.  $70^{\circ}$  E.

26.00 Fence, brs. N.  $60^{\circ}$  E. and S.  $60^{\circ}$  W.

27.40 Road, brs. N.  $75^{\circ}$  E. and S.  $75^{\circ}$  W.

29.30 Fence, brs. N.  $75^{\circ}$  E. and S.  $75^{\circ}$  W.

29.80 Enter field, brs. N. and S.

31.00 Fence, brs. N.  $15^{\circ}$  E. and S.  $15^{\circ}$  W.

Leave field, enter thick arrow weed, brs. N. and S.

36.50 Road, brs. N.  $30^{\circ}$  E. and S.  $30^{\circ}$  W.

40.04 Set an iron post for  $\frac{1}{4}$  sec. cor. bet. secs. 15 and 22, with brass cap stamped

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

$\frac{1}{4}$  S 15 in N. half  
 S 22 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
 and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
 N. of cor.

60.06 Set an iron post for 1/16 sec. cor. No. 2, bet. secs. 15  
 and 22 (W. $\frac{1}{2}$ ) with brass cap stamped

$\frac{1}{16}$  S 15 in N. half  
 S 22 No 2 1911 in S. half

from which

A cottonwood 10 ins. dia. brs. N. 6° E., 176 lks. dist.  
 Mkd.  $\frac{1}{16}$  S 15 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
 and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
 N. of cor.

80.08 The cor. of secs. 15, 16, 21 and 22.

Land, nearly level bottom, - agricultural; 1.20 chs.  
 under cultivation.  
 Soil, adobe, 1st rate.  
 Brush of arrow weed, mesquite and willow.

From the 1/16 sec. cor. No. 12, bet. secs. 21 and 22 (S. $\frac{1}{2}$ )

I run

N. 89° 56' E. on a random line through the middle of the  
 S. half of sec. 22, setting temp. cors. at intervals of  
 20.00 chs.

80.08 Falls 3 lks. N. of the 1/16 sec. cor. No. 12, bet. secs.  
 22 and 23 (S. $\frac{1}{2}$ ).

Thence I run

S. 89° 57' W. on a true line through the middle of the  
 S. half of sec. 22.

Over nearly level land, through scattering brush.

.55 Old irrigation ditch, brs. N. 30° E. and S. 30° W.

3.05 Road, brs. N. 5° E. and S. 5° W.

7.50 Parker-Blythe telephone line, brs. N. 20° E. and S. 20° W.

7.80 Road, brs. N. 40° E., and S. 40° W.

20.02 Set an iron post for 1/16 sec. cor. No. 11, in the center

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

of the SE $\frac{1}{4}$  of sec. 22, with brass cap stamped

1/16 S 22 in N. half  
No 11 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high,  
N. of cor.

21.80 Road, brs. N. 50° E. and S. 20° W.

32.75 Road, brs. N. 30° E. and S. 30° W.

40.04 Set an iron post for 1/16 sec. cor. No. 10, bet. the SE  
and SW. quarters of sec. 22, with brass cap stamped

1/16 S 22 in N. half  
No 10 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high,  
N. of cor.

60.06 Set an iron post for 1/16 sec. cor. No. 9, in the center  
of the SW $\frac{1}{4}$  of sec. 22, with brass cap stamped

1/16 S 22 in N. half  
No 9 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high,  
N. of cor.

72.10 Road, brs. N. 70° E. and S. 70° W.

80.08 The 1/16 sec. cor. No. 12, bet. secs. 21 and 22 (S. $\frac{1}{4}$ ).

Land, nearly level bottom, - agricultural and grazing.  
Soil, adobe and sandy, 1st rate.  
Scattering mesquite, arrow weed and quail brush.

-----  
From the  $\frac{1}{4}$  sec. cor. bet. secs. 21 and 22, I run  
N. 89° 56' E. on a random line through the middle of sec.  
22, setting temp. cors. at intervals of 20.00 chs.

80.08 Falls 5 lks. N. of the  $\frac{1}{4}$  sec. cor. bet. secs. 22 and 23.

Thence I run

S. 89° 58' W. on a true line through the middle of sec.  
22.

Over nearly level land, through scattering brush.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

- 0.50 Parker-Blythe telephone line, brs. N. 15° E. and S. 15° W.
- 10.60 Road, brs. N. 35° E. and S. 35° W.
- 15.50 Indian cabin, brs. N., 50 lks. dist.
- 19.15 Roads, bear S. 70° W., S. 50° W., and N. 50° E.
- 20.02 Set an iron post for 1/16 sec. cor. No. 7, bet. the NE. and SE. quarters of sec. 22, with brass cap stamped
- 1/16 S 22 in N. half  
No 7 1911 in S. half
- Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3½ ft. base, 1½ ft. high, N. of cor.
- 24.50 Road, brs. N. 45° E. and S. 45° W.
- 25.95 Road, brs. N. and S.
- 27.25 Road, brs. N. 10° W. and S. 10° E.
- 40.04 Set an iron post for the center ¼ sec. cor. of sec. 22, with brass cap stamped C ¼ S 22 1911.
- Dig pits 18x18x12 ins. E., W., and S., 3 ft., and N. of cor. 7 ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, N. of post.
- 54.50 Road, brs. N. 45° E. and S. 45° W.
- 60.06 Set an iron post for 1/16 sec. cor. No. 8, bet. the NW. and SW. quarters of sec. 22, with brass cap stamped
- 1/16 S 22 in N. half  
No 8 1911 in S. half
- Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3½ ft. base, 1½ ft. high, N. of cor.
- 70.65 Road, brs. N. 60° W. and S. 60° E.
- 75.40 Road, brs. N. 30° E. and S. 30° W.
- 80.08 The ¼ sec. cor. bet. secs. 21 and 22.

Land, nearly level bottom, - agricultural and grazing.  
Soil, adobe and sandy, 1st rate.  
Scattering brush of mesquite, quail and arrow weed.

-----

Dec. 13, 1911. At the 1/16 sec. cor. No. 6, bet. secs. 21 and 22 (N. ¼) I set off 23° 06' S. on the decl. arc,



## Subdivision of frag. T. 9 N., R. 20 W.

## Chains

and at 11h 53m 53s a.m., l.m.t., observe the sun on the meridian; the resulting lat. is  $34^{\circ} 06\frac{1}{2}'$ , the proper lat.

Thence I run

N.  $89^{\circ} 56'$  E. on a random line through the middle of the N. half of sec. 22, setting temp. cors. at intervals of 20.00 chs.

80.08 Intersect the  $1/16$  sec. cor. No. 6, bet. secs. 22 and 23 (N.  $\frac{1}{2}$ )

Thence I run

S.  $89^{\circ} 56'$  W. on a true line through the middle of the N. half of sec. 22.

Over nearly level land, through scattering brush.

3.80 Road, brs. N.  $60^{\circ}$  E. and S.  $60^{\circ}$  W.

5.20 Road, brs. N.  $10^{\circ}$  E. and S.  $10^{\circ}$  W.

14.55 Road, brs. N.  $65^{\circ}$  W. and S.  $65^{\circ}$  E.

20.02 Set an iron post for the  $1/16$  sec. cor. No. 5, in the center of the NE  $\frac{1}{4}$  of sec. 22, with brass cap stamped

$1/16$  S 22 in N. half  
No 5 1911 in S. half

Dig pits  $18 \times 18 \times 12$  ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.

24.50 Road, brs. N. and S.

31.00 Road, brs. N. and S.

32.10 Road, brs. N.  $45^{\circ}$  E. and S.  $45^{\circ}$  W.

33.35 Wire fence, brs. N.  $45^{\circ}$  E. and S.  $45^{\circ}$  W.

Leave brush, enter cultivated field.

40.04 Set an iron post for  $1/16$  sec. cor. No. 4, bet. the NE. and NW. quarters of sec. 22, with brass cap stamped

$1/16$  S 22 in N. half  
No 4 1911 in S. half

Dig pits  $18 \times 18 \times 12$  ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

- 44.25 Fence, brs. N. 45° E. and S. 45° W.  
Leave field.
- 44.50 Road, brs. N. 45° E. and S. 45° W.
- 44.85 Fence, brs. N. 45° E. and S. 45° W.  
Enter cultivated field.
- 50.10 Wire fence, brs. N. 45° W. and S. 45° E. Leave field.
- 50.45 Road, brs. N. 45° W. and S. 45° E.
- 50.65 Wire fence, brs. S. 45° E. and N. 45° W. Enter field.
- 53.65 Wire fence cor. Fences bear N. 88° E., S. 45° W., and  
S. 18° E. Leave field.
- 60.06 Set an iron post for 1/16 sec. cor. No. 3, in the center  
of the NW.  $\frac{1}{4}$  of sec. 22, with brass cap stamped  
1/16 S 22 in N. half  
No 3 1911 in S. half  
Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3  $\frac{1}{2}$  ft. base, 1  $\frac{1}{2}$  ft. high,  
N. of cor.
- 60.80 Road, brs. N. 70° E. and S. 85° W.
- 69.60 Road, brs. N. 70° W. and S. 85° E.
- 75.60 Road, brs. N. 60° E. and S. 60° W.
- 80.08 The 1/16 sec. cor. No. 6, bet. secs. 21 and 22 (N.  $\frac{1}{4}$ ).  
Land, nearly level bottom, - agricultural.  
Soil, adobe, 1st rate.  
Scattering mesquite, arrow weed and sage and quail brush.
- 
- From the cor. of secs. 15, 16, 21 and 22, I run  
N. 0° 02' W. bet. secs. 15 and 16.  
Over nearly level bottom land, through scattering brush.
- 14.10 Small draw, drains S. 80° W.
- 14.75 Left bank of Colorado River, course W.  
Set an iron post for M.C. of frac. secs. 15 and 16,  
with brass cap stamped  
M C in N. half  
T 9 N S 16 in SW. quadrant  
R 20 W S 15 in SE. quadrant  
1911 in S.  
3 notches on E. edge, from which

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

A willow 8 ins. dia. brs. East, 252 lks. dist.  
Mkd. T 9 N R 20 W S 15 M C B T.

Dig a pit 36x36x12 ins. 8 ft. S. of cor., and raise a mound of earth 4 ft. base, 2 ft. high, S. of post.

Land, nearly level bottom, - agricultural.  
Soil, adobe, 1st rate.  
Scattering brush of mesquite and arrow weed.

---

From the cor. of secs. 10, 11, 14 and 15, I run S. 89° 57' W. on a true line bet. secs. 10 and 15. Over low bottom land, through scattering brush.

3.90 Left bank of Colorado River, course S. 30° W.

Set an iron post for M.C. of frac. secs. 10 and 15, with brass cap stamped

M C in W. half  
T 9 N S 10 in NE. quadrant  
R 20 W S 15 in SE. quadrant  
1911 in S.  
4 notches on S. edge

Dig a pit 36x36x12 ins. 8 ft. E. of cor., and raise a mound of earth 4 ft. base, 2 ft. high, E. of cor.

Land, low bottom, - agricultural.  
Soil, adobe, 1st rate.  
Scattering brush of mesquite and arrow weed.

---

From 1/16 sec. cor. No. 12, bet. secs. 14 and 15 (S. 1/2)

I run

S. 89° 57' W. on a true line through the middle of the S. half of sec. 15.

Over low bottom land, through scattering brush.

0.90 Road, brs. N. 15° E. and S. 15° W.

1.50 Road, brs. N. 15° W. and S. 15° E.

7.00 Road, brs. N. 10° E. and S. 10° E.

9.00 Road, brs. N. and S.

15.60 Wire fence, brs. N. 5° E. and S. 5° W.

17.50 Enter cultivated field, brs. N. and S.

20.00 Set an iron post for 1/16 sec. cor. No. 11, in the

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

center of the SE $\frac{1}{4}$  of sec. 15, with brass cap stamped

1/16 S 15 in N. half  
No 11 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high,  
N. of cor.

22.40 Wire fence, brs. N. 5° E. and S. 5° W.

Leave cultivated field.

24.95 Road, brs. N. 10° E. and S. 10° W.

40.00 Set an iron post for 1/16 sec. cor. No. 10, bet. the SE.  
and SW. quarters of sec. 15, with brass cap stamped

1/16 S 15 in N. half  
No 10 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high,  
N. of cor.

52.90 Left bank of Colorado River, course S. 70° W.

Set an iron post for 1/16 M.C. of frac. sec. 15, with  
brass cap stamped

1/16 S 15 in E. half  
M C in W. half  
1911 in S.

Dig a pit 36x36x12 ins. 8 ft. E. of cor., and raise a  
mound of earth 4 ft. base, 2 ft. high, E. of post.

Land, low bottom, nearly level, - agricultural; 4.90  
chs. under cultivation.

Soil, adobe, 1st rate.

Scattering brush of mesquite and arrow weed, 48.00 chs.

From the  $\frac{1}{4}$  sec. cor. bet. secs. 14 and 15, I run  
S. 89° 57' W. on a true line through the middle of sec.  
15.

Over low bottom land, through scattering brush.

1.35 Wire fence, brs. N. 5° E. and S. 5° W.

3.55 Road, brs. N. and S.

4.25 Wire fence, brs. N. 5° E. and S. 5° W.

20.00 Set an iron post for 1/16 sec. cor. No. 7, bet. the NE.

## Subdivision of frac T. 9 N., R. 20 W.

Chains

and SE. quarters of sec. 15, with brass cap stamped

1/16 S 15 in N. half  
No 7 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

27.00 Left bank of Colorado River, course S. 50° W.

Set an iron post for 1/16 M.C. of frac. sec. 15, with  
brass cap stamped

M C in W. half  
1/16 S 15 in E. half  
1911 in S.

Dig a pit 36x36x12 ins. 8 ft. E. of cor., and raise a  
mound of earth 4 ft. base, 2 ft. high, E. of post.

Land, nearly level bottom, - agricultural.  
Soil, adobe, 1st rate.  
Scattering brush of mesquite and arrow weed.

-----  
From 1/16 sec. cor. No. 6, bet. secs. 14 and 15 (N.½)

I run

S. 89° 57' W. on a true line through the middle of the  
N. half of sec. 15.

Over low bottom land, through scattering brush.

15.00 Left bank of Colorado River, course S. 60° W.

Set an iron post for 1/16 M.C. of frac. sec. 15, with  
brass cap stamped

M C in W. half  
1/16 S 15 in E. half  
1911 in S.

Dig a pit 36x36x12 ins. 8 ft. E. of cor., and raise a  
mound of earth 4 ft. base, 2 ft. high, E. of post.

Land, low bottom, - agricultural.  
Soil, adobe, 1st rate.  
Scattering brush of mesquite and arrow weed.

-----  
From the 1/16 sec. cor. No. 2, bet. secs. 15 and 22 (W.½)

I run

N. 0° 02' W. on a true line through the SW¼ of sec. 15.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

Over nearly level bottom land, through scattering brush.

17.25 Left bank of Colorado River, course S. 85° W.

Set an iron post for 1/16 M.C. of frac. sec. 15, with  
brass cap stamped

M C in N. half  
1/16 S 15 1911 in S. half

Dig a pit 36x36x12 ins. 8 ft. S. of cor., and raise a  
mound of earth 4 ft. base, 2 ft. high, S. of post.

Land, nearly level bottom.  
Soil, adobe, 1st rate.  
Scattering mesquite and arrow weed.

Dec. 14, 1911. At 9 a.m., l.m.t., I set off 34° 04½' on  
the lat. arc, 23° 08½' S. on the decl. arc, and deter-  
mine a meridian with the solar at the S.C. of secs. 32  
and 33, on 2nd Standard Parallel N.

Thence I run

N. 0° 02' W. bet. secs. 32 and 33.

Over gently rolling bottom land, through scattering brush.

20.00 Set an iron post for 1/16 sec. cor. No. 12, bet. secs. 32  
and 33 (S.½) with brass cap stamped

1/16 S 32 in W. half  
S 33 in E. half  
No 12 1911 in S., from which

A mesquite 8 ins. dia. brs. N. 82° 20' W., 14 lks. dist.  
Mkd. 1/16 S 32 B T.

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
W. of cor.

40.00 Set an iron post for ¼ sec. cor. bet. secs. 32 and 33,  
with brass cap stamped

¼ S 32 in W. half  
S 33 in E. half  
1911 in S., from which

A mesquite 6 ins. dia. brs. S. 3° 20' E., 111 lks. dist.  
Mkd. ¼ S 33 B T.

Dig pits 18x18x12 ins. N. and S. of cor., 3 ft., and  
raise a mound of earth 3½ ft. base, 1½ ft. high, W. of  
cor.

Subdivision of frac. T. 9 N., R. 20 W.

Chains

40.40 Road, brs. N. 45° E. and S. 45° W.

43.40 Road, brs. E. and W.

48.45 Road, brs. N. 60° W. and S. 60° E.

58.60 Small draw, drains S. 60° W.

60.00 Set an iron post for 1/16 sec. cor. No. 6, bet. secs. 32 and 33 (N. 1/2) with brass cap stamped

1/16 S 32 in W. half  
S 33 in E. half  
No 6 1911 in S.

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

73.95 Road, brs. N. 25° E. and S. 25° W.

80.00 Set an iron post for the cor. of secs. 28, 29, 32 and 33, with brass cap stamped

T 9 N S 28 in NE. quadrant  
R 20 W S 33 in SE. quadrant  
S 32 in SW. quadrant  
S 29 in NW. quadrant  
1911 in S.

1 notch on S. and 4 notches on E. edges,

from which

A mesquite 6 ins. dia. brs. S. 64° 45' W., 66 lks. dist.

Mkd. T 9 N R 20 W S 32 B T.

A mesquite 8 ins. dia. brs. N. 71° 15' W., 130 lks. dist.

Mkd. T 9 N R 20 W S 29 B T.

Dig pits 18x18x12 ins. in each sec. 5 1/2 ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor.

Land, rolling bottom, - agricultural.

Soil, sandy and adobe, 2nd rate.

Timber, scattering mesquite.

Brush, greasewood and sage.

-----  
From the cor. of secs. 28, 29, 32 and 33, I run

East on a random line bet. secs. 28 and 33, setting temp.

cors. at intervals of 20.00 chs.

80.00 Falls 5 lks. S. of the cor. of secs. 27, 28, 33 and 34.

Thence I run

S. 89° 58' W. on a true line bet. secs. 28 and 33.

Over nearly level bottom land, through scattering brush.

18.10 Small drain, course S. 70° W.

20.00 Set an iron post for 1/16 sec. cor. No. 1, bet. secs. 28

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

and 33, with brass cap stamped

1/16 S 28 in N. half  
S 33 No 1 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

26.35 Small drain, course S.

38.45 Small drain, course S.

40.00 Set an iron post for the ¼ sec. cor. bet. secs. 28 and  
33, with brass cap stamped

¼ S 28 in N. half  
S 33 1911 in S. half, from which

A willow 8 ins. dia brs. S. 14° 45' W., 110 lks. dist.  
Mkd. ¼ S 33 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

55.65 Small drain, course S.

60.00 Set an iron post for the 1/16 sec. cor. No. 2, bet. secs.  
28 and 33 (W. ¼) with brass cap stamped

1/16 S 28 in N. half  
S 33 No 2 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

64.25 Small drain, course N. 5° W.

78.25 Small drain, course N.

78.85 Road, brs. N. 10° E. and S. 10° W.

80.00 The cor. of secs. 28, 29, 32 and 33.

Land, nearly level bottom, - agricultural.  
Soil, adobe, 1st rate.  
Timber, scattering mesquite.

-----  
From the 1/16 sec. cor. No. 12, bet. secs. 32 and 33 (S ¼)

I run

East on a random line through the middle of the S. half  
of sec. 33, setting temp. cors. at intervals of 20 chs.



## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

- 80.04 Falls 5 lks. S. of the 1/16 sec. cor. No. 12, bet. secs. 33 and 34 (S.  $\frac{1}{2}$ ).
- Thence I run  
S. 89° 58' W. on a true line through the middle of the S. half of sec. 33.
- Over gently rolling bottom land, through scattering brush.
- 6.55 Small drain, course S. 60° E.
- 18.05 Road, brs. N. and S.
- 20.01 Set an iron post for 1/16 sec. cor. No. 11, in the center of the SE  $\frac{1}{4}$  of sec. 33, with brass cap stamped
- 1/16 S 33 in N. half  
No 11 1911 in S. half, from which
- A mesquite 10 ins. dia. brs. N. 83° 00' E., 42 lks. dist.  
Mkd. 1/16 S 33 B T.
- Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3  $\frac{1}{2}$  ft. base, 1  $\frac{1}{2}$  ft. high, N. of cor.
- 22.00 Small drain, course S.
- 22.95 Road, brs. N. and S.
- 28.55 Road, brs. N. and S.
- 29.50 Small drain, course S.
- 35.25 Parker-Blythe telephone line, brs. N. 40° E. and S. 40° W.
- 40.02 Set an iron post for 1/16 sec. cor. No. 10, bet. the .SE. and SW. quarters of sec. 33, with brass cap stamped
- 1/16 S 33 in N. half  
No 10 1911 in S. half, from which
- A mesquite 24 ins. dia. brs. S. 76° 30' W., 68 lks. dist.  
Mkd. 1/16 S 33 B T.
- Dig pita 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3  $\frac{1}{2}$  ft. base, 1  $\frac{1}{2}$  ft. high, N. of cor.
- 47.90 Small drain, course S.
- 52.50 Road, brs. N. 5° W. and S. 5° E.
- 60.03 Set an iron post for 1/16 sec. cor. No. 9, in center of the SW  $\frac{1}{4}$  of sec. 33, with brass cap stamped
- 1/16 S 33 in N. half  
No 9 1911 in S. half

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

A mesquite 8 ins. dia. brs. N. 57° 10' W., 115 lks. dist.  
Mkd. 1/16 S 33 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

71.75 Small drain, course S.

74.25 Small drain, course S.

78.20 Small drain, course S. 20° E.

80.04 The 1/16 sec. cor. No. 12, bet. secs. 32 and 33 (S.½)

Land, gently rolling bottom, - grazing and agricultural.  
Soil, adobe and sandy, 2nd rate.  
Timber, scattering mesquite.

-----  
From the ¼ sec. cor. bet. secs. 32 and 33, I run

East on a random line through the middle of sec. 33,  
setting temp. cors. at intervals of 20.00 chs.

80.00 Falls 5 lks. S. of the ¼ sec. cor. bet. secs. 33 and 34.

Thence I run

S. 89° 58' W. on a true line through the middle of sec.  
33.

Over gently rolling bottom land, through scattering brush.

13.55 Small drain, course S. 10° W.

15.45 Parker-Blythe telephone line, brs. N. 50° E. and S. 50° W.

16.00 Road, brs. N. and S.

16.80 Road, brs. N. 50° E. and S. 50° W.

17.00 Road, brs. N. 35° E. and S. 35° W.

20.00 Set an iron post for 1/16 sec. cor. No. 7, bet. the NE.

and SE. quarters of sec. 33, with brass cap stamped

1/16 S 33 in N. half  
No 7 1911 in S. half, from which

A mesquite 14 ins. dia. brs. N. 37° 15' W., 134 lks. dist.  
Mkd. 1/16 S 33 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

29.80 Small drain, course S. 15° W.

Subdivision of frac. T. 9 N., R. 20 W.

Chains

40.00 Set an iron post for the center  $\frac{1}{4}$  sec. cor. of sec. 33, with brass cap stamped C  $\frac{1}{4}$  S 33 1911, from which  
 A mesquite 10 ins. dia. brs. North, 130 lks. dist.  
 Mkd. C  $\frac{1}{4}$  S 33 B T.  
 Dig pits 18x18x12 E., W., and S. 3 ft., and N. of cor. 7 ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, N. of cor.

50.80 Small drain, course S. 10° E.

60.00 Set an iron post for the 1/16 sec. cor. No. 8, bet. the NW. and SW. quarters of sec. 33, with brass cap stamped

1/16 S 33 in N. half  
 No 8 1911 in S. half, from which

A mesquite 10 ins. dia. brs. N. 8° 45' W., 112 lks. dist.  
 Mkd. 1/16 S 33 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3  $\frac{1}{2}$  ft. base, 1  $\frac{1}{2}$  ft. high, N. of cor.

73.25 Road, brs. N. 60° W. and S. 60° E.

80.00 The  $\frac{1}{4}$  sec. cor. bet. secs. 32 and 33.

Land, nearly level bottom, - agricultural.  
 Soil, adobe, 1st rate.  
 Timber, scattering mesquite.  
 Dense brush of arrow weed.

-----  
 From the 1/16 sec. cor. No. 6, bet. secs. 32 and 33 (N.  $\frac{1}{4}$ )

I run

East on a random line through the middle of the N. half of sec. 33, setting temp. cors. at intervals of 20.00 chs.

80.00 Falls 5 lks. S. of the 1/16 sec. cor. No. 6, bet. secs. 33 and 34 (N.  $\frac{1}{4}$ ).

Thence I run

S. 89° 58' W. on a true line through the middle of the N. half of sec. 33,

Over nearly level bottom land, through scattering brush.

1.00 Parker-Blythe telephone line, brs. N. 40° E. and S. 40° W.

7.95 Small drain, course S. 30° W.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

- 9.65 Road, brs. N. 10° E. and S. 10° W.
- 11.00 Small drain, course S.
- 12.55 Road, brs. N. 30° E. and S. 30° W.
- 20.00 Set an iron post for 1/16 sec. cor. 5, in the center of the NE $\frac{1}{4}$  of sec. 33, with brass cap stamped  
1/16 S 33 in N. half  
No 5 1911 in S. half, from which  
A mesquite 8 ins. dia. brs. N. 38° W., 145 lks. dist.  
Mkd. 1/16 S 33 B T.  
Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.
- 26.35 Small drain, course S.
- 34.40 Small drain, course S. 10° E.
- 40.00 Set an iron post for 1/16 sec. cor. No. 4, bet. the NE. and NW. quarters of sec. 35, with brass cap stamped  
1/16 S 33 in N. half  
No 4 1911 in S. half, from which  
A mesquite 6 ins. dia. brs. S. 39° E., 81 lks. dist.  
Mkd. 1/16 S 33 B T.  
Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.
- 60.00 Set an iron post for 1/16 sec. cor. No. 3, in the center of the NW $\frac{1}{4}$  of sec. 33, with brass cap stamped  
1/16 S 33 in N. half  
No 3 1911 in S. half, from which  
A willow 8 ins. dia. brs. S. 9° 20' W., 150 lks. dist.  
Mkd. 1/16 S 33 B T.  
Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.
- 60.15 Small wash, course S.
- 66.10 Small wash, course S. 20° E.
- 78.45 Small wash, course S. 45° W.
- 80.00 The 1/16 sec. cor. No. 6, bet. secs. 32 and 33. (N. $\frac{1}{2}$ ).  
Land, nearly level bottom, - agricultural.  
Soil, adobe, 1st rate.  
Timber, scattering mesquite.  
Dense brush of sage and arrow weed.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

Dec. 14, 1911. At the cor. of secs. 28, 29, 32 and 33,  
I set off  $23^{\circ} 10'$  S. on the decl. arc, and at 11h 54m  
21s a.m., l.m.t., observe the sun on the meridian; the  
resulting lat. is  $34^{\circ} 05'$ , the proper lat.

Thence I run

N.  $0^{\circ} 02'$  W. bet. secs. 28 and 29.

Over nearly level bottom land, through scattering brush.

19.35 Road, brs. N.  $60^{\circ}$  E. and S.  $60^{\circ}$  W.

20.00 Set an iron post for  $1/16$  sec. cor. No. 12, bet. secs.  
28 and 29, with brass cap stamped

$1/16$  S 29 in W. half  
S 28 in E. half  
No 12 1911 in S.

Dig pits  $18 \times 18 \times 12$  ins. N. and S. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
W. of cor.

27.90 Small drain, course S.  $30^{\circ}$  W.

40.00 Set an iron post for  $\frac{1}{4}$  sec. cor. bet. secs. 28 and 29,  
with brass cap stamped

$\frac{1}{4}$  S 29 in W. half  
S 28 in E. half  
1911 in S., from which

A mesquite 18 ins. dia. brs. N.  $10^{\circ} 45'$  E., 12 lks. dist.  
Mkd.  $\frac{1}{4}$  S 28 B T.

Dig pits  $18 \times 18 \times 12$  ins. N. and S. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
W. of cor.

40.90 Small drain, course S.  $20^{\circ}$  W.

44.60 Road, brs. N.  $40^{\circ}$  E. and S.  $40^{\circ}$  W.

60.00 Set an iron post for  $1/16$  sec. cor. No. 6, bet. secs. 28  
and 29 (N.  $\frac{1}{2}$ ) with brass cap stamped

$1/16$  S 29 in W. half  
S 28 in E. half  
No 6 1911 in S., from which

A mesquite 12 ins. dia. brs. S.  $35^{\circ} 30'$  W., 8 lks. dist.  
Mkd.  $1/16$  S 29 B T.

A mesquite 8 ins. dia. brs. S.  $12^{\circ}$  E., 13 lks. dist.  
Mkd.  $1/16$  S 28 B T.

Dig pits  $18 \times 18 \times 12$  ins. N. and S. of cor. 3 ft. dist.,

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
W. of cor.

67.45 Road, brs. E. and W.

80.00 Set an iron post for the cor. of secs. 20, 21, 28 and 29,  
with brass cap stamped

T 9 N S 21 in NE. quadrant

R 20 W S 28 in SE. quadrant

S 29 in SW. quadrant

S 20 in NW. quadrant

1911 in S.

2 notches on S. and 4 notches on E. edge.

from which

A willow 8 ins dia. brs. N.  $62^{\circ} 25'$  E., 168 lks. dist.  
Mkd. T 9 N R 20 W S 21 B T.

Dig pits  $18 \times 18 \times 12$  ins. in each sec.  $5\frac{1}{2}$  ft. dist., and  
raise a mound of earth 4 ft. base, 2 ft. high, W. of  
cor.

Land, nearly level bottom, - agricultural.

Soil, adobe, 1st rate.

Brush, scattering mesquite and willow; dense arrow weed.

-----  
From the cor. of secs. 20, 21, 28 and 29, I run

N.  $89^{\circ} 58'$  E. on a random line bet. secs. 21 and 28,

setting temp. cors. at intervals of 20.00 chs.

79.96 Falls 14 lks. N. of the cor. of secs. 21, 22, 27 and 28.

Thence I run

N.  $89^{\circ} 56'$  W. on a true line bet. secs. 21 and 28.

Over nearly level bottom land, through scattering brush.

1.90 Road, brs. N. and S.

4.65 Small draw, drains S.

11.50 Dry slough, 1 ch. wide, brs. N. and S.

13.95 Small drain, course S.  $15^{\circ}$  E.

15.80 Road, brs. N.  $20^{\circ}$  E. and S.  $20^{\circ}$  W.

18.00 Road, brs. N.  $7^{\circ}$  E. and S.  $7^{\circ}$  W.

19.99 Set an iron post for  $1/16$  sec. cor. No. 1, bet. secs. 21  
and 28, (E.  $\frac{1}{2}$ ) with brass cap stamped

$1/16$  S 21 in N. half

S 28 No 1 1911 in S. half

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

A mesquite 8 ins. dia. brs. S. 9° W., 207 lks. dist.  
Mkd. 1/16 S 28 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

23.55 Small drain, course S. 15° E.

36.00 Road, brs. N. 15° E. and S. 15° W.

39.98 Set an iron post for ¼ sec. cor. bet. secs. 21 and 28,  
with brass cap stamped

¼ S 21 in N. half  
S 28 1911 in S. half, from which

A mesquite 14 ins dia. brs. N. 69° W., 257 lks. dist.  
Mkd. ¼ S 21 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

43.75 Small draw, drains S.

59.97 Set an iron post for 1/16 sec. cor. No. 2, bet. secs. 21  
and 28 (W. ¼) with brass cap stamped

1/16 S 21 in N. half  
S 28 No 2 1911 in S. half,

from which

A mesquite 18 ins. dia. brs. S. 53° 30' W., 128 lks. dist.  
Mkd. 1/16 S 28 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

79.96 The cor. of secs. 20, 21 28 and 29.

Land, nearly level, - agricultural.  
Soil, adobe, 1st rate.  
Timber, scattering mesquite.  
Dense brush of arrow weed.

-----  
From 1/16 sec. cor. No. 12, bet. secs. 28 and 29 (S. ¼)

I run

N. 89° 58' E. on a random line through the middle of the  
S. half of sec. 28, setting temp. cors. at intervals of  
20 chs.

Subdivision of frac. T. 9 N., R. 20 W.

Chains

80.00 Falls 16 lks. N. of the 1/16 sec. cor. No. 12, bet. secs. 27 and 28 (S. 1/4).

Thence I run

N. 89° 55' W. on a true line through the middle of the S. of sec. 28.

Over nearly level bottom land, through scattering brush.

1.00 Small drain, course S. 10° W.

20.00 Set an iron post for 1/16 sec. cor. No. 11, in center of the SE 1/4 of sec. 28, with brass cap stamped

1/16 S 28 in N. half  
No 11 1911 in S. half, from which

A mesquite 10 ins. dia. brs. S. 35° 30' E., 77 lks. dist.  
Mkd. 1/16 S 28 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

40.00 Set an iron post for 1/16 sec. cor. No. 10, bet. the SE. and SW. quarters of sec. 28, with brass cap stamped

1/16 S 28 in N. half  
No 10 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

55.50 Drain, course S.

60.00 Set an iron post for 1/16 sec. cor. No. 9, in the center of the SW 1/4 of sec. 28, with brass cap stamped

1/16 S 28 in N. half  
No 9 1911 in S. half, from which

A mesquite 6 ins. dia. brs. S. 78° W., 61 lks. dist.  
Mkd. 1/16 S 28 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

69.50 Road, brs. N. 30° E. and S. 30° W.

72.00 Road, brs. N. 65° E. and S. 65° W.

80.00 The 1/16 sec. cor. No. 12, bet. secs. 28 and 29 (S. 1/4)



## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

Land, nearly level bottom, - agricultural.  
Soil, adobe, 1st rate.  
Timber, scattering mesquite.  
Brush, arrow weed.

-----

From the  $\frac{1}{4}$  sec. cor. bet. secs. 28 and 29, I run  
N. 89° 58' E. on a random line through the middle of sec.  
28, setting temp. cors. at intervals of 20.00 chs.

80.00 Falls 12 lks. N. of the  $\frac{1}{4}$  sec. cor. bet. secs. 27 and 28,  
Thence I run

N. 89° 57' W. on a true line through the middle of sec. 28.  
Over nearly level bottom land, through scattering brush.

20.00 Set an iron post for  $\frac{1}{16}$  sec. cor. No. 7, bet. the NE.  
and SW. quarters of sec. 28, with brass cap stamped

1/16 S 28 in N. half  
No 7 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.

22.20 Small drain, course S.

30.80 Small drain, course S.

40.00 Set an iron post for center  $\frac{1}{4}$  sec. cor. of sec. 28, with  
brass cap stamped C  $\frac{1}{4}$  S 28 1911, from which

A mesquite 8 ins. dia. brs. S. 53° 15' E., 167 lks. dist.  
Mkd. C  $\frac{1}{4}$  S 28 B T.

Dig pits 18x18x12 ins. E., W., and S., 3 ft., and N.  
of cor. 7 ft. dist., and raise a mound of earth 4 ft.  
base, 2 ft. high, N. of cor.

43.65 Dry slough, 130 lks. wide, brs. N. 5° W. and S. 5° E.

45.40 Drain, course S.

46.10 Drain, course S. 5° E.

47.20 Drain, course S. 45° W.

47.85 Road, brs. N. 45° E. and S. 45° W.

50.45 Drain, course N. 5° E.

51.95 Road, brs. N. and S. 5° W.

54.40 Drain, course S.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

57.50 Drain, course S.

60.00 Set an iron post for 1/16 sec. cor. No. 8, bet. the NW. and SW. quarters of sec. 28, with brass cap stamped

1/16 S 28 in N. half  
No 8 1911 in S. half, from which

A mesquite 8 ins. dia. brs. N. 82°15' W., 60 lks. dist.  
Mkd. 1/16 S 28 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

61.10 Drain, course S. 7° E.

74.50 Drain, course S.

80.00 The ¼ sec. cor. bet. secs. 28 and 29.

Land, nearly level bottom, agricultural.  
Soil, adobe, 1st rate.  
Brush of scattering mesquite.

-----  
From the 1/16 sec. cor. No. 6, bet. secs. 28 and 29 (N. ½)

I run

N. 89° 58' E. on a random line through the middle of the  
N. half of sec. 28, setting temp. cors. at intervals of  
20.00 chs.

79.96 Falls 7 lks. N. of the 1/16 sec. cor. No. 6, bet. secs.  
27 and 28 (N. ½) .

Thence I run

N. 89° 59' W. on a true line through the middle of the  
N. half of sec. 28.

Over nearly level bottom land, through scattering brush.

8.30 Wash, course S., 150 lks. wide.

19.99 Set an iron post for 1/16 sec. cor. No. 5, in center of  
the NW¼ of sec. 28, with brass cap stamped

1/16 S 28 in N. half  
No 5 1911 in S. half, from which

A mesquite 12 ins. dia. brs. S. 64°10' W., 49 lks. dist.  
Mkd. 1/16 S 28 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,

Subdivision of frac. T. 9 N., R. 20 W.

Chains

N. of cor.

23.70 Wash, course S.

28.85 Road, brs. N. 7° E. and S. 7° W.

31.25 Road, brs. N. 5° E. and S. 5° W.

32.70 Drain, course S. 12° W.

39.98 Set an iron post for 1/16 sec. cor. No. 4, bet. the NE. and NW. quarters of sec. 28, with brass cap stamped

1/16 S 28 in N. half  
No 4 1911 in S. half, from which

A mesquite 14 ins. dia. brs. S. 20° 10' W., 150 lks. dist.  
Mkd. 1/16 S 28 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

46.25 Road, brs. N. 5° E. and S. 5° W.

59.97 Set an iron post for 1/16 sec. cor. No. 3, in center of the NW¼ of sec. 28, with brass cap stamped

1/16 S 28 in N. half  
No 3 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

62.55 Road, brs. N. 20° E. and S. 20° W.

79.96 The 1/16 sec. cor. No. 6, bet. secs. 28 and 29 (N.¼).

Land, nearly level, - agricultural.  
Soil, adobe, 1st rate.  
Timber, scattering mesquite and arrow weed.

-----  
Dec. 15, 1911. At 8 a.m., l.m.t., I set off 34° 06' on the lat. arc, 23° 10¼' S. on the decl. arc, and determine a meridian with the solar at the cor. of secs. 20, 21, 28 and 29.

Thence I run

N. 0° 02' W. bet. secs. 20 and 21.

Over nearly level bottom land, through scattering brush.

6.40 Road, brs. E. and W.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

- 17.50 Road, brs. N. 30° E. and S. 30° W.
- 17.55 Slaughter pen, brs. E., 1 ch. dist.
- 20.00 Set an iron post for 1/16 sec. cor. No. 12, bet. secs. 20 and 21 (S. 1/2) with brass cap stamped
- 1/16 S 20 in W. half  
S 21 in E. half  
No 12 1911 in S., from which
- A mesquite 10 ins dia. brs. S. 4° 30' E., 76 lks. dist.  
Mkd. 1/16 S 21 B T.
- A mesquite 10 ins. dia. brs. S. 10° 30' W., 44 lks. dist.  
Mkd. 1/16 S 20 B T.
- Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.
- 20.80 Road, brs. N. 75° E. and S. 75° W.
- 22.75 Road, brs. N. 75° E. and S. 75° W.
- 23.90 Wire fence, brs. E. and W.
- 24.15 Drain, course W.
- 25.70 Drain, course W.
- 31.70 Drain, course S. 45° W.
- 34.00 Drain, course W.
- 36.20 Drain, course N. 70° W.
- 40.00 Set an iron post for 1/4 sec. cor. bet. secs. 20 and 21, with brass cap stamped
- 1/4 S 20 in W. half  
S 21 in E. half  
1911 in S., from which
- A mesquite 10 ins. dia. brs. N. 81° W., 42 lks. dist.  
Mkd. 1/4 S 20 B T.
- Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.
- 60.00 Set an iron post for 1/16 sec. cor. No. 6, bet. secs. 20 and 21 (N. 1/2) with brass cap stamped
- 1/16 S 20 in W. half  
S 21 in E. half  
No 6 1911 in S., from which
- A willow 12 ins. dia. brs. S. 66° 30' W., 123 lks. dist.  
Mkd. 1/16 S 20 B T.
- Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist.,

Subdivision of frac. T. 9 N., R. 20 W.

Chains

and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
W. of cor.

80.00 Set an iron post for the cor. of secs. 16, 17, 20 and 21,  
with brass cap stamped

T 9 N S 16 in NE. quadrant  
R 20 W S 21 in SE. quadrant  
S 20 in SW. quadrant  
S 17 in NW. quadrant

1911 in S.  
3 notches on S. and 4 notches on E. edges,

from which

A cottonwood 8 ins. dia. brs. S. 68° 25' E., 38 lks. dist.  
Mkd. T 9 N R 20 W S 21 B T.

A cottonwood 6 ins. dia. brs. S. 66° 45' W., 24 lks. dist.  
Mkd. T 9 N R 20 W S 20 B T.

A willow 6 ins. dia. brs. N. 8° 20' W., 51 lks. dist.  
Mkd. T 9 N R 20 W S 17 B T.

A cottonwood 8 ins. dia. brs. N. 45° 35' E., 78 lks. dist.  
Mkd. T 9 N R 20 W S 16 B T.

Dig pits 18x18x12 ins. in each sec. 5 1/2 ft. dist., and  
raise a mound of earth 4 ft. base, 2 ft. high, W. of  
cor.

Land, nearly level bottom, agricultural.  
Soil, adobe, 1st rate.  
Timber, scattering mesquite and dense cottonwood.

-----  
From the cor. of secs. 16, 17, 20 and 21, I run  
S. 89° 56' E. on a random line bet. secs. 16 and 21,  
setting temp. cors. at intervals of 20.00 chs.

80.00 Falls 9 lks. S. of the cor. of secs. 15, 16, 21 and 22,  
Thence I run

West on a true line bet. secs. 16 and 21.

Over nearly level bottom land, through scattering brush.

20.00 Set an iron post for 1/16 sec. cor. No. 1, bet. secs. 16  
and 21 (E. 1/2) with brass cap stamped

1/16 S 16 in N. half from which  
S 21 No 1 1911 in S. half

A willow 8 ins. dia. brs. N. 34° 45' W., 44 lks. dist.  
Mkd. 1/16 S 16 B T.

A willow 6 ins. dia. brs. S. 3° 35' W., 49 lks. dist.  
Mkd. 1/16 S 21 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,

Subdivision of frac. T. 9 N., R. 20 W.

Chains

N. of cor.

27.15 Wire fence, brs. N. 25° W. and S. 25° E.

40.00 Set an iron post for the 1/4 sec. cor. bet. secs. 16 and 21, with brass cap stamped

1/4 S 16 in N. half  
S 21 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

41.85 Wire fence, brs. N. 15° E. and S. 15° W.

44.50 E. edge of slough, brs. N. and S.

45.75 W. edge of slough, brs. N. and S.

48.95 Wire fence, brs. N. and S.

49.45 Road, brs. N. and S.

59.70 Wash, course S. 80° W.

60.00 Set an iron post for 1/16 sec. cor. No. 2, bet. secs. 16 and 21 (W. 1/4) with brass cap stamped

1/16 S 16 in N. half  
S 21 No 2 1911 in S. half,

from which

A willow 8 ins. dia. brs. N. 78° W., 105 lks. dist. Mkd. 1/16 S 16 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

64.90 Rail fence, brs. N. 55° W. and S. 55° E.

80.00 The cor. of secs. 16, 17, 20 and 21.

Land, nearly level bottom, - agricultural.  
Soil, adobe, 1st rate.  
Timber, scattering mesquite.  
Brush of arrow weed.

-----  
From the 1/16 sec. cor. No. 12, bet. secs. 20 and 21,

(S. 1/4) I run

S. 89° 56' E. on a random line through the middle of the S. half of sec. 21, setting temp. cors. at intervals of 20.00 chs.

## Subdivision of frac. T. 9 N., R. 20 W.

Chains	
79.96	Falls 14 lks. S. of the 1/16 sec. cor. No. 12, bet. secs. 21 and 22 (S. $\frac{1}{2}$ ).
	Thence I run
	S. 89° 58' W. on a true line through the middle of the S. half of sec. 21,
	Over nearly level bottom land, through scattering brush.
1.80	Road, brs. N. 40° E. and S. 40° W.
3.95	Drain, course S.
12.85	Road, brs. N. and S.
19.99	Set an iron post for 1/16 sec. cor. No. 11, in center of the SE $\frac{1}{4}$ of sec. 21, with brass cap stamped
	1/16 S 21 in N. half No 11 1911 in S. half
	Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high,
	N. of cor.
22.15	Road, brs. N. and S.
22.95	Road, brs. N. 15° E. and S. 15° W.
26.80	Wash, course S. 35° W.
33.35	Wash, course S.
39.98	Set an iron post for 1/16 sec. cor. No. 10, bet. the SE. and SW. quarters of sec. 21, with brass cap stamped
	1/16 S 21 in N. half No 10 1911 in S. half, from which
	A mesquite 8 ins. dia. brs. N. 42° 30' W., 108 lks. dist. 1/16 S 21 B T.
	Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high,
	N. of cor.
40.00	Road, brs. N. 80° E. and S. 80° W.
59.97	Set an iron post for the 1/16 sec. cor. No. 9, in center of the SW $\frac{1}{4}$ of sec. 21, with brass cap stamped
	1/16 S 21 in N. half No 9 1911 in S. half
	Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high,
	N. of cor.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

- 79.10 Road, brs. N. 15° E. and S. 15° W.
- 79.96 The 1/16 sec. cor. No. 12, bet. secs. 20 and 21 (S. 1/4).  
Land, nearly level bottom, - agricultural.  
Soil, adobe, 1st rate.  
Timber, scattering mesquite.  
Dense brush of arrow weed.
- 
- From the 1/4 sec. cor. bet. secs. 20 and 21, I run  
S. 89° 56' E. on a random line through the middle of sec.  
21, setting temp. cors. at intervals of 20.00 chs.
- 79.96 Falls 14 lks. S. of the 1/4 sec. cor. bet. secs. 21 and 22.  
Thence I run  
S. 89° 58' W. on a true line through the middle of sec. 21.  
Over nearly level bottom land, through scattering brush.
- 8.80 Road, brs. N. 15° E. and S. 15° W.
- 13.15 Road, brs. N. 10° E. and S. 10° W.
- 14.45 Wash, course N. 10° E.
- 18.10 Road, brs. N. 75° E. and S. 75° W.
- 19.99 Set an iron post for 1/16 sec. cor. No. 7, bet. the NE.  
and SE. quarters of sec. 21, with brass cap stamped  
1/16 S 21 in N. half  
No 7 1911 in S. half  
Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.
- 22.00 Wash, course N. 5° E.
- 23.05 Wash, course N. 10° E.
- 25.45 Wash, course N.
- 28.55 Wash, course N. 10° E.
- 39.98 Set an iron post for Center 1/4 sec. cor. of sec. 21, with  
brass cap stamped C 1/4 S 21 1911.  
Dig pits 18x18x12 ins. E., W., and S., 3 ft., and N.  
of cor. 7 ft. dist., and raise a mound of earth 4 ft.  
base, 2 ft. high, N. of post.
- 47.10 Road, brs. N. 50° E. and S. 50° W.
- 50.45 Wash, course N. 15° E.



## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

- 56.00 Wire fence, brs. N. 20° E. and S. 20° W.
- 59.97 Set an iron post for 1/16 sec. cor. No. 8, bet. the NW. and SW. quarters of sec. 21, with brass cap stamped
- 1/16 S 21 in N. half  
No 8 1911 in S. half, from which
- A mesquite 8 ins. dia. brs. N. 85° 48' E., 135 lks. dist.  
Mkd. 1/16 S 21 B T.
- Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3½ ft. base, 1½ ft. high, N. of cor.
- 79.96 The ¼ sec. cor. bet. secs. 20 and 21.
- Land, nearly level bottom, - agricultural.  
Soil, adobe, 1st rate.  
Timber, scattering mesquite.  
Dense brush of arrow weed.
- 
- From 1/16 sec. cor. No. 6, bet. secs. 20 and 21, (N. ½)
- I run
- S. 89° 56' E. on a random line through the middle of the N. half of sec. 21, setting temp. cors. at intervals of 20.00 chs.
- 79.96 Falls 14 lks. S. of the 1/16 sec. cor. No. 6, bet. secs. 21 and 22 (N. ½).
- Thence I run
- S. 89° 58' W. on a true line through the middle of the N. half of sec. 21,
- Over nearly level land, through scattering brush.
- 1.25 Wire fence, brs. N. and S.
- 9.25 Wire fence, brs. N. and S.
- 19.99 Set an iron post for 1/16 sec. cor. No. 5, in the center of the NE¼ of sec. 21, with brass cap stamped
- 1/16 S 21 in N. half  
No 5 1911 in S. half, from which
- A willow 6 ins. dia. brs. S. 58° 15' W., 33 lks. dist.  
Mkd. 1/16 S 21 B T.
- Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3½ ft. base, 1½ ft. high, N. of cor.

Subdivision of frac. T. 9 N., R. 20 W.

Chains

29.95 Wire fence, brs. N. 75° W. and S. 75° E.

30.15 Road, brs. N. 75° W. and S. 75° E.

39.98 Set an iron post for 1/16 sec. cor. No. 4, bet. the NE. and NW. quarters of sec. 21, with brass cap stamped

1/16 S 21 in N. half  
No 4 1911 in S. half, from which

A mesquite 8 ins. dia. brs. N. 18° 45' W., 37 lks. dist.  
Mkd. 1/16 S 21 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.

44.30 Wire fence, brs. N. 10° E. and S. 10° W.

59.97 Set an iron post for 1/16 sec. cor. No. 3, in the center of the NW 1/4 of sec. 21, with brass cap stamped

1/16 S 21 in N. half  
No 3 1911 in S. half, from which

A mesquite 6 ins. dia. brs. N. 87° 45' W., 11 lks. dist.  
Mkd. 1/16 S 21 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.

75.00 Fence, brs. N. 75° W. and S. 75° E.

79.00 Rail fence, brs. N. and S.

79.96 The 1/16 sec. cor. No. 6, bet. secs. 20 and 21 (N. 1/4)

Land, nearly level bottom, - agricultural.  
Soil, adobe, 1st rate.  
Timber, scattering mesquite.  
Dense brush of willow and arrow weed.

-----  
Dec. 15, 1911. At the cor. of secs. 16, 17, 20 and 21,  
I set off 23° 13 1/4' S. on the decl. arc, and at 11h 54m  
50s a.m., l.m.t., observe the sun on the meridian; the  
resulting lat. is 34° 07', the proper lat.

Thence I run

N. 0° 02' W. bet. secs. 16 and 17.

Over low bottom land.

2.30 Wash, course S. 35° W. Enter overflow land, brs. N. 35° E.  
and S. 35° W.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

13.00 Rail fence, brs. N. 50° W. and S. 50° E.

20.00 Set an iron post for 1/16 sec. cor. No. 12, bet. secs.

16 and 17, (S.  $\frac{1}{2}$ ), with brass cap stamped

1/16 S 17 in W. half

S 16 in E. half

No 12 1911 in S.

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist.,

and raise a mound of earth 3  $\frac{1}{2}$  ft. base, 1  $\frac{1}{2}$  ft. high,

W. of cor.

28.50 Left bank of Colorado River, course S. 50° W.

Set an iron post for M.C. of frac. secs. 16 and 17, with  
brass cap stamped

M C in N. half

T 9 N S 17 in SW. quadrant

R 20 W S 16 in SE. quadrant

1911 in S.

4 notches on E. edge

Dig a pit 36x36x12 ins. S ft. S. of cor., and raise a

mound of earth 4 ft. base, 2 ft. high, S. of post.

Land, low bottom land, and overflow, - agricultural.

Soil, adobe, 1st rate.

Timber, scattering mesquite.

Dense brush of arrow weed.

-----  
From the 1/16 sec. cor. No. 12, bet. secs. 16 and 17 (S.  $\frac{1}{2}$ )

I run

East on a random line through the middle of the S. half of

sec. 16, setting temp. cors. at intervals of 20.00 chs.

79.96 Falls 9 lks. S. of the point for the 1/16 sec. cor. No.

12, bet. secs. 15 and 16 (S.  $\frac{1}{2}$ ) which is in the channel

of the Colorado River.

Thence I run

S. 89° 56' W. on a true line through the middle of the

S. half of sec. 16.

In channel of Colorado River, over sand bar.

9.32 Left bank of Colorado River.

Set an iron post for 1/16 M.C. of frac. sec. 16, with

brass cap stamped

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

M C in N. half  
 1/16 S 16 in W. half  
 1911 in S.

Dig a pit 36x36x12 ins. S ft. W. of cor., and raise a mound of earth 4 ft. base, 2 ft. high, W. of post.

Leave Colorado River channel, enter low brushy overflow land.

19.99 Set an iron post for 1/16 sec. cor. No. 11, in center of the SE $\frac{1}{4}$  of sec. 16, with brass cap stamped

1/16 S 16 in N. half  
 No 11 1911 in S. half, from which

A cottonwood 10 ins. dia. brs. N. 11° 25' E., 74 lks. dist.  
 Mkd. 1/16 S 16 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.

39.98 Set an iron post for 1/16 sec. cor. No. 10, bet. the SE. and SW. quarters of sec. 16, with brass cap stamped

1/16 S 16 in N. half  
 No 10 1911 in S. half, from which

A willow 8 ins. dia. brs. N. 43° 30' W., 29 lks. dist.  
 Mkd. 1/16 S 16 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.

59.97 Set an iron post for 1/16 sec. cor. No. 9, in the center of the SW $\frac{1}{4}$  of sec. 16, with brass cap stamped

1/16 S 16 in N. half  
 No 9 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.

79.96 The 1/16 sec. cor. No. 12, bet. secs. 16 and 17 (S. $\frac{1}{2}$ ).

Land, low bottom, overflow, - agricultural.  
 Soil, adobe, 1st rate.  
 Timber, scattering willow, cottonwood and mesquite.

-----  
 From the 1/16 sec. cor. No. 11, in center of the SE $\frac{1}{4}$  of

## Subdivision of frac. T. 9 N., R. 20 W.

Chains

sec. 16, I run

N. 0° 02' W. on a true line through the middle of the  
SE $\frac{1}{4}$  of sec. 16.

Over low bottom overflow land, through scattering brush.

16.20 Left bank of Colorado River, course N. 60° W.

Set an iron post for 1/16 M.C. of sec. 16, with brass  
cap stamped

M C in N. half  
1/16 S 16 1911 in S. half

Dig a pit 36x36x12 ins. 8 ft. S. of cor., and raise a  
mound of earth 4 ft. base, 2 ft. high, S. of post.

Land, low flat bottom, overflow, - agricultural.  
Soil, adobe, 1st rate.  
Timber, scattering willow and cottonwood.

-----  
From 1/16 sec. cor. No. 10, bet. the SE $\frac{1}{4}$  and SW $\frac{1}{4}$  quarters  
of sec. 16, I run

N. 0° 02' W. on a true line through the middle of sec. 16.  
Over low bottom, overflow land.

20.00 Set an iron post for center  $\frac{1}{4}$  sec. cor. of sec. 16, with  
brass cap stamped C  $\frac{1}{4}$  S 16 1911.

Dig pits 18x18x12 ins. E., W., and S., 3 ft., and N. of  
cor. 7 ft. dist., and raise a mound of earth 4 ft. base,  
2 ft. high, N. of cor.

32.90 Left bank of Colorado River, course W.

Set an iron post for 1/16 M.C. of sec. 16, with brass  
cap stamped

M C in N. half  
1/16 S 16 1911 in S. half

Dig a pit 36x36x12 ins. 8 ft. S. of cor., and raise a  
mound of earth 4 ft. base, 2 ft. high, S. of post.

Land, low bottom, overflow, - agricultural.  
Soil, adobe, 1st rate.  
Scattering willow and cottonwood.

-----  
From the 1/16 sec. cor. No. 9, in center of the SW $\frac{1}{4}$  of

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

sec. 16, I run

N. 0° 02' W. on a true line through the middle of the  
W. half of sec. 16.

Over low, overflow brushy land.

20.00 Set an iron post for 1/16 sec. cor. No. 8, bet. the NW.  
and SW. quarters of sec. 16, with brass cap stamped

1/16 S 16 in N. half  
No 8 1911 in S. half

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
W. of cor.

30.00 Left bank of Colorado River, course S. 70° W.

Set an iron post for 1/16 M.C. of sec. 16, with brass  
cap stamped

M C in N. half  
1/16 S 16 1911 in S. half

Dig a pit 36x36x12 ins. 8 ft. S. of cor., and raise a  
mound of earth 4 ft. base, 2 ft. high, S. of post.

Land, low bottom, (overflow land) - agricultural.  
Soil, adobe, 1st rate.  
Scattering brush of willow and arrow weed.

From the center ¼ sec. cor. of sec. 16, I run

East on a true line through the middle of the E. half of  
frac. sec. 16.

Over low overflow land, through scattering brush.

14.30 Left bank of Colorado River, course N. 20° W.

Set an iron post for 1/16 M.C. of frac. sec. 16, with  
brass cap stamped

M C in E. half  
1/16 S 16 in W. half  
1911 in S.

Dig a pit 36x36x12 ins. 8 ft. W. of cor., and raise a  
mound of earth 4 ft. base, 2 ft. high, W. of post.

Land, low overflow bottom, - agricultural.  
Soil, adobe, 1st rate.  
Timber, scattering willow.  
Brush of arrow weed.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

Dec. 16, 1911. At 8 a.m., l.m.t., I set off  $34^{\circ} 04\frac{1}{2}'$  on the lat. arc,  $23^{\circ} 13\frac{1}{2}'$  S. on the decl. arc, and determine a meridian with the solar at the S.C. of secs. 31 and 32, on S. bdy. of Tp.

Thence I run

N.  $0^{\circ} 03'$  W. bet. secs. 31 and 32.

Thence I run

N.  $0^{\circ} 03'$  W. bet. secs. 31 and 32.

Over nearly level land, through scattering brush.

- 1.00 Wash, course N.  $25^{\circ}$  E.
- 16.00 Wash, course N.  $30^{\circ}$  W.
- 20.00 Set an iron post for  $1/16$  sec. cor. No. 12, bet. secs. 31 and 32 ( $S. \frac{1}{2}$ ) with brass cap stamped
- $1/16$  S 31 in W. half  
S 32 in E. half  
No 12 1911 in S., from which
- A mesquite 10 ins. dia. brs. N.  $80^{\circ} 30'$  W., 60 lks. dist.  
Mkd.  $1/16$  S 31 B T.
- A mesquite 12 ins. dia. brs. N.  $63^{\circ} 15'$  E., 75 lks. dist.  
Mkd.  $1/16$  S 32 B T.
- Dig pits  $18 \times 18 \times 12$  ins. N. and S. of cor. 3 ft. dist., and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.
- 23.40 Well, brs. W., 30 lks. dist.
- 29.25 Small wash, course W.
- 34.15 Road, brs. E. and W.
- 35.45 Road, brs. N.  $50^{\circ}$  E. and S.  $50^{\circ}$  W.
- 40.00 Set an iron post for  $1/4$  sec. cor. bet. secs. 31 and 32, with brass cap stamped
- $\frac{1}{4}$  S 31 in W. half  
S 32 in E. half  
1911 in S., from which
- A mesquite 8 ins. dia. brs. S.  $54^{\circ} 30'$  E., 13 lks. dist.  
Mkd.  $\frac{1}{4}$  S 32 B T.
- A mesquite 8 ins. dia. brs. S.  $70^{\circ}$  W., 77 lks. dist.  
Mkd.  $\frac{1}{4}$  S 31 B T.
- Dig pits  $18 \times 18 \times 12$  ins. N. and S. of cor. 3 ft. dist., and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

## Subdivision of frac. T. 9 N., R. 20 W.

Chains	
53.50	Wash, course W.
57.00	Wash, course S. 60° W.
60.00	Set an iron post for 1/16 sec. cor. No. 6, bet. secs. 31 and 32 (N. $\frac{1}{2}$ ) with brass cap stamped <div style="text-align: center;">           1/16 S 31 in W. half            S 32 in E. half            No 6 1911 in S.         </div> Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
80.00	Set an iron post for the cor. of secs. 29, 30, 31 and 32, with brass cap stamped <div style="text-align: center;">           T 9 N S 29 in NE. quadrant            R 20 W S 32 in SE. quadrant            S 31 in SW. quadrant            S 30 in NW. quadrant            1911 in S.            1 notch on S. and 5 notches on E. edge,         </div> from which A mesquite 16 ins. dia. brs. S. 61° 30' E., 190 lks. dist. Mkd. T 9 N R 20 W S 32 B T. A mesquite 24 ins. dia. brs. S. 88° 45' W., 213 lks. dist. Mkd. T 9 N R 20 W S 31 B T. Dig pits 18x18x12 ins. in each sec. 5 $\frac{1}{2}$ ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor.  Land, nearly level bottom, - agricultural. Soil, adobe, 1st rate. Scattering mesquite, quail brush and arrow weed.  ----- From the cor. of secs. 29, 30, 31 and 32, I run East on a random line bet. secs. 29 and 32, setting temp. cors. at intervals of 20.00 chs.
79.96	Intersect the cor. of secs. 28, 29, 32 and 33. Thence I run West on a true line bet. secs. 29 and 32. Over nearly level bottom land, through scattering brush.
1.65	Drain, course S.
8.65	Small drain, course S. 70° E.



## Subdivision of frac. T. 9 N., R. 20° W.

## Chains

- 12.60 Road, brs. N. 35° E. and S. 35° W.
- 14.20 Small drain, course S.
- 17.00 Road, brs. N. and S.
- 19.99 Set an iron post for 1/16 sec. cor. No. 1, bet. secs. 29 and 32 (E. 1/4) with brass cap stamped
- 1/16 S 29 in N. half  
S 32 No 1 1911 in S. half,
- from which
- A mesquite 24 ins. dia. brs. S. 37° 30' W., 99 lks. dist.  
Mkd. 1/16 S 32 B T.
- Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.
- 23.30 Road, brs. N. 15° E. and S. 15° W.
- 28.00 Road, brs. N. 40° E. and S. 40° W.
- 28.50 Road, brs. N. 45° E. and S. 45° W.
- 35.45 Road, brs. N. 30° E. and S. 30° W.
- 39.98 Set an iron post for the 1/4 sec. cor. bet. secs. 29 and 32, with brass cap stamped
- 1/4 S 29 in N. half  
S 32 1911 in S. half
- Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.
- 42.35 Road, brs. N. 15° W. and S. 15° E.
- 59.97 Set an iron post for 1/16 sec. cor. No. 2, bet. secs. 29 and 32 (W. 1/4) with brass cap stamped
- 1/16 S 29 in N. half  
S 32 No 2 1911 in S. half
- Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.
- 61.15 Road, brs. N. 10° E. and S. 10° W.
- 79.96 The cor. of secs. 29, 30, 31 and 32.
- Land, nearly level bottom, - agricultural.  
Soil, adobe, 1st rate.  
Scattering brush of mesquite and arrow weed.

Subdivision of frac. T. 9 N., R. 20 W.

Chains

From the 1/16 sec. cor. No. 12, bet. secs. 31 and 32 (S 1/2)  
I run

East on a random line through the middle of the S. half  
of sec. 32, setting temp. corners at intervals of  
20.00 chs.

80.00 Falls 3 lks. N. of the 1/16 sec. cor. No. 12, bet. secs.  
32 and 33 (S 1/2).

Thence I run

N. 89° 59' W. on a true line through the middle of the  
S. half of sec. 32.

Over nearly level land, through scattering brush.

17.15 Road, brs. N. 10° E. and S. 10° W.

20.00 Set an iron post for 1/16 sec. cor. No. 11, in center of  
the SE 1/4 of sec. 32, with brass cap stamped

1/16 S 32 in N. half  
No 11 1911 in S. half, from which

A mesquite 18 ins. dia. brs. S. 22° 40' E., 154 lks. dist.  
Mkd. 1/16 S 32 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.

22.85 Road, brs. N. 60° E. and S. 60° W.

31.00 Road, brs. N. 30° E. and S. 30° W.

36.00 Road, brs. N. and S.

40.00 Set an iron post for 1/16 sec. cor. No. 10, bet. the SE  
and SW. quarters of sec. 32, with brass cap stamped

1/16 S 32 in N. half  
No 10 1911 in S. half, from which

A mesquite 18 ins. dia. brs. S. 29° 45' W., 75 lks. dist.  
Mkd. 1/16 S 32 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.

56.30 Drain, course S. 60° W.

60.00 Set an iron post for 1/16 sec. cor. No. 9, in center of  
the SW 1/4 of sec. 32, with brass cap stamped

## Subdivision of frac. T. 9 N., R. 20 W.

Chains

1/16 S 32 in N. half  
No 9 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

80.00 The 1/16 sec. cor. No. 12, bet. secs. 31 and 32 (S. ½).

Land, nearly level bottom, - agricultural.  
Soil, adobe, 1st rate.  
Scattering brush of mesquite and arrow weed.

-----  
From the ¼ sec. cor. bet. secs. 31 and 32, I run  
East on a random line through the middle of sec. 32,  
setting temp. cors. at intervals of 20.00 chs.

80.00 Falls 3 lks. S. of the ¼ sec. cor. bet. secs. 32 and 33,

Thence I run

S. 89° 59' W. on a true line through the middle of sec. 32.

Over nearly level bottom land, through scattering brush.

0.40 Road, brs. N. 60° E. and S. 60° W.

11.40 Road, brs. N. 45° E. and S. 45° W.

14.25 Road, brs. N. 10° E. and S. 10° W.

19.40 Road, brs. N. 45° E. and S. 45° W.

20.00 Set an iron post for 1/16 sec. cor. No. 7, bet. the SE.

and NE. quarters of sec. 32, with brass cap stamped

1/16 S 32 in N. half  
No 7 1911 in S. half, from which

A mesquite 8 ins. dia. brs. S. 76° 35' E., 168 lks. dist.  
Mkd. 1/16 S 32 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

21.75 Road, brs. N. 80° E. and S. 80° W.

37.35 Road, brs. N. 5° W. and S. 5° E.

40.00 Set an iron post for the center ¼ sec. cor. of sec. 32,

with brass cap stamped C ¼ S 32 1911.

Dig pits 18x18x12 ins. E., W., and S., 3 ft., and N.  
of cor. 7 ft. dist., and raise a mound of earth 4 ft.

Subdivision of frac. T. 9 N., R. 20 W.

Chains

base, 2 ft. high, N. of cor.

60.00 Set an iron post for 1/16 sec. cor. No. 8, bet. the NW. and SW. quarters of sec. 32, with brass cap stamped

1/16 S 32 in N. half  
No 8 1911 in S. half, from which

A mesquite 10 ins. dia. brs. N. 65° 20' W., 48 lks. dist.  
Mkd. 1/16 S 32 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

75.35 Road, brs. N. 30° E. and S. 30° W.

80.00 The 1/4 sec. cor. bet. secs. 31 and 32.

Land, nearly level bottom, - agricultural.  
Soil, adobe, 1st rate.  
Scattering brush of mesquite and arrow weed.

-----  
From 1/16 sec. cor. No. 6, bet. secs. 31 and 32, (N. 1/4)

I run

East on a random line through the middle of the N. half of sec. 32, setting temp. cors. at intervals of 20.00 chs.

79.96 Falls 5 lks. S. of the 1/16 sec. cor. No. 6, bet. secs. 32 and 33. (N. 1/4).

Thence I run

S. 89° 58' W. on a true line through the middle of the N. half of sec. 32.

Over nearly level bottom land, through scattering brush.

7.00 Road, brs. N. 15° E. and S. 10° W.

10.80 Road, brs. N. 35° W. and S. 35° E.

15.10 Wash, course S. 60° E.

19.99 Set an iron post for 1/16 sec. cor. No. 5, in center of the NE 1/4 of sec. 32, with brass cap stamped

1/16 S 32 in N. half  
No 5 1911 in S. half, from which

A mesquite 10 ins. dia. brs. N. 61° W., 107 lks. dist.  
Mkd. 1/16 S 32 B T.

Subdivision of frac. T. 9 N., R. 20 W.

Chains

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3½ ft. base, 1½ ft. high, N. of cor.

39.98 Set an iron post for 1/16 sec. cor. No. 4, bet. the NE. and NW. quarters of sec. 32, with brass cap stamped

1/16 S 32 in N. half  
No 4 1911 in S. half, from which

A mesquite 10 ins. dia. brs. N. 53° 50' W., 97 lks. dist.  
Mkd. 1/16 S 32 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3½ ft. base, 1½ ft. high, N. of cor.

40.13 Road, brs. N. and S.

59.70 Road, brs. N. 40° E. and S. 40° W.

59.97 Set an iron post for 1/16 sec. cor. No. 3, in the center of the NW¼ of sec. 32, with brass cap stamped

1/16 S 32 in N. half  
No 3 1911 in S. half, from which

A mesquite 8 ins. dia. brs. N. 51° 05' E., 252 lks. dist.  
Mkd. 1/16 S 32 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3½ ft. base, 1½ ft. high, N. of cor.

63.00 Road, brs. N. and S.

78.50 Draw, drains S.

79.96 The 1/16 sec. cor. No. 6, bet. secs. 31 and 32 (N.¼).

Land, nearly level bottom, - agricultural.  
Soil, adobe, 1st rate.  
Scattering brush of mesquite and arrow weed.

-----  
Dec. 16, 1911. At the cor. of secs. 29, 30, 31 and 32, I set off 23° 16½' S. on the decl. arc, and at 11h 55m 19s a.m., l.m.t., observe the sun on the meridian; the resulting lat. is 34° 05', the proper lat.

Thence I run

West on a random line bet. secs. 30 and 31, setting temp.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

cors. at intervals of 20.00 chs.

80.04 Falls 16 lks. N. of the cor. of secs. 25, 30, 31 and 36,  
on W. bdy. of Tp.

Thence I run

N. 89° 53' E. on a true line bet. secs. 30 and 31.

Over nearly level land, through scattering brush.

20.04 Set an iron post for 1/16 sec. cor. No. 2, bet. secs. 30  
and 31 (W.  $\frac{1}{2}$ ) with brass cap stamped

1/16 S 30 in N. half  
S 31 No 2 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high,  
N. of cor.

22.25 Slough, brs. N. and S. (2 chs. wide).

40.04 Set an iron post for  $\frac{1}{4}$  sec. cor. bet. secs. 30 and 31,  
with brass cap stamped

$\frac{1}{4}$  S 30 in N. half  
S 31 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high,  
N. of cor.

57.80 Road, brs. N. 60° W. and S. 85° E.

60.04 Set an iron post for 1/16 sec. cor. No. 1, bet. secs. 30  
and 31 (E.  $\frac{1}{2}$ ) with brass cap stamped

1/16 S 30 in N. half  
S 31 No 1 1911 in S. half, from

which

A mesquite 8 ins. dia. brs. N. 24 $\frac{1}{2}$ ° E., 63 lks. dist.  
Mkd. 1/16 S 30 B T.  
A mesquite 10 ins. dia. brs. N. 57° E., 69 lks. dist.  
Mkd. 1/16 S 30 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high,  
N. of cor.

62.05 Road, brs. N. 80° E. and S. 80° W.

70.35 Road, brs. N. and S.

80.04 The cor. of secs. 29, 30, 31 and 32.

Subdivision of frac. T. 9 N., R. 20 W.

Chains

Land, nearly level bottom, - agricultural.  
Soil, adobe, 1st rate.  
Scattering mesquite, and thick arrow weed and quail brush.

-----  
From the 1/16 sec. cor. No. 12, bet. secs. 31 and 32 (S $\frac{1}{2}$ )

I run

West on a random line through the middle of the S. half  
of sec. 31, setting temp. cors. at intervals of 20 chs.

80.00 Falls 14 lks. N. of the 1/16 sec. cor. No. 12, bet. secs.  
31 and 36 (S $\frac{1}{2}$ ) on W. bdy. of Tp.

Thence I run

N. 89° 54' E. on a true line through the middle of the  
S. half of sec. 31.

Over nearly level bottom land, through scattering brush.

6.00 Wash, course S. 25° W.

20.00 Set an iron post for 1/16 sec. cor. No. 9, in center of  
the SW $\frac{1}{4}$  of sec. 31, with brass cap stamped

1/16 S 31 in N. half  
No 9 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high,  
N. of cor.

33.30 Dry slough, 1 ch. wide, brs. N. 15° E. and S. 15° W.

40.00 Set an iron post for 1/16 sec. cor. No. 10, bet. the SW.  
and SE. quarters of sec. 31, with brass cap stamped

1/16 S 31 in N. half  
No 10 1911 in S. half, from which

A mesquite 26 ins. dia. brs. N. 2 $\frac{1}{2}$ ° W., 26 lks. dist.  
Mkd. 1/16 S 31 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high,  
N. of cor.

50.45 Road, brs. N. 30° E. and S. 30° W.

51.35 Road, brs. N. and S.

54.00 Road, brs. N. 50° E. and S. 50° W.

58.50 Road, brs. N. 60° E. and S. 60° W.

Subdivision of frac. T. 9 N., R. 20 W.

Chains

60.00 Set an iron post for 1/16 sec. cor. No. 11, in center of the SE 1/4 of sec. 31, with brass cap stamped

1/16 S 31 in N. half  
No 11 1911 XXXX in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

73.00 Road, brs. N. and S.

78.50 Wash, course N. 5° W.

80.00 The 1/16 sec. cor. No. 12, bet. secs. 31 and 32 (S. 1/2).

Land, nearly level bottom, - agricultural and grazing. Soil, adobe, 1st rate. Scattering brush of mesquite and arrow weed.

-----  
From the 1/4 sec. cor. bet. secs. 31 and 32, I run West on a random line through the middle of sec. 31, setting temp. cors. at intervals of 20.00 chs.

80.00 Falls 18 lks. N. of the 1/4 sec. cor. bet. secs. 31 and 36, on W. bdy. of Tp.

Thence I run

N. 89° 52° E. on a true line through the middle of sec. 31.

Over nearly level bottom land, through scattering brush.

16.50 Dry slough, 1 ch. wide, brs. N. and S.

20.00 Set an iron post for 1/16 sec. cor. No. 8, bet. the NW. and SW. quarters of sec. 31, with brass cap stamped

1/16 S 31 in N. half  
No 8 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

35.00 Old ditch, brs. S. 45° W. and N. 45° E.

36.00 Wash, course S. 45° W.

40.00 Set an iron post for center 1/4 sec. cor. of sec. 31, with brass cap stamped C 1/4 S 31 1911.

Dig pits 18x18x12 ins. E., W., and S., 3 ft., and N.



Subdivision of frac. T. 9 N., R. 20 W.

Chains

of cor. 7 ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, N. of cor.

57.95 Road, brs. N. 30° E. and S. 30° W.

60.00 Set an iron post for 1/16 sec. cor. No. 7, bet. the NE. and SE. quarters of sec. 31, with brass cap stamped

1/16 S 31 in N. half  
No 7 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

67.00 Dry slough, 2 chs. wide, brs. N. 25° E. and S. 25° W.

80.00 The 1/4 sec. cor. bet. secs. 31 and 32.

Land, nearly level bottom, - agricultural and grazing. Soil, adobe, 1st rate. Scattering mesquite, arrow weed and quail brush.

-----  
From the 1/16 sec. cor. No. 6, bet. secs. 31 and 32 (N. 1/4)

I run

West on a random line through the middle of the N. half of sec. 31, setting temp. cors. at intervals of 20 chs.

80.04 Falls 16 lks. N. of the 1/16 sec. cor. No. 6, bet. secs. 31 and 36 (N. 1/4) on W. bdy. of Tp.

Thence I run

N. 89° 53' E. on a true line through the middle of the N. half of sec. 31.

Over nearly level bottom land, through scattering brush.

17.60 Dry slough, 150 lks. wide, brs. N. and S.

20.04 Set an iron post for 1/16 sec. cor. No. 3, in center of the NW 1/4 of sec. 31, with brass cap stamped

1/16 S 31 in N. half  
No 3 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

36.30 Wash, course S. 15° W.

Subdivision of frac. T. 9 N., R. 20 W.

Chains

40.04 Set an iron post for 1/16 sec. cor. No. 4, bet. the NE. and NW. quarters of sec. 31, with brass cap stamped

1/16 S 31 in N. half  
No 4 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

60.04 Set an iron post for 1/16 sec. cor. No. 5, in center of the NE. 1/4 of sec. 31, with brass cap stamped

1/16 S 31 in N. half  
No 5 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

64.50 Road, brs. N. 5° E. and S. 5° W.

80.04 The 1/16 sec. cor. No. 6, bet. secs. 31 and 32 (N. 1/4).

Land, nearly level bottom, - agricultural and grazing. Soil, adobe, 1st rate. Scattering mesquite, quail brush and arrow weed.

-----  
Dec. 18, 1911. At 8 a.m., l.m.t., I set off 34° 05' on the lat. arc, 23° 18 1/2' S. on the decl. arc, and determine a meridian with the solar at the cor. of secs. 29, 30, 31 and 32.

Thence I run

N. 0° 03' W. bet. secs. 29 and 30.

Over nearly level bottom land, through scattering brush.

20.00 Set an iron post for 1/16 sec. cor. No. 12, bet. secs. 29 and 30 (S. 1/4) with brass cap stamped

1/16 S 30 in W. half  
S 29 in E. half  
No 12 1911 in S., from which

A mesquite 6 ins. dia. brs. S. 82° 30' E., 112 lks. dist. Mkd. 1/16 S 29 B T.  
A mesquite 8 ins. dia. brs. S. 82° 30' W., 89 lks. dist. Mkd. 1/16 S 30 B T.

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

Subdivision of frac. T. 9 N., R. 20 W.

Chains

26.35 Road, brs. N. 45° E. and S. 45° W.

40.00 Set an iron post for 1/4 sec. cor. bet. secs. 29 and 30,  
with brass cap stamped

1/4 S 30 in W. half  
S 29 in E. half  
1911 in S.

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
W. of cor.

41.95 Road, brs. N. 75° E. and S. 75° W.

42.05 Fence, brs. N. 75° E. and S. 75° W.

44.00 Enter slough, brs. N. 45° E. and S. 45° W.

46.50 Leave slough, brs. N. 45° E. and S. 45° W.

47.00 Enter overflow land, brs. E. and W.

53.80 Fence, brs. S. 80° E. and W.

60.00 Set an iron post for 1/16 sec. cor. No. 6, bet. secs. 29  
and 30 (N. 1/4) with brass cap stamped

1/16 S 30 in W. half  
S 29 in E. half  
No 6 1911 in S., from which

A cottonwood 14 ins. dia. brs. S. 84° W., 101 lks. dist.  
Mkd. 1/16 S 30 B T.

Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
W. of cor.

68.30 Road, brs. E. and W.

70.50 Road, brs. N. 45° W. and S. 45° E.

80.00 Set an iron post for the cor. of secs. 19, 20, 29 and 30,  
with brass cap stamped

T 9 N S 20 in NE. quadrant  
R 20 W S 29 in SE. quadrant  
S 30 in SW. quadrant  
S 19 in NW. quadrant  
1911 in S.

2 notches on S. and 5 notches on E. edge

Dig pits 18x18x12 ins. in each sec. 5 1/2 ft. dist., and  
raise a mound of earth 4 ft. base, 2 ft. high, W. of  
cor.

Land, nearly level bottom, overflow, - agricultural.  
Soil, adobe, 1st rate.  
Timber, scattering mesquite, willow, cottonwood and arrow  
weed.

Subdivision of frac. T. 9 N., R. 20 W.

Chains

From the cor. of secs. 19, 20, 29 and 30, I run East on a random line bet. secs. 20 and 29, setting temp. cors. at intervals of 20.00 chs.

79.80 Falls 7 lks. S. of the cor. of secs. 20, 21, 28 and 29.

Thence I run

S. 89° 57' W. on a true line bet. secs. 20 and 29.

Over nearly level land, through scattering brush.

6.25 Wash, course S. 10° W.

11.75 Drain, course S.

15.20 Road, brs. N. 5° E. and S. 5° W.

15.90 Fence, brs. N. and S.

Enter cultivated field.

19.95 Set an iron post for 1/16 sec. cor. No. 1, bet. secs. 20 and 29 (E. 1/2) with brass cap stamped

1/16 S 20 in N. half  
S 29 No 1 1911 in S. half, from

which

A willow 12 ins. dia. brs. N. 12° 30' W., 50 lks. dist.  
Mkd. 1/16 S 20 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.

21.05 Draw, drains S.

28.40 Fence, brs. N. 45° W. and S. 45° E.

33.75 Fence, brs. N. 30° E. and S. 30° W.

34.00 Fence, brs. N. and S.

39.90 Set an iron post for 1/4 sec. cor. bet. secs. 20 and 29,  
with brass cap stamped

1/4 S 20 in N. half  
S 29 1911 in S. half, from which

A cottonwood 12 ins. dia. brs. S. 60° 45' W., 303 chs. dist.  
Mkd. 1/4 S 29 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.

43.05 Rail fence, brs. N. 10° W. and S. 10° E.

Subdivision of frag. T. 9 N., R. 20 W.

Chains

- 48.80 Rail fence, brs. N. 75° E. and S. 75° W.
- 50.70 Leave cultivated field. Enter scattering brush.
- 54.50 Slough, 1 ch. wide, brs. N. and S.
- 58.20 Road, brs. N. and S.
- 59.60 Indian cabin, brs. S. 2 chs. dist.
- 59.85 Set an iron post for 1/16 sec. cor. No. 2, bet. secs. 20 and 29 (W. 1/2) with brass capstamped

1/16 S 20 in N. half  
S 29 No 2 1911 in S. half,

from which

A cottonwood 12 ins. dia. brs. N. 69° 45' E., 197 lks. dist.  
Mkd. 1/16 S 20 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.

- 66.90 Drain, course S.
- 67.00 Enter overflow land, brs. N. 45° E. and S. 45° W.
- 67.35 Enter slough, brs. N. and S.
- 68.05 Leave slough, brs. N. and S.
- 75.45 Fence, brs. N. 15° W. and S. 15° E.
- 79.80 The cor. of secs. 19, 20, 29 and 30.

Land, nearly level, overflow and bottom, - agricultural.  
34.80 chs. under cultivation.  
Soil, adobe, 1st rate.  
Scattering brush of willow, cottonwood and arrow weed.

-----  
From the 1/16 sec. cor. No. 12, bet. secs. 29 and 30 (S. 1/2)

I run

East on a random line through the middle of the S. half  
of sec. 29, setting temp. cors. at intervals of 20 chs.

- 79.84 Falls 7 lks. S. of the 1/16 sec. cor. No. 12, bet. secs. 28 and 29 (S. 1/2).

Thence I run

S. 89° 57' W. on a true line through the middle of the  
S. half of sec. 29.

Over nearly level bottom land, through scattering brush.

Subdivision of frac. T. 2 N., R. 20 W.

Chains

16.60 Road, brs. N. 25° E. and S. 25° W.

17.85 Wash, course S.

19.96 Set an iron post for 1/16 sec. cor. No. 11, in center of the SE $\frac{1}{4}$  of sec. 29, with brass cap stamped

1/16 S 29 in N. half  
No 11 1911 in S. half, from which

A mesquite 20 ins. dia. brs. S. 85° 15' W., 259 lks. dist.  
Mkd. 1/16 S 29 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high,  
N. of cor.

27.00 Wash, course S.

27.90 Wash, course S.

28.90 Road, brs. N. and S.

36.00 Wash, course S. 25° W.

38.00 Wash, course S. 20° W.

39.92 Set an iron post for 1/16 sec. cor. No. 10, bet. the SE.  
and SW. quarters of sec. 29, with brass cap stamped

1/16 S 29 in N. half  
No 10 1911 in S. half, from which

A mesquite 18 ins. dia. brs. S. 51° E., 87 lks. dist.  
Mkd. 1/16 S 29 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high,  
N. of cor.

45.00 Road, brs. N. and S.

48.25 Road, brs. N. 10° W. and S. 10° E.

56.75 Road, brs. N. 5° E. and S. 5° W.

59.88 Set an iron post for 1/16 sec. cor. No. 9, in center of  
the SW $\frac{1}{4}$  of sec. 29, with brass cap stamped

1/16 S 29 in N. half  
No 9 1911 in S. half, from which

A mesquite 14 ins. dia. brs. S. 33° W., 31 lks. dist.  
Mkd. 1/16 S 29 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 $\frac{1}{2}$  ft. base, 1 $\frac{1}{2}$  ft. high,  
N. of cor.

Subdivision of frac. T. 9 N., R. 20 W.

Chains

79.84 The 1/16 sec. cor. No. 12, bet. secs. 29 and 30 (S. 1/4) /  
 Land, nearly level bottom, - agricultural.  
 Soil, adobe, 1st rate.  
 Scattering mesquite, willow, cottonwood and arrow weed  
 brush.

-----  
 From the 1/4 sec. cor. bet. secs. 29 and 30, I run  
 East on a random line through the middle of sec. 29,  
 setting temp. cors. at intervals of 20.00 chs.

79.80 Falls 5 lks. S. of the 1/4 sec. cor. bet. secs. 28 and 29,  
 Thence I run  
 S. 89° 58' W. on a true line through the middle of  
 sec. 29.

Over nearly level land, through scattering brush.

0.22 Wash, course S.

4.25 Road, brs. N. 10° E. and S. 10° W.

4.60 Wash, course S. 70° E.

12.85 Road, brs. N. and S.

14.10 Wash, course S.

19.95 Set an iron post for 1/16 sec. cor. No. 7, bet. the NE.  
 and SE. quarters of sec. 29, with brass cap stamped  
 1/16 S 29 in N. half  
 No 7 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
 and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
 N. of cor.

30.20 Road, brs. N. 15° E. and S. 15° W.

34.50 Road, brs. N. and S.

39.90 Set an iron post for the center 1/4 sec. cor. of sec. 29,  
 with brass cap stamped C 1/4 S 29 1911, from which  
 A mesquite 12 ins. dia. brs. N. 44° 30' E., 32 lks. dist.  
 Mkd. C 1/4 S 29 B T.

Dig pits 18x18x12 ins. E., W., and S., 3 ft., and N.  
 of cor. 7 ft. dist., and raise a mound of earth 4 ft.  
 base, 2 ft. high, N. of post.

47.45 Road, brs. N. 10° E. and S. 10° W.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains.

48.95 Road, brs. N. and S.

56.45 Wash, course S. 10° W.

59.85 Set an iron post for 1/16 sec. cor. No. 8, bet. the NW. and SW. quarters of sec. 29, with brass cap stamped

1/16 S 29 in N. half  
No 8 1911 in S. half, from which

A willow 8 ins. dia. brs. S. 80° 45' E., 127 lks. dist.  
Mkd. 1/16 S 29 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

66.50 Road, brs. N. 60° E. and S. 60° W.

74.35 Wash, course S.

79.80 The ¼ sec. cor. bet. secs. 29 and 30.

Land, nearly level bottom, - agricultural.  
Soil, adobe, 1st rate.  
Timber, scattering cottonwood, willow and mesquite.

From 1/16 sec. cor. No. 6, bet. secs. 29 and 30 (N. ¼)

I run

East on a random line through the middle of the N. half  
of sec. 29, setting temp. cors. at intervals of 20.00  
chs.

79.80 Falls 7 lks. S. of the 1/16 sec. cor. No. 6, bet. secs.  
28 and 29 (N. ¼).

Thence I run

S. 89° 57' W. on a true line through the middle of the  
N. half of sec. 29.

Over nearly level bottom land, through scattering brush.

12.60 Road, brs. N. 5° W. and S. 5° E.

13.85 Wash, course S.

16.75 Wash, course S.

18.80 Wash, course S.

19.95 Set an iron post for 1/16 sec. cor. No. 5, in center of  
the NE¼ of sec. 29, with brass cap stamped



## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

1/16 S 29 in N. half  
No 5 1911 in S. half, from which

A mesquite 12 ins. dia. brs. N. 61° 30' E., 162 lks. dist.  
Mkd. 1/16 S 29 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

21.35 Road, brs. N. 15° E. and S. 15° W.

35.80 Indian cabin, brs. N. 20° E., 150 lks. dist.

36.20 Road, brs. N. and S.

39.90 Set an iron post for 1/16 sec. cor. No. 4, bet. the NE.  
and NW. quarters of sec. 29, with brass cap stamped

1/16 S 29 in N. half  
No 4 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

40.80 Wash, course S.

44.00 Road, brs. N. 40° E. and S. 40° W.

44.80 Indian cabin, brs. N., 2 chs. dist.

45.30 Wash, course S. 70° W.

59.85 Set an iron post for 1/16 sec. cor. No. 3, in center of  
the NW¼ of sec. 29, with brass cap stamped

1/16 S 29 in N. half  
No 3 1911 in S. half, from which

A willow 14 ins. dia. brs. N. 87° E., 324 lks. dist.  
Mkd. 1/16 S 29 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

70.50 Enter overflow land, brs. N. and S.

70.80 Enter wash, course S.

78.80 Leave wash, course S.

79.80 The 1/16 sec. cor. No. 6, bet. secs. 29 and 30 (N.¼).

Land, nearly level bottom, overflow, - agricultural.  
Soil, adobe, 1st rate.  
Timber, scattering mesquite, willow and cottonwood.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

Dec. 18, 1911. At the cor. of secs. 19, 20, 29 and 30,  
I set off  $23^{\circ} 21\frac{1}{2}'$  S. on the decl. arc, and at 11h 56m  
17s a.m., l.m.t., observe the sun on the meridian; the  
resulting lat. is  $34^{\circ} 06'$ , the proper lat.

Thence I run

S.  $89^{\circ} 53'$  W. on a random line bet. secs. 19 and 30,  
setting temp. cors. at intervals of 20.00 chs.

80.12 Falls 7 lks. S. of the cor. of secs. 19, 24, 25 and 30,  
on W. bdy. of Tp.

Thence I run

N.  $89^{\circ} 56'$  E. on a true line bet. secs. 19 and 30.

Over nearly level overflow land, through scattering brush.

20.12 Set an iron post for  $1/16$  sec. cor. No. 2, bet. secs. 19  
and 30 (W.  $\frac{1}{2}$ ) with brass cap stamped

$1/16$  S 19 in N. half  
S 30 No 2 1911 in S. half, from which

A cottonwood 10 ins. dia. brs. S.  $32^{\circ} 30'$  E., 137 lks. dist.  
Mkd.  $1/16$  S 30 B T.

Dig pits  $18 \times 18 \times 12$  ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.

30.00 Fence, brs. N.  $30^{\circ}$  W. and S.  $30^{\circ}$  E.

Leave overflow land.

40.12 Set an iron post for  $\frac{1}{4}$  sec. cor. bet. secs. 19 and 30,  
with brass cap stamped

$\frac{1}{4}$  S 19 in N. half  
S 30 1911 in S. half

Dig pits  $18 \times 18 \times 12$  ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.

60.12 Set an iron post for  $1/16$  sec. cor. No. 1, bet. secs. 19  
and 30 (E.  $\frac{1}{2}$ ) with brass cap stamped

$1/16$  S 19 in N. half  
S 30 No 1 1911 in S. half, from which

A cottonwood 12 ins. dia. brs. S.  $78^{\circ} 30'$  E., 206 lks. dist.  
Mkd.  $1/16$  S 30 B T.

Subdivision of frac. T. 9 N., R. 20 W.

Chains

Dig pits 18x18x12 ins. N. and W. of cor. 3 ft. dist., and raise a mound of earth 3½ ft. base, 1½ ft. high, N. of cor.

71.40 Road, brs. N. 45° W. and S. 45° E.

80.12 The cor. of secs. 19, 20, 29 and 30.

Land, nearly level bottom, - agricultural; 30.00 chs. of overflow land. Soil, adobe, 1st rate. Timber, scattering mesquite, willow, cottonwood, and dense arrow weed.

-----  
From 1/16 sec. cor. No. 12, bet. secs. 29 and 30 (S.½) I run

S. 89° 53' W. on a random line through the middle of the S. half of sec. 30, setting temp. cors. at intervals of 20.00 chs.

80.10 Falls 12 lks. S. of the 1/16 sec. cor. No. 12, bet. secs. 25 and 30 (S.½) on W. bdy. of Tp.

Thence I run

N. 89° 58' E. on a true line through the middle of the S. half of sec. 30.

Over low land, through scattering brush.

4.90 Road, brs. N. 60° E. and S. 60° W.

5.50 Small corral on line.

9.00 Road, brs. N. 65° W. and S. 65° E.

12.10 Slough, 2 chs. wide, brs. N. and S.

16.10 Enter overflow land and dense arrow weed and quail brush, brs. N. and S.

20.10 Set an iron post for 1/16 sec. cor. No. 9, in center of the SW¼ of sec. 30, with brass cap stamped

1/16 S 30 in N. half  
No 9 1911 in S. half, from which

A cottonwood 12 ins. dia. brs. N. 37° W., 95 lks. dist. Mkd. 1/16 S 30 B T.

Dig pits 18x18x12 ins. N. and W. of cor. 3 ft. dist., and raise a mound of earth 3½ ft. base, 1½ ft. high, N. of cor.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

26.10 Slough, 1 ch. wide, 1 ch. S. of line, brs. E. and W.

37.60 Leave overflow land, <sup>at wash</sup> and thick arrow weed, brs. N. and S.

40.10 Set an iron post for 1/16 sec. cor. No. 10, bet. the SE. and SW. quarters of sec. 30, with brass cap stamped

1/16 S 30 in N. half  
No 10 1911 in S. half, from which

A cottonwood 18 ins. dia. brs. N. 40° 15' W., 145 lks. dist.  
Mkd. 1/16 S 30 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

~~XX~~

49.35 Road, brs. N. 50° E. and S. 50° W.

60.10 Set an iron post for 1/16 sec. cor. No. 11, in center of the SE¼ of sec. 30, with brass cap stamped

1/16 S 30 in N. half  
No 11 1911 in S. half, from which

A mesquite 10 ins. dia. brs. S. 86° 30' E., 93 lks. dist.  
Mkd. 1/16 S 30 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

77.85 Road, brs. N. and S.

80.10 The 1/16 sec. cor. No. 12, bet. secs. 29 and 30 (S.¼).

Land, nearly level bottom, overflow, - agricultural.  
Soil, adobe, 1st rate.  
Timber, scattering mesquite, willow and cottonwood.  
Dense brush of arrow weed.

-----  
From the ¼ sec. cor. bet. secs. 29 and 30, I run  
S. 89° 53' W. on a random line through the middle of  
sec. 30, setting temp. cors. at intervals of 20.00 chs.

80.12 Falls 12 lks. S. of the ¼ sec. cor. bet. secs. 25 and 30,  
on W. bdy. of Tp.

Thence I run

N. 89° 58' E. on a true line through the middle of sec. 30.  
Over low overflow land, through scattering brush.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

- 7.30 Fence, brs. N. and S.
- 10.00 Slough, 1 ch. wide, brs. N. 65° E. and S. 65° W.
- 20.12 Set an iron post for 1/16 sec. cor. No. 8, bet. the NW. and SW. quarters of sec. 30, with brass cap stamped
- 1/16 S 30 in N. half  
No 8 1911 in S. half, from which
- A cottonwood 13 ins. dia. brs. S. 54½° E., 44 lks. dist.  
Mkd. 1/16 S 30 B T.
- A cottonwood 24 ins. dia. brs. N. 41½° E., 89 lks. dist.  
Mkd. 1/16 S 30 B T.
- 40.12 Set an iron post for center ¼ sec. cor. of sec. 30, with brass cap stamped C ¼ S 30 1911, from which
- A cottonwood 30 ins. dia. brs. S. 30° E., 61 lks. dist.  
Mkd. C ¼ S 30 B T.
- A cottonwood 36 ins. dia. brs. N. 56½° W., 137 lks. dist.  
Mkd. C ¼ S 30 B T.
- Dig pits 18x18x12 ins., E., W., and S., 3 ft. dist., and N. of cor. 7 ft., and raise a mound of earth 4 ft. base, 2 ft. high, N. of cor.
- 55.70 Fence in slough, brs. N. and S.
- 60.12 Set an iron post for 1/16 sec. cor. No. 7, bet. the NE. and SE. quarters of sec. 30, with brass cap stamped
- 1/16 S 30 in N. half  
No 7 1911 in S. half, from which
- A cottonwood 12 ins. dia. brs. S. 5¼° E., 57 lks. dist.  
Mkd. 1/16 S 30 B T.
- A cottonwood 18 ins. dia. brs. North, 57 lks. dist.  
Mkd. 1/16 S 30 B T.
- Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3½ ft. base, 1½ ft. high, N. of cor.
- 73.00 Indian cabin brs. S., 2 chs. dist.
- 74.00 Slough, brs. N. 60° E. and S. 60° W.  
Leave overflow land.
- 77.00 Fence, brs. N. 60° E. and S. 60° W.
- 78.00 Road, brs. N. 60° E. and S. 60° W.
- 80.12 The ¼ sec. cor. bet. secs. 29 and 30.
- Land, low bottom and overflow, - agricultural and grazing.  
Soil, adobe, 1st rate.  
Timber, scattering mesquite, willow and cottonwood.  
Dense brush of arrow weed.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

From the 1/16 sec. cor. No. 6, bet. secs. 29 and 30 (N.½)  
I run

S. 89° 53' W. on a random line through the middle of the  
N. half of sec. 30, setting temp. cors. at intervals  
of 20.00 chs.

80.16 Falls 7 lks. S. of the 1/16 sec. cor. No. 6, bet. secs.  
25 and 30 (N.½) on W. bdy. of Tp.

Thence I run

N. 89° 56' E. on a true line through the middle of the  
N. half of sec. 30.

Over low overflow land, through scattering brush.

20.16 Set an iron post for 1/16 sec. cor. No. 3, in center of  
the NW¼ of sec. 30, with brass cap stamped

1/16 S 30 in N. half  
No 3 1911 in S. half, from which

A cottonwood 18 ins. dia. brs. N. 37½° W., 133 lks. dist.  
Mkd. 1/16 S 30 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

36.00 Fence, brs. N. 10° W. and S. 10° E.

40.16 Set an iron post for 1/16 sec. cor. No. 4, bet. the NE.  
and NW. quarters of sec. 30, with brass cap stamped

1/16 S 30 in N. half  
No 4 1911 in S. half, from which

A willow 8 ins. dia. brs. N. 10° W., 81 lks. dist.  
Mkd. 1/16 S 30 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

60.16 Set an iron post for 1/16 sec. cor. No. 5, in center of  
the NE¼ of sec. 30, with brass cap stamped

1/16 S 30 in N. half  
No 5 1911 in S. half, from which

A cottonwood 18 ins. dia. brs. N. 27° 30' W., 126 lks. dist.  
Mkd. 1/16 S 30 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.

72.45 Road, brs. N.  $10^{\circ}$  E. and S.  $10^{\circ}$  W.

80.16 The  $1/16$  sec. cor. No. 6, bet. secs. 29 and 30 (N.  $\frac{1}{2}$ ).

Land, nearly level, overflow, - agricultural.

Soil, adobe, 1st rate.

Timber, scattering, willow and cottonwood.

Dec. 19, 1911. At 8 a.m., l.m.t., I set off  $34^{\circ} 06'$  on the  
lat. arc,  $23^{\circ} 20\frac{1}{4}'$  S. on the decl. arc, and determine a  
meridian with the solar, at the cor. of secs. 19, 20,  
29 and 30.

Thence I run

N.  $0^{\circ} 03'$  W. bet. secs. 19 and 20.

Over low bottom overflow land, through scattering brush.

15.20 Fence, brs. N.  $10^{\circ}$  W. and S.  $10^{\circ}$  E.

20.00 Set an iron post for  $1/16$  sec. cor. No. 12, bet. secs. 19  
and 20 (S.  $\frac{1}{2}$ ) with brass cap stamped

$1/16$  S 19 in W. half

S 20 in E. half

No 12 1911 in S., from which

A cottonwood 16 ins. dia. brs. N.  $40^{\circ} 45'$  W., 50 lks. dist.

Mkd.  $1/16$  S 19 B T.

A cottonwood 14 ins. dia. brs. S.  $14^{\circ} 15'$  E., 51 lks. dist.

Mkd.  $1/16$  S 20 B T.

Dig pits  $18 \times 18 \times 12$  ins. N. and S. of cor. 3 ft. dist.,

and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,

W. of cor.

25.60 Fence, brs. N.  $85^{\circ}$  E. and S.  $85^{\circ}$  W.

40.00 Set an iron post for the  $\frac{1}{4}$  sec. cor. bet. secs. 19 and 20  
with brass cap stamped

$\frac{1}{4}$  S 19 in W. half

S 20 in E. half

1911 in S., from which

A cottonwood 16 ins. dia. brs. S.  $14^{\circ} 30'$  E., 30 lks. dist.

Mkd.  $\frac{1}{4}$  S 20 B T.

A willow 14 ins. dia. brs. S.  $71^{\circ} 45'$  W., 58 lks. dist.

Mkd.  $\frac{1}{4}$  S 19 B T.

Dig pits  $18 \times 18 \times 12$  ins. N. and S. of cor. 3 ft. dist.,

and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,

W. of cor.

Subdivision of frac. T. 9 N., R. 20 W.

Chains

48.10 Fence, brs. N. 55° W. and S. 55° E.

49.50 Left bank of Colorado River, course S. 80° W.

Set an iron post for M.C. of frac. secs. 19 and 20, with  
brass cap stamped

M C in N. half  
T 9 N S 19 in SW. quadrant  
R 20 W S 20 in SE. quadrant  
1911 in S.  
5 notches on E. edge

Dig a pit 36x36x12 ins. S ft. S. of cor., and raise a  
mound of earth 4 ft. base, 2 ft. high, S. of post.

Land, low, nearly level, overflow, - agricultural.  
Soil, adobe, 1st rate.  
Timber, scattering willow and cottonwood and dense arrow  
weed brush.

-----  
From the cor. of secs. 16, 17, 20 and 21, I run  
S. 89° 57' W. on a true line bet. secs. 17 and 20.  
Over low bottom land, through scattering brush.

2.00 Enter overflow land, brs. N. 60° E. and S. 60° W.

20.00 Set an iron post for 1/16 sec. cor. No. 1, bet. secs. 17  
and 20 (E. 1/2) with brass cap stamped

1/16 S 17 in N. half  
S 20 No 1 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.

40.00 Set an iron post for 1/4 sec. cor. bet. secs. 17 and 20,  
with brass cap stamped

1/4 S 17 in N. half  
S 20 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.

44.23 Fence, brs. N. 75° W. and S. 75° E.

44.50 Left bank of Colorado River, course S. 45° W.

Set an iron post for M.C. of secs. 17 and 20, with brass  
cap stamped



## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

M C in W. half  
 T 9 N S 17 in NE. quadrant  
 R 20 W S 20 in SE. quadrant  
 1911 in S.  
 3 notches on S. edge

Dig a pit 36x36x12 ins. 8 ft. E. of cor., and raise a mound of earth 4 ft. base, 2 ft. high, E. of post.

Land, low bottom and overflow, - agricultural.  
 Soil, adobe, 1st rate.  
 Scattering brush of arrow weed.

-----  
 From 1/16 sec. cor. No. 12, bet. secs. 19 and 20 (S.  $\frac{1}{2}$ )

I run

N. 89° 57' E. on a random line through the middle of the S. half of sec. 20, setting temp. cors. at intervals of 20.00 chs.

79.80 Falls 5 lks. N. of the 1/16 sec. cor. No. 12, bet. secs. 20 and 21 (S.  $\frac{1}{2}$ ).

Thence I run

S. 89° 59' W. on a true line through the middle of the S. half of sec. 20.

Over low bottom land, through scattering brush.

0.90 Road, brs. N. 30° E. and S. 30° W.

5.00 Road, brs. N. 30° E. and S. 30° W.

8.75 Wash, course S. 50° W.

10.80 Road, brs. N. 60° E. and S. 60° W.

13.00 Indian cabin, brs. S., 6 chs. dist.

13.10 Fence, brs. N. and S.

14.40 Wash, course S.

15.15 Fence, brs. N. 40° E. and S. 40° W.

Enter field.

18.05 Fence, brs. N. 15° W. and S. 15° E.

Leave field.

19.95 Set an iron post for 1/16 sec. cor. No. 11, in the center of the SE  $\frac{1}{4}$  of sec. 20, with brass cap stamped

1/16 S 20 in N. half  
 No 11 1911 in S. half

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

A cottonwood 30 ins. dia. brs. S. 22° 30' W., 111 lks. dist.  
Mkd. 1/16 S 20 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

39.90 Set an iron post for 1/16 sec. cor. No. 10, bet. the SE.  
and SW. quarters of sec. 20, with brass cap stamped

1/16 S 20 in N. half  
No 10 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

49.75 Fence, brs. N. 50° W. and S. 50° E.

54.00 Enter overflow land, brs. N. and S.

59.85 Set an iron post for 1/16 sec. cor. No. 9, in center of  
the SW¼ of sec. 20, with brass cap stamped

1/16 S 20 in N. half  
No 9 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3½ ft. base, 1½ ft. high,  
N. of cor.

69.90 Road, brs. N. and S.

79.80 The 1/16 sec. cor. No. 12, bet. secs. 19 and 20 (S. ¼).

Land, low bottom and overflow, - agricultural.  
Soil, adobe, 1st rate.  
Dense brush of arrow weed.

-----  
From the ¼ sec. cor. bet. secs. 19 and 20, I run  
N. 89° 57' E. on a random line through the middle of sec.  
20, setting temp. cors. at intervals of 20.00 chs.

79.80 Falls 5 lks. S. of the ¼ sec. cor. bet. secs. 20 and 21.

Thence I run

S. 89° 55' W. on a true line through the middle of sec.  
20.

Over low bottom land, through scattering brush.

14.90 Fence, brs. N. and S.

## Subdivision of frag. T. 9 N., R. 20 W.

## Chains

- 18.15 Wash, course S. 10° E.
- 19.95 Set an iron post for 1/16 sec. cor. No. 7, bet. the NE. and SE. quarters of sec. 20, with brass cap stamped  
 1/16 S 20 in N. half  
 No 7 1911 in S. half, from which  
 A cottonwood 24 ins. dia. brs. S. 89° 30' E., 133 lks. dist.  
 Mkd. 1/16 S 20 B T.  
 Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3½ ft. base, 1½ ft. high, N. of cor.
- 19.96 Middle of wash, course S.
- 20.15 Fence, brs. N. and S.
- 31.20 Enter slough, brs. N. and S.
- 31.60 Leave slough, brs. N. and S.
- 39.70 Set an iron post for witness cor. to the center ¼ sec. cor. of sec. 20, with brass cap stamped  
 W C C ¼ S 20 1911, from which  
 A mesquite 6 ins. dia. brs. N. 73° 30' E., 158 lks. dist.  
 Mkd. C ¼ S 20 W C B T.  
 Dig pits 18x18x12 ins. E., W., and S., 3 ft., and N. of cor. 7 ft. dist., and raise a mound of earth 3½ ft. base, 1½ ft. high, N. of cor.
- 39.90 True point for center ¼ sec. cor. falls in wash, course N.
- 48.00 Enter overflow land, brs. N. 10° E. and S. 10° W.
- 59.85 Set an iron post for 1/16 sec. cor. No. 8, bet. the SW. and NW. quarters of sec. 20, with brass cap stamped  
 1/16 S 20 in N. half  
 No 8 1911 in S. half, from which  
 A willow 6 ins. dia. brs. N. 27° 30' E., 41 lks. dist.  
 Mkd. 1/16 S 20 B T.  
 Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3½ ft. base, 1½ ft. high, N. of cor.
- 71.10 Fence, brs. N. 60° W. and S. 60° E.
- 79.80 The ¼ sec. cor. bet. secs. 19 and 20.  
 Land, nearly level, low bottom and overflow, - agricultural.  
 Soil, adobe, 1st rate.  
 Timber, scattering mesquite, willow and cottonwood.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

Dec. 19, 1911. At the 1/16 sec. cor. bet. secs. 20 and 21 (N.  $\frac{1}{2}$ ) I set off  $23^{\circ} 23\frac{1}{2}'$  S. on the decl. arc, and at 11h 54m 47s a.m., l.m.t., observe the sun on the meridian; the resulting lat. is  $34^{\circ} 06\frac{1}{2}'$ , the proper lat.

Thence I run

S.  $89^{\circ} 56'$  W. on a true line through the middle of the N. half of sec. 20.

Over nearly level bottom land, through scattering brush.

14.10 Wash, course N.  $5^{\circ}$  E.

20.00 Set an iron post for the 1/16 sec. cor. No. 5, in the center of the NE $\frac{1}{4}$  of sec. 20, with brass cap stamped

1/16 S 20 in N. half  
No 5 1911 in S. half, from which

A willow 8 ins. dia. brs. N.  $60^{\circ} 37'$  E., 54 lks. dist.  
Mkd. 1/16 S 20 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.

20.54 Fence, brs. N.  $45^{\circ}$  W. and S.  $45^{\circ}$  E.

29.00 Enter overflow land, brs. N.  $60^{\circ}$  E. and S.  $60^{\circ}$  W.

40.00 Set an iron post for 1/16 sec. cor. No. 4, bet. the NE. and NW. quarters of sec. 20, with brass cap stamped

1/16 S 20 in N. half  
No 4 1911 in S. half, from which

A cottonwood 20 ins. dia. brs. S.  $76^{\circ} 15'$  E., 139 lks. dist.  
Mkd. 1/16 S 20 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.

60.00 Set an iron post for 1/16 sec. cor. No. 3, in center of the NW $\frac{1}{4}$  of sec. 20, with brass cap stamped

1/16 S 20 in N. half  
No 3 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

61.20 Left bank of Colorado River, course S. 60° W.

Set an iron post for 1/16 M.C. of frac. sec. 20, with  
brass cap stamped

M C in W. half  
1/16 S 20 in E. half  
1911 in S.

Dig a pit 36x36x12 ins. S ft. N. of cor., and raise a  
mound of earth 4 ft. base, 2 ft. high, N. of post.

Land, low, nearly level bottom and overflow, - agricultural.  
Soil, adobe, 1st rate.  
Timber, scattering cottonwood and willow.  
Brush of dense arrow weed.

-----  
From the 1/16 sec. cor. No. 12, bet. secs. 19 and 20, (S. 1/2)

I run

S. 89° 56' W. on a random line through the middle of the  
S. half of sec. 19, setting temp. cors. at intervals of  
20.00 chs.

80.08 Falls 5 lks. S. of the 1/16 sec. cor. No. 12, bet. secs.  
19 and 24 (S. 1/2) on W. bdy. of Tp.

Thence I run

N. 89° 58' E. on a true line through the middle of the  
S. half of sec. 19.

Over low, overflow land, through scattering brush.

14.00 Fence, brs. N. 25° W. and S. 25° E.

20.08 Set an iron post for 1/16 sec. cor. No. 9, in center of  
the SW 1/4 of sec. 19, with brass cap stamped

1/16 S 19 in N. half  
No 9 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,  
N. of cor.

40.08 Set an iron post for 1/16 sec. cor. No. 10, bet. the SW.  
and SE. quarters of sec. 19, with brass cap stamped

1/16 S 19 in N. half  
No 10 1911 in S. half, from which

A cottonwood 16 ins. dia. brs. N. 87° E., 11 lks. dist.  
Mkd. 1/16 S 19 B T.

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.

60.08 Set an iron post for 1/16 sec. cor. No. 11, in center of  
the SE $\frac{1}{4}$  of sec. 19, with brass cap stamped

1/16 S 19 in N. half  
No 11 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.

61.50 Road, brs. N. 30° W. and S. 30° E.

79.00 Fence, brs. N. 15° W. and S. 15° E.

80.08 The 1/16 sec. cor. No. 12, bet. secs. 19 and 20 (S. $\frac{1}{4}$ ).

Land, nearly level, low bottom, and overflow, - agricul-  
tural.

Soil, adobe, 1st rate.

Timber, scattering willow, and cottonwood.

Dense brush of arrow weed.

From the  $\frac{1}{4}$  sec. cor. bet. secs. 19 and 20, I run

S. 89° 56' W. on a true line through the middle of sec. 19

Over nearly level overflow land, through thick brush.

20.00 Set an iron post for 1/16 sec. cor. No. 7, bet. the NE.  
and SE. quarters of sec. 19, with brass cap stamped

1/16 S 19 in N. half  
No 7 1911 in S. half, from which

A cottonwood 10 ins. dia. brs. S. 34° 30' E., 89 lks. dist.  
Mkd. 1/16 S 19 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.

39.40 Road, brs. N. 60° W. and S. 60° E.

40.00 Set an iron post for center  $\frac{1}{4}$  sec. cor. of sec. 19, with  
brass cap stamped C  $\frac{1}{4}$  S 19 1911, from which

A cottonwood 16 ins. dia. brs. N. 79° 30' E., 34 lks. dist.  
Mkd. C  $\frac{1}{4}$  S 19 B T.

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist.,  
and raise a mound of earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,

## Subdivision of frac. T. 9 N., R. 20 W.

## Chains

N. of cor.

58.00 Road, brs. N. 45° E. and S. 45° W.

60.00 Set an iron post for 1/16 sec. cor. No. 8, bet. the NW. and SW. quarters of sec. 19, with brass cap stamped

1/16 S 19 in N. half  
No 8 1911 in S. half

Dig pits 18x18x12 ins. E. and W. of cor. 3 ft. dist., and raise a mound of earth 3½ ft. base, 1½ ft. high, N. of cor.

71.20 Left bank of Colorado River, course S. 45° W.

1/16  
Set an iron post for M.C. of frac. sec. 19, with brass cap stamped

M C in W. half  
1/16 S 19 in E. half  
1911 in S., from which

A cottonwood 12 ins. dia. brs. S. 5° 30' E., 58 lks. dist.  
Mkd. 1/16 S 19 M C B T.

A cottonwood 8 ins. dia. brs. N. 65° 45' E., 60 lks. dist.  
Mkd. 1/16 S 19 M C B T.

Dig a pit 36x36x12 ins. 8 ft. E. of cor., and raise a mound of earth 4 ft. base, 2 ft. high, E. of post.

Land, nearly level, overflow, - agricultural.

Soil, adobe, 1st rate.

Timber, willow, cottonwood and arrow weed.

From the 1/16 sec. cor. No. 7, bet. the NE. and SE. quarters of sec. 19, I run

N. 0° 03' W. on a true line through the middle of the NE¼ of sec. 19.

Over overflow land, through thick brush.

6.00 Left bank of Colorado River, course S. 80° W.

Set an iron post for 1/16 M.C. of frac. sec. 19, with brass cap stamped

M C in N. half  
1/16 S 19 1911 in S. half, from which

A cottonwood 16 ins. dia. brs. S. 85° E., 74 lks. dist.  
Mkd. 1/16 S 19 M C B T.

Dig a pit 36x36x12 ins. 8 ft. S. of cor., and raise a mound of earth 4 ft. base, 2 ft. high, S. of post.

## Subdivision of frac. T. 9-N., R. 20 W.

Chains

Land, nearly level, overflow, - agricultural.  
Soil, adobe, 1st rate.  
Timber, willow, cottonwood and arrow weed.

---

From the 1/16 sec. cor. No. 12, bet. secs. 16 and 17 (S.  $\frac{1}{2}$ )

I run

S. 89° 57' W. on a true line through the middle of the  
SE  $\frac{1}{4}$  of sec. 17.

Over low overflow land, through scattering brush.

8.90 Left bank of Colorado River, course S. 60° W.

Set an iron post for 1/16 M.C. of frac. sec. 17, with  
brass cap stamped

M C in W. half  
1/16 S 17 in E. half  
1911 in S.

Dig a pit 36x36x12 ins. 8 ft. E. of cor., and raise a  
mound of earth 4 ft. base, 2 ft. high, E. of post.

Land, nearly level, overflow, - agricultural.  
Soil, adobe, 1st rate.  
Timber, scattering willow and arrow weed.

---

Meanders of Left Bank of Colorado River,  
down stream.

I commence at the M.C. of frac. secs. 1 and 36, on N.bdy.  
of Tp.

Dec. 20, 1911. At 8 a.m., l.m.t., at this cor., I set  
off 34° 09  $\frac{1}{2}$ ' on the lat. arc, 23° 20  $\frac{1}{2}$ ' S. on the decl.  
arc, and determine a meridian with the solar.

Thence I run with meanders of sec. 1.

Through heavy brush, over nearly level bottom land.

S. 57° 45' W.,	1.90	chs.
S. 35° 30' W.,	5.80	"
S. 25° 15' W.,	4.95	"
S. 39° 00' W.,	8.70	"
S. 40° 30' W.,	11.80	"

To the M.C. of frac. secs. 1  
and 2.

Land, nearly level bottom, - agricultural.  
Soil, adobe, 1st rate.  
Timber, cottonwood, willow, mesquite and arrow weed.



## Meanders of frac. T. 9 N., R. 20 W.

## Chains

Thence in sec. 2.

Through thick brush, over level bottom.

S. 50° 30' W.	1.85	chs.	
S. 41° 00' W.	2.60	"	
S. 45° 30' W.	3.10	"	
S. 36° 45' W.	4.70	"	
S. 37° 00' W.	6.80	"	
S. 35° 00' W.	7.30	"	
S. 34° 15' W.	4.90	"	
S. 35° 15' W.	8.95	"	AT 5.00 chs. - Agency Pumping Plant.
S. 24° 15' W.	3.75	"	
S. 34° 45' W.	3.55	"	
S. 30° 05' W.	18.60	"	To the M.C. bet. frac. secs. 2 and 11.

Land, river bottom, - grazing.

Soil, adobe and sandy, 1st rate.

Timber, willow, cottonwood, mesquite and arrow weed.

Thence in sec. 11.

Over level land, through dense brush.

S. 25° 00' W.,	12.25	chs.	
S. 49° 45' W.,	3.25	"	
S. 20° 00' W.,	4.60	"	
S. 30° 30' W.,	2.90	"	To 1/16 M.C. of sec. 11 (N. $\frac{1}{4}$ ) which is 7.90 chs. N. 89° 55' W. of 1/16 sec. cor. No. 4, bet. the NE. and NW. quarters of sec. 11.
S. 57° 30' W.,	1.35	"	
S. 27° 00' W.	20.00	"	
S. 23° 00' E.	1.60	"	To 1/16 M.C. of sec. 11, which is 17.50 chs. N. 89° 55' W. of the center $\frac{1}{4}$ sec. cor. of sec. 11.
S. 36° 15' W.	21.15	"	
S. 20° 45' W.	3.15	"	To 1/16 M.C. of sec. 11 (S. $\frac{1}{4}$ ) which is 11.30 chs. N. 89° 55' W. of 1/16 sec. cor. No. 9, in center of the SW $\frac{1}{4}$ of sec. 11.
S. 31° 30' W.	16.65	"	To M.C. bet. frac. secs. 10 and 11.

Land, river bottom, - agricultural.

Soil, sandy and adobe, 1st rate.

Timber, thick willow, mesquite; and arrow weed, brush.

Thence in sec. 10.

Through thick brush.

S. 38° 45' W.	6.75	chs.	
S. 29° 45' E.	0.65	"	To M.C. bet. frac. secs. 10 and 15.

Land, river bottom, - agricultural.

Soil, sandy and adobe, 1st rate.

Timber, thick willow,

Brush of arrow weed.

## Meanders of frac. T. 9 N., R. 20 W.

## Chains

Thence in Sec. 15.

Over level land, through thick brush.

S. 32° 09' W.	22.68	chs.	
S. 51° 15' E.	1.35	"	To 1/16 M.C. of sec. 15 (N. $\frac{1}{4}$ ) which is 15 chs. S. 89° 57' W. of 1/16 sec. cor. No. 6, bet. secs. 14 and 15 (N. $\frac{1}{4}$ ).
S. 32° 30' W.	23.06	"	
S. 38° 00' E.	0.71	"	To 1/16 M.C. of sec. 15, which is 27 chs. S. 89° 57' W. of the $\frac{1}{4}$ sec. cor. bet. secs. 14 and 15.
S. 44° 15' W.	14.35	"	
S. 60° 30' W.	18.24	"	
S. 2° 30' W.	0.80	"	To 1/16 M.C. of sec. 15 (S. $\frac{1}{4}$ ) which is 12.90 chs. S. 89° 57' W. of 1/16 sec. cor. No. 10, bet. sec. SE. and SW. quarters of sec. 15.
S. 79° 15' W.	4.86	"	
S. 52° 30' W.	3.00	"	To 1/16 M.C. of Sec. 15, which is 17.25 chs. N. 0° 02' W. of 1/16 sec. cor. No. 2, bet. secs. 18 and 22 (W. $\frac{1}{4}$ ).
S. 72° 30' W.	5.45	"	
S. 86° 30' W.	14.87	"	To M.C. bet. frac. secs. 15 and 16.

Land, low bottom, - agricultural.  
Soil, adobe and sandy, 1st rate.  
Thick cottonwood and arrow weed brush.

Dec. 20, 1911. At the M.C. of frac. secs. 15 and 16, I set off 23° 24 $\frac{1}{2}$ ' S. on the decl. arc, and at 11h 57m 17s a.m., l.m.t., observe the sun on the meridian; the resulting lat. is 34° 07', the proper lat.

Thence with meanders in sec. 16.

Through thick arrow weed.

N. 60° 30' W.	10.75	chs.	To 1/16 M.C. of sec. 16, which is 10.67 chs. N. 89° 56' E. of 1/16 sec. cor. No. 11, in center of the SE $\frac{1}{4}$ of sec. 16. At 7.50 chs., Enter overflow land.
N. 13° 45' E.	4.55	"	
N. 38° 00' W.	12.70	"	
N. 65° 30' W.	4.40	"	To 1/16 M.C. of sec. 16, which is 16.20 chs. N. 0° 02' W. of 1/16 sec. cor. No. 11, in center of the SE $\frac{1}{4}$ of sec. 16.
N. 55° 45' W.	6.90	"	To 1/16 M.C. of sec. 16, which is 14.30 chs. E. of the center $\frac{1}{4}$ sec. cor.
N. 50° 00' W.	8.90	"	
N. 26° 45' W.	7.50	"	
N. 83° 15' W.	4.15	"	To 1/16 M.C. of sec. 16, which

Meanders of frac. T. 9 N., R. 20 W.

Chains

is 12.90 chs. N.0°02'W. of the center  $\frac{1}{2}$  sec. cor.  
 N. 77° 15' W. 11.55 chs.  
 S. 57° 30' W. 10.35 " To 1/16 M.C. of sec.16, which is 10 chs. N.0°02'W., of 1/16 sec.cor.No.8, bet. the NW.and SW. quarters of sec. 16.  
 S. 69° 30' W. 2.70 "  
 S. 55° 00' W. 12.15 "  
 S. 28° 30' W. 15.62 " To M.C. of frac. secs. 16 and 19.

Land, bottom and overflow, - agricultural.  
 Soil, sandy, 2nd rate.  
 Timber, thick willow, and arrow weed.

Thence in sec. 17.

Over level land, through thick brush.

S. 50° 00' W. 11.70 chs.  
 S. 4° 30' E. 0.98 " To 1/16 M.C. of sec. 17, which is 8.90 chs. S.89°57'W. of 1/16 sec.cor.No.12, bet.secs. 16 and 17 (S. $\frac{1}{2}$ ).  
 S. 76° 45' W. 13.20 "  
 S. 66° 45' W. 11.15 "  
 S. 52° 45' W. 11.08 " To 4 ft. bank; thence along bank.  
 S. 31° 30' W. 7.00 " To M.C. bet. frac. secs. 17 and 20.

Land, overflow, - agricultural.  
 Soil, sandy and adobe, 2nd rate.  
 Timber, thick willow and arrow weed.

Thence in sec. 20.

Through thick willow and arrow weed.

S. 35° 00' W. 4.70 chs.  
 S. 30° 00' W. 3.30 "  
 S. 33° 30' W. 2.45 "  
 S. 28° 45' W. 4.00 "  
 S. 39° 30' W. 4.00 "  
 S. 51° 30' W. 3.80 "  
 S. 49° 45' W. 2.05 "  
 S. 59° 00' W. 2.15 " To 1/16 M.C. of sec. 20, which is 21.20 chs. S.89°56'W. of 1/16 sec.cor.No.4, bet.the NE. and NW.quarters of sec. 20.  
 S. 56° 30' W. 7.35 "  
 S. 70° 30' W. 1.90 "  
 S. 68° 00' W. 2.60 "  
 S. 62° 00' W. 2.90 "  
 S. 54° 00' W. 4.05 "  
 S. 70° 30' W. 2.55 " To M.C. bet. frac. secs. 19 and 20.

Land, nearly level, overflow, - agricultural.  
 Soil, adobe and sandy, 2nd rate.  
 Timber, thick willow and arrow weed.

Meanders of frac. T. 9 N., R. 20 W.

Chains

Thence in sec. 19.

Through thick willow and arrow weed.

S. 86° 30' W.	1.60	chs.	At 1.40 chs. - Fence, brs. N. 75° W. and S. 75° E.
S. 76° 00' W.	1.35	"	
S. 62° 15' W.	1.35	"	
S. 63° 00' W.	2.60	"	
S. 88° 30' W.	1.65	"	
S. 80° 30' W.	3.15	"	
S. 85° 15' W.	1.15	"	
N. 79° 30' W.	1.35	"	
S. 89° 15' W.	2.60	"	
N. 89° 00' W.	2.40	"	
S. 58° 45' W.	1.65	"	

To 1/16 M.C. of sec. 19, which is 6.00 chs. N. 0° 03' W. of 1/16 sec. cor. No. 7, bet. the NE. and SE. quarters of sec. 19. Bank, 6 ft. high. Thence along bank.

N. 65° 45' W.	2.10	"	
S. 86° 00' W.	5.90	"	
N. 74° 30' W.	1.60	"	
N. 83° 00' W.	2.15	"	
N. 80° W.	8.75	"	
S. 84° 45' W.	5.55	"	
N. 86° 00' W.	8.55	"	
S. 83° 45' W.	2.35	"	
S. 72° 00' W.	10.70	"	
S. 42° 30' W.	6.86	"	

To 1/16 M.C. on N. and W. middle line, 11.20 chs. S. 89° 56' W. of 1/16 sec. cor. No. 8, bet. the NW. and SW. quarters of sec. 19.

S. 77° 00' W.	3.90	"	
S. 39° 15' W.	8.05	"	

To M.C. of frac. secs. 19 and 24, on W. bdy. of Tp.

Land, nearly level, overflow, - agricultural.  
Soil, sandy and adobe, 2nd rate.  
Timber, thick willow and arrow weed.

-----

Retracement of the boundaries of Parker Townsite.

Dec. 20, 1911.

I am unable to find any trace of the NW. cor. of Parker Townsite, which was a point on the Left bank of the Colorado River. My surveys closing on the boundaries of said townsite will not close by using the reported bearings on the townsite plat. I herefore decide it to be necessary to retrace said boundaries.

Therefore at the 1/16 sec. cor. No. 7, bet. the NE. and SE. quarters of sec. 31, T. 3 N., R. 1 E., Colorado River Base and Meridian, which is a point on Parker Townsite, at 6h 0m P.M., l.m.t., I observe Polaris in position and mark the line of sight upon the ground. Latitude Station, 34° 08½', Long. 114° 18' W.

I test my watch this date at the Parker depot when the correct time was given over the Western Union Wire. I find my watch has been running at a uniform rate.

Time, U. C. of Polaris, December 20, 1911, 7h 34.8m

Time of observation, December 20, 1911, 6h 00m

Hour Angle 1h 34,8m

The corresponding azimuth is 0° 34' E.

Dec. 21, 1911. At 8 a.m., I turn 0° 34' to the West of the line of observation of Polaris and mark the meridian thus established with a tack centered hub, 500 feet North. My instrument was found to orient a meridian on Dec. 19th, when tested at camp. At 8h 30m a.m., l.m.t., I set off 34° 08' on the lat. arc, 23° 23' S. on the decl. arc, and determine a meridian with the solar. I find the meridian determined with the solar agrees with the meridian determined by Polaris observation which I have just established. The 1/16 sec. cor. No. 7, bet. the NE. and SE. quarters of sec. 31, T. 3 N., R. 1 E., Colorado River Base and Meridian, is a pine post 8x8x12 ins. above ground, mkd. 1/16 on N., and P.T. on E.

## Retracement of the boundaries of Parker Townsite.

Feet	
	<p>I now turn <math>0^{\circ} 32'</math> to the West of the meridian established here to the line of block stakes set on the West bdy. of the townsite.</p> <p>Thence I run</p> <p>N. <math>0^{\circ} 32'</math> W. along the W. bdy. of Parker Townsite, and at</p>
1689.6	<p>Intersect the left bank of the Colorado River.</p> <p>The former monument has been washed out by the river.</p> <p>At this point, I set an iron post stamped N.W. Cor. P.T. which brs. N. <math>40^{\circ} 30'</math> E., 363.4 ft. dist. from the M.C. of secs. 1 and 2, T. 9 N., R. 20 W.</p> <p>I now return to the <math>1/16</math> sec. cor. No. 7, bet. the SE. and NE. quarters of sec. 31, T. 3 N., R. 1 E., Colorado River Base and Meridian, which is a point on the townsite boundary. I turn an angle of <math>89^{\circ} 29'</math> from my meridian to a flag at the <math>\frac{1}{4}</math> sec. cor. bet. secs. 31 and 32, T. 3 N., R. 1 E., Colorado River Base and Meridian.</p> <p>Thence I run</p> <p>N. <math>89^{\circ} 29'</math> E. along the townsite boundary.</p>
1319.0	<p>Intersect the <math>\frac{1}{4}</math> sec. cor. bet. secs. 31 and 32, Colorado River Base and Meridian, which is a pine post 8x8x12 ins. above ground, mkd. <math>\frac{1}{4}</math> S 31 on W., and P.T. <math>\frac{1}{4}</math> S 32 on E.</p> <p>I now sight on the back line and turn <math>89^{\circ} 58'</math> from the West to the South, sighting a flag at the cor. of secs. 5, 6, 31 and 32, Tps. 2 and 3 N., R. 1 E., Colorado River Base and Meridian.</p> <p>Thence I run</p> <p>S. <math>0^{\circ} 29'</math> E. along the W. bdy. of Parker Townsite.</p>
2638.6	<p>Intersect the cor. of secs. 5, 6, 31 and 32, Tps. 2 and 3 N., R. 1 E., Colorado River Base and Meridian, which is a granite stone 8x8x6 ins. above ground, marked with 1 notch on W. and 5 notches on E. face. N. of and alongside, is a wooden post 8x8x12 ins. above ground, not marked.</p>

Retracement of the boundaries of Parker Townsite.

Feet	
	<p>I backsight on the <math>\frac{1}{4}</math> sec. cor. bet. secs. 31 and 32, and deflect <math>0^{\circ} 29'</math> to the West, sighting flag at the SW. cor. of the townsite.</p> <p>Thence I run</p> <p>South along the W. bdy. of Parker Townsite.</p>
1322.9	<p>Intersect the SW. cor. of the townsite, which is the <math>\frac{1}{16}</math> sec. cor. No. 6, bet. secs. 5 and 6 (N.<math>\frac{1}{2}</math>), T. 2 N., R. 1 E., Colorado River Base and Meridian.</p> <p>This cor. is a wooden post 8x8x12 ins. above ground, marked P.T. <math>\frac{1}{16}</math> on NE. face, S.W. Cor. on the SE. face.</p> <p>I now backsight on my North line and turn <math>90^{\circ} 04'</math> from the North to the East, sighting the SE. cor. of the townsite.</p> <p>Thence I run</p> <p>S. <math>89^{\circ} 56'</math> E. along the S. bdy. of Parker Townsite.</p>
1325.5	<p>Intersect the <math>\frac{1}{16}</math> sec. cor. No. 3, in the center of the NW<math>\frac{1}{4}</math> of sec. 5, T. 2 N., R. 1 E., Colorado River Base and Meridian. This cor. is a point on the S. bdy. of Parker Townsite, and is a pine post 8x8x12 ins. above ground, marked <math>\frac{1}{16}</math> S 5 on N. face.</p>
2651.1	<p>Intersect the <math>\frac{1}{16}</math> sec. cor. No. 4, bet. the NE. and NW. quarters of sec. 5, T. 2 N., R. 1 E., Colorado River Base and Meridian. This cor. is a point on the S. bdy. of Parker Townsite, and is a wooden post 8x8x12 ins. above ground, marked <math>\frac{1}{16}</math> S 5 on N. face.</p>
3976.6	<p>Intersect the <math>\frac{1}{16}</math> sec. cor. No. 5, in center of the NE<math>\frac{1}{4}</math> of sec. 5, T. 2 N., R. 1 E., Colorado River Base and Meridian. This cor. is designated as a point on the S. bdy. of Parker Townsite, and is a wooden post 8x8x12 ins. above ground, marked <math>\frac{1}{16}</math> S 5 on N. face.</p>
4951.0	<p>Middle of A. T. and S.F. R.R. track, brs. N.<math>27^{\circ}10'W.</math> and S. <math>27^{\circ} 10'</math> E.</p>

Retracement of the boundaries of Parker Townsite

Feet

5302.2 Intersect the 1/16 sec. cor. No. 6, bet. secs. 4 and 5, (N. 1/2) T. 2 N., R. 1 E., Colorado River Base and Meridian. This is the SE. cor. of Parker Townsite, and is a wooden post 8x8x12 ins. above ground, marked P.T. S.E. Cor. on N. face.

-----

The S. bdy. of Parker Townsite has a bearing of S.89°56'E. The back bearing is this line is therefore N.89°55'W. on account of convergency. At the SE. Cor. of the townsite I sight on line of S. bdy. and turn 89° 26' from the West to the North, sighting a flag at the cor. of secs. 4, 5, 32 and 33, Tps. 2 and 3 N., R. 1 E., Colorado River Base and Meridian.

Thence I run

N. 0° 29' W. along the E. bdy. of the townsite.

1322.0 Intersect the cor. of secs. 4, 5, 32 and 33, T. 2 and 3 N., R. 1 E., Colorado River Base and Meridian, which is a granite stone 8x8x12 ins. above ground, marked with 2 notches on W. and 4 notches on N. faces. N. of and alongside is a wooden post 8x8x12 ins. above ground, marked T 3 N S 32 on NW. face, R 1 E S 33 on NE. face, R 1 E S 4 on SE. face and T 2 N S 5 on SW. face.

6599.1 Intersect the cor. of secs. 28, 29, 32 and 33, T. 3 N., R. 1 E., Colorado River Base and Meridian, which is an angle point on the townsite boundary.

This cor. is a wooden post 8x8x12 ins. above ground marked T 3 N S 28 on NE., R 1 E S 33 on SE., S 32 on SW., S 29 on NW., and P.T. on SW. face.

-----

At this cor. I sight back on my line and turn 90° 00' from the South to the West, sighting on the 1/4 sec. cor. bet. secs. 29 and 32, T. 3 N., R. 1 E., Colorado River Base and Meridian.



## Retracement of the boundaries of Parker Townsite

Feet	
	Thence I run
	S. 89° 31' W. on a true line along the townsite boundary.
2639.6	Intersect the $\frac{1}{4}$ sec. cor. bet. secs. 29 and 32, T. 3 N., R. 1 E., Colorado River Base and Meridian, which is a wooden post 8x8x12 ins. above ground, mkd. $\frac{1}{4}$ S 29 on N., S 32 on S., and P.T. on W. face, and is designated as a point on the townsite boundary.
	-----
	At this cor., I sight on flag at the cor. of secs. 28, 29, 32 and 33, and turn 89° 59 $\frac{1}{2}$ ' from the East to the North along the townsite boundary.
	Thence I run
	N. 0° 29 $\frac{1}{2}$ ' W. along the E. bdy. of the townsite.
2340.5	Intersect the NE. cor. of the townsite, on the left bank of the Colorado River, which is a wooden post 8x8x12 ins. above ground, mkd. N.E. Cor. P.T.
	My meanders in the subdivisions complete the retracement of the townsite. The Colorado River has washed in and the meander courses given on the townsite plat would now fall in the river most of their distance.

## Meanders of frac. T. 9 N., R. 20 W.

Chains

## GENERAL DESCRIPTION.

This township consists principally of agricultural land, the soil ranging from adobe to a sandy loam. The entire township is covered with dense and scattering brush. Practically all of the Indians on the reservation reside in the township. There was at one time considerable mesquite timber, but it has been cut down for fuel. The Indian Agency is situated in Sec. 14. The new Indian school is located in Sec. 2. A part of Parker Townsite is embraced in secs. 1 and 12.

The entire area of this township was embraced in Chandler Robbins survey in 1875, when he established the Colorado River Initial Point. The area embraced herein is now referred to the Gila & Salt River, Meridian and Base. A pumping plant is now in the course of construction, to water most of the area in this township.

GUY P. HARRINGTON

U.S. Surveyor.

## List of Assistants:

Earl G. Harrington ( )  
A. O. Stinson ) Instrumentmen

G. A. Simson ( )  
R. P. Duffy ) Chainmen  
Louis G. Hurst ( )  
Wm. Cort )

J. W. Rodgers ( )  
Clifford McLaughlin ) Moundsmen

Leonard Blodgett ( )  
W. J. Walshe ) Flagmen

Arnold Emmons ( )  
W. E. Rose )  
Henry Smith ( ) Axemen  
R. F. Henderson )

CERTIFICATE OF ASSISTANTS.

We, the undersigned, hereby certify upon honor that we assisted, to the best of our skill and ability,  
Guy P. Harrington, U. S. Surveyor, during the periods and in the capacities  
 stated opposite our several signatures, in surveying all those parts or portions of the Colorado  
River Indian Reservation

of the Gila & Salt River Meridian, in the State of Arizona  
 which are represented in the foregoing field notes as having been executed by him, and under his direc-  
 tion; and that said survey has been, in all respects, to the best of our knowledge and belief, well and  
 faithfully executed.

NAME.	PERIOD OF SERVICE.		CAPACITY.
	BEGUN.	ENDED.	
Henry Smith	Dec. 1, 1911	Dec. 19, 1911	Axeman
Emmons Arnold	Dec. 1, 1911	Dec. 26, 1911	Axeman
Randall Henderson	Nov. 1, 1911	Jan. 18, 1912	Axeman
Louis G. Hurst	Nov. 1, 1911	Feb. 27, 1912	Chainman
William Cort	Nov. 1, 1911	Feb. 27, 1912	Chainmen
Robert Smith	Mar. 1, 1912	Apr. 1, 1912	Axeman
E. W. Hoagland	Nov. 1, 1911	Apr. 1, 1912	Axeman & Chainman
C. A. Sinson	Nov. 1, 1911	Apr. 1, 1912	Chainman
John Mc Alpin	Jan. 1, 1912	Apr. 1, 1912	Axeman
Leonard D. Blodgett	Nov. 1, 1911	Apr. 1, 1912	Axeman & Flagman
Raymond P. Duffy	Nov. 1, 1911	Apr. 1, 1912	Chainman
W. J. Walshe	Nov. 1, 1911	Apr. 1, 1912	Flagman
P. T. Henderson	Jan. 25, 1912	Apr. 1, 1912	Axeman
Clifford McLaughlin	Nov. 1, 1911	Apr. 1, 1912	Moundsman
Geo. J. Ebner	Mar. 15, 1912	Apr. 1, 1912	Axeman
J. W. Rodgers	Nov. 1, 1911	Apr. 1, 1912	Moundsman
Charles Bowman	Nov. 1, 1911	Apr. 1, 1912	Flagman, Chainman and Axeman
Earl G. Harrington	Nov. 1, 1911	Apr. 1, 1912	Instrumentman
A. O. Stinson	Nov. 1, 1911	Apr. 1, 1912	Instrumentman
W. E. Rose	Nov. 1, 1911	Apr. 1, 1912	Axeman

Subscribed and certified to before me on the dates of the final service as shown above.

Guy P. Harrington

U. S. Surveyor.

FINAL OATH OF UNITED STATES SURVEYOR.

I, Guy P. Harrington, U. S. Surveyor, do solemnly swear that, in pursuance of special instructions received from the Commissioner of the General Land Office to A.F. Dunnington, Topographer in Charge bearing date of the 23rd day of November, 1910, I have well, faithfully, and truly, in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the Colorado River Indian Reservation

of the Gila & Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and I do further solemnly swear that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General for \_\_\_\_\_ and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

(For original oath, see field notes of this township filed in G.L.O.)

Guy P. Harrington  
U. S. Surveyor.

Subscribed by said Guy P. Harrington, and sworn to before me }  
this 9th day of July, 1912.

Fred C. Voight



County Clerk and Ex-Officio Clerk of the 4th Judicial District Court of the State of Nevada, in and for the County of Elko.

APPROVAL.

Commissioner of the General Land Office.  
OFFICE OF THE ~~UNITED STATES SURVEYOR GENERAL~~  
Washington, D.C., Feb 20, 1913

The foregoing field notes of the survey of the subdivision of T. 9 N., R. 20 W., of the Colorado River Indian Reservation, Arizona,

executed by Guy P. Harrington, U.S. Surveyor, under direction of A.F. Dunnington Topographer in Charge of Indian Surveys under his special instructions dated Nov. 23, 1910, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

(Signed) Fred Dennett

~~U.S. Surveyor General~~  
Commissioner of the General Land Office.

I certify that the foregoing transcript of the field notes of the above-described surveys in T. 9 N., R. 20 W., Arizona, has been correctly copied from the original notes on file in this office.

Fred Dennett  
~~U.S. Surveyor General~~

Commissioner of the General Land Office.

BOOK 2365

Washington, D.C., *Jan'y 31* 1913.

I hereby certify that the survey of the subdivision of T. 9 N., R. 20 W., of the Gila & Salt River Meridian, in the Colorado River Indian Reservation, Arizona, was made under my direction and supervision, and to the best of my knowledge and belief the field work was executed in strict accordance with the special instructions given me, dated Nov. 23, 1910, and the Manual of Surveying Instructions, and that these field notes are a correct representation thereof.

*A. F. Drumming*  
Topographer in Charge.