

2729

4-679

2729

221

(1)

SEP 2-1914

Book "J"

Resurvey & Subdivisions

BOOK 2729

FIELD NOTES

OF THE RESURVEY OF THE

Subdivision lines of

Township 11 South

Range 24 East

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

EXECUTED BY

Thomas B. Matthews,

In the capacity of U. S. Surveyor, under instructions dated May 7, 1913, issued by the United States Surveyor General to govern surveys included in Group No. 25, which were approved by the Commissioner of the General Land Office, May 15, 1913, pursuant to authority contained in the Act of Congress dated June 23, 1913.

Re Survey commenced November 20, 1913

Re Survey completed " 28, 1913

1A

Book "J"

BOOK 2729

INDEX DIAGRAM.

Township 11 South , Range 24 East

2nd Standard Parallel South

6	23	5	17	4	13	3	9	2	5	1
23		22		16		12		8		4
7	22	8	16	9	12	10	8	11	4	12
22		21		16		12		8		3
18	21	17	15	16	11	15	7	14	3	13
21		20		15		11		7		3
19	20	20	15	21	11	22	7	23	2	24
19		19		14		10		6		2
30	18	29	14	28	10	27	6	26	2	25
18		18		14		10		6		2
31	17	32	13	33	9	34	5	35	1	36

6-151

- Notes in Book "A", this Group (25) (2720)
- _____ " " " "C" " " " (2722)
- _____ " " " "B" " " " (2721)
- _____ " " " "B", Group 22 (2714)
- Unsurveyed
- _____ Notes in Book "C", Group 22 (2715)
- Affidavits on Pages 25-58

RESURVEY OF SUBDIVISION LINES OF T. 11 SOUTH, RANGE 24 EAST

Resurvey commenced Nov. 20th, 1913 and executed by Thomas B. Matthews, U. S. Surveyor, with Young & Sons Light Mount-
ain Transit No. 8480, previously described. I examine the
adjustments of the transit and find them to be correct and
know from recent tests of the solar apparatus, by compar-
ing its indications resulting from solar observations, made
during a.m. and p.m. hours, with a mer. established by
observation on Polaris, at elongation, that the instrument
is in satisfactory adjustment.

At 3 h. 30 m., a.m., l.m.t., I set off 19° 33' S. on decl.
arc, 32° 25 1/2' on lat. arc and determine a mer. with the
solar at the cor. of secs. 1, 2, 35 & 36 on S. bdy. of Tp.,
previously reestab. by me, as described in Book "A" of this Group.

The magnetic bearing of the mer. thus established is N.
12° 53' W., the angle thus determined gives the magnetic
decl. of 12° 53' E.

Thence I run
N. 0° 01' W. bet. secs. 35 & 36

Over slightly rolling prairie land through scattering
yuccas 4 to 7 ft. high

13.00 Dry wash 10 lks. wide, 2 ft. deep, course S.W.

17.50 Ascend rocky knoll 50 ft. high

23.00 Summit of rocky knoll, thence descend rocky N. slope 50ft.

30.00 Foot of rocky knoll bears E. & W.

40.00 Set an iron post 3 ft. long, 1 in. in dia. 26 1/2 ins. in ground
for reestab. sec. cor., with a brass cap marked S 35 in

W., S 36 in E. & 1913 in S. half. Pits impracticable.

Raise mound of stone 2 ft. base 2 ft. high W. of cor.

41.33 Old 1/4 sec. cor., which is a granite stone 12 x 12 x 10 ins.

loose ly set & marked as described by Surveyor General, bears
W. 23 lks. dist. I destroy all trace of this old cor.

55.00 Dry wash 10 lks. wide, 2 ft. deep, course S.W.

80.00 Set an iron post 3 ft. long, 2 ins. in dia. 24 ins. in ground
for reestab. cor. of secs. 25, 26, 35 & 36, with a brass cap

marked T 11 S R 24 E in N. & 1913 in S. half, S 26 in N.W.
S 25 in N.E., S 36 in S.E. & S 35 in S.W. quadrant.

Dig pits 18 x 13 x 12 ins. in each sec. 5 1/2 ft. dist. &
raise mound of earth 4 ft. base 2 ft. high W. of cor.

Land level & rolling

Soil loose red sandy loam, medium texture 12 to 18 ins.
deep on clay sub-soil

Good grass, scattering yuccas 4 to 7 ft. high

No timber.

Thence I run
S. 89° 42' E. on random line bet. secs. 25 & 36

40.00 Set temp. 1/4 sec. cor.

79.94 Intersect E. bdy. of Tp. 23 lks. S. of cor. of secs. 25,
30, 31 & 36, previously reestab. by me, as descr. in Book "A" of
(this Group.

Thence I run
N. 89° 54' W. on true line bet. secs. 25 & 36

Over slightly rolling prairie land through scattering
mesquite brush 2 to 3 ft. high

22.00 Dry wash 15 lks. wide, 2 ft. deep, course S.W.

39.97 Set an iron post 3 ft. long, 1 in. in dia. 26 1/2 ins. in ground
for reestab. 1/4 sec. cor., with a brass cap marked S 25 in

N. & S 36 1913 in S. half. Pits impracticable.

Raise mound of stone 2 ft. base 2 ft. high N. of cor.

79.94 The cor. of secs. 25, 26, 35 & 36, hereinbefore described

Land level & rolling

Soil loose gravelly sandy loam, medium texture, 12 ins.
deep on clay sub-soil

Good grass

Scattering mesquite brush 2 to 3 ft. high

No timber

Thence I run
N. 0° 01' W. bet. secs. 25 & 26

Over slightly rolling prairie land through scattering
mesquite brush 2 to 3 ft. high

RESURVEY OF SUBDIVISION LINES OF T. 111 SOUTH, RANGE 24 EAST

- 32.50 Foot of rocky hill bears NW & S.E., thence ascend rocky S.W. slope 50 ft.
- 40.00 Set an iron post 3 ft. long, 1 in. in dia. **26 ins. in ground for reestab. $\frac{1}{4}$ sec. cor.**, with a brass cap marked $\frac{1}{4}$ S 26 in W., S 25 in E. & 1913 in S. half. **Pits impracticable.**
Raise mound of stone 2 ft. base 2 ft. high W. of cor.
- 41.73 Old $\frac{1}{4}$ sec. cor., which is a granite stone 10 x 8 x 6 ins. marked as described by Surveyer General & deposited in mound of stone bears E. 60 lks. dist. I destroy all trace of this old cor.
- 55.50 Summit of hill slopes West, thence descend rocky N. slope 30 ft.
- 60.00 Foot of hill bears E. & W.
- 80.00 Set an iron post 3 ft. long, 2 ins. in dia. **24 ins. in ground for reestab. cor. of secs. 23, 24, 25 & 26**, with a brass cap marked T 11 S R 24 E in N. & 1913 in S. half; S 23 in N.W., S 24 in N.E., S 25 in S.E. & S 26 in S.W. quadrant.
Dig pits 18 x 13 x 12 ins. in each sec. $5\frac{1}{2}$ ft. dist. & raise mound of earth 4 ft. base 2 ft. high W. of cor.
Land level & rolling
Soil from 0 to 32 & from 60 to 80 chs. loose gravelly sandy loam, medium texture, 12 to 18 ins. deep on clay sub-soil. From 32 to 60 chs. thin & rocky
Good grass, scattering mesquite brush & yuccas 3 to 7 ft. high.
No timber.
Note: The old cor. of secs. 23, 24, 25 and 26, which is decayed remains of old mesquite post, bears N. $26\frac{1}{2}^{\circ}$ E. 58 lks. dist. I destroy all trace of this old cor.
-
- Thence I run
S. $39^{\circ} 54'$ E. on random line bet. secs: 24 & 25
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 79.82 Intersect E. bdy. of Tp. 4 lks. N. of cor. of secs. 19, 24; 25 & 30, previously reestab. by me, as describe Book "A" of (this Group.)
Thence I run
N. $89^{\circ} 52'$ W. on true line bet. secs. 24 & 25
Over rolling prairie land ascending 25 ft. along rocky N. slope
- 20.00 Summit of spur slopes N. thence descend N.W. slope 25 ft.
- 30.00 Foot of descent
- 32.00 Dry wash 10 lks. wide, 2 ft. deep, course S.W.
- 39.91 Set an iron post 3 ft. long, 1 in. in dia. **26 ins. in ground for reestab. $\frac{1}{4}$ sec. cor.**, with a brass cap marked $\frac{1}{4}$ S 24 in N. & S 25 1913 in S. half. /of post
Dig pits 18 x 13 x 12 ins. E. & W. $3\frac{1}{2}$ ft. dist. & raise mound of earth $3\frac{1}{2}$ ft. base $1\frac{1}{2}$ ft. high N. of cor.
- 79.82 The cor. of secs. 23, 24, 25 & 26, hereinbefore described.
Land level & rolling
Soil from 0 to 39 chs. thin & rocky, from 30 to 79.82 chs. light gravelly sandy loam, medium texture 12 to 13 ins. deep on clay sub-soil
Good grass, scattering mesquite & yuccas 2 to 6 ft. high
No timber.
-
- Thence I run
N. $0^{\circ} 01'$ W. bet. secs. 23 & 24
Over level prairie land through scattering mesquite brush & yuccas 3 to 6 ft. high
- 40.00 Set an iron post 3 ft. long, 1 in. in dia. **26 ins. in ground for reestab. $\frac{1}{4}$ sec. cor.**, with a brass cap marked $\frac{1}{4}$ S 23 in W., S 24 in E. & 1913 in S. half. /of post
Dig pits 18 x 18 x 12 ins. N. & S. $3\frac{1}{2}$ ft. dist. & raise mound of earth $3\frac{1}{2}$ ft. base $1\frac{1}{2}$ ft. high W. of cor.
- 42.00 Wagon road bears N.E. & S.W.
- 80.00 Set an iron post 3 ft. long, 2 ins. in dia. **24 ins. in ground for reestab. cor. of secs. 13, 14, 23 & 24**, with a brass cap marked T 11 S R 24 E in N. & 1913 in S. half, S 14 in N.W., S 13 in N.E., S 24 in S.E. & S 23 in S.W. quadrant.

RESURVEY OF SUBDIVISION LINES, OF TOLLER S. RANGE 24 EAST, BOOK 2729

Dig pits 13 x 18 x 12 ins. in each sec. 5 1/2 ft. dist. & raise mound of earth 4 ft. base 2 ft. high W. of cor.
 Land level & rolling
 Soil loose red sandy loam, medium texture, 12 to 13 ins. deep on clay sub-soil
 Good grass, scattering mesquite brush & yuccas 3 to 6 ft. high
 No timber.

40.00
79.98

Thence I run
 S. 89° 52' E. on random line bet. secs. 13 & 24
 Set temp. 1/4 sec. cor.
 Intersect E. bdy. of Tp. 7 lks. N. of cor. of secs. 13, 18, 19 & 24, previously reestab. by me, as described in Book "A" of this Group.

3.00
28.00
39.99

N. 89° 49' W. on true line bet. secs. 13 & 24
 Over slightly rolling prairie land through mesquite brush 2 to 4 ft. high
 Dry rocky wash 30 lks. wide, 5 ft. deep, course S.W.
 Wagon road bears N.E. & S.W.
 Set an iron post 3 ft. long, 1 in. in dia. 26 ins. in ground for reestab. 1/4 sec. cor., with a brass cap marked S 13 in N. & S 24 1913 in S. half. /of post

79.98

Dig pits 13 x 18 x 12 ins. E. & W. 3 ft. dist. & raise mound of earth 3 1/2 ft. base 1 1/2 ft. high N. of cor.
 The cor. of secs. 13, 14, 23 & 24, hereinbefore described.
 Land level & rolling
 Soil loose red sandy loam, medium texture, 12 to 13 ins. deep on clay sub-soil
 Good grass, scattering mesquite brush 2 to 4 ft. high
 No timber.

23.00
40.00

Thence I run
 N. 0° 01' W. bet. secs. 13 & 14
 Over rolling land through scattering mesquite brush & yuccas 3 to 6 ft. high
 Dry wash 10 lks. wide, 1 ft. deep, course S.W.
 Set an iron post 3 ft. long, 1 in. in dia. 26 ins. in ground, for reestab. 1/4 sec. cor., with a brass cap marked S 14 in W., S 13 in E. & 1913 in S. half. /of post

70.00
80.00

Dig pits 13 x 18 x 12 ins. N. & S. 3 ft. dist. & raise mound of earth 3 1/2 ft. base 1 1/2 ft. high W. of cor.
 From this cor. old bearing trees, greatly decayed, bear S. 24 1/2° W. 44 lks. dist. & S. 71° E. 54 lks. dist. No more living trees in dist. I destroy all markings on these trees.
 Dry wash 10 lks. wide, 2 ft. deep, course S.W.
 Set an iron post 3 ft. long, 2 ins. in dia. 24 ins. in ground for reestab. cor. of secs. 11, 12, 13 & 14, with a brass cap marked T 11 S R 24 E in N. & 1913 in S. half, S. 11 in N.W., S 12 in N.E., S 13 in S.E. & S 14 in S.W. quadrant.
 Dig pits 13 x 13 x 12 ins. in each sec. 5 1/2 ft. dist. & raise mound of earth 4 ft. base 2 ft. high W. of cor.
 Land rolling
 Soil thin & rocky
 Good grass, scattering mesquite brush & yuccas 3 to 6 ft. high
 No timber.

40.00
80.00

Thence I run
 S. 89° 49' E. on random line bet. secs. 12 & 13
 Set temp. 1/4 sec. cor.
 Intersect E. bdy. of Tp. 9 lks. N. of cor. of secs. 7, 12, 13 & 18, reestab. by me, as described in Book "A" of this Group.
 Thence I run
 N. 89° 45' W. on true line bet. secs. 12 & 13
 Over slightly rolling land through scattering mesquite brush & yuccas 3 to 6 ft. high.

RESURVEY OF SUBDIVISION LINES OF TILBOUSH, RANGE 24 EAST

40.00	Set an iron post 3 ft. long, 1 in. in dia. 26 ins. in ground for reestab. 1 sec. cor. , with a brass cap marked S 12 in N. & S 13 1913 in S. half. Pits impracticable.
80.00	Raise mound of stone 3 ft. base 2 ft. high N. of cor. The cor. of secs. 11, 12, 13 & 14, hereinbefore described. Land level & rolling Soil light gravelly sandy loam 12 ins. deep on clay sub-soil Good grass, scattering mesquite brush & yuccas 3 to 6 ft. high No timber.

	Thence I run N. 6° 01' W. bet. secs. 11 & 12
25.00	Over rolling land through scattering mesquite, cat-clay brush & yuccas 3 to 6 ft. high Dry wash 1 ch. wide, 3 ft. deep, course West
40.00	Set an iron post 3 ft. long, 1 in. in dia. 26 ins. in ground for reestab. 1 sec. cor. , with a brass cap marked S 11 in W., S 12 in E. & 1913 in S. half. /of post
	Dig pits 18 x 18 x 12 ins. N. & S. 3 ft. dist. & raise mound of earth $3\frac{1}{2}$ ft. base $1\frac{1}{2}$ ft. high W. of cor.
44.00	Dry wash 10 lks. wide, 3 ft. deep, course West
65.00	Dry wash 50 lks. wide, 2 ft. deep, course S.W.
75.50	Dry wash 10 lks. wide, 2 ft. deep, course S.W.
80.00	Set an iron post 3 ft. long, 2 ins. in dia. 24 ins. in ground for reestab. cor. of secs. 1, 2, 11 & 12 , with a brass cap marked T 11 S R 24 E in N. & 1913 in S. half, S 2 in N.W., S 1 in N.E., S 12 in S.E., & S 11 in S.W. quadrant. Dig pits 18 x 18 x 12 ins. in each sec. $5\frac{1}{2}$ ft. dist. & raise mound of earth 4 ft. base 2 ft. high W. of cor. From this cor. old cor. of secs. 1, 2, 11 & 12, which is a sand stone 10 x 6 x 6 ins. above ground firmly set, marked and witnessed as described by Surveyor General, bears N. $4\frac{1}{2}$ ° E. 232 lks. dist. I destroy all trace of this old cor. Land rolling Soil thin & rocky Good grass, scattering cat-claw & mesquite brush & yuccas 3 to 6 ft. high No timber.

	Thence I run S. 39° 45' E. on random line bet. secs. 1 & 12
40.00	Set temp. 1 sec. cor.
80.00	Intersect E. bdy. of Tp. 16 lks. S. of cor. of secs. 1, 6, 7 & 12, previously reestab. by me, as described in Book "A" of this Group. N. 39° 52' W. on true line bet. secs. 1 & 12
	Over rolling land through scattering mesquite & cat-claw brush & yuccas 3 to 6 ft. high
4.00	Dry wash 20 lks. wide, 1 ft. deep, course S.W.
40.00	Set an iron post 3 ft. long, 1 in. in dia. 26 ins. in ground for reestab. 1 sec. cor. , with a brass cap marked S 1 in N. & S 12 1913 in S. half. /of post
	Dig pits 18 x 18 x 12 ins. E. & W. 3 ft. dist. & raise mound of earth $3\frac{1}{2}$ ft. base $1\frac{1}{2}$ ft. high N. of cor.
47.50	Dry wash 1 ch. wide, 15 ft. deep, course S.W.
67.00	Dry wash 10 lks. wide, 1 ft. deep, course S.W.
80.00	The cor. of secs. 1, 2, 11 & 12, hereinbefore described. Land rolling Soil thin & rocky Good grass, scattering mesquite & cat-claw brush & yuccas 3 to 6 ft. high No timber.

RESURVEY OF SUBDIVISION LINES OF T11 SOUTH, RANGE 24 EAST

BOOK 2729

Thence I run
 N. 0° 01' W. bet. secs. 1 & 2
 Over rolling rocky land through cat-claw & mesquite brush
 & yuccas 3 to 6 ft. high

12.00 Dry wash 50 lks. wide, 2 ft. deep, course S.W.
 40.00 Set an iron post 3 ft. long, 1 in. in dia. **26 ins. in ground**
for reestab. sec. cor., with a brass cap marked S 2 in
 W., S 1 in E. & 1913 in S. half. /of post

42.30 Dig pits 13 x 13 x 12 ins. N. & S. 3 ft. dist. & raise
 mound of earth 3 1/2 ft. base 1 1/2 ft. high W. of cor.
 Old 1/4 sec. cor., which is a granite stone 4 x 3 x 3 ins.
 above ground, firmly set, marked & witnessed as described
 by Surveyor General, bears E. 20 lks. dist. I destroy all
 trace of this old cor. Nat.

48.00 Dry wash 5 lks. wide, 2 ft. deep, course S.W.
 65.00 Dry wash 1 ch. wide, 10 ft. deep, course S.W.
 81.66 Intersect Second Standard Parallel South 26.52 chs. W.
 of standard cor. of secs. 35 & 36, previously re-established
 by me, as described in Book "B" of this Group.
 Set an iron post 3 ft. long, 2 ins. in dia. **24 ins. in ground**
for reestab. Closing cor. of secs. 1 & 2, with a brass cap
 marked CC S. of center, T 11 S R 24 E S 35 S 36 in N. &
 1913 in S. half, S 1 in S.E. & S 2 in S.W. **quad. Pits imprac.**

Raise mound of stone 3 ft. base 3 ft. high S. of cor.
 From this cor. the old Closing cor. of secs. 1 & 2, which
 is decayed post in mound of stone, bears N. 74° E. 67 lks.
 dist. I destroy all trace of this old cor.
 Note: From reestab. C.C. of secs. 1 & 2 a hackberry tree
 8 ins. in dia. bears S. 38 1/2° W. 169 lks. dist. marked T
 11 S R 24 E S 2 B T
 No more trees in dist.
 Land rolling
 Soil thin & rocky
 Good grass, mesquite & cat-claw brush, & yuccas 3 to 6
 ft. high
 No timber.
 Note: at the cor. of secs. 13, 14, 23 & 24 I set off 19°
 41' S. on decl. arc and at 11 h. 45 m. 37 s., a.m., l.m.t.,
 observe the sun on the mer. and obtain a reading of 32°
 28' on lat. arc.

Nov. 20th, 1913.

Nov. 21, 1913.

Nov. 21, 1913. Nat.
 8 h. 30 m., a.m., l.m.t., I set off 19° 52' S.
 on decl. arc, 32° 25 1/2' on lat. arc and determine a mer. with
 the solar at the cor. of secs. 2, 3, 34 & 35 on S. bdy. of
 Tp. reestab. by me, as described in Book "A" of this Group.

Thence I run
 N. 0° 01' W. bet. secs 34 & 35
 Over level prairie land

40.00 Set an iron post 3 ft. long, 1 in. in dia., **26 ins. in ground**
for reestab. 1/4 sec. cor., with a brass cap marked S 34 in
 W., S 35 in E. & 1913 in S. half. /of post

47.00 Dig pits 13 x 13 x 12 ins. N. & S. 3 ft. dist. & raise
 mound of earth 3 1/2 ft. base 1 1/2 ft. high W. of cor.
 Dry wash 20 lks. wide, 2 ft. deep, course S.W.

80.00 Set an iron post 3 ft. long, 2 ins. in dia., **24 ins. in ground**
for reestab. cor. of secs. 26, 27, 34 & 35, with a brass cap
 marked T 11 S R 24 E in N. & 1913 in S. half, S 27 in N.W.,
 S 26 in N.E., S 35 in S.E. & S 34 in S.W. quadrant.
 Dig pits 13 x 13 x 12 ins. in each sec. 5 1/2 ft. dist. &
 raise mound of earth 4 ft. base 2 ft. high W. of cor.
 Land level
 Soil light gravelly sandy loam, medium texture 12 to 13
 ins. deep on clay sub-soil
 Good grass
 No timber.

RESURVEY OF SUBDIVISION LINES OF T11 SOUTH, RANGE 24 EAST

Thence I run
 S. 89° 42' E. on random line bet. secs. 26 & 35
 40.00 Set temp. $\frac{1}{2}$ sec. cor.
 80.24 Fall 30 lks. S. of cor. of secs. 25, 26, 35 & 36, hereinbefore described

Thence I run
 N. 39° 55' W. on true line bet. secs. 26 & 35
 Over level prairie land through scattering mesquite brush
 5.00 Leave scattering mesquite brush bears N. & S.
 40.12 Set an iron post 3 ft. long, 1 in. in dia. **26 ins. in ground for reestab.** $\frac{1}{4}$ sec. cor., with a brass cap marked $\frac{1}{4}$ S 26 in N. & S 35 1913 in S. half. /of post
 Dig pits 13 x 13 x 12 ins. E. & W. $\frac{1}{3}$ ft. dist. & raise mound of earth $3\frac{1}{2}$ ft. base $1\frac{1}{2}$ ft. high N. of cor.
 57.00 Dry shallow wash 1 ch. wide, course S.W.
 80.24 The cor. of secs. 26, 27, 34 & 35, hereinbefore described.
 Land level
 Soil loose red sandy loam, medium texture, 12 to 13 ins. deep on clay sub-soil.
 Good grass
 Scattering mesquite brush & yuccas
 No timber.

Thence I run
 N. 0° 01' W. bet. secs. 26 & 27
 Over level prairie land
 .75 Wagon road bears N.E. & S.W.
 40.00 Set an iron post 3 ft. long, 1 in. in dia. **26 ins. in ground for reestab.** $\frac{1}{4}$ sec. cor., with a brass cap marked $\frac{1}{4}$ S 27 in W., S 26 in E. & 1913 in S. half. /of post
 Dig pits 13 x 13 x 12 ins. N. & S. $\frac{1}{3}$ ft. dist. & raise mound of earth $3\frac{1}{2}$ ft. base $1\frac{1}{2}$ ft. high W. of cor.
 80.00 Set an iron post 3 ft. long, 2 ins. in dia. **24 ins. in ground for reestab.** cor. of secs. 22, 23, 26 & 27, with a brass cap marked T 11 S R 24 E in N & 1913 in S. half, S 22 in N.W., S 23 in N.E., S 26 in S.E. & S 27 in S.W. quadrant.
 Dig pits 13 x 13 x 12 ins. in each sec. $5\frac{1}{2}$ ft. dist. & raise mound of earth 4 ft. base 2 ft. high W. of cor.
 Land level
 Soil loose red sandy loam, medium texture 12 to 13 ins. deep on clay sub-soil
 Good grass, scattering yuccas 3 to 6 ft. high
 No timber.

Thence I run
 S. 39° 55' E. on random line bet. secs. 23 & 26
 40.00 Set temp. $\frac{1}{2}$ sec. cor.
 80.16 Intersect cor. of secs. 23, 24, 25 & 26, hereinbefore described

Thence I run
 N. 39° 55' W. on true line bet. secs. 23 & 26
 Over slightly rolling prairie land
 32.00 Dry wash 25 lks. wide, 3 ft. deep, course S.W.
 35.00 Foot of rocky hill bears N. & S. thence ascend 30 ft.
 39.00 Summit of rocky ridge bears N. & S., descend rocky W. slope 50 ft.
 40.08 Set an iron post 3 ft. long, 1 in. in dia. **26 ins. in ground for reestab.** $\frac{1}{4}$ sec. cor., with a brass cap marked $\frac{1}{4}$ S 23 in N. & S 26 1913 in S. half. **Pits impracticable.**
 Raise mound of stone 2 ft. base 2 ft. high N. of cor.
 From this cor. old $\frac{1}{4}$ sec. cor., which is a granite stone 10 x 3 x 12 ins. loosely set in mound of stone, marks nearly obliterated bears N. 10° E. 175 lks. dist. I destroy all trace of this old cor.
 45.00 Foot of rocky hill bears N. & S.
 50.00 Wagon road bears N.E. & S.W.
 30.16 The cor. of secs. 22, 23, 26 & 27, hereinbefore described.
 Land level & rolling
 Soil from 0 to 35 chs. & 45 to 30 chs. loose red sandy loam, medium texture 12 to 13 ins. deep on clay sub-soil
 From 35 to 45 chs. thin & rocky.

RESURVEY OF SUBDIVISION LINES OF T11P 11 SOUTH, RANGE 24 EAST BOOK 2729

Good grass
No timber

Thence I run

N. 0° 01' W. bet. secs. 22 & 23

Over level prairie land

40.00 Set an iron post 3 ft. long, 1 in. in dia. **26 ins. in ground**
for reestab. 1/4 sec. cor., with a brass cap marked S 22 in

W., S 23 in E. & 1913 in S. half. **of post**
Dig pits 13 x 13 x 12 ins. N. & S. $3\frac{1}{2}$ ft. dist. & raise
mound of earth $3\frac{1}{2}$ ft. base $1\frac{1}{2}$ ft. high W. of cor.

45.00 Dry wash 10 lks. wide, 1 ft. deep, course S.W.

67.00 Dry wash 30 lks. wide, 7 ft. deep, course S.W.

80.00 Set an iron post 3 ft. long, 2 ins. in dia. **24 ins. in ground**

for reestab. cor. of secs. 14, 15, 22 & 23, with a brass
cap marked T 11 S R 24 E in N. & 1913 in S. half, S 15 in

N.W., S 14 in N.E., S 23 in S.E. & S 22 in S.W. quadrant.
Dig pits 13 x 13 x 12 ins. in each sec. $5\frac{1}{2}$ ft. dist. &
raise mound of earth $4\frac{1}{2}$ ft. base 2 ft. high W. of cor.

Land level

Soil loose red sandy loam, medium texture, 12 to 13 ins.
deep on clay sub-soil.

Good grass, scattering yuccas 3 to 6 ft. high

No timber

Note: At this cor. I set off 19° 54' S. on decl. arc, and at 11
h. 45m. 52 s., a.m., l.m.t., observe the sun on the mer. &
obtain a reading of 32° 28' on lat. arc.

Thence I run

S. 39° 55' E. on random line bet. secs. 14 & 23

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.16 Fall 9 lks. N. of cor. of secs. 13, 14, 23 & 24, herein-
before described.

Thence I run

N. 39° 51' W. on true line bet. secs. 14 & 23

Over slightly rolling prairie land through scattering
mesquite brush & yuccas 3 to 6 ft. high

40.08 Set an iron post 3 ft. long, 1 in. in dia. **26 ins. in ground**
for reestab. 1/4 sec. cor., with a brass cap marked S 14 in
N. & S 23 1913 in S. half. **of post**

Dig pits 13 x 13 x 12 ins. E. & W. $3\frac{1}{2}$ ft. dist. & raise
mound of earth $3\frac{1}{2}$ ft. base $1\frac{1}{2}$ ft. high N. of cor.

65.50 Dry wash 10 lks. wide, 3 ft. deep, course S.W.

80.16 The cor. of secs. 14, 15, 22 & 23, hereinbefore described.

Land level & rolling

Soil loose red sandy loam, medium texture, 12 to 13 ins.
deep on clay sub-soil

Good grass, scattering yuccas 3 to 6 ft. high

No timber.

Thence I run

N. 0° 01' W. bet. secs. 14 & 15

Over level prairie land through scattering mesquite brush
& yuccas 3 to 6 ft. high

40.00 Set an iron post 3 ft. long, 1 in. in dia. **26 ins. in ground**
for reestab. 1/4 sec. cor., with a brass cap marked S 15 in
W., S 14 in E. & 1913 in S. half. **of post**

Dig pits 13 x 13 x 12 ins. N. & S. $3\frac{1}{2}$ ft. dist. & raise
mound of earth $3\frac{1}{2}$ ft. base $1\frac{1}{2}$ ft. high W. of cor.

60.00 Dry shallow wash 50 lks. wide, course S.W.

80.00 Set an iron post 3 ft. long, 2 ins. in dia. **24 ins. in ground**

for reestab. cor. of secs. 10, 11, 14 & 15, with a brass cap
marked T 11 S R 24 E in N. & 1913 in S. half, S 10 in N.W.,
S 11 in N.E., S 14 in S.E. & S 15 in S.W. quadrant.

Dig pits 13 x 13 x 12 ins. in each sec. $5\frac{1}{2}$ ft. dist. &
raise mound of earth 4 ft. base 2 ft. high W. of cor.

LINES
RESURVEY SUBDIVISION OF TOWNSHIP 11 SOUTH, RANGE 24 EAST

	<p>Land level & rolling Soil loose red sandy loam, medium texture, 12 to 13 ins. deep on clay sub-soil Good grass, scattering mesquite brush & yuccas 2 to 6 ft. high No timber.</p> <p style="text-align: center;">-----</p>
40.00	Thence I run
30.14	S. 89° 51' E. on random line bet. secs. 11 & 14 Set temp. 1/4 sec. cor. Fall 2 lks. S. of cor. of secs. 11, 12, 13 & 14, hereinbefore described
	Thence I run
35.00	N. 89° 52' W. on true line bet. secs. 11 & 14
40.07	Over rolling land through mesquite brush & yuccas 3 to 6 ft. high Dry shallow wash 50 lks. wide, course S.W? Set an iron post 3 ft. long, 1 in. in dia. 26 ins. in ground for reestab. sec. cor., with a brass cap marked S 11 in N. & S 14 1913 in S. half. /of post Dig pits 13 x 13 x 12 ins. E. & W. 3 ft. dist. & raise mound of earth 3 1/2 ft. base 1 1/2 ft. high N. of cor.
30.14	The cor. of secs. 10, 11, 14 & 15, hereinbefore described. Land level & rolling Soil light gravelly sandy loam, medium texture, 12 to 13 ins. deep on clay sub-soil Good grass, scattering mesquite brush & yuccas 3 to 6 ft. high. No timber. <p style="text-align: center;">-----</p>
	Thence I run
24.00	N. 0° 01' W. bet. secs. 10 & 11
40.00	Over slightly rolling land through scattering yuccas 3 to 7 ft. high Dry wash 15 lks. wide, 4 ft. deep, course S.W. Set an iron post 3 ft. long, 1 in. in dia. 26 ins. in ground for reestab. sec. cor., with a brass cap marked S 10 in W., S 11 in E. & 1913 in S. half. /of post Dig pits 13 x 13 x 12 ins. N. & S. 3 ft. dist. & raise mound of earth 3 1/2 ft. base 1 1/2 ft. high W. of cor.
74.00	Dry wash 10 lks. wide, 2 ft. deep, course S.W.
30.00	Set an iron post 3 ft. long, 2 ins. in dia. 24 ins. in ground for reestab. cor. of secs. 2, 3, 10 & 11, with a brass cap marked T 11 S R 24 E in N. & 1913 in S. half, S 3 in N.W., S 2 in N.E., S 11 in S.E. & S 10 in S.W. quadrant, from which A willow 6 ins. in dia. bears N. 82° W. 64 lks. dist. marked T 11 S R 24 E S 3 B T No more trees in dist. Dig pits 13 x 13 x 12 ins. in each sec. 5 1/2 ft. dist. & raise mound of earth 4 ft. base 2 ft. high W. of cor. Land level & rolling Soil loose gravelly sandy loam, medium texture, 12 ins. deep on clay sub-soil Good grass, scattering mesquite brush & yuccas 3 to 6 ft. high No timber. <p style="text-align: center;">-----</p>
	Thence I run
40.00	S. 89° 52' E. on random line bet. secs. 2 & 11
30.08	Set temp. 1/4 sec. cor. Intersect cor. of secs. 12, 2, 11 & 12, hereinbefore described.
	Thence I run
	N. 89° 52' W. on true line bet. secs. 2 & 11
	Over rolling land through mesquite & cat-claw brush 4 to 6 ft. high.

LOWES

RESURVEY OF SUBDIVISIONS OF TOWNSHIP 11 SOUTH, RANGE 24 EAST

BOOK 2729


22.00
40.04

Dry wash 1 ch. wide, 15 ft. deep, course S.W.
Set an iron post 3 ft. long, 1 in. in dia. **26 ins. in ground**
for reestab. $\frac{1}{4}$ sec. cor., with a brass cap marked $\frac{1}{4}$ S 2 in
N. & S 11 1913 in S. half. /of post

Dig pits 13 x 13 x 12 ins. E. & W. $\frac{1}{3}$ ft. dist. & raise
mound of earth $3\frac{1}{2}$ ft. base $1\frac{1}{2}$ ft. high N. of cor.

65.00
80.08

Dry wash 10 lks. wide, 2 ft. deep, course S.W.
The cor. of secs. 2, 3, 10 & 11, hereinbefore described.
Land rolling
Soil rocky, 12 ins. deep on clay sub-soil
Scattering grass, mesquite brush & cat-claw brush 3 to 6
ft. high
No timber.



Thence I run
N. 0° 01' W. bet. secs. 2 & 3
Over rolling rocky land through mesquite brush 3 to 6 ft.
high

3.00
17.00
38.00

Dry wash 10 lks. wide, 2 ft. deep, course S.W.
Dry wash 10 lks. wide, 2 ft. deep, course S.W.
Dry wash 5 lks. wide, 1 ft. deep, course S.W.

40.00

Set an iron post 3 ft. long, 1 in. in dia. **26 ins. in ground**
for reestab. $\frac{1}{4}$ sec. cor., with a brass cap marked $\frac{1}{4}$ S 3 in
W., S 2 in E. & 1913 in S. half. /of post

Dig pits 13 x 13 x 12 ins. N. & S. $\frac{1}{3}$ ft. dist. & raise
mound of earth $3\frac{1}{2}$ ft. base $1\frac{1}{2}$ ft. high W. of cor.

46.00
74.00
81.42


Dry wash 25 lks. wide, 3 ft. deep, course S.W.
Dry wash 15 lks. wide, 2 ft. deep, course S.W.
Intersect Second Standard Parallel South 26.62 chs. W.
of Standard cor. of secs. 34 & 35, previously re-established
by me, as described in Book "B" of this Group.

Set an iron post 3 ft. long, 2 ins. in diam. **24 ins. in ground**
for reestab. closing cor. of secs. 2 & 3, with a brass cap
marked CC S. of center, T. 11 S. R. 24 E. S. 34. & S 35 in N. &
1913 in S. half, S 2 in S.E. & S 3 in S.W. quad. **Pits imprac.**

Raise mound of stone 3 ft. base 3 ft. high S. of cor.
From this cor. old Closing cor. of secs. 2 & 3, which is
a granite stone 6 x 7 x 10 ins. above ground firmly set &
marked as described by Surveyor General; bears N. $83\frac{1}{2}$ ° E.
44 lks. dist. I destroy all trace of this old cor.

Land rolling
Soil light gravelly sandy loam, medium to coarse texture
12 ins. deep on clay sub-soil
Good grass, scattering mesquite & cat-claw brush 3 to 6
ft. high.
No timber.

Nov. 21st, 1913.



Nov. 22, 1913.
At 8 h. 0 m., a.m., l.m.t., I set off 20° 03 $\frac{1}{2}$ ' S.
on decl. arc, 32° 25 $\frac{1}{2}$ ' on lat. arc and determine a mer. with
the solar at the cor. of secs. 33 & 34 on S. bdy. of Tp.
previously **reestab. by me, as described in Beck "A" of this group.**

Thence I run
N. 0° 02' W. bet. secs. 33 & 34
Over level prairie land

3.00
40.00

Wagen road bears N.E. & S.W.
Set an iron post 3 ft. long, 1 in. in dia. **26 ins. in ground**
for reestab. $\frac{1}{4}$ sec. cor., with a brass cap marked $\frac{1}{4}$ S 33 in
W., S 34 in E. & 1913 in S. half. /of post

Dig pits 13 x 13 x 12 ins. N. & S. $\frac{1}{3}$ ft. dist. & raise
mound of earth $3\frac{1}{2}$ ft. base $1\frac{1}{2}$ ft. high W. of cor.

80.00

Set an iron post 3 ft. long, 2 ins. in dia., **24 ins. in ground**
for reestab. cor. of secs. 27, 28, 33 & 34, with a brass cap
marked T. 11 S. R. 24 E. in N. & 1913 in S. half, S 28 in N.W.,
S 27 in N.E., S 34 in S.E. & S 33 in S.W. quadrant.

Dig pits 13 x 13 x 12 ins. in each sec. $5\frac{1}{2}$ ft. dist. &
raise mound of earth 4 ft. base 2 ft. high W. of cor.

Land level
Soil loose red sandy loam, medium texture, 12 to 13 ins.
deep on clay sub-soil

Good grass
No timber.

The cor. of secs. 26, 27, 34 & 35, being plainly visible,
I run

S. 89° 50' E. on random line for said cor. bet. secs. 27
& 34

40.00

Set temp. $\frac{1}{4}$ sec. cor.

79.92

Intersect cor. of secs. 26, 27, 34 & 35, hereinbefore de-
scribed.

Thence I run

N. 89° 50' W. on true line bet. secs. 27 & 34

Over level prairie land

.75

Wagon road bears N.E. & S.W.

39.96

Set an iron post 3 ft. long, 1 in. in dia. **26 ins. in ground**
for reestab. $\frac{1}{4}$ sec. cor., with a brass cap marked $\frac{1}{4}$ S 27 in
N. & S 34 1913 in S. half. /of post

Dig pits 13 x 13 x 12 ins. E. & W. $\frac{1}{3}$ ft. dist. & raise
mound of earth $3\frac{1}{2}$ ft. base $1\frac{1}{2}$ ft. high N. of cor.

79.92

The cor. of secs. 27, 28, 33 & 34, hereinbefore described.

Land level

Soil loose red sandy loam, medium texture, 12 to 13 ins.
deep on clay sub-soil

Good grass

No timber.

Thence I run

N. 0° 02' W. bet. secs. 27 & 28

Over level prairie land

40.00

Set an iron post 3 ft. long, 1 in. in dia. **26 ins. in ground**
for reestab. $\frac{1}{4}$ sec. cor., with a brass cap marked $\frac{1}{4}$ S 28
in W., S 27 in E. & 1913 in S. half. /of post

Dig pits 13 x 13 x 12 ins. N. & S. $\frac{1}{3}$ ft. dist. & raise
mound of earth $3\frac{1}{2}$ ft. base $1\frac{1}{2}$ ft. high W. of cor.

55.00

Dry shallow wash 10 lks. wide, course S.W.

80.00

Set an iron post 3 ft. long, 2 ins. in dia., **24 ins. in ground**
for reestab. cor. of secs. 21, 22, 27 & 28, with a brass cap
marked T 11 S R 24 E in N. & 1913 in S. half, S 21 in N.W.,
S 22 in N.E., S 27 in S.E. & S 28 in S.W. quadrant.

Dig pits 13 x 13 x 12 ins. in each sec. $5\frac{1}{2}$ ft. dist. &
raise mound of earth 4 ft. base 2 ft. high W. of cor.

Land level

Soil loose red sandy loam, medium texture, 12 to 13 ins.
deep on clay sub-soil

Good grass

No timber.

The cor. of secs. 22, 23, 26 & 27, being plainly visible,
I run

S. 89° 45' E. on random line bet. secs. 22 & 27 for said
cor.

40.00

Set temp. $\frac{1}{4}$ sec. cor.

79.88

Intersect cor. of secs. 22, 23, 26 & 27 hereinbefore de-
scribed.

Thence I run

N. 89° 45' W. on true line bet. secs. 22 & 27

Over level prairie land through scattering yuccas 4 to 7
ft. high

39.94

Set an iron post 3 ft. long, 1 in. in dia. **26 ins. in ground**
for reestab. $\frac{1}{4}$ sec. cor., with a brass cap marked $\frac{1}{4}$ S 22 in
N. & S 27 1913 in S. half. /of post

Dig pits 13 x 13 x 12 ins. E. & W. $\frac{1}{3}$ ft. dist. & raise
mound of earth $3\frac{1}{2}$ ft. base $1\frac{1}{2}$ ft. high N. of cor.

45.00

Dry shallow wash 30 lks. wide, course S.W.

79.88

The cor. of secs. 21, 22, 27 & 28, hereinbefore described.

Land level & rolling

Soil loose red sandy loam, medium texture, 12 to 13 ins
deep on clay sub-soil

RESURVEY OF SUBDIVISION LINES OF T. 11 S. R. 24 E. SOUTH, RANGE 24 EAST

BOOK 2729

Good grass, scattering yuccas. 4 to 7 ft. high
No timber.

Thence I run
 ✓ N. 0° 02' W. bet. secs. 21 & 22
 Over level prairie land
 40.00 Set an iron post 3 ft. long, 1 in. in dia. 26 ins. in ground
 for reestab. $\frac{1}{4}$ sec. cor., with a brass cap marked S 21 in
 W., S 22 in E. & 1913 in S. half. /of post
 Dig pits 13 x 13 x 12 ins. N. & S. $\frac{1}{3}$ ft. dist. & raise
 mound of earth $3\frac{1}{2}$ ft. base $1\frac{1}{2}$ ft. high W. of cor.
 70.00 Dry shallow wash 40 lks. wide, course S.W.
 80.00 Set an iron post 3 ft. long, 2 ins. in dia. 24 ins. in ground
 for reestab. cor. of secs. 15, 16, 21 & 22, with a brass cap
 marked T 11 S R 24 E in N. & 1913 in S. half, S 16 in N.W.,
 S 15 in N.E., S 22 in S.E. & S 21 in S.W. quadrant.
 Dig pits 13 x 13 x 12 ins. in each sec. $5\frac{1}{2}$ ft. dist. &
 raise mound of earth 4 ft. base 2 ft. high W. of cor.
 Land level
 Soil loose red sandy loam, medium texture, 12 to 13 ins.
 deep on clay sub-soil
 Good grass, scattering yuccas 4 to 7 ft. high
 No timber.

Thence I run
 ✓ S. 39° 45' E. on random line bet. secs. 15 & 22.
 40.00 Set temp. $\frac{1}{2}$ sec. cor.
 79.82 Intersect cor. of secs. 14, 15, 22 & 23, hereinbefore de-
 scribed
 Thence I run
 ✓ N. 39° 45' W. on true line bet. secs. 15 & 22
 Over level prairie land through scattering mesquite brush
 & yuccas 3 to 6 ft. high
 39.91 Set an iron post 3 ft. long, 1 in. in dia. 26 ins. in ground
 for reestab. $\frac{1}{4}$ sec. cor., with a brass cap marked S 15 in
 N. & S 22 1913 in S. half. /of post
 Dig pits 13 x 13 x 12 ins. E. and W. $\frac{1}{3}$ ft. dist. & raise
 mound of earth $3\frac{1}{2}$ ft. base $1\frac{1}{2}$ ft. high W. of cor.
 65.00 Dry shallow wash 50 lks. wide, course S.W.
 79.82 The cor. of secs. 15, 16, 21 & 22, hereinbefore described
 Note: At this cor. I set off 20° 07' S. on decl. arc and at 11
 h. 46 m. 7 s., a.m., l.m.t., observe the sun on the mer.
 and obtain a reading of 32° 23' on lat. arc.
 Land level
 Soil loose red sandy loam, medium texture, 12 to 13 ins
 deep on clay sub-soil
 Good grass, scattering mesquite brush & yuccas 3 to 6 ft.
 high
 No timber.

Thence I run
 ✓ N. 0° 02' W. bet. secs. 15 & 16
 Over level prairie land through scattering yuccas 3 to 6
 ft. high
 10.00 Dry shallow wash 30 lks. wide, course S.W.
 40.00 Set an iron post 3 ft. long, 1 in. in dia. 26 ins. in ground
 for reestab. $\frac{1}{4}$ sec. cor., with a brass cap marked S 16 in
 W., S 15 in E. & 1913 in S. half /of post
 Dig pits 13 x 13 x 12 ins. N. & S. $\frac{1}{3}$ ft. dist. & raise
 mound of earth $3\frac{1}{2}$ ft. base $1\frac{1}{2}$ ft. high W. of cor.
 80.00 Set an iron post 3 ft. long, 2 ins. in dia. 24 ins. in ground
 for reestab. cor. of secs. 9, 10, 15 & 16, with a brass cap
 marked T 11 S R 24 E in N. & 1913 in S. half, S 9 in N.W.,
 S 10 in N.E., S 15 in S.E. & S 16 in S.W. quadrant.
 Dig pits 13 x 13 x 12 ins. in each sec. $5\frac{1}{2}$ ft. dist. &
 raise mound of earth 4 ft. base 2 ft. high W. of cor.

RESURVEY OF SUBDIVISION LINES OF T. 11 SOUTH, RANGE 24 EAST

Land level
Soil loose red sandy loam, medium texture, 12 to 13 ins deep on clay sub-soil
Good grass, scattering yuccas 3 to 6 ft. high
No timber.

Thence I run
40.00 ✓ S. 89° 45' E. on random line bet. sees. 10 & 15
79.86 Set temp. & sec. cor.
Intersect cor. of sees. 10, 11, 14 & 15, hereinbefore described

Thence I run
26.00 N. 89° 45' W. on true line bet. sees. 10 & 15
39.93 Over slightly rolling prairie land through scattering yuccas & mesquite brush 3 to 6 ft. high
Dry wash 20 lks. wide, 2 ft. deep, course S.W.
Set an iron post 3 ft. long, 1 in. in dia. **26 ins. in ground**
for reestab. ¼ sec. cor., with a brass cap marked ¼ S 10 in N. & S 15 1913 in S. half. /of post
Dig pits 13 x 13 x 12 ins. E. & W. 3 ft. dist. & raise mound of earth 3½ ft. base 1½ ft. high N. of cor.

50.00 Leave mesquite brush bears N. & S.
79.86 The cor. of sees. 9, 10, 15 & 16, hereinbefore described.
Land level & rolling
Soil loose red sandy loam, medium texture, 12 to 13 ins. deep on clay sub-soil
Good grass, scattering mesquite brush & yuccas 3 to 6 ft. high.
No timber.

Thence I run
2.50 N. 0° 02' W. bet. sees. 9 & 10
40.00 Over slightly rolling prairie land
Dry wash 10 lks. wide, 1 ft. deep, course S.W.
Set an iron post 3 ft. long, 1 in. in dia. **26 ins. in ground**
for reestab. ¼ sec. cor., with a brass cap marked ¼ S 9 in W., S. 10 in E. & 1913 in S. half. /of post
Dig pits 13 x 13 x 12 ins. N. & S. 3 ft. dist. & raise mound of earth 3½ ft. base 1½ ft. high W. of cor.

68.00 Dry wash 10 lks. wide, 2 ft. deep, course S.W.
80.00 Set an iron post 3 ft. long, 2 ins. in dia. **24 ins. in ground**
for reestab. cor. of sees. 3, 4, 9 & 10, with a brass cap marked T 11 S R 24 E in N. & 1913 in S. half, S 4 in N.W., S 3 in N.E., S 10 in S.E. & S 9 in S.W. quadrant.
Dig pits 13 x 13 x 12 ins. in each see. 5½ ft. dist. & raise mound of earth 4 ft. base 2 ft. high W. of cor.
Land level & rolling
Soil loose red sandy loam, medium texture, 12 to 13 ins. deep on clay sub-soil
Good grass, scattering yuccas 3 to 6 ft. high
No timber.

Thence I run
40.00 S. 89° 45' E. on random line bet. sees. 3 & 10
79.90 Set temp. & sec. cor.
Fall 7 lks. N. of cor. of sees. 2, 3, 10 & 11 hereinbefore described.

Thence I run
1.00 N. 39° 43' W. on true line bet. sees. 3 & 10
21.00 Over slightly rolling land through mesquite & cat-claw brush 3 to 6 ft. high
Dry wash 20 lks. wide, 2 ft. deep, course S.W.
21.00 Dry wash 20 lks. wide, 1 ft. deep, course S.W.
39.95 Set an iron post 3 ft. long, 1 in. in dia. **26 ins. in ground**
for reestab. ¼ sec. cor., with a brass cap marked ¼ S 3 in N. & S 10 1913 in S. half. /of post
Dig pits 13 x 13 x 12 ins. E. & W. 3 ft. dist. & raise mound of earth 3½ ft. base 1½ ft. high N. of cor.

RESURVEY OF SUBDIVISION LINES OF T. 11 SOUTH, RANGE 24 EAST

65.00 Leave mesquite brush bears N. & S.
 79.90 Dry wash 20 lks. wide, 1 ft. deep, course S.W.
 The cor. of secs. 3, 4, 9 & 10, hereinbefore described.
 Land level & rolling
 Soil loose red sandy loam, medium to coarse texture, 12 ins.
 deep on clay sub-soil
 Good grass, scattering mesquite & cat-claw brush 3 to 6
 ft. high
 No timber.

Thence I run
 N. 0° 02' W. bet. secs. 3 & 4
 Over slightly rolling prairie land through scattering
 yuccas 3 to 6 ft. high
 35.00 Dry shallow wash 30 lks. wide, course S.W.
 40.00 Set an iron post 3 ft. long, 1 in. in dia. 26 ins. in ground
 for reestab. $\frac{1}{4}$ sec. cor., with a brass cap marked $\frac{1}{4}$ S 4 in
 W., S 3 in E. & 1913 in S. half. /of cor.
 Dig pits 13 x 13 x 12 ins. N. & S. λ 3 ft. dist. & raise
 mound of earth $3\frac{1}{2}$ ft. base $1\frac{1}{2}$ ft. high W. of cor.
 70.00 Enter mesquite brush 3 to 4 ft. high bears E. & W.
 80.96 Intersect Second Standard Parallel South 26.43 chs. S.
 89° 55' W. of Standard cor. of secs. 33 & 34, previously
 reestab. by me, as described in Book "B" of Group 22.
 Set an iron post 3 ft. long, 2 ins. in dia. 24 ins. in ground
 for reestab. closing cor. of secs. 3 & 4, with a brass cap
 marked CCIS. of center, T 11 S R 24 E S 33 S 34 in N. &
 1913 in S. half, S 3 in S.E. & S 4 in S.W. quadrant.
 Dig pits 24 x 13 x 12 ins. crosswise on each line E & W 3 ft.
 and S. of post 3 ft. dist. & raise mound of earth 4 ft. base
 2 ft. high S. of cor.
 Land level & rolling
 Soil loose red sandy loam, medium to coarse texture, 12
 ins. deep on clay sub-soil.
 Good grass, scattering yuccas 3 to 6 ft. high
 No timber.

Nov. 22nd, 1913.

Nov. 23, 1913:
 At 8 h. 0 m., a.m., 1.m.t., I set off 20° 16' S.
 on decl. arc, 32° 25 $\frac{1}{2}$ ' on lat. arc and determine a mer. with
 the solar at the cor. of secs. 32 & 33 on S. bdy. of Tp.,
 previously reestab. by me, as described in Book "A" of this Group.
 Thence I run
 N. 0° 02' W. bet. secs. 32 and 33
 Over level prairie land.
 .60 Wire fence bears E. & W.
 1.000 Dim wagon road bears E. & W.
 40.00 Set an iron post 3 ft. long, 1 in. in dia. 26 ins. in ground
 for reestab. $\frac{1}{4}$ sec. cor., with a brass cap marked $\frac{1}{4}$ S 32 in
 W., S 33 in E. & 1913 in S. half. /of post
 Dig pits 13 x 13 x 12 ins. N. & S. λ 3 ft. dist. & raise
 mound of earth $3\frac{1}{2}$ ft. base $1\frac{1}{2}$ ft. high W. of cor.
 65.00 Dry wash 10 lks. wide, 2 ft. deep, course S.W.
 80.00 Set an iron post 3 ft. long, 2 ins. in dia. 24 ins. in ground
 for reestab. corner. of secs. 28, 29, 32 & 33, with a brass
 cap marked T 11 S R 24 E in N. & 1913 in S. half, S 29 in
 N.W., S 28 in N.E., S 33 in S.E. & S 32 in S.W. quadrant.
 Dig pits 13 x 13 x 12 ins. in each sec. $5\frac{1}{2}$ ft. dist. &
 raise mound of earth 4 ft. base 2 ft. high W. of cor.
 Land level
 Soil loose red sandy loam, medium texture, 12 to 13 ins.
 deep on clay sub-soil
 Good grass
 No timber.

The cor. of secs. 27, 28, 33 & 34, being plainly visible,
 I run

LINES

RESURVEY OF SUBDIVISION Δ OF TOWNSHIP 11 SOUTH, RANGE 24 EAST

40.00 S. $89^{\circ} 52'$ E. on random line bet. secs. 23 & 33 for said cor.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.98 Intersect cor. of secs. 27, 28, 33 & 34, hereinbefore described.
 Thence I run
 N. $39^{\circ} 52'$ W. on true line bet. secs. 23 & 33
 Over level prairie land
 38.00 Wagon road bears N.W. & S.E.
 39.99 Set an iron post 3 ft. long, 1 in. in dia. **26 ins. in ground for reestab. $\frac{1}{4}$ sec. cor.**, with a brass cap marked $\frac{1}{4}$ S 23 in N. & S 33 1913 in S. half. /of post
 Dig pits 13 x 13 x 12 ins. E. & W. λ 3 ft. dist. & raise mound of earth $3\frac{1}{2}$ ft. base $1\frac{1}{2}$ ft. high N. of cor.
 61.00 Dry wash 20 lks. wide, 1 ft. deep, course S.W.
 77.25 S.E. cor. of wire fence bears N. 10 lks. dist. thence parallel to & S. of wire fence
 79.98 The cor. of secs. 28, 29, 32 & 33, hereinbefore described.
 Land level
 Soil loose red sandy loam, medium texture, 12 to 13 ins. deep on clay sub-soil
 Good grass
 No timber.

Thence I run
 N. $0^{\circ} 02'$ W. bet. secs. 28 & 29
 Over level prairie land
 .10 Wire fence bears E. & W.
 40.00 Set an iron post 3 ft. long, 1 in. in dia. **26 ins. in ground for reestab. $\frac{1}{4}$ sec. cor.**, with a brass cap marked $\frac{1}{4}$ S 29 in W., S 28 in E. & 1913 in S. half. /of post
 Dig pits 13 x 13 x 12 ins. N. & S. λ 3 ft. dist. & raise mound of earth $3\frac{1}{2}$ ft. base $1\frac{1}{2}$ ft. high W. of cor.
 79.00 Wire fence bears E. & W.
 30.00 Set an iron post 3 ft. long, 2 ins. in dia. **24 ins. in ground for reestab. cor. of secs. 20, 21, 28 & 29** with a brass cap marked T 11 S R 24 7 in N. & 1913 in S. half, S 20 in N.W., S 21 in N.E., S 23 in S.E. & S 29 in S.W. quadrant.
 Dig pits 18 x 18 x 12 ins. in each sec. $5\frac{1}{2}$ ft. dist. & raise mound of earth 4 ft. base 2 ft. high W. of cor.
 Land level
 Soil loose red sandy loam, medium texture, 12 to 13 ins. deep on clay sub-soil
 Good grass
 No timber.

Thence I run
 S. $89^{\circ} 52'$ E. on random line bet. secs. 21 & 28
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.98 Fall 4 lks. S. of cor. of secs. 21, 22, 27 & 28, hereinbefore described.
 Thence I run
 N. $39^{\circ} 54'$ W. on true line bet. secs. 21 & 28
 Over level prairie land
 39.99 Set an iron post 3 ft. long, 1 in. in dia. **26 ins. in ground for reestab. $\frac{1}{4}$ sec. cor.**, with a brass cap marked $\frac{1}{4}$ S 21 in N. & S 23 1913 in S. half. /of post
 Dig pits 13 x 13 x 12 ins. E. & W. λ 3 ft. dist. & raise mound of earth $3\frac{1}{2}$ ft. base $1\frac{1}{2}$ ft. high N. of cor.
 57.00 Wagon road bears N.W. & S.E.
 77.25 N.E. cor. of wire fence bears S. 1 ch. dist.
 79.98 The cor. of secs. 20, 21, 28 & 29, hereinbefore described.
 Land level
 Soil loose red sandy loam, medium texture, 12 to 13 ins. deep on clay sub-soil
 Good grass
 No timber

RESURVEY OF SUBDIVISION LINES OF TOWNSHIP 11 SOUTH, RANGE 24 E.

Thence I run
 N. 0° 02' W. bet. secs. 20 & 21
 Over level prairie land
 40.00 Set an iron post 3 ft. long, 1 in. in dia. 26 ins. in ground
 for reestab. $\frac{1}{4}$ sec. cor. with a brass cap marked $\frac{1}{4}$ S 20 in
 W., S 21 in E. & 1913 in S. half. /of post
 Dig pits 13 x 13 x 12 ins. N. & S. \times 3 ft. dist. & raise mound
 of earth $3\frac{1}{2}$ ft. base $1\frac{1}{2}$ ft. high W. of cor.
 76.00 Dry wash 10 lks. wide, 1 ft. deep, course S.W.
 79.25 Wire fence bears E. & W.
 80.00 Set an iron post 3 ft. long, 2 ins. in dia. 24 ins. in ground
 for reestab. cor. of secs. 16, 17, 20 & 21, with a brass cap
 marked T 11 S R 24 E in N. & 1913 in S. half, S 17 in N.W.,
 S 16 in N.E., S 21 in S.E. & S 20 in S.W. quadrant.
 Dig pits 13 x 12 x 12 ins. in each sec. $5\frac{1}{2}$ ft. dist. &
 raise mound of earth 4 ft. base 2 ft. high W. of cor.
 Land level
 Soil loose red sandy loam, medium texture, 12 to 18 ins.
 deep on clay sub-soil
 Good grass
 No timber.

Thence I run
 S. 89° 54' E. on random line bet. secs. 16 & 21
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.96 Fall 7 lks. S: of cor. of secs. 15, 16, 21 & 22, herein-
 before described.
 Thence I run
 N. 89° 57' W. on true line bet. secs. 16 & 21
 Over level prairie land
 16.00 Dry shallow wash 30 lks. wide, course South
 39.98 Set an iron post 3 ft. long, 1 in. in dia. 26 ins. in ground
 for reestab. $\frac{1}{4}$ sec. cor., with a brass cap marked $\frac{1}{4}$ S 16 in
 N. & S 21 1913 in S. half. /of post
 Dig pits 13 x 13 x 12 ins. E. & W. \times 3 ft. dist. & raise
 mound of earth $3\frac{1}{2}$ ft. base $1\frac{1}{2}$ ft. high N. of cor.
 65.00 Dry shallow wash 30 lks. wide, course S.W.
 75.25 Wagon road bears N. & S.
 77.00 Wire fence bears N. & S., S.E. cor. of wire fence bears
 S 75 lks. dist.
 79.96 The cor. of secs. 16, 17, 20 & 21, hereinbefore described.
 Land level
 Soil loose red sandy loam, medium texture, 12 to 18 ins.
 deep on clay sub-soil
 Good grass
 No timber.
 Note: sun is obscured by clouds at noon on this day, render-
 ing an observation for latitude impossible. v23rd, 1913.
 Nov.

Nov. 24, 1913: At 9:30 a.m., l.m.t., I set off 20° 30' S.
 on decl. arc, 32° 23' on lat. arc and determine a mer. with
 the solar at the cor. of secs. 16, 17, 20 & 21, hereinbe-
 fore described.
 Thence I run
 N. 0° 02' W. bet. secs. 16 & 17
 Over slightly rolling prairie land
 16.00 Dry shallow wash 30 lks. wide, course S.W.
 36.00 Old wagon road bears N.W. & S.E.
 40.00 Set an iron post 3 ft. long, 1 in. in dia., 26 ins. in ground
 for reestab. $\frac{1}{4}$ sec. cor., with a brass cap marked $\frac{1}{4}$ S 17 in
 W., S 16 in E. & 1913 in S. half. /of post
 Dig pits 13 x 13 x 12 ins. N. & S. \times 3 ft. dist. & raise
 mound of earth $3\frac{1}{2}$ ft. base $1\frac{1}{2}$ ft. high W. of cor.
 78.50 Wire fence bears E. & W., N.E. cor. of wire fence bears
 E. 250 lks. dist.
 30.00 Set an iron post 3 ft. long, 2 ins. in dia., 24 ins. in ground
 for reestab. cor. of secs. 8, 9, 16 & 17, with a brass cap
 marked T 11 S R 24 E in N. & 1913 in S. half, S 8 in N.W.,
 S 9 in N.E., S 16 in S.E. & S 17 in S.W. quadrant.

RESURVEY OF SUBDIVISION LINES OF TOWNSHIP 11 SOUTH, RANGE 24 E.

Dig pits 13 x 13 x 12 ins. in each sec. $5\frac{1}{2}$ ft. dist. & raise mound of earth $\frac{1}{2}$ ft. base 2 ft. high W. of cor.
 Note: from this cor. old cor. of secs. 8, 9, 16 & 17, which is a sand stone 3 x 3 x 5 ins. firmly set & marked as described by Surveyor General, bears N. $54\frac{1}{2}^{\circ}$ E. 87 lks. dist. I destroy all trace of this old cor.

Land level & rolling

Soil loose red sandy loam, medium texture, 12 to 13 ins. deep on clay sub-soil

Good grass

No timber.

 Thence I run

S. $39^{\circ} 57'$ E. on random line bet. secs. 9 & 16

Set temp. $\frac{1}{4}$ sec. cor.

40.00

79.96

Fall 12 lks. N. of cor. of secs. 9, 10, 15 & 16, hereinbefore described.

Thence I run

N. $39^{\circ} 52'$ W. on true line bet. secs. 9 & 16

Over level prairie land

2.00

Dry shallow wash 20 lks. wide, course S.W.

39.93

Set an iron post 3 ft. long, 1 in. in dia., **26ins. in ground for reestab.** $\frac{1}{4}$ sec. cor., with a brass cap marked $\frac{1}{4}$ S 9 in N. & S 16 1913 in S. half. /of post

Dig pits 13 x 13 x 12 ins. N. & S. $\frac{1}{2}$ ft. dist. & raise mound of earth $3\frac{1}{2}$ ft. base $1\frac{1}{2}$ ft. high N. of cor.

79.50

79.96

Wagon road bears N.W. & S.E.

The cor. of secs. 8, 9, 16 & 17, hereinbefore described.

Land level & rolling

Soil loose red sandy loam, medium texture, 12 to 13 ins. deep on clay sub-soil

Good grass

No timber.

 Thence I run

N. $0^{\circ} 02'$ W. bet. secs. 8 & 9

Over slightly rolling prairie land

.25

Wagon road bears N.W. & S.E.

22.50

40.00

Set an iron post 3 ft. long, 1 in. in dia., **26ins. in ground for reestab.** $\frac{1}{4}$ sec. cor., with a brass cap marked $\frac{1}{4}$ S 8 in W., S 9 in E. & 1913 in S. half. /of post

Dig pits 13 x 13 x 12 ins. N. & S. $\frac{1}{2}$ ft. dist. & raise mound of earth $3\frac{1}{2}$ ft. base $1\frac{1}{2}$ ft. high W. of cor.

45.00

45.50

30.00

Dry shallow wash 30 lks. wide, course S.W.

Ruins of old adobe house bears W. 25 chs. dist.

Set an iron post 3 ft. long, 2 ins. in dia., **24ins. in ground for reestab.** cor. of secs. 4, 5, 8 & 9, with a brass cap marked T 11 S R 24 E in N. & 1913 in S. half, S 5 in N.W., S 4 in N.E., S 9 in S.E. & S 3 in S.W. quadrant.

Dig pits 13 x 13 x 12 ins. in each sec. $5\frac{1}{2}$ ft. dist. & raise mound of earth 4 ft. base 2 ft. high W. of cor.

Land level & rolling

Soil loose red sandy loam, medium texture, 12 to 13 ins. deep on clay sub-soil

Good grass

No timber

Note: from the above described cor. point for old cor. of secs. 4, 5, 8 & 9, as determined from decayed mesquite stake in S.E. pit bears N. 45° E. 72 lks. dist. I destroy all trace of this old cor.

 Thence I run

S. $39^{\circ} 52'$ E. on random line bet. secs. 4 & 9

Set temp. $\frac{1}{4}$ sec. cor.

40.00

79.94

Fall 5 lks. S. of cor. of secs. 3, 4, 9 & 10, hereinbefore described.

RECURVEY OF SUBDIVISION ^{LNES} OF TOWNSHIP 11 SOUTH, RANGE 24 EAST

Thence I run
 ✓ N. 89° 54' W. on true line bet. secs. 4 & 9
 Over slightly rolling prairie land through scattering mesquite brush & yuccas 3 to 5 ft. high
 20.00 Leave scattering yuccas bears N. & S.
 39.97 Set an iron post 3 ft. long, 1 in. in dia., **26ins.in.ground for reestab. 1/4 sec. cor.**, with a brass cap marked 1/4 S 4 in N. & S 9 1913 in S. half. /of post
 Dig pits 13 x 18 x 12 ins. E. & W. 3 ft. dist. & raise mound of earth 3 1/2 ft. base 1 1/2 ft. high N. of cor.
 79.94 The cor. of secs. 4, 5, 8 & 9, hereinbefore described.
 Land level & rolling
 Soil loose red sandy loam, medium texture, 12 to 13 ins. deep on clay sub-soil
 Good grass, scattering mesquite brush & yuccas 3 to 5 ft. high
 No timber.

 Thence I run
 ✓ N. 0° 02' W. bet. secs. 4 & 5
 Over slightly rolling prairie land
 2.00 Dry wash 10 lks. wide, 2 ft. deep, course S.W.
 40.00 Set an iron post 3 ft. long, 1 in. in dia. **26ins.in.ground for reestab. 1/4 sec. cor.**, with a brass cap marked 1/4 S 5 in W., S 4 in E. & 1913 in S. half. /of post
 Dig pits 13 x 13 x 12 ins. N. & S. 3 ft. dist. & raise mound of earth 3 1/2 ft. base 1 1/2 ft. high W. of cor.
 77.00 Dry shallow wash 20 lks. wide, course S.W.
 80.69 Intersect Second Standard Parallel South 26.40 chs. S. 39° 55' W. of Standard cor. of secs. 32 & 33, previously re-estab. by me, as described in Book "B" of Group 22.
 Set an iron post 3 ft. long, 2 ins. in dia. **24ins.in.ground for reestab. closing cor. of secs. 4 & 5**, with a brass cap marked CC S. of center, T 11 S R 24 E S 32 S 33 in N. & 1913 in S. half, S 4 in S.E. & S 5 in S.W. quadrant.
 Dig pits 24 x 13 x 12 ins. crosswise on each line **E & W 3 ft. & S. of post 7 ft. dist.** & raise mound of earth 4 ft. base 2 ft. high S. of cor.
 Land level & rolling
 Soil loose red sandy loam, medium texture, 12 to 13 ins. deep on clay sub-soil
 Good grass,
 No timber.

Nov. 24th, 1913..

Nov. 25, 1913:

At 9h. 0 m., a.m., l.m.t., I set off 20° 42' S on decl. arc, 32° 25 1/2' on lat. arc and determine a mer. with the solar at the cor. of secs. 31 & 32, on S. bdy. of Tp. Previously reestab. by me, as described in Book "A" of this Group.
 Thence I run
 ✓ N. 0° 03' W. bet. secs. 31 & 32
 Over level prairie land through cultivated field
 .25 Wire fence bears E. & W. leave cultivated field, thence across lane
 .50 Wagon road bears E. & W.
 1.00 Wire fence bears E. & W. S.E. cor. of wire fence bears E. 2 chs. dist., thence W. of lane
 36.00 Marie Brookreson's cabin bears E. 15 chs. dist.
 40.00 Set an iron post 3 ft. long, 1 in. in dia., **26ins.in.ground for reestab. 1/4 sec. cor.**, with a brass cap marked 1/4 S 31 in W. S 32 in E. & 1913 in S. half. /of post
 Dig pits 13 x 13 x 12 ins. N. & S. 3 ft. dist. & raise mound of earth 3 1/2 ft. base 1 1/2 ft. high W. of cor.
 41.00 N.W. cor. of wire fence bears E. 2 chs. dist.
 65.00 Wire fence bears E. & W.
 80.00 Set an iron post 3 ft. long, 2 ins. in dia. **24ins.in.ground for reestab. cor. of secs. 29, 30, 31 & 32**, with a brass cap marked T 11 S R 24 E in N. & 1913 in S. half, S 30 in N.W., S 29 in N.E., S 32 in S.E. & S 31 in S.W. quadrant.

LINES
RESURVEY OF SUBDIVISION **A** OF TOWNSHIP 11 SOUTH, RANGE 24 EAST

	<p>Dig pits 13 x 13 x 12 ins. in each sec. $5\frac{1}{2}$ ft. dist. & raise mound of earth $4\frac{1}{2}$ ft. base $1\frac{1}{2}$ ft. high W. of cor. Land level Soil loose red sandy loam, medium texture, 12 to 13 ins. deep on clay sub-soil Good grass No timber.</p>

	<p>The cor. of secs, 28, 29, 32 & 33, being plainly visible, I run S. $39^{\circ} 48'$ E. for said cor. on random line bet. secs. 29 & 32</p>
40.00	Set temp. $\frac{1}{4}$ sec. cor.
30.04	Intersect cor. of secs. 28, 29, 32 & 33, hereinbefore described. Thence I run N. $39^{\circ} 48'$ W. on true line bet. secs. 29 & 32 Over level prairie land parallel to & S. of wire fence.
40.02	Set an iron post 3 ft. long, 1 in. in dia., 26 ins. in ground for reestab. $\frac{1}{4}$ sec. cor., with a brass cap marked $\frac{1}{4}$ S 29 in N. & S 32 1913 in S. half. /of post
	Dig pits 13 x 13 x 12 ins. E. & W. $3\frac{1}{2}$ ft. dist. & raise mound of earth $3\frac{1}{2}$ ft. base $1\frac{1}{2}$ ft. high N. of cor.
72.00	Wire fence bears N. & S, cor. of wire fence bears N. 10 lks. dist.
30.04	The cor. of secs. 29, 30, 31 & 32, hereinbefore described. Land level Soil loose red sandy loam, medium texture, 12 to 18 ins. deep on clay sub-soil Good grass No timber.

	on west bdy. of Tp.
	The cor. of secs. 25, 30, 31 & 36, A being plainly visible, I run N. $39^{\circ} 55'$ W. on true line for said cor. bet. secs. 30 & 31
13.00	Over level prairie land along N. edge of cultivated land Wire fence bears N. & S. cor. of wire fence bears N. 2 lks. dist.
20.00	Wire fence bears S. 89° W., N. 89° E
21.00	Wire fence bears N. & S.
38.00	Mr. Blake's house bears N. 5 chs. dist.
40.00	Set an iron post 3-ft.-long, 1 in. in dia., 26 ins. in ground for reestab. $\frac{1}{4}$ sec. cor., with a brass cap marked $\frac{1}{4}$ S 30 in N. & S 31 1913 in S. half. /of post
	Dig pits 13 x 13 x 12 ins. E. & W. $3\frac{1}{2}$ ft. dist. & raise mound of earth $3\frac{1}{2}$ ft. base $1\frac{1}{2}$ ft. high N. of cor.
41.00	Wire fence bears N. & S.
77.27	Wire fence bears N. & S. cor. of wire fence bears S. 5 lks. dist.
77.77	Intersect W. bdy of Tp. at cor. of secs. 25, 30, 31 and 36, previously reestab. by me, as described in Book "A" of this Group. Land level Soil loose red sandy loam, medium texture 12 to 13 ins. deep on clay sub-soil Good grass No timber.

	From the cor. of secs. 29, 30, 31 & 32, hereinbefore described, I run N. $0^{\circ} 03'$ W. bet. secs. 29 & 30 Over level prairie land through scattering yuccas 4 to 7 ft. high
.12	Wire fence bears E. & W.
33.00	Eugene Dimock's house bears E. 10 chs. dist.
40.00	Set an iron post 3 ft. long, 1 in. in dia., 26 ins. in ground for reestab. $\frac{1}{4}$ sec. cor., with a brass cap marked $\frac{1}{4}$ S 30 in W., S 29 in E. & 1913 in S. half.

RESURVEY OF LINES SUBDIVISION OF TOWNSHIP 11 SOUTH, RANGE 24 EAST

40.10 Dig pits 18 x 18 x 12 ins. N. & S. ^{/of post} 3 ft. dist. " raise mound of earth 3 1/2 ft. base 1 1/2 ft. high W. of cor.

43.00 From the above described cor. Alling Millard's house bears N. 87 1/2° W.

79.25 Wire fence bears E. & W.

80.00 R. D. Tolladay's house bears E. 10 chs. dist.

Wire fence bears E. & W.

Set an iron post 3 ft. long, 2 ins. in dia., **24 ins. in ground** for reestab. cor. of secs. 19, 20, 29 & 30, with a brass cap marked T 11 S R 24 E in N. & 19 1/3 in S. half, S 19 in N.W., S 20 in E.E., S 29 in S.E. & S 30 in S.W. quadrant.

Dig pits 18 x 18 x 12 ins. in each sec. 5 1/2 ft. dist. & raise mound of earth 4 ft. base 2 ft. high W. of cor.

From the above described cor. Alling Millard's house bears S. 60 1/2° W.

Land level

Soil loose red sandy loam, medium texture, 12 to 18 ins. deep on clay sub-soil.

Good grass

No timber.

Notes: At the above described cor. I set off 20° 44 1/2' S. on decl. arc and at 11 h. 46 m. 58 s., a.m., l.m.t., observe the sun on the mer. and obtain a reading of 32° 27' on lat. arc.

The cor. of secs. 20, 21 28 & 29, being plainly visible, I run S. 89° 51' E. for said cor. on random line bet. secs. 20 & 29

40.00 Set temp. 1/2 sec. cor.

80.04 Intersect cor. of secs. 20, 21, 28 & 29, hereinbefore described.

Thence I run N. 89° 51' W. on true line bet. secs. 20 & 29

Over level prairie land parallel to & N. of wire fence.

40.02 Set an iron post 3 ft. long, 1 in. in dia. **26 ins. in ground** for reestab. 1/2 sec. cor., with a brass cap marked 1/4 S 20 in N. & S 29 19 1/3 in S. half.

^{/of post} Dig pits 18 x 18 x 12 ins. E. & W. 3 ft. dist. & raise mound of earth 3 1/2 ft. base 1 1/2 ft. high N. of cor.

74 1/50 Lem Myers' house bears N. 7 chs. dist.

77.00 Cor. of wire fence bears South 75. lks. dist.

80.04 The cor. of secs. 19, 20, 29 & 30, hereinbefore described.

Land level

Soil loose red sandy loam, medium texture, 12 to 18 ins. deep on clay sub-soil

Good grass

No timber.

on West bdy. of Tp.

The cor. of secs. 19, 24, 25 & 30 being plainly visible, I run West on true line bet. secs. 19 & 30

Over level prairie land along dim wagon road parallel to & N. of wire fence

20.00 Enter scattering yuccas 4 to 7 ft. high bears N. & S

34.80 Wire fence bears N. & S. S.E. cor. of wire fence bears S. 20 lks. dist. thence parallel to & N. of lane

40.00 Set an iron post 3 ft. long, 1 in. in dia. **26 ins. in ground** for reestab. 1/4 sec. cor., with a brass cap marked 1/4 S 19 in N. & S 30 19 1/3 in S. half.

^{/of post} Dig pits 18 x 18 x 12 ins. E. & W. 3 ft. dist. " raise mound of earth 3 1/2 ft. base 1 1/2 ft. high N. of cor.

50.00 Leave scattering yuccas bears N. & S.

62.00 Wire fence bears N. & S.

63.00 J. W. Roberts' house bears N. 2 chs. dist.

64.00 S.E. cor. of cultivated field, thence along S. edge of cultivated land

74.00 Wire fence bears N. & S., S.W. cor. of fence **brs. S. 20, lks. dist.**

77.65 ^{W. bdy. of Tp. at} Intersect cor. of secs. 19, 24, 25 & 30, previously re-established by me, as described in Book "A" of this Group.

LINES
 RECURVEY OF SUBDIVISION OF TOWNSHIP 11 SOUTH, RANGE 24 EAST

	<p>Land level Soil loose red sandy loam, medium texture, 12 to 13 ins deep on clay sub-soil Good grass, scattering yuccas 4 to 7 ft. high No timber.</p>

	<p>From the cor. of secs. 19, 20, 29 & 30, hereinbefore described, I run N. 0° 03' W. bet. secs. 19 & 20 Over level prairie land</p>
15.00	Enter scattering yuccas 4 to 7 ft. high bears N.E. & S.W.
32.00	Dim wagon road bears N.E. & S.W.
40.00	Set an iron post 3 ft. long, 1 in. in dia., 26 ins. in ground for reestab. 1/4 sec. cor. , with a brass cap marked $\frac{1}{4}$ S 19 in W., S 20 in E. & 19 1/3 in S. half. /of post
	Dig pits 13 x 13 x 12 ins. N. & S. $\frac{1}{2}$ ft. dist. & raise mound of earth $3\frac{1}{2}$ ft. base $1\frac{1}{2}$ ft. high W. of cor.
42.00	Z.L. Myers' house bears E. 6 chs. dist. leave scattering yuccas bears E. & W.
79.50	Wagon road bears E. & W.
79.80	Wire fence bears E. & W.
80.00	Set an iron post 3 ft. long, 2 ins. in dia., 24 ins. in ground for reestab. cor. of secs. 17, 18, 19 & 20, with a brass cap marked T 11 S R 24 E in N. & 19 1/3 in S. half, S 13 in N.W., S 17 in N.E., S 20 in S.E. & S 19 in S.W. quadrant. Dig pits 13 x 13 x 12 ins. in each sec. $5\frac{1}{2}$ ft. dist. & raise mound of earth 4 ft. base 2 ft. high W. of cor. Land level & rolling Soil loose red sandy loam, medium texture, 12 ins. deep on clay sub-soil Good grass, scattering yuccas 4 to 7 ft. high No timber.
	Nov. 25th, 1913.

	Nov. 26, 1913:
	<p>Nov. 26 At; 9 h. 10 m., a.m., l.m.t., I set off 20° 54' S. on decl. arc, 32° 28' on lat. arc and determine a mer. with the solar at the cor. of secs. 17, 18, 19 & 20, above described</p>
	Thence I run
	S. 89° 51' E. on random line bet. secs. 17 & 20
40.00	Set temp. $\frac{1}{4}$ sec. cor.
30.04	Fall 7 lks. S. of cor. of secs. 16, 17, 20 & 21, hereinbefore described.
	Thence I run
	N. 89° 54' W. on true line bet. secs. 17 & 20
	Over slightly rolling prairie land
20.02	Dry Wash 20 lks. wide, 1 ft. deep, course S.W.
40.02	Set an iron post 3-ft.-long, 1 in. in dia., 26 ins. in ground for reestab. 1/4 sec. cor. , with a brass cap marked $\frac{1}{4}$ S 17 in N. & S 20 19 1/3 in S. half. /of post
	Dig pits 13 x 13 x 12 ins. E. & W. $\frac{1}{2}$ ft. dist. & raise mound of earth $3\frac{1}{2}$ ft. base $1\frac{1}{2}$ ft. high N. of cor.
76.00	Wire fence bears N. & S., S.W. cor. of wire fence bears S. 20 lks. dist.
76.50	Wagon road bears N. & S.
77.00	Wire fence bears N. & S., S.E. cor. of wire fence bears S. 20 lks. dist.
30.04	The cor. of secs. 17, 18, 19 & 20, hereinbefore described. Land level & rolling Soil loose red sandy loam, medium texture, 12 to 13 ins. deep on clay sub-soil. Good grass No timber.

RESURVEY OF SUBDIVISION LINES of T.11 SOUTH, RANGE 24 EAST

Thence I run
 ✓ West on random line bet. secs. 18 & 19
 40.00 Set temp. 4 sec. cor.
 77.62 Intersect W. bdy. of Tp. 12 lks. N. of cor. of secs. 13, 18, 19 & 24, previously re-**estab. by me, as described in Book "A" of this Group.** Thence I run,
 N. 39° 55' E. on true line bet. secs. 18 & 19
 Over level prairie land through lane
 3.00 Cors. of wire fences bears N. & S. 50 lks. dist. each.
 3.25 Wagon road bears N. & S.
 3.75 Cors. of wire fences bears N. & S. 50 lks. dist. Wash
 10.00 W. E. Hun shell's house bears S. 10 chs. dist.
 35.00 Wire fence bears N. 89° W., S 99° E. leave lane thence along N. side of wire fence.
 37.00 Dry wash 10 lks. wide, 2 ft. deep, course S.W.
 37.62 Set an iron post 3 ft. long, 1 in. in dia. **26ins. in ground, for reestab. 1/4 sec. cor.,** with a brass cap marked 1/4 S 13 in N. & S 19 1/2 13 in S. half. /of post
 Dig pits 13 x 13 x 12 ins. E. & W. 3 ft. dist. & raise mound of earth 3 1/2 ft. base 1 1/2 ft. high N. of cor.
 43.00 N.E. cor. of wire fence bears S. 1 ch. dist.
 77.62 The cor. of secs. 17, 18, 19 & 20, hereinbefore described.
 Land level & rolling
 Soil loose red sandy loam, medium texture, 12 to 13 ins. deep on clay sub-soil
 Good grass
 No timber.

Thence I run
 ✓ N. 0° 03' W. bet. secs. 17 & 18
 Over slightly rolling prairie land
 36.00 L.B. Simon's house bears E. 10 chs. dist.
 40.00 Set an iron post 3 ft. long, 1 in. in dia. **26ins. in ground, for reestab. 1/4 sec. cor.,** with a brass cap marked 1/4 S 13 in W., S 17 in E. & 19 1/2 in S. half. /of post
 Dig pits 13 x 13 x 12 ins. N. & S. 3 ft. dist. & raise mound of earth 3 1/2 ft. base 1 1/2 ft. high W. of cor.
 43.00 H. C. Johnson's house bears E. 10 chs. dist.
 55.00 Dry shallow wash 20 lks. wide, course S.W.
 78.50 Wire fence bears E. & W
 80.00 Set an iron post 3 ft. long, **2ins. in dia., 24ins. in ground for reestab. cor. of secs. 7, 8, 17 & 18,** with a brass cap marked T 11 S R 24 E in N. & 19 1/2 in S. half, S 7 in N.W., S 8 in N.E., S 17 in S.E. & S 13 in S.W. quadrant.
 Dig pits 13 x 13 x 12 ins. in each sec. 5 1/2 ft. dist. & raise mound of earth 4 ft. base 2 ft. high W. of cor.
 Land level & rolling
 Soil loose red sandy loam, medium texture, 12 to 13 ins. deep on clay sub-soil
 Good grass
 No timber.

Thence I run
 ✓ S. 89° 54' E. on random line bet. sec. 8 & 17
 40.00 Set temp. 4 sec. cor.
 80.04 Fall 2 lks. S. of cor. of secs. 8, 9, 16 & 17, hereinbefore described
 Thence I run
 ✓ N. 89° 55' W. on true line bet. secs. 3 & 17
 Over slightly rolling prairie land
 9.00 Old wagon road bears N. & S.
 40.02 Set an iron post 3 ft. long, 1 in. in dia. **26ins. in ground for reestab. 1/4 sec. cor.,** with a brass cap marked 1/4 S 3 in N. & S 17 1/2 13 in S. half. /of post
 Dig pits 13 x 13 x 12 ins. E. & W. 3 ft. dist. & raise mound of earth 3 1/2 ft. base 1 1/2 ft. high N. of cor.
 45.00 Dry shallow wash 30 lks. wide, course S.W.
 76.00 N.W. cor. of wire fence bears S. 150 lks. dist.
 77.00 N.E. cor. of wire fence bears S. 150 lks. dist.

RESURVEY OF SUBDIVISION ^{LINE} OF TOWNSHIP 11 SOUTH, RANGE 24 EAST

80.04 The cor. of secs. 7, 8, 17 & 18 hereinbefore described.
 Land level & rolling
 Soil loose red sandy loam, medium texture, 12 to 13 ins. deep on clay sub-soil
 Good grass
 No timber.

Thence I run
 S. 39° 55' W. on random line bet. secs. 7 & 18

40.00 Set temp. & sec. cor.
 77.58 Intersect W. bdy. of Tp. 4 lks. N. of cor. of secs. 7, 12, 13 & 18, previously re-established by me, as described in Book "A" of this group. Thence I run,
 N. 89° 53' E. on true line bet. secs. 7 & 18
 Over level prairie land

3.50 N.W. cor. of wire fence bears S. 70 lks. dist.
 5.00 F. W. Draper's house bears N. 5 chs. dist.
 37.58 Set an iron post 3 ft. long, 1 in. in dia. 26 ins. in ground for reestab. 1/4 sec. cor., with a brass cap marked S 7 in N. & S 18 1913 in S. half. /of post
 Dig pits 13 x 13 x 12 ins. N. & W. 3 ft. dist. & raise mound of earth 3 1/2 ft. base 1 1/2 ft. high N. of cor.

77.58 The cor. of secs. 7, 8, 17 & 18, hereinbefore described.
 Land level
 Soil loose red sandy loam, medium texture, 12 to 13 ins. deep on clay subsoil
 Good grass
 No timber.

Note: sun is obscured by clouds at noon on this day, rendering observation for latitude impossible.
 Nov. 26th, 1913.

Nov. 28, 1913:
 At; 8 h. 30 m., a.m., l.m.t., I set off 21° 15 1/2' S. on decl. arc, 32° 29' on lat. arc and determine a mer. with the solar at the cor. of secs. 7, 8, 17 & 18, hereinbefore described.

Thence I run
 N. 0° 03' W. bet. secs. 7 & 8
 Over level prairie land

40.00 Set an iron post 3 ft. long, 1 in. in dia. 26 ins. in ground for reestab. 1/4 sec. cor., with a brass cap marked S 7 in W., S 8 in E. & 1913 in S. half. /of post
 Dig pits 13 x 13 x 12 ins. N. & S. 3 ft. dist. & raise mound of earth 3 1/2 ft. base 1 1/2 ft. high W. of cor.

30.00 Set an iron post 3 ft. long, 2 ins. in dia., 24 ins. in ground for reestab. cor. of secs. 5, 6, 7 & 8, with a brass cap marked T 11 S R 24 E in N. & 1913 in S. half, S 6 in N.W., S 5 in N.E., S 8 in S.E. & S 7 in S.W. quadrant.
 Dig pits 13 x 13 x 12 ins. in each sec. 5 1/2 ft. dist. & raise mound of earth 4 ft. base 2 ft. high W. of cor
 Land level
 Soil loose red sandy loam, medium texture, 12 to 13 ins. deep on clay sub-soil
 Good grass
 No timber.

Thence I run
 S. 39° 55' E. on random line bet. secs. 5 & 8

40.00 Set temp. & sec. cor.
 30.04 Fall 2 lks. N. of cor. of secs. 4, 5, 8 & 9, hereinbefore described.

Thence I run
 N. 39° 54' W. on true line bet. secs. 5 & 8
 Over slightly rolling prairie land

12.00 Wagon road bears N. & S.
 15.00 Dry shallow wash 40 lks. wide, course S.W.
 34.50 Wagon road bears N. & S.
 40.02 Set an iron post 3 ft. long, 1 in. in dia. 26 ins. in ground, for reestab. 1/4 sec. cor., with a brass cap, marked S 5 in N. & S 8 1913 in S. half.

LINES
RESURVEY OF SUBDIVISION OF TOWNSHIP 11 SOUTH, RANGE 24 EAST

- 39.04 Dig pits 18x18x12 ins. E. and W. of post, 3 ft. dist., and raise mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.
- 80.04 The cor. of secs. 5, 6, 7 and 8, hereinbefore described, ins. Land, level and rolling.
Soil, loose, red, sandy land, medium texture, 12 to 18 ins. deep
Iron clay subsoil.
Good grass. No timber.
-
- Thence I run
S. 89° 53' W. on random line bet. secs. 6 & 7
- 40.00 Set temp. 1/2 sec. cor.
- 77.50 Intersect W. bdy. of Tp. 2 lks. S. of cor. of secs. 1, 6, 7 & 12, previously re-established by me, as described by me in Book "A" of this Group. Thence I run,
N. 89° 54' E. on true line bet. secs. 6 & 7
Over level prairie land
- 37.50 Set an iron post 3 ft. long, 1 in. in dia. 26 ins. in ground for reestab. 1/4 sec. cor., with a brass cap marked S 6 in N. & S 7 1913 in S. half. /of post
Dig pits 18 x 18 x 12 ins. E. & W. x 3 ft. dist. & raise mound of earth 3 1/2 ft. base 1 1/2 ft. high N. of cor.
- 77.50 The cor. of secs. 5, 6, 7 & 8, hereinbefore described.
Land level
Soil loose red sandy loam, medium texture, 12 to 13 ins. deep on clay sub-soil
Good grass
No timber.
-
- Thence I run
N. 0° 03' W. bet. secs. 5 & 6
Over level prairie land
- 40.00 Set an iron post 3 ft. long, 1 in. in dia. 26 ins. in ground for reestab. 1/4 sec. cor., with a brass cap marked S 6 in W., S 5 in E. & 1913 in S. half. /of post
Dig pits 18 x 18 x 12 ins. N. & S. x 3 ft. dist. & raise mound of earth 3 1/2 ft. base 1 1/2 ft. high W. of cor.
- 30.46 Intersect Second Standard Parallel South 26.44 chs. S. 89° 55' W. of Standard cor. of secs. 31 & 32, previously re-established by me, as described in Book "B" of Group 22.
Set an iron post 3 ft. long, 2 ins. in dia. 24 ins. in ground, for reestab. clos. corner. of secs. 5 & 6, with a brass cap marked CC S. of center, T 11 S R 24 E S 31 S 32 in N. & 1913 in S. half, S 5 in S.E. & S 6 in S.W. quadrant.
Dig pits 24 x 18 x 12 ins. crosswise on each line E & W 3 ft. & S 1 of post 7 ft. dist. & raise mound of earth 4 ft. base 2 ft. high S. of cor.
Land level.
Soil loose red sandy loam, medium texture, 12 to 13 ins. deep on clay sub-soil
Good grass
No timber.
- Note: sun obscured by clouds at noon, on this day, rendering observation for latitude impossible. Nov. 23, 1913.

GENERAL DESCRIPTION

This township consists nearly entirely of slightly sloping plain land. Soil is of red sandy loam, medium texture, ranging in depth from 12 to 13 ins., which supports a good growth of grama-grass affording excellent grazing for stock. Good supply of water has been obtained at a depth of from 30 to 200 ft. in the Western portion of the township, no water has been found in the eastern portion. The north-eastern portion of the township is covered with a scattering growth of mesquite brush, cat-claw, yuccas & cactus.

Thomas B. Matthews

U. S. Surveyor.

DEPARTMENT OF THE INTERIOR. UNITED STATES LAND OFFICE.

Phoenix, Arizona.

IN RE RESURVEY OF GROUP 25 - Arizona.

I, Foster W. Draper, being first duly sworn upon my oath state; that I am the owner by virtue of a legal transfer of the Sec. 24 & 25 of Twp. 4 N. R. 24 E., 19th R. B. M.; that I do not desire a special metes and bounds survey of said described land, but agree to conform my claim to the lines of the re-survey thereof; that my postoffice address is McWhorter, Arizona.

Foster W. Draper

I HEREBY CERTIFY that the foregoing affidavit was read to affiant in my presence before affiant affixed signature thereto; that affiant is to me personally known; that I verily believe affiant to be the identical person hereinbefore described, and that said affidavit was duly subscribed and sworn to before me this the 4 day of Feb, 1913.

Thomas B. Matthews
U. S. Surveyor.

DEPARTMENT OF THE INTERIOR. UNITED STATES LAND OFFICE. 27

Phoenix, Arizona.

IN RE RESURVEY OF GROUP 25 Arizona.

I, Foster W. Draper, being first duly sworn upon my oath state; that I am the same person who made ~~fixix~~ corrected entry of the 1/2 of sec 7 T11N, R. 24E. 13 & 14 R. 13 & 14 M that I do not desire a special metes and bounds survey of said described land, but agree to conform my claim to the lines of the resurvey thereof; that my postoffice address is McClister, Ariz.

Foster W. Draper

I HEREBY CERTIFY that the foregoing affidavit was read to affiant in my presence before affiant affixed signature thereto; that affiant is to me personally known; that I verily believe affiant to be the identical person hereinbefore described, and that said affidavit was duly subscribed and sworn to before me, this the 4 day of Feb., 1914.

Thomas B. Matthews
U. S. Surveyor.

DEPARTMENT OF THE INTERIOR. UNITED STATES LAND OFFICE.

Phoenix, Arizona.

IN RE RESURVEY OF GROUP 25, Arizona.

I, Henry C. Johnson, being first duly sworn upon my oath state; that I am the same person who made homestead entry of the 7 1/2 ac 17 T11d R24E. S. 1 & 2 R. B. & M.; that I do not desire a special metes and bounds survey of said described land, but agree to conform my claim to the lines of the resurvey thereof; that my postoffice address is Tempe, Ariz

Henry C. Johnson

I HEREBY CERTIFY that the foregoing affidavit was read to affiant in my presence before affiant affixed signature thereto; that affiant is to me personally known that I verily believe affiant to be the identical person hereinbefore described, and that said affidavit was duly subscribed and sworn to before me this the 7 day of Feb, 1914.

Thomas B. Matthe
U. S. Surveyor.

DEPARTMENT OF THE INTERIOR. UNITED STATES LAND OFFICE.

Phoenix, Arizona.

IN RE RESURVEY OF GROUP 25, Arizona.

I, Lem B. Summers, being first duly sworn upon my oath state; that I am the same person who made homestead entry of the 7 1/2 sec. 17 T. 11 N., R. 24 E., S. 4 R., B. 1 M.; that I do not desire a special metes and bounds survey of said described land, but agree to conform my claim to the lines of the resurvey thereof; that my postoffice address is John O. Sempoe Ariz

Sub
Lem B. Summers

I HEREBY CERTIFY that the foregoing affidavit was read to affiant in my presence before affiant affixed signature thereto; that affiant is to me personally known that I verily believe affiant to be the identical person hereinbefore described, and that said affidavit was duly subscribed and sworn to before me this the 7 day of Feb, 1914.

Thomas B. Matthews
 U. S. Surveyor.

DEPARTMENT OF THE INTERIOR. UNITED STATES LAND OFFICE.

Phoenix, Arizona.

IN RE RESURVEY OF GROUP 25, Arizona.

I, Eric Amelia Turner, being first duly sworn upon my oath state; that I am the same person who made homestead entry of the N¹/₂ of sec 18 T11N, R. 24E, S4R, B. & M.; that I do not desire a special metes and bounds survey of ~~xxxx~~ said described land, but agree to conform my claim to the lines of the resurvey thereof; that my postoffice address is Lompo, Ariz.

Eric Amelia Turner

I HEREBY CERTIFY that the foregoing affidavit was read to affiant in my presence before affiant affixed signature thereto; that affiant is to me personally known; that I verily believe affiant to be the identical person hereinbefore described, and that said affidavit was duly subscribed and sworn to before me this the 7 day of Feb, 1914.

Thomas B. Matthew
U. S. Surveyor.

DEPARTMENT OF THE INTERIOR. UNITED STATES LAND OFFICE.

Phoenix, Arizona.

IN RE RESURVEY OF GROUP 25, Arizona.

I, John S. Turner, being first duly sworn upon my oath state; that I am the same person who made homestead entry of the Wagon 18 T.M. B. 24 E. S. 4 N. R. 37 W.; that I do not desire a special metes and bounds survey of ~~XXXX~~ said described land, but agree to conform my claim to the lines of the resurvey thereof; that my postoffice address is Boulder, Colo.

J. S. Turner

I HEREBY CERTIFY that the foregoing affidavit was read to affiant in my presence before affiant affixed signature thereto; that affiant is to me personally known; that I verily believe affiant to be the identical person hereinbefore described, and that said affidavit was duly subscribed and sworn to before me this the 7 day of Feb, 1914.

Thomas B. Matthew
U. S. Surveyor.

DEPARTMENT OF THE INTERIOR. UNITED STATES LAND OFFICE.

Phoenix, Arizona.

IN RE RESURVEY OF GROUP 25,-Arizona.

I, William E. Howland, being first duly sworn upon my oath state; that I am the same person who made homestead entry of the W. 1/2 of sec 19 T. 11. N. R. 24 E. Co. 4. R. B. & M.; that I do not desire a special metes and bounds survey of said described land, but agree to conform my claim to the lines of the resurvey thereof; that my postoffice address is McClister, Ariz.

William E. Howland

I HEREBY CERTIFY that the foregoing affidavit was read to affiant in my presence before affiant affixed signature thereto; that affiant is to me personally known; that I verily believe affiant to be the identical person hereinbefore described, and that said affidavit was duly subscribed and sworn to before me this the 7 day of Feb., 1914.

Thomas B. Matthews
U. S. Surveyor.

DEPARTMENT OF THE INTERIOR. UNITED STATES LAND OFFICE.

Phoenix, Arizona.

IN RE RESURVEY OF GROUP 25, -Arizona.

I, J. W. Roberts, being first duly sworn upon my oath state; that I am the same person who made

homestead entry of the 1/2 Sec. 19
T11N R. 24E. S. 1/4 R. B. & M.;

that I do not desire a special metes and bounds survey of said described land, but agree to conform my claim to the lines of the resurvey thereof; that my postoffice address is McAllister.

J. W. Roberts

I HEREBY CERTIFY that the foregoing affidavit was read to affiant in my presence before affiant affixed signature thereto; that affiant is to me personally known; that I verily believe affiant to be the identical person hereinbefore described, and that said affidavit was duly subscribed and sworn to before me this the 1 day of Feb, 1914.

Thomas B. Matthews
U. S. Surveyor.

DEPARTMENT OF THE INTERIOR. UNITED STATES LAND OFFICE.

Phoenix, Arizona.

IN RE RESURVEY OF GROUP 25, -Arizona.

I, Zachariah L. Myers, being first duly sworn upon my oath state; that I am the same person who made homestead entry of the N^W of sec. 20 T11N R24E S4d R. B. & M; that I do not desire a special metes and bounds survey of said described land, but agree to conform my claim to the lines of the resurvey thereof; that my postoffice address is McClintock, Ariz.

Zachariah L. Myers

I HEREBY CERTIFY that the foregoing affidavit was read to affiant in my presence before affiant affixed signature thereto; that affiant is to me personally known; that I verily believe affiant to be the identical person hereinbefore described, and that said affidavit was duly subscribed and sworn to before me this the 7 day of Feb., 1914.

Thomas B. Matthews
U. S. Surveyor.

DEPARTMENT OF THE INTERIOR. UNITED STATES LAND OFFICE.

Phoenix, Arizona.

IN RE RESURVEY OF GROUP 25, ⁶ Arizona.

I, Lem Myers, being first duly sworn upon my oath state; that I am the same person who made homestead entry of the 1/2 of sec 20 T11N, R24E, S1A, B, B&M; that I do not desire a special metes and bounds survey of ~~xxxxx~~ said described land, but agree to conform my claim to the lines of the resurvey thereof; that my postoffice address is McAlister, Ariz.

Lem Myers

I HEREBY CERTIFY that the foregoing affidavit was read to affiant in my presence before affiant affixed signature thereto; that affiant is to me personally known; that I verily believe affiant to be the identical person hereinbefore described, and that said affidavit was duly subscribed and sworn to before me this the 7 day of Feb, 1914.

Thomas B. Matthews
U. S. Surveyor.

DEPARTMENT OF THE INTERIOR. UNITED STATES LAND OFFICE.

Phoenix, Arizona.

IN RE RESURVEY OF GROUP 25, Arizona.

I, Eugene Demock, being first duly sworn upon my oath state; that I am the same person who made homestead entry of the 1/2 of ac 29 T14 R24E S94. R. B. M.; that I do not desire a special metes and bounds survey of said described land, but agree to conform my claim to the lines of the resurvey thereof; that my postoffice address is Tempe, Ariz.

Eugene Demock

I HEREBY CERTIFY that the foregoing affidavit was read to affiant in my presence before affiant affixed signature thereto; that affiant is to me personally known that I verily believe affiant to be the identical person hereinbefore described, and that said affidavit was duly subscribed and sworn to before me this the 6 day of Feb., 1914.

Thomas B. Matthews
U. S. Surveyor.

DEPARTMENT OF THE INTERIOR. UNITED STATES LAND OFFICE.

Phoenix, Arizona.

IN RE RESURVEY OF GROUP 25, Arizona.

I, Re *Colling Millard*, being first duly sworn upon my oath state; that I am the same person who made

homestead entry of the *W 2 Sec 30*

T11S R24E. Q74. R. B9 M;

that I do not desire a special metes and bounds survey of said described land, but agree to conform my claim to the lines of the resurvey thereof; that my postoffice address

is *M⁹ Webster*, *Ariz.*

Colling Millard

I ~~HEREBY~~ HEREBY CERTIFY that the foregoing affidavit was read to affiant in my presence before affiant affixed signature thereto; that affiant is to me personally known; that I verily believe affiant to be the identical person hereinbefore described, and that said affidavit was duly subscribed and sworn to before me this the 5 day of *Feb.*, 1914.

Thomas B. Matthews
U. S. Surveyor.

DEPARTMENT OF THE INTERIOR. UNITED STATES LAND OFFICE.

Phoenix, Arizona.

IN RE RESURVEY OF GROUP 25, - Arizona.

I, James W. Church, being first duly sworn upon my oath state; that I am the same person who made permitted entry of the E² of me 31 T.M.R. 24 E. G.H.R. B.F.M.;

that I do not desire a special metes and bounds survey of said described land, but agree to conform my claim to the lines of the resurvey thereof; that my postoffice address is M. Webster, Ariz.

James W Church

I HEREBY CERTIFY that the foregoing affidavit was read to affiant in my presence before affiant affixed signature thereto; that affiant is to me personally known; that I verily believe affiant to be the identical person hereinbefore described, and that said affidavit was duly subscribed and sworn to before me this the 19 day of Feb, 1914.

Thomas B. Matthews
U. S. Surveyor.

DEPARTMENT OF THE INTERIOR. UNITED STATES LAND OFFICE.

Phoenix, Arizona.

IN RE RESURVEY OF GROUP 25, - Arizona.

I, Sarah E. Williams, being first duly sworn upon my oath state; that I am the same person who made homestead entry of the W 1/2 sec. 31 T11N R24E. S44R. B. & M.; that I do not desire a special metes and bounds survey of said described land, but agree to conform my claim to the lines of the resurvey thereof; that my postoffice address is McWhorter, Ariz.

Sarah E. Williams

I HEREBY CERTIFY that the foregoing affidavit was read to affiant in my presence before affiant affixed signature thereto; that affiant is to me personally known; that I verily believe affiant to be the identical person hereinbefore described, and that said affidavit was duly subscribed and sworn to before me this the 19th day of Feb., 1914.

Thomas B. Matthews
U. S. Surveyor.

DEPARTMENT OF THE INTERIOR. UNITED STATES LAND OFFICE.

Phoenix, Arizona

IN RE RESURVEY OF GROUP 25, -Arizona.

I, Rollo D. Tolladay, being first duly sworn upon my oath state; that I am the same person who made

homestead entry of the W¹/₂ Sec 29 T11N R. 24 E. S4 R. 13 W.;

that I do not desire a special notes and bounds survey of said described land, but agree to conform my claim to the lines of the resurvey thereof; that my postoffice address is Empire, Ariz.

R. D. Tolladay

I HEREBY CERTIFY that the foregoing affidavit was read to affiant in my presence before affiant affixed signature thereto; that affiant is to me personally known; that I verily believe affiant to be the identical person hereinbefore described, and that said affidavit was duly subscribed and sworn to before me this the 6 day of Feb., 1914.

Thomas B. Matthews
U. S. Surveyor.

DEPARTMENT OF THE INTERIOR. UNITED STATES LAND OFFICE.

Phoenix, Arizona.

IN RE RESURVEY OF GROUP 25,-Arizona.

I, O. A. Blakeman, being first duly sworn upon my oath state; that I am the same person who ~~made~~ ^{has established residence on} ~~entry of~~ ^{the} ~~the~~ the degree 30 T11d R 2 1/2 E 67d R. B 7 M.; that I do not desire a special metes and bounds survey of said described land, but agree to conform my claim to the lines of the resurvey thereof; that my postoffice address is M^cWhiter, Ariz.

O. A. Blakeman

I HEREBY CERTIFY that the foregoing affidavit was read to affiant in my presence before affiant affixed signature thereto; that affiant is to me personally known; that I verily believe affiant to be the identical person hereinbefore described, and that said affidavit was duly subscribed and sworn to before me this the 6 day of Feb, 1914.

Thomas B. Matthews
U. S. Surveyor.

DEPARTMENT OF THE INTERIOR. UNITED STATES LAND OFFICE.

Phoenix, Arizona.

IN RE RESURVEY OF GROUP 25, Arizona.

I, Maria E. Brookerson, being first duly sworn upon my oath state; that I am the same person who made final homestead proof of the SW 1/4 of sec 32 T11N R24E; and am the legal owner of said tract; that I do not desire a special metes and bounds survey of said described land, but agree to conform my claim to the lines of the resurvey thereof; that my postoffice address is Wellton, Ariz.

Maria Brookerson

I HEREBY CERTIFY that the foregoing affidavit was read to affiant in my presence before affiant affixed signature thereto; that affiant is to me personally known; that I verily believe affiant to be the identical person hereinbefore described, and that said affidavit was duly subscribed and sworn to before me this the 20 day of June 1914.

Thomas B. Matthews
U. S. Surveyor.

In obtaining the settlers' agreements to conform their claims to the lines of the resurvey thereof there are a few with whom I have not been able to get in communication, but whose interests have not been impaired to any great extent, as there is no discernable difference between the land within their claims and the land surrounding same.

Thomas B. Matthews
U. S. Surveyor

BOOK 2723

For FINAL OATH OF UNITED STATES SURVEYOR.
(See Book "D.")

I, _____, U. S. Surveyor, do solemnly swear that, in pursuance of special instructions received from the U. S. Surveyor General for _____ bearing date of the _____ day of _____, 191 _____, I have well, faithfully, and truly, in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of _____ of the _____ Meridian, in the State of _____, which are represented in the foregoing field notes as having been executed by me, and under my direction; and I do further solemnly swear that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General for _____ and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

U. S. Surveyor.

Subscribed by said _____, and sworn to before me }
this _____ day of _____, 191 _____



APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix, Arizona, March 20, 1915

re-

The foregoing field notes of the survey of _____

Subdivision lines of Township 11 South, Range 24 East, of the Gila and Salt River Base and Meridian, Arizona,

executed by Thomas B. Matthews, U. S. Surveyor,
under his special instructions dated May 7, 1913 for Group 25, ~~1915~~, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the resurveys they describe, are hereby approved.

Frank S. Ingalls
~~1915~~ Surveyor General.
of Arizona.

I certify that the foregoing transcript of the field notes of the above described surveys in Book "J", has been correctly copied from the original notes on file in this office.

~~U. S. Surveyor General.~~
~~of Arizona.~~

BOOK 2729

FEB 16 1915


It is hereby agreed to conform to the lines of the resurvey of Township 11 South, Range 24 East, Gila and Salt River Base and Meridian, Arizona, as executed by the General Land Office in 1913, in so far as the following State lands and selections are concerned:

All of secs. 2, 3, 4, 5, 6, 9, 10, 11, 12, 13, 14, 15, 16, 21, 22, 23, 24, 25, 26, 27, 28, 33, 34, 35 and 36.
E $\frac{1}{2}$; N $\frac{1}{2}$ NW $\frac{1}{4}$; S $\frac{1}{2}$ SW $\frac{1}{4}$ sec. 8.

Dated

Phoenix Arizona
December 15, 1915

W. A. Moore
State Land Commissioner

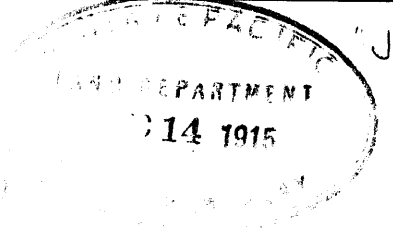

BOOK 210

The Santa Fe Pacific Railroad Company, successors in interest to the Atlantic and Pacific Railroad Company, hereby agree to conform its lieu selection embracing the S $\frac{1}{2}$ of the NW $\frac{1}{4}$, and the N $\frac{1}{2}$ of the SW $\frac{1}{4}$ of sec.8, T.11 S., R.24 E., Gila and Salt River Base and Meridian, Arizona, to the lines of the resurvey thereof as executed by the General Land Office in 1913:

Dated Topeka, Kansas,

December 14, 1915.

SANTA FE PACIFIC RAILROAD COMPANY,

By Howell Jones

Its Land Commissioner.

L.V. McCourt & William Riggs,

By U. E. Leovich & Co.

by J. Smith Page