

2970

Book "E."

4-679

BOOK 2970

FIELD NOTES

re-
OF THE SURVEY OF THE

South Boundary, and

Survey of

Subdivision Lines

of

TOWNSHIP 13 SOUTH, RANGE 26 EAST,

Of the Gila and Salt River Base and Meridian,

In the State of Arizona.

EXECUTED BY

Thomas B. Matthews,

In the capacity of U. S. Surveyor, under instructions dated August 21, 1914,
issued by the United States Surveyor General to govern surveys included in
Group No 35, which were approved by the Commissioner of the General Land
Office, September 2, 1914.

Resurvey & Survey commenced June 7, 1915.

Resurvey & Survey completed June 30, 1915.

Executed under assignment
Instructions dated Jan. 12, 1915.

0182
2970


0182
2970

1A

Book "E." 2970
Group 35 - Arizona.

BOOK 2970

INDEX DIAGRAM.

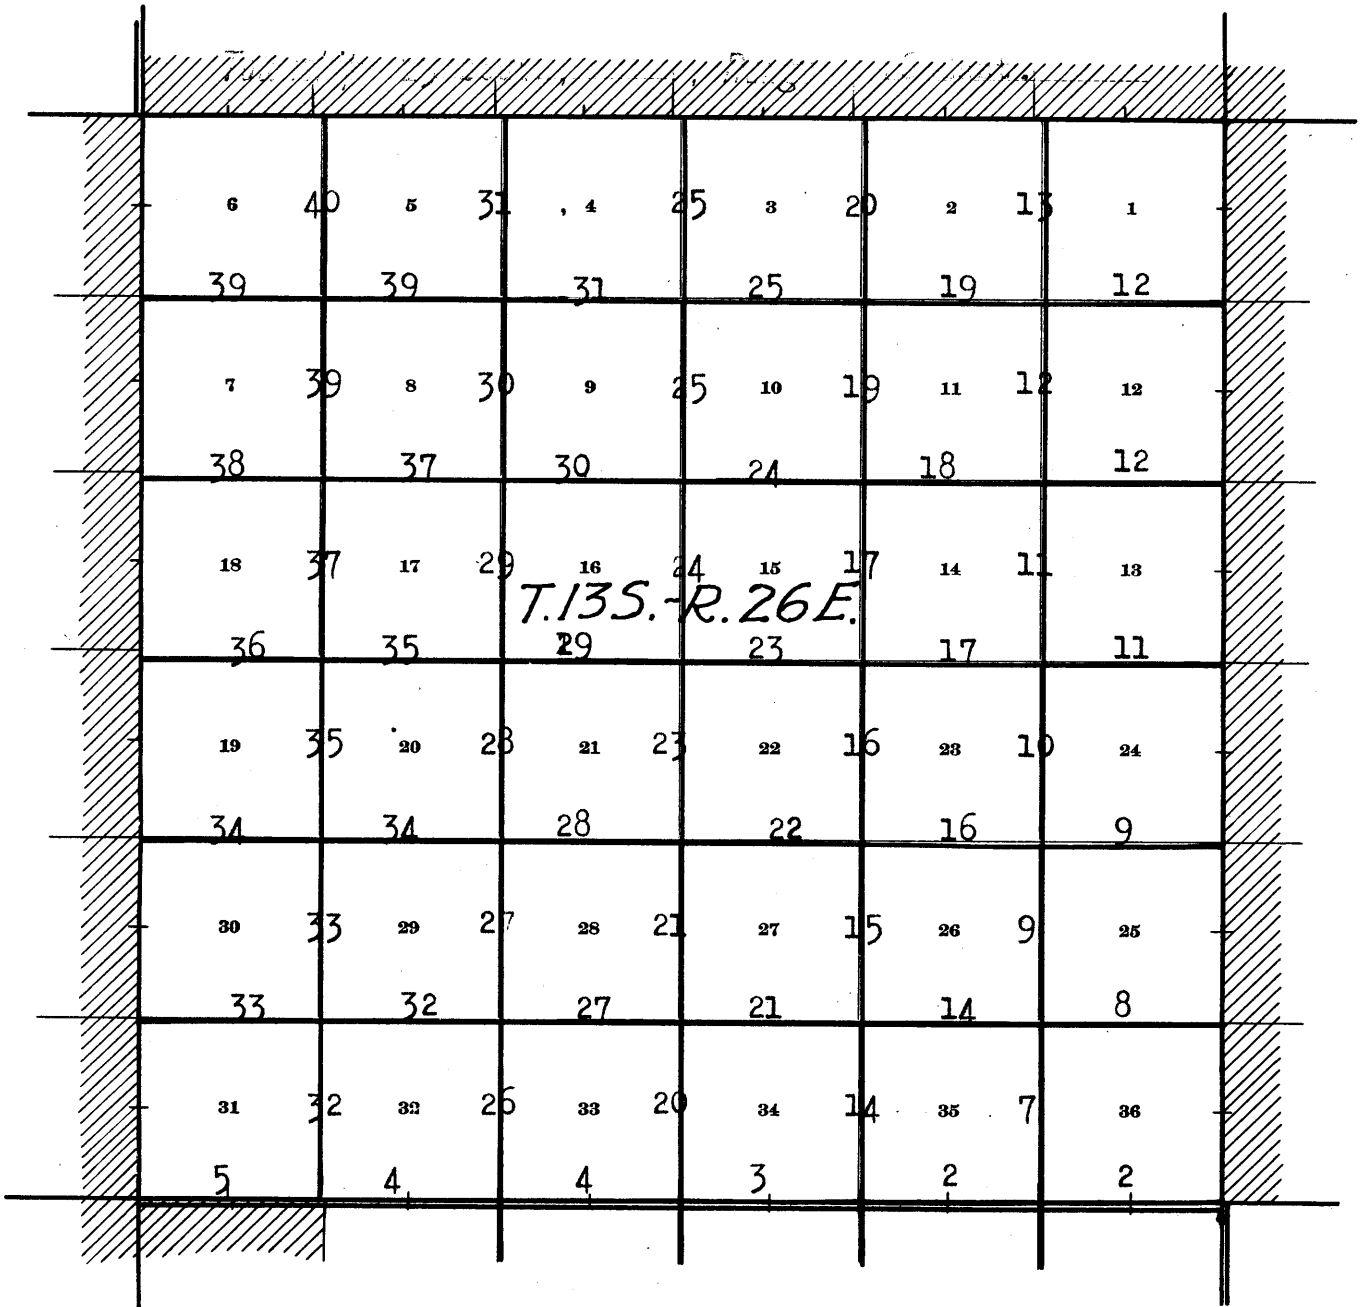

- Subdivision lines surveyed under this group.
- ===== Township boundaries resurveyed under this group.
- Accepted surveys.
- Unsurveyed.
- ////// Area subdivided as per accepted plats on file.

- DATE - DIAGRAM -
 Book "E" Group 35 Arizona
 TOWNSHIP 13 SOUTH - RANGE 26 EAST.

6 June 25-1915 June 25-1915	5 June 25-1915 June 24-1915	4 June 24-1915 June 23-1915	3 June 23-1915 June 23-1915	2 June 11-1915 June 9-1915	1 June 9-1915
7 June 19-1915 June 25-1915	8 June 24-1915 June 24-1915	9 June 23-1915 June 23-1915	10 June 18-1915 June 11-1915	11 June 11-1915 June 9-1915	12 June 9-1915
18 June 19-1915 June 19-1915	17 June 22-1915 June 23-1915	16 June 22-1915 June 18-1915	15 June 18-1915 June 11-1915	14 June 11-1915 June 9-1915	13 June 8-1915
19 June 19-1915 June 19-1915	20 June 21-1915 June 22-1915	21 June 21-1915 June 18-1915	22 June 13-1915 June 11-1915	23 June 10-1915 June 8-1915	24 June 8-1915
30 June 17-1915 June 16-1915	29 June 17-1915 June 21-1915	28 June 14-1915 June 13-1915	27 June 12-1915 June 10-1915	26 June 10-1915 June 7-1915	25 June 7-1915
31 June 16-1915 June 16-1915	32 June 14-1915 June 14-1915	33 June 12-1915 June 12-1915	34 June 10-1915 June 10-1915	35 June 7-1915 June 7-1915	36 June 12-1915
June 30-1915	June 30-1915	June 30-1915	June 12-1915	June 12-1915	June 12-1915

Independent Resurvey of S. bdy. of Township 13 South Range 26 East 1C

Chains.

Survey executed with a Young and Son's light mountain transit No. 8586, with Solar attachment. For description of instrument and certificate of approval, see Book "A."

Knowing from recent and repeated field tests of this instrument on a meridian established by observations on Polaris, that it is in satisfactory adjustment, I proceed as follows:

The sec. line between secs. 5 and 6 of T. 14 S., R. 26 E. being the only accepted surveyed subdivision line tied to this township bdy., the resurvey is dependent on location of original cors. for one mile only, and the east 5 miles are subject to rectification.

From the original cor. of Ts. 13 and 14 S., Rs. 25 and 26 E. which is a granite stone 6x8x5 ins. above ground, firmly set, marked and witnessed as described by the Surveyor General.

S. 89° 53' E. on a random line, along the S. bdy. of sec. 31.

40.53 Fall 6 lks. S. of original 1/4 sec. cor. of secs. 6 and 31, which is a basalt stone, 10x10x6 ins. above ground, firmly set, marked and witnessed as described by the Surveyor General.

True course and dist. of line back to Tp. cor. is therefore N. 89° 58' W., 40.53 chs.

Continue random line and measurement

80.71 Fall 6 lks. S. of the original cor. of secs. 5, 6, 31 and 32, which is a granite stone 12x8x12 ins. above ground, firmly set, marked and witnessed as described by the Surveyor General.

True course and dist. of line back to the 1/4 sec. cor. is therefore N. 89° 53' W., 40.18 chs.

S. 89° 53' E., on a random line along S. bdrs. of secs. 32, 33, 34, 35 and 36.

40.14 Fall 3 lks. N. of the original 1/4 sec. cor. of secs. 5 and 32, which is a granite stone, 10x10x6 ins. above ground, firmly set, marked and witnessed as described by the Surveyor General.

80.46 Fall 7 lks. S. of original cor. of secs. 4, 5, 32 and 33, which is a conglomerate stone, 14x14x6 ins. above ground, firmly set, marked and witnessed as described by the Surveyor General.

120.23 Fall 13 lks. S. of original 1/4 sec. cor. of secs. 4 and 33, which is a granite stone, 9x14x6 ins. above ground, firmly set, marked and witnessed as described by the Surveyor General.

153.47 Fall 5.46 chs. N. of original witness cor. to the cor. of secs. 3, 4, 33 and 34, which is a granite stone, 18x10x8 ins. above ground, firmly set, marked and witnessed as described by the Surveyor General.

160.00 No trace can be found of original cor. of secs. 3, 4, 33 and 34.

198.76 Fall 30 lks. N. of original 1/4 sec. cor. of secs. 3 and 34, which is a granite stone, 12x10x6 ins. above ground, firmly set, marked and witnessed as described by the Surveyor General.

239.20 Fall 9 lks. N. of original cor. of secs. 2, 3, 34 and 35, which is a granite stone, 14x14x8 ins. above ground, firmly set, marked and witnessed as described by the Surveyor General.

279.00 Fall 7 lks. S. of original 1/4 sec. cor. of secs. 2 and 35, which is a granite stone, 16x12x6 ins. above ground, firmly set, marked and witnessed, as described by the Surveyor General.

318.35 Fall 6 lks. S. of original cor. of secs. 1, 2, 35 and 36, which is a granite stone, 15x10x8 ins., supported in a mound of stone, marked and witnessed as described by the Surveyor General.

2. Independent Resurvey of S. bdy. of Township 13 South Range 26 E.

Chains

359.31 Fall 40 lks. S. of original $\frac{1}{4}$ sec. cor. of secs. 1 and 36, which is a granite stone, 12x10x8 ins. above ground, firmly set, marked and witnessed, as described by the Surveyor General.

399.14 Fall 40 lks. S. of the original cor. of Ts. 13 and 14 S., Rs. 26 and 27 E., which is an iron post 3 ins. in diam. with brass cap, marked and witnessed as described by the Surveyor General, (established by William B. Kimmel, U.S.S. in June 1914, under Group 26).
The true course of Tp. bdy. back to original cor. of secs. 5, 6, 31 and 32 is therefore N. 89° 56' W.
I make independent resurvey of the E. 5 miles of the line destroying all the original cors. found in that part of the line, as described above.

Thence
N. 89° 56' W. on a true line, bet. secs. 1 and 36.
Along steep rocky N. slope.

12.50 Spur slopes NE. Descend NW. slope, 290 ft. to

22.15 Rocky gulch, 50 lks. wide, course NE. Ascend E. slope, 250 ft. to

31.70 Rocky ridge, brs. NE. and SW. Descend W. slope, 220 ft.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap.

$\frac{1}{4}$ S 36
S 1
1915

from which,

A black oak, 5 ins. diam., brs. S. 78 $\frac{1}{2}$ ° W., 34 lks. dist., marked $\frac{1}{4}$ S 1 B T.

A black oak, 8 ins. diam., brs. N. 88 $\frac{1}{2}$ ° W., 33 lks. dist., marked $\frac{1}{4}$ S 36 B T.

45.00 Foot of descent. Thence along N. slope to

50.00 Point of spur, slopes NW. Descend W. slope, 200 ft. to

60.72 Gold Gulch, 70 lks. wide, 3 ft. deep, course NW., stream of clear cold water, 5 lks. wide, 6 ins. deep, course N.

61.00 Old wagon road, brs. N. and S. Ascend E. slope, 250 ft. to

76.10 Ridge brs. N. and NE., slopes NE. Thence along NW. slope to

80.00 Set an iron post 3 ft. long, 3 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 1, 2, 35 and 36, marked

T13S R26E
S35 | S36
S 2 | S 1
T14S
1915

from which,

A black oak, 18 ins. diam., brs. N. 66° E., 226 lks. dist., marked T 13 S R 26 E S 36 B T.

A black oak, 18 ins. diam., brs. S. 37° E., 100 lks. dist., marked T 14 S R 26 E S 1 B T.

A cedar, 10 ins. diam., brs. S. 73 $\frac{1}{2}$ ° W., 9 lks. dist., marked T 14 S R 26 E S 2 B T.

A cedar, 24 ins. diam., brs. N. 18 $\frac{1}{2}$ ° W., 65 lks. dist., marked T 13 S R 26 E S 35 B T.

Land, rough, mountainous.
Soil, thin and rocky.
Timber, scattering scrub oak.
No undergrowth.
Scattering short grass.

N. 89° 56' W., on a true line, bet. secs. 2 and 35.
Descend W. slope, 170 ft. to

8.17 Wash, 40 lks. wide, 4 ft. deep, course NW. Ascend NE. slope 300 ft. to $\frac{1}{4}$ sec. cor.

14.44 Wash, 30 lks. wide, 2 ft. deep, course NE.

Independent Resurvey of South bdy. of Township 13 S., R. 26 E. 3.

Chains.
26.18 Wash, 20 lks.wide, 3 ft. deep, course NE.
39.31 Wash, 10 lks.wide, 3 ft. deep, course NE.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec.cor., marked on brass cap,
 $\frac{1}{4}$ S 35
S 2
1915
and raise a mound of stone 3 ft.base, 2 ft. high, N.of cor. Thence ascend E.slope, 30 ft.to
41.45 Spur, slopes N. Descend W. slope, 80 ft.to
48.17 Gulch, 20 lks.wide, 6 ft. deep, course N. Ascend NE.slope 160 ft.to
53.35 Spur, slopes N. Descend W. slope, 155 ft.to
58.57 Rocky wash, 50 lks.wide, course N. Scattering walnut trees along wash. Ascend NE. slope, 100 ft.to
68.13 Rocky spur, slopes N. Descend W. slope, 160 ft.to
74.66 Shallow wash, 10 lks.wide, clear cold water, 4 ins.deep, course N. Ascend NE. slope, 30 ft.to
80.00 Set an iron post, 3 ft.long, 3 ins. in diam., 24 ins. in the ground for reestablished cor.of secs. 2, 3, 34 and 35, marked on brass cap,
T13S R26E
S34 | S35
S 3 | S 2
T14S
1915
and raise a mound of stone, 3 ft.base, 3 ft.high, W.of cor.
Land, mountainous.
Soil, thin and rocky.
No timber, except scattering walnut trees along washes.
No undergrowth.
Short grass.

N.89° 56' W. on a true line. bet. secs.3 and 34.
Over mountainous land.
Ascend NE. slope, 30 ft.
1.40 Wire fence, brs. N. and S.
2.00 Spur, slopes NE. Thence descend along N. slope
5.42 Gulch, 30,lks.wide, 2 ft. deep, course NE. Ascend 55 ft. to
8.60 Spur, slopes NE. Descend NW. slope, 100 ft.to
16.00 Rocky gulch, 15 lks.wide, 3 ft. deep, course NW.
17.70 Rocky gulch, 30 lks.wide, 3 ft. deep, course NE.
26.93 Gulch, 20 lks.wide, course NE. Asc. NE. slope. 606 ft.
40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. into crack in boulder, wedging same tight with rocks, for reestablished $\frac{1}{4}$ sec.cor., marked on brass cap,
 $\frac{1}{4}$ S 34
S 3
1915
from which
A cedar, 15 ins. in diam., brs.N.4°W., 121 lks. lks.dist., marked $\frac{1}{4}$ S 34 B T.
41.32 Summit of Dos Cabezas range, brs.NW. and SE. Descend SW. slope, 790 ft.
48.50 Pack trail brs.N. and S. Old mines bear N.3 chs. and S. 1 chain dist.
55.20 Gulch, 20 lks.wide, course SW.
69.17 Foot of descent. Rocky gulch, 50 lks.wide, 6 ft. deep, course SW. Ascend SE. slope, 170 ft.to
80.00 Set an iron post, 3 ft. long, 3 ins. in diam., 24 ins. in the ground for reestablished cor.of secs. 3, 4, 33

4. Independent resurvey of S. bdy. of Township 13 S., R. 26 E.

Chains.

and 34, marked on brass cap,

T13S R26E	
S33	S34
S 4	S 3
T14S	
1915	

and raise a mound of stone 3 ft. base, 2 ft. high, W. of cor.

Land, mountainous.

Soil, thin and rocky.

Timber, scattering juniper and cedar trees along summit of ridge.

No undergrowth.

Short grass.

N. 89° 56' W., on a true line, bet. secs. 4 and 33.

Over rocky, mountainous land.

Ascend SE. slope, 30 ft. to

1.25 Summit of ridge, brs. NE. and SW. Descend NW. slope, 430 ft. to

14.50 Rocky gulch, 20 lks. wide, 3 ft. deep, course SW. Ascend SE slope, 60 ft. to

20.80 Summit of spur, slopes SW. Descend S slope, 150 ft. to

31.26 Gulch, 20 lks. wide, 3 ft. deep, course SW. Ascend 50 ft.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 33	
S 4	
1915	

and raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor.

42.00 Top of ascent. Descend SW. slope, 320 ft. to

56.70 Rocky gulch, 30 lks. wide, 3 ft. deep, course SW.

Ascend SE. slope, 100 ft. to

71.50 Summit of low ridge, brs. NE. and SW. Descend W. slope, 160 ft. to

80.00 Set an iron post, 3 ft. long, 3 ins. in diam., 24 ins. in the ground for reestablished cor. of secs. 4, 5, 32 and 33, marked on brass cap,

T13S R26E	
S32	S33
S 5	S 4
T14S	
1915	

and raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.

Land, mountainous.

Soil, thin and rocky.

No timber.

Short grass.

N. 89° 56' W., on a true line, on S. bdy. of sec. 32.

Over rolling land.

Descend gentle W. slope, through scattering mesquite and catclaw undergrowth.

23.46 Wash, 30 lks. wide, 3 ft. deep, course SW.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap,

S 32	
S 5	
1915	

and raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor.

Independent resurvey of S. bdy. of Township 13 S., R. 26 East. 5.

Chains.

64.00
79.14

Wash, 30 lks. wide, 2 ft. deep, course SW.
Intersect the original cor. of secs. 5, 6, 31 and 32, hereinbefore described. I change this cor. to refer to secs. 5 and 6 only, as follows: Move the mound of stone, 2 ft. base, 1 1/2 ft. high, from W. to S. of cor.

80.00

Continue measurement,
N. 89° 53' W. on true line, along wire fence.
Set an iron post, 3 ft. long, 3 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 31 and 32 only, marked on brass cap,

T13S R26E
S31 | S32
T14S
1915

and raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
Land, rolling.
Soil, light, sandy loam, coarse texture, 12 to 18 ins. deep, on gravel subsoil.
No timber.
No undergrowth.

23.00
39.00
39.32

N. 89° 53' W., on a true line, on S. bdy. of sec. 31.
Over level land, thru scattering undergrowth. Along wire fence.

Wash, 20 lks. wide, 4 ft. deep, course SW.
Wash, course SW., 4 ft. deep, course SW.
(40.18 chs. N. 89° 53' W., from cor. of secs. 5 and 6) Intersect the original 1/4 sec. cor. of secs. 6 and 31, hereinbefore described. Change this cor. to refer to sec. 6 only, by moving the mound of stone from N. to S. of cor.

40.00

Thence continue measurement,
N. 89° 58' W., on a true line.
Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished 1/4 sec. cor. to sec. 31 only, marked on brass cap,

1/4 S31
1915

65.00
69.85
79.85

dig pits 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.
W. T. Martin's house, brs. N. 10 chs. dist.
Wash, 10 lks. wide, course SW.
(40.53 chs. N. 89° 58' W. from 1/4 sec. cor. of sec. 6) Intersect cor. of Ts. 13 and 14 S., Rs. 25 and 26 E., hereinbefore described.
Land, level.
Soil, light, sandy loam, medium texture, 12 to 18 ins. deep.
No timber.
Scattering mesquite and catclaw, 6 to 7 ft. high.
Scattering short grass.

6. Independent resurvey of S. bdy. of Township 13 S., R. 26 E.

Boundaries of Township 13 South, Range 26 East.
Latitudes, departures, and closing errors.

Line designated	Bearing.	Dist.	Latitudes.		Departures.	
			N.	S.	E.	W.
South boundary	N.89°56'W.	399.14	.46			399.14
	N.89°53'W.	40.18	.08			40.18
	N.89°58'W.	40.53	.02			40.53
West boundary,	N.0°4'E.	40.07	40.07		.05	
	North,	40.16	40.16			
	N.0°3'E.	40.00	40.00		.04	
	N.0°11'E.	40.08	40.08		.13	
	N.1°9'W.	82.65	82.63			1.63
	N.0°22'W.	39.93	39.93			.26
	N.0°14'W.	77.48	77.48			.32
	N.0°8'E.	39.98	39.98		.09	
	N.0°40'W.	39.65	39.65			.46
	N.1°32'W.	38.71	38.69			1.04
North boundary	S.89°55'E.	477.00		.58	477.00	
	S.89°57'E.	6.45		.01	6.45	
East boundary	South,	477.68		477.68		
Convergency,					.45	
Totals.			479.23	478.27	484.21	483.61
			478.27		483.61	
Error in latitude,			.96			
Error in departure,					.60	

Subdivision of T. 13 S., R. 26 E.

Chains

Survey executed with a Young and Son's light mountain transit No. 8586, with solar attachment described in book "A".

I examine the adjustments of the transit and find them correct, then to test the solar attachment by comparing its indications resulting from observations made during a. m. and p. m. hours, on a meridian established by observations on Polaris, I proceed as follows:

June 5, 1915, at a point near camp, in sec. 26, T. 13 S., R. 26 E., at 8h. 35.8m. p.m., l.m.t., I observe Polaris at lower culmination, in accordance with instructions in the Manual of Surveying.

June 6, 1915, at 7h. 30m., a.m., l.m.t., I mark the mer. thus determined by a peg set firmly in the ground 5 chs. N. of my station.

At 8h., a.m., l.m.t., I set off 32° 17' N. on the lat. arc; 22° 36' N. on the decl. arc; and determine a mer. with the solar. The mer. thus determined falls within 1' in azimuth of the mer. established by observations on Polaris.

At 4h., p.m., l.m.t., I set off 32° 17' N. on the lat. arc; 22° 38' N. on the decl. arc; and determine a mer. with the solar. The mer. thus determined falls within 1' in azimuth of the mer. established by observations on Polaris. I therefore conclude that the adjustments of the transit and solar attachment are satisfactory.

From the reestablished cor. of secs. 1, 2, 35 and 36, on S. bdy. of Tp. hereinbefore described.

N. 0° 1' W. bet. secs. 35 and 36.

Over mountainous and rolling land, through scattering timber and undergrowth.

Desc. 144 ft. to

10.00 Asc. 102 ft. to

17.26 Ridge brs. NW. and SE. Desc. 165 ft. to

32.48 Wire fence brs. NE. and SW.

32.78 P. L. Duval's house brs. W. 1 ch. dist.

Desc. 30 ft. to

35.70 Wire fence brs. E; and W. Enter cultivated land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., mkd. on brass cap

S35 S36
1915

dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft. dist.; and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

42.20 Wagon road, brs. E. and W.

48.20 Wire fence brs. E. and W.

50.80 Wash, 10 lks. wide, 7 ft. deep, course, NW.

59.15 Wire fence brs. E. and W. Leave cultivated field.

Asc. 176 ft. to

67.95 Old "76" ranch house brs. N. 83 1/2° W.

69.55 Top of low rocky hill.

Desc. 81 ft. to

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground, to solid rock, in a mound of stone, for the cor. of secs. 25, 26, 35 and 36, mkd. on brass cap

T13S R26S
S26 S25
S35 S36
1915

from which,

Subdivision of T. 13 S., R. 26 E.

Chains

- A black oak, 16 ins. diam., brs. N. $85\frac{1}{4}^{\circ}$ E.
83 lks. dist. mkd. T 13 S R 26 E S 25 B T.
- A black oak, 12 ins. diam., brs. S. $40\frac{1}{2}^{\circ}$ E.
109 lks. dist. mkd. T 13 S R 26 E S 36 B T.
- An oak, 14 ins. diam., brs. S. $68\frac{1}{2}^{\circ}$ W.
183 lks. dist. mkd. T 13 S R 26 E S 35 B T.
- A black oak, 15 ins. diam., brs. N. $51\frac{1}{2}^{\circ}$ W.
191 lks. dist. mkd. T 13 S R 26 E S 26 B T.


Land, rolling and mountainous.
Soil, rocky.
Timber, scattering oak and scrub cedar.
Undergrowth, scrub oak.
No grass.

- 40.00 S. $89^{\circ} 56'$ E. on a random line bet. secs. 25 and 36.
Set temp. $\frac{1}{4}$ sec. cor.
 - 80.20 Intersect E. bdy. of T. 13 S. R. 26 E. original corner of secs. 25, 30, 31 & 36, which is an iron post, 3 ins. diam., properly set mkd. and witnessed as described by the Surveyor General.
 - Thence
 - N. $89^{\circ} 53'$ W. on a true line bet. secs. 25 and 36.
Over rolling land, through scattering timber, and undergrowth.
 - 5.86 Gulch, 30 lks. wide, course, N. and NW.
 - 6.73 Wire fence brs. N. and S. Asc. 115 ft. to ridge.
 - 7.13 Wagon road brs. NE. and SW.
 - 10.20 Glick Ester's house brs. N. 8 chs. dist.
 - 15.88 Rocky ridge, brs. NE. and SW. slopes NE. Desc. 170 ft. to
 - 21.20 Gulch, 20 lks. wide, course, NE. Asc. 129 ft. to
 - 22.80 Wire fence brs. NW. and SE. Asc. 296 ft. to
 - 35.30 Ridge brs. E. and W.
 - R. L. Payne's cabin brs. S. $22\frac{1}{2}^{\circ}$ E. about 20 chs. dist.
Desc. 86 ft. to
 - 40.10 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap
- $\frac{1}{4}$ S25
 $\frac{1}{4}$ S36
 1915
- from which,
- A black oak, 7 ins. diam., brs. N. $60\frac{1}{2}^{\circ}$ E.
70 lks. dist. mkd. $\frac{1}{4}$ S 25 B T.
 - A black oak, 12 ins. diam., brs. S. $17\frac{1}{2}^{\circ}$ E.
34 lks. dist. mkd. $\frac{1}{4}$ S 36 B T.
- Desc. gradual slope to
- 41.04 Wire fence brs. NE. and SW.
 - 43.00 Wash, 10 lks. wide, course, N. and NE. Ascend.
 - 48.00 Top of rocky ridge, brs. NE. and SW. Descend.
 - 54.32 SW. cor. of small cultivated field brs. N. 20 lks. dist.
Asc. gradual slope to
 - 59.30 Ridge brs. N. and S. slopes N. Desc. gradual slope.
 - 61.70 Laura J. Mc Day's tent house brs. N. 2 chs. dist.
 - 67.30 Gold Gulch, stream of clear cold water, 6 lks. wide, 3 ins. deep, course, NE.
 - 69.85 Wagon road brs. NE. and SW. Asc. 72 ft. to
 - 80.20 The cor. of secs. 25, 26, 35 and 36.
Land, rolling and hilly.
Soil, rocky.
Timber, scattering oak.
Undergrowth, mesquite and scrub oak and cat claw.
Scattering short grass.


Subdivision of T. 13 S., R. 26 E.

Chains

N. 0° 1' W. bet. secs. 25 and 26.
 Over rolling land, through scattering timber and undergrowth.
 Desc. gradual slope, 34 ft. to
 33.47 Small stream of clear cold water 6 ins. wide, 1 in. deep, course, N. and NE.
 36.47 Bend in wash, from SE. to NE.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap



and raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.
 51.00 Asc. 26 ft. to
 52.00 Desc. 104 ft. to
 60.00 Asc. 41 ft. to
 62.78 Ridge brs. NE. and SW. slopes NE. Desc. gradual slope to
 65.00 Asc. 79 ft. to
 71.87 Rocky ridge brs. NW. and SE. slopes NW.
 Desc. 36 ft. to
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 23, 24, 25 and 26, mkd. on brass cap



- from which,
- A cedar, 20 ins. diam., brs. N. 31° E.
33 lks. dist. mkd. T 13 S R 26 E S 24 B T.
 - A cedar 20 ins. diam., brs. S. 53 $\frac{1}{2}$ ° E.
40 lks. dist. mkd. T 13 S R 26 E S 25 B T.
 - A black oak, 14 ins. diam., brs. S. 68° W.
150 lks. dist. mkd. T 13 S R 26 E S 26 B T.
 - A black oak, 10 ins. diam., brs. N. 56 $\frac{1}{2}$ ° W.
124 lks. dist. mkd. T 13 S R 26 E S 23 B T.

Land, mountainous.
 Soil, rocky.
 Timber, scattering oak and cedar.
 Undergrowth, mesquite, scrub oak, cat claw.
 No grass.

40.00 S. 89° 53' E. on a random line bet. secs. 24 and 25.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.06 Intersect E. bdy. of Tp. 2 lks. S. of original cor. of secs. 19, 24, 25 and 30, which is an iron post, 3 ins. diam., properly set, mkd. and witnessed as described by the Surveyor General.

Thence
 N. 89° 54' W. on a true line bet. secs. 24 and 25.
 Over rolling mountainous land, through scattering timber, and undergrowth.
 H. G. Huntzinger's house brs. S. 28 $\frac{1}{2}$ ° W.
 Con. Albright's house brs. N. 60 $\frac{1}{2}$ ° W.
 2.28 Wash, 25 lks. wide, 3 ft. deep, course, NW.
 12.18 Wagon road brs. N. and S.
 20.28 Asc. 23 ft. to
 21.54 Wash, 40 lks. wide, course, NE. Asc. 120 ft. to ridge.
 22.62 Wagon road brs. NE. and SW.
 29.90 Wire fence brs. N. and S.
 37.57 Ridge brs. NE. and SW. Desc. 49 ft. to $\frac{1}{4}$ sec. cor.
 37.62 Con. Albright's house brs. N. 23° W.

Chains

40.03 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., mkd. on brass cap

1/4 S24
S 25
1915

from which,
A white oak, 14 ins. diam., brs. N. 20 1/4° W.
23 lks. dist. mkd. 1/4 S 24 B T.
A white oak, 14 ins. diam., brs. S. 32 1/4° W.
75 lks. dist. mkd. 1/4 S 25 B T.

Desc. 29 ft. to
42.90 Gulch, 25 lks. wide, course, NE. Asc. 125 ft. to

61.20 H. G. Huntzinger's house brs. S. 57° E. Asc. 25 ft. to

62.00 Top of rocky hill. Desc. 109 ft. to

68.55 Wagon road brs. N. and S. Asc. 77 ft. to

71.70 Gulch, 50 lks. wide, course, NE. with stream of water,
12 ins. wide, 2 ins. deep.

Asc. 119 ft. to
80.06 The cor. of secs. 23, 24, 25 and 26.

Land, rolling.
Soil, rocky.
Timber, scattering oak and walnut.
Undergrowth, scrub oak, mesquite and scrub cedar.
Fair growth of grass.

N. 0° 1' W. bet. secs. 23 and 24.
Over rolling land, through scattering undergrowth.
Desc. 159 ft. to

10.00 Asc. gradual slope to

12.87 Rocky knoll brs. E. and W. Thence over gently rolling land.

22.17 Wagon road brs. NE. and SW.

34.67 Wash, 15 lks. wide, 3 ft. deep, course, NE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground, to solid rock, in a mound of stone, for 1/4 sec. cor., mkd. on brass cap

S23 | S24
1915

and raise a mound of stone, 3 ft. base, 2 1/2 ft. high, W. of cor.

Asc. 41 ft. to
43.13 Low spur, slopes NE. Thence desc. over gently rolling land to

55.00 Asc. 37 ft. to
61.20 Low ridge brs. E. and W. Desc. 123 ft. to

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 13, 14, 23 and 24, mkd. on brass cap

T13S R26E
S14 | S13
S23 | S24
1915

and raise a mound of stone, 3 ft. base, 2 1/2 ft. high, W. of cor.

Land, gently rolling.
Soil, rocky and gravelly.
Timber, scattering oak and cedar.
Undergrowth, scrub oak, mesquite and cat claw.
Fair growth of grass.

Subdivision of T. 13 S. R. 26 E.

Chains

40.00 S. 89° 54' E. on a random line bet. secs, 13 and 24.
 79.93 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect N. bdy. of Tp. 9 lks. N. of original cor. of secs.
 13, 18, 19 and 24, which is an iron post, 3 ins. diam.,
 properly set, mkd. and witnessed as described by the
 Surveyor General. From this cor. W. M. Becklin's tent
 house, brs. S. 26° W.

N. 89° 50' W. on a true line bet. secs. 13 and 24.
 Over rolling land, through scattering undergrowth.
 1.54 Wagon road brs. NE. and SW.
 25.44 Wash, 15 lks. wide, course, NE. Asc. 109 ft. to
 39.96 $\frac{1}{2}$ Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$ S13
 S 24
 1915

and raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high,
 N. of cor.

43.63 W.M. Becklin's tent house brs. S. 44 $\frac{1}{2}$ ° E.
 Asc. gradual slope to
 56.32 Top of spur, slopes NE. Desc. 137 ft. to
 61.24 Wash, 10 lks. wide, course, NE. Asc. 89 ft. to
 70.94 Ridge brs. N. and S. Desc. 127 ft. to
 79.93 The cor. of secs. 13, 14, 23 and 24.
 Land, rolling mountainous.
 Soil, rocky, and sandy loam.
 Timber, scattering oak.
 Undergrowth, mesquite and cat claw.
 Fair growth of grass.

N. 0° 1' W. bet. secs. 13 and 14.
 Over rolling land, through scattering undergrowth.
 Asc. 23 ft. to
 10.00 Spur, slopes W. Desc. 29 ft. to
 21.87 Rocky wash, 40 lks. wide, course, NE.
 24.17 Same wash, course, NW.
 33.27 Same wash, course, NE.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

S14 | S13
 1915

dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft.
 dist.; and raise a mound of earth, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft.
 high, N. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in
 the ground, for cor. of secs. 11, 12, 13 and 14, mkd.
 on brass cap

T13S R26E
 S11 | S12
 S14 | S13
 1915

and raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high,
 W. of cor.

Land, gently rolling.
 Soil, coarse, gravelly.
 No timber.
 Undergrowth, scattering mesquite and cat claw.
 Fair growth of grass.

Chains

40.00 S. 89° 50' E. on a random line bet. secs 12 and 13.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.98 Intersect E. bdy. of Tp., 10 lks. S. of original cor. of secs.
 7, 12, 13 and 18, which is an iron post, 3 ins. diam.,
 properly set, mkd. and witnessed as described by the
 Surveyor General.

Thence
 N. 89° 54' W. on a true line bet. secs. 12 and 13.
 Over rolling land, through scattering undergrowth.

4.90 Desc. 29 ft. to
 Wash, 10 lks. wide, course, NE. Asc. gradual slope, 92
 ft. to

25.10 Flat ridge brs. N. and S. Desc. 112 ft. to
 39.99 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$ S12
 S 13
 1915

and raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 2 ft. high,
 N. of cor.

41.10 Wash, 20 lks. wide, 4 ft. deep, course, NE. Asc. 138 ft.
 to

58.20 Ridge brs. NE. and SW. Desc. 176 ft. to

76.00 Rocky wash, 50 lks. wide, course, NE.

79.98 The cor. of secs. 11, 12, 13 and 14.

Land, rolling.

Soil, mgravelly.

No timber.

Undergrowth, scattering mesquite and cat claw.

Scattering short grass.

N. 0° 1' W. bet. secs. 11 and 12.

Over nearly level land, through scattering undergrowth.

17.40 Wash, 10 lks. wide, course, NE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$
 S11 | S12
 1915

and raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 2 ft. high,
 W. of cor.

57.50 Wash, 40 lks. wide, 4 ft. deep, course, NE.

79.82 Wagon road brs. NE. and SW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in
 the ground, for cor. of secs. 1, 2, 11 and 12, mkd.
 on brass cap

T13S R26E
 S 2 | S 1
 S11 | S12
 1915

and raise a mound of stone, 2 ft. base, 2 ft. high,
 W. of cor.

Land, gently rolling.

Soil, gravelly.

No timber.

Undergrowth, scattering mesquite and cat claw.

40.00 S. 89° 54' E. on a random line bet. secs. 1 and 12.
 Set temp. $\frac{1}{4}$ sec. cor.

Subdivision of Township 13 South, Range 26 East. 13.


Chains.

79.98 Intersect E. bdy. of Tp. 10 lks. S. of original cor. of secs. 1, 6, 7 and 12, which is an iron post, 3 ins. in diam., properly set, marked and witnessed as described by the Surveyor General.

Thence I
N. 89° 58' W., on a true line, bet. secs. 1 and 12.
Over nearly level land, through scattering undergrowth.
Rocky wash, 250 lks. wide, course NE.

21.70
39.99

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap,



and raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 2 ft. high, N. of cor.


43.50
79.70
79.98

Rocky wash, 1 chain wide, course NE.
Wagon road brs. NE. and SW.
The cor. of secs. 1, 2, 11 and 12.
Land, gently rolling.
No timber.
Undergrowth, mesquite and catclaw.
Scattering grass.

N. 0° 1' W., on a true line, bet. secs. 1 and 2.
Over gently rolling land, through scattering undergrowth.
Wagon road brs. NE. and SW.

24.80
40.00


Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,



and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

55.30
77.68

Grassy draw, course NE.
Intersect N. bdy. of Tp., 6.51 chs. S. 89° 55' E. of reestablished cor. of secs. 1, 2, 35 and 36, which is a granite stone, 6x8x8 ins. above ground, firmly set, marked and witnessed as described by the Surveyor General. I change this cor. to refer to secs. 35 and 36 only by filling in the pits SE. and SW. of cor. enlarging the pits NE. and NW. of cor. to 24x24x12 ins., and by moving the mound of earth 4 ft. base, 2 ft. high, from W. to N. of cor.
At point of intersection,
Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for closing cor. of secs. 1 and 2, marked on brass cap,



and raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.

Land, nearly level.
Soil, gravelly.
No timber.
Undergrowth, mesquite and catclaw.
Fair growth of grass.

From the reestablished cor. of secs. 2, 3, 34 and 35, on S. bdy. of Tp. hereinbefore described,
N. 0° 1' W., bet. secs. 34 and 35.

14. Subdivision of Township 13 South, Range 26 East.

Chains

Over mountainous land, through scattering timber and undergrowth.
 Descend mountain slope, 132 ft. to
 7.32 Small stream of clear running water, 1 lk. wide, 1 in. deep, course NW. Descend 96 ft. to
 14.78 Spur, slopes NW. Descend 90 ft. to
 24.61 Spur slopes NE. Descend 40 ft. to
 30.00 Ascend gradual slope to
 36.63 Spur, slopes NW. Descend gradual slope, 28 ft. to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

S34|S35
 1915

from which,

A black oak, 10 ins. diam., brs. S. $22\frac{1}{2}^{\circ}$ E., 44 lks. dist., marked $\frac{1}{4}$ S 35 B T.
 A black oak, 18 ins. diam., brs. N. $80\frac{3}{4}^{\circ}$ W., 117 lks. dist., marked $\frac{1}{4}$ S 34 B T.

Descend 63 ft. to
 45.00 Ascend gradual, slope 18 ft. to
 47.90 Spur, slopes E. Descend 12 ft. to
 51.79 Edge of spur, brs. E and W. Descend 124 ft. to
 64.65 Top of ridge, brs. NE. and SW. slopes NE. Descend 57 ft. to
 75.00 Thence over gently rolling land.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 26, 27, 34 and 35, marked on brass cap,

T13S R26E
 S27|S26
 S34|S35
 1915

from which,

A walnut, 16 ins. diam., brs. N. $5\frac{1}{4}^{\circ}$ E., 295 lks. dist., marked T 13 S R 26 E S 26 B T.
 A walnut, 16 ins. diam., brs. N. $27\frac{3}{4}^{\circ}$ W., 73 lks. dist., marked T 13 S R 26 E S 27 B T.

No other trees within limits.
 Raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.
 Land, mountainous.
 Soil, rocky,
 Timber, scattering walnut, oak and cedar.
 Undergrowth, mesquite and catclaw.
 Thin short grass.

 S. $89^{\circ}56'$ E., on a random line, bet. secs. 26 and 35.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.60 Intersect N. and S. line, 33 lks. S. of cor. of secs. 25, 26, 35 and 36.
 Thence
 S $89^{\circ}50'$ W., on a true line, bet. secs. 26 and 35.
 Over rolling, mountainous land, through scattering undergrowth.
 Descend 71 ft. to
 5.20 Small stream of running water, 10 ins. wide, 1 in. deep, course NE. Ascend 85 ft. to
 5.70 Old watering trough of "76" Ranch, brs. S, 1 ch. dist. S.
 Ascend 73 ft. to
 10.75 Old "76" Ranch house, brs. S. $5\frac{1}{2}^{\circ}$ E.
 13.95 Rocky ridge, brs. NW. and SE. Slopes NW.; descend 134 ft. to
 27.10 Dry rocky wash, 10 lks. wide, course NE. Ascend 143 ft. to
 38.05 Rocky ridge, brs. N. and S. Descend 27 ft. to
 39.80 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in

Subdivision of T. 13 S. R. 26 E.

Chains

the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$ S26
S. 35
1915

from which,

- A white oak, 12 ins. diam., brs. N. $11\frac{1}{2}^\circ$ W. 56 lks. dist. mkd. $\frac{1}{4}$ S 26 B T.
- A black oak, 15 ins. diam., brs. S. 2° E. 132 lks. dist. mkd. $\frac{1}{4}$ S 35 B T.

- 51.90 Desc. 76 ft. to W. T. Yeckley's house, brs. N. 23° W. W. R. Wolford's house, brs. N. $11\frac{1}{2}^\circ$ W.
- 59.65 Desc. 74 ft. to Benjamin Horton's tent shack, brs. N. 50 lks. dist.
- 61.05 Wagon road brs. N. and S.
- 62.65 Small stream, 10 ins. wide, 1 in. deep, course, NE. Asc. gradual slope, to
- 75.35 W. T. Yeckley's house brs. N. $53\frac{3}{4}^\circ$ E. W. R. Wolford's house brs. N. $19\frac{1}{4}^\circ$ E.
- 79.60 The cor. of secs. 26, 27, 34 and 35. Land, mountainous. Soil, rocky and gravelly. Timber, scattering walnut and oak. Undergrowth, scattering mesquite and scrub oak. Scattering short grass.

- 4.00 N. $0^\circ 1'$ W. bet. secs. 26 and 27. Over gently rolling land, through scattering timber. Wash, 20 lks. wide, course, NE. Asc. gradual slope.
- 11.20 Spur, slopes E. Desc. 23 ft. to
- 17.98 Wash, 20 lks. wide course, NW.
- 20.98 Leave same wash, course, NW. Asc. 12 ft. to
- 22.28 Thence over nearly level land.
- 38.57 Wagon road brs. NE. and SW.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

S27 | S26
1915

from which,

- A walnut, 12 ins. diam., brs. N. 32° E. 110 lks. dist. mkd. $\frac{1}{4}$ S 26 B T.

- No other trees within limits.
- 41.00 Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
- 44.29 Rocky wash, 30 lks. wide, course, NE. Asc. 18 ft. to
- 45.00 Desc. 24 ft. to
- 47.78 Asc. 21 ft. to Rocky ridge brs. E. and W. R. B. Buchanan's house brs. S. $37\frac{1}{2}^\circ$ E. Stone fence brs. NE. and SW.
- 52.08 Wire fence brs. E. and W.
- 59.93 Rocky wash, 10 lks. wide, course, NE. Asc. gradual slope, 29 ft. to
- 72.91 Rocky spur, slopes E. Desc. gradual slope to
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins in the ground, for cor. of secs. 22, 23, 26 and 27, mkd. on brass cap

T13S R26E
S22 | S23
S27 | S26
1915

from which,

Chains

A hackberry; 11 ins. diam., brs. N. 13° E.
 22 lks. dist. mkd. T 13 S R 26 E S 23 B T.
 A malpais boulder, 8 X 8 X 4 ft. above ground, brs. S. 25° E
 25 lks. dist. mkd. B+0.
 A malpais boulder, 6 X 6 X 8 ft. above ground, brs. S. 67° W.
 9 lks. dist. mkd. B+0.
 A malpais boulder, 12 X 15, X 10 ft. above ground, brs.
 N. 40½° W. 11 lks. dist. mkd. B+0.
 Land, rolling.
 Soil, rocky.
 Timber, scattering oak and cedar.
 Undergrowth, mesquite and cat claw.
 Short grass.

40.00 N. 89° 50' E. on a random line bet. secs. 23 and 26.
 Set temp. ¼ sec. cor.
 79.90 Intersect N. and S. line at the cor. of secs. 23, 24, 25
 and 26.
 Thence
 S. 89° 50' W. on a true line bet. secs. 23 and 26.
 Over rolling land, through scattering timber.
 Desc. 38 ft. to
 5.00 Asc. 52 ft. to
 10.70 Ridge brs. N. and S. Desc. 173 ft. to
 20.00 Rocky wash, 40 lks. wide, course, NE. Asc. 210 ft. to
 34.30 R. B. Buchanan's house, brs. S. 32° W.
 Rocky spur, slopes S. Desc. gradual slope, 29 ft. to
 39.95 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
 the ground, for ¼ sec. cor., mkd. on brass cap

¼ S 23
 S 26
 1915

from which,
 A cedar 12 ins. diam., brs. N. 47¼° E.
 72 lks. dist. mkd. ¼ S. 23 B T.
 A cedar 22 ins. diam., brs. S. 16° W.
 209 lks. dist. mkd. ¼ S 26 B T.

Desc. 148 ft. to
 44.10 Top of round rock on line.
 65.05 SW. cor. of wire fence brs. N. 1 ch. dist.
 70.80 Wagon road brs. NW. and SE.
 71.30 Small stream of water, 12 ins. wide, 2 ins. deep, course,
 NW.
 79.90 The cor. of secs. 22, 23, 26 and 27.
 Land, rolling.
 Soil, rocky.
 Timber, scattering oak and cedar.
 Undergrowth, scattering mesquite and cat claw.
 Scattering short grass.

N. 0° 1' W. bet. secs. 22 and 23.
 Over rolling land, through scattering timber.
 Desc. 80 ft. to
 8.70 Wash, 20 lks. wide, course, NE. Asc. 156 ft. to
 26.70 Rocky ridge brs. NE. and SW. slopes NE.
 Hugh Covill's house brs. N. 53¼° E. about 11 chs. dist.;
 Descend 138 ft. to
 38.23 Gulch, 15 lks. wide, course NE. Descend 144 ft. to

Subdivision of T. 13 S. R. 26 E.

Chains
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\begin{array}{c} \uparrow \\ S22 | S23 \\ 1915 \end{array}$

and raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
 Desc. 69 ft. to
 51.84 Wagon road brs. NW. and SE. Asc. gradual slope, to
 56.44 Low ridge brs. NW. and SE. Desc. 37 ft. to
 62.51 Gulch, 10 lks. wide, 3 ft. deep, course, NE.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 14, 15, 22 and 23, mkd. on brass cap

$\begin{array}{c} T13S R26E \\ S15 | S14 \\ S22 | S23 \\ 1915 \end{array}$

and raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
 Land, rolling mountainous.
 Soil, rocky and gravelly.
 No timber.
 Undergrowth, scattering mesquite and cat claw.
 Scattering short grass.

40.00 N. 89° 50' E. on a random line bet. secs. 14 and 23. Set temp. $\frac{1}{4}$ sec. cor.
 79.90 Intersect N. and S. line, 2 lks. S. of cor. of secs. 13, 14, 23 and 24.
 Thence
 S. 89° 49' W. on a true line bet. secs. 14 and 23.
 Over nearly level land, through scattering undergrowth.
 2.02 Wash, 10 lks. wide, course, S.
 5.02 Top of low ridge brs. N. and S. Desc. 29 ft. to
 13.50 Wash, 40 lks. wide, 3 ft. deep, course, NE.
 39.95 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\begin{array}{c} \frac{1}{4}S14 \\ S 23 \\ 1915 \end{array}$

and raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
 50.02 Low flat ridge brs. NE. and SW. Desc. 29 ft. to
 59.15 Wash, 20 lks. wide, course, NE.
 65.56 Wash, 15 lks. wide, course, NE.
 69.45 Wash, 10 lks. wide, course, NE.
 79.15 Wagon road brs. NW. and SE.
 79.90 The cor. of secs. 14, 15, 22 and 23.
 Land, nearly level.
 Soil, gravelly.
 Undergrowth, scattering mesquite and cat claw.
 Scattering short grass.

N. 0° 1' W. bet. secs. 14 and 15.
 Over level land, through scattering undergrowth.


Chains		
.60	Wagon road brs. NW. and SE.	
15.00	Wash, 10 lks. wide, 2 ft. deep, course, NE.	
31.30	Wash, 50 lks. wide, course, NE.	
40.00	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap	
	$\begin{array}{c} \frac{1}{4} \\ S15 \uparrow S14 \\ 1915 \end{array}$	
	and raise a mound of stone; 3 ft. base, 2 ft. high, W of cor.	
54.30	Wagon road brs. NE. and SW.	
	Asc gradual slope, 29 ft. to	
59.98	Flat ridge brs. NE. and SW.	
64.18	Wash, 5 lks. wide, course, NE.	
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 10, 11, 14 and 15, mkd. on brass cap	
	$\begin{array}{c} T13S R26E \\ S10 S11 \\ S15 S14 \\ 1915 \end{array}$	
	and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.	
	Land, level.	
	Soil, gravelly.	
	No timber.	
	Undergrowth, scattering mesquite and cat claw.	
	Fair growth of grass.	

	N. $89^{\circ} 49'$ E. on a random line bet. secs. 11 and 14.	
40.00	Set temp. $\frac{1}{4}$ sec. cor.	
79.94	Intersect N. and S. line, 2 lks. N. of cor. of secs. 11, 12, 13 and 14.	
	Thence	
	S. $89^{\circ} 50'$ W. on a true line bet. secs. 11 and 14.	
	Over gently rolling land; through scattering undergrowth.	
	Asc. 29 ft. to	
11.46	Top of round hill slopes N. Desc. 28 ft. to	
17.84	Wash, 10 lks. wide, course, NE.	
19.30	Wagon road brs. NE. and SW.	
29.45	Wash, 15 lks. wide, 4 ft. deep, course, NE.	
30.14	Wash, 20 lks. wide, 4 ft. deep, course, NE.	
34.94	Wash, 40 lks. wide, 4 ft. deep, course, NE.	
39.97	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap	
	$\begin{array}{c} \frac{1}{4} S11 \\ S 14 \\ 1915 \end{array}$	
	dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft. dist.; and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.	
61.54	Wash, 15 lks. wide, course, NE.	
67.84	Wagon road brs. NE. and SW.	
71.85	Wash, 6 lks. wide, 2 ft. deep, course, NE.	
79.94	The cor. of secs. 10, 11, 14 and 15.	
	Land, nearly level.	
	Soil, gravelly.	
	No timber.	
	Undergrowth, scattering mesquite and cat claw.	
	Fair growth of grass.	


Subdivision of Township 13 South Range 26 East

Chains.

N.0°1'W. bet. secs. 10 and 11.
 Over rolling land, through scattering undergrowth.
 Descend 43 ft. to
 7.47 Wash, 10 lks. wide, 1 ft. deep, course NE.
 Ascend 34 ft. to
 29.94 Flat ridge, brs. NE. and SW. Descend gradual slope.
 32.24 Wagon road brs. NE. and SW.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,




and raise a mound of stone 3 ft. base, 2 ft. high, W. of
 cor.
 Descend gradual slope, 58 ft. to
 80.00 Set, an iron post 3 ft. long, 2 ins. in diam., 24 ins. in
 the ground, for cor. of secs. 2, 3, 10 and 11, marked on
 brass cap,



and raise a mound of stone, 3 ft. base, 2 ft. high, W. of
 cor.
 Land, gently rolling.
 Soil, gravelly.
 No timber.
 Undergrowth, scattering mesquite and catclaw.
 Scattering short grass.

N.89° 50'E., on a random line, bet. secs. 2 and 11.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.02 Intersect N. and S. line, 2 lks. S. of cor. of secs. 1, 2, 11
 and 12.
 Thence
 S.89° 49' W, on a true line, bet. secs. 2 and 11.
 Over gently rolling land, through scattering undergrowth.
 7.48 Wagon road, brs. NE. and SW.
 26.18 Enter rolling land; descend 73 ft. to
 33.74 Wash, 10 lks. wide, course NE. Ascend 29 ft. to
 40.01 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,



dig pits 18x18x12 ins., E. and W. of post 3 ft. dist.,
 and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N.
 of cor.
 42.40 Flat ridge, brs. NE. and SW. Descend 24 ft. to
 47.30 Draw, course NE. Ascend 17 ft. to
 51.60 Ridge, brs. NE. and SW. Descend 18 ft. to
 56.60 Wash, 8 lks. wide, course NE. Ascend 18 ft. to
 62.67 Wagon road brs. NE. and SW. Descend 57 ft. to
 76.23 Wash, 8 lks. wide, course NE.
 80.02 The cor. of secs. 2, 3, 10 and 11.
 Land, gently rolling.
 Soil, gravelly.
 No timber.
 Undergrowth, scattering mesquite and catclaw.
 Fair growth of grass.

20. Subdivision of Township 13 South, Range 26 East

Chains.

26.80 N. 0°1'W., on a true line, bet. secs.2 and 3.
 Over level land, through scattering undergrowth.
 40.00 Wash, 50 lks.wide, course NE.
 Set an iron post 3 ft.long, 1 in. in diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,

$\frac{1}{4}$
 S 3 | S 2
 1915

dig pits 18x18x12 ins., N.and S.of post 3 ft. dist.,
 and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
 W.of cor.

78.00 Thence over gently rolling land.
 Intersect N. bdy.of Tp., 6.36 chs. S. 89°55'E. of reestab-
 lished cor.of secs.2,3, 34 and 35, which is a conglom-
 erate stone 6x8x6 ins. above ground, firmly set,marked
 and witnessed as described by the Surveyor General.
 Change this cor.to refer to secs. 34 and 35 only, by
 moving the mound of stone from W. to N. of cor.

At point of intersection,
 Set an iron post, 3 ft.long, 2 ins. diam., 24 ins. in
 the ground for closing cor.of secs.2 and 3, marked on
 brass cap,

T12S R26E
 S34 | S35
 C | C
 S 3 | S 2
 T13S R26E
 1915

and raise a mound of stone 3 ft.base, $2\frac{1}{2}$ ft.high,S.of
 cor.

Land, rolling.
 Soil, gravelly and stony.
 No timber.
 Undergrowth, scattering mesquite and catclaw.

 From the reestablished cor.of secs. 3,4,33 and 34 on the
 S. bdy.of Tp.,hereinbefore described.

13.61 N.0°2'W., bet. secs.33 and 34.
 30.31 Over mountainous land, through scattering undergrowth.
 Descend 92 ft.to
 Gulch, 50 lks.wide, course SW. Ascend 502 ft.to
 40.00 Top of main ridge of Dos Cabezas Mountains, 1 ch. wide, course
 NW. and SE. Desc. 227 ft.to
 Set an iron post 3 ft.long, 1 in. in diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec.cor., marked on brass rap,

$\frac{1}{4}$
 S 33 | S34
 1915

and raise a mound of stone, 3 ft.base, 2 ft.high,W.of
 cor.

69.65 Descend 515 ft.to
 Rocky gulch, 20 lks.wide, with small stream of water,
 course NE. Ascend 23 ft.to
 73.98 Ridge, brs.NE. and SW. Descend 45 ft.to
 77.90 Rocky gulch,20 lks.wide, course NE. Ascend 40 ft.to
 80.00 Set an iron post 3 ft.long 2 ins. in diam.,on surface
 rocky in a mound of stone,for cor.of secs.27,28,33 and
 34, marked on brass cap

T13S R26E
 S28 | S27
 S33 | S34
 1915

Subdivision of T.13 S. R. 26 E.

Chains

and raise a mound of stone, 3 ft. base, 2 ft. high,
W. of cor.
Land, mountainous.
Soil, rocky.
No timber.
Undergrowth, scattering mesquite and cat claw.
Fair growth of grass.

40.00 S. 89° 56' E. on a random line bet. secs. 27 and 34.
Set temp. $\frac{1}{4}$ sec. cor.
80.08 Intersect N. and S. line, 33 lks. N. of cor. of secs.
26, 27, 34 and 35.
Thence
N. 89° 42' W. on a true line bet. secs. 27 and 34.
Over rolling land, through scattering undergrowth.
.42 Wash, 20 lks. wide, course, NE. Asc. 94 ft. to
8.25 Rocky ridge brs. NE. and SW.
Intersect E. end line of Joe Bowers Lode mining claim, Sur-
vey No. 2847, 2.30 chs. N. 9° 0' E. of cor. No. 1. Desc. 34 ft. to
17.07 Rocky gulch, 10 lks. wide, course, NE. Desc. 48 ft. to
21.17 Rocky ridge, brs. NE. and SW. Desc. 32 ft. to
28.05 Wagon road brs. NE. and SE. Desc. 52 ft. to
29.16 Wash, 50 lks. wide, course, NE. Asc. 57 ft. to
31.18 Intersect W. end line of Hattie lode mining claim, Sur. No.
2847, 1.15 chs. S. 9° W. of cor. No. 3, 1.15
35.64 U.S. Mineral Mon. No. 2847 brs. S. 59° 50' E.
38.10 Rocky ridge brs. N. and S. Desc. 21 ft. to
40.04 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{2}$ S27
S 34
1915.

and raise a mound of stone, 3 ft. base, 2 ft. high,
N. of cor.
Asc. 40 ft. to
41.52 Gulch, 10 lks. wide, with seeping water, course, NE.
Asc. 66 ft. to
46:78 Intersect N. end line of Olivia lode mining claim, Survey. No.
2847, 2.74 chs. S. 81° E. of cor. No. 4.
49.54 Intersect W. side line of Olivia lode mining claim Sur. No.
2847, 40 lks. S. 9° W. of cor. No. 4. Descend 29 ft. to
50.00 Gulch, 10 lks. wide, course, NE. Asc. 156 ft. to
55.63 Top of knoll. Desc. gradual slope to
63.00 Asc. 70 ft. to
66.51 Ridge brs. NE. and SW. slopes NE. Desc. 91 ft. to
70.88 Gulch 25 lks. wide, course, NE. Asc. 121 ft. to
72.96 Gulch, 20 lks. wide, course, NE. Asc. 119 ft. to
80.08 The cor. of secs. 27, 28, 33 and 34.
Land, mountainous.
Soil, rocky.
No timber.
Undergrowth, scattering mesquite and cat claw.
Fair growth of grass.

N. 0° 2' W. bet. secs. 27 and 28.
Over rolling mountainous land, through scattering underg
growth.
Asc. 25 ft. to
1.86 Rocky spur, slopes NE. Desc. 128 ft. to
10.07 Gulch, 25 lks. wide, course, NE.

Chains

Asc. 45 ft. to
 17.00 Ridge brs. E. and W. Desc. 135 ft. to
 27.37 Gulch, course, NE. Desc. 108 ft. to
 30.00 Asc. 28 ft. to
 34.54 Ridge brs. NE. and SW. Desc. 63 ft. to
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$
 S28 | S27
 1915

and raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
 Desc. 28 ft. to
 42.26 Gulch, 10 lks. wide, course, NE. Desc. 47 ft. to
 51.07 Wash, 10 lks. wide, course, NE. Desc. 57 ft. to
 57.06 Wash, 30 lks. wide, course, NE. Desc. 41 ft. to
 60.17 Spur, slopes NE. Desc. 52 ft. to
 62.96 Wash, 8 lks. wide, course, SE. Asc. 63 ft. to
 72.18 Flat ridge brs. NE. and SW. slopes NE. Descend.
 76.00 Wash, 10 lks. wide, course NE., 2 ins. diam., 24 ins. in
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 21, 22, 27 and 28, marked on brass cap,

T13S R26E
 S21 | S22
 S28 | S27
 1915

and raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.
 Land, rolling mountainous.
 Soil, rocky.
 No timber.
 Undergrowth, scattering mesquite and cat claw.
 Fair growth of grass.

40.00 S. 89° 42' E. on a random line bet. secs. 22 and 27.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.88 Intersect N. and S. line, 8 lks. N. of cor. of secs. 22, 23, 26 and 27.
 Thence
 N. 89° 39' W. on a true line bet. secs. 22 and 27.
 Over rolling mountainous land, through scattering timber and undergrowth.
 Desc. 69 ft. to
 6.28 Wash, 20 lks. wide, course, NE. Asc. 196 ft. to
 28.13 Flat ridge brs. NE. and SW. Desc. 142 ft. to
 39.94 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$ S22
 S 27
 1915

and raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
 Desc. 29 ft. to
 42.52 Gulch, 10 lks. wide, course, NW. Asc. 108 ft. to ridge.
 49.34 Wash, 50 lks. wide, course, NE.
 64.67 Rocky, ridge brs. NE. and SW. Desc. 47 ft. to
 75.77 Gulch, 10 lks. wide, course, NE. Asc. 52 ft. to
 79.88 The cor. of secs. 21, 22, 27 and 28.
 Land, rolling mountainous.
 Soil, rocky.
 Timber, scattering oak and cedar and ash.
 Undergrowth, scattering mesquite and cat claw.
 Fair growth of grass.

Subdivision of T. 13 S. R. 26 E.

Chains

N. 0° 2' W. bet. secs. 21 and 22.
 Over rolling land, through scattering undergrowth.
 Asc. 44 ft. to
 9.95 Ridge brs. NE. and SW. Desc. 160 ft. to
 35.04 Wagon road brs. E. and W.
 36.14 Wash, 50 lks. wide, 3 ft. deep, course, NE.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$
 S21 | S22
 1915

and raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 2 ft. high,
 W. of cor.
 Asc. 12 ft. to
 42.39 Ridge brs. E. and W.
 49.29 Wash, 15 lks. wide, course, SE. Asc. 167 ft. to
 68.75 Spur slopes NE. Desc. 167 ft. to
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in
 the ground, for cor. of secs. 15, 16, 21 and 22, mkd.
 on brass cap.

T13S R26E
 S16 | S15
 S21 | S22
 1915

and raise a mound of stone, 3 ft. base, 2 ft. high, W
 W. of cor.
 Land, rolling.
 Soil, rocky.
 No timber.
 Undergrowth, scattering mesquite and cat claw.
 Fair growth of grass.

40.00 S. 89° 39' E. on a random line bet. secs. 15 and 22.
 79.82 Set temp. $\frac{1}{4}$ sec cor.
 Intersect N. and S. line, 10 lks. S. of cor. of secs. 14
 15, 22 and 23.
 Thence
 N. 89° 43' W. on a true line bet. secs. 15 and 22.
 Over mountainous land, through scattering undergrowth.
 Old rock house without top brs. S. 1 ch. dist.
 3.61 Wash, 40 lks. wide, course, NE.
 19.82 House on line.
 23.96 Wagon road brs. NE. and SW.
 27.42 Wash, 50 lks. wide, course, NE.
 36.88 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in.
 39.91 the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$ S15
 S 22
 1915

and raise a mound of stone, 3 ft. base, 2 ft. high,
 N. of cor. Ascend 41 ft.
 43.12 Wash, 10 lks. wide, course NE.
 60.68 Rocky spur, slopes, NE. Desc. 18 ft. to
 65.00 Asc. 74 ft. to
 72.95 Top of rocky hill. Desc. 64 ft. to
 79.82 The cor. of secs. 15, 16, 21 and 22.
 Land, rolling .
 Soil, rocky.
 No timber.
 Undergrowth, scattering mesquite and cat claw.
 Fair growth of grass.

Chains

N. 0° 2' W. bet. secs. 15 and 16.
 Over rolling land, through scattering undergrowth.
 Mizenheimer's ranch house brs. N. 26 $\frac{1}{2}$ ° W.
 Desc. 69 ft. to
 14.94 Ridge brs. E. and W. Desc. 155 ft. to
 26.86 Wash, 8 lks. wide, 2 ft. deep, course, NE.
 Thence over gently rolling land.
 38.35 Mizenheimer's ranch house brs. N. 64° W.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

S16 | S15
 1915

and raise a mound of stone, 3 ft. base, 2 ft. high,
 W. of cor.
 Desc. 29 ft. to
 51.98 Wagon road brs. E. and W. Desc. gradual slope, 29 ft. to
 79.38 Sandy wash, 1 ch. wide, course, NE.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in
 the ground, for cor. of secs. 9, 10, 15 and 16, mkd.
 on brass cap

T13S R26E
 S 9 | S10
 S16 | S15
 1915

and raise a mound of stone, 3 ft. base, 2 ft. high,
 W. of cor.
 Land, rolling.
 Soil, rocky and gravelly.
 No timber.
 Undergrowth, scattering mesquite and cat claw.
 Fair growth of grass.

40.00 S. 89° 43' E. on a random line bet. secs. 10 and 15.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.70 Intersect N. and S. line, 7 lks. S. of cor. of secs. 10,
 11, 14 and 15.
 Thence
 N. 89° 46' W. on a true line bet. secs. 10 and 15.
 Over rolling land, thru scattering undergrowth, asc. 63 ft.
 7.00 Wash, 10 lks. wide, course NE.
 22.12 Wagon road brs. NE. and SW.
 26.02 Ridge slopes NW. Desc. 105 ft. to
 36.55 Spur, slopes NW. Desc. 34 ft. to
 39.85 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

S10
 S 15
 1915

and raise a mound of stone, 3 ft. base, 3 ft. high,
 N. of cor.
 43.02 Wash, 20 lks. wide, 10 ft. deep, course, NW. Asc. 40 ft.
 to
 49.83 Flat spur, slopes N. Desc. 95 ft. to
 59.70 Enter nearly level land.
 Wash, 1 ch. wide, course, NW.
 71.90 Wagon road brs. NW. and SE.
 78.70 Wash, 1 ch. wide, course, NE.
 79.70 The cor. of secs. 9, 10, 15 and 16.
 Land, rolling.
 Soil, rocky and gravelly.
 No timber.
 Undergrowth, scattering mesquite and cat claw.

Subdivision of Township 13 South Range 26 East. 25.

Chains.

4.70 N.0° 2' W., bet. secs.9 and 10.
 13.85 Over gently rolling land, through scattering undergrowth.
 40.00 Wagon road, brs.NE. and SW.
 Wagon road brs.NW. and SE. Ascend gradual slope.
 Set an iron post 3 ft.long, 1 in. in diam., 26 ins. in
 the ground for 1/4 sec.cor., marked on brass cap,

1/4
 S9 | S10
 1915

and raise a mound of stone, 3 ft. base, 2 1/2 ft. high,
 N.of cor.

48.00 Wash, 50 lks.wide, course NE.
 68.48 Wagon road, brs.NE. and SW.
 80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 24 ins. in
 the ground, for cor.of secs. 3,4,9 and 10, marked on
 brass cap,

T13S R26E
 S4 | S3
 S9 | S10
 1915

and raise a mound of stone, 3 ft.base, 2 ft. high,W.of
 cor.

Land,gently rolling.
 Soil, gravelly.
 No timber.
 Undergrowth, scattering mesquite and catclaw.
 Fair growth of grass.

40.00 S. 89° 46' E. on a random line, bet. secs.3 and 10.
 79.74 Set temp.1/4 sec.cor.
 Intersect N.and S line, 3 lks.S.of cor.of secs.2,3,10 and
 11.

Thence
 N.89° 47' W., on a true line, bet. secs.3 and 10.
 Over gently rolling land, through scattering undergrowth.
 Descend 23 ft.to

16.44 Wash, 1 ch. wide, course NE.
 22.94 Wagon road brs.NE. and SW.
 39.87 Set an iron post 3 ft.long; 1 in. in diam., 26 ins. in
 the ground, for 1/4 sec.cor., marked on brass cap,

1/4 S 3
 S 10
 1915

and raise a mound of stone, 3 ft.base, 2 1/2 ft. high,N.
 of cor.

47.54 Wash,20 lks.wide, 5 ft.deep,course NE.
 67.60 Wagon road brs.NE. and SW.
 79.74 The cor.of secs.3,4,9 and 10.
 Land, gently rolling.
 Soil, gravelly and stony.
 No timber.
 Undergrowth, scattering mesquite and catclaw.
 Fair growth of grass.

3.20 N.0° 2' W., on a true line, bet. secs.3 and 4.
 40.00 Over gently rolling land, through scattering undergrowth.
 Wash, 50 lks.wide, course NE.
 Set an iron post 3 ft.long, 1 in. in diam., 26 ins. in
 the ground, for 1/4 sec.cor., marked on brass cap,

1/4
 S4 | S3
 1915

26 Subdivision of Township 13 South, Range 26 East.

Chains.

Dig pits 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

57.50
77.71

Wash, 20 lks. wide, 3 ft. deep, course NE.
Intersect N. bdy. of Tp., 6.82 chs. S. 89° 55' E. of reestablished cor. of secs. 3, 4, 33 and 34, which is a granite stone, 4x4x8 ins. above ground, firmly set, marked and witnessed as described by the Surveyor General. Change this cor. to refer to secs. 33 and 34 only, by filling in the pits SE. and SW. of cor., enlarging the pits NE. and NW. of cor. to 24x24x12 ins., and by moving the mound of earth 4 ft. base, 2 ft. high from W. to N. of cor.

At point of intersection,
Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for closing cor. of secs. 3 and 4, marked on brass cap,

T12S R26E
S33 | S34

O | C
S 4 | S3
T13S R26E
1915

and raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.

Land, gently rolling.
Soil, gravelly.
No timber.
Undergrowth, scattering mesquite and catclaw.
Fair growth of grass.

From the reestablished cor. of secs. 4, 5, 32 and 33 on S. bdy. of Tp., hereinbefore described, N. 0° 2' W., bet. secs. 32 and 33.

Over mountainous land, through scattering undergrowth.
Ascend 195 ft. to

10.29
15.23
40.00

Wash, course SW. Descend 82 ft. to
Ascend 423 ft. to
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

S32 | S33
1915

and raise a mound of stone 2 ft. base, 2 ft. high, W. of cor.

45.00
63.54
80.00

Ascend 15 ft. to
Summit of ridge brs. NE. and SW. Descend 120 ft. to
Gulch, 20 lks. wide, course SW. Ascend 398 ft. to
Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 28, 29, 32 and 33, marked on brass cap,

T13S R26E
S29 | S28

S32 | S33
1915

from which,

- A cedar, 20 ins. diam., brs. N. 20° E., 194 lks. dist., marked T 13 S R 26 E S 28 B T.
- A cedar, 18 ins. diam., brs. S 13° W., 27 lks. dist., marked T 13 S R 26 E S 33 B T.

Chains

A cedar, 12 ins. diam., brs. N. 45° W.
 69 lks. dist. mkd. T.13 S R 26 E S 29 B T.
 No other trees within limits.
 Raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.
 Land, mountainous.
 Soil, rocky.
 Timber, scattering cedar and oak.
 Undergrowth, scattering mesquite and cat claw.

40.00 S. 89° 56' E. on a random line bet. secs. 28 and 33.
 Set temp. 1/4 sec. cor.
 80.10 Intersect N. and S. line, 10 lks. S. of cor. of secs.
 27, 28, 33 and 34.

Thence
 West on a true line bet. secs. 28 and 33.
 Over mountainous land, through scattering timber and
 undergrowth.

28.33 Asc. 263 ft. to
 Rocky gulch, 12 lks. wide, at bottom, course, SE. Asc.
 620 ft. to

40.05 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
 the ground, for 1/4 sec. cor., mkd. on brass cap

1/4 S 28
 S 33
 1915

and raise a mound of stone, 3 ft. base, 2 ft. high,
 N. of cor.

46.70 Asc. 207 ft. to
 Rim-rock of rocky cliff, brs. N. and S. Asc. 235 ft. to
 49.77 Main ridge Dos Cabezas Mts., brs. NW. and SE. Descend.
 50.37 Spur, slopes SW. Desc. 514 ft. to
 72.00 Wash, 20 lks. wide, course, SW. Asc. 99 ft. to
 78.42 Spur, slopes SW. Desc. 143 ft. to
 80.10 The cor. of secs. 28, 29, 32 and 33.

Land, mountainous.
 Soil, rocky,
 Timber, scattering cedar.
 Undergrowth, scattering mesquite.
 Fair growth of grass.

N. 0° 2' W. bet. secs. 28 and 29.
 Over mountainous land, through scattering undergrowth.
 Asc. 37 ft. to

3.46 Gulch, 10 lks. wide, course, W. Asc. 387 ft. to
 16.57 Main ridge Dos Cabezas Mts., brs. NW. & SE. Desc. 595 ft. to
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
 the ground, for 1/4 sec. cor., mkd. on brass cap

1/4 S 29
 S 28
 1915

and raise a mound of stone, 3 ft. base, 3 ft. high,
 W. of cor.

56.05 Desc. 175 ft. to
 Rocky gulch, 10 lks. wide, course, NE. Desc. 88 ft. to
 67.97 Rocky gulch, 10 lks. wide, course, NW. Desc. 95 ft. to
 72.36 Rocky gulch, 20 lks. wide, course, NE. Asc. 20 ft. to
 77.00 Desc. 28 ft. to
 79.20 Thence over gently rolling land.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in
 the ground, for cor. of secs. 20, 21, 28 and 29, mkd.
 on brass cap

Chains

T13S R26E
 S20 | S21
 S29 | S28
 1915

and raise a mound of stone, 3 ft. base, 2½ ft. high,
 W. of cor.
 Land, mountainous.
 Soil, rocky.
 No timber.
 Undergrowth, scattering mesquite and scrub oak and cedar.
 Fair growth of grass.

40.00 East on a random line bet. secs. 21 and 28.
 Set temp. ¼ sec. cor.
 80.24 Intersect N. and S. line, 41 lks. S. of cor. of secs.
 21, 22, 27 and 28.
 Thence
 S. 89° 42' W. on a true line bet. secs. 21 and 28.
 Over rolling land, through scattering undergrowth.
 Asc. 148 ft. to
 10.47 Ridge brs. NE. and SW. Desc. 169 ft. to
 28.20 Wash, 10 lks. wide, course, NW.
 Thence over gently rolling land.
 29.94 Wash, 30 lks. wide, course, NW.
 39.74 Wash, 10 lks. wide, course, NE.
 40.12 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
 the ground, for ¼ sec. cor.;, mkd. on brass cap

½ S21
 S28
 1915

and raise a mound of stone, 3 ft. base, 2 ft. high,
 N. of cor.
 Asc. 114 ft. to
 48.17 Rocky spur, slopes N. Desc. 93 ft. to
 59.88 Gulch, 40 lks. wide, course, NE. Asc. gradual slope to
 64.44 Gulch, 30 lks. wide, course, NE.
 80.24 The cor. of secs. 20, 21, 28 and 29.
 Land, rolling.
 Soil, rocky.
 No timber.
 Undergrowth, scattering mesquite and cat claw.
 Short grass.

N. 0° 2' W. bet. secs. 20 and 21.
 Over rolling mountainous land, through scattering under-
 growth.
 Asc. 401 ft. to
 23.42 Top of ridge brs. NE. and SW. Desc. 347 ft. to
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
 the ground, for ¼ sec. cor., mkd. on brass cap

½ S20 | S21
 1915

and raise a mound of stone, 3 ft. base, 3 ft. high,
 W. of cor. Desc. 269 ft. to
 63.86 Wash, 30 lks. wide, course NE; Desc. 100 ft. to cor.
 71.87 Wash, 40 lks. wide, course NE.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in
 the ground, for cor. of secs. 16, 17, 20 and 21, mkd.
 on brass cap

Chains

T13S R26E
S17 | S16
S20 | S21
1915

and raise a mound of stone, 3 ft. base, 2½ ft. high,
W. of cor.
Land, mountainous.
Soil, rocky.
No timber.
Undergrowth, scattering mesquite and cat claw.

40.00 N. 89° 42' E. on a random line bet. secs. 16 and 21.
Set temp. ¼ sec. cor.
80.20 Intersect N. and S. line, 25 lks. N. of cor. of secs.
15, 16, 21 and 22.

Thence
S. 89° 54' W. on a true line bet. secs. 16 and 21.
Over rolling land, through scattering undergrowth.
2.57 Gulch, 10 lks. wide, course, NE. Asc. 21 ft. to
7.15 Spur, slopes N. Desc. over rolling land, to
12.50 Gulch, 15 lks. wide, course, NE. Asc. 34 ft. to
17.10 Spur slopes N. Desc. 74 ft. to
25.30 Gulch, 20 lks. wide, course, NE. Asc. 73 ft. to
32.30 Spur, slopes N. Desc. 17 ft. to
40.10 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
the ground, for ¼ sec. cor., mkd. on brass cap

½ S16
S 21
1915

and raise a mound of stone, 3 ft. base, 2½ ft. high,
N. of cor.
Asc. gradual slope, 34 ft. to
51.25 Spur, slopes N. Desc. 62 ft. to
72.90 Wash, 15 lks. wide, 6 ft. deep, course, NE.
80.20 The cor. of secs. 16, 17, 20 and 21.
Land, rolling.
Soil, rocky.
No timber.
Undergrowth, scattering mesquite and cat claw.
Short grass.

11.67 N. 0° 2' W. bet. secs. 16 and 17.
Over gently rolling land, through scattering undergrowth.
14.20 Wire fence brs. E. and W.
40.00 Wash, 10 lks. wide, 3 ft. deep, course, NE.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
the ground, for ¼ sec. cor., mkd. on brass cap

½ S17 | S16
1915

and raise a mound of stone, 3 ft. base, 2½ ft. base,
W. of cor.
Asc. 23 ft. to
60.68 Wire fence brs. E. and W.
60.83 Wash, 20 lks. wide, course, NE.
62.69 Wash, 10 lks. wide, course, NE.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in
the ground, for cor. of secs. 8, 9, 16 and 17, mkd.
on brass cap

Chains

T13S R26E
 S 8 | S 9
 S17 | S16
 1915

and raise a mound of stone, 3 ft. base, 3ft. high,
 W. of cor.
 Land, gently rolling.
 Soil, rocky, to coarse gravel.
 No timber.
 Undergrowth, scattering mesquite and cat claw.

40.00 N. 89° 54' E. on a random line bet. secs. 9 and 16.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.22 Intersect N. and S. line, 5 lks. S. of cor. of secs. 9,
 10, 15 and 16.
 Thence
 S. 89° 52' W. on a true line bet. secs. 9 and 16.
 Over gently rolling land, through scattering undergrowth.
 2.05 Wagon road brs. NE. and SW.
 10.24 Wash, 15 lks. wide, course, NE.
 36.67 Wagon road brs. NW. and SE.
 37.22 Wash, 50 lks. wide, course, NE.
 40.11 Set an iron post, 3 ft. long, 1 in. diam., 26 ins in
 the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

~~189~~
 S 16
 1915

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
 N. of cor.
 57.27 Over low rolling land.
 69.14 Wash, 20 lks. wide, 2 ft. deep, course, NE.
 80.22 The cor. of secs. 8, 9, 16 and 17.
 Land, gently rolling.
 Soil, gravelly.
 No timber.
 Undergrowth, scattering mesquite and cat claw.
 Fair growth of grass.

N. 0° 2' W. bet. secs. 8 and 9.
 Over level land, through scattering undergrowth.
 16.30 Wagon road brs. E. and W.
 22.00 Wash, 40 lks. wide, course, NE.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins in
 the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

S 8 | S 9
 1915

dig pits, 18 X 18 X 12 ins., N. and S of post, 3 ft.
 dist.; and raise a mound of earth, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft.
 high, W. of cor.
 Asc. 69 ft. to
 54.94 Top of knoll. Desc. 121 ft. to
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in
 the ground, for cor. of secs. 4, 5, 8 and 9, mkd.
 on brass cap

T13S R26E
 S 5 | S 4
 S 8 | S 9
 1915

Subdivision of Township 13 South Range 26 East 31

Chains.

and raise a mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high, W. of cor.

Land, level and gently rolling.

Soil, gravelly and stony.

No timber.

Scattering mesquite and catclaw.

Fair growth of grass.

40.00

N. $89^{\circ} 52' E.$, on a random line, bet. secs. 4 and 9.

Set temp. $\frac{1}{4}$ sec. cor.

80.10

Intersect N. and S. line, 3 lks. S. of cor. of secs. 3, 4, 9 and 10.

Thence

S $89^{\circ} 51' W.$, on a true line, bet. secs. 4 and 9.

Over rolling land, through scattering undergrowth.

5.83

Wash, 40 lks. wide. course NE. Ascend 69 ft. to

40.05

Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$$\frac{1}{4} \begin{array}{r} S 4 \\ S 9 \\ 1915 \end{array}$$

and raise a mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high, N. of cor.

Ascend 69 ft. to

60.00

Wash, 10 lks. wide, 3 ft. deep, course NE.

80.10

The cor. of secs. 4, 5, 8 and 9.

Land, gently rolling.

Soil, gravelly.

No timber.

Undergrowth; scattering mesquite and catclaw.

Fair growth of grass.

N. $0^{\circ} 2' W.$ on a true line, bet. secs. 4 and 5.

Over gently rolling land, through scattering undergrowth.

5.20

Wash, 30 lks. wide, 3 ft. deep, course NE.

29:98

Wash, 8 lks. wide, 3 ft. deep, course NE.

40.00

Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$$S \begin{array}{r} 5 \\ 5 \\ 1915 \end{array} | S 4$$

and raise a mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high, W. of cor.

Descend 40 ft. to

47.23

Wash, 40 lks. wide, course NE. Ascend 37 ft. to

67:47

Flat ridge, brs. NE. and SW. Descend gradual slope, 29 ft. to

78.00

Intersect N. bdy. of Tp. 6.75 chs. S. $89^{\circ} 55' E.$ of reestablished cor. of secs. 4, 5, 32 and 33, which is a granite stone, 8x5x6 ins. above ground, firmly set, marked and witnessed as described by the Surveyor General. Change this cor. to refer to secs. 32 and 33 only by filling in the pits SE. and SW. of post, enlarging the pits NE. and NW. of cor. to 24x24x12 ins., and by moving the mound of earth 4 ft. base, 2 ft. high, from W. to N. of cor.

At point of intersection,

Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for closing cor. of secs. 4 and 5, marked on brass cap,

32. Subdivision of Township 13 South, Range 26 East

Chains.

T12S R26E
 S32|S33
 C/C
 S 5|S4
 T13S R26E
 1915

and raise a mound of stone, 3 ft. base, 3 ft. high, S.
 of cor.

Land, gently rolling.

Soil, gravelly.

No timber.

Undergrowth, scattering mesquite and catclaw.

Fair growth of grass.

From the reestablished cor. of secs. 31 and 32 on the S.
 bdy. of Tp., hereinbefore described.

N.0° 3' W., bet. secs. 31 and 32.

Over level land, through scattering undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
 S31|S32
 1915

and raise a mound of stone, 3 ft. base, 2 ft. high, W.
 of cor.

40.05 Wire fence brs. E and W. NE. cor. of fence, brs. E. 1 ch. dist.
 78.10 Wash, 10 lks. wide, course NW.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in
 the ground, for cor. of secs. 29, 30, 31 and 32, marked
 on brass cap,

T13S R26E
 S30|S29
 S31|S32
 1915

and raise a mound of stone, 3 ft. base, 2 ft. high, W. of
 cor.

Land, level and gently rolling.

Soil, gravelly.

No timber.

Undergrowth, scattering mesquite and catclaw.

Fair growth of grass.

40.00 S.89° 56' E., on a random line, bet. secs. 29 and 32.
 Set temp. $\frac{1}{4}$ sec. cor.

80.06 Intersect N. and S. line, 37 lks. N. of cor. of secs. 28, 29,
 32 and 33.

Thence

N.89° 40' W., on a true line, bet. secs. 29 and 32.

Over mountainous land, through scattering undergrowth.

Descend 793 ft. to $\frac{1}{4}$ sec. cor.

12.93 Wash, 20 lks. wide, course SW.

40.03 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

S 29'
 $\frac{1}{4}$ S32
 1915

and raise a mound of stone 3 ft. base, 2 ft. high, N. of
 cor.

Subdivision of T. 13 S. R. 26 E.

Chains

42.80 Rocky spur, slopes SW. Desc. 447 ft. to
 76.17 Gulch, 10 lks. wide, course, NW.
 80.06 The cor. of secs. 29, 30, 31 and 32.
 Land, mountainous.
 Soil, rocky.
 No timber.
 Scattering mesquite and cat claw.
 Fair growth of grass.

40.00 N. 89° 58' W. on a random line bet. secs. 30 and 31.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.84 Intersect W. bdy. of Tp. 16, lks. S. of reestablished cor. of secs.
 25, 30, 31 and 36, which is an iron post, 3 ins.
 diam., properly set, mkd. and witnessed as described
 by the Surveyor General.

Thence
 18.10 S. 89° 51' E. on a true line bet. secs. 30 and 31.
 39.84 Over gently rolling land, through scattering undergrowth.
 Wash, 10 lks. wide, 3 ft. deep, course, SW.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$ S30
 S 31
 1915

and raise a mound of stone, 2 ft. base, 2 ft. high,
 N. of cor.
 59.70 Wash, 15 lks. wide, 4 ft. deep, course, SW.
 77.98 Gulch, 50 lks. wide, 8 ft. deep, course, SW.
 79.84 The cor. of secs. 29, 30, 31 and 32.
 Land, gently rolling.
 Soil, gravelly.
 No timber.
 Undergrowth, scattering mesquite and cat claw 5 to 8 ft.
 high
 Fair growth of grass.

1.50 N. 0° 3' W. bet. secs. 29 and 30.
 Over rolling land, through scattering undergrowth.
 Wash, 10 lks. wide, course, SW.
 Asc. 132 ft. to
 21.26 Wash, 10 lks. wide, course, SW. Asc. 126 ft. to
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

S30 | S29
 1915

and raise a mound of stone, 3 ft. base, 2 ft. high,
 W. of cor.
 Asc. 133 ft. to
 41.04 Rocky spur, slopes NW. Desc. gradual slope to
 53.53 Wash, 10 lks. wide, course, SW. Asc. 481 ft. to sec. cor.
 63.30 Gulch, 25 lks. wide, course, SW.
 67.71 Gulch, 20 lks. wide, course, SW.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in
 the ground, for cor. of secs. 19, 20, 29 and 30, mkd.
 on brass cap

T13S R26E
 S19 | S20
 S30 | S29
 1915

Chains

from which mound of stone, 3 ft. base, 2 ft. high,
 A juniper, 24 ins. diam., brs. N. 26 $\frac{1}{2}$ ° E.
 93 lks. dist. mkd. T 13 S R 26 E S 20 B T.
 A cedar, 12 ins. diam., brs. S. 2 $\frac{3}{4}$ ° E.
 164 lks. dist. mkd. T 13 S R 26 E S 29 B T.
 A cedar 8 ins. diam., brs. S. 23 $\frac{1}{2}$ ° W.
 84 lks. dist. mkd. T 13 S R 26 E S 30 B T.
 No other trees within limits.
 Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
 Land, mountainous.
 Soil, rocky.
 Timber, scattering juniper and cedar.
 Undergrowth, scattering mesquite and cat claw.
 Fair growth of grass.

40.00 S. 89° 40' E. on a random line bet. secs. 20 and 29.
 Set temp. $\frac{1}{4}$ sec. cor.

80.12 Intersect N. and S. line, at the cor. of secs. 20, 21,
 28 and 29.

Thence

N. 89° 40' W. on a true line bet. secs. 20 and 29.

Over mountainous land, through scattering undergrowth.
 Asc. 480 ft. to

38.21 Rocky spur, slopes N. Desc. 18 ft. to

40.06 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$ S20

S. 29

1915

and raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 2 ft. high,
 N. of cor.

46.36 Asc. gradual slope to
 Spur, slopes N. Desc. 167 ft. to

54.20 Gulch, 15 lks. wide, course, NE. Asc. 137 ft. to

60.10 Spur, slopes N. Desc. 165 ft. to

70.24 Main ridge Dos Cabezas Mts., brs. NW and SE. Asc. 45 ft. to

77.96 Spur, slopes S. Desc. 25 ft. to

80.12 The cor. of secs. 19, 20, 29 and 30.

Land, mountainous.

Soil, rocky.

No timber.

Undergrowth, scattering mesquite and cat claw.

Scattering short grass.

&&

40.00 N. 89° 51' W. on a random line bet. secs. 19 and 30.
 Set temp. $\frac{1}{4}$ sec. cor.

79.87 Intersect W. bdy. of Tp., 5 lks. S. of Δ cor. of secs. 19,
 24, 25 and 30, which is a granite stone, 12 X 10 X 6
 ins. above ground, firmly set, mkd. and witnessed
 as described by the Surveyor General.

Thence

S. 89° 49' E. on a true line bet. secs. 19 and 30.

Over mountainous land, through scattering undergrowth.

Asc. 94 ft. to

4.96 Rocky spur, slopes SW. Desc. 54 ft. to

9.56 Gulch, 20 lks. wide, course, SW. Asc. 237 ft. to

20.64 Rocky spur, slopes SW. Desc. 46 ft. to

23.31 Gulch, 10 lks. wide, course, SW. Asc. 112 ft. to

26.98 Gulch, 20 lks. wide, course, SW. Asc. 301 ft. to

35.12 Spur, slopes SW. Desc. 100 ft. to

The cor. of secs. 19, 20, 29 and 30.

Land, mountainous.

Chains.

39.87 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 19
S 30
1915

and raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

41.50 Gulch, 15 lks. wide, course SW.

44.52 Gulch; 15 lks. wide, course SW. Ascend 516 ft. to

56.73 Rocky spur, slopes SW. Descend 28 ft. to

60.00 Ascend 134 ft. to

66.25 Main ridge Dos Cabezas Mts. brs. NW. and SE. Desc. 261 ft. to

79.87 The cor. of secs. 19, 20, 29 and 30.

Land, mountainous.

Soil, rocky.

No timber.

Undergrowth, scattering mesquite and catclaw.

Scattering short grass.

N. 0° 3' W., bet. secs. 19 and 20.

Over mountainous land, through scattering undergrowth.

Ascend 113 ft. to

3.90 Jim Smith's house brs. N. 22° E.

Main ridge Dos Cabezas Mts. brs. NW. & SE. Desc. 363 ft. to

21.98 Gulch, 15 lks. wide, course NE. Ascend 51 ft. to

28.22 Spur slopes NE. Descend 250 ft. to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground, to solid rock, in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
S19 | S20
1915

and raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.

Descend 87 ft. to

44.37 Gulch, 20 lks. wide, 8 ft. deep, course NE. Ascend 51 ft. to

52.16 Spur slopes NE. Descend 177 ft. to

61.03 Wash, 10 lks. wide, course NE. Descend 100 ft. to

76.22 Wash, 20 lks. wide, 6 ft. deep, course NE.

Thence over gently rolling land, to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 17, 18, 19 and 20, marked on brass cap,

T13S R26E
S18 | S17
S19 | S20
1915

and raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.

Land, mountainous.

Soil, rocky.

No timber.

Undergrowth, scattering mesquite and catclaw.

Fair growth of grass.

S. 89° 40' E., on a random line, bet. secs. 17 and 20.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.32 Intersect N. and S. line, 23 lks. S. of cor. of secs. 16, 17, 20 and 21.

36 Subdivision of Township 13 South Range 26 East

Chains.

Thence
 N.89° 50' W., on a true line, bet. secs.17 and 20.
 Over rolling land, through scattering undergrowth.
 6.80 Wash, 10 lks.wide, 3 ft. deep, course NE.
 Ascend 172 ft.to
 19.74 Spur slopes NE. Descend 52 ft.to
 24.17 Gulch, 5 lks.wide, course NE. Ascend 28 ft.to
 31.07 Rocky point slopes NE. Descend 32 ft.to
 35.14 Small stream of water, course NE.
 37.14 Wash, 10 lks.wide, 3 ft. deep, course NE.
 40.16 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,

$\frac{1}{4}$ S 17
 S 20
 1915

and raise a mound of stone 3 ft.base, 2 ft.high,N.of
 cor.

Ascend 34 ft.to
 44.97 Rocky spur, slopes NE. Thence over gently rolling land.
 44.82 Wagon road brs.NE. and SW.
 51.53 Small stream of water, course NE.
 52.67 Jim Smith's house brs.S 5 chs.dist.
 64.55 Wash, 20 lks.wide, 4 ft. deep course NE. Ascend gradual
 slope, 69 ft.to
 80.32 The cor.of secs.17,18, 19 and 20.
 Land, rolling.
 Soil, rocky.
 No timber.
 Undergrowth. scattering mesquite and catclaw.
 Scattering short grass.

N.89° 49' W. on a random line, bet. secs.18 and 19.
 40.00 Set temp. $\frac{1}{4}$ sec.cor.
 81.42 Intersect W. lny. of Tp. 2.37 chs. S.1°9'E. of original
 cor. of secs. 13,18,19 and 24, which is a malpais
 stone 8x6x6ins. above ground, firmly set,marked and
 witnessed as described by the Surveyor General. ~~This corner refers to secs.13 and 24 only. No change in its markings or accessories is required.~~
 At point of intersection,
 Set an iron post, 3 ft.long, 2 ins. in diam., 24 ins. in
 the ground for closing cor. of secs.18 and 19, marked
 on brass cap,

T13S T13S
 R25E | R26E
 S24 | C S18
 | C S19
 1915

and raise a mound of stone, 3 ft.base, 2 $\frac{1}{2}$ ft. high,E.
 of cor.

Thence
 East,on a true line,bet.secs.18 and 19.
 Over mountainous land,through scattering undergrowth.
 Ascend 42 ft.to
 5.13 Spur,slopes NE. Descend 163 ft.to
 16.78 Gulch, 25 lks.wide, course NE.
 20.07 Gulch, 20 lks.wide, course N. Ascend 186 ft.to
 30.26 Ridge, brs.NE. and SW.
 L.C.Zeit's house brs.N.24 $\frac{1}{2}$ °W., about 20 chs.dist.
 Ascend 198 ft.to
 41.42 Set an iron post 3 ft.long, 1 in. in diam., 12 ins. in
 the ground, to solid rock, in a mound of stone for $\frac{1}{4}$
 sec.cor., marked on brass cap,

$\frac{1}{4}$ S 18
 S 19
 1915

Chains.

and raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.
 Descend 113 ft. to
 47.31 Gulch, 20 lks. wide, course NE. Ascend 103 ft. to
 57.66 Ridge, brs. N. and S. Descend 212 ft. to
 81.42 The cor. of secs. 17, 18, 19 and 20.
 Land, mountainous.
 Soil, rocky.
 No timber.
 Undergrowth, scattering mesquite and catclaw.
 Scattering short grass.

N. 0° 3' W., bet. secs. 17 and 18.
 Over rolling land, through scattering undergrowth.
 Ascend 46 ft. to
 5.51 Ridge, brs. E. and W. Descend 122 ft. to
 22.64 Gulch, 30 lks. wide, course NE.
 29.43 Wash, 10 lks. wide, course NE. Descend 46 ft. to
 30.00 Ascend 75 ft. to
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,
 S18 | S17
 1915

and raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.
 Descend 81 ft. to
 52.92 Ridge brs. NE. and SW. Descend 12 ft. to
 62.66 Wash, 8 lks. wide, 2 ft. deep, course NE.
 Thence over gently rolling land, to
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
 the ground, for cor. of secs. 7, 8, 17 and 18, marked on
 brass cap,
 T13S R26E
 S 7 | S 8
 S18 | S17
 1915

and raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
 Land, rolling.
 Soil, rocky.
 No timber.
 Undergrowth, scattering mesquite and catclaw.
 Scattering short grass.

S. 89° 50' E., on a random line, bet. secs. 8 and 17.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.48 Intersect N. and S. line, 10 lks. N. of cor. of secs. 8, 9, 16
 and 17.
 Thence
 N. 89° 46' W. on a true line, bet. secs. 8 and 17.
 Over rolling land, through scattering undergrowth.
 Ascend 17 ft. to
 3.00 Descend 29 ft. to
 10.00 Thence over gently rolling land.
 24.73 Wash, 10 lks. wide, course NE.
 39.77 Forks of road bear S., NE. and NW.
 40.24 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

38. Subdivision of Township 13 South, Range 26 East.

Chains

$\frac{1}{4}$ $\frac{S 8}{S 17}$
1915

and raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor.

- 41.89 Wash, 70 lks. wide, course NE.
- 73.28 Wash, 25 lks. wide, 2 ft. deep, course NE.
- 80.48 The cor. of secs. 7, 8, 17 and 18.
Land, rolling.
Soil, gravelly and rocky.
No timber.
Undergrowth, scattering mesquite and catclaw.
Scattering short grass.

West, on a random line, bet. secs. 7 and 18.

- 40.00 Set temp. sec. cor.
- 81.48 Intersect W. bdy. of Tp., 88 lks. S. 08 $\frac{1}{4}$ E. of reestab. cor. of secs. 7, 12, 13 and 18, which is a granite stone, 12x10x10 ins. above ground, firmly set, marked and witnessed as described by the Surveyor General. This cor. now refers to secs. 12 and 13 only. No change in markings or accessories necessary.
At point of intersection,
Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for closing cor. of secs. 7, and 18, marked on brass cap,

T13S T13S
R25E | R26E
S13 | C S7
 C S18
1915

from which original bearing tree,
A black oak, 10 ins. diam., brs. N. 23 $\frac{3}{4}$ ° E., 111 lks. dist., marked T 13 S R 26 E S 7 B T.
A post oak, 20 ins. diam., brs. S. 72° E., 194 lks. dist., marked T 13 S R 26 E S 18 BT.

Thence
East, on a true line, bet. secs. 7 and 18.
Over rolling, mountainous land, through scattering timber and undergrowth.

- Ascend 41 ft. to
- 3.51 Spur slopes N. Descend 80 ft. to
- 21.13 Wilson's sheep ranch brs. N. 48 $\frac{1}{4}$ ° E. Descend 80 ft. to
- 29.43 Wash, 5 lks. wide, course NE. Ascend 28 ft. to
- 32.95 Rocky spur, slopes NE. Descend 111 ft. to
- 38.82 Wilson's sheep ranch, brs. N. 1° E.
Descend 17 ft. to
- 41.48 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground, to solid rock, in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ $\frac{S 7}{S 18}$
1915

and raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

- Descend 29 ft. to
- 52.14 Wash, 1 ch. wide, course NW.
- 54.14 Wagon road, brs. N. and S.
- 56.84 Wash, 10 lks. wide, 1 ft. deep, course NE.
- 61.54 Low ridge, brs. N. and S. Descend 78 ft. to
- 70.75 Wash, 40 lks. wide, course NE.
- 81.48 The cor. of secs. 7, 8, 17 and 18.
Land, rolling.
Soil, rocky. No timber.
Undergrowth, scattering mesquite & catclaw. Scattering short grass.

Chains.

N.0° 3' W., bet. secs. 7 and 8.
 Over gently rolling land, through scattering undergrowth.
 1.10 Wash, 20 lks.wide, course NE.
 6.30 Wagon road, brs.E. and W.
 33.04 Wash, 10 lks.wide, course E.
 40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,

$\frac{1}{4}$
 S7|S8
 1915

and raise a mound of stone, 3 ft. base, 3 ft.high,W.of
 cor.
 80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 24 ins. in
 the ground, for cor.of secs.5,6, 7 and 8, marked on
 brass cap,

T13S,R26E
 S 6 | S 5
 S 7 | S 8
 1915

and raise a mound of stone, 3 $\frac{1}{2}$ ft. base, 2 $\frac{1}{2}$ ft. high,W.
 of cor.
 Land, gently rolling.
 Soil, gravelly.
 No timber.
 Undergrowth, scattering mesquite and catclaw.
 Fair growth of grass.

S.89°46'E., on a random line, bet. secs.5 and 8.
 40.00 Set temp. $\frac{1}{4}$ sec.cor.
 80.38 Intersect N.and S. line, 7 lks.N.of cor.of secs. 4,5,8
 and 9.

Thence
 N.89°43'W., on a true line, bet. secs.5 and 8.
 Over rolling land, through scattering undergrowth.
 5.50 Wash, 50 lks.wide, course NE.
 28.46 Wash, 15 lks.wide, course NE. Ascend 78 ft.to
 40.19 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,

$\frac{1}{4}$ S 5
 S 8
 1915

dig pits, 18x18x12 ins., E.and W. of post, 3 ft. dist.,
 and raise a mound of earth, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high,
 N.of cor.
 58.96 Wash 15 lks.wide, course NE.
 64.16 Wash, 10 lks.wide, course NE. Ascend gradual slope to
 80.38 The cor.of secs.5,6,7 and 8.
 Land, rolling.
 No timber.
 Undergrowth, scattering mesquite and catclaw.
 Fair growth of grass.

West, on a random line, bet. secs.6 and 7.
 40.00 Set temp. $\frac{1}{4}$ sec.cor.
 81.71 Intersect W. bdy. of Tp., 29 lks. N.of reestablished cor.
 of secs. 1,6,7 and 12, which is an iron post, 3 ins.
 diam., properly set, marked and witnessed as described
 by the Surveyor General, (reestablished by me in May,
 1913, under Group No.25).

40. Subdivision of Township 13 South, Range 26 East

Chains

Thence
N.89°48'E., on a true line, bet. secs.6 and 7.
Over gently rolling land, through scattering undergrowth.
Wash, 15 lks.wide, course NW.

37.81
41.71

Set an iron post 3 ft.long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,

$\frac{1}{4}$ S 6
S 7
1915

and raise a mound of stone, 3 ft.base, 3 ft.high,N.of cor.
Top of knoll.

47.63
54.31
70.71
81.71

Wash, 40 lks.wide, 3 ft.deep, course NE.

Small stream of water, course NE.

The cor.of secs.5,6,7 and 8.

Land, gently rolling.

Soil, gravelly.

No timber.

Undergrowth, scattering mesquite and catclaw.

Fair growth of grass.

N.0°3'W., on a true line, bet. secs.5 and 6.
Over gently rolling land,through scattering undergrowth.
Small stream of water, course NE.

27.70
40.00

Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,

S 6 | S 5
1915

and raise a mound of stone, 3 ft.base, 3 ft.high,W.of
cor.

55.00
77.68

Wash, 50 lks.wide, course NE.

Intersect N. bdy.of Tp., 6.35 chs. S.89°55'E.of reestab-
lished cor.of secs.5,6,31 and 32, which is a granite
stone,6x8x10 ins. above ground, firmly set, marked and
witnessed as described by the Surveyor General. Change
this cor. to refer to secs.31 and 32 only by filling
in pits SE. and SW.of cor. enlarging pits NE. and NW.
of cor. to 24x24x12 ins., and by moving mound of earth
4 ft.base, 2 ft.high, from W. to N.of cor.

At point of intersection,

Set an iron post, 3 ft.long, 2 ins. diam., 24 ins. in the
ground for closing cor. of secs.5 and 6, marked on
brass cap,

T12S R26E
S31 | S32
C/C
S 6 | S 5
T13S R26E
1915

and raise a mound of stone,3 ft.base,2 $\frac{1}{2}$ ft.high,S.of
cor.

Land,gently rolling.

Soil, gravelly.

No timber.

Undergrowth, scattering mesquite and catclaw.

Fair growth of grass.

GENERAL DESCRIPTION.

This township contains mountainous, rolling and level land. The Dos Cabezas Mountains traverse the township from NW. to SE., the main ridge of same, entering on the W. bdy. of sec. 19, and leaving on the S. bdy. of sec. 34. The soil is gravelly on the level and rolling land, and rocky on the mountains. There is no timber, except scattering oak in the SE. part of the Tp. The undergrowth of mesquite, catclaw and scrub oak is scattering over the entire township. Most of the surface is covered with a fair growth of grass. Some of the washes on the NE. slope of the mountains carry a small flow of water, and the possibilities of irrigation are good.

A number of small tracts are now under cultivation in secs. 25, 26, 35 and 36. The settlers located are: Wilson, with house and sheep ranch in sec. 7, Mizenheimer with house and large fenced pasture in sec. 16, L.C. Zeit with house in sec. 18, Jim Smith with house in sec. 20, Hugh Covill with house and fenced pasture of about 80 acres in sec. 23, William Becklin with tent house and Albright with house both in sec. 24, H. G. Huntzinger, with house, cultivated land, and fenced enclosure of about 160 acres, Glick Ester with house and fenced enclosure, and Laura J. McDay with tent house and cultivated land all in sec. 25; W. T. Yeckley with house and fenced enclosure, W. R. Wolford, with house and fenced enclosure, and Benjamin Horton, with tent shack, all in sec. 26. R. B. Buchanan with house and small fenced enclosure on line bet. secs. 26 and 27, W. T. Martin, with house, and S. 1/2 of sec. 31 fenced; P. L. Duvalt with house and fenced enclosure of cultivated land on line bet. secs. 35 and 36, R. L. Payne with cabin and fenced enclosure of cultivated land, in sec. 36. The old "76" ranch in sec. 35, and several other improvements were located, owners names not available. A group of 12 mining claims, Mineral Survey No. 2847, nine of which are patented, and on which are located a number of buildings is situated in secs. 27 and 34. Also, some placer gold has been taken from the lower slopes of Dos Cabezas mountains in this township.

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Thomas B. Matthews, U. S. Surveyor, hereby certify on honor that, in pursuance of special instructions received from the United States Surveyor General for Arizona, for Group 35, Arizona, bearing date of the 21st day of August, 1914, I have well, faithfully, and truly, in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, resurveyed all those parts or portions of the

South boundary, and surveyed all those parts or portions of the
Subdivision lines of Township 13 South, Range 26 East,

of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and I do further certify on honor that all the corners of said resurvey and survey have been reestablished or established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General for Group 35, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such resurvey and survey.

Thomas B. Matthews
U. S. Surveyor.

A P P R O V A L .

OFFICE OF UNITED STATES SURVEYOR-GENERAL,

Phoenix Arizona, Sept. 18 1917

The foregoing field notes of the resurvey of the South boundary,
and Survey of the Subdivision lines of

TOWNSHIP 13 SOUTH, RANGE 26 EAST,

of the Gila and Salt River Base and Meridian, in the State of Arizona, executed by Thomas B. Matthews, U. S. Surveyor, under his special instructions dated August 21, 1914, for Group 35, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the resurveys and surveys they describe, are hereby approved.

Frank A. Frost
U.S. Surveyor General of Arizona.