

3051

Book "K"

2121918

4-679

(Subdivisions)

BOOK 3051

FIELD NOTES

OF THE SURVEY OF THE

SUBDIVISION LINES

of

TOWNSHIP 1 NORTH, RANGE 5 WEST,

Of the Gila and Salt River Base and Meridian,

In the State of Arizona.

EXECUTED BY

Woodbury Abbey, U. S. Surveyor

and

Roy J. Gill, U.S. Transitman,

~~In the capacity of U.S. Surveyor~~, under instructions dated December 12, 1914,
issued by the United States Surveyor General to govern surveys included in
Group No. 39, which were approved by the Commissioner of the General Land
Office, January 7, 1915.

Survey commenced April 16, 1915.


Survey completed April 23, 1915.






282
1A

BOOK 3051

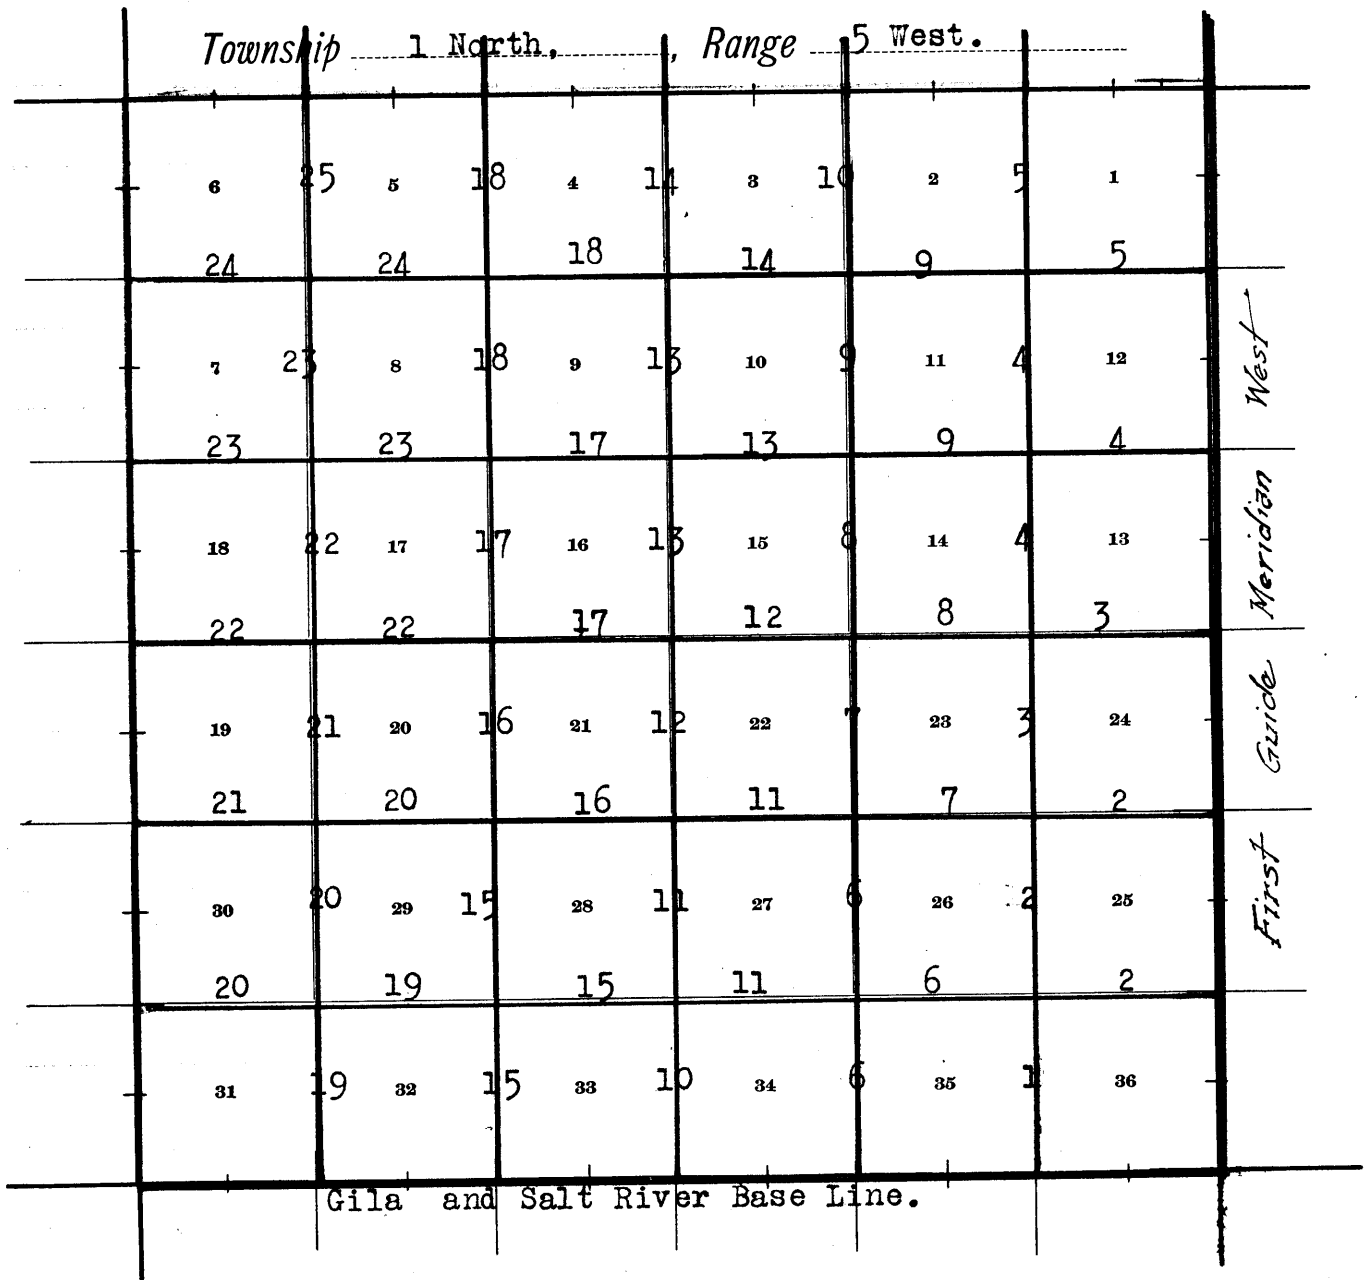Book "K"
(Subdivisions)
Group 39 - Arizona.

INDEX DIAGRAM.



-  Subdivision Lines surveyed under this Group.
-  Township boundaries surveyed under this Group.
Notes in Book "B."
-  Standard Lines resurveyed under this Group.
Notes in Book "A."
-  Accepted Surveys.
-  Unsurveyed Lines.

Subdivision of T. 1 N., R. 5 W.

16

Chains

Survey commenced Apr. 16, 1915, and executed jointly by Woodbury Abbey, U. S. Surveyor, and Roy J. Gill, U. S. Transitman., on dates shown on diagram on page 27 of this Book.

A description of the instruments used, with record of approval by the assistant supervisor of surveys and field tests, appears in Book "B".

All lines were originated by deflection from the transit line run during resurvey of the G. & S.R. Base Line, (S. bdy. of Tp.), described in Book "A," and from solar observations, a record of which follows herein; being checked by comparison with transit lines on E. and N. boundaries, described in Books "A" and "B," respectively.

The magnetic bearing of the true meridian, at 8h 00m, a. m., l. m. t., is N.14°30'W.; which gives for the mag. decl., 14°30' E.

Solar Observations.

Station,-- reestablished standard cor. of secs. 32 and 33. Date, Apr. 19, 1915. Hour, 8h 00m, a.m., l.m.t. Lat., 33°22½' N. Long., 112°47' W. Decl., 10°58' N. Observer, Woodbury Abbey.

Station,-- cor. of secs. 9, 10, 15 and 16. Date, Apr. 20, 1915. Hour, 3h 00m, p.m., l.m.t. Lat., 33°26' N. Long., 112°46' W. Decl., 11°25' N. Observer, Woodbury Abbey.

From the reestablished standard cor. of secs. 35 and 36, on the G. and S. R. Base Line, (S. bdy. of Tp.) described in Book "A,"

N.0°12' W., bet. secs. 35 and 36, (parallel to the mean bearing of the E. bdy. of the Tp.) over rolling land, through scattering timber and dense undergrowth.

- 31.00 Cabin bears E., 2 chs. dist.
33.00 Windmill bears E., 2 chs. dist.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked ¼ in N., S 35 in W., and S 36 in E. half; and 1915 in S. rim; and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
51.00 Wash, course SW.
68.50 Draw, course SE.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 25, 26, 35 and 36, with brass cap, marked T 1 N S 26 in NW., R 5 W S 25 in NE., S 36 in SE., and S 35 in SW. quadrant; and 1915 in S. rim; and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling.--Soil, 3rd rate.--Timber, ironwood and paloverde.

Chains	Undergrowth, greasewood and sage.
	East, on a random line, bet. secs. 25 and 36.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.06	Intersect E. bdy. of Tp., 10 lks. N. of the cor. of secs. 25, 30, 31 and 36, on 1st G. M. W., reestablished as described in Book "A."
	Thence N.89°56'W., on a true line, bet. secs. 25 and 36, over rolling land, through scattering timber and dense undergrowth.
32.45	Road bears N. and S.
40.03	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked $\frac{1}{4}$ S 25 in N., and S 36 in S. half; and 1915 in S. rim; dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
75.50	Wash, course S.
80.06	The cor. of secs. 25, 26, 35 and 36. Land, rolling. Soil, 3rd rate. Timber, ironwood and paloverde. Undergrowth, greasewood and sage.

	N.0°12'W., bet. secs. 25 and 26, over nearly level desert, through scattering timber and dense undergrowth.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked $\frac{1}{4}$ in N., S 25 in E., and S 26 in W. half; and 1915 in S. rim; and riase a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 23, 24, 25 and 26, with brass cap, marked T 1 N S 23 in NW., R 5 W S 24 in NE., S 25 in SE., and S 26 in SW. quadrant; and 1915 in S. rim; dig pits, 18x18x12 ins., in each sec., $5\frac{1}{2}$ ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor. Land, nearly level desert. Soil, gravelly $\frac{1}{2}$ 1st and 2nd rate. Timber, paloverde, mesquite and catclaw. Undergrowth, greasewood, sage and cactus.

	East, on a random line, bet. secs. 24 and 25.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.12	Intersect E. bdy. of Tp. 14 lks. N. of the reestablished cor. of secs. 19, 24, 25 and 30, on 1st G. M. W., described in Book "A."
	Thence N.89°54'W., on a true line, bet. secs. 24 and 25, over slightly rolling desert, through scattering timber and dense undergrowth.
31.00	Wash, 50 lks. wide, course S.20°E.
40.06	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked $\frac{1}{4}$ S 24 in N., and S 25 in S. half, and 1915 in S. rim;

Subdivision of T. 1 N., R. 5 W.

Chains

48.00 and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor. NW. and SE.
 80.12 The cor. of secs. 23, 24, 25 and 26.
 Land, slightly rolling.
 Soil, gravelly; 1st and 2nd rate.
 Timber, paloverde and catclaw.
 Undergrowth, greasewood, sage and cactus.

N.0°12'W., bet. secs. 23 and 24,
 over level land, through scattering timber and dense undergrowth.
 16.00 Wash, course SW.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked
 ¼ in N.,
 S 23 in W., and
 S 24 in E. half; and
 1915 in S. rim;
 dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, 3½ ft. base, 1½ ft. high, W. of cor.

56.00 Road bears NW. and SE.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 13, 14, 23 and 24, with brass cap, marked
 T 1 N., S 14 in NW.,
 R 5 W S 13 in NE.,
 S 24 in SE., and
 S 23 in SW. quadrant; and
 1915 in S. rim;
 and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
 Land, level.
 Soil, 1st rate.
 Timber, paloverde and ironwood.
 Undergrowth, greasewood and sage.

40.00 East, on a random line, bet. secs. 13 and 24.
 Set temp. ¼ sec. cor.
 80.20 Intersect E. bdy. of Tp. 22 lks. N. of the reestablished cor. of secs. 13, 18, 19 and 24, on 1st G. M. W., described in Book "A."

Thence N.89°51'W., on a true line, bet. secs. 13 and 24, over level land, through scattering timber and dense undergrowth.
 40.10 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked
 ¼ S 13 in N., and
 S 24 in S. half; and
 1915 in S. rim;
 dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, 3½ ft. base, 1½ ft. high, N. of cor.

52.70 Wash, 50 lks. wide, course SE.
 75.20 Draw, course S.
 80.20 The cor. of secs. 13, 14, 23 and 24.
 Land, level.
 Soil, 2nd rate.
 Timber, paloverde and ironwood.
 Undergrowth, greasewood and sage.

Subdivision of T. 1 N., R. 5 W.

Chains

- N.0°12'W., bet. secs. 13 and 14,
over level land, through scattering timber and dense
undergrowth.
- 5.00 Draw, course SE.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$ in N.,
S 13 in E., and
S 14 in W. half; and
1915 in S. rim;
dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.,
and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.
- 63.00 Draw, course SW.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in
the ground, for cor. of secs. 11, 12, 13 and 14, with
brass cap, marked
T 1 N S 11 in NW.,
R 5 W S 12 in NE.,
S 13 in SE., and
S 14 in SW. quadrant; and
1915 in S. rim;
and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.
- Land, level.
Soil, 2nd rate.
Timber, paloverde and ironwood.
Undergrowth, greasewood and sage.
-
- East, on a random line, bet. secs. 12 and 13.
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 80.26 Intersect E. bdy. of Tp. 32 lks. N. of the reestablished
cor. of secs. 7, 12, 13 and 18, on 1st. G. M. W., des-
cribed in Book "A."
- Thence N.89°46'W., on a true line, bet. secs. 12 and 13,
over level land, through scattering timber and dense
undergrowth.
- 3.25 Road bears NW. and SE.
- 40.13 Point for $\frac{1}{4}$ sec. cor., falls in wash, course SE.; there-
fore at
- 39.26 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for witness cor. to $\frac{1}{4}$ sec. cor., with brass cap,
marked
 $\frac{1}{4}$ S 12 in N.,
S 13 in S., and
WC in W. half; and
1915 in S. rim;
dig pits, 18x18x12 ins., E. and W. of cor., 3 ft. dist.,
and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
N. of cor.
- 41.25 Wash, course SE.
- 76.25 Draw, course SW.
- 80.26 The cor. of secs. 11, 12, 13 and 14.
Land, level.
Soil, 2nd rate.
Timber, ironwood and paloverde.
Undergrowth, greasewood and sage.
-
- N.0°12'W., bet. secs. 11 and 12,
over level land, through scattering timber and dense
undergrowth.
- 39.50 Draw, course SE.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

Subdivision of T. 1 N., R. 5 W.

Chains

$\frac{1}{4}$ in N.,
 S 11 in W., and
 S 12 in E. half; and
 1915 in S. rim;
 and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.
 70.00 Wash, course SE.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 1, 2, 11 and 12, with brass
 cap, marked
 T 1 N S 2 in NW.,
 R 5 W S 1 in NE.,
 S 12 in SE., and
 S 11 in SW. quadrant; and
 1915 in S. rim;
 and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.
 Land, level.
 Soil, 2nd rate.
 Timber, ironwood and paloverde.
 Undergrowth, greasewood and sage.

East, on a random line, bet. secs. 1 and 12.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.18 Intersect E. bdy. of Tp. 36 lks. N. of the reestablished
 cor. of secs. 1, 6, 7 and 12, on 1st G. M. W., described
 in Book "A."

Thence N. $89^{\circ}45'$ W., on a true line, bet. secs. 1 and 12,
 over level land, through scattering timber and dense
 undergrowth.
 40.09 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$ S 1 in N., and
 S 12 in S. half; and
 1915 in S. rim;
 dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.,
 and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
 N. of cor.

56.20 Wash, 100 lks. wide, course SE.
 80.18 The cor. of secs. 1, 2, 11 and 12.
 Land, level.
 Soil, 1st rate.
 Timber, ironwood and paloverde.
 Undergrowth, greasewood and sage.

N. $0^{\circ}12'$ W., on a random line, bet. secs. 1 and 2.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.70 Intersect N. bdy. of Tp. 10 lks. E. of the cor. of secs.
 1, 2, 35 and 36, described in Book "B."

Thence S. $0^{\circ}16'$ E., on a true line, bet. secs. 1 and 2,
 over level land, through scattering timber and dense
 undergrowth.
 39.70 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$ in N.,
 S 1 in E., and
 S 2 in W. half; and
 1915 in S. rim;
 and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.

79.70 The cor. of secs. 1, 2, 11 and 12.
 Land, level.
 Soil, 2nd rate.
 Timber, ironwood and paloverde.
 Undergrowth, greasewood and sage.

Chains

- From the reestablished standard cor. of secs. 34 and 35,
on the S. bdy. of Tp., (G. and S. R. Base Line)
described in Book "A,"
- N.0°12'W., bet. secs. 34 and 35,
over level land, through scattering timber and dense
undergrowth.
- 4.00 Wash, course SE.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$ in N.,
S 34 in W., and
S 35 in E. half; and
1915 in S. rim;
dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.,
and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 26, 27, 34 and 35, with brass
cap, marked
T 1 N S 27 in NW.,
R 5 W S 26 in NE.,
S 35 in SE., and
S 34 in SW. quadrant; and
1915 in S. rim;
dig pits, 18x18x12 ins., in each sec., $5\frac{1}{2}$ ft. dist.,
and raise a mound of earth, 4 ft. base, 2 ft. high,
W. of cor.
Land, level.
Soil, 1st rate.
Timber, paloverde.
Undergrowth, greasewood, mesquite and sage.
-
- 40.00 East, on a random line, bet. secs. 26 and 35.
Set temp. $\frac{1}{4}$ sec. cor.
- 80.18 Intersect N. and S. line 20 lks. S. of the cor. of secs.
25, 26, 35 and 36.
- Thence S.89°51'W., on a true line, bet. secs. 26 and 35,
over level land, through scattering timber and dense
undergrowth.
- 5.70 Draw, course SE.
- 40.09 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$ S 26 in N., and
S 35 in S. half; and
1915 in S. rim;
dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.,
and raise a mound of earth, 2 ft. base, $1\frac{1}{2}$ ft. high,
N. of cor.
- 41.90 Road bears SE. and NW.
- 60.00 Hassayampa River, (dry) 6 chs. wide, course S.
- 80.18 The cor. of secs. 26, 27, 34 and 35.
Land, level.
Soil, 1st and 2nd rate.
Timber, paloverde.
Undergrowth, greasewood and mesquite.
-
- N.0°12'W., bet. secs. 26 and 27,
over level land, through scattering timber, and dense
undergrowth.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$ in N.,
S 26 in E., and
S 27 in W. half; and
1915 in S. rim;

Subdivision of T. 1 N., R. 5 W.

Chains Dig pits 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth 3½ ft. base, 1½ ft. high, W. of cor.

60.00 Hassayampa River, (dry), 2½ chs. wide, course SE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 22, 23, 26 and 27, with brass cap, marked

T 1 N S 22 in NW.,
R 5 W S 23 in NE.,
S 26 in SE., and
S 27 in SW. quadrant; and
1915 in S. rim;

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, level.
Soil, 1st rate.
Timber, paloverde.
Undergrowth, greasewood, sage and mesquite.

40.00 East, on a random line, bet. secs. 23 and 26.

80.08 Set temp. ¼ sec. cor.
Intersect N. and S. line 18 lks. S. of the cor. of secs. 23, 24, 25 and 26.

Thence S. 89° 52' W., on a true line, bet. secs. 23 and 26, over level land, through scattering timber and dense undergrowth.

12.00 Draw, course SW.

37.00 Draw, course S.

40.04 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

¼ S 23 in N., and
S 26 in S. half; and
1915 in S. rim;

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

64.80 Road bears NW. and SE.

71.50 Wash, course S.

76.00 Wash, course S.

80.08 The cor. of secs. 22, 23, 26 and 27.

Land, level.
Soil, 1st and 2nd rate.
Timber, paloverde and ironwood.
Undergrowth, greasewood, mesquite and sage.

N. 0° 12' W., bet. secs. 22 and 23, over level land, through scattering timber and dense undergrowth.

6.00 Wash, course SE.

14.50 Wash, course SE.

39.90 Road bears NW. and SE.

40.00 Point for ¼ sec. cor. falls at location where it is impracticable to set same; therefore at

40.25 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for witness cor. to ¼ sec. cor., with brass cap, marked

¼ in N.,
S 22 in W.,
S 23 in E., and
WC in S. half; and
1915 in S. rim;

dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, 3½ ft. base, 1½ ft. high, W. of cor.

66.00 Low spur extends W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 14, 15, 22 and 23, with brass cap, marked

Chains

T 1 N S 15 in NW.,
R 5 W S 14 in NE.,
S 23 in SE., and
S 22 in SW. quadrant; and
1915 in S. rim;

and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.

Land, level.

Soil, 1st and 2nd rate.

Timber, paloverde and ironwood.

Undergrowth, greasewood, sage and mesquite.

East, on a random line, bet. secs. 14 and 23.

40.00 Set temp. ¼ sec. cor.

79.96 Intersect N. and S. line 44 lks. S. of the cor. of secs.
13, 14, 23 and 24.

Thence S.89°41'W., on a true line, bet. secs. 14 and 23,
over level land, through scattering timber and dense
undergrowth.

7.00 Road bears NW. and SE.

20.00 Draw, course S.

39.98 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for ¼ sec. cor., with brass cap, marked

¼ S 14 in N., and
S 23 in S. half; and
1915 in S. rim;

and raise a mound of stone, 2 ft. base, 1½ ft. high,
N. of cor.

41.00 Wash, course SE.

50.00 Wash, course S.

79.96 The cor. of secs. 14, 15, 22 and 23.

Land, level.

Soil, 1st and 2nd rate.

Timber, paloverde and ironwood.

Undergrowth, greasewood, mesquite and sage.

N.0°12'W., bet. secs. 14 and 15,
over broken desert, through scattering timber, and dense
undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for ¼ sec. cor., with brass cap, marked

¼ in N.,
S 14 in E., and
S 15 in W. half; and
1915 in S. rim;

dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.,
and raise a mound of earth, 3½ ft. base, 1½ ft. high,
W. of cor.

45.00 Wash, 50 lks. wide, course SE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 10, 11, 14 and 15, with brass
cap, marked

T 1 N S 10 in NW.,
R 5 W S 11 in NE.,
S 14 in SE., and
S 15 in SW. quadrant; and
1915 in S. rim;

and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.

Land, broken.

Soil, rocky; 2nd and 3rd rate.

Timber, mesquite, catclaw and paloverde.

Undergrowth, greasewood and sage.

Subdivision of T. 1 N., R. 5 W.

Chains	
40.00	East, on a random line, bet. secs. 11 and 14.
80.00	Set temp. $\frac{1}{4}$ sec. cor.
	Intersect N. and S. line 15 lks. S. of the cor. of secs. 11, 12, 13 and 14.
	Thence S. $89^{\circ}54'$ W., on a true line, bet. secs. 11 and 14, over nearly level desert, through scattering timber and dense undergrowth.
32.80	Road bears N. and S.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
	$\frac{1}{4}$ S 11 in N., and
	S 14 in S. half; and
	1915 in S. rim;
	dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
	and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
	N. of cor.
80.00	The cor. of secs. 10, 11, 14 and 15.
	Land, nearly level.
	Soil, gravelly; 2nd rate.
	Timber, catclaw, mesquite and paloverde.
	Undergrowth, greasewood and sage.

	N. $0^{\circ}12'$ W., bet. secs. 10 and 11,
	over rolling land, through scattering timber and dense undergrowth,
15.00	Draw, course SW.
33.00	Same draw, course SE.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
	$\frac{1}{4}$ in N.,
	S 10 in W., and
	S 11 in E. half; and
	1915 in S. rim;
	and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
	W. of cor.
60.00	Draw, course E.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 2, 3, 10 and 11, with brass cap, marked
	T 1 N S 3 in NW.,
	R 5 W S 2 in NE.,
	S 11 in SE., and
	S 10 in SW. quadrant; and
	1915 in S. rim;
	and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
	W. of cor.
	Land, rolling.
	Soil, 3rd rate.
	Timber, paloverde and ironwood.
	Undergrowth, greasewood and sage.

40.00	East, on a random line, bet. secs. 2 and 11.
79.94	Set temp. $\frac{1}{4}$ sec. cor.
	Intersect N. and S. line 12 lks. S. of the cor. of secs. 1, 2, 11 and 12.
	Thence S. $89^{\circ}55'$ W., on a true line, bet. secs. 2 and 11, over level land, through scattering timber and dense undergrowth.
2.50	Draw, course SE.
37.55	Road bears N. and S.
39.97	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
	$\frac{1}{4}$ S 2 in N., and
	S 11 in S. half; and
	1915 in S. rim;

Chains

- dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.,
and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
N. of cor.
- 70.00 Wash, course S.
79.94 The cor. of secs. 2, 3, 10 and 11.
Land, level.
Soil, 2nd rate.
Timber, ironwood and paloverde.
Undergrowth, greasewood and sage.
-
- N.0°12'W., on a random line, bet. secs. 2 and 3.
40.00 Set temp. $\frac{1}{4}$ sec. cor.
79.90 Intersect N. bdy. of Tp. 18 lks. E. of the cor. of secs.
2, 3, 34 and 35, described in Book "B."
- Thence S.0°20'E., on a true line, bet. secs. 2 and 3,
over rolling land, through scattering timber and dense
undergrowth.
- 11.90 Draw, course SW.
39.90 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$ in N.,
S. 2 in E., and
S. 3 in W. half; and
1915 in S. rim;
and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.
- 79.90 The cor. of secs. 2, 3, 10 and 11.
Land, rolling.
Soil, 3rd rate.
Timber, ironwood and paloverde.
Undergrowth, greasewood and sage.
-
- From the reestablished standard cor. of secs. 33 and 34,
on S. bdy. of Tp. (G. and S. R. Base Line) des-
cribed in Book "A,"
- N.0°13'W., bet. secs. 33 and 34,
over level land, through dense undergrowth.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$ in N.,
S. 33 in W., and
S. 34 in E. half; and
1915 in S. rim;
dig pits, 18x18x12 ins. N. and S. of post, 3 ft. dist.,
and raise a mound of earth, $3\frac{1}{2}$ ft. Base, $1\frac{1}{2}$ ft. high,
W. of cor.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 27, 28, 33 and 34, with brass
cap, marked
T 1 N S 28 in NW.,
R 5 W S 27 in NE.,
S 34 in SE., and
S 33 in SW. quadrant; and
1915 in S. rim;
dig pits, 18x18x12 ins., in each sec., $5\frac{1}{2}$ ft. dist.,
and raise a mound of earth, 4 ft. base, 2 ft. high,
W. of cor.
Land, level.
Soil, 1st rate.
No timber.
Undergrowth, greasewood and sage.
-

Subdivision of T. 1 N., R. 5 W.

11

Chains	
40.00	East, on a random line, bet. secs. 27 and 34.
80.16	Set temp. $\frac{1}{4}$ sec. cor.
	Intersect N. and S. line 2 lks. S. of the cor. of secs.
	26, 27, 34 and 35.
	Thence S. $89^{\circ}59'$ W., on a true line, bet. secs. 27 and 34, over level land, through dense undergrowth.
15.15	Wash, course S.
40.08	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
	$\frac{1}{4}$ S 27 in N., and
	S 34 in S. half; and
	1915 in S. rim;
	and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
50.15	Draw, course SE.
64.15	Road bears N. and S.
80.16	The cor. of secs. 27, 28, 33 and 34.
	Land, level.
	Soil, 1st rate.
	No timber.
	Undergrowth, greasewood and mesquite.

	N. $0^{\circ}13'$ W., bet. secs. 27 and 28, over level land, through scattering timber and dense undergrowth.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
	$\frac{1}{4}$ in N.,
	S 27 in E., and
	S 28 in W. half; and
	1915 in S. rim;
	dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
75.00	Road bears NW. and SE.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 21, 22, 27 and 28, with brass cap, marked
	T 1 N S 21 in NW.,
	R 5 W S 22 in NE.,
	S 27 in SE., and
	S 28 in SW. quadrant; and
	1915 in S. rim;
	dig pits, 18x18x12 ins., in each sec., $5\frac{1}{2}$ ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.
	Land, level.
	Soil, 2nd rate.
	Timber, paloverde and ironwood.
	Undergrowth, greasewood and sage.

	East, on a random line, bet. secs. 22 and 27.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.00	Intersect N. and S. line 2 lks. S. of the cor. of secs. 22, 23, 26 and 27.
	Thence S. $89^{\circ}59'$ W., on a true line, bet. secs. 22 and 27, over level land, through scattering timber and dense undergrowth.
14.00	Hassayampa River, (dry), 3 chs. wide, course SE.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
	$\frac{1}{4}$ S 22 in N. and
	S 27 in S. half; and
	1915 in S. rim;
	dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,

Chains

N. of cor.
 55.00 Draw, course SE.
 77.00 Draw, course SE.
 80.00 The cor. of secs. 21, 22, 27 and 28.
 Land, level.
 Soil, 1st and 2nd rate.
 Timber, paloverde and ironwood.
 Undergrowth, greasewood, mesquite and sage.

N.0°13'W., bet. secs. 21 and 22,
 over level desert, through scattering timber and dense
 undergrowth.
 36.00 Windmill bears N.22°45'E.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$ in N.,
 S 21 in W., and
 S 22 in E. half; and
 1915 in S. rim;
 and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
 W. of cor.
 62.60 Windmill bears N.46°45'E.
 78.00 Road bears E. and W.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 15, 16, 21 and 22, with brass
 cap, marked
 T 1 N S 16 in NW.,
 R 5 W S 15 in NE.,
 S 22 in SE., and
 S 21 in SW. quadrant; and
 1915 in S. rim;
 and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
 W. of cor.
 Land, level.
 Soil, gravelly; 2nd and 3rd rate.
 Timber, mesquite and catclaw.
 Undergrowth, greasewood and sage.

East, on a random line, bet. secs. 15 and 22.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.34 Intersect N. and S. line 24 lks. N. of the cor. of secs.
 14, 15, 22 and 23.
 Thence N.89°50'W., on a true line, bet. secs. 15 and 22,
 over rolling desert, through dense timber and under-
 growth.
 31.35 Dry bed of Hassayampa River, 4 chs. wide, course S.
 40.17 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$ S 15 in N., and
 S 22 in S. half; and
 1915 in S. rim;
 dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.,
 and raise a mound of earth, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high,
 N. of cor.
 59.35 Road bears NW. and SE.
 61.25 Windmill bears N., 100 lks. dist.
 62.35 Small reservoir bears S., 100 lks. dist.
 80.34 The cor. of secs. 15, 16, 21 and 22.
 Land, rolling.
 Soil, gravelly; 2nd rate.
 Timber, paloverde, mesquite and catclaw.
 Undergrowth, greasewood.

Subdivision of T. 1 N., R. 5 W.

Chains

N.0°13'W., bet. secs. 15 and 16,
 over slightly broken level desert, through dense timber
 and undergrowth.

25.85 Road bears NW. and SE.
 36.65 Road bears NE. and SW.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$ in N.,
 S 15 in E., and
 S 16 in W. half; and
 1915 in S. rim;
 dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.,
 and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 9, 10, 15 and 16, with brass
 cap, marked
 T 1 N S 9 in NW.,
 R 5 W S 10 in NE.,
 S 15 in SE., and
 S 16 in SW. quadrant; and
 1915 in S. rim;
 dig pits, 18x18x12 ins., in each sec., $5\frac{1}{2}$ ft. dist., and
 raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.
 Land, slightly broken level desert.
 Soil, rocky; 2nd and 3rd rate.
 Timber, mesquite and catclaw.
 Undergrowth, greasewood.

East, on a random line, bet. secs. 10 and 15.

40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.02 Intersect N. and S. line 24 lks. N. of the cor. of secs.
 10, 11, 14 and 15.
 Thence N.89°50'W., on a true line, bet. secs. 10 and 15.
 Over broken desert, through dense timber and undergrowth.
 Wash, 20 lks. wide, course S.
 6.52 Dry bed of Hassayampa river, 4 chs. wide, course S.
 31.52
 40.01 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$ S 10 in N., and
 S 15 in S. half; and
 1915 in S. rim;
 dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.,
 and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
 N. of cor.

77.52 Road brs. N. and S.
 80.02 The cor. of secs. 9, 10, 15 and 16.
 Land, broken.
 Soil, gravelly; 1st and 2nd rate.
 Timber, mesquite.
 Undergrowth, greasewood.

N.0°13'W., bet. secs. 9 and 10,
 over level desert, through scattering timber and dense
 undergrowth.

28.50 Road bears N.20°W. and S.20°E.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$ in N.,
 S 9 in W., and
 S 10 in E. half; and
 1915 in S. rim;
 dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.,
 and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.

14

Subdivision of T 1 N., R. 5 W.

Chains


- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 3, 4, 9 and 10, with brass cap, marked
 T 1 N S 4 in NW.,
 R 5 W S 3 in NE.,
 S 10 in SE., and
 S 9 in SW. quadrant; and
 1915 in S. rim;
 dig pits, 18x18x12 ins., in each sec., 5½ ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.
 Land, level.
 Soil, gravelly; 1st and 2nd rate.
 Timber, mesquite and catclaw.
 Undergrowth, greasewood and sage.
-
- 40.00 East, on a random line, bet. secs. 3 and 10.
 Set temp. ¼ sec. cor.
- 80.28 Intersect N. and S. line 10 lks. N. of the cor. of secs. 2, 3, 10 and 11.
- 40.14 Thence N.89°56'W., on a true line, bet. secs. 3 and 10, over broken desert, through fairly dense timber and undergrowth.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked
 ¼ S 3 in N., and
 S 10 in S. half; and
 1915 in S. rim;
 dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, 3½ ft. base, 1½ ft. high, N. of cor.
- 61.80 Dry bed of Hassayampa River, 3 chs. wide, course S.
- 80.28 The cor. of secs. 3, 4, 9 and 10.
 Land, broken.
 Soil, gravelly; 2nd and 3rd rate.
 Timber, mesquite, paloverde and catclaw.
 Undergrowth, greasewood.
-
- 40.00 N.0°13'W., on a random line, bet. secs. 3 and 4.
 Set temp. ¼ sec. cor.
- 79.93 Intersect N. bdy. of Tp. 10 lks. W. of the cor. of secs. 3, 4, 33 and 34, described in Book "B."
- 39.93 Thence S.0°09'E., on a true line, bet. secs. 3 and 4, over level desert, through scattering timber and dense undergrowth.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked
 ¼ in N.,
 S 3 in E., and
 S 4 in W. half; and
 1915 in S. rim;
 dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, 3½ ft. base, 1½ ft. high, W. of cor.
- 77.90 Wash, 20 lks. wide, course SE.
- 79.93 The cor. of secs. 3, 4, 9 and 10.
 Land, level.
 Soil, gravelly; 1st and 2nd rate.
 Timber, paloverde, catclaw and mesquite.
 Undergrowth, greasewood and sage.
-

Subdivision of T. 1 N., R. 5 W.

Chains	
	<p>From the reestablished standard cor. of secs. 32 and 33, on S. bdy. of Tp. (G. and S. R. Base Line) described in Book "A,"</p>
23.70	<p>N.0°13'W., bet. secs. 32 and 33, over level desert, through scattering timber and dense undergrowth.</p>
40.00	<p>Phoenix-California road bears NW. and SE. Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked</p>
	<p>$\frac{1}{4}$ in N., S 32 in W., and S 33 in E. half; and 1915 in S. rim; dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.</p>
80.00	<p>Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 28, 29, 32 and 33, with brass cap, marked</p>
	<p>T 1 N S 29 in NW., R 5 W S 28 in NE., S 33 in SE., and S 32 in SW. quadrant; and 1915 in S. rim; dig pits, 18x18x12 ins., in each sec., $5\frac{1}{2}$ ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor. Land, level. Soil, 1st rate. Timber, mesquite. Undergrowth, greasewood and sage.</p>
40.00	<p>East, on a random line, bet. secs. 28 and 33. Set temp. $\frac{1}{4}$ sec. cor.</p>
80.26	<p>Intersect N. and S. line at the cor. of secs. 27, 28, 33 and 34.</p>
40.13	<p>Thence West, on a true line, bet. secs. 28 and 33, over slightly rolling desert, through scattering timber and dense undergrowth.</p>
	<p>Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked $\frac{1}{4}$ S 28 in N., and S 33 in S. half; and 1915 in S. rim; dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.</p>
80.26	<p>The cor. of secs. 28, 29, 32 and 33. Land, slightly rolling. Soil, gravelly; 1st and 2nd rate. Timber, mesquite. Undergrowth, greasewood and sage.</p>
40.00	<p>N.0°13'W., bet. secs. 28 and 29, over slightly rolling desert, through dense undergrowth.</p>
	<p>Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked $\frac{1}{4}$ in N., S 28 in E., and S 29 in W. half; and 1915 in S. rim; dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.</p>

Chains


80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 20, 21, 28 and 29, with brass cap, marked
 T 1 N S 20 in NW.,
 R 5 W S 21 in NE.,
 S 28 in SE., and
 S 29 in SW. quadrant; and
 1915 in S. rim;
 dig pits, 18x18x12 ins., in each sec., 5 1/2 ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.
 Land, slightly rolling.
 Soil, gravelly; 1st and 2nd rate.
 Timber, none.
 Undergrowth, greasewood and sage.



40.00 East, on a random line, bet. secs. 21 and 28.
 Set temp. 1/4 sec. cor.
 80.20 Intersect N. and S. line 12 lks. N. of the cor. of secs. 21, 22, 27 and 28.

Thence N. 89° 55' W., on a true line, bet. secs. 21 and 28, over level desert, through scattering timber and dense undergrowth,
 .90 Road bears N. and S.
 40.10 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked
 1/4 S 21 in N., and
 S 28 in S. half; and
 1915 in S. rim;
 dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

80.20 The cor. of secs. 20, 21, 28 and 29.
 Land, level.
 Soil, gravelly; 1st and 2nd rate.
 Timber, mesquite.
 Undergrowth, greasewood and sage.



N. 0° 13' W., bet. secs. 20 and 21, over level land, through scattering timber and dense undergrowth.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked
 1/4 in N.,
 S 20 in W., and
 S 21 in E. half; and
 1915 in S. rim;
 dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 16, 17, 20 and 21, with brass cap, marked
 T 1 N S 17 in NW.,
 R 5 W S 16 in NE.,
 S 21 in SE., and
 S 20 in SW. quadrant; and
 1915 in S. rim;
 dig pits, 18x18x12 ins., in each sec., 5 1/2 ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.
 Land, level.
 Soil, gravelly; 1st and 2nd rate.
 Timber, catclaw and mesquite.
 Undergrowth, greasewood and sage.



Subdivision of T. 1 N., R. 5 W.

Chains

40.00 East, on a random line, bet. secs. 16 and 21.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.04 Intersect N. and S. line at the cor. of secs. 15, 16, 21
 and 22.

Thence West, on a true line, bet. secs. 16 and 21,
 over nearly level desert, through scattering timber and
 dense undergrowth.

14.00 Road bears NE. and SW.

40.02 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$ S 16 in N., and
 S 21 in S. half; and
 1915 in S. rim;
 dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.,
 and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
 N. of cor.

80.04 The cor. of secs. 16, 17, 20 and 21.
 Land, nearly level desert.
 Soil, gravelly; 1st and 2nd rate.
 Timber, mesquite and catclaw.
 Undergrowth, greasewood and sage.

N.0°13'W., bet. secs. 16 and 17,
 over level desert, through scattering timber and dense
 undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$ in N.,
 S 16 in E., and
 S 17 in W. half; and
 1915 in S. rim;

dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.,
 and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 8, 9, 16 and 17, with brass
 cap, marked

T 1 N S 8 in NW.,
 R 5 W S 9 in NE.,
 S 16 in SE., and
 S 17 in SW. quadrant; and
 1915 in S. rim;

dig pits, 18x18x12 ins., in each sec., $5\frac{1}{2}$ ft. dist., and
 raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, level.
 Soil, gravelly; 1st and 2nd rate.
 Timber, paloverde, mesquite and catclaw.
 Undergrowth, greasewood.

40.00 East, on a random line, bet. secs. 9 and 16.
 Set a temp. $\frac{1}{4}$ sec. cor.

80.18 Intersect N. and S. line 12 lks. S. of the cor. of secs.
 9, 10, 15 and 16.

Thence S.89°55'W., on a true line, bet. secs. 9 and 16,
 over broken desert, through scattering timber and dense
 undergrowth.

40.09 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ S 9 in N., and
 S 16 in S. half; and
 1915 in S. rim;

dig pits, 18x18x12 ins., E. and W. of cor., 3 ft. dist.,
 and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
 N. of cor.

Chains

80.18 The cor. of secs. 8, 9, 16 and 17.
 Land, broken.
 Soil, rocky; 2nd and 3rd rate.
 Timber, paloverde, mesquite and catclaw.
 Undergrowth, greasewood and sage.

N.0°13'W., bet. secs. 8 and 9,
 over level desert, through scattering timber and dense
 undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$ in N.,
 S 8 in W., and
 S 9 in E. half; and
 1915 in S. rim;
 dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.,
 and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 4, 5, 8 and 9, with brass cap,
 marked
 T 1 N S 5 in NW.,
 R 5 W S 4 in NE.,
 S 9 in SE., and
 S 8 in SW. quadrant; and
 1915 in S. rim;
 dig pits, 18x18x12 ins., in each sec., $5\frac{1}{2}$ ft. dist., and
 raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.
 Land, level.
 Soil, gravelly; 1st and 2nd rate.
 Timber, mesquite and catclaw.
 Undergrowth, greasewood.

40.00 East, on a random line, bet. secs. 4 and 9.
 Set temp. $\frac{1}{4}$ sec. cor.

80.18 Intersect N. and S. line 24 lks. S. of the cor. of secs.
 3, 4, 9 and 10.

Thence S.89°50'W., on a true line, bet. secs. 4 and 9,
 over level desert, through scattering timber and dense
 undergrowth.

7.65 Road bears N. and S.
 40.09 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$ S 4 in N., and
 S 9 in S. half; and
 1915 in S. rim;
 and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 N. of cor.

80.18 The cor. of secs. 4, 5, 8 and 9.
 Land, level.
 Soil, gravelly; 1st and 2nd rate.
 Timber, paloverde, mesquite and catclaw.
 Undergrowth, greasewood.

40.00 N.0°13'W., on a random line, bet. secs. 4 and 5.
 Set temp. $\frac{1}{4}$ sec. cor.

80.06 Intersect N. bdy. of Tp. 16 lks. W. of the cor. of secs.
 4, 5, 32 and 33, described in Book "B."

Thence S.0°06'E., on a true line, bet. secs. 4 and 5,
 over level desert, through scattering timber and dense
 undergrowth.

Subdivision of T. 1 N., R. 5 W.

19

Chains

- 40.06 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$ in N.,
 S 4 in E., and
 S 5 in W. half; and
 1915 in S. rim;
 dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.,
 and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.
- 80.06 The cor. of secs. 4, 5, 8 and 9.
 Land, level.
 Soil, gravelly; 2nd rate.
 Timber, paloverde, mesquite and catclaw.
 Undergrowth, greasewood.
-
- From reestablished standard cor. of secs. 31 and 32, on S. bdy.
 of Tp. (G. & S. R. Base line), described in Book "A,"
 N. $0^{\circ}14'$ W., bet. secs. 31 and 32,
 over level desert, through dense timber and undergrowth.
- 12.30 Road bears E. and W.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$ in N.,
 S 31 in W., and
 S 32 in E. half; and
 1915 in S. rim;
 dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.,
 and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.
- 73.30 Phoenix-California road bears NW. and SE.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 29, 30, 31 and 32, with brass cap, marked
 T 1 N S 30 in NW.,
 R 5 W S 29 in NE.,
 S 32 in SE., and
 S 31 in SW. quadrant; and
 1915 in S. rim;
 dig pits, 18x18x12 ins., in each sec., $5\frac{1}{2}$ ft. dist., and
 raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.
 Land, level.
 Soil, gravelly; 1st and 2nd rate.
 Timber, mesquite.
 Undergrowth, greasewood.
-
- East, on a random line, bet. secs. 29 and 32,
 Set temp. $\frac{1}{4}$ sec. cor.
- 40.00
- 80.00 Intersect N. and S. line 12 lks. N. of the cor. of secs.
 28, 29, 32 and 33.
- Thence N. $89^{\circ}55'$ W., on a true line, bet. secs. 29 and 32,
 over level desert, through scattering timber and dense
 undergrowth.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$ S 29 in N., and
 S 32 in S. half; and
 1915 in S. rim;
 dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.,
 and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
 N. of cor.
- 68.00 Old road bears N/ and S.
- 78.50 Wash, 60 lks. wide, course S.
- 80.00 The cor. of secs. 29, 30, 31 and 32.
 Land, level.
 Soil, gravelly; 1st and 2nd rate.
 Timber, mesquite.
 Undergrowth, greasewood and sage.

Chains

- West, on a random line, bet. secs. 30 and 31.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.78 Intersect W. bdy. of Tp. 30 lks. S. of the cor. of secs. 25, 30, 31 and 36, which is an iron post, 3 ins. diam., with brass cap, marked, set and witnessed as described by the surveyor general.
- Thence S. $89^{\circ}47'E.$, on a true line, bet. secs. 30 and 31, over slightly rolling desert, through scattering timber and dense undergrowth.
 39.78 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$ S 30 in N., and
 S 31 in S. half; and
 1915 in S. rim;
 dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
- 51.80 Road bears NW. and SE.
 63.80 Phoenix-California road bears NW. and SE.
 79.78 The cor. of secs. 29, 30, 31 and 32.
 Land, slightly rolling desert.
 Soil, gravelly; 1st and 2nd rate.
 Timber, mesquite and catclaw.
 Undergrowth, greasewood and sage.
-
- N. $0^{\circ}14'W.$, bet. secs. 29 and 30, over slightly rolling desert, through dense timber and undergrowth.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$ in N.,
 S 29 in E., and
 S 30 in W. half; and
 1915 in S. rim;
 dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 19, 20, 29 and 30, with brass cap, marked
 T 1 N S 19 in NW.,
 R 5 W S 20 in NE.,
 S 29 in SE., and
 S 30 in SW. quadrant; and
 1915 in S. rim;
 and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 Land, slightly rolling.
 Soil, gravelly; 1st and 2nd rate.
 Timber, paloverde, mesquite and catclaw.
 Undergrowth, greasewood and sage.
-
- East, on a random line, bet. secs. 20 and 29.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.00 Intersect N. and S. line 16 lks. N. of the cor. of secs. 20, 21, 29 and 29.
- Thence N. $89^{\circ}53'W.$, on a true line, bet. secs. 20 and 29, over level desert, through scattering timber and undergrowth.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$ S 20 in N., and
 S 29 in S. half; and
 1915 in S. rim;

Subdivision of T. 1 N., R. 5 W.

Chains

- 80.00 dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, 3½ ft. base, 1½ ft. high, N. of cor.
 The cor. of secs, 19, 20, 29 and 30.
 Land, level.
 Soil, gravelly; 1st and 2nd rate.
 Timber, paloverde and catclaw.
 Undergrowth, greasewood and sage.

- 40.00 N.89°47'W., on a random line, bet. secs. 19 and 30.
 Set temp. ¼ sec. cor.
 79.45 Intersect W. bdy. of Tp. 24 lks. N. of the cor. of secs. 19, 24, 25 and 30, which is an iron post, 3 ins. diam., with brass cap, marked, set and witnessed as described by the surveyor general.
 Thence S.89°57'E., on a true line, bet. secs. 19 and 30. over level land, through scattering timber and undergrowth.
 39.45 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked
 ¼ S 19 in N., and
 S 30 in S. half; and
 1915 in S. rim;
 dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, 3½ ft. base, 1½ ft. high, N. of cor.
 70.50 Wash, 60 lks. wide, course S.
 79.45 The cor. of secs. 19, 20, 29 and 30.
 Land, level.
 Soil, 2nd rate.
 Timber, mesquite and catclaw.
 Undergrowth, greasewood and sage.

- N.0°14'W., bet. secs. 19 and 20,
 over level land, through scattering timber and dense undergrowth.
 38.20 Wash, 20 lks. wide, course SW.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked
 ¼ in N.,
 S 20 in E., and
 S 19 in W. half; and
 1915 in S. rim;
 dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, 3½ ft. base, 1½ ft. high, W. of cor.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 17, 18, 19 and 20, with brass cap, marked
 T 1 N S 18 in NW.,
 R 5 W S 17 in NE.,
 S 20 in SE., and
 S 19 in SW. quadrant; and
 1915 in S. rim;
 dig pits, 18x18x12 ins., in each sec., 5½ ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.
 Land, level.
 Soil, gravelly; 1st and 2nd rate.
 Timber, paloverde, mesquite and catclaw.
 Undergrowth, greasewood and sage.

Chains

East, on a random line, bet. secs. 17 and 20.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.10 Intersect N. and S. line 2 lks. N. of the cor. of secs.
 16, 17, 20 and 21.

Thence N.89°59'W., on a true line, bet. secs. 17 and 20,
 over slightly rolling desert, through scattering timber
 and dense undergrowth.
 40.05 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$ S 17 in N., and
 S 20 in S. half; and
 1915 in S. rim;
 dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.,
 and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
 N. of cor.

62.90 Wash, 20 lks. wide, course S.10°W.
 80.10 The cor. of secs. 17, 18, 19 and 20.
 Land, slightly rolling.
 Soil, gravelly; 2nd rate.
 Timber, paloverde, catclaw and mesquite.
 Undergrowth, greasewood and sage.

 West, on a random line, bet. secs. 18 and 19,
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.03 Intersect W. bdy. of Tp. 5 lks. S. of the cor. of secs.
 13, 18, 19 and 24, which is an iron post, 3 ins. diam.,
 with brass cap, marked, set and witnessed as described
 by the surveyor general.

Thence S.89°58'E., on a true line, bet. secs. 18 and 19,
 over level desert, through scattering timber and dense
 undergrowth.
 25.50 Wash, 20 lks. wide, course SE.
 39.03 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$ S 18 in N., and
 S 19 in S. half; and
 1915 in S. rim;
 dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.,
 and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
 N. of cor.

40.50 Wash, 60 lks. wide, course S.
 79.03 The cor. of secs. 17, 18, 19 and 20.
 Land, level.
 Soil, gravelly; 1st and 2nd rate.
 Timber, mesquite and catclaw.
 Undergrowth, greasewood and sage.

 N.0°14'W., bet. secs. 17 and 18,
 over level desert, through scattering timber and dense
 undergrowth.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$ in N.,
 S 17 in E., and
 S 18 in W. half; and
 1915 in S. rim;
 dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.,
 and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 7, 8, 17 and 18, with brass
 cap, marked
 T 1 N S 7 in NW.,
 R 5 W S 8 in NE.,

Subdivision of T. 1 N., R. 5 W.

Chains

S 17 in SE., and
 S 18 in SW. quadrant; and
 1915 in S. rim;
 dig pits, 18x18x12 ins., in each sec., 5½ ft. dist., and
 raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.
 Land, level.
 Soil, gravelly; 1st and 2nd rate.
 Timber, paloverde and catclaw.
 Undergrowth, greasewood.

East, on a random line, bet. secs. 8 and 17.
 40.00 Set temp. ¼ sec. cor.
 80.06 Intersect N. and S. line at the cor. of secs. 8, 9, 16 and
 17.

Thence West, on a true line, bet. secs. 8 and 17,
 over level desert, through scattering timber and dense
 undergrowth.
 40.03 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for ¼ sec. cor., with brass cap, marked
 ¼ S 8 in N., and
 S 17 in S. half; and
 1915 in S. rim;
 and raise a mound of stone, 2 ft. base, 1½ ft. high,
 N. of cor.

80.06 The cor. of secs. 7, 8, 17 and 18.
 Land, level.
 Soil, gravelly; 2nd rate.
 Timber, paloverde, catclaw and mesquite.
 Undergrowth, greasewood.

West, on a random line, bet. secs. 7 and 18.
 40.00 Set temp. ¼ sec. cor.
 78.80 Intersect W. bdy. of Tp. 20 lks. S. of the cor. of secs.
 7, 12, 13 and 18, which is an iron post, 3 ins. diam.,
 with brass cap, marked, set and witnessed as described
 by the surveyor general.

Thence S.89°51'E., on a true line, bet. secs. 7 and 18,
 over level desert, through scattering timber and dense
 undergrowth.
 38.80 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for ¼ sec. cor., with brass cap, marked
 ¼ S 7 in N., and
 S 18 in S. half; and
 1915 in S. rim;
 dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.,
 and raise a mound of earth, 3½ ft. base, 1½ ft. high,
 N. of cor.

54.10 Wash, 60 lks. wide, course S.
 78.80 The cor. of secs. 7, 8, 17 and 18.
 Land, level desert, slightly broken.
 Soil, gravelly; 1st and 2nd rate.
 Timber, mesquite, paloverde and catclaw.
 Undergrowth, greasewood and sage.

N.0°14'W., bet. secs. 7 and 8,
 over level desert, through scattering timber and dense
 undergrowth.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for ¼ sec. cor., with brass cap, marked
 ¼ in N.,
 S 7 in W.,

24

Subdivision of T. 1 N., R. 5 W.

Chains

- S 8 in E. half, and
1915 in S. rim;
dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.,
and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.
- 60.00 Wash, 40 lks. wide, course SW.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 5, 6, 7 and 8, with brass cap,
marked
- T 1 N S 6 in NW.,
R 5 W S 5 in NE.,
S 8 in SE., and
S 7 in SW. quadrant; and
1915 in S. rim;
dig pits, 18x18x12 ins., in each sec., $5\frac{1}{2}$ ft. dist., and
raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.
Land, nearly level.
Soil, gravelly; 1st and 2nd rate.
Timber, mesquite and paloverde and catclaw.
Undergrowth, greasewood and sage.
-
- East, on a random line, bet. secs. 5 and 8.
40.00 Set temp. $\frac{1}{4}$ sec. cor.
80.00 Intersect N. and S. line 12 lks. S. of the cor. of secs.
4, 5, 8 and 9.
- Thence S. $89^{\circ}55'$ W., on a true line, bet. secs. 5 and 8,
over slightly broken desert, through scattering timber
and dense undergrowth.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$ S 5 in N., and
S 8 in S. half; and
1915 in S. rim;
dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.,
and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
N. of cor.
- 69.00 Wash, 20 lks. wide, course SW.
80.00 The cor. of secs. 5, 6, 7 and 8.
Land, slightly broken.
Soil, gravelly; 2nd rate.
Timber, paloverde, catclaw and mesquite.
Undergrowth, greasewood and sage.
-
- West, on a random line, bet. secs. 6 and 7.
40.00 Set temp. $\frac{1}{4}$ sec. cor.
78.35 Intersect W. bdy. of Tp. 30 lks. S. of the cor. of secs.
1, 6, 7 and 12, which is an iron post, 3 ins. diam.,
with brass cap, marked, set and witnessed as described
by the surveyor general.
- Thence S. $89^{\circ}47'$ E., on a true line, bet. secs. 6 and 7,
over slightly broken desert, through scattering timber and
dense undergrowth.
- 38.35 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$ S 6 in N., and
S 7 in S. half; and
1915 in S. rim;
dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.,
and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
N. of cor.
- 78.35 The cor. of secs. 5, 6, 7 and 8.
Land, slightly rolling-- Soil, 1st and 2nd rate.
Timber, paloverde, mesquite and catclaw.
Undergrowth, greasewood and sage.
-

Chains

- 40.00 N.0°14'W., on a random line, bet. secs. 5 and 6.
- Set temp. $\frac{1}{4}$ sec. cor.
- 80.18 Intersect N. bdy. of Tp. at cor. of secs. 5, 6, 31 and 32,
described in Book "B."

- Thence S.0°14'E., on a true line, bet. secs. 5 and 6,
over slightly broken desert, through scattering timber
and dense undergrowth.
- 40.18 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$ in N.,
S 5 in E., and
S 6 in W. half; and
1915 in S. rim;
dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.,
and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.
- 80.18 The cor. of secs. 5, 6, 7 and 8.
Land, slightly broken.
Soil, gravelly; 2nd rate.
Timber, paloverde and catclaw.
Undergrowth, greasewood and sage.

GENERAL DESCRIPTION.

This township consists of practically level land, with southerly drainage. The Hassayampa River, normally dry, runs across the township from north to south.

The soil is of fair quality, but owing to lack of moisture, produces nothing but such growth as paloverde, mesquite, catclaw, greasewood, ironwood, sage and cactus.

With the exception of a cabin and windmill in section 36, and a windmill north, with a small reservoir south of the line between sections 15 and 22, there is no evidence of settlers or permanent water.

SUBDIVISIONS OF
TOWNSHIP 1 NORTH, RANGE 5 WEST.

DATE DIAGRAM.

Accepted survey.

4-21-15	4-21-15	4-21-15	4-21-15	4-20-15	4-20-15
6	5	4	3	2	1
4-22-15	4-22-15	4-23-15	4-23-15	4-23-15	4-17-15
4-22-15	4-22-15	4-23-15	4-23-15	4-23-15	4-17-15
7	8	9	10	11	12
4-22-15	4-22-15	4-22-15	4-20-15	4-20-15	4-20-15
4-22-15	4-22-15	4-22-15	4-20-15	4-20-15	4-17-15
18	17	16	15	14	13
4-22-15	4-21-15	4-21-15	4-20-15	4-20-15	4-19-15
4-22-15	4-21-15	4-21-15	4-20-15	4-20-15	4-17-15
19	20	21	22	23	24
4-19-15	4-19-15	4-20-15	4-20-15	4-19-15	4-17-15
4-19-15	4-19-15	4-20-15	4-20-15	4-19-15	4-17-15
30	29	28	27	26	25
4-19-15	4-19-15	4-19-15	4-19-15	4-17-15	4-17-15
4-19-15	4-19-15	4-19-15	4-19-15	4-17-15	4-17-15
31	32	33	34	35	36
4-17-15	4-17-15	4-17-15	4-17-15	4-16-15	4-16-15
4-17-15	4-17-15	4-17-15	4-17-15	4-16-15	4-16-15

First Guide Meridian West.
Resurveyed.

Gila and Salt River Base Line.

Lines dated in black were surveyed by Woodbury Abbey,
U. S. Surveyor.
Lines dated in red were surveyed by Roy J. Gill,
U.S. Transitman.

CERTIFICATES

For ~~FINAL OATH~~ OF UNITED STATES SURVEYOR.
AND UNITED STATES TRANSITMAN,
See Book "C,"

30
ECCN 3051

I, _____, U. S. Surveyor, do solemnly swear that, in pursuance of special instructions received from the U. S. Surveyor General for _____ bearing date of the _____ day of _____, 191 _____, I have well, faithfully, and truly, in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of _____

_____ of the _____ Meridian, in the State of _____, which are represented in the foregoing field notes as having been executed by me, and under my direction; and I do further solemnly swear that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General for _____ and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

U. S. Surveyor.

Subscribed by said _____, and sworn to before me }
this _____ day of _____, 191 _____ }



APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,
Phoenix, Arizona, JUL 20 1918

The foregoing field notes of the survey of the _____
Subdivision Lines
of
TOWNSHIP 1 NORTH, RANGE 5 WEST,

of the Gila and Salt River Base and Meridian, in the State of Arizona,
executed by Woodbury Abbey, U.S. Surveyor & Roy J. Gill, U. S. Transitman, under his special instructions dated December 12, 1914, for Group 39, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Frank D. Smith
U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above-described surveys in _____ has been correctly copied from the original notes on file in this office.