

3094

Book "A"

4-679

BOOK 3094

JAN 5 1918

FEB 10 1918

FIELD NOTES

RE-
OF THE SURVEY OF THE

NORTH BOUNDARY OF

TOWNSHIP 25 NORTH, RANGE 6 EAST,

and

SURVEY of the WEST and NORTH BOUNDARIES

and

SUBDIVISION LINES

of

TOWNSHIP 26 NORTH, RANGE 6 EAST,

Of the Gila and Salt River Base and Meridian,

In the State of Arizona.

EXECUTED BY

Thomas B. Matthews, U. S. Surveyor,

and

Deane J. Wolff, U. S. Transitman,

~~In the capacity of U. S. Surveyor~~, under instructions dated March 8,, 1915,
issued by the United States Surveyor General to govern surveys included in
Group No. 55, which were approved by the Commissioner of the General Land
Office, December 14,, 1915.

Resurvey and Survey commenced April 30,, 1916.

Resurvey and Survey completed May 9,, 1916.

Executed under Assignment
Instructions dated Apr. 13 & 22, 1916.

3094

3094

✓

1A

3094


Book "A"






Group 55 - - - - Arizona.

Township 26 North, Range 6 East.

BOOK 3094

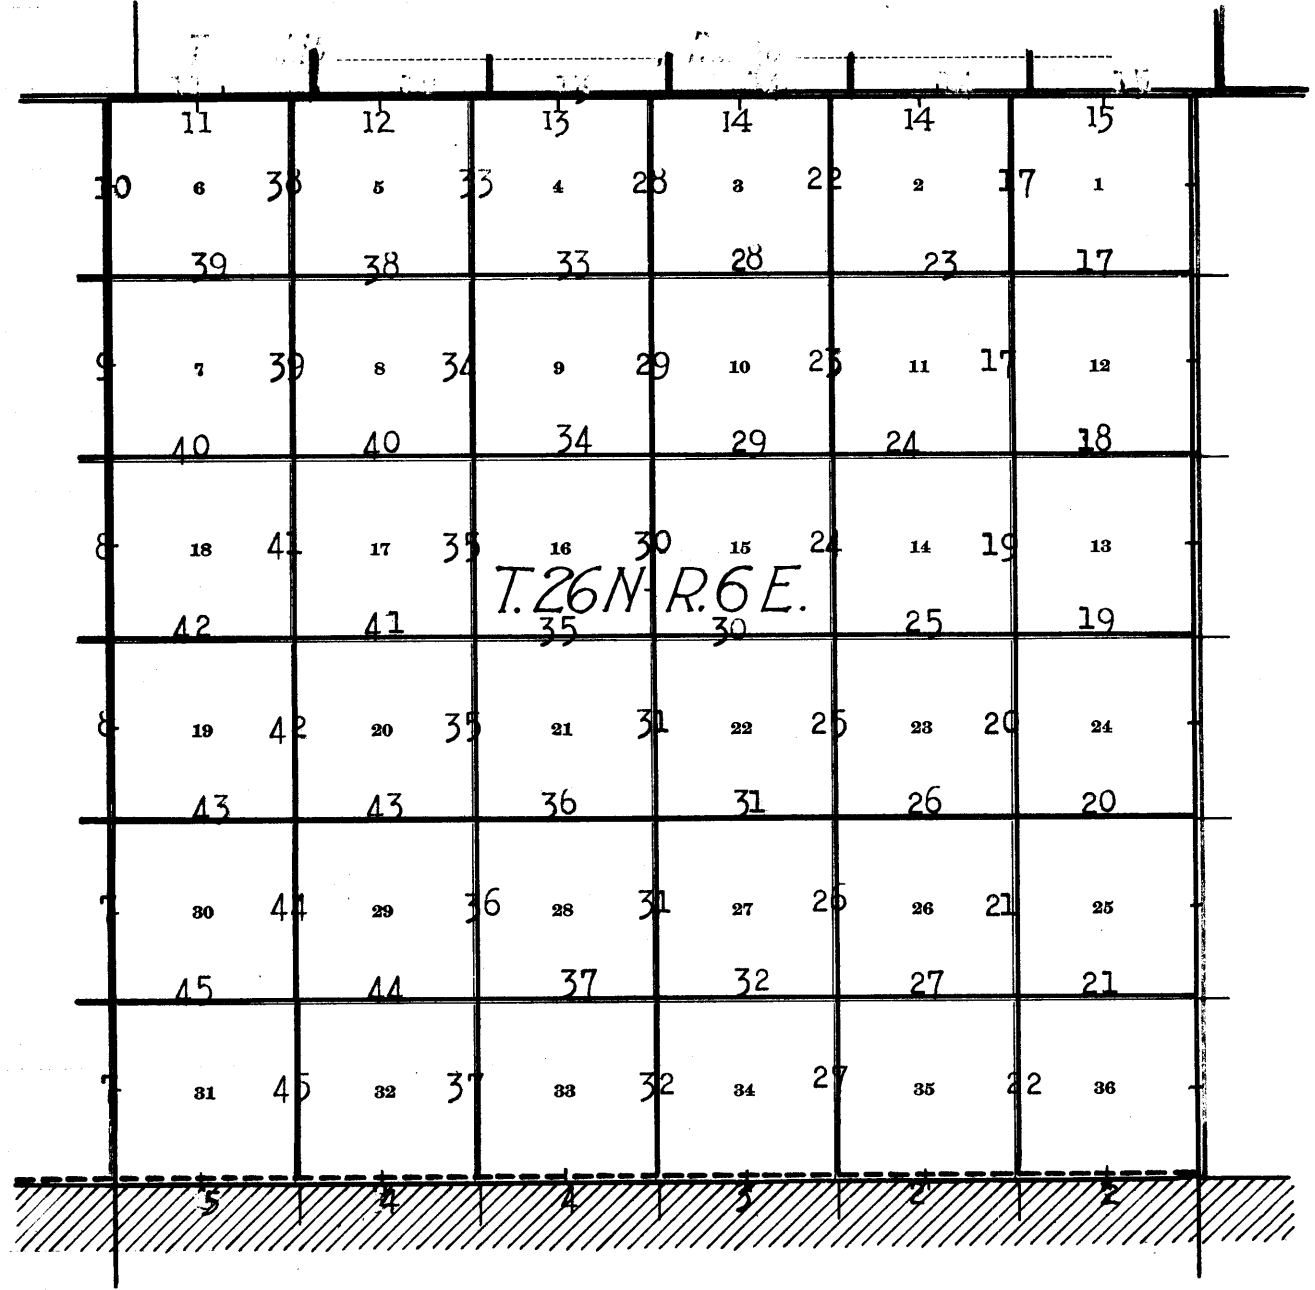INDEX DIAGRAM.



-  Lines surveyed under this group.
-  Lines resurveyed under this group.
-  Lines surveyed under current Group 66.
-  Accepted surveys.
-  Areas surveyed as per accepted plats on file.

Resurvey of the N. bdy. of Township 25 North, Range 6 East,
 Survey of the W. and N. bdrs. of Township 26 North, Range 6 East,
 Subdivision of Township 26 North, Range 6 East.

Chains. Resurveys and surveys hereinafter described, executed on dates shown on diagram on page 47 hereof, by Thomas B. Matthews, U. S. Surveyor, and Deane J. Wolff, U. S. Transitman, using Buff and Buff Transit No. 10124, and Young and Sons' light mountain transit No. 8535, respectively, each instrument being equipped with Smith solar attachment. The horizontal limb of each instrument is provided with two double verniers, placed opposite to each other, reading to single minutes of arc, which is also the least count of the verniers of the latitude and declination arcs.

The instruments were tested on the true meridian at Phoenix, Arizona, found correct, and were approved by the Assistant Supervisor of Surveys for Arizona and California, conditional upon satisfactory field tests, Feb. 3, 1916.

In the subdivision of this township, and all other lines of this group, 5-chain tapes were used, slope angles were read on uneven and sloping ground, and the correct horizontal distance was computed for each item of topography.

We examine the adjustments of the transits, and correct all errors; then, to test each solar apparatus, by comparing its indications resulting from solar observations made during a.m. and p.m. hours, with a meridian determined by observations on Polaris, we proceed as follows:

At our camp, in the NW. cor. of sec. 36, T. 26 N., R. 6 E. in lat. $35^{\circ} 36\frac{1}{2}' N.$; long. $111^{\circ} 43' W.$, at 8 h. 30 m. a.m., l.m.t., we set off $35^{\circ} 36\frac{1}{2}' N.$ on each lat. arc; $14^{\circ} 49' N.$ on each decl. arc, and determine a meridian with each solar, and mark the lines thus determined by tacks driven in stakes set in the ground, 5 chs. N. of our stations.

At 4 h. 0 m., p.m., l.m.t., we set off $35^{\circ} 36\frac{1}{2}' N.$ on the lat. arcs; $14^{\circ} 55' N.$ on the decl. arcs, and determine a meridian with each solar. The lines thus determined coincide with the lines determined by a.m. observations.

April 30, 1916.

May 1, 1916.

At 4 h. 50 m. a.m., l.m.t., by our watches, which are set to correct local mean time, we observe Polaris at eastern elongation, in accordance with the Manual of Instructions, and mark the lines thus determined by tacks driven in stakes, set in the ground, 5 chs. N. of our stations.

At 7 h. 30 m., a.m., l.m.t., we lay off the azimuth of Polaris, $1^{\circ} 24'$ to the west; the lines determined by a.m. and p.m. solar observations coincide with these lines.

The solar apparatus by a.m. and p.m. observations, define positions for meridians which coincide with the true meridian determined by observations on Polaris at elongation; therefore, we conclude that the adjustments of the instrument are satisfactory.

2. Resurvey of the N. bdy. of Township 25 North, Range 6 East.

Chains.

From the original cor. of Ts. 25 and 26 N., Rs. 6 and 7 E., which is a malpais stone, 9x6x10 ins. above ground, loosely set in a mound of stone, marked and witnessed as described by the surveyor general,

N. 89° 55' W., on a true line, along the N. bdy. of T. 25 N., R. 6 E. N. of sec. 1.

39.88 Over gently rolling land, thru scattering undergrowth. Intersect the $\frac{1}{4}$ sec. cor., which is a limestone, 12x6x6 ins. above ground, firmly set, marked and witnessed as described by the surveyor general. Change this cor. to refer to sec. 1 only by moving the mound from its position north of the cor. to a similar position S. of the cor.

Thence,

N. 89° 19' W., on a true line, on N. bdy. of sec. 1' (W. $\frac{1}{2}$).

0.12 Over gently rolling land, thru scattering undergrowth. (40.00 chs. from the original cor. of Ts. 25 and 26 N., Rs. 6 and 7 E.) Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground, in a mound of stone, for reestablished $\frac{1}{4}$ sec. cor. of sec. 36, marked on brass cap,

$\frac{1}{4}$ S36

1916

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

Continue line and measurement.

27.60 Ravine, course NE.

39.84 Intersect the original cor. of secs. 1, 2, 35 and 36, which is a malpais stone, 12x6x9 ins. above ground, loosely set, marked and witnessed as described by the surveyor general. Change this cor. to refer to secs. 1 and 2 only by moving the mound of stone from its position W. of the cor. to a similar position S. of the cor.

Land, gently rolling.

Soil, shallow, loam and rocky, 3rd rate.

No timber.

Undergrowth, scattering sage brush, 6 to 14 ins. high.

Scattering growth of grass.

From the reestablished cor. of secs. 1 and 2,

N. 89° 48' W., on a true line, on the N. bdy. of sec. 2.

0.28 Over gently rolling land, thru scattering undergrowth. (80.00 chs. from the original cor. of Ts. 25 and 26 N., Rs. 6 and 7 E.) Set an iron post, 3 ft. long, 3 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 35 and 36, marked on brass cap,

T26N R6E
S35 | S36

1916

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

Continue line and measurement.

6.70 Dry ditch, 10 lks. wide, 2 ft. deep, course NE.

40.19 Intersect the original $\frac{1}{4}$ sec. cor., which is a limestone, 10x6x7 ins. above ground, firmly set, marked and witnessed as described by the surveyor general. Change this cor. to refer to sec. 2 only, by moving the mound of stone from its position W. of the cor. to a similar position S. of the cor.

Thence,

N. 89° 04' W., on a true line, on N. bdy. of sec. 2 (W. $\frac{1}{2}$).

0.09 Over gently rolling land, thru scattering undergrowth. (40.00 chs. from the reestablished cor. of secs. 35 and 36), Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 35, marked on brass cap,

Resurvey of N. bdy. of Township 25 North, Range 6 East. 3.

Chains.

S35
1916

- 30.10 and raise a mound of stone 2 ft. base, 1½ ft. high, N. of cor. Road brs. NE. to Beasley Lake, and SW. to Cedar Springs Ranch.
- 39.10 Wire fence brs. N. and S.
- 39.36 Set an iron post 3 ft. long, 3 ins. in diam., 24 ins. in the ground, for witness cor. to reestablished cor. of secs. 2 and 3, marked on brass cap,

T26N R6 E
S35
 WC
 S 3 | S 2
 T25N
 1916

- 39.51 and raise a mound of stone, 2 ft. base, 1½ ft. high, S. of cor.
- Intersect the true point for reestablished cor. of secs. 2 and 3 midway and on line, between the ¼ sec. cors. of secs. 2 and 3, falls in old stock tank. Diligent search in this vicinity failed to reveal any trace of the original cor. of secs. 2, 3, 34 and 35.
- Land, gently rolling.
- Soil, coarse sandy loam, and rocky, 3rd rate.
- No timber.
- undergrowth, scattering sage brush.
- Scattering growth of grass.

 From the true point for reestablished cor. of secs. 2 and 3, N. 89° 04' W., on a true line, along N. bdy. of sec. 3, T. 25 N., R. 6 E.

- Over level land, thru. scattering undergrowth.
- 0.58 True point for reestablished cor. of secs. 34 and 35.
- 1.10 Wire fence brs. N. and S.
- 1.68 (81.10 chs. -- 81.09 chs. westing -- from the reestablished cor. of secs. 35 and 36), set an iron post 3 ft. long, 3 ins. in diam., 24 ins. in the ground, for witness cor. to reestablished cor. of secs. 34 and 35, marked on brass cap,

T26N R 6E
S34 | S35 WC
 S 3
 T25N
 1916

- and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
- Continue line and measurement.
- 39.51 Intersect the original ¼ sec. cor. which is a lava stone, 10x5x6 ins. above ground, firmly set, marked and witnessed as described by the surveyor general. Change this cor. to refer to sec. 3 only, by moving the mound of stone from its position N. of the cor. to a similar position S. of the cor.

Thence,
 S. 88° 56' W., on a true line, on N. bdy. of sec. 3, (W. ½).

- Over level land, thru. scattering low undergrowth.
- 1.09 (40.01 chs. -- 40.00 chs. westing -- from the true point for reestablished cor. of secs. 34 and 35), set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished ¼ sec. cor. of sec. 34, marked on brass cap,

S34
 1916

- and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
- Continue line and measurement.
- 37.18 Intersect the original cor. of secs. 3, 4, 33 and 34, which is a limestone, 12x9x8 ins. above ground, loosely set in a mound of stone, marked and witnessed as described by

4. Resurvey of the N. bdy. of Township 25 North, Range 6 East.

Chains.

the surveyor general, Change this cor. to refer to secs. 3 and 4 only, by moving the mound of stone from its position W. of the cor. to a similar position S. of the cor.

Land, level.
Soil, sandy and gravelly, 3rd rate.
No timber.
Undergrowth, scattering sage brush.
Scattering growth of grass.

3.92 From the reestablished cor. of secs. 3 and 4, S. 89° 52' W., on a true line, on N. bdy. of sec. 4. Over level land, thru. scattering low undergrowth. (80.02 chs. -- 80.00 chs. westing -- from the true point for reestablished cor. of secs. 34 and 35.) Set an iron post, 3 ft. long, 3 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 33 and 34, marked on brass cap,

T26N R6E
S33 | S34
S 4
T25 N
1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

40.09 Continue line and measurement. Intersect the original ¼ sec cor., which is a malpais stone, 9x8x4 ins., above ground, firmly set, marked and witnessed as described by the surveyor general. Change this cor. to refer to sec. 4 only, by moving the mound of stone from its position N. of the cor. to a similar position S. of the cor.

3.83 Thence, S. 89° 44' W., on a true line, on N. bdy. of sec. 4 (W. ½). Over level land, thru. scattering undergrowth. (40.00 chs. from the reestablished cor. of secs. 33 and 34.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished ¼ sec. cor. of sec. 33, marked on brass cap,

¼ S33
1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

38.80 Continue line and measurement. Wash, course NE.
39.97 Intersect the original cor. of secs. 4, 5, 32 and 33, which is a limestone, 10x14x5 ins. above ground, loosely set, marked and witnessed as described by the surveyor general. Change this cor. to refer to secs. 4 and 5 only, by moving the mound of stone from its position W. of the cor. to a similar position S. of the cor.

Land, level.
Soil, sandy and gravelly, 3rd rate.
No timber.
Undergrowth, low scattering sage brush.
Scattering growth of grass.

3.86 From the reestablished cor. of secs. 4 and 5, S. 88° 50' W., on a true line, on N. bdy. of sec. 5. Over level land, thru. scattering undergrowth. (80.00 chs. from the reestablished cor. of secs. 33 and

Chains.

34), set an iron post 3 ft. long, 3 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 32 and 33, marked on brass cap,

T26N R6E
S32 | S33
S 5
T 25 N
1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

Continue line and measurement.

13.45 Ascend 160 ft.

15.35 Edge of rim rock, brs. N. and S. Continue ascent to

15.60 Spur, extends 5 chs. N. Enter scattering timber, brs. N. and S. Descend 65 ft. to

26.85 Draw, course N.

30.45 Draw, course NE. Ascend 215 ft. to

39.30 Intersect the original 1/4 sec. cor. which is a limestone, 20x12x8 ins. above ground, loosely set, marked and witnessed as described by the surveyor general. Change this cor. to refer to sec. 5 only, by destroying the bearing trees north of line, and move the mound of stone from its position N. of the cor. to a similar position S. of the cor.

Thence,

S. 89° 42' W., on a true line, on N. bdy. of sec. 5 (W. 1/2). Over gently rolling land, through scattering timber and undergrowth.

4.57 (40.01 chs. -- 40.00 chs. westing -- from the reestablished cor. of secs. 32 and 33), set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground, in a mound of stone, for reestablished 1/4 sec. cor. of sec. 32, marked on brass cap,

1/4 S32
1916

from which,

A pinon, 14 ins. in diam., brs. N. 41° E., 153 lks. dist., marked 1/4 S32BT.

A pinon, 6 ins. in diam., brs. N. 39 1/2° W., 161 lks. dist., marked 1/4 S32BT.

Continue line and measurement.

39.85 Intersect the original cor. of secs. 5, 6, 31 and 32, which is a limestone, 7x6x6 ins. above ground, firmly set, marked and witnessed, as described by the surveyor general. Change this cor. to refer to secs. 5 and 6 only, by destroying the bearing tree N. of line, and moving the mound of stone from its position W. of the cor. to a similar position S. of the cor.

Land, rolling.

Soil, poor and thin loam, rocky, 3rd rate.

Timber, scattering cedar and pine.

Undergrowth, scattering sage brush.

Scattering growth of grass.

From the reestablished cor. of secs. 5 and 6, S. 87° 22' W., on a true line, on N. bdy. of sec. 6. Over slightly rolling land, thru. scattering timber.

4.72 (80.01 chs. -- 80.00 chs. westing -- from the reestablished cor. of secs. 32 and 33), set an iron post, 3 ft. long, 3 ins. in diam., 16 ins. in the ground, in a mound of stone, for reestablished cor. of secs. 31 and 32, marked on brass cap,

6. Resurvey of the N. bdy. of Township 25 North, Range 6 East.

Chains.

T26N R6E
S31 | S32S 6
T25N
1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

Continue line and measurement.

29.70 Draw, course N. Ascend 40 ft. to

36.70 Top of ascent; thence over level land.

39.65 Intersect the original $\frac{1}{4}$ sec. cor., which is a limestone, 7x6x4 ins. above ground, firmly set, marked and witnessed as described by the surveyor general. Change this cor. to refer to sec. 6 only, by moving the mound of stone from its position north of the cor. to a similar position S. of the cor.

Thence,

S. $89^{\circ} 52'$ W., on a true line, on N. bdy. of sec. 6 (W. $\frac{1}{2}$).
Over slightly rolling land, thru scattering timber.

5.12 (40.05 chs.--40.00 chs. westing--from the reestablished cor. of secs. 31 and 32), set an iron post, 3 ft. long, 1 in. in diam., 15 ins. in the ground, in a mound of stone, for reestablished $\frac{1}{4}$ sec. cor. of sec. 31, marked on brass cap,

$\frac{1}{4}$ S31

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

Continue line and measurement.

46.28 Intersect the original cor. of Ts. 25 and 26 N., Rs. 5 and 6 E. which is a malpais stone, 20x18x16 ins. above ground, firmly set, marked as described by the surveyor general, but unwitnessed. I raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, S. of cor.

Land, rolling and level.

Soil, sandy and gravelly.

Timber, scattering cedar and pinon.

Undergrowth, scattering sage brush.

Scattering growth of grass.


Survey of the W. bdy. of T. 26 N., R. 6 E.

Chains.

40.00 From the cor. of Tps. 25 and 26 N., Rs. 5 and 6 E., which is a malpais stone, 20 X 18 X 16 ins. above ground, hereinbefore described.
North bet. secs. 31 and 36.
Over level land, through scattering timber.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap




And raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.
43.37 Small draw, course NE. Old road, brs. NE. and SW.
56.75 Rim rock, brs. NE. and SW. Desc. 30 ft. to
59.96 Bottom of canyon, course NE.
62.56 Rim rock, 10 ft. high, brs. NE. and SW.
71.61 Small draw, course SE. Asc. 50 ft. to
77.92 Top of rim rock, brs. E. and W.
80.00 Set an iron post, 3 ft. long, 3 ins. diam., on bed rock, in a mound of stone, for cor. of secs. 25, 30, 31 and 36, marked on brass cap



From which
A pinion, 10 ins. diam., brs. N.9° E., 177 lks. dist., marked T26N R6E S30 BT.
A cedar, 6 ins. diam., brs. S.32 $\frac{1}{2}$ ° E., 35 lks. dist., marked T26N R6E S31 BT.
A pinion, 12 ins. diam., brs. S.48 $\frac{1}{4}$ ° W., 83 lks. dist., marked T26N R5E S36 BT.
A pinion, 10 ins. diam., brs. N.37° W., 149 lks. dist., marked T26N R5E S25 BT.
Land, level and rolling.
Soil, coarse texture; malpais and limestone on surface; 3rd rate.
Timber, scattering cedarr and pinion.
Thin grass.

4.00 North bet. secs. 25 and 30.
8.30 Over rolling land, through timber.
12.57 Head of small draw, course SE.
19.97 Edge of rim, brs. NE. and SW. Desc. 35 ft. to
28.93 Small draw, course NE. Asc. 30 ft. to
33.90 Top of point, slopes SE. Desc. 50 ft. to
40.00 Small draw, course SE. Asc. 40 ft.
Edge of rim, brs. E. and W. Thence over level land.
Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



From which
A pinion, 9 ins. diam., brs. N. 8° E., 109 lks. dist., marked $\frac{1}{4}$ S30 BT.
A pinion, 4 ins. diam., brs. N.50° W., 69 lks. dist., marked $\frac{1}{4}$ S25 BT.

Survey of the W. bdy. of T. 26 N., R. 6 E.

8

Chains

48.40 Edge of rim, brs. NW. and SE. Desc. 70 ft. to
 53.20 Draw, 30 lks. wide, 2 ft. deep, course SE. Asc. 205 ft.
 67.85 Rim rock, brs. E. and W. Continue ascent.
 80.00 Set an iron post, 3 ft. long, 3 ins. diam., 8 ins. in the
 ground, in a mound of stone, for cor. of secs. 19, 24,
 25 and 30, marked on brass cap

| | |
|------|-----|
| T26N | |
| R5E | R6E |
| S24 | S19 |
| S25 | S30 |
| 1916 | |

And raise a mound of stone, 3 ft. base, 3 ft. high, W.
 of cor.
 Land, rolling.
 Soil, coarse and rocky; 3rd rate.
 Timber, scattering cedar and pinion.
 Fair grass.

1.99 North bet. secs. 19 and 24.
 9.99 Over rolling land, through scattering undergrowth.
 19.71 Top of butte. Thence along W. slope to
 21.36 Desc. 150 ft. to
 34.71 Foot of hill; thence over level land.
 40.00 Small draw, course NE.
 Enter timber, brs. E. and W.
 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the
 ground, in a mound of stone, for sec. cor., marked
 on brass cap

| | |
|---------------|-----|
| $\frac{1}{4}$ | |
| S24 | S19 |
| 1916 | |

From which
 A pinion, 20 ins. diam., brs. N.68° E., 14 lks. dist.,
 marked $\frac{1}{4}$ S19 BT.
 A pinion, 18 ins. diam., brs. N.67° W., 31 lks. dist.,
 marked $\frac{1}{4}$ S24 BT.
 80.00 Leave timber, enter prairie, brs. E. and W.
 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the
 ground, for cor. of secs. 13, 18, 19 and 24, marked on
 brass cap

| | |
|------|-----|
| T26N | |
| R5E | R6E |
| S13 | S18 |
| S24 | S19 |
| 1916 | |


And raise a mound of stone, 3 ft. base, 3 ft. high, W.
 of cor.
 Land, gently rolling and hilly.
 Soil, coarse texture; malpais and limestone on surface;
 3rd rate.
 Timber, scattering cedar and pinion.
 Thin grass.

40.00 North bet. secs. 13 and 18.
 Over slightly rolling land, through scattering timber and
 undergrowth.
 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the
 ground, for sec. cor.

Survey of the W. bdy. of T. 26 N., R. 6 E.

Chains.


ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap



And raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.

66.60 Edge of rim, 5 ft. high, brs. NE. and SW. Desc. 75 ft. to

80.00 Set an iron post, 3 ft. long, 3 ins. diam., 26 ins. in the ground, for cor. of secs. 7, 12, 13 and 18, marked on brass cap



And raise a mound of stone, 2 ft. base, 2 ft. high, W. of cor.


Land, slightly rolling.
Soil, coarse texture; limestone on surface; 3rd rate.
Timber, scattering cedar and pinion.
Undergrowth, sagebrush and holly.
Thin grass.

North bet. secs. 7 and 12.
Over level land, through scattering timber and undergrowth.
1.40 Old wagon road, brs. NE. and SW., in bottom of wide draw, course NE. Asc. 35 ft. to

13.07 Top of low ridge, brs. NE. and SW. Desc. very gradually to

24.95 Bottom of wide draw, course SE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap




From which

A pinion, 24 ins. diam., brs. N.29° E., 97 lks. dist., marked $\frac{1}{4}$ S7 BT.

A pinion, 16 ins. diam., brs. N.53° W., 117 lks. dist., marked $\frac{1}{4}$ S12 BT.

80.00 Set an iron post, 3 ft. long, 3 ins. diam., 20 ins. in the ground, in a mound of stone, for cor. of secs. 1, 6, 7 and 12, marked on brass cap



From which

A cedar, 12 ins. diam., brs. S.2° E., 297 lks. dist., marked T26N R6E S17 BT.

A cedar, 8 ins. diam., brs. S.49 $\frac{1}{2}$ ° W., 187 lks. dist., marked T26N R5E S12 BT.

No other trees within limits. Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Land, slightly rolling.


Survey of the W. bdy. of T. 26 N., R. 6 E.

10


Chains.

Soil, coarse texture; limestone on surface; 3rd rate.
Timber, scattering cedar and pinion.
Undergrowth, sagebrush and holly.
Good grass.

40.00 North bet. secs. 1 and 6.
Over slightly rolling land, through scattering timber and undergrowth.
Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



80.00 And raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.
Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of Tps. 26 N., Rs. 5, and 6 E., marked on brass cap



and raise a mound of stone, 3 ft. base, 3 ft. high, S. of cor.
Land, gently rolling.
Soil, coarse texture.
Timber, scattering cedar and pinion.
Undergrowth, sagebrush, 1 ft. high.
Fair grass.

Survey of North Boundary of T. 26 N., R. 6 E.

| Chains. | |
|---------|---|
| | <p>From the cor. of Ts. 26 N., Rs. 6 and 7 E., which is an iron post, 3 ins. diam., marked and witnessed as described in the field notes of current Group 66, and set 10.04 chs. W. of the cor. of Ts. 27 N., Rs. 6 and 7 E., which is also an iron post, properly set, marked and witnessed as described in the field notes of Group 66, West on a random line, along the N. bdy. of T. 26 N., R. 6 E., setting temporary $\frac{1}{4}$ sec. and sec. cors. for the areas N. of line at intervals of 40.00 chs. from the cor. of Ts. 27 N., Rs. 6 and 7 E., and temporary $\frac{1}{4}$ sec. and sec. cors. for the areas S. of line, at intervals of 40.00 chs. from the cor. of Ts. 26 N., Rs. 6 and 7 E., and at 480.33 chs. from the cor. of Ts. 26 N., Rs. 6 and 7 E., fall 1.76 chs. N. of the cor. of Ts. 26 N., Rs. 5 and 6 E., which is an iron post, hereinbefore described. The falling answers to a correction of $0^{\circ} 12'$, or 29 lks. S. per mile, counting from the NE. cor. of the Tp.; therefore</p> <p>N. $89^{\circ} 48'$ E., on a true line, along the N. bdy. of sec. 6, T26N., R. 6 E.</p> <p>Over slightly rolling land, through scattering timber and undergrowth.</p> |
| 11.40 | The cor. of Ts. 27 N., Rs. 5 and 6 E., which is an iron post, described in Book "C". |
| 40.33 | Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 6, marked on brass cap, |
| | <p><u>T26</u> 1916</p> |
| | <p>From which</p> <p>A pinion, 14 ins. diam., brs. N. 31° E., 131 lks. dist., marked $\frac{1}{4}$S31 BT.</p> <p>A cedar, 10 ins. diam., brs. S. 52° W., 38 lks. dist., marked $\frac{1}{4}$S6 BT.</p> |
| 50.37 | (38.97 chs. from the cor. of Ts. 27 N., Rs. 5 and 6 E.) Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 31, marked on brass cap, |
| | <p><u>T27</u> 1916</p> |
| | <p>From which</p> <p>A cedar, 8 ins. diam., brs. S. 85° W., 261 lks. dist., marked $\frac{1}{4}$S6 BT.</p> <p>No other trees within limits. Raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.</p> |
| 54.60 | Old road, brs. NW. and SE. |
| 74.20 | Small draw, course NE. |
| 80.33 | Set an iron post, 3 ft. long, 3 ins. diam., 26 ins. in the ground, for cor. of secs. 5 and 6, T. 26 N., R. 6 E., marked on brass cap |
| | <p>T27N R6E <u>S31</u> S 6 S 5 T26N R6E 1916</p> |
| | <p>From which</p> <p>A cedar, 14 ins. diam., brs. S. 41° E., 120 lks. dist., marked T26N R6E S5 BT.</p> <p>A cedar, 12 ins. diam., brs. S. 39° W., 107 lks. dist., marked T26N R6E S6 BT.</p> <p>Land, slightly rolling.</p> <p>Soil, coarse texture, 12 to 18 ins. deep, limestone on surface.</p> <p>Timber, scrub cedar and pinion.</p> |

12. Survey of North Boundary of T. 26 N., R. 6 E.

Chains.

Undergrowth, broom weed, 1 ft. high.
Fair grass.

4.65
9.64
10.04

N.89° 48' E., on a true line, along the N. bdy. of sec. 5,
T. 26 N., R. 6 E.
Over slightly rolling land, through scattering timber and
undergrowth.
Draw, course NE. Asc. 35 ft. to
Ridge, brs. NE. and SW. Desc. gradually.
(78.97 chs. from the cor. of Ts. 27 N., Rs. 5 and 6 E.)
Set an iron post, 3 ft. long, 3 ins. diam., on bed rock,
in a mound of stone, for cor. of secs. 31 and 32, T.
27 N., R. 6 E., marked on brass cap

| | |
|------|-----|
| T27N | R6E |
| S31 | S32 |
| S 5 | |
| T26N | R6E |
| 1916 | |

21.84
40.00

From which
A cedar, 14 ins. diam., brs. N.22° E., 268 lks. dist.
marked T27N R6E S32 BT.
A pinion, 14 ins. diam., brs. N.23° W., -256 lks. dist.,
marked T27N R6E S31 BT.
Small draw, course NW.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor. of sec. 5, marked on brass cap,

| |
|-------------------|
| $\frac{1}{4}$ S 5 |
| 1916 |

50.04

And raise a mound of stone, 3 ft. base, 3 ft. high,
N. of cor.
(40.00 chs. from the cor. of secs. 31 and 32, T. 27 N., R.
6 E.)
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor. of sec. 32, marked on brass cap,

| |
|-------------------|
| $\frac{1}{4}$ S32 |
| 1916 |

80.00

From which
A pinion, 10 ins. diam., brs. N.79 $\frac{1}{4}$ ° E., 131 lks. dist.,
marked $\frac{1}{4}$ S32 BT.
A pinion, 12 ins. diam., brs. S.62° E., 125 lks. dist.,
marked $\frac{1}{4}$ S5 BT.
Set an iron post, 3 ft. long, 3 ins. diam., 12 ins. in the
ground, in a mound of stone, for cor. of secs. 4 and 5
T. 26 N., R. 6 E., marked on brass cap

| | |
|------|-----|
| T27N | R6E |
| S32 | |
| S 5 | S 4 |
| T26N | R6E |
| 1916 | |

From which
A cedar, 20 ins. diam., brs. S.50° E., 136 lks. dist.,
marked T26N R6E S4 BT.
A pinion, 10 ins. diam., brs. S.58° W., 308 lks. dist.,
marked T26N R6E S5 BT.
Land, slightly rolling.
Soil, coarse texture, 12 to 20 ins. deep, limestone on
surface.
Timber, scattering pinion and cedar.

Survey of North Boundary of T. 26 N., R. 6 E.

Chains.

Undergrowth, sagebrush 1 ft. high.
Fair grass.

7.35 N. 89° 48' E., on a true line, along the N. bdy. of sec. 4,
10.04 T., 26 N., R. 6 E.
Over rolling land, through scattering timber and undergrowth.
Draw, course NE.
(80.00 chs. from the cor. of secs. 31 and 32, T. 27 N., R. 6 E.)
Set an iron post, 3 ft. long, 3 ins. diam., on bed rock, in a mound of stone, for cor. of secs. 32 and 33, T. 27 N., R. 6 E., marked on brass cap

T27N R6E
S32 S33
S 4
T26N R6E
1916

26.20 From which
40.00 A pinion, 14 ins. diam., brs. N. 18° E., 183 lks. dist. marked T27N R6E S33 BT.
A pinion, 10 ins. diam., brs. N. 7° W., 108 lks. dist., marked T27N R6E S32 BT.
Small draw, 1 ch. wide, course NW.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 4, marked on brass cap,

$\frac{1}{4}$ S 4
1916

50.04 And raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.
(40.00 chs. from the cor. of secs. 32 and 33, T. 27 N., R. 6 E.)
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 33, marked on brass cap,

$\frac{1}{4}$ S33
1916

62.35 And raise a mound of stone, 2 ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor.
66.35 Asc. gradually to
78.15 Ridge, brs. NE. and SW. Desc. gradually to
80.00 Small draw, course NE. Asc. to
Ridge, brs. N. and S. Desc. to
Set an iron post, 3 ft. long, 3 ins. diam., 12 ins. in the ground, in a mound of stone, for cor. of secs. 3 and 4, T. 26 N., R. 6 E., marked on brass cap

T27N R6E
S33
S 4 S 3
T26N R6E
1916

From which
A pinion, 14 ins. diam., brs. S. 19° E., 147 lks. dist. marked T26N R6E S3 BT.
A pinion, 12 ins. diam., brs. S. 45° W., 190 lks. dist. marked T26N R6E S4 BT.
Land, rolling and slightly rolling.
Soil, coarse texture, 12 to 20 ins. deep; limestone on surface.
Timber, scattering scrub cedar and pinion.

14. Survey of North Boundary of T. 26 N., R. 6 E.

Chains.

Undergrowth, scattering sagebrush 1 ft. high.
Thin grass.

10.04 N. 89° 48' E., on a true line, along the N. bdy. of sec. 3,
T. 26 N., R. 6 E.
Over rolling land, through scattering timber and undergrowth.
(80.00 chs. from the cor. of secs. 32 and 33, T. 27 N., R.
6 E.)
Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the
ground, for cor. of secs. 33 and 34, T. 27 N., R. 6 E.
marked on brass cap

| | |
|------|-----|
| T27N | R6E |
| S33 | S34 |
| S 3 | |
| T26N | R6E |
| 1916 | |

And raise a mound of stone, 3 ft. base, 3 ft. high, N.
of cor.
11.40 Draw, 1 ch. wide, course NW. Asc. 85 ft. to
20.80 Ridge, brs. NE. and SW.
22.00 Rim rock, brs. NE. and SW. Desc. 265 ft. to
35.00 Foot of desc., brs. NE. and SW. Thence over level land,
across valley, course NE.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor. of sec. 3, marked on brass cap,

| |
|-------------------|
| $\frac{1}{4}$ S 3 |
| 1916 |

And raise a mound of stone, 2 ft. base, 2 ft. high, N.
of cor.
50.04 (40.00 chs. from the cor. of secs. 33 and 34, T. 27 N., R.
6 E.)
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor. of sec. 34, marked on brass cap,

| |
|-------------------|
| $\frac{1}{4}$ S34 |
| 1916 |

And raise a mound of stone, 2 ft. base, 2 ft. high, N.
of cor.
80.00 Set an iron post, 3 ft. long, 3 ins. diam., 26 ins. in the
ground, for cor. of secs. 2 and 3, T. 26 N., R. 6 E.,
marked on brass cap

| | |
|-----------|-----|
| T27N | R6E |
| S34 | |
| S 3 S 2 | |
| T26N | R6E |
| 1916 | |

And raise a mound of stone, 3 ft. base, 3 ft. high, S.
of cor.
Land, level and rolling.
Soil, coarse texture, limestone on surface.
Timber, scattering pinion.
Undergrowth, sagebrush.
Fair grass.


N. 89° 48' E., on a true line, along the N. bdy. of sec. 2,
T. 26 N., R. 6 E.

Survey of North Boundary of T. 26 N., R. 6 E. 15.

Chains.

8.45
10.04

Over slightly rolling land, through scattering undergrowth. Road, brs. NW. to Grand Canyon and SE. to Flagstaff. (80.00 chs. from the cor. of secs. 33 and 34, T. 27 N., R. 6 E.)
Set an iron post, 3 ft. long, 3 ins. diam., 26 ins. in the ground, for cor. of secs. 34 and 35, T. 27 N., R. 6 E., marked on brass cap




27.30
30.05
40.00

And raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.
Road, brs. NE. and SW.
Leave valley, drains NE.
Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, in a mound of stone, for $\frac{1}{4}$ sec. cor. of sec. 2, marked on brass cap,




45.05
50.04

And raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.
Draw, course NW.
(40.00 chs. from the cor. of secs. 34 and 35, T. 27 N., R. 6 E.)
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 35, marked on brass cap,



80.00

And raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.
Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 1 and 2, T. 26 N., R. 6 E., marked on brass cap



And raise a mound of stone, 3 ft. base, 3 ft. high, S. of cor.
Land, slightly rolling.
Soil, coarse texture.
No timber.
Undergrowth, sagebrush 1 ft. high.
Thin grass.

10.04

N. 89° 48' E., on a true line, along the N. bdy. of sec. 1, T. 26 N., R. 6 E.
Over level and gently rolling land, through scattering undergrowth.
(80.00 chs. from the cor. of secs. 34 and 35, T. 27 N., R. 6 E.)
Set an iron post, 3 ft. long, 3 ins. diam., 20 ins. in the ground, in a mound of stone, for cor. of secs. 35 and 36, T. 27 N., R. 6 E., marked on brass cap

16. Survey of North Boundary of T. 26 N., R. 6 E.

Chains.

T27N R6E
S35 S36
S 1
T26N R6E
1916

40.00 And raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 1, marked on brass cap,

$\frac{1}{4}$ S 1
1916

50.04 And raise a mound of stone, 2 ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor.
(40.00 chs. from the cor. of secs. 35 and 36, T. 27 N., R. 6 E.)
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 36, marked on brass cap,

$\frac{1}{4}$ S36
1916

57.40 And raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.
65.00 Small draw, course NE. Asc. 30 ft. to
80.00 Thence over level land.
The cor. of Ts. 26 N., Rs. 6 and 7 E.
Land, level and gently rolling.
Soil, coarse texture, malpais on surface.
No timber.
Undergrowth, sagebrush.
Good grass.

Boundaries of T. 26 N., R. 6 E.

Latitudes, departures and closing errors.

| Line designated. | True bearing. | Dist. chs. | Latitudes. | | Departures. | |
|--------------------|---------------|---------------|------------|------------|-------------|------------|
| | | | N. chs. | S. chs. | E. chs. | W. chs. |
| South Boundary. | N. 89° 55' W. | 39.88 | .06 | | | 39.88 |
| | N. 89° 19' W. | 39.84 | .48 | | | 39.84 |
| | N. 89° 48' W. | 40.19 | .14 | | | 40.19 |
| | N. 89° 04' W. | 79.02 | 1.29 | | | 79.01 |
| | S. 88° 56' W. | 37.18 | | 2.69 | | 37.17 |
| | S. 89° 52' W. | 40.09 | | .09 | | 40.09 |
| | S. 89° 44' W. | 39.97 | | .19 | | 39.97 |
| | S. 88° 50' W. | 39.30 | | .80 | | 39.29 |
| | S. 89° 42' W. | 39.85 | | .21 | | 39.85 |
| | S. 87° 22' W. | 39.65 | | 1.82 | | 39.61 |
| | S. 89° 52' W. | 46.28 | | .11 | | 46.28 |
| West Boundary. | North. | 480.00 | 480.00 | | | |
| North Boundary. | N. 89° 48' E. | 480.33 | 1.68 | | 480.33 | |
| East Boundary. | South. | 480.00 | | 480.00 | | |
| Convergency. | | | | | .52 | |
| Totals. | | | 483.65 | 483.91 | 480.85 | 481.18 |
| | | | | 483.65 | | 480.85 |
| Error in latitude | | | | 0.26 | | |
| Error in departure | | | | | | 0.33 |

Survey of Subdivision of T. 26 N., R. 6 E. 17.

Chains.

40.00 From the cor. of secs. 1 and 2, on the N. bdy. of the Tp., which is an iron post, hereinbefore described, S.0° 1' E., bet. secs. 1 and 2. Over slightly rolling land, through scattering undergrowth. Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap

| | |
|------------------|-----|
| $\frac{1}{4}$ S2 | S 1 |
| 1916 | |

55.00 And raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.
 73.87 Ledge of rock, brs. E. and W. Desc. 120 ft.
 80.00 Babbitt's picket corral brs. W. 4 chs. dist.
 Small draw, course SW.
 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 1, 2, 11 and 12, marked on brass cap

| | |
|------|-----|
| T26N | R6E |
| S 2 | S 1 |
| S11 | S12 |
| 1916 | |

And raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.
 Land, rolling.
 Soil, coarse texture, 12 to 18 ins. deep; malpais stone on surface.
 No timber.
 Undergrowth, scattering short sagebrush.
 Thin grass.

40.00 N.89° 48' E., on a random line, bet. secs. 1 and 12.
 80.03 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect E. bdy. of Tp., 17 lks. N. of the cor. of secs. 1, 6, 7 and 12, which is an iron post, properly set, marked and witnessed as described in the field notes of current Group No. 66.
 Thence
 S.89° 55' W., on a true line, bet. secs. 1 and 12.
 25.00 Over rolling land, through scattering undergrowth.
 35.05 Enter draw, course SE.
 37.00 Center of draw, course SE.
 40.01 $\frac{1}{2}$ Leave draw, course SE. Asc. gradually.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

| |
|-------------------|
| $\frac{1}{4}$ S 1 |
| S12 |
| 1916 |

50.00 And raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.
 65.00 Low ridge, brs. N. and S. Desc. gradually to
 80.03 Small draw, course NW.
 The cor. of secs. 1, 2, 11 and 12.
 Land, rolling.
 Soil, coarse texture, 12 to 18 ins. deep; limestone on surface.
 No timber.
 Undergrowth, scattering sagebrush, 6 to 15 ins. high.
 Thin grass.

S.0° 1' E., bet. secs. 11 and 12.
 Over rolling land, through scattering undergrowth.

18. Survey of Subdivision of Township 26 N., R. 6 E.

chains.

6.00 Asc. slightly to
 Top of ascent; desc. gradually.
 15.00 From this point, Lee's dam brs. W. 6 chs. dist.
 18.58 Small canyon, course SE. Asc. 30 ft. to
 22.25 S. rim of canyon, brs. NW. and SE. Thence over level
 land.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., on bed rock, in
 a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S11 | S12
 1916

And raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.

Asc. 60 ft. to
 48.35 Rocky point, slopes SE. Desc. 15 ft. to
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the
 ground, in a mound of stone, for cor. of secs. 11, 12,
 13 and 14, marked on brass cap

T26N | R6E
 S11 | S12
 S14 | S13
 1916

And raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.

Land, rolling and level.
 Soil, coarse texture, 14 to 18 ins. deep; limestone sub-
 soil.
 No timber.
 Undergrowth, sagebrush 1 ft. high.
 Thin grass.

40.00 N. 89° 55' E., on a random line, bet. secs. 12 and 13.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.00 Intersect E. bdy. of Tp. at the cor. of secs. 7, 12, 13
 and 18, which is an iron post, properly set, marked
 and witnessed as described in the field notes of current
 Group 66.

Thence
 S. 89° 55' W., on a true line, bet. secs. 12 and 13.
 Over rolling and broken land, through scattering under-
 growth.

Asc. gradually to
 2.95 Small rocky point, slopes NW. Desc. 25 ft. to
 5.00 Thence over level land.
 29.30 Rim rock, brs. NE. and SW. Desc. 65 ft. to
 35.00 Asc. 30 ft. to
 38.80 Rocky point, slopes NW. Desc. 50 ft.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S12
 S13
 1916

And raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.

48.95 Small canyon, course NE. Asc. 100 ft. to
 67.00 Rim rock, brs. NW. and SE. Thence over level land.
 80.00 The cor. of secs. 11, 12, 13 and 14.
 Land, level, rolling and broken.
 Soil, coarse texture, 10 to 12 ins. deep.
 Timber, none.
 Undergrowth, sagebrush 1 ft. high.
 Thin grass.

Chains.

S.0° 1' E., bet. secs. 13 and 14.
 Over rolling land, through scattering undergrowth.
 Asc. 25 ft. to
 12.07 Rim of mesa, brs. E. and W. Desc. gradually to
 19.95 Small draw, course SW. Thence over level land.
 36.77 Rim of mesa, brs. NW. and SE. Desc. 115 ft., over rocky
 cliff.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the
 ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on
 brass cap

| | |
|-------------------|-----|
| $\frac{1}{4}$ S14 | S13 |
| 1916 | |

And raise a mound of stone, 3 ft. base, 3 ft. high, W.
 of cor.
 49.90 Foot of cliff, brs. NW. and SE. Thence over level valley.
 66.41 Road, brs. NW. to Grand Canyon and SE. to Flagstaff.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the
 ground, in a mound of stone, for cor. of secs. 13, 14,
 23 and 24, marked on brass cap

| | |
|------|-----|
| T26N | R6E |
| S14 | S13 |
| S23 | S24 |
| 1916 | |

And raise a mound of stone, 3 ft. base, 3 ft. high, W.
 of cor.
 Land, rolling, broken and level.
 Soil, coarse texture, 12 to 18 ins. deep; limestone sub-
 soil.
 No timber.
 Undergrowth, sagebrush 1 ft. high.
 Thin grass.

40.00 N.89° 55' E., on a random line, bet. secs. 13 and 24.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.92 Intersect E. bdy. of Tp., at the cor. of secs. 13, 18, 19
 and 24, which is an iron post, properly set, marked and
 witnessed as described in the field notes of current
 Group 66.
 Thence
 S.89° 55' W., on a true line, bet. secs. 13 and 24.
 Over rolling and broken land, through scattering timber
 and undergrowth.
 Asc. 55 ft.
 1.40 Rim rock, brs. NW. and SE.
 8.75 Rim rock, brs. NW. and SE. Thence across level mesa.
 25.10 Rocky point, slopes N. Desc. 75 ft.
 27.50 Rim rock, brs. N. and S.
 32.00 Small canyon, course N. Asc. gradually, 30 ft. to
 39.96 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the
 ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., marked
 on brass cap

| |
|-------------------|
| $\frac{1}{4}$ S13 |
| S24 |
| 1916 |

From which
 A cedar, 8 ins. diam., brs. N.38° W., 66 lks. dist.,
 marked $\frac{1}{4}$ S13 BT.
 A cedar, 6 ins. diam., brs. S.83 $\frac{1}{2}$ ° W., 131 lks. dist.,
 marked $\frac{1}{4}$ S24 BT.
 45.65 Road, brs. NE. to Flagstaff and SW. to Grand Canyon.
 48.35 Canyon, course NE. Asc. 65 ft.
 52.95 Rim rock, brs. NE. and SW.
 54.95 Rocky point, slopes S. Desc. 35 ft. to

20. Survey of Subdivision of T. 26 N., R. 6 E.

Chains.

59.90 Foot of desc.; thence over level land.
 67.00 Road, brs. NW. to Grand Canyon and SE. to Flagstaff.
 79.92 The cor. of secs. 13, 14, 23 and 24.
 Land, level, rolling and broken.
 Soil, coarse texture, 10 to 18 ins. deep.
 Timber, scattering scrub cedar.
 Undergrowth, holly brush.
 Thin grass.

S.0° 1' E., bet. secs. 23 and 24.
 Over rolling land, through scattering timber and under-
 growth.

7.00 Road, brs. NW. to Grand Canyon and SE. to Beasley's Ranch.
 36.80 Road, brs. NE. to Grand Canyon and SW. to Beasley's Ranch.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S23 | S24
 1916

And raise a mound of stone, 3 ft. base, 3 ft. high, W.
 of cor.

65.00 Rim rock, brs. NW. and SE. Desc. 30 ft. to
 67.87 Small canyon, course NE. Asc. 65 ft. to
 72.65 Rim rock, brs. NE. and SW. Continue ascent to
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the
 ground, in a mound of stone, for cor. of secs. 23, 24,
 25 and 26, marked on brass cap

T26N | R6E
 S23 | S24
 S26 | S25
 1916

And raise a mound of stone, 3 ft. base, 3 ft. high, W.
 of cor.

Land, rolling and broken.
 Soil, coarse texture, 12 to 18 ins. deep.
 Timber, scrub cedar.
 Undergrowth, holly.
 Thin grass.

40.00 N.89° 55' E., on a random line, bet. secs. 24 and 25.
 79.96 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect E. bdy. of Tp., 11 lks. S. of the cor. of secs.
 19, 24, 25 and 30, which is an iron post, properly set,
 marked and witnessed as described in the field notes
 of current Group 66.

Thence
 S.89° 50' W., on a true line, bet. secs. 24 and 25.
 Over rolling and broken land, through scattering timber
 and undergrowth.

4.20 Wash, 70 lks. wide, course NE. Asc. 120 ft. to
 10.75 Rim rock, brs. N. and S. Thence over mesa.
 20.50 Rim rock, brs. NE. and SW. Desc. 165 ft. to
 24.20 Foot of desc.; thence over level land. Wire fence, brs.
 N. and S.
 24.95 E. end of dam, brs. N., 50 lks. dist.
 31.70 Wire fence, brs. N. and S.
 39.98 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S24
 S25
 1916

Chains.

And raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.
 51.15 Wash, 40 lks. wide, 4 ft. deep, course NE. Asc. 70 ft.
 67.40 Rim rock, brs. NE. and SW. Continue ascent to
 79.96 Top of knoll.
 The cor. of secs. 23, 24, 25 and 26.
 Land, level, rolling and broken.
 Soil, thin; limestone subsoil.
 Timber, a few scattering cedar trees.
 Undergrowth, holly.
 Thin grass.

S.0° 1' E., bet. secs. 25 and 26.
 Over rolling and broken land, through scattering timber and undergrowth.
 Desc. 30 ft. to
 5.00 Thence over level land.
 20.00 Asc. 20 ft. to
 22.00 Top of low butte; desc. 15 ft. to
 25.00 Thence over level land.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap

| | |
|-------------------|-----|
| $\frac{1}{4}$ S26 | S25 |
| 1916 | |

And raise a mound of stone, 2 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.
 41.00 Rim rock, brs. NE. and SW. Desc. 40 ft. to
 42.94 Canyon, course NE. Asc. 40 ft. to
 45.00 Rim rock, brs. NE. and SW. Thence over level land.
 60.00 Asc. 35 ft. to
 65.95 Rocky point, slopes SW. Desc. gradually.
 73.35 Wire fence, brs. NE. and SW.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in the ground, in a mound of stone, for cor. of secs. 25, 26, 35 and 36, marked on brass cap

| | |
|------|-----|
| T26N | R6E |
| S26 | S25 |
| S35 | S36 |
| 1916 | |

From which
 A cedar, 6 ins. diam., brs. S.4 $\frac{1}{4}$ ° W., 40 lks. dist., marked T26N R6E S35 BT.
 A pinion, 12 ins. diam., brs. N.81 $\frac{3}{4}$ ° W., 309 lks. dist., marked T26N R6E S26 BT.
 No other trees within limits. Raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.
 Land, level, rolling and broken.
 Soil, 10 to 12 ins. deep; limestone subsoil.
 Timber, a few scrub cedar trees.
 Undergrowth, sagebrush and holly.
 Thin grass.

40.00 N.89° 50' E., on a random line, bet. secs. 25 and 36.
 80.00 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect E. bdy. of Tp., at the cor. of secs. 25, 30, 31 and 36, which is an iron post, properly set, marked and witnessed as described in the field notes of current Group 66.
 Thence
 S.89° 50' W., on a true line, bet. secs. 25 and 36.

22.

Subdivision of T. 26 N., R. 6 E.

Chains.

| | |
|-------|--|
| | Over level and rolling land, through scattering timber and undergrowth. Asc. gradually to Top of low ridge, brs. NE. and SW. Desc. 20 ft. to Small draw, course NE. Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap |
| 21.50 | |
| 30.30 | |
| 40.00 | |
| | $\frac{1}{4}$ S25 $\frac{1}{4}$ S36 1916 |
| | And raise a mound of stone, 2 ft. base, 3 ft. high, N. of cor. |
| 56.00 | Wire fence, brs. N. and S. |
| 75.40 | Dam brs. N., 3 chs. dist. |
| 79.00 | Road, brs. NE. and SW. |
| 80.00 | The cor. of secs. 25, 26, 35 and 36. Land, rolling. Soil, coarse texture, 12 to 20 ins. deep. Timber, a few scattering cedar trees. Undergrowth, holly and sagebrush. Thin grass. From this cor., Beasley's ranch house brs. N.20 $\frac{1}{2}$ ° E., 4.50 chs. dist. |
| 40.00 | S.0° 1' E., on a random line, bet. secs. 35 and 36. Set temp. $\frac{1}{4}$ sec. cor. |
| 79.24 | Intersect S. bdy. of Tp. 2 lks. W. of reestablished cor. of secs. 35 and 36, which is an iron post, hereinbefore described. Thence N.0° 2' W., bet. secs. 35 and 36. Over slightly rolling land, through scattering timber and undergrowth. |
| 37.40 | Beasley ditch, 10 ft. wide, 2 ft. deep, course NE. |
| 39.24 | Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap |
| | $\frac{1}{4}$ S35 S36 1916 |
| | From which A cedar, 18 ins. diam., brs. N.8 $\frac{1}{4}$ ° E., 285 lks. dist., marked $\frac{1}{4}$ S36 BT. No other trees within limits. Raise a mound of stone, 2 ft. base, 2 ft. high, W. of cor. |
| 66.95 | Road, brs. NW. and SE. |
| 70.10 | Wire fence, brs. NW. and SE. |
| 75.85 | Road, brs. NE. to Beasley's Ranch. |
| 79.24 | The cor. of secs. 25, 26, 35 and 36. Land, slightly rolling. Soil, coarse texture, 12 to 18 ins. deep; malpais rock on surface. Timber, a few scattering scrub cedar trees. Undergrowth, holly brush, and sagebrush, 6 to 14 ins. high. Fair grass. |
| 39.74 | From the cor. of secs. 2 and 3, on the N. bdy. of the Tp., which is an iron post, hereinbefore described, S.0° 1' E., bet. secs. 2 and 3. Over level land, through low brush. Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground, in a mound of stone, for witness cor. to $\frac{1}{4}$ sec. cor., marked on brass cap |

Chains.

1/4 S 3 | S 2
W | C
1916

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

40.00 True point for 1/4 sec. cor. falls on rock ledge, where it cannot be established. Asc. 20 ft. to

47.50 Spur, extends E. 5 chs. Desc. 65 ft. to

53.80 Draw, course SE. Thence along E. edge of mesa.

55.00 Odell tank, brs. E. 10 chs. dist.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the ground, in a mound of stone, for cor. of secs. 2, 3, 10 and 11, marked on brass cap

T26N | R6E
S 3 | S 2
S10 | S11
1916

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, level and broken.

Soil, thin, dark loam, rocky, on solid limestone formation.

No timber.

Undergrowth, schadskill.

40.00 N. 89° 48' E., on a random line, bet. secs. 2 and 11.

80.04 Set temp. 1/4 sec. cor.

Intersect the corner of secs. 1, 2, 11 and 12.

Thence

S. 89° 48' W., on a true line, bet. secs. 2 and 11.

Over rolling and broken land, through scattering undergrowth.

Asc. 80 ft.

5.00 From this point, corral, brs. N. 5 chs. dist.

10.00 From this point, Lee's reservoir brs. S. about 15 chs. dist.

12.90 Rim rock, brs. NE. and SW. Continue asc.

28.00 Spur, extends S. 15 chs. Desc. 90 ft. to

33.00 Box canyon, course SE. Asc. 80 ft.

34.10 Rim rock, brs. NW. and SE. Continue asc.

40.02 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap

1/4 S 2
S11
1916

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

45.00 Rocky spur, extends S. 15 chs. Desc. 45 ft. to

51.75 Draw, course SW.

59.40 Road, brs. N. to Grand Canyon and S. to Flagstaff.

59.55 Draw, course SE. Asc. 65 ft. to

79.25 Edge of mesa, brs. N. and S.

80.04 The cor. of secs. 2, 3, 10 and 11.

Land, rolling and broken.

Soil, thin, on limestone subsoil.

No timber.

Undergrowth, schadskill.

S. 0° 1' E., bet. secs. 10 and 11.

Over broken E. slope, along edge of mesa, through scattering timber and undergrowth.

Asc. 25 ft. to

24.

Subdivision of T. 26 N., R. 6 E.

| | | | | | | | | | | | | | |
|-------------------|---|-------------------|--|-----|-----|--|------|-----|--|-----|--|--|------|
| Chains. | | | | | | | | | | | | | |
| 2.00 | Thence over level land. | | | | | | | | | | | | |
| 10.00 | Asc. 30 ft. to | | | | | | | | | | | | |
| 13.00 | Thence over level land. | | | | | | | | | | | | |
| 25.00 | Desc. 50 ft. to | | | | | | | | | | | | |
| 38.50 | Ravine, course NE. Asc. | | | | | | | | | | | | |
| 40.00 | Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap | | | | | | | | | | | | |
| | <table border="0"> <tr> <td>$\frac{1}{4}$S10</td> <td> </td> <td>S11</td> </tr> <tr> <td></td> <td></td> <td>1916</td> </tr> </table> | $\frac{1}{4}$ S10 | | S11 | | | 1916 | | | | | | |
| $\frac{1}{4}$ S10 | | S11 | | | | | | | | | | | |
| | | 1916 | | | | | | | | | | | |
| | And raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor. | | | | | | | | | | | | |
| 40.60 | Thence over level land. | | | | | | | | | | | | |
| 58.60 | Desc. 90 ft. | | | | | | | | | | | | |
| 63.00 | Mouth of Natural Cave, 10 X 6 X 12 ft., brs. W. 60 lks. dist. | | | | | | | | | | | | |
| 77.00 | Draw, course NE. Asc. 30 ft. to | | | | | | | | | | | | |
| 80.00 | Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 10, 11, 14 and 15, marked on brass cap | | | | | | | | | | | | |
| | <table border="0"> <tr> <td>T26N</td> <td> </td> <td>R6E</td> </tr> <tr> <td>S10</td> <td> </td> <td>S11</td> </tr> <tr> <td>S15</td> <td> </td> <td>S14</td> </tr> <tr> <td></td> <td></td> <td>1916</td> </tr> </table> | T26N | | R6E | S10 | | S11 | S15 | | S14 | | | 1916 |
| T26N | | R6E | | | | | | | | | | | |
| S10 | | S11 | | | | | | | | | | | |
| S15 | | S14 | | | | | | | | | | | |
| | | 1916 | | | | | | | | | | | |
| | And raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor. | | | | | | | | | | | | |
| | Land, level and broken. | | | | | | | | | | | | |
| | Soil, thin, on limestone formation. | | | | | | | | | | | | |
| | Timber, none. | | | | | | | | | | | | |
| | Undergrowth, schadskill. | | | | | | | | | | | | |
| 40.00 | N.89° 48' E., on a random line, bet. secs. 11 and 14. | | | | | | | | | | | | |
| 80.10 | Set temp. $\frac{1}{4}$ sec. cor. | | | | | | | | | | | | |
| | Intersect N. and S. line, at the cor. of secs. 11, 12, 13 and 14. | | | | | | | | | | | | |
| | Thence | | | | | | | | | | | | |
| | S.89° 48' W., on a true line, bet. secs. 11 and 14. | | | | | | | | | | | | |
| | Over level and rolling land, through scattering timber and undergrowth. | | | | | | | | | | | | |
| 15.10 | Rim rock, brs. N. and SE. Desc. 85 ft. to | | | | | | | | | | | | |
| 19.10 | Foot of desc.; thence across level land. | | | | | | | | | | | | |
| 22.80 | Road, brs. N.15° W. to Grand Canyon and S. 15° E. to Flagstaff. | | | | | | | | | | | | |
| 25.10 | Asc. 110 ft. to | | | | | | | | | | | | |
| 30.10 | Top of ascent; thence over gently rolling land. | | | | | | | | | | | | |
| 40.05 | Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap | | | | | | | | | | | | |
| | <table border="0"> <tr> <td>$\frac{1}{4}$S11</td> <td> </td> <td>S14</td> </tr> <tr> <td></td> <td></td> <td>1916</td> </tr> </table> | $\frac{1}{4}$ S11 | | S14 | | | 1916 | | | | | | |
| $\frac{1}{4}$ S11 | | S14 | | | | | | | | | | | |
| | | 1916 | | | | | | | | | | | |
| | And raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor. | | | | | | | | | | | | |
| 75.30 | Old road, brs. N. to Grand Canyon and S. to Cedar Springs. | | | | | | | | | | | | |
| 80.10 | The cor. of secs. 10, 11, 14 and 15. | | | | | | | | | | | | |
| | Land, level and rolling. | | | | | | | | | | | | |
| | Soil, thin, on limestone formation. | | | | | | | | | | | | |
| | No timber. | | | | | | | | | | | | |
| | Undergrowth, schadskill. | | | | | | | | | | | | |
| | S.0° 1' E., bet. secs. 14 and 15. | | | | | | | | | | | | |
| | Over slightly rolling land, through scattering undergrowth. | | | | | | | | | | | | |

Chains.

31.60
40.00

Road, brs. NE. to Grand Canyon and SW. to Cedar Springs.
Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S15 | S14
1916

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 14, 15, 22 and 23, marked on brass cap

T26N | R6E
S15 | S14
S22 | S23
1916

And raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.

Land, slightly rolling.

Soil, thin dark loam, 6 to 20 ins. deep; coarse and rocky texture.

Timber, none.

Undergrowth, scattering schadskill and squawberry brush.

40.00
80.14

N. $89^{\circ} 48'$ E., on a random line, bet. secs. 14 and 23.
Set temp. $\frac{1}{4}$ sec. cor.

Intersect N. and S. line, 3 lks. N. of the cor. of secs. 13, 14, 23 and 24.

Thence

S. $89^{\circ} 49'$ W., on a true line, bet. secs. 14 and 23.

Over slightly rolling land, through scattering undergrowth.

1.15

Road, brs. N. to Grand Canyon and S. to Beasley's Ranch.

5.15

Asc. 45 ft. to

10.15

Edge of mesa, brs. N. and S.

40.07

Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S14
S23
1916

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

48.45

Ravine, course S.

80.14

The cor. of secs. 14, 15, 22 and 23.

Land, slightly rolling.

Soil, thin, dar loam; 6 to 20 ins. deep, rocky and coarse texture.

No timber.

Undergrowth, scattering schadskill and squawberry brush.

6.00

S. $0^{\circ} 1'$ E., bet. secs. 22 and 23.

Over slightly rolling land, through scattering undergrowth.

Mesa butte reservoir brs. W. 16 chs. dist.

9.50

Draw, course E. Asc. slightly.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

S22 | S23
1916

26. Subdivision of T. 26 N., R. 6 E.

Chains.

$\frac{1}{4}$ S22 | S23
1916

80.00 And raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for cor. of secs. 22, 23, 26 and 27, marked on brass cap

T26N | R6E
S22 | S23
 $\frac{1}{4}$ S27 | S26
1916

And raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
Land, slightly rolling.
Soil, thin, dark loam, 6 to 20 ins. deep; rocky and coarse texture.
No timber.
Undergrowth, scattering schadskill and squawberry.

40.00 N.89° 49' E., on a random line, bet. secs. 23 and 26.
Set temp. $\frac{1}{4}$ sec. cor.
80.13 Intersect N. and S. line, 6 lks. N. of the cor. of secs. 23, 24, 25 and 26.
Thence
S.89° 52' W., on a true line, bet. secs. 23 and 26.
Over slightly rolling land, through scattering undergrowth.
Desc. 45 ft. to
5.35 Gulch, course NE. Asc. 30 ft. to
12.00 Thence over slightly rolling land.
26.65 Road, brs. N. to Grand Canyon and S. to Beasley Ranch.
40.06 $\frac{1}{2}$ Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S23
S26
1916

46.15 And raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.
Asc. 90 ft. to
70.15 Edge of mesa, brs. N. and S. Thence over slightly rolling land.
80.13 The cor. of secs. 22, 23, 26 and 27.
Land, slightly rolling.
Soil, thin, dark loam, 6 to 20 ins. deep; rocky and coarse texture.
No timber.
Undergrowth, scattering schadskill and squawberry brush.

40.00 S.0° 1' E., bet. secs. 26 and 27.
Over slightly rolling land, through scattering brush.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S27 | S26
1916

60.00 And raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
Head of gulch, course NE.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the

Subdivision of T. 26 N., R. 6 E.

27.

Chains.

ground, for cor. of secs. 26, 27, 34 and 35, marked on brass cap

| | |
|------|-----|
| T26N | R6E |
| S27 | S26 |
| S34 | S35 |
| 1916 | |

And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
 Land, slightly rolling.
 Soil, fair, dark loam, 26 ins. deep, rocky in texture, lava formation.
 No timber.
 Undergrowth, schadskill.

40.00
 80.05

 2.75
 7.05
 22.25
 30.00
 40.02½

N.89° 52' E., on a random line, bet. secs. 26 and 35.
 Set temp. ¼ sec. cor.
 Intersect N. and S. line, 5 lks. S. of the cor. of secs. 25, 26, 35 and 36.
 Thence
 S.89° 50' W., on a true line, bet. secs. 26 and 35.
 Over slightly rolling land, through scattering undergrowth.
 Fence, extends 8 chs. S. and 1 ch. N.
 Road, brs. NW. to Grand Danyon and SE. to Beasley Ranch.
 Ravine, 2 chs. wide, course NE. Asc. 40 ft. to
 Thence over level land.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

| |
|-------|
| ¼ S26 |
| S35 |
| 1916 |

80.05

And raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
 The cor. of secs. 26, 27, 34 and 35.
 Land, slightly rolling.
 Soil, fair, dark loam, 26 ins. deep, rocky in texture, lava formation.
 No timber.
 Undergrowth, schadskill.

40.00
 78.15

 0.25
 0.25
 3.15
 9.15
 35.15
 38.15

S.0° 1' E., on a random line, bet. secs. 34 and 35.
 Set temp. ¼ sec. cor.
 Intersect S. bdy. of T. 26 N. 5 lks. W. of true point for reestablished cor. of secs. 34 and 35, which is witnessed by an iron post, 3 ins. diam., set 1.10 chs. N.89° 4' W. of the true point for cor., and described hereinbefore.
 Thence, from the true point for cor. of secs. 34 and 35, N.0° 3' W., bet. secs. 34 and 35.
 Over slightly rolling land, through scattering undergrowth.
 Across dry tank.
 Wirefence, brs. E. and W.
 Leave water tank.
 Small circular corral, 4 chs. W. of line.
 Road, brs. E. and W.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

| | |
|-------|-----|
| ¼ S34 | S35 |
| 1916 | |

And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

28.

Subdivision of T. 26 N., R. 6 E.

Chains.

78.15 The cor. of secs. 26, 27, 34 and 35.
 Land, slightly rolling.
 Soil, fair, dark loam, 26 ins. deep, rocky in texture, lava formation.
 No timber.
 Undergrowth, schadskill.

From the cor. of secs. 3 and 4, on the N. bdy. of the Tp., which is an iron post, hereinbefore described, S.0° 2' E., bet. secs. 3 and 4.
 Over rolling land, through scattering timber and undergrowth.
 Asc. 15 ft. to

15.00 Low ridge, brs. NE. and W. Desc. 155 ft.
 31.00 Edge of rimrock, brs. SW. and E. Continue descent to
 34.00 Ravine, course E. Asc. 130 ft. to
 37.50 Rim rock, brs. E. and W. Thence along E. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 4 | S 3
 1916

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Desc. 45 ft. to
 49.00 Asc. 65 ft. to
 54.00 Rocky point, slopes E. Desc. 95 ft. to
 67.55 Ravine, course NE. Asc. 150 ft. to
 78.00 Spur, slopes NE. Desc. to
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 3, 4, 9 and 10, marked on brass cap

T26N R6E
 S 4 | S 3
 S 9 | S10
 1916

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, rolling, broken and mountainous.
 Soil, poor, rocky loam.
 Undergrowth, schadskill.
 Timber, scattering cedar and pinion.

40.00 N.89° 48' E., on a random line, bet. secs. 3 and 10.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.00 Intersect. N. and S. line, at the cor. of secs. 2, 3, 10 and 11.

Thence
 S.89° 48' W., on a true line, bet. secs. 3 and 10.
 Over rolling land, through scattering undergrowth.

Asc. 35 ft. to
 10.00 Thence over level land.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 3
 S10
 1916

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

Desc. 20 ft. to
 42.00 Draw, course N.

Subdivision of T. 26 N., R. 6 E.

Chains.


64.50
80.00

Draw, course NE. Asc. 135 ft. to
The cor. of secs. 3, 4, 9 and 10.
Land, rolling.
Soil, poor, dark loam, rocky in texture.
No timber.
Undergrowth, scattering schadskill and squawberry.
Poor grass.

9.00
10.00
15.00
40.00.

S.0° 2' E., bet. secs. 9 and 10.
Over rolling land, through scattering undergrowth.
Desc. 95 ft. to
Ravine, course NE. Asc. 15 ft. to
Desc. to
Draw, course E. Asc. 80 ft. to
Spur, slopes E. 15 chs.


Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the
ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on
brass cap



And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
of cor.

53.90
58.30
65.00
80.00

Desc. to
Ravine, course NE. Asc. 40 ft. to
Spur, extends 10 chs. E. Desc. 90 ft. to
Ravine, course E. Asc. 125 ft. to
Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the
ground, in a mound of stone, for cor. of secs. 9, 10, 15
and 16, marked on brass cap



And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
of cor.

Land, rolling.
Soil, poor, dark loam, rocky in texture.
No timber.
Undergrowth, scattering schadskill and squawberry.
Poor grass.

40.00
80.12

N.89° 48' E., on a random line, bet. secs. 10 and 15.
Set temp. $\frac{1}{4}$ sec. cor.
Intersect the cor. of secs. 10, 11, 14 and 15, secs. 10, 11, 14
and 15.

6.10
12.10
15.00
40.06

Thence
S.89° 48' W., on a true line, bet. secs. 10 and 15.
Over rolling and broken land, through scattering undergrowth.
Desc. to
Ravine, course NE. Asc. 50 ft.
Rim rock, brs. NE. and SW. Continue ascent to
Thence over slightly rolling land,
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
N. of cor.

55.00

Asc. 255 ft. to

30.

Subdivision of T. 26 N., R. 6 E.

Chains.

80.12

The cor. of secs. 9, 10, 15 and 16.
Land, rolling and broken.
Soil, poor, dark loam, rocky in texture.
Timber, none.
Undergrowth, scattering schadskill and squawberry.
Poor grass.

5.00

25.00

40.00

S.0° 2' E., bet. secs. 15 and 16.
Over rolling land, through scattering undergrowth.
Asc. 30 ft. to
Spur, slopes E. 15 chs. Desc. 125 ft. to
Foot of desc., brs. NE. and SW. Thence over slightly
rolling land.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

| | |
|-------------------|-----|
| $\frac{1}{4}$ S16 | S15 |
|-------------------|-----|

1916

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

45.80

80.00

Ravine, 50 lks. wide, 10 ft. deep, course E.
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 15, 16, 21 and 22, marked on
brass cap

| | |
|------|-----|
| T26N | R6E |
|------|-----|

| | |
|-----|-----|
| S16 | S15 |
|-----|-----|

| | |
|-----|-----|
| S21 | S22 |
|-----|-----|

1916

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
of cor.

Land, rolling and gently rolling.
Soil, poor, dark loam, rocky in texture.
No timber.
Undergrowth, scattering schadskill and squawberry.
Poor grass.

40.00

80.00

N.89° 48' E., on a random line, bet. secs. 15 and 22.
Set temp. $\frac{1}{4}$ sec. cor.
Intersect N. and S. line, 9 lks. N. of the cor. of secs.
14, 15, 22 and 23.

Thence

16.00

31.05

40.00

S.89° 52' W., on a true line, bet. secs. 15 and 22.
Over level land, through scattering undergrowth.
Mesa butte reservoir, brs. S. 6 chs. dist.
Road, brs. NE. to Grand Canyon and SW. to Cedar Springs.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

| | |
|-------------------|-----|
| $\frac{1}{4}$ S15 | S22 |
|-------------------|-----|

| | |
|-----|--|
| S22 | |
|-----|--|

1916

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N.
of cor.

45.00

57.80

80.00

Leave level, enter mountainous land. Asc. 220 ft. to
Edge of mesa, brs. N. and S. Thence over level land.
The cor. of secs. 15, 16, 21 and 22.
Land, level and mountainous.
Soil, poor, dark loam, rocky in texture.
No timber.
Undergrowth, scattering schadskill and squawberry.
Poor grass.

Subdivision of T. 26 Nn, R. 6 E.

Chains.

40.00 S.0° 2' E., bet. secs. 21 and 22.
 Over slightly rolling land, through scattering undergrowth.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S21 | S22
 1916

46.00 And raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W.
 of cor.
 80.00 Edge of mesa, brs. NE. and SW. Desc. 145 ft. to
 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 21, 22, 27 and 28, marked on
 brass cap

T26N | R6E
 S21 | S22
 S28 | S27
 1916

And raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
 W. of cor.
 Land, level and broken.
 Soil, poor, loam, 26 ins. deep; rocky in texture.
 No timber.
 Undergrowth, yellow sagebrush.
 Poor grass.

40.00 N.89° 52' E., on a random line, bet. secs. 22 and 27.
 80.00 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect N. and S. line, 14 lks. S. of the cor. of secs.
 22, 23, 26 and 27.

Thence
 S.89° 46' W., on a true line, bet. secs. 22 and 27.
 Over level land, through scattering undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S22
 S27
 1916

63.00 And raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N.
 of cor.
 80.00 Road, brs. NE. to Grand Canyon and SW. to Cedar Springs.
 The cor. of secs. 21, 22, 27 and 28.
 Land, level.
 Soil, poor, loam, 26 ins. deep; rocky in texture.
 No timber.
 Undergrowth, low yellow sagebrush.
 Poor grass.

20.50 S.0° 2' E., bet. secs. 27 and 28.
 40.00 Over level land, through scattering undergrowth.
 Road, brs. NE. to Grand Canyon and SW. to Cedar Springs.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S28 | S27
 1916

80.00 And raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
 W. of cor.
 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 27, 28, 33 and 34, marked

32.

Subdivision of T. 26 N., R. 6 E.

Chains.

on brass cap

| | |
|------|-----|
| T26N | R6E |
| S28 | S27 |
| S33 | S34 |
| 1916 | |

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, level.

Soil, poor, loam, 26 ins. deep; rocky in texture.

No timber.

Undergrowth, low yellow sagebrush.

Poor grass.

40.00 N. 89° 46' E., on a random line, bet. secs. 27 and 34.

Set temp. 1/4 sec. cor.

80.02 Intersect N. and S. line, 4 lks. N. of the cor. of secs. 26, 27, 34 and 35.

Thence

S. 89° 48' W., on a true line, bet. secs. 27 and 34.

Over level land, through scattering undergrowth.

40.01 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, in a mound of stone, for 1/4 sec. cor., marked on brass cap

| |
|---------|
| 1/4 S27 |
| S34 |
| 1916 |

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

80.02 The cor. of secs. 27, 28, 33 and 34.

Land, level.

Soil, poor, loam, 26 ins. deep; rocky in texture.

No timber.

Undergrowth, low yellow sagebrush.

Poor grass.

40.00 S. 0° 2' E., on a random line, bet. secs. 33 and 34.

Set temp. 1/4 sec. cor.

77.89 Intersect S. bdy. of T. 5 lks. N. of reestablished cor. of secs. 33 and 34, which is an iron post, hereinbefore described.

Thence

North on a true line, bet. secs. 33 and 34.

Over level land, through scattering undergrowth.

14.80 Dry ditch, 10 lks. wide, course NE.

37.89 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap

| | |
|---------|-----|
| 1/4 S33 | S34 |
| 1916 | |

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. cor.

55.10 Road, brs. N. 80° W. and S. 80° E.

77.89 The cor. of secs. 27, 28, 33 and 34.

Land, level.

Soil, fair, dark loam, coarse and rocky.

No timber.

Undergrowth, schadskill.

Fair grass.

chains.

From the cor. of secs. 4 and 5, on the N. bdy. of the Tp. which is an iron post, described hereinbefore, S.0° 3' E., bet. secs. 4 and 5. Over slightly rolling land, through scattering timber and undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground, in a mound of stone, for 1/4 sec. cor., marked on brass cap

1/4 S 5 | S 4
1916

From which
A cedar, 20 ins. diam., brs. S.59 1/2° E., 42 lks. dist., marked 1/4 S 4 BT.
A pinion, 12 ins. diam., brs. S.46 1/4° W., 87 lks. dist., marked 1/4 S 5 BT.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in the ground, in a mound of stone, for cor. of secs. 4, 5, 8 and 9, marked on brass cap

T26N | R6E
S 5 | S 4
S 8 | S 9
1916

From which
A cedar, 8 ins. diam., brs. N.38° E., 47 lks. dist., marked T26N R6E S4 BT.
A pinion, 12 ins. diam., brs. S.79 1/2° E., 28 lks. dist., marked T26N R6E S9 BT.
A pinion, 12 ins. diam., brs. S.50 1/4° W., 43 lks. dist., marked T26N R6E S8 BT.
A pinion, 10 ins. diam., brs. N.38° W., 50 lks. dist., marked T26N R6E S5 BT.

Land, slightly rolling.
Soil, coarse texture, 8 to 15 ins. deep; limestone subsoil.
Timber, scattering scrub cedar and pi nion.
Undergrowth, holly, buck brush and sagebrush.
Thin grass.

40.00 N.89° 48' E., on a random line, bet. secs. 4 and 9. Set temp. 1/4 sec. cor.

80.07 Intersect N. and S. line, 10 lks. S. of the cor. of secs. 3, 4, 9 and 10.

Thence
S.89° 44' W., on a true line, bet. secs. 4 and 9. Over rolling and mountainous land, through scattering timber and sagebrush.

3.80 Asc. 45 ft. to Ridge, brs. NE. and SW. Desc. 15 ft. to

5.30 Asc. 145 ft. to

18.60 Ridge, brs. NE. and SW. Desc. 60 ft. to

31.05 Wash, 10 lks. wide, 2 ft. deep, course NE. Thence over level land.

40.03 1/2 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, in a mound of stone, for 1/4 sec. cor., marked on brass cap

1/4 S 4
S 9
1916

And raise a mound of stone, 2 ft. base, 2 ft. high, N. of cor.

80.07 The cor. of secs. 4, 5, 8 and 9.
Land, level, rolling and mountainous.
Soil, coarse and rocky.
Timber, scattering cedar and pinion.
Undergrowth, sagebrush 1 ft. high.

Chains.

Thin grass.

S.0° 3' E., bet. secs. 8 and 9.

Over gently rolling land, through scattering undergrowth.

16.20 Ditch, 3 ft. wide, 1/2 ft. deep, course NW.

28.00 Ditch, 2 ft. wide, 6 ins. deep, course NW.

31.00 Ditch, 2 ft. wide, 6 ins. deep, course NW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap

1/4 S 8 S 9

1916

And raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.

77.90 Wash, 15 lks. wide, 4 ft. deep, course SW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 8, 9, 16 and 17, marked on brass cap

T26N | R6E
S 8 | S 9

S17 | S16

1916

And raise a mound of stone, 2 ft. base, 2 ft. high, W. of cor.

Land, rolling and gently rolling.

Soil, coarse texture, 12 to 18 ins. deep; rocky surface.

No timber.

Undergrowth, sagebrush 1 ft. high.

Thin grass.

N.89° 44' E., on a random line, bet. secs. 9 and 16.

40.00 Set temp. 1/4 sec. cor.

80.18 Intersect N. and S. line, 4 lks. N. of the cor. of secs. 9, 10, 15 and 16.

Thence

S.89° 46' W., on a true line, bet. secs. 9 and 16.

Over rolling and mountainous land, through scattering undergrowth.

Asc. 160 ft.

2.30 Rim rock, brs. NW. and SE. Continue ascent.

20.70 Spur, slopes SE. Continue ascent.

40.09 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap

1/4 S 9
S16

1916

And raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.

Thence along S. slope.

45.40 Desc. 40 ft. to

49.40 Gulch, course S. Asc. slightly to

55.35 Desc. 195 ft.

65.35 Spur, slopes SW. Continue descent to

80.18 The cor. of secs. 8, 19, 16 and 17.

Land, rolling and mountainous.

Soil, coarse texture, 12 to 16 ins. deep; rocky on surface;

No timber.

Undergrowth, scattering sagebrush 1 ft. high.

Fair grass.

Chains.

15.00

32.93

40.00

42.40

80.00

40.00

80.11

40.05½

80.11

40.00

S.0° 3' E., bet. secs. 16 and 17.
 Over rolling land, through scattering timber and undergrowth.
 Asc. gradually to
 Point of spur, slopes SW. Desc. 90 ft. to
 Draw, course SW. Asc. 75 ft.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for ¼ sec. cor., marked on brass cap

¼S17 | S16
 1916

And raise a mound of stone, 3 ft. base, 3 ft. high, W.
 of cor.

Ridge, brs. NW. and SE. Desc. 160 ft. to
 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the
 ground, for cor. of secs. 16, 17, 20 and 21, marked on
 brass cap

T26NR6E
 S17 | S16
 S20 | S21
 1916

And raise a mound of stone, 3 ft. base, 3 ft. high, W.
 of cor.

Land, rolling.
 Soil, coarse texture, 12 to 16 ins. deep; malpais rock on
 surface.
 Timber, very scattering scrub cedar.
 Undergrowth, holly brush and sagebrush,
 Thin grass.

N.89° 46' E., on a random line, bet. secs. 16 and 21.
 Set temp. ¼ sec. cor.
 Intersect N. and S. line, 11 lks. S. of the cor. of secs.
 15, 16, 21 and 22.
 Thence
 S.89° 41' W., on a true line, bet. secs. 16 and 21.
 Over slightly rolling land, through scattering timber and
 undergrowth.
 Set an iron post, 3 ft. long, 1 in diam., 26 ins. in the
 ground, for ¼ sec. cor., marked on brass cap

¼S16
 S21
 1916

And raise a mound of stone, 2 ft. base, 2 ft. high, N.
 of cor.

The cor. of secs. 16, 17, 20 and 21.
 Land, slightly rolling.
 Soil, coarse texture, 12 to 18 ins. deep; malpais rock on
 surface.
 Timber, a few scattering cedar trees.
 Undergrowth, sagebrush and holly.
 Thin grass.

S.0° 3' E., bet. secs. 20 and 21.
 Over slightly rolling land, through scattering undergrowth.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for ¼ sec. cor., marked on brass cap

¼S20 | S21
 1916

36.

Subdivision of T. 26 N., R. 6 E.

| | | | | | | | | | |
|--|---|-------------------|-----|------|-----|------|-----|------|--|
| Chains. 80.00 | <p>And raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.</p> <p>Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 20, 21, 28 and 29, marked on brass cap</p> <div style="text-align: center;"> <table border="1"> <tr><td>T26N</td><td>R6E</td></tr> <tr><td>S20</td><td>S21</td></tr> <tr><td>S29</td><td>S28</td></tr> <tr><td colspan="2">1916</td></tr> </table> </div> <p>And raise a mound of stone, 3 ft. base, 3 ins. diam., W. of cor.</p> <p>Land, slightly rolling. Soil, coarse texture, 12 to 20 ins. deep. No timber. Undergrowth, sagebrush 1 ft. high. Fair grass.</p> | T26N | R6E | S20 | S21 | S29 | S28 | 1916 | |
| T26N | R6E | | | | | | | | |
| S20 | S21 | | | | | | | | |
| S29 | S28 | | | | | | | | |
| 1916 | | | | | | | | | |
| 40.00 80.06 10.10 14.40 40.03 | <p>N. 89° 41' E., on a random line, bet. secs. 21 and 28. Set temp. $\frac{1}{4}$ sec. cor.</p> <p>Intersect N. and S. line, 37 lks. N. of the cor. of secs. 21, 22, 27 and 28.</p> <p>Thence S. 89° 57' W., on a true line, bet. secs. 21 and 28. Over gently rolling land, through scattering undergrowth. Asc. 75 ft. to Rim rock, brs. NE. and SW. Thence over gently rolling land.</p> <p>Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap</p> <div style="text-align: center;"> <table border="1"> <tr><td>$\frac{1}{4}$S21</td><td></td></tr> <tr><td>S28</td><td></td></tr> <tr><td colspan="2">1916</td></tr> </table> </div> | $\frac{1}{4}$ S21 | | S28 | | 1916 | | | |
| $\frac{1}{4}$ S21 | | | | | | | | | |
| S28 | | | | | | | | | |
| 1916 | | | | | | | | | |
| 80.06 | <p>And raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.</p> <p>The cor. of secs. 20, 21, 28 and 29.</p> <p>Land, gently rolling. Soil, coarse texture, 18 to 26 ins. deep. No timber. Undergrowth, sagebrush 1 ft. high. Thin grass.</p> | | | | | | | | |
| 33.70 36.12 40.00 | <p>S. 0° 3' E., bet. secs. 28 and 29. Over rolling land, through scattering undergrowth and timber.</p> <p>Rim rock, brs. NW. and SE. Desc. 35 ft. to Canyon, course SE. Thence over level land.</p> <p>Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap</p> <div style="text-align: center;"> <table border="1"> <tr><td>$\frac{1}{4}$S29</td><td>S28</td></tr> <tr><td colspan="2">1916</td></tr> </table> </div> | $\frac{1}{4}$ S29 | S28 | 1916 | | | | | |
| $\frac{1}{4}$ S29 | S28 | | | | | | | | |
| 1916 | | | | | | | | | |
| 48.30 50.00 60.00 68.43 74.91 80.00 | <p>And raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.</p> <p>Old road, brs. NW. and SE. Small draw, course SE. Leave level land; asc. 110 ft. Enter timber, brs. E. and W. Spur, slopes NE. Continue ascent to Ridge, brs. NE. and SW. Thence along E. slope to Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in the</p> | | | | | | | | |

Subdivision of T. 26 N., R. 6 E.

Chains.

ground, in a mound of stone, for cor. of secs. 28, 29, 32 and 33, marked on brass cap

| | |
|------|-----|
| T26N | R6E |
| S29 | S28 |
| S32 | S33 |
| 1916 | |

From which

A pinion, 8 ins. diam., brs. N.27 $\frac{1}{4}$ ° E., 95 lks. dist., marked T26N R6E S28 BT.

A pinion, 12 ins. diam., brs. S.7° E., 55 lks. dist., marked T26N R6E S33 BT.

A pinion, 6 ins. diam., brs. S.73° W., 52 lks. dist., marked T26N R6E S32 BT.

A pinion, 7 ins. diam., brs. N.69 $\frac{1}{2}$ ° W., 126 lks. dist., marked T26N R6E S29 BT.

Land, rolling and broken.

Soil, thin, 6 to 26 ins. deep; limestone subsoil.

Timber, scattering cedar and pinion.

Undergrowth, sagebrush 1 to 2 ft. high and holly brush.

Thin grass.

40.00 N.89° 57' E., on a random line, bet. secs. 28 and 33.
 80.21 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect N. and S. line, 11 lks. S. of the cor. of secs. 27, 28, 33 and 34.

Thence

S.89° 52' W., on a true line, bet. secs. 28 and 33.

Over rolling land, through scattering timber and undergrowth.

40.10 $\frac{1}{2}$ Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap

| |
|-------------------|
| $\frac{1}{4}$ S28 |
| S33 |
| 1916 |

And raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

43.20 Road, brs. NE. to Grand Canyon and SW. to Cedar Springs.

56.00 Road, brs. NW. to Flagstaff and SE. to Cedar Springs.

60.00 Wash, course SE. Asc.270 ft. to

66.40 Edge of meas, brs. N. and S. Thence over gently rolling land.

78.80 Ravine, course NE.

80.21 The cor. of secs. 28, 29, 32 and 33.

Land, gently rolling, rolling and mountainous.

Soil, fair, dark loam, coarse and rocky.

Timber, cedar and pinion.

Undergrowth, schadskill.

Fair grass.

40.00 S.0° 3' E., on a random line, bet. secs. 32 and 33.
 77.96 Set temp. $\frac{1}{4}$ sec. cor.

Intersect S. body of T. 25 lks. W. of re-established cor. of secs. 28, 32, and 33, which is an iron post, hereinbefore described.

Thence

N.0° 13' W., on a true line, bet. secs. 32 and 33.

Over rolling land, through scattering undergrowth.

27.96 Wash, course NE.

32.95 Leave rolling land; asc. 295 ft.

37.96 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap

Chains.

| | |
|----------|------|
| 1/4 S 32 | S 33 |
| 1916 | |

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

55.95 Edge of meaa, brs. NE. and SW. Desc. 105 ft. to
 73.65 Ravine, course NE. Asc. to
 77.96 The cor. of secs. 28, 29, 32 and 33.
 Land, rolling and mountainous.
 Soil, fair, dark loam, coarse and rocky.
 No timber.
 Undergrowth, schadskill.
 Fair grass.

36.00 From the cor. of secs. 5, and 6, on the N. bdy. of the Tp.,
 40:00 which is an iron post, hereinbefore described,
 S.0° 3' E., bet. secs. 5 and 6.
 Over slightly rolling land, through scattering timber and
 undergrowth.
 Old road, brs. NW. and SE.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for 1/4 sec. cor., marked on brass cap

| | |
|---------|-----|
| 1/4 S 6 | S 5 |
| 1916 | |

80.00 Dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft.
 dist.; and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft.
 high, W. of cor.
 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the
 ground, for cor. of secs. 5, 6, 7 and 8, marked on
 brass cap

| | |
|------|-----|
| T26N | R6E |
| S 6 | S 5 |
| S 7 | S 8 |
| 1916 | |

From which
 A pinion, 8 ins. diam., brs. S.14 1/2° E., 187 lks. dist.,
 marked T26N R6E S8 BT.
 A cedar, 24 ins. diam., brs. S.37° W., 117 lks. dist.,
 marked T26N R6E S7 BT.
 A pinion, 8 ins. diam., brs. N.60° W., 147 lks. dist.,
 marked T26N R6E S6 BT.
 No other trees within limits. Raise a mound of stone, 3
 ft. base, 3 ft. high, W. of cor.
 Land, slightly rolling.
 Soil, coarse texture, 18 to 26 ins. deep.
 Timber, scrub cedar and pinion.
 Undergrowth, sagebrush.
 Fair grass.

40.00 N.89° 48' E., on a random line, bet. secs. 5 and 8.
 80.00 Set temp. 1/4 sec. cor.
 Intersect N. and S. line, 2 lks. N. of the cor. of secs.
 4, 5, 8 and 9.

Thence
 S.89° 49' W., on a true line, bet. secs. 5 and 8.
 Over slightly rolling land, through scattering timber and
 undergrowth.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the
 ground, for 1/4 sec. cor., marked on brass cap

Chains.

$\frac{1}{4}$ S 5
S 8
1916

From which
 A pinion, 10 ins. diam., brs. N.62 $\frac{1}{2}$ ° W., 142 lks. dist. marked $\frac{1}{4}$ S5 BT.
 A pinion, 12 ins. diam., brs. S.9° E., 160 lks. dist., marked $\frac{1}{4}$ S8 BT.

80.00 The cor. of secs. 5, 6, 7 and 8.
 Land, slightly rolling.
 Soil, sandy loam, rocky; 2nd and 3rd rate.
 Timber, scrub cedar and pinion.
 Undergrowth, weeds 1 ft. high.
 Thin grass.

40.00 S.89° 48' W., on a random line, bet secs. 6 and 7.
 Set temp. $\frac{1}{4}$ sec. cor.

80.41 Intersect W. bdy. of Tp., 3 lks. S. of the cor. of secs. 1, 6, 7 and 12, which is an iron post, hereinbefore described.
 Thence
 N.89° 49' E., on a true line, bet. secs. 6 and 7.
 Over slightly rolling land, through scattering timber and undergrowth.

40.41 Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S6
S 7
1916

From which
 A pinion, 5 ins. diam., brs. N.55° W., 61 lks. dist., marked $\frac{1}{4}$ S6 BT.
 A pinion, 12 ins. diam., brs. S.16° W., 10 lks. dist., marked $\frac{1}{4}$ S7 BT.

80.41 The cor. of secs. 5, 6, 7 and 8.
 Land, slightly rolling.
 Soil, coarse texture, 10 to 18 ins. deep; limestone sub-soil.
 Timber, scrub cedar and pinion.
 Undergrowth, sagebrush and holly.
 Fair grass.

40.00 S.0° 3' E., bet. secs. 7 and 8.
 Over gently rolling land, through scattering timber and undergrowth.
 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 7 | S 8
1916

From which
 A pinion, 8 ins. diam., brs. S.78° E., 137 lks. dist., marked $\frac{1}{4}$ S8 BT.
 A pinion, 10 ins. diam., brs. S.55° W., 270 lks. dist., marked $\frac{1}{4}$ S7 BT.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 14 ins. in the ground, in a mound of stone, for cor. of secs. 7, 8, 17 and 18, marked on brass cap

40.

Subdivision of T. 26 N., R. 6 E.

Chains.

| | |
|----------|-----|
| T26N R6E | |
| S 7 | S 8 |
| <hr/> | |
| S18 | S17 |
| 1916 | |

From which
 A pinion, 14 ins. diam., brs. N.81½° E., 192 lks. dist. marked T26N-R6E S8 BT.
 A pinion, 14 ins. diam., brs. S.67½°E., 249 lks. dist., marked T26N R6E S17 BT.
 No other trees within limits. Raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.
 Land, gently rolling.
 Soil, sandy loam, rocky; 2nd and 3rd rate.
 Timber, cedar and pinion.
 Undergrowth h, weeds 1 ft. high.
 Fair grass.

40.00 N.89° 49' E., on a random line, bet. secs. 8 and 17.
 80.00 Set temp. ¼ sec. cor.
 Intersect the corner of sections 8, 9, 16 and 17.
 Thence
 S.89° 49' W., on a true line, bet. secs. 8 and 17.
 Over broken land, through scattering timber and undergrowth.
 Desc. 220 ft. to
 30.00 Wash, course SW. Thence over gently rolling land.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground, in a mound of stone, for ¼ sec. cor., marked on brass cap

| |
|-------|
| ¼ S 8 |
| <hr/> |
| S17 |
| 1916 |

And raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
 47.00 Ravine, course SE.
 80.00 The cor. of secs. 7, 8, 17 and 18.
 Land, gently rolling and broken.
 Soil, sandy loam, rocky; 2nd and 3rd rate.
 Timber, cedar and pinion.
 Undergrowth, weeds 1 ft. high.
 Thin grass.

40.00 S.89° 49' W., on a random line, bet. secs. 7 and 18.
 Set temp. ¼ sec. cor.
 80.49 Intersect W. bdy. of Tp., 2 lks. S. of the cor. of secs. 7, 12, 13 and 18, which is an iron post, described here-
 inbefore.
 Thence
 N.89° 50' E., on a true line, bet. secs. 7 and 18.
 Over gently rolling land, through scattering timber and undergrowth.
 40.49 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

| |
|-------|
| ¼ S 7 |
| <hr/> |
| S18 |
| 1916 |

And raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.
 80.49 The cor. of secs. 7, 8, 17 and 18.
 Land, gently rolling.
 Soil, coarse texture, 10 to 18 ft. deep.

Subdivision of T. 26 N., R. 6 E.

| | |
|---------|--|
| Chains. | <p>Timber, scrub cedar and pinion. Undergrowth, holly. Fair grass.</p> |
| | <p>S.0° 3' E., bet. secs. 17 and 18. Over rolling land, through scattering timber and undergrowth.</p> <p>20.00 Asc. 70 ft. to 30.00 Desc. 80 ft. 40.00 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap</p> <p style="text-align: center;"> $\frac{1}{4}$S18 S17 1916 </p> <p>And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.</p> <p>43.00 Gulch, drains E. Thence over gently rolling land. 70.00 Desc. 80 ft. to 79.00 Draw, course SE. Asc. to 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 17, 18, 19 and 20, marked on brass cap</p> <p style="text-align: center;"> T26N R6E S18 S17 --- S19 S20 1916 </p> <p>And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. Land, rolling. Soil, coarse texture, 10 to 18 ins. deep. Timber, scrub cedar and pinion. Undergrowth, holly. Fair grass.</p> |
| | <p>N.89° 49' E., on a random line, bet. secs. 17 and 20. 40.00 Set temp. $\frac{1}{4}$ sec. cor. 79.96 Intersect N. and S. line, 7 lks. N. of the cor. of secs. 16, 17, 20 and 21. Thence S.89° 52' W., on a true line, bet. secs. 17 and 20. Over rolling land, through scattering timber and undergrowth.</p> <p>29.00 Rim rock, brs. NE. and SW. Desc. 35 ft. to 31.05 Canyon, course SW. Old road in canyon, brs. NE. and SW. Asc. 85 ft. 37.00 Rim rock, brs. NW. and SE. Continue asc. 39.98 Set an iron post, 3 ft. long, lin. diam., in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap</p> <p style="text-align: center;"> $\frac{1}{4}$S17 S20 1916 </p> <p>From which A pinion, 12 ins. diam., brs. N.19$\frac{1}{2}$° W., 69 lks. dist., marked $\frac{1}{4}$S17 BT. A pinion, 12 ins. diam., brs. S.9$\frac{1}{2}$° W., 80 lks. dist., marked $\frac{1}{4}$S20 BT.</p> <p>40.00 Rim rock, brs. NW. and SE. Thence over gently rolling land. 66.00 Rim rock, brs. NW. and SE. Desc. 80 ft. 70.98 Rim rock, brs. NW. and SE. Continue descent to 79.22 Draw, course SW. Asc. gradually to</p> |

42.

Subdivision of T. 26 N., R. 6 E.

Chains.

79.96 The cor. of secs. 17, 18, 19 and 20.
Land, rolling and broken.
Soil, thin; on limestone subsoil.
Timber, scattering cedar and pinion.
Undergrowth, holly and sagebrush.
Thin grass.

40.00 S.89° 50' W., on a random line, bet. secs. 18 and 19.
Set temp. $\frac{1}{4}$ sec. cor.
80.54 Intersect W. bdy. of Tp., 11 lks. N. of the cor. of secs.
13, 18, 19 and 24, which is an iron post, described in
hereinbefore.
Thence
N.89° 45' E., on a true line, bet. secs. 18 and 19.
Over level land, through scattering timber and undergrowth.
20.00 Small draw, course NE.
40.54 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S18
 $\frac{1}{4}$ S19
1916

From which
A pinion, 12 ins. diam., brs. N.57° W., 54 lks. dist.,
marked $\frac{1}{4}$ S18 BT.
A pinion, 18 ins. diam., brs. S.79 $\frac{1}{2}$ ° W., 54 lks. dist.,
marked $\frac{1}{4}$ S19 BT.
Desc. 50 ft. to
41.59 Draw, course SE. Asc. 55 ft. to
54.95 Rim rock, brs. NW. and SE. Thence over level land.
59.94 Desc. 100 ft. to
80.54 The cor. of secs. 17, 18, 19 and 20.
Land, level and broken.
Soil, coarse texture, 18 to 20 ins. deep.
Timber, cedar and pinion.
Undergrowth, holly.
Thin grass.

S.0° 3' E., bet. secs. 19 and 20.
Over rolling land, through scattering timber and undergrowth.
10.00 Asc. 45 ft. to
15.00 Low spur, slopes E. Desc. 75 ft. to
31.00 Box canyon, 40 ft. deep, 50 lks. wide, course E. Asc. to
40.00 Set an iron post, 3 ft. long, 1 in. diam., in a mound of
stone, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S19 | S20
1916

From which
A pinion, 10 ins. diam., brs. S.60° E., 209 lks. dist.,
marked $\frac{1}{4}$ S20 BT.
A pinion, 12 ins. diam., brs. N.40 $\frac{1}{2}$ ° W., 89 lks. dist.,
marked $\frac{1}{4}$ S19 BT.
Desc. 120 ft. to
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the
ground, for cor. of secs. 19, 20, 29 and 30, marked on
brass cap

Subdivision of T. 26 N., R. 6 E.

Chains.

| | |
|--------|------|
| T. 26N | R 6E |
| S19 | S20 |
| S30 | S29 |
| 1916 | |

And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
 Land, rolling and broken.
 Soil, sandy loam, rocky; 2nd and 3rd rate.
 Timber, scattering cedar and pinion.
 Undergrowth, weeds 1 ft. high.

40.00 N.89° 52' E., on a random line, bet. secs. 20 and 29.
 80.02 Set temp. ¼ sec. cor.
 Intersect N. and S. line, 14 lks. N. of the cor. of secs. 20, 21, 28 and 29.
 Thence
 S.89° 58' W., on a true line, bet. secs. 20 and 29.
 Over gently rolling land, through scattering undergrowth.
 20.00 Descend to
 25.58 Draw, course SE. Ascend 30 ft. to
 28.03 Old road, brs. NW. and SE.
 40.01 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap,

| |
|------|
| ¼S20 |
| S29 |
| 1916 |

80.02 And raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor. of secs. 19, 20, 29 and 30.
 Land, slightly rolling.
 Soil, coarse texture, 18 to 26 ins. deep.
 No timber.
 Undergrowth, sagebrush, 1 to 3 ft. high.
 Thin grass.

40.00 S.89° 45' W., on a random line, bet. secs. 19 and 30.
 80.66 Set temp. ¼ sec. cor.
 Intersect W. bdy. of Tp., 2 lks. S. of the cor. of secs. 19, 24, 25 and 30, which is an iron post, hereinbefore described.
 Thence
 N.89° 46' E., on a true line, bet. secs. 19 and 30.
 Over rolling and mountainous land, through scattering timber and undergrowth.
 Desc. 330 ft.
 40.66 Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, for ¼ sec. cor., marked on brass cap

| |
|------|
| ¼S19 |
| S30 |
| 1916 |

From which
 A pinion, 8 ins. diam., brs. N.1½° E., 24 lks. dist., marked ¼S19 BT.
 A cedar, 10 ins. diam., brs. S.15° W., 106 lks. dist., marked ¼S30 BT.
 53.65 Draw, course SE. Asc. 30 ft. to
 60.65 Spur, slopes SE. Desc. 55 ft. to
 70.65 Thence over rolling land.
 80.66 The cor. of secs. 19, 20, 29 and 30.
 Land, rolling and mountainous.

44. Subdivision of T. 26 N., R. 6 E.

Chains.

Soil, coarse texture, 18 to 26 ins. deep.
No timber.
Undergrowth, sagebrush, 1 to 3 ft. high.
Thin grass.

5.00
40.00

S.0° 3' E., bet. secs. 29 and 30.
Over gently rolling land, through scattering undergrowth.
Draw, 10 chs. wide, course NE.
Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, for 1/4 sec. cor., marked on brass cap

1/4 S30 | S29

1916

60.00
80.00

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.
Draw, course NE.
Set an iron post, 3 ft. long, 2 ins. diam., in a mound of stone, for cor. of secs. 29, 30, 31 and 32, marked on brass cap

et. T26N | R6E
S30 | S29
S31 | S32
1916

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.
Land, gently rolling.
Soil, coarse texture, 18 to 26 ins. deep.
No timber.
Undergrowth, sagebrush 1 to 3 ft. high.
Thin grass.

40.00
79.90

N.89° 58' E., on a random line, bet. secs. 29 and 32.
Set temp. 1/4 sec. cor.
Intersect N. and S. line, 44 lks. S. of the cor. of secs. 28, 29, 32 and 33.

Thence

S.89° 39' W., on a true line, bet. secs. 29 and 32.
Over rolling and broken land, through scattering undergrowth and timber.

3.00
6.05
7.72
10.00
14.95
21.26
32.28
39.95

Asc. 30 ft. to
Ridge, brs. NE. and SW. Desc. 55 ft.
Rim rock, brs. NE. and SW.
Canyon, course NE. Asc. 55 ft.
Rim rock, brs. NE. and SW.
Ridge, brs. NE. and SW. Desc. 50 ft. to
Canyon, course NE. Asc. 75 ft. to
Ridge, brs. NE. and SW. Desc. gradually.
Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, in a mound of stone, for 1/4 sec. cor., marked on brass cap

1/4 S29

S32

1916

40.85
45.00
49.25
52.06
58.46
69.95
79.90

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.
Draw, course NE. Asc. to
Low ridge, brs. NE. and SW. Desc. 30 ft.
Rim rock, brs. NW. and SE. Continue descent.
Draw, course NW. Asc. 30 ft. to
Ridge, brs. NE. and SW. Desc. 30 ft. to
Wide draw, course NW. Asc. gradually to
The cor. of secs. 29, 30, 31 and 32.
Land, rolling and broken.

Subdivision of T. 26 N., R. 6 E.

| | |
|---|--|
| chains. | <p>Soil, thin, 6 to 16 ins. deep, limestone subsoil. Timber, scrub cedar and pinion. Undergrowth, holly. Thin grass.</p> |
| <p>40.00 80.70</p> <p>10.80 15.70 16.80 18.20 20.70 22.70 23.90 40.70</p> | <p>S.89° 48' W., on a random line, bet. secs. 30 and 31. Set temp. $\frac{1}{4}$ sec. cor. Intersect W. bdy. of Tp., at the cor. of secs. 25, 30, 31 and 36, which is an iron post, hereinbefore described. Thence N.89° 48' E., on a true line, bet. secs. 30 and 31. Over rolling land, through scattering timber and under- growth. Asc. gradually to Desc. 120 ft. Rim rock, brs. NE. and SW. Continue desc. to Canyon, course NE. Asc. 70 ft. Rim rock, of canyon, brs. NE. and SW. Small ridge, brs. NE. and SW. Desc. 30 ft. to Small canyon, course NE. Asc. 30 ft. to Rim rock, brs. NE. and SW. Thence over gently rolling land. Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap</p> <p style="text-align: center;"> $\frac{1}{4}$S30 $\frac{1}{4}$S31 1916 </p> <p>And raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.</p> |
| <p>73.55 80.70</p> | <p>Draw, course NW. The cor. of secs. 29, 30, 31 and 32. Land, rolling. Soil, thin, 6 to 16 ins. deep, limestone subsoil. Timber, scrub cedar and pinion. Undergrowth, holly. Thin grass.</p> |
| <p>40.00 78.70</p> <p>38.70</p> <p>78.70</p> | <p>S.0° 3' E., on a random line, bet. secs. 31 and 32. Set temp. $\frac{1}{4}$ sec. cor. Intersect S. bdy. of Tp. 30 $\frac{1}{2}$ lks. W. of reestablished cor. of secs. 31 and 32, which is an iron post, hereinbefore described. Thence N.0° 16' W., on a true line, bet. secs. 31 and 32. Over rolling land, through scattering timber and under- growth. Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap</p> <p style="text-align: center;"> $\frac{1}{4}$S31 S32 1916 </p> <p>And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.</p> <p>The cor. of secs. 29, 30, 31 and 32. Land, rolling. Soil, thin, 8 to 18 ins. deep, limestone subsoil. Timber, scattering cedar and pinion. Undergrowth, holly. Thin grass.</p> |

General Description.

This township consists principally of rolling land, except in the northern part, which is mountainous. The surface is covered with a scattering growth of scrub cedar and pinion timber, and schadskill, squawberry and holly undergrowth.

The soil is coarse in texture, rocky, varying from 6 to 26 ins. in depth, underlaid by limestone.

There is a natural cave in the SE. quarter of sec. 10.

Several dirt dams for the impounding of drainage waters have been built in this township.

Beasley's ranch is located in the SW. quarter of sec. 25.

Diagram showing the respective surveys executed by Thomas B. Matthews, U.S.S., and Deane J. Wolff, U.S.T., under instructions for Group No. 55, Arizona.

Book "A"

Township 26 North, Range 6 East.

| | | | | | | |
|--------|--------|--------|--------|--------|--------|--------|
| 5-2-16 | 5-2-16 | 5-2-16 | 5-2-16 | 5-1-16 | 5-1-16 | 5-1-16 |
| 5-2-16 | 6 | 5 | 4 | 3 | 2 | 1 |
| 5-8-16 | 5-8-16 | 5-8-16 | 5-5-16 | 5-5-16 | 5-3-16 | 5-3-16 |
| 5-2-16 | 7 | 8 | 9 | 10 | 11 | 12 |
| 5-8-16 | 5-8-16 | 5-8-16 | 5-9-16 | 5-5-16 | 5-3-16 | 5-3-16 |
| 5-2-16 | 18 | 17 | 16 | 15 | 14 | 13 |
| 5-8-16 | 5-8-16 | 5-6-16 | 5-5-16 | 5-5-16 | 5-3-16 | 5-3-16 |
| 5-2-16 | 19 | 20 | 21 | 22 | 23 | 24 |
| 5-9-16 | 5-6-16 | 5-6-16 | 5-6-16 | 5-6-16 | 5-3-16 | 5-4-16 |
| 5-2-16 | 30 | 29 | 28 | 27 | 26 | 25 |
| 5-6-16 | 5-6-16 | 5-6-16 | 5-6-16 | 5-6-16 | 5-4-16 | 5-4-16 |
| 5-2-16 | 31 | 32 | 33 | 34 | 35 | 36 |
| 5-4-16 | 5-4-16 | 5-4-16 | 5-4-16 | 5-4-16 | 5-2-16 | 5-2-16 |

Surveyed under current group No 66

Blue lines indicate surveys by Thomas B. Matthews, U.S.S. on the various dates shown.

Red lines indicate surveys by Deane J. Wolff, U.S.T., on the various dates shown.

CERTIFICATES OF U.S. SURVEYOR AND U.S. TRANSITMAN.

BOOK 3094

We, Thomas B. Matthews and Deane J. Wolff, U.S. Surveyor and U.S. Transitman, respectively, hereby certify on honor that, in pursuance of special instructions received from the U.S. Surveyor General of Arizona for Group No. 55, Arizona, bearing date of the 8th day of March, 1915, We have well, faithfully, and truly, in our own proper persons and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, resurveyed all those parts or portions of N. bdy. of T. 25 N., R. 6 E., and surveyed all those parts or portions of the west and north boundaries, and the Subdivision lines of

TOWNSHIP 26 NORTH, RANGE 6 EAST,

of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes, and by the diagram on the reverse hereof, as having been executed by us, and under our direction; and we do further certify on honor that all the corners of said resurvey and survey have been reestablished or established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U.S. Surveyor General of Arizona for Group No. 55, and in the specific manner described in our respective field notes, and that the foregoing are the original field notes of such resurveys and surveys,

Thomas B. Matthews
U. S. Surveyor.

Deane J. Wolff
U. S. Transitman.

A P P R O V A L .

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix, Arizona, SEP 28 1915.

The foregoing field notes of the Resurvey of N. bdy. of T. 25 N., R. 6 E., and survey of the West and North bdrs., and the Subdivision lines of

TOWNSHIP 26 NORTH, RANGE 6 EAST,

of the Gila and Salt River Base and Meridian, in the State of Arizona, executed by Thomas B. Matthews, U. S. Surveyor, and Deane J. Wolff, U. S. Transitman, under special instructions, dated March 8, 1915 for Group 55, Arizona, having been critically examined, and the necessary corrections and explanations made on the said field notes, and the resurveys and surveys they describe, are hereby approved.

Francis D. Frost
U.S. Surveyor General of Arizona.

~~I certify that the foregoing transcript of the field notes of the above-described resurveys and surveys in Book "A" of Group 55, has been correctly copied from the original notes on file in this office.~~

U.S. Surveyor General of Arizona.