

3095

Book "B"
4-679

BOOK 3095

JAN 5 1918

49

①

FIELD NOTES

RE-
OF THE SURVEY OF THE

NORTH BOUNDARY OF

TOWNSHIP 25 NORTH, RANGE 5 EAST,

and SURVEY of

NORTH AND WEST BOUNDARIES,

and

SUBDIVISION LINES

of

TOWNSHIP 26 NORTH, RANGE 5 EAST,

Of the Gila and Salt River Base and Meridian,

In the State of Arizona.

EXECUTED BY

Thomas B. Matthews, U. S. Surveyor,

and

Deane J. Wolff, U. S. Transitman,

~~In the capacity of U. S. Surveyor~~, under instructions dated March 8, 1915,
issued by the United States Surveyor General to govern surveys included in
Group No. 55, which were approved by the Commissioner of the General Land
Office, December 14, 1915.

Resurvey & Survey commenced May 2, 1916

Resurvey & Survey completed May 30, 1916.

Executed under Assignment
Instructions dated Apr. 13 & 22, 1916.

3095

3095

✓

1A


3095

Book "B"

Group 5b-----Arizona.

BOOK 3095

INDEX DIAGRAM.

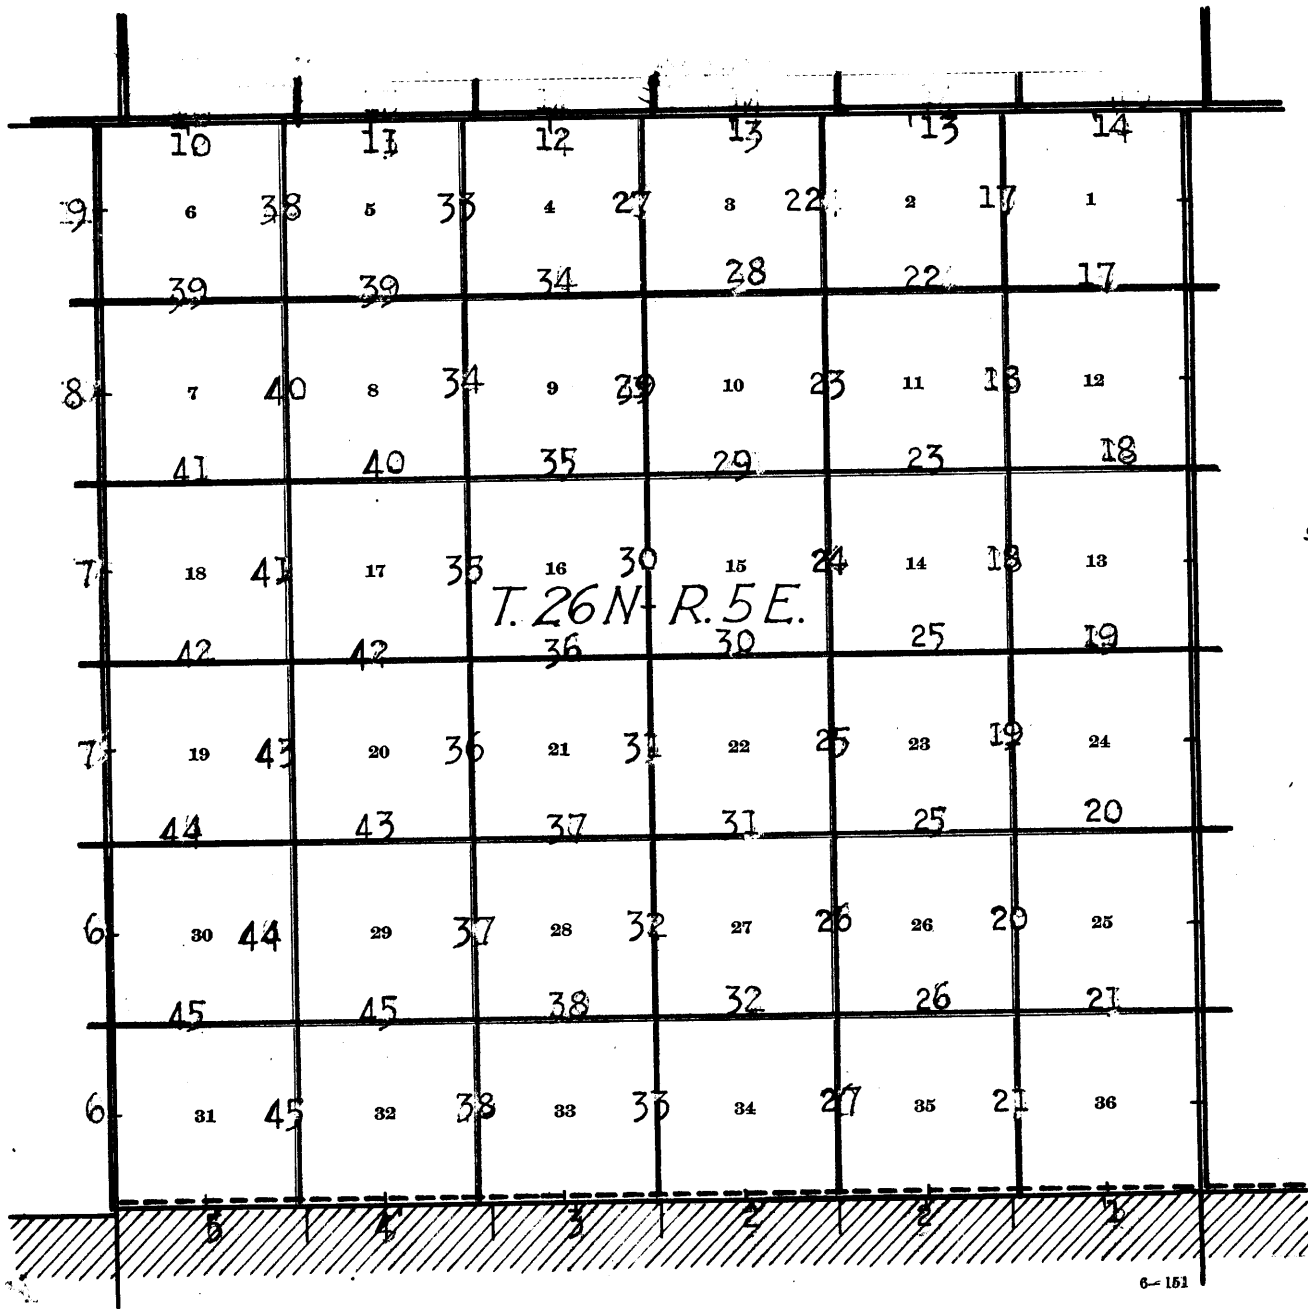

- Lines surveyed under this group.
- Lines resurveyed under this group.
- Accepted surveys.
- //// Areas surveyed as per accepted plats on file.

Resurvey of the N. bdy. of Township 25 North, Range 5 East,
Survey of the North and West bdrs. of Township 26 North, Range 5 E.,
Subdivision of Township 26 North, Range 5 East.

13

Chains.

Resurveys and surveys hereinafter described, executed on dates shown on diagram on page 47 hereof, by Thomas B. Matthews, U.S. Surveyor, and Deane J. Wolff, U.S. Transitman, using Buff and Buff Transit No. 10124, and Young and Sons' light mountain transit No. 8535, respectively, described in Book "A."

39.94 From the original cor. of Ts. 25 and 26 N., Rs. 5 and 6 E., which is a limestone, 20x18x16 ins. above ground, firmly set, marked and witnessed as described by the surveyor-general,
S. 89° 46' W., on a true line, on N. bdy. of sec. 1.
Over slightly rolling land, thru scattering undergrowth.
Intersect the original $\frac{1}{4}$ sec. cor., which is a malpais stone, 14x6x10 ins. above ground, firmly set, marked and witnessed as described by the surveyor general.
Change this cor. to refer to sec. 1 only, by moving the mound of stone from its position north of the cor. to a similar position south of the cor.

0.06 Thence,
N. 89° 34' W., on a true line on N. bdy. of sec. 1 (W. $\frac{1}{2}$).
Over slightly rolling land, thru scattering undergrowth.
(40.00 chs. from the original cor. of Ts. 25 and 26 N., Rs. 5 and 6 E.), set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 36, marked on brass cap,

1/4 S36
1916

and raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.
Continue line and measurement.
8.05 Dim road brs. NE. and SW.
20.05 Ravine, course NE. Ascend 70 ft.
33.70 Enter heavy timber, brs. NE and S.
40.06 (80.00 chs. from the original cor. of Ts. 25 and 26 N., Rs. 5 and 6 E.), set an iron post, 3 ft. long, 3 ins. in diam., 10 ins. in the ground, in a mound of stone, for reestablished cor. of secs. 35 and 36, marked on brass cap,

T26N R5E
S35 | S36
S 1
T25N
1916

from which,
A pinon, 6 ins. in diam., brs. N. 41° E., 151 lks. dist., marked T26N R5E S36BT.
A pinon, 10 ins. in diam., brs. N. 81 $\frac{1}{2}$ ° W., 103 lks. dist., marked T26N R5E S35BT.

40.66 Continue line and measurement.
Intersect the original cor. of secs. 1, 2, 35 and 36, which is a limestone, 9x7x7 ins. above ground, firmly set, marked and witnessed as described by the surveyor general.
Change this cor. to refer to secs. 1 and 2 only, by destroying the bearing trees north of line, and moving the mound of stone from its position west of the cor. to a similar position south of the cor.

Land, slightly rolling.
Soil, loose, sandy loam, mixed with limestone, 3rd rate.
Timber, pinon and cedar.
Undergrowth, scattering sage brush.

2. Resurvey of the N. bdy. of Township 25 North, Range 5 East.

Chains.

From the reestablished cor. of secs. 1 and 2, S.89°19'W., on a true line, on N. bdy. of sec.2. Over level land, thru. heavy timber.

30.00

Draw, course SE.

39.40

(40.00 chs. from the reestablished cor. of secs. 35 and 36.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. of sec. 35, marked on brass cap,

T26N R5E

S35

1916

from which,

A pinon, 12 ins. in diam., brs. N.80°W., 172 lks. dist., marked $\frac{1}{4}$ S 35 B T.

A pinon, 24 ins. in diam., brs. S.16°W., 78 lks. dist., marked $\frac{1}{4}$ S 2 B T.

Continue line and measurement.

39.83

Intersect the original $\frac{1}{4}$ sec. cor., which is a limestone, 12x9x10 ins. above ground, firmly set, marked and witnessed as described by the surveyor-general. Change this cor. to refer to sec. 2 only, by destroying the bearing tree north of line, and moving the mound of stone from its position north of the cor. to a similar position south of the cor.

Thence,

N.89°44'W., on a true line, on N. bdy. of sec. 2, (W. $\frac{1}{2}$).

Over level land, thru. heavy timber.

39.41

Intersect the original cor. of secs. 2, 3, 34 and 35, which is a limestone, 9x8x5 ins. above ground, loosely set, marked and witnessed, as described by the surveyor-general. Change this cor. to refer to secs. 2 and 3 only by destroying the bearing trees north of line, and moving the mound of stone from its position west of the cor. to a similar position south of the cor.

Land, level.

Soil, loose, sandy loam, mixed with lava stone, 3rd rate.

Timber, heavy cedar and pinon.

Undergrowth, scattering sage brush.

From the reestablished cor. of secs. 2 and 3, S.89° 51'W., on a true line, on N. bdy. of sec. 3.

Over slightly rolling land, thru. heavy timber.

0.16

(80.00 chs. from the reestablished cor. of secs. 35 and 36.) Set an iron post, 3 ft. long, 3 ins. in diam., 12 ins. in the ground, in a mound of stone, for reestablished cor. of secs. 34 and 35, marked on brass cap,

T26N R5E

S34 | S35

S 3

T25 N

1916

from which,

A pinon, 16 ins. in diam., brs. N.80°E., 84 lks. dist., marked T26N R5E S35 BT.

A pinon, 8 ins. in diam., brs. N.87 $\frac{1}{2}$ °W., 34 lks. dist., marked T 26N R5E S34BT.

Continue line and measurement.

15.15

Leave timber, brs. NE. and SW.

25.00

Draw, course NE.

35.15

Enter heavy timber, brs. NE. and SW.

39.83

Intersect the original $\frac{1}{4}$ sec. cor., which is a limestone, 12x10x5 ins., loosely set in a mound of stone, marked and witnessed as described by the surveyor-general. Change this cor. to refer to sec. 3 only, by destroying the bearing tree N. of line, and moving the mound of stone from its position N. of the cor. to a similar

Resurvey of the N. bdy. of Township 25 North, Range 5 East. 3

Chains.

position south of the cor. Thence,
N. 89° 56' W., on a true line, on N. bdy. of sec. 3 (W. 1/2).
Over slightly rolling land, thru. heavy undergrowth.
0.33 (40.00 chs. from the reestablished cor. of secs. 34 and 35),
set an iron post 3 ft. long, 1 in. in diam., on bedrock,
in a mound of stone, for reestablished 1/4 sec. cor. of
sec. 34, marked on brass cap,

S34
1916

from which,
A pinon, 10 ins. in diam., brs. N. 63 1/2° W., 69 lks. dist.,
marked 1/4 S 34 BT.
A pinon, 9 ins. in diam., brs. S. 60 1/2° W., 11 lks. dist.,
marked 1/4 S 3 BT.

Continue line and measurement.
39.53 Intersect the original cor. of secs. 3, 4, 33 and 34, which
is a limestone, 12x10x8 ins., above ground, firmly set,
marked and witnessed as described by the surveyor-gen-
eral. Change this cor. to refer to secs. 3 and 4 only,
by destroying the bearing trees north of line, and mov-
ing the mound of stone from its position west of the
cor. to a similar position south of the cor.

Land, slightly rolling.
Soil, sandy and rocky, 3rd rate.
Timber, cedar and pinon.
Undergrowth, scattering sage brush.

From the reestablished cor. of secs. 3 and 4,
N. 85° 51' W., on a true line, on N. bdy. of sec. 4.
Over slightly rolling land, thru. heavy timber.
0.80 (80.00 chs. from the reestablished cor. of secs. 34 and 35),
Set an iron post, 3 ft. long, 3 ins. in diam., 14 ins. in
the ground, in a mound of stone, for reestablished cor.
of secs. 33 and 34, marked on brass cap,

T26N R5E
S33 | S34
S 4
T25N
1916

from which,
A pinon, 7 ins. in diam., brs. N. 9 1/2° E., 135 lks.
dist., marked T26N R5E S34 BT.
A pinon, 14 ins. in diam., brs. N. 61 1/2° W., 69 lks.
dist., marked T26N R5E S33 B T.

Continue line and measurement.
35.05 Intersect the original 1/4 sec. cor., which is a malpais
stone, 6x16x12 ins. above ground, firmly set, marked and
witnessed, as described by the surveyor general. Change
this cor. to refer to sec. 4 only, by moving the mound
of stone from its position N. of the cor., to a similar
position south of the cor.

Thence,
S. 87° 10' W., on a true line on N. bdy. of sec. 4 (W. 1/2).
Over gently rolling land, thru. scattering timber.
5.83 (40.08 chs. -- 40.00 chs. westing -- from the reestablished
cor. of secs. 33 and 34), set an iron post, 3 ft. long,
1 in. in diam., 26 ins. in the ground, for reestablished
1/4 sec. cor., of sec. 33, marked on brass cap,

S33
1916

from which,

4. Resurvey of the N. bdy. of Township 25 North, Range 5 East.

Chains.

- A pinon, 16 ins. in diam., brs. N. 84° W., 362 lks. dist., marked $\frac{1}{4}$ S 33BT.
 A pinon, 18 ins. in diam., brs. S. 34° W., 160 lks. dist., marked $\frac{1}{4}$ S4BT.
- Continue line and measurement.
- 6.85 Enter heavy timber, brs. NW. and SE.
 19.85 Leave timber, brs. N. and SW.
 39.31 Intersect the original cor. of secs. 4, 5, 32 and 33, which is a pinon post, 6 ins. in diam., set, marked and witnessed as described by the surveyor-general. Change this cor. to refer to secs. 4 and 5 only, by filling in the pits N. of the cor., enlarging the pits S. of line to 24x24x12 ins., 6 ft. dist., and raising a mound of earth 4 ft. base, 2 ft. high, S. of cor.
- Land, gently rolling.
 Soil, loose, dark loam, strewn with lava stone, 3rd rate.
 Timber, pinon and juniper.
 Undergrowth, scattering sagebrush.
-
- From the reestablished cor. of secs. 4 and 5,
 N. 88° 59' W., on a true line, on N. bdy. of sec. 5.
 Over gently rolling mesa, thru. scattering undergrowth.
 6.57 (80.13 chs. -- 80.00 chs. westing -- from the reestablished cor. of secs. 33 and 34,) set an iron post 3 ft. long, 3 ins. in diam., 24 ins. in the ground for reestablished cor. of secs. 32 and 33, marked on brass cap,
- T26N R5E
 S32 | S33
 S 5
 T25N
 1916
- dig pits, 24x24x12 ins., in each sec. 6 ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, N. of cor.
- Continue line and measurement.
- 22.55 Enter heavy timber, brs. NW. and SE.
 36.55 Leave heavy timber, brs. N. and SW.
 40.32 Intersect the original $\frac{1}{4}$ sec. cor., which is a pinon post, 4 ins. in diam., set, marked and witnessed as described by the surveyor-general. Change this cor. to refer to sec. 5 only, by moving the mound of earth from its position north of the cor. to a similar position south of the cor.
- Thence,
 S. 89° 50' W., on a true line, on N. bdy. of sec. 5, (W. $\frac{1}{2}$ °).
 Over gently rolling land, thru. scattering undergrowth.
 6.26 (40.01 chs. -- 40.00 chs. westing -- from the reestablished cor. of secs. 32 and 33), Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 32, marked on brass cap,
- S32
 1916
- dig pits, 18x18x12 ins., E. and W. of cor., 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
- Continue line and measurement.
- 24.95 Enter heavy timber, brs. NW. and SE.
 33.85 Dim road brs. NW. and SE.
 39.83 Intersect the original cor. of secs. 5, 6, 31 and 32, which is a malpais stone, 6x16x10 ins. above ground, firmly set, marked and witnessed, as described by the surveyor general. Change this cor. to refer to secs. 5 and 6 only, by destroying the bearing trees north of line, and moving the mound of stone from its position west of the cor. to a similar position south of the cor.

Resurvey of the North bdy. of Township 25 North, Range 5 East. 5

Chains.

Land, gently rolling.
Soil, loose, dark loam, strewn with black lava stone, 3rd rate.
Timber, pinon and juniper.
Undergrowth, scattering sage brush.

6.43 From the reestablished cor. of secs. 5 and 6,
N. 89° 58' W., on a true line, on N. bdy. of sec. 6.
Over gently rolling land, thru heavy timber.
(80.01 chs. -- 80.00 chs. westing -- from the reestablished cor.
of secs. 32 and 33,) Set an iron post, 3 ft. long, 3 ins.
in diam., 24 ins. in the ground, for reestablished cor.
of secs. 31 and 32, marked on brass cap,

T26N R5E
S31 | S32
S 6
T25N
1916

from which,
A pinon, 14 ins. in diam., brs. N. 33° E., 186 lks.
dist., marked T26N R5E S32 BT.
A pinon, 10 ins. in diam., brs. W. 15° W., 99 lks. dist.,
marked T26N R5E S31 BT.

Continue line and measurement.
14.43 Leave heavy timber, brs. NW. and SE.
33.45 Enter heavy timber, brs. NW. and SE.
37.25 Leave heavy timber, brs. N. and S.
39.86 Intersect the original $\frac{1}{4}$ sec. cor., which is a malpais stone
5x15x10 ins. above ground, firmly set, marked and wit-
nessed as described by the surveyor general. Change
this cor. to refer to sec. 6 only, by destroying the bear-
ing tree N. of line, and moving the mound of stone from
its position N. of the cor. to a similar position S. of
the cor.

Thence,
S. 89° 51' W., on a true line, on N. bdy. of sec. 6 (W. $\frac{1}{2}$).
Over gently rolling mesa, through scattering undergrowth.
6.57 (40.00 chs. from the reestablished cor. of secs. 31 and 32),
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 31,
marked on brass cap,

S31
1916

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N.
of cor.

Continue line and measurement.
21.55 Enter scattering timber, brs. N. and S.
40.01 Intersect the cor. of Ts. 25 and 26 N., R. 5 E., which is a
juniper post, set, marked and witnessed, as described
by the surveyor-general, originally set in May, 1894,
for cor. of Ts. 25 and 26 N., Rs. 4 and 5 E., but changed
in July, 1903, to cor. of Ts. 25 and 26 N., R. 5 E. when
closing cor. of Ts. 25 and 26 N., R. 4 E. was set at a
point 3.14 chs. S. 0° 8' W. in the survey of the N. bdy.
of T. 25 N., R. 4 E.

Land, gently rolling.
Soil, loose, dark loam, strewn with lava rocks, 3rd rate.
Timber, juniper and pinon.
Undergrowth, scattering sage brush.

6. Survey of the West bdy. of Township 26 North Range 5 East.

Chains.

From the cor. of Ts. 25 and 26 N., R. 5 E., hereinbefore described,

North, bet. secs. 31 and 36.

Over gently rolling mesa, thru scattering timber and undergrowth.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

S36	S31
-----	-----

1916

dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

80.00 Set an iron post 3 ft. long, 3 ins. in diam., 24 ins. in the ground, for cor. of secs. 25, 30, 31 and 36, marked on brass cap,

T26N	
R4E	R5E
S25	S30
S36	S31
1916	

from which,

A juniper, 12 ins. in diam., brs. N. 64° E., 226 lks. dist., marked T26N R5E S30 BT.

A juniper, 12 ins. in diam., brs. S. $19\frac{1}{2}^\circ$ E., 339 lks. dist., marked T26N R5E S31 BT.

A juniper, 10 ins. in diam., brs. S. 15° W., 503 lks. dist., marked T26N R4E S36 BT.

A juniper, 12 ins. diam., brs. N. $42\frac{1}{2}^\circ$ W., 344 lks. dist., marked T26N R4E S25 BT.

Land, gently rolling.

Soil, loose, dark loam, strewn with black lava; 2nd rate.

Timber, juniper and pinon.

Undergrowth, sage brush.

North, bet. secs. 25 and 30.

Over gently rolling land, through scattering timber and undergrowth.

34.40 Dim road, brs. East W.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

S25	S30
-----	-----

1916

dig pits 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

80.00 Set an iron post 3 ft. long, 3 ins. in diam., 24 ins. in the ground, for cor. of secs. 19, 24, 25 and 30, marked on brass cap,

T26N	
R4E	R5E
S24	S19
S25	S30
1916	

from which,


A juniper, 8 ins. in diam., brs. N. 32° E., 156 lks. dist., marked T26N R5E S19 BT.

Chains.

A juniper, 12 ins. diam., brs. S.52 $\frac{3}{4}$ ° E., 220 lks. dist., marked T26N R5E S30 BT.
 A pinon, 14 ins. diam., brs. S.39° W., 209 lks. dist., marked T26N R4E S25 BT.
 A pinon, 12 ins. diam., brs. N.49 $\frac{1}{2}$ ° W., 89 lks. dist., marked T26N R4E S24 BT.
 Land, gently rolling.
 Soil, loose, sandy loam; 2nd rate.
 Timber, juniper and pinon.
 Undergrowth, sagebrush.

North bet. secs. 19 and 24.
 Over gently rolling land, through scattering timber and undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



From which


A juniper, 16 ins. diam., brs. N.70° E., 316 lks. dist., marked $\frac{1}{4}$ S19 BT.

A juniper, 12 ins. diam., brs. S.34 $\frac{1}{2}$ ° W., 179 lks. dist., marked $\frac{1}{4}$ S24 BT.

44.00 Old road, brs. NW. and SE.

77.40 Old road, brs. NW. and SE.

80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 13, 18, 19 and 24, marked on brass cap



From which

A pinon, 10 ins. diam., brs. N.16 $\frac{1}{2}$ ° E., 135 lks. dist., marked T26N R5E S18 BT.

A juniper, 10 ins. diam., brs. S.62 $\frac{1}{2}$ ° E., 78 lks. dist., marked T26N R5E S19 BT.

A juniper, 24 ins. diam., brs. S.41° W., 495 lks. dist., marked T26N R4E S24 BT.

A juniper, 20 ins. diam., brs. N.30 $\frac{3}{4}$ ° W., 266 lks. dist., marked T26N R4E S13 BT.

Land, gently rolling.

Soil, loose, sandy loam; limestone formation; 2nd rate.

Timber, juniper and pinon.

Undergrowth, sagebrush.

North bet. secs. 13 and 18.
 Over gently rolling land, through scattering timber and undergrowth.

10.00 Asc. 120 ft.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

Chains.

1/4 S13	S18
1916	

71.00
80.00

From which
 A pinon, 7 ins. diam., brs. S. 55° E., 20 lks. dist., marked 1/4 S18 BT.
 A pinon, 16 ins. diam., brs. N.14° W., 113 lks. dist., marked 1/4 S13 BT.
 Low spur, slopes E. Thence along E. slope.
 Low spur, slopes E.
 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 7, 12, 13 and 18, marked on brass cap

T26N	
R4E	R5E
S12	S 7
S13	S18
1916	

From which
 A pinon, 10 ins. diam., brs. N.37° E., 215 lks. dist., marked T26N R5E S7 BT.
 A juniper, 7 ins. diam., brs. S.70 1/4° E., 12 lks. dist., marked T26N R5E S18 BT.
 A pinon, 10 ins. diam., brs. S.53° W., 491 lks. dist., marked T26N R4E S13 BT.
 A juniper, 12 ins. diam., brs. N.28° W., 300 lks. dist., marked T26N R4E S12 BT.
 Land, rolling.
 Soil, loose, dark loam, strewn with black lava; 3rd rate.
 Timber, pinon and juniper.
 Undergrowth, sagebrush.

40.00

North bet. secs. 7 and 12.
 Over rolling land, through scattering timber and undergrowth.
 Desc. 105 ft.
 Thence over gently rolling land.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap

1/4 S12	S7
1916	

80.00

From which
 A pinon, 12 ins. diam., brs. N.7° E., 74 lks. dist., marked 1/4 S7 BT.
 A juniper, 8 ins. diam., brs. N.33° W., 46 lks. dist., marked 1/4 S12 BT.
 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 1, 6, 7 and 12, marked on brass cap

T26N	
R4E	R5E
S 1	S 6
S12	S 7
1916	

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.
 Land, rolling and gently rolling.
 Soil, loose, dark loam, strewn with black lava rocks; 3rd rate.
 Timber, pinon and juniper.

Survey of West Boundary of T. 26 N., R. 5 E.

Chains.

Undergrowth, sagebrush.

North bet. secs. 1 and 6.

Over gently rolling land, through scattering timber and undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 1 S 6
1916

From which

A pinon, 10 ins. diam., brs. S. $36\frac{3}{4}^{\circ}$ E., 24 lks. dist., marked $\frac{1}{4}$ S6 BT.

A juniper, 6 ins. diam., brs. S. $60\frac{1}{2}^{\circ}$ W., 114 lks. dist., marked $\frac{1}{4}$ S1 BT.

50.00 Enter heavy timber.

80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of Tps. 26 N., Rs. 4 and 5 E., marked on brass cap

S 1 S 6
R4E R5E
T26N
1916

From which

A juniper, 10 ins. diam., brs. S. $72\frac{1}{2}^{\circ}$ E., 16 lks. dist., marked T26N R5E S6 BT.

A pinon, 18 ins. diam., brs. S. 78° W., 138 lks. dist., marked T26N R4E S1 BT.

Land, gently rolling.

Soil, loose, coarse, rocky loam; 3rd rate.

Timber, pinon and juniper.

Undergrowth, sagebrush.

Chains.

- Survey commenced May 22, 1916, and proceeded with level and
 spirit level mountain transit No. 10,123, with Baker
 solar attachment. For description of instrument, cer-
 tificates of approval and tests of instrument, see Book
 "A".
- 1.00 From the cor. of Tps. 26 N., Rs. 5 and 6 E., which
 is an iron post, described in Book "A", 11.40 chs. N.
 89° 48' W., of the cor. of Ts. 27 N., Rs. 5 and 6 E.,
 which is an iron post, described in Book "C";
- 1.21 West on a random line, along the N. bdy. of T. 26 N., R.
 5 E., setting temporary $\frac{1}{4}$ sec. and sec. cors. for the
 areas N. of line at intervals of 40.00 chs. from the
 cor. of Ts. 27 N., Rs. 5 and 6 E., and temporary $\frac{1}{4}$ sec.
 and sec. cors. for the areas S. of line at intervals of
 40.00 chs. from the cor. of Ts. 26 N., Rs. 5 and 6 E.,
 and at 472.65 chs. from the cor. of Ts. 26 N., Rs. 5
 and 6 E., intersect the W. bdy. of T. 26 N., R. 5 E.,
 1.21 chs. S. of the cor. of Ts. 26 N., Rs. 4 and 5 E., which
 is an iron post, hereinbefore described. The falling
 answers to a correction of 0° 9', or 20 lks. N. per
 mile, counting from the NE. cor. of the Tp.; therefore
- S. 89° 51' E., on a true line, along the N. bdy. of Sec. 6,
 T. 26 N., R. 5 E.
- Over gently rolling land, through scattering timber and
 undergrowth.
- Asc. slightly.
- 3.72 The cor. of Ts. 27 N., Rs. 4 and 5 E., which is an iron
 post, described in Book "D".
- 12.95 Low rocky ridge, brs. NW. and SE. Desc. gradually.
- 32.65 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor. of sec. 6, marked on brass cap,
- $\frac{1}{4}$ S 6
1916
- From which
- A juniper, 10 ins. diam., brs. S. 34° W., 157 lks. dist.
 marked $\frac{1}{4}$ S 6 BT.
- No other trees within limits. Raise a mound of stone,
 2 ft. base, $1\frac{1}{2}$ ft. high, S. of cor;
- 44.05 (40.33 chs. from the cor. of Ts. 27 N., Rs. 4 and 5 E.)
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor. of sec. 31, marked on brass cap,
- $\frac{1}{4}$ S 31
1916
- From which
- A pinon, 14 ins. diam., brs. N. $16\frac{1}{2}^{\circ}$ E., 189 lks. dist.,
 marked $\frac{1}{4}$ S 31 BT.
- A pinon, 10 ins. diam., brs. N. $21\frac{1}{2}^{\circ}$ E., 206 lks. dist.,
 marked $\frac{1}{4}$ S 31 BT.
- 72.65 Set an iron post, 3 ft. long, 3 ins. diam., 26 ins. in the
 ground, for cor. of secs. 5 and 6, T. 26 N., R. 5 E.,
 marked on brass cap
- T27N R5E
S 31
S 6 S 5
T26N R5E
1916
- From which
- A pinon, 7 ins. diam., brs. S. 53° E., 20 lks. dist.,
 marked T26N R5E S 5 BT.
- A pinon, 7 ins. diam., brs. S. $45\frac{1}{2}^{\circ}$ W., 78 lks. dist.,
 marked T26N R5E S 6 BT.
- Land, level and gently rolling.
 Soil, coarse, rocky; 12 to 18 ins. deep; 3rd rate.

Survey of North Boundary of T. 26 N., R. 5 E.

11.

Chains.

Timber, scrub cedar and pinion.
Undergrowth, sagebrush.
Wood grass.

11.40

S. 89° 51' E., on a true line, along the N. bdy. of sec. 5,
T. 26 N., R. 5 E.
Over level land, through scattering timber and undergrowth.
(80.33 chs. from the cor. of Ts. 27 N., Rs. 4 and 5 E.)
Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the
ground, for cor. of secs. 31 and 32, T. 27 N., R. 5 E.,
marked on brass cap

T27N R5E
S31 S32
S 5
T26N R5E
1916

40.00

From which
A cedar, 8 ins. diam., brs. N. 113° E., 134 lks. dist.,
marked T27N R5E S32 BT.
A pinion, 12 ins. diam., brs. N. 68 1/4° W., 189 lks. dist.,
marked T27N R5E S31 BT.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for 1/4 sec. cor. of sec. 5, marked on brass cap,

1/4 S 5
1916

51.40

From which
A cedar, 10 ins. diam., brs. N. 84 1/2° E., 115 lks. dist.,
marked 1/4 S32 BT.
A cedar, 12 ins. diam., brs. S. 44 1/2° E., 282 lks. dist.,
marked 1/4 S5 BT.
(40.00 chs. from the cor. of secs. 31 and 32, T. 27 N., R.
5 E.)
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for 1/4 sec. cor. of sec. 32, marked on brass cap,

1/4 S32
1916

80.00

From which
A pinion, 12 ins. diam., brs. N. 49 1/2° E., 106 lks. dist.,
marked 1/4 S32 BT.
A pinion, 8 ins. diam., brs. S. 10° W., 164 lks. dist.,
marked 1/4 S5 BT.
Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the
ground, for cor. of secs. 4 and 5, T. 26 N., R. 5 E.,
marked on brass cap

T27N R5E
S32
S 5 S 4
T26N R5E
1916

From which
A pinion, 10 ins. diam., brs. S. 88° E., 160 lks. dist.,
marked T26N R5E S4 BT.
A juniper, 8 ins. diam., brs. S. 81 1/4° W., 202 lks. dist.,
marked T26N R5E S5 BT.
Land, level.
Soil, coarse, 16 to 20 ins. deep; 3rd rate.
Timber, scrub cedar and pinion.
Undergrowth, sagebrush.
Fair grass.

412 Survey of North Boundary of T. 26 N., R. 5 E.

Chains.

11.40 S. $89^{\circ} 51'$ E., on a true line, along the N. bdy. of sec. 4, T. 26 N., R. 5 E.
Over level land, through scattering timber and undergrowth. (80.00 chs. from the cor. of secs. 31 and 32, T. 27 N., R. 5 E.)
Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 32 and 33, T. 27 N., R. 5 E., marked on brass cap

T27N	R5E
S32	S33
S 4	
T26N	R5E
1916	

40.00 From which
A pinion, 10 ins. diam., brs. N. $32\frac{1}{2}^{\circ}$ E., 170 lks. dist., marked T27N R5E S33 BT.
A pinion, 12 ins. diam., brs. N. $71\frac{1}{2}^{\circ}$ W., 194 lks. dist., marked T27N R5E S32 BT.
Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, for $\frac{1}{4}$ sec. cor. of sec. 4, marked on brass cap,

$\frac{1}{4}$ S 4
1916

51.40 From which
A pinion, 10 ins. diam., brs. N. $12\frac{1}{4}^{\circ}$ E., 126 lks. dist., marked $\frac{1}{4}$ S33 BT.
A pinion, 14 ins. diam., brs. S. 41° W., 150 lks. dist., marked $\frac{1}{4}$ S4 BT.
(40.00 chs. from the cor. of secs. 32 and 33, T. 27 N., R. 5 E.)
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 33, marked on brass cap,

$\frac{1}{4}$ S33
1916

80.00 From which
A pinion, 6 ins. diam., brs. N. $12\frac{1}{2}^{\circ}$ W., 27 lks. dist., marked $\frac{1}{4}$ S33 BT.
A pinion, 18 ins. diam., brs. S. $63\frac{1}{4}^{\circ}$ E., 144 lks. dist., marked $\frac{1}{4}$ S4 BT.
Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 3 and 4, T. 26 N., R. 5 E., marked on brass cap

T27N	R5E
S33	
S 4	S 3
T26N	R5E
1916	

From which
A pinion, 18 ins. diam., brs. S. 15° E., 97 lks. dist., marked T26N R5E S3 BT.
A pinion, 10 ins. diam., brs. S. 79° W., 60 lks. dist., marked T26N R5E S4 BT.
Land, level.
Soil, coarse, 12 to 18 ins. deep; 3rd rate.
Timber, scrub cedar and pinion.
Undergrowth, sagebrush and holly brush.
Fair grass.

S. $89^{\circ} 51'$ E., on a true line, along the N. bdy. of sec. 3, T. 26 N., R. 5 E.

Survey of North Boundary of T. 26 N., R. 5 E.

Chains.

11.40 Over level land, through scattering timber and undergrowth. (80.00 chs. from the cor. of secs. 32 and 33, T. 27 N., R. 5 E.)
 Set an iron post, 3 ft. long, 3 ins. diam., 16 ins. in the ground, in a mound of stone, for cor. of secs. 33 and 34, T. 27 N., R. 5 E., marked on brass cap

T27N	R5E
S33	S34
<hr/>	
S 3	
T26N	R5E
1916	

From which

A pinion, 12 ins. diam., brs. N.43 $\frac{1}{2}$ ° E., 259 lks. dist., marked T27N R5E S34 BT.

A pinion, 10 ins. diam., brs. N.38° W., 302 lks. dist., marked T27N R5E S33 BT.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 3, marked on brass cap,

<u>$\frac{1}{4}$S 3</u>
1916

From which

A juniper, 16 ins. diam., brs. N.74° W., 88 lks. dist., marked $\frac{1}{4}$ S34 BT.

A juniper, 12 ins. diam., brs. S.2° E., 169 lks. dist., marked $\frac{1}{4}$ S3 BT.

51.40 (40.00 chs. from the cor. of secs. 33 and 34, T. 27 N., R. 5 E.)
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 34, marked on brass cap.

<u>$\frac{1}{4}$S34</u>
1916

And raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.

80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 2 and 3, T. 26 N., R. 5 E., marked on brass cap

T27N	R5E
S34	
<hr/>	
S 3	S 2
T26N	R5E
1916	

From which

A pinion, 12 ins diam., brs. S.8 $\frac{1}{4}$ ° E., 156 lks. dist., marked T26N R5E S2 BT.

A cedar, 8 ins. diam., brs. S.14 $\frac{1}{4}$ ° W., 83 lks. dist., marked T26N R5E S3 BT.

Land, level.

Soil, coarse, 16 to 20 ins. deep; 3rd rate.

Timber, scrub cedar and pinion.

Undergrowth, sage and holly brush.

Fair grass.

11.40 S.89° 51' E., on a true line, along the N. bdy. of sec. 2, T. 26 N., R. 5 E.

Over level land, through scattering timber and undergrowth. (80.00 chs. from the cor. of secs. 33 and 34, T. 27 N., R. 5 E.)

Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 34 and 35, T. 27 N., R. 5 E.,

140. Survey of North Boundary of T. 26 N., R. 5 E.

Chains.

marked on brass cap

T27N	R5E
S34	S35
S	2
T26N	R5E
1916	

From which

A pinion, 10 ins. diam., brs. N.16 $\frac{1}{2}$ ° E., 134 lks. dist., marked T27N R5E S35 BT.

A pinion, 8 ins. diam., brs. N.41° W., 107 lks. dist., marked T27N R5E S34 BT.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 2, marked on brass cap,

$\frac{1}{4}$ S	2
1916	

From which

A cedar, 12 ins. diam., brs. S.30 $\frac{1}{2}$ ° W., 61 lks. dist., marked $\frac{1}{4}$ S2 BT.No other trees within limits. Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, S. of cor.

51.40 (40.00 chs. from the cor. of secs. 34 and 35, T. 27 N., R. 5 E.)

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 35, marked on brass cap,

$\frac{1}{4}$ S	35
-----------------	----

1916

A pinion, 10 ins. diam., brs. N.17 $\frac{1}{2}$ ° W., 50 lks. dist., marked $\frac{1}{4}$ S35 BT.No other trees within limits. Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 1 and 2, T. 26 N., R. 5 E., marked on brass cap

T27N	R5E
S35	S1
S	2
T26N	R5E
1916	

From which

A pinion, 12 ins. diam., brs. S.4 $\frac{1}{2}$ ° E., 501 lks. dist., marked T26N R5E S1 BT.A pinion, 14 ins. diam., brs. S.67 $\frac{1}{2}$ ° W., 174 lks. dist., marked T26N R5E S2 BT.

Land, level.

Soil, coarse texture, 12 to 20 ins. deep; limestone formation; scattering limestone on surface; 3rd rate.

Timber, scrub cedar and pinion.

Undergrowth, sagebrush and holly brush.

Fair grass.

S.89° 51' E., on a true line, along the N. bdy. of sec. 1, T. 26 N., R. 5 E.

Over slightly rolling land, through scattering timber and undergrowth.

11.40 (80.00 chs. from the cor. of secs. 34 and 35, T. 27 N., R. 5 E.)

Set an iron post, 3 ft. long, 3 ins. diam., 10 ins. in the ground, in a mound of stone, for cor. of secs. 35 and 36, T. 27 N., R. 5 E., marked on brass cap

Survey of North Boundary of T. 26 N., R. 5 E.

Chains.

T27N R5E
S35 S36
S 1
T26N R5E
1916

From which
A pinon, 14 ins. diam., brs. N.6° E., 73 lks. dist.,
marked T27N R5E S36 BT.
A pinon, 10 ins. diam., brs. N.37½° W., 94 lks. dist.,
marked T27N R5E S35 BT.
39.70 Road, brs. NE. and SW.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for ¼ sec. cor. of sec. 1, marked on brass cap,

¼ S 1
1916

From which
A juniper, 10 ins. diam., brs. N.48° E., 148 lks. dist.,
marked ¼ S36 BT.
A juniper, 8 ins. diam., brs. S.45° E., 108 lks. dist.,
marked ¼ S1 BT.
51.40 (40.00 chs. from the cor. of secs. 35 and 36, R. 27 N., R.
5 E.)
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for ¼ sec. cor. of sec. 36, marked on brass cap,
¼ S36

1916

From which
A juniper, 16 ins. diam., brs. N.49½° W., 220 lks. dist.,
marked ¼ S36 BT.
A pinon, 12 ins. diam., brs. S.23½° E., 100 lks. dist.,
marked ¼ S1 BT.
80.00 The cor. of Ts. 26 N., Rs. 5 and 6 E. described in Book "A."
Land, slightly rolling.
Soil, coarse texture, 12 to 16 ins. deep; 3rd rate.
Timber, scattering scrub cedar and pinon.
Undergrowth, sagebrush 18 ins. high.
Fair grass.

Boundaries of T. 26 N., R. 5 E.
Latitudes, departures and closing errors.

Line designated.	True bearing.	Dist.	Latitudes		Departures.	
			N.	S.	E.	W.
South Boundary.	S. 89° 46' W.	39.94		.16		39.94
	N. 89° 34' W.	40.66	.31			40.66
	S. 89° 19' W.	39.83		.47		39.83
	N. 89° 44' W.	39.41	.18			39.41
	S. 89° 51' W.	39.83		.10		39.83
	N. 80° 56' W.	39.53	.05			39.53
	N. 85° 51' W.	35.06	2.54			34.07
	S. 87° 10' W.	39.31		1.94		39.26
	N. 88° 59' W.	40.32	.72			40.31
	S. 89° 50' W.	39.83		.12		39.83
	N. 89° 58' W.	39.86	.02			39.86
	S. 89° 51' W.	40.01		.10		40.01
West Boundary	North	480.00	480.00			
North Boundary	S. 89° 51' E.	472.65		1.24	472.65	
East Boundary	South	480.00		480.00		
Convergency.					.52	
Totals			483.82	484.13	473.17	473.44
				483.82		473.17
Error in latitude.			0.01	0.31		
Error in departure						0.27

Chains.

From the cor. of secs. 1 and 2, on the N. bdy. of the Tp., which is an iron post, hereinbefore described,

Thence S.0° 1' E., bet. secs. 1 and 2.

Over gently rolling land, through scattering timber and undergrowth.

20.00 Small draw, course SE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap

1/4 S 2 | S1

1916

From which

A pinion, 10 ins. diam., brs. N.5° E., 388 lks. dist., marked 1/4 S1 BT.

A pinion, 10 ins. diam., brs. S.49° W., 132 lks. dist., marked 1/4 S2 BT.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 1, 2, 11 and 12, marked on brass cap

T26N | R5E

S 2 | S 1

---|---

S11 | S12

1916

A cedar, 9 ins. diam., brs. N.24° E., 126 lks. dist., marked T26N R5E S1 BT.

A pinion, 8 ins. diam., brs. S.34° W., 285 lks. dist., marked T26N R5E S11 BT.

A cedar, 6 ins. diam., brs. N.35 1/4° W., 187 lks. dist., marked T26N R5E S2 BT.

No other trees within limits. Dig pits, 18 X 18 X 12 ins., in each sec., 5 1/2 ft. dist.; and raise a mound of earth, 4 ft. base, 2 ft. high, N. of cor.

Land, gently rolling.

Soil, coarse texture, 26 ins. deep.

Timber, scrub cedar and pinion.

Undergrowth, scattering sagebrush, 12 ins. high.

Fair grass.

40.00 S.89° 51' E., on a random line, bet. secs. 1 and 12. Set temp. 1/4 sec. cor.

79.95 Intersect E. bdy. of Tp., 2 lks. S. of the cor. of secs. 1, 6; 7 and 12, which is an iron post, described in Book "A".

Thence

N.89° 52' W., on a true line, bet. secs. 1 and 12.

Over level land, through scattering timber.

39.97 1/2 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap

1/4 S 1

---|---

S12

1916

And raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.

60.45 Road, brs. NE. and SW.

79.95 The cor. of secs. 1, 2, 11 and 12.

Land, level.

Soil, coarse texture, 26 ins. deep.

Timber, very scattering cedar.

Good grass.

Chains.

40.00 S.0° 1' E., bet. secs. 11 and 12.
 Over level land, through scattering cedar and undergrowth.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S11 | S12
 1916

80.00 And raise a mound of stone, 3 ft. base, 3 ft. high, W.
 of cor.
 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 11, 12, 13 and 14, marked on
 brass cap

T26N | R5E
 S11 | S12
 S14 | S13
 1916

From which
 A cedar, 14 ins. diam., brs. N.49 $\frac{1}{4}$ ° E., 54 lks. dist.,
 marked T26N R5E S12 BT.
 A pinon, 12 ins. diam., brs. S.27 $\frac{1}{2}$ ° E., 346 lks. dist.,
 marked T26N R5E S13 BT.
 A pinon, 12 ins. diam., brs. S.16 $\frac{3}{4}$ ° W., 93 lks. dist.,
 marked T26N R5E S14 BT.
 A pinon, 12 ins. diam., brs. N.38° W., 204 lks. dist.,
 marked T26N R5E S11 BT.
 Land, level.
 Soil, coarse texture; 26 ins. deep.
 Timber, scattering cedar and pinon.
 Undergrowth, sagebrush 1 ft. high.
 Good grass.

40.00 S.89° 52' E., on a random line, bet. secs. 12 and 13.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.98 Intersect E. bdy. of Tp., 10 lks. N. of the cor. of secs.
 7, 12, 13 and 18, which is an iron post, described in
 Book "A".

Thence
 N.89° 48' W., on a true line, bet. secs. 12 and 13.
 Over gently rolling land, through scattering timber and
 undergrowth.

4.00 Old road, brs. NE. and SW.
 39.99 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S12
 S13
 1916

73.15 And raise a mound of stone, 3 ft. base, 3 ft. high, N.
 of cor.
 79.98 Road, brs. NE. and SW.
 The cor. of secs. 11, 12, 13 and 14.
 Land, gently rolling.
 Soil, coarse texture; 26 ins. deep.
 Timber, scattering cedar and pinon.
 Undergrowth, broom weed, 1 ft. high.
 Good grass.

10.00 S.0° 1' E., bet. secs. 13 and 14.
 Over rolling land, through scattering timber and undergrowth.
 Desc. 50 ft.
 15.80 Road, brs. NE. and SW.
 19.96 Draw, course NE.

Subdivision of T. 26 N., R. 5 E.

Chains.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, in a mound of stone, for 1/4 sec. cor., marked on brass cap

1/4 S14 | S13
1916

And raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.

50.00 Draw, course SE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 13, 14, 23 and 24, marked on brass cap

T26N | R5E
S14 | S13
S23 | S24
1916

And raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.

Land, rolling.
Soil, coarse texture, 26 ins. deep.
Timber, very scattering cedar and pinion.
Undergrowth, broom weed, 1 ft. high.
Fair grass.

40.00 S.89° 48' E., on a random line, bet. secs. 13 and 24.
Set temp. 1/4 sec. cor.

80.02 Intersect E. bdy. of T., 10 lks. N. of the cor. of secs. 13, 18, 19 and 24, which is an iron post, described in Book "A".

Thence
N.89° 44' W., on a true line, bet. secs. 13 and 24.
Over slightly rolling land, through scattering timber and undergrowth.

40.01 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, for 1/4 sec. cor., marked on brass cap

1/4 S13
S24
1916

From which
A pinion, 12 ins. diam., brs. N.39 3/4° W., 222 lks. dist., marked 1/4 S13 BT.
A pinion, 10 ins. diam., brs. S.79° E., 386 lks. dist., marked 1/4 S24 BT.

80.02 The cor. of secs. 13, 14, 23 and 24.

Land, slightly rolling.
Soil, coarse texture, 16 ins. deep.
Timber, scattering scrub cedar and pinion.
Undergrowth, sagebrush 1 ft. high.
Good grass.

40.00 S.0° 1' E., bet. secs. 23 and 24.
Over level land, through scattering timber.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap

1/4 S23 | S24
1916

And raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.

22. 20 Subdivision of T. 26 N., R. 5 E.

Chains.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground, in a mound of stone, for cor. of secs. 23, 24, 25 and 26, marked on brass cap.

T26N	R5E
S23	S24
<hr/>	
S26	S25
1916	

From which
 A pinion, 10 ins. diam., brs. N.53½° E., 79 lks. dist., marked T26N R5E S24 BT.
 A pinion, 12 ins. diam., brs. S.29° E., 124 lks. dist., marked T26N R5E S25 BT.
 A pinion, 18 ins. diam., brs. S.11½° W., 115 lks. dist., marked T26N R5E S26 BT.
 A cedar, 12 ins. diam., brs. N.60¼° W., 190 lks. dist., marked T26N R5E S23 BT.

Land, level.
 Soil, coarse texture; 26 ins. deep.
 Timber, very scattering cedar and pinion.
 Good grass.

40.00 S.89° 44' E., on a random line, bet. secs. 24 and 25.
 Set temp. ¼ sec. cor.

80.05 Intersect E. bdy. of Tp., 9 lks. S. of the cor. of secs. 19, 24, 25 and 30, which is an iron post, described in Book "A".

Thence
 N.89° 48' W., on a true line, bet. secs. 24 and 25.
 Over rolling and broken land, through scattering timber.
 Desc. 175 ft. to

20.05 Draw, course SE. Asc. gradually.

40.02½ Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

¼S24	
S25	
<hr/>	
1916	

From which
 A pinion, 14 ins. diam., brs. N.72¼° W., 27 lks. dist., marked ¼S24 BT.
 A pinion, 12 ins. diam., brs. S.22¼° W., 32 lks. dist., marked ¼S25 BT.

45.70 Old road, brs. NW. and SE.
 50.00 Low ridge, brs. N. and S. Desc. gradually to
 60.05 Small draw, course NE.
 80.05 The cor. of secs. 23, 24, 25 and 26.
 Land, rolling and broken.
 Soil, coarse texture, 26 ins. deep.
 Timber, scrub cedar and pinion.
 Fair grass.

S.0° 1' E., bet. secs. 25 and 26.
 Over slightly rolling land, through scattering timber and undergrowth.

5.70 Small draw, course NE.
 16.50 Leave timber,
 30.00 Enter scattering timber.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

¼S26	S25
<hr/>	
1916	

Chains.

From which
 A cedar, 9 ins. diam., brs. S.77° E., 71 lks. dist.,
 marked $\frac{1}{4}$ S25 BT.
 A cedar, 10 ins. diam., brs. S.59 $\frac{1}{2}$ ° W., 134 lks. dist.,
 marked $\frac{1}{4}$ S26 BT.
 45.00 Enter heavy timber.
 48.50 Draw, course NE.
 55.00 Leave heavy, enter scattering timber.
 60.00 Leave scattering timber.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the
 ground, in a mound of stone, for cor. of secs. 25, 26,
 35 and 36, marked on brass cap

T26N	R5E
S26	S25
S35	S36
1916	

And raise a mound of stone, 3 ft. base, 3 ft. high, W.
 of cor.
 Land, slightly rolling.
 Soil, coarse texture, 16 to 26 ins. deep Limestone sur-
 face and subsoil.
 Timber, cedar and pinon.
 Undergrowth, scattering holly brush.
 Fair grass.

40.00 S.89° 48' E., on a random line, bet secs. 25 and 36.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.20 Intersect the E. bdy. of the Tp., 7 lks. N. of the cor. of
 secs. 25, 30, 31 and 36, which is an iron post, described
 in Book "A".
 Thence
 N.89° 45' W., on a true line, bet. secs. 25 and 36.
 Over slightly rolling land, through scattering timber and
 undergrowth.
 17.70 Shallow draw, course SE. Asc. gradually to
 33.40 Low ridge, brs. N. and S. Desc. gradually.
 40.10 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S25
S36
1916

From which
 A pinon, 10 ins. diam., brs. N.56° E., 97 lks. dist.,
 marked $\frac{1}{4}$ S25 BT.
 A pinon, 10 ins. diam., brs. S.16° W., 76 lks. dist.,
 marked $\frac{1}{4}$ S36 BT.
 45.20 Leave scattering timber.
 65.20 Enter scattering timber.
 80.20 The cor. of secs. 25, 26, 35 and 36.
 Land, slightly rolling.
 Soil, coarse texture, 10 to 20 ins. deep.
 Timber, scattering cedar and pinon.
 Undergrowth, sagebrush 1 ft. high.
 Fair grass.

40.00 S.0° 1' E., on a random line, bet. secs. 35 and 36.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.26 Intersect the S. bdy. of the Tp. 32 lks. W. of reestablished
 the cor. of secs. 35 and 36, which is an iron post,
 as hereinbefore described.
 Thence
 N.0° 15' W., on a true line, bet. secs. 35 and 36.


Subdivision of T. 26 N., R. 5 E.

Chains.

Over slightly rolling land, through scattering timber and undergrowth.

8.25
40.26

Leave timber.
Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap



And raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.


55.25
60.00
80.26

Enter scattering timber.
Leave scattering timber.
The cor. of secs. 25, 26, 35 and 36.
Land, slightly rolling.
Soil, coarse texture, 16 to 26 ins. deep. Limestone on surface and limestone subsoil.
Timber, scrub cedar and pinion.
Undergrowth, holly brush.
Fair grass.

From the cor. of secs. 2 and 3, on the N. bdy. of the Tp., which is an iron post, described hereinbefore, S.0° 1' E., bet. secs. 2 and 3.

11.50
40.00


Over slightly rolling land, through scattering timber.
Small draw, course E.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



From which
A pinion, 16 ins. diam., brs. N.69° E., 185 lks dist., marked $\frac{1}{4}S2$ BT.
A pinion, 12 ins. diam., brs. N.10 $\frac{1}{4}$ ° W., 140 lks. dist., marked $\frac{1}{4}S3$ BT.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 2, 3, 10 and 11, marked on brass cap



From which
A cedar, 6 ins. diam., brs. S.59 $\frac{1}{2}$ ° E., 150 lks. dist., marked T26N R5E S11 BT.

No other trees within limits. Raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.
Land, level and slightly rolling.
Soil, coarse texture, 26 ins. deep.
Timber, scrub cedar and pinion.
Undergrowth, sagebrush 18 ins. high.
Good grass.

40.00
80.00

S.89° 51' E., on a random line, bet. secs. 2 and 11.
Set temp. $\frac{1}{4}$ sec. cor.
Intersect N. and S. line, 9 lks. N. of the cor. of secs. 2, 11 and 12.

40.00

Thence
N.89° 47' W., on a true line, bet. secs. 2 and 11.
Over level land, through scattering timber and undergrowth.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the

Subdivision of T. 26 N., R. 5 E.

<p>Chains.</p> <p>80.00</p>	<p>ground, for $\frac{1}{4}$ sec. cor., marked on brass cap</p> <p style="text-align: center;"> $\frac{1}{4}$S 2 $\frac{1}{4}$S11 1916 </p> <p>From which A pinion, 10 ins. diam., brs. N.23$\frac{1}{2}$° W., 32 lks. dist., marked $\frac{1}{4}$S2 BT. A pinion, 10 ins. diam., brs. S.32$\frac{3}{4}$° W., 68 lks. dist., marked $\frac{1}{4}$S11 BT.</p> <p>The cor. of secs. 2, 3, 10 and 11. Land, level. Soil, coarse texture, 26 ins. deep. Timber, scrub cedar and pin on. Undergrowth, sagebrush 18 ins. high. Good grass.</p>
<p>31.40</p> <p>40.00</p> <p>69.97</p> <p>80.00</p>	<p>S.0° 1' E., bet. secs. 10 and 11. Over level land, through scattering timber and undergrowth. Enter draw, course SE. Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap</p> <p style="text-align: center;"> $\frac{1}{4}$S10 S11 1916 </p> <p>From which A pinion, 12 ins. diam., brs. S.77$\frac{1}{2}$° E., 105 lks. dist., marked $\frac{1}{4}$S11 BT. A pinion, 10 ins. diam., brs. S.65° W., 20 lks. dist., marked $\frac{1}{4}$S10 BT.</p> <p>Leave draw, course SE. Set an iron post, 3 ft. long, 2 ins. diam., 14 ins. in the ground, in a mound of stone, for cor. of secs. 10, 11, 14 and 15, marked on brass cap</p> <p style="text-align: center;"> T26N R5E S10 S11 $\frac{1}{4}$S15 S14 1916 </p> <p>From which A pinion, 12 ins. diam., brs. N.6$\frac{1}{4}$° E., 100 lks. dist., marked T26N R5E S11 BT. A pinion, 10 ins. diam., brs. S.1$\frac{1}{4}$° E., 47 lks. dist., marked T26N R5E S14 BT. A pinion, 10 ins. diam., brs. S.66° W., 152 lks. dist., marked T26N R5E S15 BT. A pinion, 16 ins. diam., brs. N.79° W., 50 lks. dist., marked T26N R5E S10 BT.</p> <p>Land, level. Soil, coarse texture, 12 to 26 ins. deep. Timber, scrub cedar and pinion. Undergrowth, sagebrush. Fair grass.</p>
<p>40.00</p> <p>80.00</p>	<p>S.89° 47' E., on a random line, bet. secs. 11 and 14. Set temp. $\frac{1}{4}$ sec. cor. Intersect N. and S. line, 19 lks. S. of the cor. of secs. 11, 12, 13 and 14. Thence N.89° 55' W., on a true line, bet. secs. 11 and 14. Over slightly rolling land, through scattering timber and undergrowth.</p>

26.24

Subdivision of T. 26 N., R. 5 E.

Chains.

29.00 Enter draw, course SE.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S11
 $\frac{1}{4}$ S14
 1916

From which
 A pinion, 14 ins. diam., brs. N.15° E., 186 lks. dist. marked $\frac{1}{4}$ S11 BT.
 No other trees within limits. Raise a mound of stone, 2 ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor.
 45.00 Leave draw, course SE.
 76.50 Draw, course N.
 80.00 The cor. of secs. 10, 11, 14 and 15.
 Land, slightly rolling.
 Soil, coarse texture, 12 to 26 ins. deep.
 Timber, scrub cedar and pinion.
 Undergrowth, sagebrush and Brigham brush.
 Fair grass.

S.0° 1' E., bet. secs. 14 and 15.
 Over rolling and broken land, through scattering timber.
 3.00 Draw, course NE.
 34.10 Draw, course E.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S15 S14
 1916

From which
 A pinion, 3 ins. diam., brs. S.81 $\frac{1}{2}$ ° E., 55 lks. dist., marked $\frac{1}{4}$ S14 BT.
 A pinion, 16 ins. diam., brs. N.42 $\frac{1}{4}$ ° W., 40 lks. dist. marked $\frac{1}{4}$ S15 BT.
 70.00 Rim rock of canyon, brs. NE. and SW. Desc. 120 ft. to
 74.99 Bottom of canyon, course NE. Road in canyon, brs. NE. and SW. Asc. 30 ft.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 14 ins. in the ground, in a mound of stone, for cor. of secs. 14, 15, 22 and 23, marked on brass cap

T26N R5E
 $\frac{1}{4}$ S15 $\frac{1}{4}$ S14
 $\frac{1}{4}$ S22 $\frac{1}{4}$ S23
 1916

From which
 A pinion, 8 ins. diam., brs. N.50 $\frac{1}{4}$ ° E., 37 lks. dist., marked T26N R5E S14 BT.
 A pinion, 8 ins. diam., brs. S.21 $\frac{3}{4}$ ° E., 28 lks. dist., marked T26N R5E S23 BT.
 A pinion, 16 ins. diam., brs. S.52° W., 32 lks. dist., marked T26N R5E S22 BT.
 A pinion, 12 ins. diam., brs. N.64° W., 67 lks. dist., marked T26N R5E S15 BT.
 Land, rolling and broken.
 Soil, coarse texture, 10 to 20 ins. deep.
 Timber, scrub cedar and pinion.
 Fair grass.

Subdivision of T. 26 N., R. 5 E.

chains.

40.00 S.89° 55' E., on a random line, bet. secs. 14 and 23.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.98 Intersect N. and S. line, 5 lks. S. of the cor. of secs.
 13, 14, 23 and 24.
 Thence
 N.89° 57' W., on a true line, bet. secs. 14 and 23.
 Over slightly rolling land, through scattering timber and
 undergrowth.
 39.99 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the
 ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., marked
 on brass cap

$\frac{1}{4}$ S14
 $\frac{1}{4}$ S23
 1916

And raise a mound of stone, 3 ft. base, 3 ft. high, N.
 of cor.
 79.98 The cor. of secs. 14, 15, 22 and 23.
 Land, slightly rolling.
 Soil, coarse texture, 12 to 16 ins. deep.
 Timber, very scattering scrub cedar and pinon.
 Undergrowth, broom weed 1 ft. high.
 Fair grass.

S.0° 1' E., bet. secs. 22 and 23.
 Over rolling land, through scattering timber and undergroth.
 4.98 Draw, course E. Asc. 30 ft. to
 7.95 Rocky point, slopes E. Desc. gradually.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S22 | S23
 1916

And raise a mound of stone, 2 ft. base, 2 $\frac{1}{2}$ ft. high, W.
 of cor.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 22, 23, 26 and 27, marked on
 brass cap

T26N | R5E
 S22 | S23
 S27 | S26
 1916

From which
 A pinon, 12 ins. diam., brs. N.28° E., 162 lks. dist.,
 marked T26N R5E S23 BT.
 A pinon, 12 ins. diam., brs. S.4 $\frac{1}{2}$ ° E., 82 lks. dist.,
 marked T26N R5E S26 BT.
 A pinon, 10 ins. diam., brs. S.73 $\frac{1}{4}$ ° W., 61 lks. dist.,
 marked T26N R5E S27 BT.
 A pinon, 14 ins. diam., brs. N.48° W., 190 lks. dist.,
 marked T26N R5E S22 BT.
 Land, rolling.
 Soil, coarse texture, 12 to 16 ins. deep.
 Timber, scrub cedar and pinon.
 Undergrowth, broom weed 1 ft. high.
 Fair grass.

40.00 S.89° 57' E., on a random line, bet. secs. 23 and 26.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.03 Intersect N. and S. line, 5 lks. N. of the cor. of secs.
 23, 24, 25 and 26.
 Thence
 N.89° 55' W., on a true line, bet. secs. 23 and 26.

Subdivision of T. 26 N., R. 5 E.

Chains.

Over slightly rolling land, through scattering undergrowth.
 18.00 Enter scattering timber.
 40.01 $\frac{1}{4}$ Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S23
 S26
 1916

From which
 A holly, 5 ins. diam., brs. N.47 $\frac{1}{2}$ ° E., 182 lks. dist., marked $\frac{1}{4}$ S23 BT.
 A pinon, 8 ins. diam., brs. S.31 $\frac{1}{2}$ ° W., 254 lks. dist., marked $\frac{1}{4}$ S26 BT.

47.00 Leave timber.
 60.00 Enter timber, brs Asc. gradually to
 70.05 Low ridge, brs. N. and S. Desc. 30 ft. to
 78.00 Small draw, course NE.
 80.03 The cor. of secs. 22, 23, 26 and 27.
 Land, slightly rolling.
 Soil, coarse texture, 16 to 20 ins. deep. Limestone on surface and limestone subsoil.
 Timber, scattering cedar and pinon.
 Undergrowth, sage and holly brush.
 Fair grass.

S.0° 1' E., bet. secs. 26 and 27.
 Over slightly rolling land, through scattering timber and undergrowth.

5.00 Shallow draw, course NE.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S27 | S26
 1916

From which
 A pinon, 12 ins. diam., brs. S.82 $\frac{1}{4}$ ° E., 2 lks. dist., marked $\frac{1}{4}$ S26 BT.
 A pinon, 8 ins. diam., brs. S.75 $\frac{1}{2}$ ° W., 55 lks. dist., marked $\frac{1}{4}$ S27 BT.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 26, 27, 34 and 35, marked on brass cap

T26N | R5E
 S27 | S26
 S34 | S35
 1916

And raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.
 Land, slightly rolling.
 Soil, coarse, 16 to 24 ins. deep.
 Timber, scattering cedar and pinon.
 Undergrowth, sagebrush and holly brush.
 Fair grass.

40.00 S.89° 55' E., on a random line, bet. secs. 26 and 35.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.94 Intersect N and S. line, 3 lks. N. of the cor. of secs. 25, 26, 35 and 36.
 Thence
 N.89° 54' W., on a true line, bet. secs. 26 and 35.
 Over level land, through scattering timber.
 17.00 Leave scattering timber.

Subdivision of T. 26 N., R. 5 E.

Chains.
35.00 Enter scattering timber. Asc. gradually to
37.49 Low ridge, brs. NW. and SE. Desc. gradually.
39.97 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the
ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., marked
on brass cap

$\frac{1}{4}$ S26
S35
1916

From which

A pinion, 12 ins. diam., brs. N. $\frac{1}{2}$ ° E., 75 lks. dist.,
marked $\frac{1}{4}$ S26 BT.

A pinion, 8 ins. diam., brs. S. 41° E., 51 lks. dist.,
marked $\frac{1}{4}$ S35 BT.

45.00 Small draw, course NE.

65.00 Leave timber.

79.94 The cor. of secs. 26, 27, 34 and 35.

Land, level and slightly rolling.

Soil, coarse texture, 10 to 16 ins. deep; limestone on
surface and limestone subsoil.

Timber, scrub cedar and pinion.

Undergrowth, holly and sagebrush.

Fair grass.

40.00 S. 0° 1' E., on a random line, bet. secs. 34 and 35.

Set temp. $\frac{1}{4}$ sec. cor.

80.74 Intersect S. bdy. of Tp. 15 lks. W. of reestablished cor. of
secs. 34 and 35, which is an iron post, hereinbefore described.

Thence

N. 0° 7' W., on a true line, bet. secs. 34 and 35.

Over slightly rolling land, through scattering timber and
undergrowth.

3.40 Rim rock, 25 ft. high, brs. NE. and SW. Leave timber, brs.
NE. and SW. Thence across draw.

19.75 Rim rock, 35 ft. high, brs. NE. and SW. Enter timber, brs.
NE. and SW.

40.74 Set an iron post 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S34 | S35
1916

From which

A pinion, 6 ins. diam., brs. S. 24° E., 41 lks. dist.,
marked $\frac{1}{4}$ S35 BT.

A pinion, 12 ins. diam., brs. N. 62 $\frac{1}{2}$ ° W., 95 lks. dist.,
marked $\frac{1}{4}$ S34 BT.

70.75 Leave scattering timber.

80.74 The cor. of secs. 26, 27, 34 and 35.

Land, slightly rolling.

Soil, coarse texture, 18 to 26 ins. deep.

Timber, scrub cedar and pinion.

Undergrowth, sage brush and holly brush.

Fair grass.

From the cor. of secs. 3 and 4, on the N. bdy. of the Tn.,
which is an iron post, hereinbefore described.,
S. 0° 2' E., bet. secs. 3 and 4.

Over gently rolling land, through scattering timber and
undergrowth.

31.90 Desc. 90 ft.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

Chains.

$\frac{1}{4}$ S4 S 3

1916

From which

A pinion, 8 ins. diam., brs. N.28° E., 34 lks. dist., marked $\frac{1}{4}$ S3 BT.

A pinion, 16 ins. diam., brs. S. 28° W., 46 lks. dist., marked $\frac{1}{4}$ S4 BT.

45.00 Leave timber, brs. E. and W.

60.00 Draw, course SE.

75.00 Enter scattering timber, brs. NW. and SE. Asc. gradually 35 ft. to

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground, in a mound of stone, for cor. of secs. 3, 4, 9 and 10, marked on brass cap

T26N R5E

S 4 S 3

S 9 S10

1916

From which

A juniper, 12 ins. diam., brs. N.42 $\frac{1}{2}$ ° E., 113 lks. dist., marked T26N R5E S3 BT.

A pinion, 16 ins. diam., brs. S.32 $\frac{1}{2}$ ° E., 120 lks. dist., marked T26N R5E S10 BT.

A juniper, 10 ins. diam., brs. S.26° W., 101 lks. dist., marked T26N R5E S9 BT.

A pinion, 10 ins. diam., brs. N.88° W., 47 lks. dist., marked T26NR5E S4 BT.

Land, rolling and gently rolling.

Soil, loose, yellow, rocky; loam over limestone.

Timber, pinion and junkper.

Undergrowth, sagebrush.

40.00 S.89° 51' E., on a random line, bet. secs. 3 and 10. Set temp. $\frac{1}{4}$ sec. cor.

80.14 Intersect N. and S. line, 8 lks. S. of the cor. of secs. 2, 3, 10 and 11.

Thence

N.89° 54' W., on a true line, bet. secs. 3 and 10.

Over rolling land, through scattering timber and undergrowth.

40.07 Set an iron post, 3 ft. long, 1 in. diam., 7 ins. in the ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 3

S10

1916

From which

A pinion, 8 ins. diam., brs. N.46 $\frac{1}{2}$ ° E., 86 lks. dist., marked $\frac{1}{4}$ S3 BT.

A pinion, 10 ins. diam., brs. S.74° W., 39 lks. dist., marked $\frac{1}{4}$ S10 BT.

47.15 Leave timber, brs. NW. and SE.

62.15 Draw, course SE.

69.15 Enter scattering timber, brs. NW. and SE. Asc. 35 ft. to

75.15 Low limestone rim, brs. NW. and SE.

80.14 The cor. of secs. 3, 4, 9 and 10.

Land, rolling and gently rolling.

Soil, loose, dark rocky loam, 3rd rate.

Timber, pinion and juniper.

Undergrowth, sagebrush.


Subdivision of T. 26 N., R. 5 E.

Chains.

S.0° 2' E., bet. secs. 9 and 10.
Over gently rolling land, through heavy timber and scattering undergrowth.

30.00
40.00

Leave heavy, enter scattering timber.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap




From which

A pinion, 8 ins. diam., brs. S.49 1/4° E., 152 lks. dist., marked 1/4 S10 BT.

A pinion, 6 ins. diam., brs. S.14 1/2° W., 261 lks. dist., marked 1/4 S9 BT.

43.00
80.00

Enter heavy timber, brs. NE. and SW.
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 9, 10, 15 and 16, marked on brass cap



From which

A pinion, 12 ins. diam., brs. N.35° E., 50 lks. dist., marked T26N R5E S10 BT.

A pinion, 12 ins diam., brs. S.62 1/2° E., 86 lks. dist., marked T26N R5E S15 BT.

A pinion, 12 ins. diam., brs. S.30° W., 32 lks. dist., marked T26N R5E S16 BT.

A pinion, 12 ins. diam., brs. N.57 1/2° W., 128 lks. dist., marked T26N R5E S9 BT.

Land, gently rolling.

Soil, loose, yellow, rocky, loam over limestone.

Timber, pinion and juniper.

Undergrowth, sagebrush.

40.00
80.10

S.89° 54' E., on a random line, bet. secs. 10 and 15.
Set temp. 1/4 sec. cor.
Intersect N. and S. line, 20 lks. N. of the cor. of secs. 10, 11, 14 and 15.

Thence

N.89° 45' W., on a true line, bet. secs. 10 and 15.

Over gently rolling land, through heavy timber and scattering undergrowth.

10.10
40.05

Leave timber.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap



And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

78.30
80.10

Enter heavy timber, brs. N. and S.
The cor. of secs. 9, 10, 15 and 16.

Land, gently rolling.

Soil, loose, yellow, rocky loam.

Timber, pinion and juniper.


Undergrowth, sagebrush.

Subdivision of T. 26 N., R. 5 E.

Chains.

S.0° 2' E., bet. secs. 15 and 16.
Over gently rolling land, through heavy timber and scatter-
undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for 1/4 sec. cor., marked on brass cap




From which

A pinion, 7 ins. diam., brs. N.89° E., 30 lks. dist.,
marked 1/4 S15 BT.

A pinion, 20 ins. diam., brs. S.76° W., 18 lks. dist.,
marked 1/4 S16 BT.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in the
ground, in a mound of stone, for cor. of secs. 15, 16,
21 and 22, marked on brass cap



From which

A pinion 14 ins. diam., brs. N.37 1/2° E., 49 lks. dist.
marked T26N R5E S15 BT.

A pinion, 14 ins. diam., brs. S.47 1/2° E., 19 lks. dist.
marked T26N R5E S22 BT.

A pinion, 12 ins. diam., brs. S.24° W., 91 lks. dist.,
marked T26N R5E S21 BT.

A pinion, 16 ins. diam., brs. N.33° W., 77 lks. dist.,
marked T26N R5E S16 BT.

Land, gently rolling.
Soil, loose, yellow, rocky loam.
Timber, juniper and pinon.
Undergrowth, sagebrush.

40.00 S.89° 45' E., on a random line, bet. secs. 15 and 22.
Set temp. 1/4 sec. cor.

80.13 Intersect N. and S. line, 10 lks. S. of the cor. of secs.
14, 15, 22 and 23.

Thence

N.89° 49' W., on a true line, bet. secs. 15 and 22.

Over level and rolling land, through scattering undergrowth
and heavy timber. Asc. 35 ft.

14.00 Low rim, brs. NW. and SE. Desc. 40 ft.

28.00 Dim road, brs. N. and SW.

28.15 Three wire fence brs. N. and SW.

31.55 Center of draw, course NE. Dam, 8 ft. high, extending NW.
and SE., brs. N. 4 chs. dist. Asc. 45 ft.

33.70 3-strand wire fence, brs. NE. and SW.

36.65 Thence over gently rolling land.

40.06 1/2 Set an iron post 3 ft. long, 1 in. in diam., in mound of stone,
for 1/4 sec. cor., marked on brass cap,



From which

A pinion, 10 ins. diam., brs. N.34 1/2° E., 40 lks. dist.,
marked 1/4 S15 BT.

A pinion, 10 ins. diam., brs. S.74° W., 38 lks. dist.,
marked 1/4 S22 BT.

80.13 The cor. of secs. 15, 16, 21 and 22.

Land, rolling.
Soil, loose, yellow, rocky loam.

Subdivision of T. 26 N., R. 5 E.

Chains.

Timber, pin on and juniper.
Undergrowth, sagebrush.

34.00
37.96
40.00

S.0° 2' E., bet. secs. 21 and 22.
Over gently rolling land, through heavy timber and undergrowth.
Low rim, brs. NE. and SW. Desc. 35 ft. to
Draw, course NE. Road in draw, brs. NE. and SW. Asc.
gradually to
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for 1/4 sec. cor., marked on brass cap

1/4 S21 | S22
1916

From which
A pinion, 16 ins. diam., brs. S.51 1/2° E., 188 lks. dist.,
marked 1/4 S22 BT.
A pinion, 14 ins. diam., brs. S.48 3/4° W., 189 lks. dist.,
marked 1/4 S21 BT.

80.00

Thence over rolling land.
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 21, 22, 27 and 28, marked on
brass cap

T26N | R5E
S21 | S22
S28 | S27
1916

From which
A pinion, 14 ins. diam., brs. N.42 1/2° E., 136 lks. dist.,
marked T26N R5E S22 BT.
A pinion, 10 ins. diam., brs. S.32 1/2° E., 32 lks. dist.,
marked T26N R5E S27 BT.
A pinion, 10 ins. diam., brs. S.70° W., 52 lks. dist.,
marked T26N R5E S28 BT.
A pinion, 12 ins. diam., brs. N.63 1/4° W., 109 lks. dist.,
marked T26N R5E S21 BT.
Land, rolling and gently rolling.
Soil, loose, rocky, yellow loam.
Timber, pinion and juniper.
Undergrowth, sagebrush.

40.00
80.12

S.89° 49' E., on a random line, bet. secs. 22 and 27.
Set temp. 1/4 sec. cor.
Intersect N. and S. line, at the cor. of secs. 22, 23, 26
and 27.

40.06

Thence
N.89° 49' W., on a true line, bet. secs. 22 and 27.
Over gently rolling land, through heavy timber.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for 1/4 sec. cor., marked on brass cap

1/4 S22
S27
1916

80.12

From which
A pinion, 10 ins. diam., brs. N.32° E., 67 lks. dist.,
marked 1/4 S22 BT.
A pinion, 10 ins. diam., brs. S.5° W., 58 lks. dist.,
marked 1/4 S27 BT.
The cor. of secs. 21, 22, 27 and 28.
Land, gently rolling.

332

Subdivision of T. 26 N., R. 5 E.

Chains.

Soil, loose, rocky, yellow loam.
 Timber, juniper and pinion.
 Undergrowth, sagebrush.

S.0° 2' E., bet. secs. 27 and 28.
 Over gently rolling land, through heavy timber and scattering undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S28 | S27
 1916

From which

A pinion, 14 ins. diam., brs. N.83° E., 139 lks. dist., marked $\frac{1}{4}$ S27 BT.

A pinion, 8 ins. diam., brs. S.62° W., 148 lks. dist., marked $\frac{1}{4}$ S28 BT.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., in a mound of stone, for cor. of secs. 27, 28, 33 and 34, marked on brass cap

T26N | R5E
 S28 | S27
 S33 | S34
 1916

From which

A pinion, 10 ins. diam., brs. N.47 $\frac{1}{2}$ ° E., 59 lks. dist., marked T26N R5E S27 BT.

A pinion, 10 ins. diam., brs. S.52° E., 31 lks. dist., marked T26N R5E S34 BT.

A pinion, 6 ins. diam., brs. S.78 $\frac{3}{4}$ ° W., 32 lks. dist., marked T26N R5E S33 BT.

A pinion, 8 ins. diam., brs. N.33 $\frac{1}{2}$ ° W., 92 lks. dist., marked T26N R5E S28 BT.

Land, gently rolling.

Soil, loose, rocky, yellow loam, over limestone formation.

Timber, pinion and juniper.

Undergrowth, sagebrush.

40.00 S.89° 49' E., on a random line, bet. secs. 27 and 34.

Set temp. $\frac{1}{4}$ sec. cor.

79.99 Intersect the corner of sections 26, 27, 34 and 35.

Thence

N.89° 49' W., on a true line, bet. secs. 27 and 34.

Over level land, through scattering undergrowth.

16.00 Enter scattering timber.

39.99 $\frac{1}{2}$ Set an iron post, 3 ft. long, 1 in. diam., 22 ins. in the ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S27
 S34
 1916

From which

A pinion, 12 ins. diam., brs. N.2 $\frac{1}{2}$ ° W., 150 lks. dist., marked $\frac{1}{4}$ S27 BT.

A pinion, 8 ins. diam., brs. S.27 $\frac{3}{4}$ ° E., 122 lks. dist., marked $\frac{1}{4}$ S34 BT.

79.99 The cor. of secs. 27, 28, 33 and 34.

Land, level.

Soil, coarse texture, 26 ins. deep.

Timber, scrub cedar and pinion.


Subdivision of T. 26 N., R. 5 E.

chains.

Undergrowth, sagebrush and holly brush.
Good grass.

40.00 S.0° 2' E., on a random line, bet. secs. 33 and 34.
Set temp. $\frac{1}{4}$ sec. cor.
80.85 Intersect S. bdy. of Tp., 14 lks. W. of reestab. cor. of secs.
33 and 34, which is an iron post, hereinbefore describ-
ed.

Thence
N.0° 8' W., bet. secs. 33 and 34.
Over gently rolling land, through scattering timber and
undergrowth.
40.85 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap




From which
A pinion, 22 ins. diam., brs. N.84° E., 174 lks. dist.,
marked $\frac{1}{4}$ S34 BT.
A pinion, 14 ins. diam., brs. N.73 $\frac{1}{2}$ ° W., 384 lks. dist.,
marked $\frac{1}{4}$ S33 BT.

67.85 Leave scattering, enter heavy timber.
80.85 The cor. of secs. 27, 28, 33 and 34.
Land, gently rolling.
Soil, loose, rocky, yellow loam over limestone formation.
Timber, pinion and juniper.
Undergrowth, sagebrush.


From the cor. of secs. 4 and 5, on the N. bdy. of the
Tp., which is an iron post, hereinbefore described,
S.0° 3' E., bet. secs. 4 and 5.
Over gently rolling land, through scattering timber and
undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



From which
A juniper, 20 ins. diam., brs. S.44° E., 574 lks. dist.,
marked $\frac{1}{4}$ S4 BT.
A juniper, 24 ins. diam., brs. S.22° W., 45 lks. dist.,
marked $\frac{1}{4}$ S5 BT.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 4, 5, 8 and 9, marked on brass
cap



From which
A pinion, 30 ins. diam., brs. N.74° E., 232 lks. dist.,
marked T26N R5E S4 BT.
A pinion, 24 ins. diam., brs. S.53 $\frac{1}{4}$ ° E., 183 lks. dist.,
marked T26N R5E S9 BT.
A juniper, 10 ins. diam., brs. S.72 $\frac{1}{2}$ ° W., 150 lks. dist.,
marked T26N R5E S8 BT.
A pinion, 16 ins. diam., brs. N.10° W., 306 lks. dist.,
marked T26N R5E S5 BT.
Land, gently rolling.

Chains.

Soil, loose, rocky, dark loam.
Timber, pinon and juniper.
Undergrowth, sagebrush.

40.00 S.89° 51' E., on a random line, bet. secs. 4 and 9.
Set temp. $\frac{1}{4}$ sec. cor.
79.97 Intersect N. and S. line, 13 lks. S. of the cor. of secs.
3, 4, 9 and 10.

Thence
N.89° 57' W., on a true line, bet. secs. 4 and 9.
Over gently rolling land, through heavy timber and scatter-
ing undergrowth.
39.98 $\frac{1}{2}$ Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 4
S 9
1916

From which
A pinon, 12 ins. diam., brs. N.84 $\frac{1}{2}$ ° E., 204 lks. dist.,
marked $\frac{1}{4}$ S4 BT.
A pinon, 12 ins. diam., brs. S.15 $\frac{1}{2}$ ° W., 79 lks. dist.,
marked $\frac{1}{4}$ S9 BT.
79.97 The cor. of secs. 4, 5, 8 and 9.
Land, gently rolling.
Soil, loose, rocky, yellow loam.
Timber, pinon and juniper.
Undergrowth, sagebrush.

40.00 S.0° 3' E., bet. secs. 8 and 9.
Over gently rolling land, through heavy timber and scatter-
ing undergrowth.
Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the
ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on
brass cap

$\frac{1}{4}$ S 8 | S 9
1916

From which
A pinon, 8 ins. diam., brs. S.62 $\frac{1}{2}$ ° E., 16 lks. dist.,
marked $\frac{1}{4}$ S9 BT.
A pinon, 16 ins. diam., brs. S.60° W., 37 lks. dist.,
marked $\frac{1}{4}$ S8 BT.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the
ground, in a mound of stone, for cor. of secs. 8, 9,
16 and 17, marked on brass cap

T26N | R5E
S 8 | S 9
S17 | S16
1916

From which
A juniper, 8 ins. diam., brs. N.85° E., 54 lks. dist.,
marked T26N R5E S9 BT.
A juniper, 12 ins. diam., brs. S.27 $\frac{1}{2}$ ° E., 107 lks. dist.,
marked T26N R5E S16 BT.
A juniper, 8 ins. diam., brs. S.75 $\frac{1}{4}$ ° W., 35 lks. dist.,
marked T26N R5E S17 BT.
A juniper, 6 ins. diam., brs. N.32 $\frac{3}{4}$ ° W., 62 lks. dist.,
marked T26N R5E S8 BT.
Land, gently rolling.
Soil, loose, rocky yellow loam.
Timber, juniper and pinon.

Chains.

Undergrowth, sagebrush.

40.00 S.89° 57' E., on a random line, bet. secs. 9 and 16.
 Set temp. 1/4 sec. cor.
 80.02 Intersect N. and S. line, 13 lks. N. of the cor. of secs.
 9, 10, 15 and 16.
 Thence
 N.89° 51' W., on a true line, bet. secs. 9 and 16.
 Over gently rolling land, through heavy timber and scatter-
 ing undergrowth.
 35.00 Leave heavy, enter scattering timber.
 40.01 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for 1/4 sec. cor., marked on brass cap

1/4 S 9
 1/4 S 16
 1916

From which

A juniper, 12 ins. diam., brs. N.61 1/4° E., 92 lks. dist.,
 marked 1/4 S9 BT.
 A juniper, 16 ins. diam., brs. S.64 1/2° W., 93 lks. dist.,
 marked 1/4 S16 BT.

50.00 Leave scattering timber, brs. N. and S.
 71.00 Enter heavy timber, brs. N. and S.
 80.02 The cor. of secs. 8, 9, 16 and 17.
 Land, gently rolling.
 Soil, loose, rocky, yellow loam.
 Undergrowth, sagebrush.
 Timber, juniper and pinion.

40.00 S.0° 3' E., bet. secs. 16 and 17.
 Over gently rolling land, through heavy timber and scatter-
 ing undergrowth.
 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the
 ground, in a mound of stone, for 1/4 sec. cor., marked on
 brass cap

1/4 S17 | S16
 1916

From which

A pinion, 6 ins. diam., brs. S.76 1/2° E., 129 lks. dist.,
 marked 1/4 S16 BT.
 A pinion, 10 ins. diam., brs. N.33 1/2° W., 25 lks. dist.,
 marked 1/4 S17 BT.

48.00 Leave timber, brs. NE. and SW.
 75.00 Enter scattering timber, brs. NE. and SW.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 16, 17, 20 and 21, marked on
 brass cap

T26NR5E
 S17 | S16
 S20 | S21
 1916

From which

A pinion, 10 ins. diam., brs. N.21° E., 46 lks. dist.,
 marked T26N R5E S16 BT.
 A pinion, 14 ins. diam., brs. S.24 3/4° E., 225 lks. dist.,
 marked T26N R5E S21 BT.
 A pinion, 14 ins. diam., brs. S.73 1/2° W., 107 lks. dist.,
 marked T26N R5E S20 BT.
 A pinion, 18 ins. diam., brs. N.32 1/4° W., 60 lks. dist.,
 marked T26N R5E S17 BT.

Land, gently rolling.

Chains

Soil, loose, rodky, yellow loam.
 Timber, pinion and juniper.
 Undergrowth, sagebrush.

40.00 S.89° 51' E., on a random line, bet. secs. 16 and 21.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.02 Intersect N. and S. line, 6 lks. S. of the cor. of secs.
 15, 16, 21 and 22.

Thence

N.89° 54' W., on a true line, bet. secs. 16 and 21.
 Over gently rolling land, through scattering timber and
 undergrowth.
 40.01 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$$\begin{array}{r} \frac{1}{4}S16 \\ \hline S21 \\ 1916 \end{array}$$

From which

A juniper, 12 ins. diam., brs. N.82 $\frac{1}{2}$ ° W., 182 lks. dist.,
 marked $\frac{1}{4}$ S16 BT.
 A juniper, 16 ins. diam., brs. S.89 $\frac{1}{2}$ ° W., 233 lks. dist.,
 marked $\frac{1}{4}$ S21 BT.
 80.02 The cor. of secs. 16, 17, 20 and 21.
 Land, gently rolling.
 Soil, loose, rocky, yellow loam.
 Timber, pinion and juniper.
 Undergrowth, sagebrush.

40.00 S.0° 3' E., bet. secs. 20 and 21.
 Over gently rolling land, through heavy timber and scattering
 undergrowth.
 Set an iron post, 3 ft. long, 1 in. diam., in a mound of
 stone, for $\frac{1}{4}$ sec. cor., marked on brass cap

$$\begin{array}{r} \frac{1}{4}S20 \quad S21 \\ \hline 1916 \end{array}$$

From which

A pinion, 12 ins. diam., brs. N.58 $\frac{1}{2}$ ° E., 40 lks. dist.,
 marked $\frac{1}{4}$ S21 BT.
 A pinion, 12 ins. diam., brs. S.33° W., 41 lks. dist.,
 marked $\frac{1}{4}$ S20 BT.
 52.00 Leave heavy timber, brs. E. and W. Thence through scatter-
 ing timber.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 20, 21, 28 and 29, marked on
 brass cap

$$\begin{array}{r} T26N \quad R5E \\ \hline S20 \quad S21 \\ \hline S29 \quad S28 \\ 1916 \end{array}$$

And raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W.
 of cor.
 Land, gently rolling.
 Soil, loose, rocky, yellow loam.
 Timber, pinion and juniper.
 Undergrowth, sagebrush.

S.89° 54' E., on a random line, bet. secs. 21 and 28.

Subdivision of T. 26 N., R. 5 E.

Chains.

40.00 Set temp. $\frac{1}{4}$ sec. cor.
79.94 Intersect N. and S. line, 10 lks. S. of the cor. of secs. 21, 22, 27 and 28.

Thence

N.89° 58' W., on a true line, bet. secs. 21 and 28.

Over gently rolling land, through scattering timber and undergrowth.

15.45 Road, brs. NE. and SW.

39.97 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S21

S28
1916

Dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft. dist.; and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

79.94 The cor. of secs. 20, 21, 28 and 29.

Land, gently rolling.

Soil, loose, dark, rocky loam.

Timber, pinon and juniper.

Undergrowth, sagebrush.

S.0° 3' E., bet. secs. 28 and 29.

Over gently rolling land, through scattering timber and undergrowth.

31.47 Wire fence, brs. E. and W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S29 | S28

1916

From which

A pinon, 24 ins. diam., brs. N.89 $\frac{1}{4}$ ° E., 697 lks. dist., marked $\frac{1}{4}$ S28 BT.

A juniper, 12 ins. diam., brs. S.81° W., 193 lks. dist., marked $\frac{1}{4}$ S29 BT.

46.96 Wire fence, brs. N.80° W. and S.80° E.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 14 ins. in the ground, in a mound of stone, for cor. of secs. 28, 29, 32 and 33, marked on brass cap

T26N | R5E
S29 | S28

S32 | S33
1916

From which

A pinon, 12 ins. diam., brs. N.23 $\frac{1}{4}$ ° E., 62 lks. dist., marked T26N R5E S28 BT.

A pinon, 12 ins. diam., brs. S.24° E., 30 lks. dist., marked T26N R5E S33 BT.

A pinon, 12 ins. diam., brs. S.39° W., 43 lks. dist., marked T26N R5E S32 BT.

A juniper, 10 ins. diam., brs. N.74° W., 79 lks. dist., marked T26N R5E S29 BT.

Land, gently rolling.

Soil, loose, dark, rocky loam.


Timber, pinon and juniper.

Undergrowth, sagebrush.

Chains.	S. 89° 58' E., on a random line, bet. secs. 28 and 33.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.90	Intersect N. and S. line, 5 lks. N. of the cor. of secs. 27, 28, 33 and 34.
	Thence
	N. 89° 56' W., on a true line, bet. secs. 28 and 33.
	Over gently rolling land, through scattering timber and undergrowth.
39.95	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4}$ S28 $\frac{1}{4}$ S33 1916
	From which
	A pinion, 12 ins. diam., brs. N. 35 $\frac{1}{2}$ ° E., 210 lks. dist., marked $\frac{1}{4}$ S28 BT.
	A pinion, 14 ins. diam., brs. S. 26 $\frac{1}{4}$ ° E., 196 lks. dist., marked $\frac{1}{4}$ S33 BT.
68.65	Dim road, brs. NE. and SW.
79.90	The cor. of secs. 28, 29, 32 and 33.
	Land, gently rolling.
	Soil, loose, rocky, yellow loam.
	Timber, pinion, and juniper.
	Undergrowth, sagebrush.
	S. 0° 3' E., on a random line, bet. secs. 32 and 33.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.19	Intersect S. bdy. of Tp. 12 lks. W. of reestablished cor. of secs. 32 and 33, which is an iron post, hereinbefore described.
	Thence
	N. 0° 8' W., on a true line, bet. secs. 32 and 33.
	Over gently rolling land, through scattering timber.
13.00	Enter heavy timber, brs. NW. and SE.
33.00	Leave heavy timber, brs. E. and SW.
40.19	Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4}$ S32 S33 1916
	And raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
62.50	Dim road, brs. NE. and SW.
64.25	Dim road, brs. NW. and SE.
78.60	Enter scattering timber, brs. NW. and SE.
80.19	The cor. of secs. 28, 29, 32 and 33.
	Land, gently rolling.
	Soil, loose, dark, rocky loam.
	Timber, pinion and juniper.
	Undergrowth, sagebrush.
	From the cor. of secs. 5 and 6, on the N. bdy. of the Tp., which is an iron post, described hereinbefore,
	S. 0° 3' E., bet. secs. 5 and 6.
	Over level land, through scattering timber and undergrowth.
5.00	Leave timber.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4}$ S 6 S 5 1916

Chains.

50.00 Enter scattering timber.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 5, 6, 7 and 8, marked on brass cap



From which
 A pinion, 12 ins. diam., brs. N.84 $\frac{1}{4}$ ° E., 258 lks. dist., marked T26N R5E S5 BT.
 A pinion, 14 ins. diam., brs. S.83 $\frac{1}{2}$ ° E., 186 lks. dist., marked T26N R5E S8 BT.
 A cedar, 12 ins. diam., brs. S.28 $\frac{1}{2}$ ° W., 42 lks. dist., marked T26N R5E S7 BT.
 A pinion, 12 ins. diam., brs. N.1° W., 55 lks. dist., marked T26N R5E S6 BT.
 Land, level.
 Soil, coarse texture, 26 ins. deep.
 Timber, scattering scrub pinion and cedar.
 Undergrowth, sagebrush, 18 ins. high.
 Fair grass.

40.00 S.89° 51' E., on a random line, bet. secs. 5 and 8.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.81 Intersect the corner of secs. 4, 5, 8 and 9.
 Thence
 N.89° 51' W., on a true line, bet. secs. 5 and 8.
 Over level land, through scattering timber and undergrowth.
 21.80 Leave timber.
 39.90 $\frac{1}{2}$ Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



From which
 A cedar, 6 ins. diam., brs. N.15 $\frac{1}{2}$ ° E., 164 lks. dist., marked $\frac{1}{4}$ S5 BT.
 A cedar, 6 ins. diam., brs. S.63 $\frac{1}{4}$ ° E., 33 lks. dist., marked $\frac{1}{4}$ S8 BT.
 46.80 Enter timber.
 79.81 The cor. of secs. 5, 6, 7 and 8.
 Land, level and slightly rolling.
 Soil, coarse texture, 26 ins. deep.
 Timber, scrub cedar and pinion.
 Undergrowth, broom weed, 1 ft. high.
 Fair grass.

40.00 N.89° 51' W., on a random line, bet. secs. 6 and 7.
 Set temp. $\frac{1}{4}$ sec. cor.
 72.86 Intersect W. bdy. of Tp., 14 lks. N. of the cor. of secs. 1, 6, 7 and 12, which is an iron post, described here-inbefore.
 Thence
 S.89° 57' E., on a true line, bet. secs. 6 and 7.
 Over level land, through scattering undergrowth.
 32.86 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

402.

Subdivision of T. 26 N., R. 5 E.

Chains.

1/4 S 6
S 7
1916

And raise a mound of stone, 2 ft. base, 2 1/2 ft. high, N. of cor.

- 38.85 Enter scattering timber.
- 44.85 Leave timber.
- 65.85 Enter timber.
- 72.86 The cor. of secs. 5, 6, 7 and 8.
Land, level.
Soil, coarse texture, 26 ins. deep.
Timber, scattering pinion and cedar.
Undergrowth, broom weed, 1 ft. high.
Fair grass.

- 40.00 S.0° 3' E., bet. secs. 7 and 8.
Over level land, through scattering timber and undergrowth.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap

1/4 S 7 | S 8
1916

- 40.60 From which
A cedar, 8 ins. diam., brs. N.30 1/2° E., 54 lks. dist., marked 1/4 S8 BT.
- 80.00 A cedar, 4 ins. diam., brs. N.82 1/2° W., 44 lks. dist., marked 1/4 S7 BT.
Leave timber.
Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 7, 8, 17 and 18, marked on brass cap

T26N | R5E
S 7 | S 8
S18 | S17
1916

- From which
A pinion, 16 ins. diam., brs. N.75° E., 38 lks. dist., marked T26N R5E S8 BT.
- A pinion, 16 ins. diam., brs. S.33 1/4° E., 118 lks. dist., marked T26N R5E S17 BT.
- A cedar, 7 ins. diam., brs. S.38° W., 65 lks. dist., marked T26N R5E S18 BT.
- No other trees within limits. Raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.
- Land, level.
Soil, coarse texture, 26 ins. deep.
Timber, scrub cedar and pinion.
Undergrowth, sagebrush 1 ft. high.
Good grass.

- 40.00 S.89° 51' E., on a random line, bet. secs. 8 and 17.
Set temp. 1/4 sec. cor.
- 79.79 Intersect N. and S. line, 19 lks. S. of the cor. of secs. 8, 9, 16 and 17.
Thence
N.89° 59' W., on a true line, bet. secs. 8 and 17.
- 39.89 1/2 Over level land, through scattering timber, and undergrowth.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap

Subdivision of T. 26 N., R. 5 E.

Chains.

$\frac{1}{4}$ S 8
 $\frac{1}{4}$ S 17
1916

From which
A pinion, 12 ins. diam., brs. N.14° E., 58 lks. dist.,
marked $\frac{1}{4}$ S8 BT.
A pinion, 10 ins. diam., brs. S.34 $\frac{1}{2}$ ° E., 116 lks. dist.,
marked $\frac{1}{4}$ S17 BT.
79.79 The cor. of secs. 7, 8, 17 and 18.
Land, level.
Soil, coarse texture, 26 ins. deep.
Timber, scrub cedar and pinion.
Undergrowth, broom weed, 1 ft. high.
Fair grass.

40.00 N.89° 57' W., on a random line, bet. secs. 7 and 18.
Set temp. $\frac{1}{4}$ sec. cor.
72.88 Intersect W. bdy. of Tp., 8 lks. S. of the cor. of secs.
7, 12, 13 and 18, which is an iron post, described
hereinbefore.
Thence
S.89° 53' E., on a true line, bet. secs. 7 and 18.
Over slightly rolling land, through scattering timber and
undergrowth.
Desc. 60 ft. to
7.90 Foot of desc.; thence over level land.
32.88 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 7
 $\frac{1}{4}$ S 18
1916

From which
A pinion, 16 ins. diam., brs. N.60° E., 84 lks. dist.,
marked $\frac{1}{4}$ S7 BT.
A pinion, 4 ins. diam., brs. S.22 $\frac{1}{2}$ ° W., 106 lks. dist.,
marked $\frac{1}{4}$ S18 BT.
40.90 Small wire corral brs. S. 5 lks. dist.,
62.90 Leave timber.
72.88 The cor. of secs. 7, 8, 17 and 18.
Land, level and slightly rolling.
Soil, good, 26 ins. deep.
Timber, cedar and pinion.
Undergrowth, sagebrush.
Fair grass.

40.00 S.0° 3' E., bet. secs. 17 and 18.
Over level land, through scattering timber and undergrowth.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S18 | S17
1916

From which
A pinion, 10 ins. diam., brs. S.69° E., 48 lks. dist.,
marked $\frac{1}{4}$ S17 BT.
A pinion, 10 ins. diam., brs. N.17 $\frac{1}{2}$ ° W., 38 lks. dist.,
marked $\frac{1}{4}$ S18 BT.

42

Subdivision of T. 26 N., R. 5 E.

Chains.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground, in a mound of stone, for cor. of secs. 17, 18, 19 and 20, marked on brass cap

T26N	R5E
S18	S17
S19	
S20	
1916	

From which

A pinion, 5 ins. diam., brs. N.27 $\frac{1}{2}$ ° E., 73 lks. dist., marked T26N R5E S17 BT.

A pinion, 16 ins. diam., brs. S.20 $\frac{1}{4}$ ° E., 202 lks. dist., marked T26N R5E S20 BT.

A pinion, 12 ins. diam., brs. S.61° W., 99 lks. dist., marked T26N R5E S19 BT.

A pinion, 12 ins. diam., brs. N.8 $\frac{1}{2}$ ° W., 190 lks. dist., marked T26N R5E S18 BT.

Land, level.

Soil, good, 26 ins. deep.

Timber, cedar and pinion.

Undergrowth, sagebrush and Brigham brush.

Fair grass.

40.00

S.89° 59' E., on a random line, bet. secs. 17 and 20.

Set temp. $\frac{1}{4}$ sec. cor.

79.83

Intersect N. and S. line, 2 lks. S. of the cor. of secs. 16, 17, 20 and 21.

Thence

West on a true line, bet. secs. 17 and 20.

Over level land, through scattering timber and undergrowth.

30.91 $\frac{1}{2}$

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S17
S20
1916

From which

A pinion, 10 ins. diam., brs. N.27° E., 109 lks. dist., marked $\frac{1}{4}$ S17 BT.

A pinion, 14 ins. diam., brs. S.39 $\frac{1}{2}$ ° E., 61 lks. dist., marked $\frac{1}{4}$ S20 BT.

79.83

The cor. of secs. 17, 18, 19 and 20.

Land, level.

Soil, coarse texture, 26 ins. deep.

Timber, cedar and pinion.

Undergrowth, sagebrush and Brigham brush.

Fair grass.

40.00

N.89° 53' W., on a random line, bet. secs. 18 and 19.

Set temp. $\frac{1}{4}$ sec. cor.

72.97

Intersect W. bdy. of Tp., 6 lks. S. of the cor. of secs. 13, 18, 19 and 24, which is an iron post, hereinbefore described.

Thence

S.89° 50' E., on a true line, bet. secs. 18 and 19.

Over slightly rolling land, through scattering undergrowth and heavy timber.

32.97

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap

Subdivision of T. 26 N., R. 5 E.

Chains.

1/4 S18
S19
1916

From which
A cedar, 8 ins. diam., brs. N.39° W., 25 lks. dist.,
marked 1/4 S18 BT.
A cedar, 12 ins. diam., brs. S.4° E., 36 lks. dist.,
marked 1/4 S19 BT.

39.97 Leave heavy, enter scattering timber.

66.95 Enter heavy timber.

72.97 The cor. of secs. 17, 18, 19 and 20.

Land, slightly rolling.
Soil, coarse texture, 26 ins. deep.
Timber, cedar and pinon.
Undergrowth, scattering sagebrush 1 ft. high.
Fair grass.

S.0° 3' E., bet. secs. 19 and 20.
Over level land, through scattering timber and undergrowth.
Leave timber.

18.00

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for 1/4 sec. cor., marked on brass cap

1/4 S19 | S20
1916

Dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft.
dist.; and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft.
high, W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the
ground, for cor. of secs. 19, 20, 29 and 30, marked on
brass cap

T26N | R5E
S19 | S20
S30 | S29
1916

And raise a mound of stone, 2 ft. base, 2 1/2 ft. high, W.
of cor.
Land, level.
Soil, good, 26 ins. deep.
Timber, cedar and pinon.
Good grass.
Undergrowth, sagebrush and Brigham brush.

East on a random line, bet. secs. 20 and 29.

40.00 Set temp. 1/4 sec. cor.

80.00 Intersect N. and S. line, 22 lks. N. of the cor. of secs.
20, 21, 28 and 29.

Thence
N.89° 51' W., on a true line, bet. secs. 20 and 29.
Over slightly rolling land, through scattering timber and
undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for 1/4 sec. cor., marked on brass cap

1/4 S20
S29
1916

And raise a mound of stone, 3 ft. base, 3 ft. high, N.
of cor.

80.00 The cor. of secs. 19, 20, 29 and 30.

Subdivision of T. 26 N., R. 5 E.

Chains.

Land, slightly rolling.
Soil, good, 26 ins. deep.
Timber, a few scattering scrub cedar trees.
Undergrowth, Brigham brush, 1 ft. high.
Good grass.

40.00 N. 89° 50' W., on a random line, bet. secs. 19 and 30.
Set temp; $\frac{1}{4}$ sec. cor.
72.99 Intersect W. bdy. of Tp., 9 lks. N. of the cor. of secs.
19, 24, 25 and 30, which is an iron post, hereinbefore
described.
Thence
28.00 S. 89° 54' E., on a true line, bet. secs. 19 and 30.
Over level land, through scattering timber and undergrowth.
Leave timber.
29.90 Road, brs. N. and S.
32.99 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S19
 $\frac{1}{4}$ S30
1916

62.70 And raise a mound of stone, 2 ft. base, 2 ft. high, N.
of cor.
Road, brs. NW. and SE.
72.99 The cor. of secs. 19, 20, 29 and 30.
Land, level.
Soil, coarse, 26 ins. deep.
Timber, scattering cedar.
Undergrowth, sagebrush and Brigham brush.
Fair grass.

40.00 S. 0° 3' E., bet. secs. 29 and 30.
Over gently rolling land, through scattering undergrowth.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S30 | S29
1916

66.40 And raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W.
of cor.
From this point, NW. cor. of fence brs. E. 60 lks. dist.
Fence runs S. and E. from cor.
74.25 From this point, SW. cor. of fence, enclosing dry tank,
brs. E. 1 ch. dist. Fence runs N. and E. from cor.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 29, 30, 31 and 32, marked on
brass cap

T26N | R5E
S30 | S29
 $\frac{1}{4}$ S31 | $\frac{1}{4}$ S32
1916

And raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
W. of cor.
Land, gently rolling.
Soil, loose yellow loam, 2nd rate.
No timber.
Undergrowth, sagebrush.

Subdivision of T. 26 N., R. 5 E.

115

Chains.

40.00 S.89° 51' E., on a random line, bet. secs. 29 and 32.
 Set temp. 1/4 sec. cor.
 79.98 Intersect N. and S. line, 2 lks. S. of the cor. of secs.
 28, 29, 32 and 33.
 Thence
 N.89° 52' W., on a true line, bet. secs. 29 and 32.
 Over gently rolling land, through scattering timber.
 2.00 Leave scattering timoer, brs. NW. and SE.
 14.45 Dim road, brs. NW. and SE.
 35.00 Enter scattering timber, brs. N. and S.
 39.99 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the
 ground, in a mound of stone, for 1/4 sec. cor., marked
 on brass cap

1/4 S29
 S32
 1916

From which

A pinlon, 7 ins. diam., brs. N.54° W., 22 lks. dist.,
 marked 1/4 S29 BT.

A pinlon, 6 ins. diam., brs. S.38° W., 14 lks. dist.,
 marked 1/4 S32 BT.

40.25 Leave scattering timber, brs. N. and S.
 73.50 Drainage ditch, 10 lks. wide, 1 ft. deep, runs N. to tank,
 5 chs. dist. SE. cor. of fence, brs. N.
 79.98 The cor. of secs. 29, 30, 31 and 32.
 Land, gently rolling.
 Soil, loose, rocky, dark loam.
 Timber, pinlon and juniper.
 Undergrowth, sagebrush.

40.00 N.89° 54' W., on a random line, bet. secs. 30 and 31.
 Set temp. 1/4 sec. cor.,
 73.13 Intersect W. bdy. of Tp., 5 lks. N. of the cor. of secs.
 25, 30, 31 and 36, which is an iron post, described here-
 inbefore.
 Thence
 S.89° 56' E., on a true line, bet. secs. 30 and 31.
 Over gently rolling land, through scattering undergrowth
 and timber.
 33.13 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for 1/4 sec. cor., marked on brass cap

1/4 S30
 S31
 1916

From which

A juniper, 8 ins. diam., brs. N.36° E., 244 lks. dist.,
 marked 1/4 S30 BT.

A juniper, 6 ins. diam., brs. S.17 1/2° E., 290 lks. dist.,
 marked 1/4 S31 BT.

53.15 Leave scattering timber, brs. N. and S.
 65.35 Road, brs. N. and S.
 73.13 The cor. of secs. 29, 30, 31 and 32.
 Land, gently rolling.
 Soil, loose, rocky, dark loam.
 Timber, juniper and pinlon.
 Undergrowth, sagebrush.

40.00 S.0° 3' E., on a random line, bet. secs. 31 and 32.
 Set temp; 1/4 sec. cor.
 79.85 Intersect South Boundary of Tp. 7 N. W. of reestab. cor. of secs.
 31 and 32, which is an iron post, hereinoefore described.
 Thence
 N.0° 6' W., on a true line, bet. secs. 31 and 32.

46.

Subdivision of T. 26 N., R. 5 E.

Chains.

Over gently rolling land, through scattering timber and undergrowth.

22.90 Road, brs. N.20° W. and S.20° E.

39.85 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S31 | S32
1916

From which

A pinion, 12 ins. diam., brs. N.22° E., 169 lks. dist., marked $\frac{1}{4}$ S32 BT.

A pinion, 16 ins. diam., brs. S.75° W., 312 lks. dist., marked $\frac{1}{4}$ S31 BT.

59.85 Leave scattering timber, brs. NW. and E.

79.85 The cor. of secs. 29, 30, 31 and 32.

Land, gently rolling.

Soil, loose, dark loam, 2nd rate.

Timber, juniper and pinion.

Undergrowth, sagebrush.

General Description.

This township consists of level and gently rolling land, covered with scrub cedar and pinion timber, and sage and Brigham brush. The soil is a loose, dark loam, varying from 16 to 26 ins. deep. There are no settlers, nor is there any water developed in this township.

Diagram showing the respective surveys executed by Thomas B. Matthews, U. S. S., and Deane J. Wolff, U.S.T., under instructions for Group No. 55, Arizona.

Book "B"

BOOK 3095

Township 26 North, Range 5 East.

	5-22-16	5-22-16	5-22-16	5-22-16	5-22-16	5-22-16
5-23-16	6	5	4	3	2	1
5-26-16	5-27-16	5-26-16	5-26-16	5-24-16	5-24-16	5-25-16
5-23-16	7	8	9	10	11	12
5-27-16	5-27-16	5-26-16	5-26-16	5-24-16	5-24-16	5-23-16
5-23-16	18	17	16	15	14	13
5-27-16	5-27-16	5-27-16	5-27-16	5-25-16	5-25-16	5-23-16
5-23-16	19	20	21	22	23	24
5-27-16	5-27-16	5-27-16	5-27-16	5-25-16	5-25-16	5-23-16
5-22-16	30	29	28	27	26	25
5-30-16	5-30-16	5-29-16	5-29-16	5-29-16	5-25-16	5-29-16
5-22-16	31	32	33	34	35	36
5-29-16	5-30-16	5-29-16	5-29-16	5-29-16	5-25-16	5-2-16
5-22-16	5-22-16	5-22-16	5-22-16	5-2-16	5-2-16	5-2-16

Blue lines indicate surveys by Thomas B. Matthews, U.S.S. on the various dates shown.

Red lines indicate surveys by Deane J. Wolff, U.S.T. on the various dates shown.

98

CERTIFICATES OF U. S. SURVEYOR and U. S. TRANSITMAN.

We, Thomas B. Matthews and Deane J. Wolff, U.S. Surveyor and U. S. Transitman, respectively, hereby certify on honor that, in pursuance of special instructions received from the U.S. Surveyor General, for Arizona for Group No. 55, Arizona, bearing date of the 8th day of March, 1915, we have well, faithfully and truly, in our own proper persons, and in strict conformity with said instructions the Manual of Surveying Instructions, and the laws of the United States, resurveyed all those parts or portions of the North boundary of T. 25 N. R. 5 E. and surveyed all those parts or portions of the West and North boundaries, and the Subdivision lines of

TOWNSHIP 26 NORTH, RANGE 5 EAST,

of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes, and by the diagram on the reverse hereof, as having been executed by us, and under our direction; and we do further certify on honor that all the corners of said resurvey and survey have been reestablished or established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U.S. Surveyor General for Arizona for Group No. 55, and in the specific manner described in our respective field notes, and that the foregoing are the original field notes of such resurveys and surveys.

Thomas B. Matthews Deane J. Wolff
U. S. Surveyor. U. S. Transitman.

A P P R O V A L .

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix, Arizona,

SEP 28 1918.

The foregoing field notes of the Resurvey of the North boundary of T. 25 N. R. 5 E. and survey of the North and West boundaries, and Subdivision lines of

TOWNSHIP 26 NORTH, RANGE 5 EAST,

of the Gila and Salt River Base and Meridian, in the State of Arizona, executed by Thomas B. Matthews, U.S. Surveyor, and Deane J. Wolff, U. S. Transitman, under special instructions, dated March 8, 1915, for Group 55, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the resurveys and surveys they describe, are hereby approved.

Frank D. Frost
U. S. Surveyor General of Arizona.

~~I certify that the foregoing transcript of the field notes of the above described resurveys and surveys in Book "B" of Group 55, has been correctly copied from the original notes on file in this office.~~