

3156

Book "B"

4-679

53
✓
①
Jul 7 1916

BOOK 3156

FIELD NOTES

RE-
OF THE SURVEY OF THE

5th. Standard Parallel North, through part of Range 5 West,

and SURVEY of

Portion of South bdy, and Subdivision Lines of

TOWNSHIP 20 NORTH, RANGE 5 WEST,

Of the Gila and Salt River Base and Meridian,

In the State of Arizona,

EXECUTED BY

William R. Johnston

In the capacity of U.S. Transitman under instructions dated October 5, 1915,
issued by the United States Surveyor General to govern surveys included in
Group No. 62, which were approved by the Commissioner of the General Land
Office, November 3, 1915.

Survey Commenced February 14, 1916

Survey Completed March 3, 1916

3156

3156

✓

Resurvey of 5th St. Par. N., through Part of R. 5 W.,
Survey of Part of S. Bdy. and Subdivisional Lines, T. 20 N., R. 5 W.

Chains

Work executed on dates shown on diagram on page 29 of this book, by Wm. R. Johnston, U. S. Transitman. The instrument used is described, with record of approval by the Assistant Supervisor of Surveys, record of field tests, and method of maintaining adjustments, in Book A.

The magnetic variation is 15°30'E.

Resurvey of 5th St. Par. N., through Part of R. 5 W.

From the reestablished standard cor. of Ts. 21 N., Rs. 4 and 5 W., described in Book A;

32.00
40.01

S.89°32'W., on S. bdy. of sec. 36, over rolling land.
Dry bed of Chino Creek, 20 lks. wide, course SE.
The old standard $\frac{1}{4}$ sec. cor., which is a malpais stone, 16x14x11 ins., loosely set, marked and witnessed as described by the Surveyor General. I reestablish this cor. as follows:
With original stone, set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, with brass cap, marked

SC
1/4S36

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

9.39
40.10

Thence West, on S. half of S. bdy. of sec. 36.
Road from Seligman to Prescott, bears NW. and SE.
The old standard cor. of secs. 35 and 36, which is a sandstone, 16x10x4 ins., loosely set, marked as described by the Surveyor General. I reestablish this cor. as follows:
With original stone, set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, with brass cap, marked

SC
T21N | R 5W
S35 | S36

1916

dig pits, 24x18x12 ins., crosswise on each line, E. and W., 3 ft., and N. of stone, 7 ft. diat.; and raise a mound of earth, 4 ft. base, 2 ft. high, N. of cor.

Land, rolling.
Soil, deep sandy loam, mixed with fine gravel; 2nd rate.
No timber.
Undergrowth, rabbit brush.

40.12

S.89°53'W., on S. bdy. of sec. 35, over rolling land.
The old standard $\frac{1}{4}$ sec. cor., which is marked by a small mound of stone, no marked stone, being found. I reestablish this cor. as follows:
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, with brass cap, marked

2

Resurvey of 5th St. Par. N., through Part of R. 5 W.

Chains

SC
 $\frac{1}{4}$ S35

1916

dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor;

 Thence S.89°14'W., on W. half of S. bdy. of sec. 35.

.23
 39.96

Old road, bears N. and S.

The old standard cor. of secs. 34 and 35, which is a marked stone and post, as described by the Surveyor General.

I reestablish this cor. as follows:

With original cor., set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, with brass cap, marked

S | C
 T21N | R 5W
 S34 | S35

1916

dig pits, 24x18x12 ins., crosswise on each line, E. and W. 3 ft., and N. of cor. 7 ft. dist.; and raise a mound of earth, 4 ft. base, 2 ft. high, N. of cor.

Land, rolling.

Soil, deep sandy loam, mixed with fine gravel; 2nd rate.

No timber.

Undergrowth, rabbit brush.

N.89°17'W., on S. bdy. of sec. 34,
 over rolling land.

40.17

The old standard $\frac{1}{4}$ sec. cor., which is now marked by a mound of stone only. I reestablish this cor. as follows:

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, with brass cap, marked

SC
 $\frac{1}{4}$ S34

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

Land, rolling.

Soil, deep sandy loam, mixed with fine gravel, stony in places; 2nd and 3rd rate.

No timber.

Undergrowth, rabbit brush.

Portion of S. Bdy., T. 20 N., R. 5 W.

From the reestablished cor. of Ts. 19 and 20 N., Rs. 4 and 5 W., on 1st G. M. W.; hereinbefore described;

West, bet. secs. 1 and 36,
 over gently rolling land.

21.00

Wash, 10 lks. wide, 2 ft. deep, course NE.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, surrounded by a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked

Chains

S36
 $\frac{1}{4}$
 S 1
 1916

80.00 dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 1, 2, 35 and 36, with brass cap, marked

T20N	R 5W
S35	S36
S2	S1

T19N
 1916

dig pits, 18x18x12 ins., in each sec., $5\frac{1}{2}$ ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, gently rolling.
 Soil, gravelly; 2nd rate.
 No timber.
 Undergrowth, rabbit brush and cactus.

22.30 West, bet. secs. 2 and 35,
 over rolling land.
 40.00 Wash, 20 lks. wide, 4 ft. deep, course N.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S35
 $\frac{1}{4}$
 S 2
 1916

from which
 A juniper, 36 ins. diam., bears S.68°W., 67 lks. dist., marked $\frac{1}{4}$ S2 BT.
 No tree available in sec. 35. Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
 Thence through scattering juniper timber.

71.05 Wash, 10 lks. wide, 6 ins. deep, course NE.
 80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 2, 3, 34 and 35, with brass cap, marked

T20N	R 5 W
S34	S35
S3	S2

T19N
 1916

from which
 A juniper, 10 ins. diam., bears S.62 $\frac{1}{2}$ °E., 13 $\frac{1}{2}$ lks. dist., marked T19N R5W S2 BT.
 A juniper, 10 ins. diam., bears N.59°08'E., 280 lks. dist., marked T20N R5W S35 BT.
 A juniper, 10 ins. diam., bears N.15°53'W., 320 lks. dist., marked T20N R5W S34 BT.
 A juniper, 12 ins. diam., bears S.9°28'W., 426 lks. dist., marked T19N R5W S3 BT.
 Dig pits, 18x18x12 ins., in each sec., $5\frac{1}{2}$ ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, gently rolling.
 Soil, gravelly; 2nd rate. Timber, juniper.
 Undergrowth, rabbit brush.

Portion of S. Bdy., T. 20 N., R. 5 W.

Chains

- West, bet. secs. 3 and 34,
over gently rolling land, in scattering juniper timber.
- 1.02 Wire fence bears N. and S.; 70 lks. S. of NE. cor., whence
it extends W.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
- $$\begin{array}{r} S34 \\ \frac{1}{4} \\ \hline S3 \\ 1916 \end{array}$$
- from which
- A juniper, 40 ins. diam., bears S.85°22'E., 345 lks. dist.,
marked $\frac{1}{4}$ S3 BT.
- A juniper, 15 ins. diam., (in fence) bears N.43 $\frac{1}{2}$ °E.,
105 lks. dist., marked $\frac{1}{4}$ S34 BT.
- Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.,
and raise a mound of earth, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high,
N. of cor.
- 80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the
ground, for cor. of secs. 3, 4, 33 and 34, with brass
cap, marked
- $$\begin{array}{r|l} T20N & R5W \\ \hline S33 & S34 \\ \hline S4 & S3 \\ T19N \\ 1916 \end{array}$$
- from which
- A juniper, 18 ins. diam., bears N.40°25'E., 347 lks.
dist., marked T20N R5W S34 BT.
- A juniper, 10 ins. diam., bears S.46°16'W., 302 lks.
dist., marked T19N R5W S4 BT.
- No bearing trees available in secs. 3 and 33. Dig pits,
18x18x12 ins., in each sec., 5 $\frac{1}{2}$ ft. dist., and raise a
mound of earth, 4 ft. base, 2 ft. high, W. of cor.
- Land, gently rolling.
Soil, gravelly loam; 2nd rate.
Timber, juniper.
Undergrowth, rabbit brush.

- West, bet. secs. 4 and 33,
over gently rolling land, through scattering timber and
undergrowth.
- 23.80 Asc. steep E. slope of small rocky spur.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 4 ins. in the
ground to limestone ledge, surrounded by a mound of
stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked
- $$\begin{array}{r} S33 \\ \frac{1}{4} \\ \hline S4 \\ 1916 \end{array}$$
- from which
- A pinyon, 10 ins. diam., bears S.3°W., 81 lks. dist.,
marked $\frac{1}{4}$ S4 BT.
- A pinyon, 15 ins. diam., bears N.43 $\frac{1}{2}$ °W., 78 lks. dist.,
marked $\frac{1}{4}$ S33 BT.
- 42.50 Top of spur, 215 ft. above ft. of slope; extends S. 10.00
chs. Desc. on SW. slope.
- 57.00 Thence on S. slope.
- 63.13 Wire fence, running E. and W., bears N., 12 lks. dist.
- 71.13 Asc. on E. slope.
- 80.00 Set an iron post, 3 ft. long, 3 ins. diam., 6 ins. in the
ground, to rock, surrounded by a mound of stone, for cor.
of secs. 4, 5, 32 and 33, with brass cap, marked

Portion of S. Bdy., T. 20 N., R. 5 W.

Chains

T20N	R 5W
S32	S33

S5	S4
----	----

T19N

1916

from which

A pinyon, 12 ins. diam., bears S.49°E., 271 lks. dist., marked T19N R5W S4 BT.

A pinyon, 8 ins. diam., bears S.31½°W., 61 lks. dist., marked T19N R5W S5 BT.

A pinyon, 8 ins. diam., bears N.55½°E., 75 lks. dist., marked T20N R5W S33 BT.

A pinyon, 10 ins. diam., bears N.22½°W., 41 lks. dist., marked T20N R5W S32 BT.

Land, gently rolling and mountainous.

Soil, to 23 chs. and from 65 to 80 chs., gravelly; 2nd rate; remainder, rocky; 3rd rate.

Timber, juniper and pinyon.

Undergrowth, buckbrush and rabbit brush.

Partial Subdivision of T. 20 N., R. 5 W.

From the cor. of secs. 1, 2, 35 and 36, on S. bdy. of Tp. hereinbefore described;

N.0°01'W., bet. secs. 35 and 36, over gently rolling land.

18.30 Wash, 15 lks. wide, course NE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

S35	S36
-----	-----

1916

dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist. and raise a mound of earth, 3½ ft. base, 1½ ft. high, W. of cor.

80.00 Point for sec. cor. falls in wash, 30 lks. wide, 30 ft. deep, course NE.; where it is impracticable to permanently establish a monument. Therefore at

79.50 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for witness cor. to cor. of secs. 25, 26, 35 and 36, with brass cap, marked

W C	
T20N	R 5W
S26	S25
S35	S36

1916

from which

A juniper, 12 ins. diam., bears S.13°E., 122 lks. dist., marked T20 N R5W S36 Br.

A juniper, 8 ins. diam., bears S.27°45'W., 217 lks. dist., marked T20N R5W S35 BT.

No other bearing trees within limits. Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, gently rolling.

Soil, red adobe; 2nd rate.

Timber, a few junipers and pinyons.

Undergrowth, rabbit brush.

Chains

East, on a random line, bet. secs. 25 and 36,
from true pt. for cor. of secs. 25, 26, 35 and 36.


40.00 Set temp. $\frac{1}{4}$ sec. cor.

78.63 Intersect E. bdy. of Tp. 2 lks. N. of the cor. of secs. 25 and 36, described in book A.

Thence N. $89^{\circ}59'$ W., on a true line, bet. secs. 25 and 36, over gently rolling land.

20.43 Wash, 40 lks. wide, course N.

38.63 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

77.10 Desc. NW. slope, into wash.

78.63 The pt. for cor. of secs. 25, 26, 35 and 36.

Land, gently rolling.
Soil, gravelly brown; 2nd rate.
Undergrowth, rabbit brush.
No timber.

N. $0^{\circ}01'$ W., bet. secs. 25 and 26,
from true pt. for cor. of secs. 25, 26, 35 and 36,
ascending steep SE. slope, out of wash.


2.00 Top of slope. Thence across flat spur, which slopes N. for 10.00 chs.

5.38 Right bank of draw, course NE.

7.17 Bottom of same.

10.38 Left bank of same. Thence over gently rolling land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

51.50 Wash, 10 lks. wide, course E.


55.25 Fence, bears N. 69° E. and S. 69° W. At a point 15 chs. S. 69° W. fence turns NW.

75.50 Right bank of draw, course N. 60° E.

76.16 Bottom of same. A few junipers in same.

77.00 Left bank of same.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 23, 24, 25 and 26, with brass cap, marked



dig pits, 18x18x12 ins., in each sec., $5\frac{1}{2}$ ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, rolling. Soil, gravel and brown loam; 2nd rate. Timber, a few junkpers. Undergrowth, rabbit brush.

Partial Subdivision of T. 20 N., R. 5 W.

Chains

S.89°59'E., on a random line, bet. secs. 24 and 25.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 78.08 Intersect E. bdy. of Tp. 36 lks. S. of the cor. of secs. 24 and 25, described in book A.
 Thence S.89°45'W., on a true line, bet. secs. 24 and 25, over rolling land.
 18.46 Fence bears N.70°E. and S.70°W.
 25.36 Right bank of draw, course N.10°E. Desc. W. slope.
 31.60 Bottom of same. Wash, 10 lks. wide, course N.10°E. Asc. E. slope.
 38.08 On left bank of same,
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S24
 $\frac{1}{4}$
 S25
 1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

58.10 Right bank of draw, course NE.
 61.60 Bottom of same.
 63.10 Left bank of same.
 78.08 The cor. of secs. 23, 24, 25 and 26.

Land, rolling.
 Soil, gravel and brown loam; 2nd rate.
 No timber.
 Undergrowth, rabbit brush.

N.0°01'W., bet. secs. 23 and 24, over gently rolling land.
 21.00 Draw, course S.60°E.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
 S23 | S24
 1916

dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

63.95 Wire fence bears S.50°W. and N.50°E.
 64.70 Wash, 15 lks. wide, 3 ft. deep, course N.50°E.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 13, 14, 23 and 24, with brass cap, marked

T20N | R 5W
 S14 | S13
 S23 | S24
 1916

dig pits, 18x18x12 ins., in each sec., $5\frac{1}{2}$ ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, rolling.
 Soil, gravel and brown loam; 2nd rate.
 No timber.
 Undergrowth, rabbit brush.

Chains

40.00 N.89°45'E., on a random line, bet. secs. 13 and 24.
 Set temp. $\frac{1}{4}$ sec. cor.
 77.23 Intersect E. bdy. of Tp. at the cor. of secs. 13 and 24,
 described in Book A.

Thence S.89°45'W., on a true line, bet. secs. 13 and 24,
 over rolling land.

1.64 NE. cor. of corral fence, running S. and N.80°W., 100 lks.
 S. of line.

2.64 Road from Prescott to Seligman bears NW. and SE.

5.24 Cor. of corral fence, running S.70°W. and S.80°E., 15 lks.
 S. of line.

7.94 Empty house, 10 ft. wide, 16 ft. long, bears S.250 lks.
 dist.,

8.24 Windmill and water tank, 250 lks. S. of line.

11.10 Wire fence, bears N.27°W. and S.27°E.

37.23 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S13
 $\frac{1}{4}$
 S24
 1916

dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.,
 and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
 N. of cor.

39.95 Wire fence, bears N.54 $\frac{1}{2}$ °E. and S.54 $\frac{1}{2}$ °W.
 48.25 Wash, 20 lks. wide, 4 ft. deep, course NE.
 77.23 The cor. of secs. 13, 14, 23 and 24.

Land, rolling.
 Soil, gravelly loam; 2nd rate.
 No timber.
 Undergrowth, rabbit brush.

2.65 N.0°01'W., bet. secs. 13 and 14,
 over rolling land.
 Wash, 10 lks. wide, course N.60°E.
 19.26 Wash, 10 lks. wide, course E.
 31.64 Draw, course S.60°E. Asc. on SW. slope.
 40.00 On low spur, which extends 30 chs. S.70°E.,
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
 S14 | S13
 1916

dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.,
 and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.

80.00 Continue over gently rolling land, with general slope
 toward Chino Creek.
 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 11, 12, 13 and 14, with brass
 cap, marked

T20N | R 5W
 S11 | S12
 S14 | S13
 1916

dig pits, 18x18x12 ins., in each sec., $5\frac{1}{2}$ ft. dist.,
 and raise a mound of earth, 4 ft. base, 2 ft. high,
 W. of cor.

Partial Subdivision of T. 20 N., R. 5 W.

Chains

Land, rolling.
Soil, gravelly brown loam; 2nd rate.
No timber.
Undergrowth, rabbit brush.

40.00 N.89°45'E., on a random line, bet. secs. 12 and 13.
Set temp. $\frac{1}{4}$ sec. cor.
73.96 Intersect E. bdy. of Tp. 13 lks. S. of the cor. of secs. 12 and 13, described in Book A.

Thence S.89°39'W., on a true line, bet. secs. 12 and 13, over level land, through scattering undergrowth.
14.00 Desc. gravelly SW. slope.
17.00 Thence over level valley.
24.66 Chino Creek, dry, 100 lks. wide, 6 ft. deep, course SE.
33.96 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ S12
S13
1916

dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
54.00 Leave level valley. Thence over rolling land, with general NE. slope.
59.48 Road from Prescott to Seligman bears NW. and SE.
73.96 The cor. of secs. 11, 12, 13 and 14.

Land, rolling and level.
Soil, gravelly brown loam to 20 chs. and from 57 to 73.96 chs; 2nd rate; remainder, brown loam; 1st rate.
No timber.
Undergrowth, rabbit brush.

16.65 N.0°01'W., bet. secs. 11 and 12, over gently rolling land.
35.00 Road from Prescott to Seligman bears NW. and SE.
40.00 Desc. gradual NE. slope to Chino Valley.
Enter level land of Chino Valley.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
S11 | S12
1916

dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
56.90 Wash, 10 lks. wide, course E.
74.80 Chino Creek, 30 lks. wide, 8 ft. deep, course SE. Thence over rolling land.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 1, 2, 11 and 12, with brass cap, marked

T20N | R5W
S2 | S1
S11 | S12
1916

dig pits, 18x18x12 ins., in each sec., $5\frac{1}{2}$ ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high,

Chains

W. of cor.

Land, rolling and level.

Soil, first 40 and last 5 chs., gravelly brown loam, 2nd rate; remainder, brown loam, 1st rate.

No timber.

Undergrowth, rabbit brush.

40.00

N.89°39'E., on a random line, bet. secs. 1 and 12.

Set temp. $\frac{1}{4}$ sec. cor.

68.02

Intersect E. bdy. of Tp. 16 lks. N. of the cor. of secs. 1 and 12, described in Book A.

Thence S.89°47'W., on a true line, bet. secs. 1 and 12, over rolling land.

14.76

Wash, 10 lks. wide, course S.

38.02

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S1

S1
1916

dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

52.93

Wash, 6 lks. wide, 3 ft. deep, course S.

68.02

The cor. of secs. 1, 2, 11 and 12.

Land, rolling.

Soil, gravelly brown loam; 2nd rate.

No timber.

Undergrowth, rabbit brush.

40.00

N.0°01'W., bet. secs. 1 and 2, over rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
S2 | S1
1916

dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

49.66

Intersect 5th St. Par. N. 233 lks. N.89°14'E. of the reestablished $\frac{1}{4}$ sec. cor. on S. bdy. of sec. 31, described in Book A. At point of intersection

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for closing cor. of secs. 1 and 2, with brass cap, marked

T21N R4W
S31

S2 | S1
T20N R5W
C C
1916

dig pits, 24x18x12 ins., E. and W., 3 ft., and S. of post, 7 ft. dist.; and raise a mound of earth, 4 ft. base, 2 ft. high, S. of cor.

Land, rolling. Soil, gravelly loam; 2nd rate.


No timber. Undergrowth, rabbit brush.

Partial Subdivision of T. 20 N., R. 5 W. 11

Chains


From the cor. of secs. 2, 3, 34 and 35, on S. bdy. of Tp., hereinbefore described;

26.74 N.0°01'W., bet. secs. 34 and 35,
 over gently rolling land, through scattering timber and undergrowth.
 40.00 Wash, 30 lks. wide, course E.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



from which
 A juniper, 12 ins. diam., bears N.0 $\frac{1}{2}$ °W., 505 lks. dist., marked $\frac{1}{4}$ S34 BT.
 A juniper, 18 ins. diam., bears N.4°37'E., 458 lks. dist., marked $\frac{1}{4}$ S35 BT.
 Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 26, 27, 34 and 35, with brass cap, marked




dig pits, 18x18x12 ins., in each sec., 5 $\frac{1}{2}$ ft. dist., and raise a mound of earth, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Land, gently rolling.
 Soil, gravelly brown loam about 1 ft. deep, with hardpan sub-soil; 2nd rate.
 Timber, juniper.
 Undergrowth, rabbit brush.

40.00 East, on a random line, bet. secs. 26 and 35.
 79.78 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect N. and S. line 12 lks. N. of the true pt. for cor. of secs. 25, 26, 35 and 36.

16.00 Thence N.89°55'W., on a true line, bet. secs. 26 and 35,
 over gently rolling through scattering undergrowth.
 39.89 Wash, 10 lks. wide, course NE. Thence over level land.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

79.78 The cor. of secs. 26, 27, 34 and 35.

Land, gently rolling and level.
 Soil, gravelly loam; 2nd rate.
 No timber.
 Undergrowth, rabbit brush.

Chains

N.0°01'W., bet. secs. 26 and 27,
over gently rolling land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$$\frac{1}{4}$$

S27	S26
-----	-----

1916

80.00 dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.,
and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 22, 23, 26 and 27, with brass
cap, marked

T20N	R5W
S22	S23
S27	S26

1916

dig pits, 18x18x12 ins., in each sec., $5\frac{1}{2}$ ft. dist.,
and raise a mound of earth, 4 ft. base, 2 ft. high,
W. of cor.

Land, gently rolling.

Soil, gravelly brown loam; 2nd rate.

No timber.

Undergrowth, rabbit brush.

40.00 S.89°55'E., on a random line, bet. secs. 23 and 26.
Set temp. $\frac{1}{4}$ sec. cor.

79.66 Intersect N. and S. line 14 lks. N. of the cor. of secs.
23, 24, 25 and 26.

28.26 Thence N.89°49'W., on a true line, bet. secs. 23 and 26,
over gently rolling land.

Wire fence bears S.20°E. and N.20°W.

39.83 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$$\frac{1}{4}$$

S23	S26
-----	-----

1916

79.66 dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.,
and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
N. of cor.

The cor. of secs. 22, 23, 26 and 27.

Land, gently rolling.

Soil, gravelly brown loam; 2nd rate.

No timber.

Undergrowth, rabbit brush.

15.00 N.0°01'W., bet. secs. 22 and 23,
over gently rolling land.

23.55 Wash, 6 lks. wide, course NE.

40.00 Wash, 5 lks. wide, course N.60°E.

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$$\frac{1}{4}$$


S22	S23
-----	-----

1916

Partial Subdivision of T. 20 N., R. 5 W. 13

Chains

dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, 3½ ft. base, 1½ ft. high, W. of cor.
 68.20 Wash, 5 lks. wide, course E.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 14, 15, 22 and 23, with brass cap, marked




dig pits, 18x18x12 ins., in each sec., 5½ ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, gently rolling.
 Soil, gravelly brown loam; 2nd rate.
 No timber.
 Undergrowth, rabbit brush.

40.00 S.89°49'E., on a random line, bet. secs. 14 and 23.
 Set temp. ¼ sec. cor.
 79.74 Intersect N. and S. line 12 lks. S. of the cor. of secs. 13, 14, 23 and 24.

Thence N.89°54'W., on a true line, bet. secs. 14 and 23, over rolling land.


6.55 Wash, 6 lks. wide, 2 ft. deep, course N.60°E.
 39.15 Wash, 5 lks. wide, 6 ins. deep, course N.70°E.
 39.87 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked



dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, 3½ ft. base, 1½ ft. high, N. of cor.
 79.74 The cor. of secs. 14, 15, 22 and 23.

Land, gently rolling.
 Soil, gravelly loam; 2nd rate.
 No timber.
 Undergrowth, rabbit brush.

40.00 N.0°01'W., bet. secs. 14 and 15, over gently rolling land.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked



80.00 dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, 3½ ft. base, 1½ ft. high, W. of cor.
 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 10, 11, 14 and 15, with brass cap, marked

Chains

T20N	R5W
S10	S11
S15	S14

1916

dig pits, 18x18x12 ins., in each sec., 5½ ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, gently rolling.
Soil, gravelly brown loam; 2nd rate.
No timber.
Undergrowth, rabbit brush.

40.00 S.89°54'E., on a random line, bet. secs. 11 and 14.
79.00 Set temp. ¼ sec. cor.
Intersect N. and S. line 5 lks. N. of the cor. of secs. 11, 12, 13 and 14.

39.90 Thence N.89°52'W., on a true line, bet. secs. 11 and 14, over gently rolling land.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

S11
¼
S14

1916

79.80 dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist. and raise a mound of earth, 3½ ft. base, 1½ ft. high, N. of cor.
The cor. of secs. 10, 11, 14 and 15.

Land, rolling.
Soil, gravelly loam; 2nd rate.
No timber.
Undergrowth, rabbit brush.

40.00 N.0°01'W., bet. secs. 10 and 11, over gently rolling land.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

S10	S11
-----	-----

1916

52.75 dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, 3½ ft. base, 1½ ft. high, W. of cor.

80.00 Draw, course NE.
Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 2, 3, 10 and 11, with brass cap, marked

T20N	R5W
S3	S2
S10	S11

1916

dig pits, 18x18x12 ins., in each sec., 5½ ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.


Partial Subdivision of T. 20 N., R. 5 W.

Chains

Land, gently rolling.
Soil, gravelly brown loam; 2nd rate.
No timber.
Undergrowth, rabbit brush..

40.00 S.89°52'E., on a random line, bet. secs. 2 and 11.
Set temp. $\frac{1}{4}$ sec. cor.
80.04 Intersect N. and S. line 7 lks. S. of the cor. of secs.
1, 2, 11 and 12.


6.94 Thence N.89°55'W., on a true line, bet. secs. 2 and 11,
over gently rolling land, through scattering undergrowth.
40.02 Chino Creek, dry, 50 lks. wide, 6 ft. deep, course SE.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked




44.85 dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.,
80.04 and raise a mound of earth, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high,
N. of cor.
Road bears NW. and SE., from Seligman to Prescott.
The cor. of secs. 2, 3, 10 and 11.

Land, rolling.
Soil, brown loam, gravelly on W. 45 chs.; 2nd rate.
No timber.
Undergrowth, rabbit brush.

39.30 N.0°01'W., bet. secs. 2 and 3,
40.00 over gently rolling land.
Road from Prescott to Seligman bears NW. and SE.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



49.14 dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.,
and raise a mound of earth, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high,
W. of cor.
Intersect 5th St. Par. N., 240 lks. N.89°32'E. of the
reestablished standard $\frac{1}{4}$ sec. cor. on S. bdy. of sec.
36, T. 21 N.; R. 5 W., hereinbefore described.
At point of intersection
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in
the ground, for closing cor. of secs. 2 and 3, with
brass cap, marked



and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
S. of cor.

Land, rolling. Soil, gravelly loam; 2nd rate.
No timber. Undergrowth, rabbit brush.

Chains

From the cor. of secs. 3, 4, 33 and 34, on S. bdy. of Tp. hereinbefore described,

N.0°02'W., bet. secs. 33 and 34, over gently rolling land, through scattering timber and undergrowth.

.84
40.00

Wire fence, bears E. and W.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked

1/4
S33 | S34

1916

from which

A juniper, 12 ins. diam., bears S.21 1/4°W., 430 lks. dist., marked 1/4 S33 BT.

A juniper, 8 ins. diam., bears N.20°E., 208 lks. dist., marked 1/4 S34 BT.

41.10
80.00

Wash, 10 lks. wide, course SE.
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 27, 28, 33 and 34, with brass cap, marked

T20N | R5W
S28 | S27

S33 | S34

1916

from which

A juniper, 8 ins. diam., bears N.65 1/2°W., 36 lks. dist., marked T20N R5W S28 BT.

A juniper, 10 ins. diam., bears S.81°W., 47 lks. dist., marked T20N R5W S33 BT.

A juniper, 12 ins. diam., bears N.39 1/2°E., 103 lks. dist., marked T20N R5W S27 BT.

A juniper, 14 ins. diam., bears S.45°45'E., 168 lks. dist., marked T20N R5W S34 BT.

Land, gently rolling.

Soil, gravelly, brown loam; 2nd rate.

Timber, juniper.

Undergrowth, rabbit brush and Mexican currants.

40.00
80.12

East, on a random line, bet. secs. 27 and 34.
Set temp. 1/4 sec. cor.
Intersect N. and S. line 4 lks. S. of the cor. of secs. 26, 27, 34 and 35.

40.06

Thence S.89°58'W., on a true line, bet. secs. 27 and 34, over gently rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked

S27
1/4

S34
1916

53.22
80.12

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

Old dim road bears N. and S.

The cor. of secs. 27, 28, 33 and 34.

Land, gently rolling.

Soil, gravelly brown loam; 2nd rate.

Timber, scattering juniper and Mexican currant, on W. half.

Undergrowth, rabbit brush.

Partial Subdivision of T. 20 N., R. 5 W.

17

Chains

N.0°02'W., bet. secs. 27 and 28,
over rolling land, through scattering timber and under-
growth.

18.60

Wash, 20 lks. wide, 3 ft. deep, course N.80°E.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
 S28 | S27
 1916

from which

A cedar, 4 ins. diam., bears N.17°20'W., 100 lks. dist.,
marked $\frac{1}{4}$ S28 BT.

A juniper, 10 ins. diam., bears N.45°08'E., 184 lks. dist.,
marked $\frac{1}{4}$ S27 BT.

44.60

Wash, 15 lks. wide, course E.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 21, 22, 27 and 28, with brass
cap, marked

T20N	R5W
S21	S22
S28	S27

 1916

No trees of sufficient size for witnesses available.
Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, gently rolling.

Soil, gravelly brown loam; 2nd rate.

Timber, juniper, cedar and Mexican currants.

Undergrowth, rabbit brush.

40.00

N.89°58'E., on a random line, bet. secs. 22 and 27.

80.22

Set temp. $\frac{1}{4}$ sec. cor.

Intersect N. and S. line 2 lks. N. of the cor. of secs.
22, 23, 26 and 27.

18.42

Thence S.89°59'W., on a true line, bet. secs. 22 and 27,
over level land, through scattering undergrowth.

40.11

Wash, 6 lks. wide, course NE.

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S22
 $\frac{1}{4}$
 S27
 1916

dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.,
and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
N. of cor.

80.22

The cor. of secs. 21, 22, 27 and 28.

Land, level.

Soil, gravelly brown loam; 2nd rate.

No timber.

Undergrowth, rabbit brush.

N.0°02'W., bet. secs. 21 and 22,
over rolling land, through scattering undergrowth.

8.90

Wash, 30 lks. wide, course NE.


38.78

Wash, 10 lks. wide, course E.


40.00

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

Chains



80.00 dig pits, 18x18x12 ins., N. and S. of post, 3 ft dist., and raise a mound of earth, 3½ ft. base, 1½ ft. high, W. of cor.
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 15, 16, 21 and 22, with brass cap, marked




dig pits, 18x18x12 ins., in each sec., 5½ ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, gently rolling.
Soil, gravelly brown loam; 2nd rate.
Timber, a few Mexican currants.
Undergrowth, rabbit brush.

40.00 N.89°59'E., on a random line, bet. secs. 15 and 22.
Set temp. ¼ sec. cor.
80.08 Intersect N. and S. line 16 lks. N. of the cor. of secs. 14, 15, 22 and 23.


40.04 Thence N.89°54'W., on a true line, bet. secs. 15 and 22, over gently rolling land.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked



78.08 and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
80.08 Old road bears N.15°W. and S.15°E.
The cor. of secs. 15, 16, 21 and 22.

Land, gently rolling.
Soil, gravelly brown loam; 2nd rate.
No timber.
Undergrowth, rabbit brush.

15.75 N.0°02'W., bet. secs. 15 and 16,
over gently rolling land.
40.00 Wash, 10 lks. wide, course N.80°E.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked



75.00 and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
80.00 Old road bears N.3°W. and S.3°E.
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the

Chains

ground, for cor. of secs. 9, 10, 15 and 16, with brass cap, marked

T20N	R5W
S 9	S10
S16	S15
1916	

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, gently rolling.
 Soil, gravelly brown loam; 2nd rate.
 No timber. Undergrowth, rabbit brush.

40.00
 79.98

S.89°54'E., on a random line, bet. secs. 10 and 15.
 Set temp. ¼ sec. cor.
 Intersect N. and S. line 19 lks. S. of the cor. of secs. 10, 11, 14 and 15.

39.99

Thence S.89°58'W., on a true line, bet. secs. 10 and 15, over gently rolling land, through scattering undergrowth.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

S10
¼
S15
1916

dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, 3½ ft. base, 1½ ft. high, N. of cor.

79.98

The cor. of secs. 9, 10, 15 and 16.

Land, gently rolling.
 Soil, gravelly brown loam; 2nd rate.
 No timber.
 Undergrowth, rabbit brush.

20.80
 37.45
 40.00

N.0°02'W., bet: secs. 9 and 10, over gently rolling land, through scattering undergrowth.
 Old road bears N.5°E. and S.5°W.
 Same road, bears N.10°W. and S.10°E.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

¼
S 9 S10
1916

dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, 3½ ft. base, 1½ ft. high, W. of cor.

44.05
 69.10
 80.00

Same road, bears N.10°E. and S.10°W.
 Same road, bears N.10°W. and S.10°E.
 Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground, surrounded by a mound of stone, for cor. of secs. 3, 4, 9 and 10, with brass cap, marked

T20N	R 5W
S4	S3
S 9	S10
1916	

Chains

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, gently rolling.
Soil, gravelly brown loam; 2nd rate.
No timber.
Undergrowth, rabbit brush.

40.00 N.89°58'E., on a random line, bet. secs. 3 and 10.
79.72 Set temp. ¼ sec. cor.
Intersect N. and S. line 5 lks. S. of the cor. of secs. 2, 3, 10 and 11.

39.86 Thence S.89°56'W., on a true line, bet. secs. 3 and 10, over gently rolling land, through scattering undergrowth. Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

S 3
¼
S10
1916

79.72 dig pits, 18 x 18 x 12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, 3½ ft. base, 1½ ft. high, N. of cor.
The cor. of secs. 3, 4, 9 and 10.

Land, gently rolling.
Soil, gravelly brown loam; 2nd rate.
No timber.
Undergrowth, rabbit brush.

40.00 N.0°02'W., bet. secs. 3 and 4, over gently rolling land, through scattering undergrowth. Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

¼
S4 | S3
1916

49.13 dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, 3½ ft. base, 1½ ft. high, W. of cor.

Intersect 5th St. Par. N. 297 lks. N.89°53'E., of the reestablished standard ¼ sec. cor. of sec. 35, hereinbefore described. At point of intersection Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for closing cor. of secs. 3 and 4, with brass cap, marked

T21N R 5W
S35
S4 | S3
T20N R 5W
C C
1916

dig pits, 24x18x12 ins., on each line, E. and W., 3 ft., and S. of post, 7 ft.; and raise a mound of earth, 4 ft. base, 2 ft. high, S. of cor.

Land, gently rolling.
Soil, gravelly loam; 2nd rate.
No timber.
Undergrowth, rabbit brush.


Partial Subdivision of T. 20 N., R. 5 W.

Chains

From the cor. of secs. 4, 5, 32 and 33, on S. bdy. of Tp. hereinbefore described;


N.0°02'W., bet; secs. 32 and 33, along broken E. slope of hills, through timber and undergrowth.

- .85 Wire fence, bears E. and W.; SE. cor. 20 lks. W. of line. From cor. fence runs N.
- 13.90 Wash, 30 lks. wide, 3 ft. deep, course NE.
- 30.30 Wash, 10 lks. wide, 1 ft. deep, course E.
- 40.00 (4 lks. E. of wire fence hereinbefore described), Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, surrounded by a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked



from which

- A pinyon, 6 ins. diam., bears N.68°W., 36 lks. dist., marked $\frac{1}{4}$ S32 BT.
- A pinyon, 1 ins. diam., bears N.82°50'E., 69 lks. dist., marked $\frac{1}{4}$ S69 BT.
- 41.00 Wire fence 1 lk. W. of line. Desc. on NE. slope.
- 48.96 Wire fence, bears N.0 $\frac{1}{2}$ °E. and S.0 $\frac{1}{2}$ °W.
- 55.97 Ft. of NE. slope. Thence along E. slope.
- 65.72 Draw, course E. Wash, 5 lks. wide, in bottom. Asc. on S. slope.
- 73.17 Same wire fence, bears N.0 $\frac{1}{2}$ °W. and S.0 $\frac{1}{2}$ °E.
- 76.34 Same fence bears N.0 $\frac{1}{2}$ °E. and S.0 $\frac{1}{2}$ °W. Top of spur, slopes E., 10 chs. Desc. NE. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground, surrounded by a mound of stone, for cor. of secs. 28, 29, 32 and 33, with brass cap, marked



from which


- A pinyon, 12 ins. diam., bears N.33 $\frac{1}{2}$ °E., 69 lks. dist., marked T20N R5W S28 BT.
- A pinyon, 12 ins. diam., bears S.3°E., 113 lks. dist., marked T20N R5W S33 BT.
- A pinyon, 8 ins. diam., bears S.25 $\frac{1}{4}$ °W., 73 lks. dist., marked T20N R5W S32 BT.
- A pinyon, 12 ins. diam., bears N.59 $\frac{1}{2}$ °W., 97 lks. dist., marked T20N R5W S29 BT.

Land, mountainous.

Soil, solid limestone and rocky brown loam; 4th rate.
Timber, pinyon, juniper and cedar.
Undergrowth, palo-duro and rabbit brush.

- 40.00 East, on a random line, bet. secs. 28 and 33. Set temp. $\frac{1}{4}$ sec. cor.
- 80.20 Intersect N. and S. line 9 lks. N. of the cor. of secs. 27, 28, 33 and 34.

- 40.10 Thence N.89°56'W., on a true line, bet. secs. 28 and 33, over level land, through scattering timber and undergrowth. Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



Chains

dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, 3½ ft. base, 1½ ft. high, N. of cor.

69.00 Asc. 100 ft., on NE. slope, through dense timber and undergrowth.

80.10 Wire fence bears N.0½°E. and S.0½°W.

80.20 The cor. of secs. 28, 29, 32 and 33.

Land, mountainous in W. 11 chs., and level in E. part. Soil, rocky, 4th rate in mountainous part, and gravelly loam, 2nd rate, in level part. Timber, pinyon, juniper, cedar, Mexican currant. Undergrowth, rabbit brush.


N.0°02'W., bet. secs. 28 and 29, over mountainous land, through timber and undergrowth. Desc. 90 ft., on NE. slope.

9.90 Ft. of slope. Thence over rolling land.

14.10 Wash, 15 lks. wide, 1 ft. deep, course E.

17.60 Wash, 10 lks. wide, 1 ft. deep, course S.60°E.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground, surrounded by a mound of stone, for ¼ sec. cor; with brass cap, marked



from which

A pinyon, 7 ins. diam., bears N.68°E., 42 lks. dist., marked ¼ S28 BT.


A pinyon, 8 ins. diam., bears S.66¼°W., 28 lks. dist., marked ¼ S29 BT.

57.93 Wash, 5 lks. wide, course E.

65.60 Asc. S. slope.

73.50 Desc. N. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground, surrounded by a mound of stone, for cor. of secs. 20, 21, 28 and 29, with brass cap, marked



from which

A pinyon, 6 ins. diam., bears S.46¼°E., 39 lks. dist., marked T20N R5W S28 BT.

A pinyon, 7 ins. diam., bears S.43°45'W., 49 lks. dist., marked T20N R5W S29 BT.

A pinyon, 8 ins. diam., bears N.65½°W., 54 lks. dist., marked T20N R5W S20 BT.

A pinyon, 7 ins. diam., bears N.37½°E., 5 lks. dist., marked T20N R5W S21 BT.

Land, rolling and mountainous.

Soil, rocky clay and loam; 3rd and 4th rate.

Timber, pinyon and juniper.

Undergrowth, Spanish bayonet and palo duro.

40.00 S.89°56'E., on a random line, bet. secs. 21 and 28.

79.92 Set temp. ¼ sec. cor.

Intersect N. and S. line 4 lks. S. of the cor. of secs. 21, 22, 27 and 28.

Thence N.89°58'W., on a true line, bet. secs. 21 and 28,

Partial Subdivision of T. 20 N., R. 5 W.

Chains

over rolling land, through timber and undergrowth.

13.32 Wash, 15 lks. wide, course NE.

17.22 Wash, 15 lks. wide, course SE.

21.72 Wash, 15 lks. wide, course N.70°E.; comes from SW. Asc. E. slope.

39.96 Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ S21
S28

1916

from which

A pinyon, 10 ins. diam., bears N.31°W., 93 lks. dist., marked $\frac{1}{4}$ S21 BT.

A pinyon, 8 ins. diam., bears S.10 $\frac{1}{4}$ °E., 118 lks. dist., marked $\frac{1}{4}$ S28 BT.

42.00 Summit of E. slope.

51.75 Wash, 10 lks. wide, course NE.

58.92 Wash, 10 lks. wide, course N.70°E.

79.34 Wire fence bears N. and S.

79.92 The cor. of secs. 20, 21, 28 and 29.

Land, rolling.
Soil, rocky and gravelly brown loam; 2nd and 3rd rate.
Timber; pinyon, juniper, palo duro and mexican currant.
Undergrowth, rabbit brush.

N.0°02'W., bet. secs. 20 and 21, over rolling foot hills, through dense timber and undergrowth.

17.40 Wash, 5 lks. wide, course SE.

26.90 Wire fence bears E. and W. NE. cor. bears E., 100 lks. dist. From cor. fence runs S.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
S20 | S21

1916

from which

A pinyon, 8 ins. diam., bears N.5°W., 64 lks. dist., marked $\frac{1}{4}$ S20 BT.

A pinyon, 12 ins. diam., bears N.4 $\frac{1}{4}$ °E., 97 lks. dist., marked $\frac{1}{4}$ S21 BT.

41.20 Wash, 10 lks. wide, course SE. Thence asc. S. slope, 150 ft.

52.35 Spur, slopes E., 30 chs.

54.00 Desc. 80 ft., on N. slope.

63.46 Wash, 10 lks. wide, course E. Asc. 90 ft., on S. slope.

75.75 Spur, slopes SE. for 15 chs.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the ground, surrounded by a mound of stone and earth, for cor. of secs. 16, 17, 20 and 21, with brass cap, marked

T20N | R5W
S17 | S16
S20 | S21

1916

from which

A pinyon, 6 ins. diam., bears N.38 $\frac{1}{2}$ °W., 41 lks. dist., marked T20N R5W S17 BT.

A pinyon, 8 ins. diam., bears S.31°W., 47 lks. dist., marked T20N R5W S20 BT.

A pinyon, 6 ins. diam., bears N.23°E., 52 lks. dist., marked T20N R5W S16 BT.

A pinyon, 6 ins. diam., bears S.56 $\frac{1}{2}$ °E., 32 lks. dist., marked T20N R5W S21 BT.

78

Chains

Land, rolling in S. half and mountainous in N. part.
Soil, rock and clay, 3rd and 4th rate.
Timber, pinyon, juniper, palo duro and Mexican currant.
Undergrowth, rabbit brush.

40.00 S.89°58'E., on a random line, bet. secs. 16 and 21,
Set temp. $\frac{1}{4}$ sec. cor.
80.08 Intersect N. and S. line at the cor. of secs. 15, 16,
21 and 22.

33.00 Thence N.89°58'W., on a true line, bet. secs. 16 and 21,
over gently rolling land, through timber and undergrowth.
Wash, 10 lks. wide, course SE.
40.04 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S16
 $\frac{1}{4}$
S21
1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. base,
N. of cor.
55.50 Asc. on NE. slope.
61.65 Thence along N. slope of spur.
68.86 Rocky draw, course NE. Asc. SE. slope, 125 ft.
80.08 The cor. of secs. 16, 17, 20 and 21.

Land, gently rolling and mountainous.
Soil, gravelly brown loam, 2nd rate, on E. 60 chs., and
rocky clay, 4th rate, on remainder.
Timber, pinyon, cedar, Mexican currant, and juniper.
Undergrowth, rabbit brush.

18.28 N.0°02'W., bet. secs. 16 and 17,
over broken E. slope, through timber and undergrowth.
Draw, course SE. Asc. S. slope, 150 ft.
23.30 Spur, slopes E., 15 chs. Desc. N. slope, 290 ft.
38.77 Wash, 5 lks. wide, course SE. Asc. on S. slope.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the
ground, surrounded by a mound of stone and earth, for
 $\frac{1}{4}$ Sec. cor., with brass cap, marked

S17 | S16
1916

from which
A cedar, 6 ins. diam., bears S.6 $\frac{1}{2}$ °W., 527 lks. dist.,
marked $\frac{1}{4}$ S17 BT.
A pinyon, 12 ins. diam., bears S.82°45'E., 45 lks. dist.,
marked $\frac{1}{4}$ S16 BT.
54.60 Spur slopes S.75°E., 30 chs.; 300 ft. above wash at 38.77
ch. pt. Asc. on SE. slope, 85 ft.
63.70 Spur, slopes S.5°W. Thence along W. slope.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the
ground, surrounded by a mound of earth and stone, for
cor. of secs. 8, 9, 16 and 17, with brass cap, marked

T20N | R5W
S8 | S9
S17 | S16
1916

from which

Partial Subdivision of T. 20 N., R. 5 W.

Chains

A pinyon, 8 ins. diam., bears N.26 $\frac{1}{2}$ °W., 59 lks. dist., marked T20N R5W S8 BT.
 A pinyon, 8 ins. diam., bears N.85°E., 25 lks. dist., marked T20N R5W S9 BT.
 A cedar, 15 ins. diam., bears S.44 $\frac{1}{4}$ °E., 19 lks. dist., marked T20N R5W S16 BT.
 A pinyon, 7 ins. diam., bears S.36 $\frac{1}{4}$ °W., 45 lks. dist., marked T20N R5W S17 BT.

Land, mountainous.
 Soil, rocky clay; 4th rate.
 Timber, pinyon, cedar, juniper and palo duro.
 Undergrowth, cactus.

40.00 S.89°58'E., on a random line, bet. secs. 9 and 16.
 79.94 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect N. and S. line 2 lks. N. of the cor. of secs. 9, 10, 15 and 16.

.44 Thence N.89°57'W., on a true line, bet. secs. 9 and 16,
 17.14 over rolling land, through timber and undergrowth.
 38.00 Old road bears N. and S.
 39.97 Wash, 5 lks. wide, course NE. Asc. 330 ft., on SE. slope.
 Summit of ascent.
 Spur, slopes SE., 15 chs.
 Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, surrounded by a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ S 9
 S16
 1916

from which
 A pinyon, 6 ins. diam., bears N.4°W., 34 lks. dist., marked $\frac{1}{4}$ S9 BT.
 A pinyon, 12 ins. diam., bears S.87°W., 40 lks. dist., marked $\frac{1}{4}$ S16 BT.
 Desc. 60 ft., on SW. slope.
 44.64 Ft. of slope. Thence along S. slope.
 53.00 Head of draw, course SE. Asc. 380 ft., on E. slope.
 64.50 Summit of slope. Thence along S. slope.
 74.10 Spur, slopes S.5°W. Desc. 55 ft., on W. slope.
 79.94 The cor. of secs. 8, 9, 16 and 17.

Land, 15 chs. rolling and remainder mountainous.
 Soil, gravelly brown loam on rolling land and sandstone and clay on mountainous land; 2nd to 4th rate.
 Timber, pinyon, cedar, palo duro, Mexican currant and juniper.
 Undergrowth, rabbit brush and cactus.

3.30 N.0°02'W., bet. secs. 8 and 9,
 11.25 over mountainous land, along W. slope, through timber and undergrowth.
 20.37 Asc. 40 ft., on S. slope.
 27.85 Thence along W. slope.
 40.00 Ridge bears NW. and SE.
 Desc. NE. slope.
 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, surrounded by a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
 S8 | S9
 1916

Chains

from which

A pinyon, 7 ins. diam., bears N.70°W., 120 lks. dist., marked 1/4 S8 BT.

A pinyon, 6 ins. diam., bears N.40°E., 40 lks. dist., marked 1/4 S9 BT.

53.50 Ft. of NE. slope, 370 ft. below ridge. Thence over rolling land.

76.40 Wash, 10 lks. wide, course E.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 4, 5, 8 and 9, with brass cap, marked

T20N	R5W
S5	S4
S8	S9

1916

dig pits, 18x18x12 ins., in each sec., 5 1/2 ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, mountainous to 53 ch. pt., and rolling on remainder of line.

Soil, lava, sandstone and clay on mountainous and gravelly brown loam on rolling land; 2nd to 4th rate.

Timber, pinyon, cedar, Mexican currant and palo duro.

Undergrowth, buck brush, and rabbit brush.

40.00 S.89°57'E., on a random line, bet. secs. 4 and 9. Set temp. 1/4 sec. cor.

80.04 Intersect N. and S. line at the cor. of secs. 3, 4, 9 and 10.

40.02 Thence N.89°57'W., on a true line, bet. secs. 4 and 9, over gently rolling land, through scattering undergrowth.

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked

1/4	S 4
	S 9

1916

dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

71.15 Wash, 10 lks. wide, course NE.

80.04 The cor. of secs. 4, 5, 8 and 9.

Land, gently rolling.

Soil, gravelly brown loam; 2nd rate.

Timber, scattered pinyon and cedar on W. half.

Undergrowth, Mexican currant and rabbit brush.

40.00 N.0°02'W., bet. secs. 4 and 5, over rolling land, through scattering timber and undergrowth.

Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground, surrounded by a mound of stone, for 1/4 sec. cor., with brass cap, marked

1/4	
S5	S4

1916

Partial Subdivision of T. 20 N., R. 5 W.

Chains

49.09

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
Intersect 5th St. Par. N., 292 lks. S.89°17'E. of the reestablished standard ¼ sec. cor. of sec. 34, T. 21 N. R. 5 W., hereinbefore described. At pt. of intersection Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground, to bed rock, for closing cor. of secs. 4 and 5, with brass cap, marked

T21N R5W
S34

S5 S4
T20N R5W
C C
1916

dig pits, 24x18x12 ins., crosswise on each line, E. and W., 3 ft., and S. of post, 7 ft. dist.; and raise a mound of earth, 4 ft. base, 2 ft. high, S. of cor.

Land, rolling.
Soil, gravelly loam; 2nd rate.
Timber, pinyon and cedar.
Undergrowth, rabbit brush.

LATITUDES, DEPARTURES, AND CLOSING ERRORS.

Line designated	True Course	Dist.	Latitudes		Departures	
			N.	S.	E.	W.
		chs.	chs.	chs.	chs.	chs.
South Boundary	West	320.00				320.00
West Boundary, Subdivisional,	N.0°02'W.	449.09	449.09			.13
North Boundary, 5th St. Par. N.	S.89°17'E.	37.25		.46	37.25	
	N.89°14'E.	39.96	.53		39.96	
	N.89°53'E.	40.12	.08		40.12	
	East	40.10			40.10	
	N.89°32'E.	40.21	.33		40.21	
	N.89°22'E.	40.02	.44		40.02	
East Boundary, 1st G. M. W.,	N.89°14'E.	66.62	.89		66.61	
	S.4°13'E.	127.86		127.52	9.40	
	S.2°25'E.	80.53		80.46	3.35	
	S0°20'E.	40.40		40.40	.23	
	S1°01'E.	40.38		40.38	.71	
	S.0°15'E.	39.63		39.63	.17	
Convergency,	S.0°33'E.	40.27		40.27	.38	
	S.0°13'E.	40.24		40.24	.15	
	S.1°49'E.	41.27		41.25	1.31	
					.34	
Totals			451.36	450.61	320.31	320.13
			450.61		320.13	
Error in latitude,			.75			
					.18	

The greater part of the area embraced within the east two thirds of this township consists of rolling and gently sloping mesa, bounded on the west by foothills, and breaking away on the east to the valley through which Partridge Creek flows.

Chino Creek flows southeasterly through sections 2, 11, 12 and 13, joining Partridge Creek about a half mile E. of the E. bdy. of the township, whence the course is approximately south.

The soil of the mesa is generally a gravelly brown loam, from 1 to 3 ft. deep, underlaid by hardpan. That of the Chino valley is a rich reddish brown loam, loose, and apparently of great depth and free from rock. It appears to be subject to overflow to a depth of from 6 ins. to 2 ft., and is much cut by washes.

There is a fair growth of bunch and gramma grass over the township, affording grazing for stock. The SW. part of the area is covered with a good growth of juniper, cedar, pinyon, Mexican currant, buck brush and palo duro; which are also found in the W. range of sections, adjoining the Prescott National Forest. Rabbit brush and cactus are scattered over practically the whole area.

Portions of secs. 13, 23, 24, 25 and 26 are fenced, and there is a windmill, well and corrals in the NE. $\frac{1}{4}$ of sec. 24. These improvements have been made for stock watering and care.

There are no settlers.

Book "B"

Group 62,---Arizona.

4-680

Township 20 North, Range 5 West.

DATE DIAGRAM.

Former position of 5th St. Par. N., surveyed by Case

32	33	34	35	36	31	32	
5th St. Par. N.							
		4	3	2		1	
		3-2-16	2-24-16	2-22-16		2-18-16	
		9	10	11		12	
		2-29-16	2-24-16	2-22-16		2-18-16	
PRESCOTT		16	15	14		13	
		2-29-16	2-24-16	2-19-16		2-17-16	
NATIONAL		21	22	23		24	
		2-26-16	2-19-16	2-19-16		2-17-16	
FOREST		28	27	26		25	
		2-25-16	2-19-16	2-19-16		2-16-16	
		33	34	35		36	
		2-15-16	2-15-16	2-14-16		2-14-16	
						R5W	R4W


6-2764

Surveys and resurveys executed on dates shown in green on above diagram by William R. Johnston, U. S. Transitman.

CERTIFICATE OF UNITED STATES TRANSITMAN

30

I, Wm. R. Johnston, U. S. Transitman,, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General for Group 62, Arizona, bearing date of the 5th day of October, 1915, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the South boundary and subdivision lines of Township 20 North, Range 5 West, and resurveyed all those parts or portions of The 5th Standard Parallel North, in Range 5 West, of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes ^{and by the diagram on the reverse hereof} as having been executed by me, and under my direction; and that all the corners of said survey ^{and resurvey} have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General for Group 62, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey ^{and resurvey}

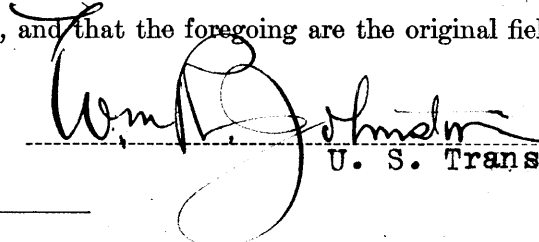

 U. S. Transitman.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,
 Phoenix, Arizona, October 16, 1918.

The foregoing field notes of the survey of a portion of the South boundary and subdivision lines of Township 20 North, Range 5 West, and the resurvey of 5th Standard Parallel North, through part of Range 5 West, all of the Gila and Salt River Base and Meridian, in the State of Arizona,

executed by William R. Johnston, U. S. Transitman, under his special instructions for Group 62, Arizona, dated Oct. 5, 1915, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved. and resurveys


 U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above described surveys in _____, has been correctly copied from the original notes on file in this office.