

3163

49

Book "B"

4-679

NOV-8-1918

BOOK 3163

FIELD NOTES

RE-
OF THE SURVEY OF A

Portion of the 2nd. Standard Parallel North, thru. Range 5 West, and

Portion of the West boundary,

and SURVEY of the

North and East boundaries, and

Subdivision lines of

TOWNSHIP 9 NORTH, RANGE 5 WEST,

Of the Gila and Salt River Base and Meridian,

In the State of Arizona.

EXECUTED BY

Chas. M. Pidgeon,

In the capacity of U. S. Surveyor, under instructions dated October 5, 1915,
issued by the United States Surveyor General to govern surveys included in
Group No. 60, which were approved by the Commissioner of the General Land
Office, October 25, 1915.

Resurvey & Survey commenced February 15, 1916

Resurvey & Survey completed March 4, 1916

Executed under Assignment
Instructions dated Dec. 7, 1915.

3163

3163


3163

Book "B"

Group 60 - - Arizona.

BOOK 3163

INDEX DIAGRAM.

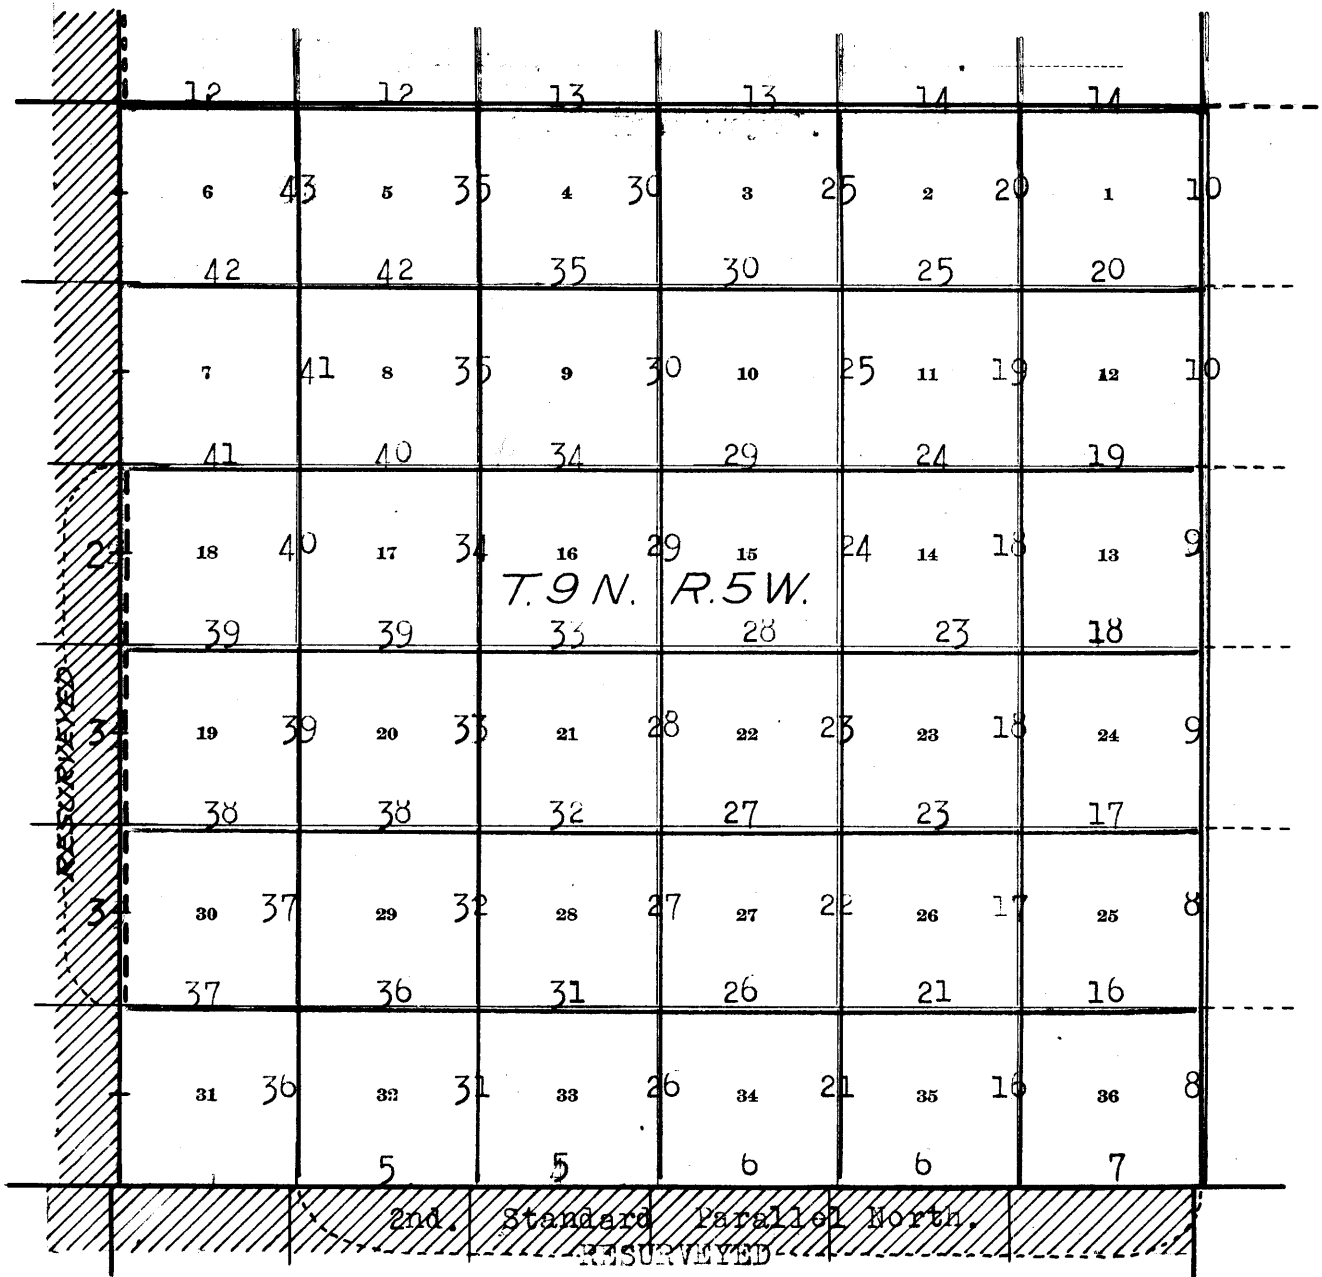

- Lines surveyed under this Group. Notes in this book. 3163
- - - Lines retraced or resurveyed under this group. Notes in this book. 3163
- Lines surveyed under this group. Notes in Book "C." 3164
- - - Lines retraced or resur. under this group. Notes in Book "C." 3164
- Accepted surveys.
- - - Unsurveyed.
- ▨ Areas surveyed as per accepted plats on file.

JAN 14 1918

BOOK 3163 16

Book "B"
Group 60 - - Arizona.

Township 9 North, Range 5 West.

DATE DIAGRAM

	2-19-16	2-19-16	2-19-16	2-19-16	2-19-16	2-18-16
	6	5	4	3	2	1
	3-4-16	3-3-16	3-3-16	2-29-16	2-25-16	2-23-16
	7	8	9	10	11	12
	2-4-16	3-4-16	3-3-16	2-29-16	2-25-16	2-23-16
	18	17	16	15	14	13
	3-2-16	3-2-16	2-28-16	2-26-16	2-25-16	2-23-16
	19	20	21	22	23	24
	3-2-16	3-1-16	2-28-16	2-26-16	2-24-16	2-22-16
	30	29	28	27	26	25
	3-1-16	3-1-16	2-28-16	2-26-16	2-24-16	2-22-16
	31	32	33	34	35	36
	3-1-16	2-28-16	2-26-16	2-24-16	2-22-16	2-17-16
	2-16-16	2-16-16	2-16-16	2-17-16	2-17-16	

RESURVEYED
2-15-16
2-15-16

2nd Standard Parallel North.

RESURVEYED.

Surveys executed on dates as shown on above diagram, by
Chas. M. Pidgeon, U. S. Surveyor.

... of
... ..

2. Resurvey of a Portion of The West Boundary of T. 9 N., R. 5 W.

Chains. Resurveys and surveys hereinafter described, executed by Chas. M. Pidgeon, U.S. Surveyor, on dates shown in diagram on page 1 hereof, using Young & Sons' light mountain transit No. 8010, with the

The Smith solar attachment. The horizontal limbs provided with two double verniers, placed opposite to each other, reading to single minutes of arc, which is also the least count of the verniers of the lat. and decl. arcs.

The instrument was examined, tested on the true meridian at Phoenix, Arizona, found correct, and was approved, conditional upon satisfactory field performance, by the Assistant Supervisor of Surveys for Arizona and California.

I examine the adjustments of the transit and correct all errors; then, to test the solar apparatus, by comparing its indications, resulting from solar observations made during a.m. and p.m. hours with a meridian determined by observations on Polaris at elongation, proceed as follows:-

Feb. 13, 1916. At camp near Skard's Ranch, near the center of sec. 11, T. 9 N., R. 5 W., in lat. $34^{\circ} 8' N.$, long. $112^{\circ} 44' W.$, at 9 hrs. 53.6 m., p.m., l.m.t., by watch, which is set to correct local mean time, observe Polaris at western elongation, in accordance with the Manual of Instructions, and mark a point in the line thus determined by a tack in a hub, set in the ground 6 chs. N. of station.

Feb. 14, 1916. At 7 hrs. 30 m., a.m., l.m.t., lay off the azimuth of Polaris, $1^{\circ} 22'$ to the E., and mark the meridian thus determined by a tack driven in a hub in the ground, 6 chs. N. of station.

At 8 hrs. 0 m. a.m., l.m.t., set off $34^{\circ} 8' N.$ on the lat. arc; $20^{\circ} 14' S.$ on the decl. arc; and determine a meridian with the solar. The line thus determined coincides with the meridian determined by observations on Polaris at elongation.

At 4 hrs. 0 m., p.m., l.m.t., set off $34^{\circ} 8' N.$ on the lat. arc; $20^{\circ} 10' S.$ on the decl. arc; and determine a meridian with the solar. The line thus determined coincides with the meridian determined by observations on Polaris at elongation.

The solar apparatus, by a.m. and p.m. observations, defines positions for meridian which coincide with the meridian determined by observations on Polaris at elongation; therefore, I conclude that the adjustments of the instrument are satisfactory.

From original cor. of secs. 7, 12, 13 & 18, on the W. bdy. of the Tp., which is a granite stone, 8 X 8 X 8 ins. above ground, marked and witnessed as described by the Surveyor-General.

S. $0^{\circ} 7' E.$, on a true line, bet. secs. 13 and 18.

Over rolling land, through dense undergrowth.

6.00

Wash, course S. $20^{\circ} E.$

18.70

Center of Martinez Creek Wash, course S. $20^{\circ} E.$

40.03½

Diligent search in this vicinity failed to reveal any trace of the original $\frac{1}{4}$ sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap

S13 | S18

1916

Dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft. dist.; and raise a mound of earth, $\frac{3}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

80.07

Intersect original cor. of secs. 13, 18, 19 & 24, which is a mesquite post, 3 ft. long, 4 ins. square, properly set, marked as described by the Surveyor-General. Redig


Resurvey of a Portion of The West Boundary of T. 9 N., R. 5 W. 3.

chains.

pits, 18 X 18 X 12 ins., in each sec., 5 1/2 ft. dist.;
 and raise a mound of earth, 4 ft. base, 2 ft. high, W.
 of cor.
 Land, rolling.
 Soil, sandy; 3rd rate.
 No timber.
 Undergrowth, cat claw and mesquite.


4.10
40.01

S.0° 4' E., on a true line, bet. secs. 19 and 24.
 Over rolling land, through dense undergrowth.
 Road, brs. N.45° W. and S.45° E.
 Diligent search in this vicinity failed to reveal any trace
 of the original 1/4 sec. cor.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for reestablished 1/4 sec. cor., marked on brass
 cap



68.30
71.00
79.00
80.02


Dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft.
 dist.; and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft.
 high, W. of cor.
 Wash, course S.20° E.
 Wash, course S.20° W.
 Wash, course S.15° W.
 Diligent search in this vicinity failed to reveal any trace
 of the original cor. of secs. 19, 24, 25 and 30.
 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for reestablished cor. of secs. 19, 24, 25 and
 30, marked on brass cap



Dig pits, 18 X 18 X 12 ins., in each sec., 5 1/2 ft. dist.;
 and raise a mound of earth, 4 ft. base, 2 ft. high, W.
 of cor.
 Land, rolling.
 Soil, sandy, 3rd and 4th rates.
 No timber.
 Undergrowth, palo verde and mesquite.

25.10
40.01

S.0° 4' E., on a true line, bet. secs. 25 and 30.
 Over rolling land, through scattering undergrowth.
 Wash, course S.25° E.
 Diligent search in this vicinity failed to reveal any trace
 of the original 1/4 sec. cor.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for reestablished 1/4 sec. cor., marked on brass
 cap



66.70
80.02

Dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft.
 dist.; and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft.
 high, W. of cor.
 Wash, course S.40° E.
 Intersect the cor. of secs. 25, 30, 31 & 36, which is a granite

4. Resurvey of a Portion of The West Boundary of T. 9 N., R. 5 W.

Chains.

stone, 4 X 6 X 8 ins. above ground, firmly set, marked and witnessed as described by the Surveyor-General. I redig the pits, 18 X 18 X 12 ins., in each sec., $5\frac{1}{2}$ dist.; and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, rolling.

Soil, sandy, 3rd rate.

No timber.

Undergrowth, palo verde and mesquite.

Chains.

From the original standard cor. of secs. 31 and 32, on the S. bdy. of T. 9 N., R. 5 W. (2nd. Std. Par. N.), which is a granite stone, 10x10x4 ins. above ground, firmly set, marked and witnessed as described by the surveyor general,

N. 89° 44' E., on a true line on S. bdy. of sec. 32. Over rolling land, thru scattering undergrowth.

12.05 Wash, course S. 20° E.

31.25 Martinez Creek wash, course S.

39.86 1/2 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished standard 1/4 sec. cor., marked on brass cap,

SC
1/4 S 32
1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

Continue line and measurement.

40.30 Intersect the original standard 1/4 sec. cor., which is a malpais stone, 12x12x10 ins. above ground, firmly set, marked and witnessed as described by the surveyor general. Change this corner to an angle point by destroying the markings on the stone, and on bearing trees, and remarking the letters AP in place of the original markings.

Thence,

S. 89° 25' E., on a true line, on S. bdy. of sec. 32, (E. 1/2).

Ascend 145 ft. to

25.00 Spur, slopes S. Descend 55 ft. to

39.43 Intersect the original standard cor. of secs. 32 and 33, which is a granite stone, 12x6x7 ins. above ground, marked and witnessed as described by the surveyor general.

Land, rolling.

Soil, gravelly, 3rd rate.

No timber.

Undergrowth, palo verde and mesquite.

S. 89° 59' E., on a true line on S. bdy. of sec. 33.

Over rolling mountainous land, thru scattering undergrowth.

Descend 65 ft. to

15.80 Center of wash, course S.

26.10 Center of wash, course S. Ascend 115 ft. to

31.30 Spur, slopes S. 10° E. Ascend 115 ft. to

35.80 Center of Antelope Creek wash, course S.

40.11 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished standard 1/4 sec. cor., marked on brass cap,

SC
1/4 S 33
1916

and raise a mound of stone 2 ft. base, 1 1/2 ft. high, N. of cor.

40.37 Intersect the original standard 1/4 sec. cor., which is a granite stone, 8x7x8 ins. above ground, firmly set, marked and witnessed, as described by the surveyor-general. Change this cor. to an angle point by destroying the markings on the stone, and marking the letters AP on S. face.

Thence,

N. 89° 32' E., on a true line, on S. bdy. of sec. 33 (E. 1/2).

Ascend 415 ft. to

36.00 Spur, slopes S. 30° W.; descend 30 ft. to

39.85 Intersect the original standard cor. of secs. 33 and 34, which is a malpais stone, 7x6x4 ins. above ground, firmly set, marked and witnessed, as described by the surveyor

6. Resurvey of a portion of the 2nd. Std. Par. N. thru Range 5 W.

Chains.

general.

Land, rolling, mountainous.

Soil, gravelly, 3rd rate.

No timber.

Undergrowth, palo verde, catclaw and mesquite.

S. 89° 39' E., on a true line, on S. bdy. of sec. 34.

Over rolling, mountainous land, thru scattering undergrowth.

Descend 160 ft. to

12.70 Weaver Creek wash, course S. 50° W., comes from E.

28.00 Leave Weaver Creek wash, course W., comes from S. 30° E.

Ascend 35 ft. to

30.00 Point of spur, slopes S. Descend 30 ft. to

31.50 Weaver Creek wash, course S. 65° W.

40.04 Intersect the original standard $\frac{1}{4}$ sec. cor., which is a granite stone, 8x10x10 ins. above ground, firmly set, marked and witnessed as described by the surveyor general.

Thence,

N. 89° 51' E., on a true line, on S. bdy. of sec. 34 (E. $\frac{1}{2}$).

14.30 Wash, course N. 60° W.

35.30 Wash, course N. 30° W.

40.16 Intersect the original standard cor. of secs. 34 and 35, which is a malpais stone, 6x10x8 ins., above ground, firmly set, marked and witnessed as described by the surveyor general.

Land, rolling, mountainous.

Soil, gravelly, 3rd rate.

No timber.

Undergrowth, mesquite, palo verde and catclaw.

S. 89° 47' E., on a true line, on S. bdy. of sec. 35.

Over rolling, mountainous land, thru scattering undergrowth.

Ascend 130 ft.

23.60 Spur, slopes S. 75° W. Continue ascent along S. slope.

39.88 Intersect the original standard $\frac{1}{4}$ sec. cor., which is a granite stone, 12x8x4 ins. above ground, firmly set, marked and witnessed as described by the surveyor general. Change this cor. to an angle point by destroying the markings on the stone, and marking the letters AP on S. face, and destroying the markings on the bearing trees and remarking them AP.

Thence,

N. 89° 34' E. on a true line, on S. bdy. of sec. 35 (E. $\frac{1}{2}$).

Ascend 70 ft.

0.19 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished standard $\frac{1}{4}$ sec. cor., marked on brass cap,

SC

S 35
1916and raise a mound of stone 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

Continue line and measurement.

31.60 Spur, slopes S. 60° W. Descend 105 ft. to

40.26 Intersect the original standard cor. of secs. 35 and 36, which is a malpais stone, 8x6x6 ins. above ground, firmly set, marked and witnessed as described by the surveyor general. Change this cor. to an angle point

Land, rolling and mountainous, on the spur, and marking

Soil, gravelly, 3rd rate, etc., and by destroying the original

No timber, and by destroying trees and remarking them AP.

Undergrowth, palo verde, catclaw and mesquite.

S. 89° 47' E., on a true line, on S. bdy. of sec. 35 (E. $\frac{1}{2}$).

Descend.

Resurvey of a portion of 2nd standard Parallel N. in R. 5 West 7

Chains.

N. 89° 52' E., on a true line, on S. bdy. of sec. 36.
Over rolling, mountainous land, thru scattering under-
growth.

Descend 50 ft. to

29.30 Head of gulch, course S. 55°W. Ascend 120 ft.

31.81 Telephone line, brs. N. and S.

34.10 Spur, slopes S. 30°W. Descend 25 ft.

39.57 Intersect the original standard 1/4 sec. cor., which is a
malpais stone, 8x6x6 ins. above ground, firmly set,
marked and witnessed as described by the surveyor
general. Change this cor. to an angle point by de-
stroying the markings on the stone, and marking the
letters AP on S. face; and by destroying the original
markings on the bearing trees and remarking them AP.

Thence,

N. 89° 53' E., on a true line, on S. bdy. of sec. 36, (E. 1/2).

Descend.

0.40 1/2 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for reestablished standard 1/4 sec. cor.,
marked on brass cap,

SC
1336
1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N.
of cor.

Continue line and measurement.

3.47 Head of gulch, course S. Ascend to

8.15 Spur, slopes S. Descend 230 ft. to

35.00 Ascend 25 ft. to

40.38 Intersect the original standard cor. of Ts. 9 N., Rs. 4 and
5 W., which is a malpais stone, 12x10x6 ins. above
ground, firmly set, marked and witnessed as described by
the surveyor general.

Land, rolling and mountainous.

Soil, gravelly, 3rd rate.

No timber.

Undergrowth, palo verde, catclaw and mesquite.

8. Survey of East bdy. of Township 9 North, Range 5 West.

Chains.

From the original standard cor. of Ts. 9 N., Rs. 4 and 5 W., on 2nd. Standard Parallel North, hereinbefore described, North, bet. secs. 31 and 36.

Over rolling, mountainous land, thru. dense undergrowth. Ascend 255 ft. to

34.70 Ridge, brs. E* and W. Descend 70 ft.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap,

S36 S31
1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

49.70 Wash, course W. Ascend 65 ft. to

57.50 Spur, slopes N. 70° W. Descend 140 ft. to

70.70 Wash, course N. 60° W. Ascend 55 ft. to

80.00 Set an iron post, 3 ft. long, 3 ins. in diam., 24 ins. in the ground, for cor. of secs. 25, 30, 31 and 36, marked on brass cap,

T9N
R5W | R4W
S25 | S30
S36 | S31
1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling and mountainous.

Soil, gravelly, 3rd rate.

No timber.

Undergrowth, palo verde, mesquite, and catclaw.

North, bet. secs. 25 and 30.

Over rolling land, thru. dense undergrowth.

Descend to

2.50 Wash, course S. 60° W. Ascend 100 ft. to

25.60 Spur, slopes S. 50° W. Descend 45 ft.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

S25 S30
1916

and raise amount of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

47.80 Wash, course S. 40° W. Thence over rolling land.

58.30 Wash, course S. 40° W.

80.00 Set an iron post, 3 ft. long, 3 ins. in diam., 24 ins. in the ground, for cor. of secs. 19, 24, 25 and 30, marked on brass cap,

T9N
R5W | R4W
S24 | S19
S25 | S30
1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling.


Soil, gravelly, 3rd rate.

No timber.


Undergrowth, palo verde, catclaw and mesquite.

Chains.

North bet. secs. 19 and 24.
 Over rolling land, through scattering undergrowth.
 6.80 Wash, course S.40° W.
 24.00 Wash, course S.30° W.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



Dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft. dist.; and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 46.00 Road, brs. N.40° W. and S.40° E.
 48.00 Road, brs. N.60° E. and S.60° W.2
 48.50 Road, brs. E. and W. Asc. 105 ft. to
 76.20 Spur, slopes S.30° W. Desc. to
 80.00 Set an iron post, 3 ft. long, 3 ins. diam., 20 ins. in the ground, in a mound of stone, for cor. of secs. 13, 18, 19 and 24, marked on brass cap




And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 Land, rolling.
 Soil, gravelly; 3rd rate.
 No timber.
 Undergrowth, palo verde, cat claw, and mesquite.

North bet. secs. 13 and 18.
 Over rolling land, through scattering undergrowth.
 40.00 The true point for $\frac{1}{4}$ sec. cor. falls in wash, course S.20° W. Asc. 50 ft.
 40.30 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for witness cor. to $\frac{1}{4}$ sec. cor., marked on brass cap



And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 49.00 Spur, slopes S.40° W. Desc. 45 ft. to
 70.70 Wash, course S.30° W. Asc. 55 ft. to
 80.00 Set an iron post, 3 ft. long, 3 ins. diam., 13 ins. in the ground, in a mound of stone, for cor. of secs. 7, 12, 13 and 18, marked on brass cap



And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 Land, rolling.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, palo verde, cat claw, mesquite and greasewood.

10. Survey of East Boundary of T. 9 N., R. 5 W.

Chains.	<p>North bet. secs. 7 and 12. Over rolling land, through scattering undergrowth. Asc. to</p> <p>14.00 Spur, slopes S.30° W. Desc. to 33.50 Wash, course S.40° W. Thence over rolling land. 40.00 Set an iron post, 3 ft. long, 1 in. diam., 13 ins. in the ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap</p> <p style="text-align: center;"> $\frac{1}{4}$ S12 S 7 1916 </p> <p>And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. From this cor., U. S. L. M. No. 1248, Weaver District, brs. N.59° 20' E.</p> <p>70.00 Wash, course S.50° W. Asc. 55 ft. to . 80.00 Set an iron post, 3 ft. long, 3 ins. diam., 18 ins. in the ground, in a mound of stone, for cor. of secs. 1, 6, 7 and 12, marked on brass cap</p> <p style="text-align: center;"> T9N R5W R4W S 1 S 6 S12 S 7 1916 </p> <p>And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. From this cor., U. S. L. M. No. 1248 brs. S.87° 58' E. Land, rolling. Soil, rocky; 4th rate. No timber. Undergrowth, palo verde, cat claw, mesquite and greasewood.</p>
---------	--

Chains.	<p>North bet. secs. 1 and 6. Over rolling and mountainous land, through scattering under- growth. Asc. 35 ft. to</p> <p>10.00 Spur, slopes S.20° W. Desc. 45 ft. 12.90 Road, brs. S.40° E. to Octave and N.40° W. to Congress Junction.</p> <p>14.00 Frame house brs. E. about 6. chs. dist. 24.40 Wash, course S.40° W. Asc. 575 ft. 26.68 Pipe line, 6" diam., brs. N.66° W. and S.66° E. Telephone line, brs. N.66° W. and S.66° E. 40.00 Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap</p> <p style="text-align: center;"> $\frac{1}{4}$ S 1 S 6 1916 </p> <p>And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. Continue ascent to 59.72 Desc. 120 ft. to 67.50 Asc. 50 ft. 74.81 Intersect line 1-4, Mamie Mining Claim, Survey No. 2198, Weaver District, N.30° 50' W. of cor. No. 4. 80.00 Set an iron post, 3 ft. long, 3 ins. diam., 12 ins. in the ground, in a mound of stone, for cor. of Ts. 9 and 10 N., Rs. 4 and 5 W., marked on brass cap</p>
---------	--

Survey of East Boundary of T. 9 N. R. 5 W.

11.

Chains.

T10N	
R5W	R4W
S36	S31
S 1	S 6
T9N	
1916.	

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, S. of cor.

From this cor., cor. No. 7, Gold King, Survey No. 2200, Weaver District, brs. N.18° 42' W., 7.25 chs. dist.

Land, rolling and mountainous.

Soil, granite formation; 4th rate.

No timber.

Undergrowth, palo verde, cat claw, mesquite and greasewood.

12. Survey of North Boundary of T. 9 N., R. 5 W.

Chains.

From the cor. of Ts. 9 and 10 N., Rs. 4 and 5 W., which is an iron post, hereinbefore described,
West on a random line, along the N. bdy. of T. 9 N., R. 5 W., setting temp. $\frac{1}{4}$ sec. and sec. cors. at intervals of 40.00 chs.; and at 480.11 chs., intersect W. bdy. of T. 10 N., R. 5 W., 25 lks. N. of the cor. of Ts. 9 and 10 N., Rs. 5 and 6 W., which is a granite stone, 12 X 6 X 8 ins. above ground, firmly set, marked and witnessed as described by the Surveyor-General. The falling answers to a correction of $0^{\circ} 2'$, of 4 lks. S. per mile, counting from the NE. cor. of the Tp.; therefore

N. $89^{\circ} 58'$ E., on a true line, bet. secs. 6 and 31.
Over rolling land, through scattering undergrowth.

22.50 Road, brs. N. 70° E. to Stanton and S. 50° W. to Congress Junction.

37.10 Same road, brs. N. 70° E. and N. 70° W.

38.00 Wash, course S.

40.11 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$$\begin{array}{r} \frac{1}{4} S31 \\ \hline S6 \\ 1916 \end{array}$$

Dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft. dist.; and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

76.10 Same road, brs. N. 80° W. to Congress Junction, and E. to Stanton.

80.11 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 5, 6, 31 and 32, marked on brass cap

$$\begin{array}{r|l} T10N & R5W \\ \hline S31 & S32 \\ \hline S6 & S5 \\ T9N & \\ 1916 & \end{array}$$

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, rolling.

Soil, sandy, 3rd rate.

No timber.

Undergrowth, palo verde, cat claw, and mesquite.

N. $89^{\circ} 58'$ E., on a true line, bet. secs. 35 and 32.
Over rolling land, through scattering undergrowth.

In road, brs. E. and W.

9.00 Wash, course S.

22.30 Leave road, brs. W. to Congress Junction and NE. to Stanton.

29.40 Wash, course S.

33.40 Same road, brs. N. 50° W. and S. 50° E.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$$\begin{array}{r} \frac{1}{4} S32 \\ \hline S5 \\ 1916 \end{array}$$

Dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft. dist.; and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

50.00 Wash, course S. 30° W.

64.20 Wash, course S. 20° W.

66.80 Road, brs. N. 50° E. to Stanton and S. 50° W. to Congress Junction.

80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the

Survey of North Boundary of T. 9 N., R. 5 W. 13.

chains.

ground, for cor. of secs. 4, 5, 32 and 33, marked on brass cap

T10N	R5W
S32	S33
<hr/>	
S 51	S 4
T9N	
1916	

Dig pits, 18 X 18 X 12 ins., in each sec., 5 1/2 ft. dist.; and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, rolling.
Soil, sandy; 3rd rate.
No timber.
Undergrowth, mesquite, palo verde and cat claw.

26.30
35.80
40.00

N.89° 58' E., on a true line, bet. secs. 4 and 33. Over rolling land, through scattering undergrowth. Road, brs. N.80° W. to Congress Junction and S. 80° E. to Stanton.
Road, brs. N.30° E. and S.30° W.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap

1/4	S33
<hr/>	
S 4	
1916	

Dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft. dist.; and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

57.50
60.60
72.80
80.00

Wash, course S.
Wash, course S.
Wash, course S.
Set an iron post, 3 ft. long, 3 ins. diam., 26 ins. in the ground, for cor. of secs. 3, 4, 33 and 34, marked on brass cap

T10N	R5W
S33	S34
<hr/>	
S 41	S 3
T9N	
1916	

Dig pits, 18 X 18 X 12 ins., in each sec., 5 1/2 ft. dist.; and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, rolling.
Soil, sandy; 3rd rate.
No timber.
Undergrowth, palo verde, cat claw, mesquite and greasewood.

26.30
34.00
40.00

N.89° 58' E., on a true line, bet. secs. 3 and 34. Over rolling land, through scattering undergrowth. Wash, course S.50° W. Asc. slightly to Spur, slopes S.50° W. Desc. gradually.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap

1/4	S34
<hr/>	
S 3	
1916	

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

49.20
63.10

Wash, course S.20° W.
Road, brs. N.50° E. and S.45° W.

14. Survey of North Boundary of T. 9 N., R. 5 W.

Chains.

- 65.60 Wash, course S.30° W.
- 72.40 Wash, course S.50° W.
- 77.50 Wash, course N.60° W.
- 78.70 Wash, course S.60° W.
- 80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 2, 3, 34 and 35, marked on brass cap

T10N | R5W
 S34 | S35

 S 3 | S 2
 T9N
 1916

And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
 Land, rolling.
 Soil, sandy, 3rd rate.
 No timber.
 Undergrowth, palo verde, mesquite and cat claw.

- 40.00 N.89° 58' E., on a true line, bet. secs. 2 and 35. Over rolling and mountainous land, through scattering undergrowth. Asc. 145 ft. to Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

S35

 ¼ S 2
 1916

- 60.10 Dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft. dist.; and raise a mound of earth, 3½ ft. base, 1½ ft. high, N. of cor.
- 60.60 Prospect hole on line.
- 60.60 Wash, course N.30° W. Asc. 140 ft. to
- 70.20 Road, brs. N.50° W. to Congress Junction and S.50° E. to Stanton.
- 80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 1, 2, 35 and 36, marked on brass cap

T10N | R5W
 S35 | S36

 S 2 | S 1
 T9N
 1916

And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
 Land, rolling and mountainous.
 Soil, gravelly; 3rd rate.
 No timber.
 Undergrowth, palo verde, mesquite and cat claw.

- 6.30 N.89° 58' E., on a true line, bet. secs. 1 and 36. Over rolling and mountainous land, through scattering undergrowth. Desc. 115 ft. Road, brs. N.30° E. to Stanton and S.30° W. to Congress Junction.
- 25.10 Antelope Creek, course S. Asc. 60 ft. to
- 34.30 Spur, slopes S.15° W. Desc. 25 ft. to
- 36.10 Road, brs. N.10° E. and S.10° W.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

Survey of North Boundary of T. 9 N., R. 5 W.

Chains.

$\frac{1}{4}$ S 36
S 1
1916

And raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
 42.46 Telephone line, brs. N. 3° E. and S. 3° W.
 43.10 Road, brs. N. 15° W. and S. 40° E.
 44.60 Weaver Creek, course S. Asc. 350 ft.
 49.70 Telephone line, brs. N. 30° W. and S. 30° E.
 52.06 Pipe line, 6 ins. diam., brs. N. 16° W. and S. 16° E.
 76.89 Intersect line 1-4 Mamie Mining Claim, Weaver District, Survey No. 2198, 6.12 chs. S. 30° 50' E. of cor. No. 1.
 80.00 The cor. of Ts. 9 and 10 N., Rs. 4 and 5 W.
 Land, rolling and mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, palo verde, mesquite and cat claw.

Boundaries of T. 9 N., R. 5 W.

Latitudes, departures and closing errors.

Line designated.	True bearing.	Dist. chs.	Latitudes.		Departures.	
			N. chs.	S. chs.	E. chs.	W. chs.
South Boundary. (2nd. Standard Par. N.)	S. 89° 53' W.	40.38		.08		40.38
	S. 89° 52' W.	39.57		.09		39.57
	S. 89° 34' W.	40.26		.30		40.26
	N. 89° 47' W.	39.88	.15			39.88
	S. 89° 51' W.	40.16		.10		40.16
	N. 89° 39' W.	40.04	.25			40.04
	S. 89° 32' W.	39.85		.32		39.85
	N. 89° 59' W.	40.37	.01			40.37
	N. 89° 25' W.	39.43	.41			39.43
	S. 89° 44' W.	40.30		.19		40.30
N. 89° 52' W.	40.12	.09			40.12	
S. 89° 50' W.	40.02		.11		40.02	
West Boundary.	North	80.00	80.00			
	N. 0° 4' W.	160.04	160.04			.19
	N. 0° 7' W.	80.07	80.07			.16
North Boundary	North	160.00	160.00			
North Boundary	N. 89° 58' E.	480.11	.25		480.11	
East Boundary.	South	480.00		480.00		
Convergency					.49	
Totals.			481.27	481.19	480.60	480.73
			481.19			480.60
Error in latitude			.08			
Error in departure						.13

16. survey of Subdivision of T. 9 N., R. 5 W.

Chains.

From the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the Tp., which is an iron post, hereinbefore described, West on sectional correction line, bet. secs. 25 and 36. Over rolling land, through dense undergrowth.
 1.20 Wash, course S. Asc. slightly to
 19.00 Spur, slopes S.40° W. Desc. 30 ft. to
 26.20 Wash, course S.30° W. Asc. 15 ft. to
 35.55 Desc. 20 ft. to
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S25
 $\frac{1}{4}$ S36
 1916

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
 Asc. 35 ft.
 46.83 Telephone line, brs. N. and S.
 48.00 Low spur, slopes S. Desc. 65 ft. to
 51.20 Wash, course S.
 63.00 Road, brs. N.30° E. and S.30° W.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 25, 26, 35 and 36, marked on brass cap

T9N R5W
 S26 | S25
 S35 | S36
 1916

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 Land, rolling.
 Soil, gravelly; 3rd rate.
 No timber.
 Undergrowth, palo verde, mesquite and cat claw.

From the cor. of secs. 25, 26, 35 and 36, S.0° 1' E., on a random line, bet. secs. 35 and 36.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.10 Intersect 2nd Std. Par. N., 2 lks. E. of the standard cor. of secs. 35 and 36, which is a malpais stone, hereinbefore described.

Thence
 North on a true line, bet. secs. 35 and 36.
 Over rolling land, through dense undergrowth.
 Asc. 105 ft. to
 6.10 Ridge, brs. E. and W. Desc. 110 ft. to
 15.20 Wash, course N.80° W. Asc. 90 ft. to
 21.95 Spur, slopes W. Desc. 165 ft.
 40.10 Set an iron post, 3ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap


$\frac{1}{4}$
 S35 | S36
 1916

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 40.90 Wash, 50 lks. wide, course S.40° W. Asc. 100 ft.
 67.10 Road, brs. N.30° E. and S.30° W., Spur, slopes S.30° W. Desc. 55 ft. to
 80.10 The cor. of secs. 25, 26, 35 and 36.
 Land, rolling.
 Soil, sandy; 3rd rate.
 No timber.
 Undergrowth, palo verde, mesquite and greasewood.


Subdivision of T. 9 N., R. 5 W.

Chains.

6.30 N.0° 1' W., bet. secs. 25 and 26.
 18.50 Over rolling land, through dense undergrowth.
 29.00 Wash, 25 lks. wide, course S.30° W. Asc. slightly to
 39.60 Low spur, slopes S.25° W. Desc. 35 ft. to
 40.00 Weaver Creek Wash, 1 ch. wide, course S.40° W. Thence over
 gently rolling land.
 Road, brs. N.50° E. and S.40° W.
 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap




80.00 And raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W.
 of cor.
 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 23, 24, 25 and 26, marked on
 brass cap



And raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W.
 of cor.
 Land, rolling.
 Soil, gravelly, 3rd rate.
 No timber.
 Undergrowth, palo verde, greasewood and mesquite.

40.00 East on a random line, bet. secs. 24 and 25.
 79.92 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect E. bdy. of Tp., 8 lks. S. of the cor. of secs.
 19, 24, 25 and 30, which is an iron post, hereinbefore
 described.

Thence
 S.89° 57' W., on a true line, bet. secs.24 and 25.
 Over rolling land, through dense undergrowth.
 Desc. to
 5.10 Wash, course S.30° W. Asc. to
 20.40 Spur, slopes S.30° W. Road, brs. N.30° E. and S.30° W.
 Desc. to
 29.60 Wash, course S.40° W. Asc. 55 ft. to
 37.30 Spur, slopes S.30° W. Desc. 95 ft.
 39.96 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



45.10 And raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N.
 of cor.
 52.00 Telephone line, brs. N. and S.
 53.90 Wash, 25 lks. wide, course S. Asc. to
 54.60 Spur, slopes S. Desc. 25 ft. to
 65.30 Weaver Creek Wash, 1 ch. wide, course S. Asc. 50 ft.
 79.92 Road, brs. N. and S.
 The cor. of secs. 23, 24, 25 and 26.
 Land, rolling.
 Soil, gravelly, 3rd rate.
 No timber.
 Undergrowth, palo verde, greasewood, mesquite and cat claw.

18.

Subdivision of T. 9 N., R. 5 W.

Chains.

25.00	N.0° 1' W., bet. secs. 23 and 24. Over rolling land, through dense undergrowth.
40.00	Road, brs. N.70° E. and S.70° W. Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\begin{array}{c} \frac{1}{4} \\ \hline S23 S24 \\ \hline 1916 \end{array}$
77.60	And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
80.00	Head of small wash, course S.40° W. Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 13, 14, 23 and 24, marked on brass cap
	$\begin{array}{c} T9N R5W \\ \hline S14 S13 \\ \hline S23 S24 \\ \hline 1916 \end{array}$
	And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
	Land, rolling. Soil, gravelly, 3rd rate. No timber. Undergrowth, palo verde, mesquite and greasewood.
40.00	N.89° 57' E., on a random line, bet. secs. 13 and 24. Set temp. $\frac{1}{4}$ sec. cor.
80.00	Intersect E. bdy. of Tp., 2 lks. N. of the cor. of secs. 13, 18, 19 and 24, which is an iron post, hereinbefore described.
	Thence
6.50	S.89° 58' W., on a true line, bet. secs. 13 and 24. Over rolling land, through scattering undergrowth.
18.70	Desc. 85 ft. to Wash, course S.20° W.
34.00	Wash, course S. Asc. 45 ft. to Spur, slopes S.20° W. Road, brs. N.20° E. and S.20° W.
40.00	Desc. 100 ft. Enter dense undergrowth. Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\begin{array}{c} \frac{1}{4} S13 \\ \hline S24 \\ \hline 1916 \end{array}$
	And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
43.40	Telephone line, brs. N. and S.
44.80	Weaver Creek Wash, course S.20° W. Asc. 80 ft.
61.30	Road, brs. N. and S.
71.90	Spur, slopes S.20° W. Desc. 35 ft. to
77.30	Wash, course S.50° W. Asc. to
80.00	The cor. of secs. 13, 14, 23 and 24. Land, rolling. Soil, sandy, 3rd rate. No timber. Undergrowth, palo verde, mesquite and greasewood.
30.80	N.0° 1' W., bet. secs. 13 and 14. Over rolling land, through scattering undergrowth. Head of wash, course S.40° W.

Subdivision of T. 9 N. R. 5 W. 19


Chains. Spur, slopes S.40° W.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap



And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.
Desc. gradually to

62.40 Wash, 40 lks. wide, course S.20° W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 11, 12, 13 and 14, marked on brass cap



And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling.
Soil, gravelly, 3rd rate.


No timber.
Undergrowth, palo verde, mesquite and greasewood.

40.00 N.89° 58' E., on a random line, bet. secs. 12 and 13.
Set temp. 1/4 sec. cor.
80.04 Intersect E. bdy. of Tp., 2 lks. N. of the cor. of secs. 7, 12, 13 and 18, which is an iron post, hereinbefore described.

Thence
S.89° 59' W., on a true line, bet. secs. 12 and 13.
Over rolling land, through scattering undergrowth.
Desc. 30 ft. to

18.00 Wash, 50 lks. wide, course S. Asc. to
34.00 Road, brs. N.40° E. and S.40° W. Desc. 45 ft. to
38.25 Weaver Creek Wash, 75 lks. wide, course S.10° W. Asc. 90 ft.

40.02 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap



And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

41.65 Telephone line, brs. N. and S.
51.25 Road, brs. N. and S.
60.05 Spur, slopes S. Desc. 20 ft. to
73.35 Wash, course S.20° W. Asc. 20 ft. to
80.04 The cor. of secs. 11, 12, 13 and 14.

Land, rolling.
Soil, gravelly, 3rd rate.
No timber.
Undergrowth, palo verde, mesquite, cat claw and greasewood.

38.10 N.0° 1' W., bet. secs. 11 and 12.
Over rolling land, through scattering undergrowth.
40.00 Head of small wash, course S.40° W.
Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, in a mound of stone, for 1/4 sec. cor., marked on brass cap

20.

Subdivision of T. 9 N., R. 5 W.

Chains.

$$\begin{array}{c} \frac{1}{4} \\ \text{S11} \mid \text{S12} \\ \hline 1916 \end{array}$$

69.00 And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 72.60 Road, brs. N.30° E. and S.30° W.
 80.00 Antelope Creek Wash, 75 lks. wide, course S.50° W.
 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 1, 2, 11 and 12, marked on brass cap

$$\begin{array}{c} \text{T9N} \mid \text{R5W} \\ \text{S 2} \mid \text{S 1} \\ \hline \text{S11} \mid \text{S12} \\ 1916 \end{array}$$

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 Land, rolling.
 Soil, gravelly, 3rd rate.
 No timber.
 Undergrowth, palo verde, mesquite and greasewood.

40.00 N.89° 59' E., on a random line, bet. secs. 1 and 12.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.05 Intersect E. bdy. of Tp., 2 lks. N. of the cor. of secs. 1, 6, 7 and 12, which is an iron post, hereinbefore described.
 Thence
 West on a true line, bet. secs. 1 and 12.
 Over rolling land, through scattering undergrowth.
 Asc. to
 2.05 Spur, slopes S.20° W. Desc. 45 ft. to
 9.65 Wash, 40 lks; wide, course S.10° W. Asc. 65 ft. to
 24.05 Spur, slopes S. Desc. 75 ft. to
 36.25 Weaver Creek wash, 50 lks. wide, course S. Old derrick brs. S. 50 lks. dist. Asc. 70 ft.
 39.60 Telephone line, brs. N. and S.
 40.02 $\frac{1}{2}$ Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$$\begin{array}{c} \text{S 1} \\ \hline \frac{1}{4} \text{S12} \\ 1916 \end{array}$$

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
 72.05 Thence over rolling land.
 72.95 Road, brs. N. and S. Desc. 35 ft. to
 78.05 Antelope Creek Wash, course S. Asc. to
 80.05 The cor. of secs. 1, 2, 11 and 12.
 Land, rolling.
 Soil, gravelly, 3rd rate.
 No timber.
 Undergrowth, palo verde, mesquite and greasewood.


40.00 N.0° 1' W., on a random line, bet. secs. 1 and 2.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.04 Intersect N. bdy. of Tp., 6 lks. W. of the cor. of secs. 1, 2, 35 and 36, which is an iron post, hereinbefore described.
 Thence
 S.0° 2' W., bet. secs. 1 and 2.
 Over rolling land, through scattering undergrowth.

Subdivision of T. 9 N., R. 5 W.

21


Chains.

9.75 Road, brs. E. to Stanton and W. to Congress Junction.
40.04 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap




80.04 And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
The cor. of secs. 1, 2, 11 and 12.
Land, rolling.
Soil, gravelly and rocky, 3rd and 4th rates.
No timber.
Undergrowth, palo verde, greasewood and cat claw.

7.47 From the cor. of secs. 25, 26, 35 and 36.
West on sectional correction line, bet. secs. 26 and 35.
Over rolling land, through dense undergrowth.
Desc. 85 ft. to
Wash, 20 lks. wide, course S.10° W. Thence over rolling land.
11.70 Weaver Creek Wash, 1 ch. wide, course S.20° W. Asc. 35 ft. to
25.25 Road, brs. N. and S. Desc. 35 ft. to
32.00 Enter wash, course S.10° E.
35.69 Center of wash, course S.10° E.
38.00 Leave wash, course S.10° E. Asc. 25 ft.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



44.60 And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
Enter wash, course S.10° E.
53.04 Center of wash, course S.10° E.
55.00 Leave wash, course S.10° E.
60.00 Enter wash, course S.80° E.
64.88 Center of wash, course S.80° E.
66.00 Leave wash, course S.80° E. Asc. 85 ft. to
73.90 Desc. 35 ft. to
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 26, 27, 34 and 35, marked on brass cap




And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
Land, rolling.
Soil, sandy and rocky; 3rd rate.
No timber.
Undergrowth, palo verde, mesquite and cat claw.

40.00 From the cor. of secs. 26, 27, 34 and 35,
S.0° 1' E., on a random line, bet secs. 34 and 35.
Set temp. 1 sec. cor.

22.

Subdivision of T. 9 N., R. 5 W.


Chains.
 80.30 Intersect 2nd Std. Par. N., 14 lks. E. of the standard cor. of secs. 34 and 35, which is a malpais stone, here-
 inbefore described.
 Thence
 N.0° 5' E., on a true line, bet. secs. 34 and 35.
 Over rolling land, through dense undergrowth.
 Desc. to
 4.40 Wash, course W. Asc. 35 ft. to
 8.40 Low spur, slopes W. Desc. 50 ft. to
 11.15 Left bank of Weaver Creek Wash, brs. E. and W.
 20.55 Main Channel of Weaver Creek Wash, course S.80° W.
 21.30 Right bank of Weaver Creek Wash, brs. E. and W. Asc. 130
 40.30 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



And raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.


50.30 Desc. 30 ft. to
 60.70 Enter wash, course S.70° E.
 64.40 Leave wash, course S.70° E. Asc. 60 ft. to
 68.30 Hill, brs. E. and W. Desc. 20 ft. to
 75.30 Wash, course W. Asc. 40 ft. to
 80.30 The cor. of secs. 26, 27, 34 and 35.
 Land, rolling.
 Soil, sandy and rocky, 3rd rate.
 No timber.
 Undergrowth, palo verde, mesquite and cat claw.

N.0° 1' W., bet. secs. 26 and 27.
 Over rolling land, through dense undergrowth.
 Desc. 45 ft. to
 8.00 Enter wash, course S.60° W.
 14.47 Center of wash, course S.60° W.
 16.00 Leave wash, course S.60° W. Thence over gently rolling land.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



And raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 22, 23, 26 and 27, marked on brass cap



And raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Land, rolling and gently rolling.
 Soil, sandy and rocky, 3rd rate.
 No timber.
 Undergrowth, palo verde, mesquite and cat claw.

Subdivision of T. 9 N., R. 5 W.

23.

Chains.

East on a random line, bet. secs. 23 and 26.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.01 Intersect N. and S. line, 4 lks. N. of the cor. of secs.
 23, 24, 25 and 26.
 Thence
 N. $89^{\circ} 58'$ W., on a true line, bet. secs. 23 and 26.
 Over rolling land, through dense undergrowth.
 32.75 Wash, 50 lks. wide, course S.
 40.00 $\frac{1}{2}$ Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$$\begin{array}{r} \frac{1}{4} S23 \\ \hline \frac{1}{4} S26 \\ \hline 1916 \end{array}$$

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N.
 of cor.
 80.01 The cor. of secs. 22, 23, 26 and 27.
 Land, rolling.
 Soil, sandy, 3rd rate.
 No timber.
 Undergrowth, palo verde, cat claw and mesquite.

N. $0^{\circ} 1'$ W., bet. secs. 22 and 23.
 Over rolling land, through scattering undergrowth.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$$\begin{array}{r} \frac{1}{4} \\ S22 \mid S23 \\ \hline 1916 \end{array}$$

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
 of cor.
 40.60 Antelope Creek Wash, 50 lks. wide, course S. 30° W.
 49.90 Road, brs. N. 40° W. and S. 40° E.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 14, 15, 22 and 23, marked on
 brass cap

$$\begin{array}{r} T9N \mid R5W \\ S15 \mid S14 \\ \hline S22 \mid S23 \\ \hline 1916 \end{array}$$

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
 of cor.
 Land, rolling.
 Soil, gravelly and rocky, 3rd rate.
 No timber.
 Undergrowth, palo verde, cat claw and mesquite.

S. $89^{\circ} 58'$ E., on a random line, bet. secs. 14 and 23.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.01 Intersect N. and S. line, 5 lks. S. of the cor. of secs.
 13, 14, 23 and 24.

Thence
 West on a true line, bet. secs. 14 and 23.
 Over rolling land, through scattering undergrowth.
 Asc. 35 ft. to
 10.75 Desc. 65 ft. to
 16.80 Wash, 30 lks. wide, course S. 10° W. Asc. 50 ft. to
 27.70 Thence over rolling land.
 40.00 $\frac{1}{2}$ Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

24.

Subdivision of T. 9 N., R. 5 W.

Chains.

$\frac{1}{4}$ S14
S23
1916

68.20 And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
Antelope Creek Wash, 75 lks. wide, course S.20° W.
80.01 The cor. of secs. 14, 15, 22 and 23.
Land, gently rolling and rolling.
Soil, gravelly and rocky, 3rd rate.
No timber.
Undergrowth, palo verde, mesquite and cat claw.

40.00 N.0° 1' W., bet. secs. 14 and 15.
Over rolling land, through scattering undergrowth.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
S15 | S14
1916

80.00 And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 10, 11, 14 and 15, marked on brass cap

T9N R5W
S10 | S11
S15 | S14
1916

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
Land, rolling and gently rolling.
Soil, sandy, loose stone and gravel; 3rd rate.
No timber.
Undergrowth, palo verde and greasewood.

East on a random line, bet. secs. 11 and 14.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.04 Intersect N. and S. line, at the cor. of secs. 11, 12, 13 and 14.

Thence

West on a true line, bet. secs. 11 and 14.

Over rolling land, through scattering undergrowth.

Wash, course S.

7.75 Antelope Creek Wash, 50 lks. wide, course S.20° W.

38.85 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap


$\frac{1}{4}$ S11
S14
1916

80.04 And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
The cor. of secs. 10, 11, 14 and 15.
Land, rolling.
Soil, sandy, loose rock and gravel, 3rd rate.
No timber.
Undergrowth, palo verde, mesquite and greasewood.

Subdivision of T. 9 N., R. 5 W.

Chains.

N.0° 1' W. bet. secs. 10 and 11.
 Over rolling land, through scattering undergrowth.
 Road, brs. N.40° E. and S.40° W.
 16.30 From this point, Bill Akard's house brs. N.48½° E.
 21.42
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for ¼ sec. cor., marked on brass cap




And raise a mound of stone, 2 ft. base, 1½ ft. high, W.
 of cor.
 46.84 From this point, Bill Akard's house brs. S.84½° E.
 47.13 Fence brs. S.80½° E. and N.80½° W.
 77.20 Wash, course S.35° W.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in the
 ground, in a mound of stone, for cor. of secs. 2, 3, 10
 and 11, marked on brass cap



And raise a mound of stone, 2 ft. base, 1½ ft. high, W.
 of cor.
 Land, rolling.
 Soil, sandy, loose stones and gravel, 3rd rate.
 No timber.
 Undergrowth, palo verde, greasewood and mesquite.

40.00 East on a random line, bet. secs. 2 and 11.
 Set temp. ¼ sec. cor.
 80.01 Intersect the corner of secs. 1, 2, 10 and 11.
 Thence
 West on a true line, bet. secs. 2 and 11.
 Over rolling land, through scattering undergrowth.
 18.30 Fence, brs. S.16¼° W. and N.16¼° E., 22 lks. to cor., thence
 N.79¼° W.
 29.80 Road, brs. N.25° E. and S.25° W.
 40.00½ Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for ¼ sec. cor., marked on brass cap



And raise a mound of stone, 2 ft. base, 1½ ft. high, N.
 of cor.
 76.00 Wash, course S.50° W.
 80.01 The cor. of secs. 2, 3, 10 and 11.
 Land, rolling.
 Soil, gravel, sand and loose rock; 3rd rate.
 No timber.
 Undergrowth, scattering greasewood.

40.00 N.0° 1' W., on a random line, bet. secs. 2 and 3.
 Set temp. ¼ sec. cor.
 79.98 Intersect N. bdy. of Tp., 13 lks. W. of the cor. of secs.
 2, 3, 34 and 35, which is an iron post, hereinbefore
 described.
 Thence


26.

Subdivision of T. 9 N., R. 5 W.

Chains.

5.00
39.98

S.0° 5' W., on a true line, bet. secs. 2 and 3.
Over rolling land, through scattering undergrowth.
Asc. 90 ft. to
Thence over gently rolling land.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap




And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

68.85
79.98

Wire fence, brs. N.80 $\frac{1}{4}$ ° W. and S.80 $\frac{3}{4}$ ° E.
The cor. of secs. 2, 3, 10 and 11.
Land, rolling and gently rolling.
Soil, sand, gravel and loose rocks, 3rd rate.
No timber.
Undergrowth, palo verde and greasewood.

7.30
39.00
40.00


From the cor. of secs. 26, 27, 34 and 35,
West on sectional correction line, bet. secs. 27 and 34.
Over rolling land, through scattering undergrowth.
Desc. 75 ft. to
Wash, 20 lks. wide, course S.30° W. Asc. 85 ft. to
Spur, slopes S.30° W. Desc. 100 ft.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

48.00
80.00

Antelope Creek Wash, 50 lks. wide, course S.20° W. Asc.
30 ft. to
Spur, slopes S.15° W.
Set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in the
ground, in a mound of stone, for cor. of secs. 27, 28,
33 and 34, marked on brass cap



From which

A Palo verde, 5 ins. diam., brs. N.45° E., 14 lks. dist.,
marked T9N R5W S27 BT.
No other trees within limits. Raise a mound of stone,
2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
Land, rolling.
Soil, sand and gravel, 3rd rate.
No timber.
Undergrowth, palo verde, mesquite and cat claw.

40.00
80.20

From the cor. of secs. 27, 28, 33 and 34, hereinbefore
described,
S.0° 2' E., on a random line, bet. secs. 33 and 34.
Set temp. $\frac{1}{4}$ sec. cor.
Intersect 2nd Standard Parallel North, 27 lks. E. of the
standard cor. of secs. 33 and 34, which is malpais stone,
hereinbefore described.
Thence

Chains. N.0° 10' E., on a true line, bet. secs. 33 and 34.
 Over rolling mountainous land, through dense undergrowth.
 Asc. 60 ft. to
 5.20 Spur, slopes S.40° W. Desc. 305 ft. to
 26.70 Wash, course S.70° W. Asc. 30 ft.
 39.70 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for witness cor. to $\frac{1}{4}$ sec. cor., marked on brass
 cap

$\frac{1}{4}$
 W | C
 S33 | S34
 1916

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
 of cor.
 39.85 Left bank of Antelope Creek Wash, brs. N.60° E. and S.60° W.
 Desc. 35 ft.
 40.20 The true point for $\frac{1}{4}$ sec. cor. falls on steep bank, where
 it cannot be permanently established.
 46.30 Antelope Creek Wash, 50 lks. wide, course S.60° W. Asc. 85
 ft. to
 80.20 The cor. of secs. 27, 28, 33 and 34.
 Land, rolling mountainous.
 Soil, gravelly, 3rd rate.
 No timber.
 Undergrowth, palo verde, mesquite and cat claw.

N.0° 2' W., bet. secs. 27 and 28.
 Over rolling land, through dense undergrowth.
 Desc. 65 ft. to
 25.60 Wash, course S.50° W. Asc. 75 ft. to
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
 S28 | S27
 1916

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
 of cor.
 72.00 Head of wash, course S.40° W.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 21, 22, 27 and 28, marked on
 brass cap

T9N R5W
 S21 | S22
 S28 | S27
 1916

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
 of cor.
 Land, rolling.
 Soil, sandy, 3rd rate.
 No timber.
 Undergrowth, mesquite, palo verde and greasewood.

40.00 East on a random line, bet. secs. 22 and 27.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.96 Intersect N. and S. line, 5 lks. S. of the cor. of secs.
 22, 23, 26 and 27.
 Thence
 S.89° 58' W., on a true line, bet. secs. 22 and 27.
 Over rolling land, through scattering undergrowth.
 10.15 Antelope Creek Wash, course S.

28.

Subdivision of T. 9 N., R. 5 W.

Chains.

39.98

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S22
S27
1916

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

57.95

Head of wash, course S.30° W.

79.96

The cor. of secs. 21, 22, 27 and 28.

Land, rolling.

Soil, gravelly, 3rd rate.

No timber.

Undergrowth, mesquite, palo verde and greasewood,

9.60

N.0° 2' W., bet. secs. 21 and 22.

Over rolling land, through scattering undergrowth.

Desc. 50 ft. to

21.19

Wash, course S.45° W. Asc. 40 ft. to

Thence over gently rolling land.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
S21 | S22
1916

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 15, 16, 21 and 22, marked on brass cap

T9N | R5W
S16 | S15
S21 | S22
1916

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, rolling.

Soil, gravelly, 3rd rate.

No timber.

Undergrowth, palo verde, mesquite and greasewood.

40.00

N.89° 58' E., on a random line, bet. secs. 15 and 22.

Set temp. $\frac{1}{4}$ sec. cor.

79.96

Intersect N. and S. line, 7 lks. N. of the cor. of secs. 14, 15, 22 and 23.

Thence

N.89° 59' W., on a true line, bet. secs. 15 and 22.

Over rolling land, through scattering undergrowth.

23.15

Wash, course S.20° W.

32.25

Wash, course S.20° W.

33.34

Road, brs. N.50° W. and S.50° W.

39.55

Road, brs. N.85° E. and S.85° W.

39.98

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S15
S22
1916

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

Subdivision of T. 9 N., R. 5 W.

Chains.

43.75
79.96

Road, brs. N.85° W. and S.85° E.
The cor. of secs. 15, 16, 21 and 22.
Land, rolling.
Soil, gravelly, 3rd rate.
No timber.
Undergrowth, palo verde, mesquite and greasewood.

7.40
40.00

N.0° 2' W., bet. secs. 15 and 16.
Over rolling land, through scattering undergrowth.
Road, brs. N.80° W. and S.80° E.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap



And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

40.70
46.88
80.00

Desc. 70 ft.
Road, brs. N.65° E. and S.65° W.
Wash, course S.75° W. Asc. 75 ft. to
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 9, 10, 15 and 16, marked on brass cap



And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.


Land, rolling.
Soil, gravelly, 3rd rate.
No timber.
Undergrowth, palo verde and greasewood.

40.00
79.98

S.89° 59' E., on a random line, bet. secs. 10 and 15.
Set temp. 1/4 sec. cor.
Intersect N. and S. line, 2 lks. N. of the cor. of secs. 10, 11, 14 and 15.

19.00
33.00
39.99

Thence
N.89° 58' W., on a true line, bet. secs. 10 and 15.
Over rolling land, through scattering undergrowth.
Road, brs. N.20° E. and S.20° W.
Wash, course S.50° W.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap



And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

79.98

The cor. of secs. 9, 10, 15 and 16.
Land, rolling.
Soil, gravelly, 3rd rate.
No timber.
Undergrowth, palo verde and greasewood.

.30.

Subdivision of T. 9 N., R. 5 W.

Chains.

N.0° 2' W., bet. secs. 9 and 10.
 Over rolling land, through scattering undergrowth.
 Desc. 60 ft. to
 15.60 Wash, 20 lks. wide, course S.60° W. Asc. 85 ft. to
 23.20 Thence over gently rolling land.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
 S 9 | S 10
 1916

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
 of cor.
 Desc. 70 ft. to
 41.58 Wash, course S.75° W. Asc. 85 ft. to
 48.00 Thence over gently rolling mesa.
 68.00 Leave mesa, desc. 75 ft. to
 73.70 Wash, 20 lks. wide, course S.80° W. Asc. 15 ft. to
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 3, 4, 9 and 10, marked on
 brass cap

T9N R5W
 S 4 | S 3
 S 9 | S 10
 1916

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
 of cor.
 Land, rolling and gently rolling.
 Soil, gravelly, 3rd rate.
 No timber.
 Undergrowth, palo verde, mesquite, cat claw and greasewood.

40.00 S.89° 58' E., on a random line, bet. secs. 3 and 10.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.97 Intersect N. and S. line, 2 lks. N. of the cor. of secs.
 2, 3, 10 and 11.

Thence
 N.89° 57' W., on a true line, bet. secs. 3 and 10.
 Over rolling land, through scattering undergrowth.
 20.40 Fence, brs. N.13 $\frac{1}{4}$ ° E. and S.13 $\frac{1}{4}$ ° W.
 39.98 $\frac{1}{2}$ Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 3
 S 10
 1916

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N.
 of cor.
 48.30 Desc. 140 ft. to
 64.65 Wash, course S.70° W. Asc. 50 ft. to
 72.25 Point of spur, slopes S.40° W. Desc. 95 ft. to
 79.97 The cor. of secs. 3, 4, 9 and 10.
 Land, rolling.
 Soil, gravelly, 3rd rate.
 No timber.
 Undergrowth, palo verde and greasewood.

40.00 N.0° 2' W., on a random line, bet. secs. 3 and 4.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.97 Intersect N. bdy. of Tp., 12 lks. W. of the cor. of secs.
 3, 4, 33 and 34, which is an iron post, hereinbefore
 described.

Chains.

Thence
 S.0° 3' W., on a true line, bet. secs. 3 and 4.
 Over rolling land, through scattering undergrowth.
 9.15 Road, brs. S.70° E. to Stanton and N. 70° W. to Congress
 Junction.
 39.97 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
 S 4 | S 3
 1916

And raise a mound of stone, 2 ft. base, 1½ ft. high, W.
 of cor.
 57.95 Wash, 50 lks. wide, course S.50° W.
 79.97 The cor. of secs. 3, 4, 9 and 10.
 Land, rolling.
 Soil, gravelly, 3rd rate.
 No timber.
 Undergrowth, palo verde, greasewood and mesquite.

From the cor. of secs. 27, 28, 33 and 34,
 West on sectional correction line, bet. secs. 28 and 33.
 Over rolling land, through dense undergrowth.
 Desc. 110 ft. to
 11.44 Wash, 25 lks. wide, course S.30° W. Thence along S. slope to
 15.60 Wash, 25 lks. wide, course S.20° E. Asc. 25 ft. to
 20.45 Thence over gently rolling land.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

S28
 $\frac{1}{4}$ S33
 1916

And raise a mound of stone, 2 ft. base, 1½ ft. high, N.
 of cor.
 43.00 Desc. 40 ft. to
 46.50 Junction of washes, one from NE. and one from NW., 50 lks.
 wide, course S.10° W. Asc. 85 ft. to
 65.50 Spur, slopes S. Desc. 35 ft. to
 74.80 Wash, course S. Asc. to
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 28, 29, 32 and 33, marked on
 brass cap

*9N R5W
 S29 | S28
 S32 | S33
 1916

And raise a mound of stone, 2 ft. base, 1½ ft. high, W.
 of cor.
 Land, rolling.
 Soil, gravelly, 3rd rate.
 Undergrowth, palo verde, greasewood, mesquite and cat claw.
 No timber.

From the cor. of secs. 28, 29, 32 and 33,
 S.0° 2' E., on a random line, bet. secs. 32 and 33.
 40.00 Set temp. sec. cor.
 80.51 Intersect 2nd Standard Parallel North, 49 lks. E. of the
 standard cor. of secs. 32 and 33, which is a granite
 stone, hereinbefore described.
 Thence
 N.0° 19' E., on a true line, bet. secs. 32 and 33.

32.

Subdivision of T. 9 N., R. 5 W.

Chains.

13.70 Over rolling land, through dense undergrowth.
 18.00 Wash, course S.40° E. Asc. to
 23.20 Spur, slopes S.30° E. Desc. to
 40.51 Wash, course S.50° E. Asc. 35 ft. to
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
 S32 | S33
 1916

And raise a mound of stone, 2 ft. base, 1½ ft. high, W.
 of cor.

Thence over gently rolling land.
 64.50 Asc. 30 ft. to
 72.50 Spur, slopes S.10° E. Desc. gradually to
 80.51 The cor. of secs. 28, 29, 32 and 33.
 Land, rolling and gently rolling.
 Soil, gravelly, 3rd rate.
 No timber.
 Undergrowth, palo verde, mesquite, greasewood and cat claw.

N.0° 2' W., bet. secs. 28 and 29.
 Over rolling land, through dense undergrowth.
 Asc. gradually to
 10.00 Spur, slopes S.20° W. Comes from N. Continue ascent on
 spur.
 26.00 Spur, slopes S.30° E. and spur slopes S. Desc. 60 ft.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
 S29 | S28
 1916

And raise a mound of stone, 2 ft. base, 1½ ft. high, W.
 of cor.

Leave dense, enter scattering undergrowth.
 52.40 Bend in wash, course S.10° E. Comes from N.10° W.
 59.40 Same wash, 50 lks. wide, course S.60° E. Thence over gently
 rolling land.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 20, 21, 28 and 29, marked on
 brass cap

T9N R5W
 S20 | S21
 S29 | S28
 1916

And raise a mound of stone, 2 ft. base, 1½ ft. high, W.
 of cor.

Land, rolling and gently rolling.
 Soil, gravelly, 3rd rate.
 No timber.
 Undergrowth, palo verde, mesquite, greasewood and cat claw.

40.00 East on a random line, bet. secs. 21 and 28.
 79.98 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect E. and S. line at the cor. of secs. 21, 22, 27
 and 28
 Thence
 West on a true line, bet. secs. 21 and 28.
 Over rolling land, through scattering undergrowth.

Chains.	
11.90	Wash, course S.30° W.
39.99	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4}$ S21 $\frac{1}{4}$ S28 1916
	And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
	Desc. 60 ft. to
45.15	Wash, course S.20° W. Asc. 60 ft. to
48.80	Spur, slopes S.10° W. Desc. 90 ft. to
61.50	Wash, 50 lks. wide, course S.20° E. Asc. 45 ft. to
77.70	Thence over gently rolling mesa.
79.98	The cor. of secs. 20, 21, 28 and 29.
	Land, rolling and gently rolling.
	Soil, gravelly, 3rd rate.
	No timber.
	Undergrowth, palo verde, mesquite, cat claw and greasewood.
	N.0° 2' W., bet secs. 20 and 21.
	Over rolling land, through scattering undergrowth.
11.90	Wash, 15 lks. wide, course S.50° E.
25.50	Wash, 20 lks. wide, course S.50° E.
31.00	Dim road, brs. N.5° W. and S.5° E.
34.40	Dim road, brs. N.5° E. and S.5° W.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4}$ S20 S21 1916
	And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 16, 17, 20 and 21, marked on brass cap
	T9N R5W S17 S16 S20 S21 1916
	And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
	Land, rolling and gently rolling.
	Soil, gravelly, 3rd rate.
	No timber.
	Undergrowth, palo verde, cat claw, mesquite and greasewood.
	East on a random line, bet. secs. 16 and 21.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.92	Intersect N. and S. line, 5 lks. S. of the cor. of secs. 15, 16, 21 and 22.
	Thence
	S.89° 58' W., on a true line, bet. secs. 16 and 21.
	Over gently rolling land, through scattering undergrowth.
39.96	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4}$ S16 $\frac{1}{4}$ S21 1916


34.

Subdivision of T. 9 N., R. 5 W.


chains.

63.90 And raise a mound of stone, 2 ft. base, 1½ ft. high, N.
 79.92 of cor.
 Desc. 85 ft. to
 Wash, 50 lks. wide, course S. Asc. gradually to
 the cor. of secs. 16, 17, 20 and 21.
 Land, rolling and gently rolling.
 Soil, gravelly, 3rd rate.
 No timber.
 Undergrowth, palo verde, mesquite and cat claw.

40.00 N.0° 2' W., bet. secs. 16 and 17.
 Over gently rolling land, through scattering undergrowth.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for ¼ sec. cor., marked on brass cap




41.00 Dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft.
 71.00 dist.; and raise a mound of earth, 3½ ft. base, 1½ ft.
 79.00 high, W. of cor.
 Old road, brs. N.40° W. and S.40° E.
 Wash, 50 lks. wide, course S.30° E.
 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the
 ground, for witness cor. to cor. of secs. 8, 9, 16 and
 17, marked on brass cap



80.00 Dig pits, 18 X 18 X 12 ins., in each sec., 5½ ft. dist.;
 and raise a mound of earth, 4 ft. base, 2 ft. high, W.
 of cor.
 The true point for cor. of secs. 8, 9, 16 and 17 falls in
 wash, 50 lks. wide, course S.20° W.
 Land, gently rolling and rolling.
 Soil, gravelly, 3rd rate.
 No timber.
 Undergrowth, palo verde, mesquite and cat claw.

40.00 From the true point for cor. of secs. 8, 9, 16 and 17,
 79.94 N.89° 58' E., on a true line, bet. secs. 9 and 16.
 Set temp. ¼ sec. cor.
 Intersect N. and S. line, 2 lks. S. of the cor. of secs.
 9, 10, 15 and 16.

Thence
 S.89° 57' W., on a true line, bet. secs. 9 and 16.
 Over rolling land, through scattering undergrowth.
 Desc. 80 ft. to
 10.65 Wash, course S.50° W. Thence over gently rolling land.
 36.95 Wash, 50 lks. wide, course S.
 39.97 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for ¼ sec. cor., marked on brass cap



45.75 And raise a mound of stone, 2 ft. base, 1½ ft. high, N.
 of cor.
 Wash, 30 lks. wide, course S.30° W.

Chains.
79.94

The true point for cor. of secs. 8, 9, 16 and 17.
Land, rolling and gently rolling.
Soil, gravelly and sandy, 3rd rate.
No timber.
Undergrowth, palo verde, mesquite, cat claw and greasewood.

40.00

From the true point for cor. of secs. 8, 9, 16 and 17,
N.0° 2' W., bet. secs. 8 and 9.
Over gently rolling land, through scattering undergrowth.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
S 8 | S 9
1916

80.00

Dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft.
dist.; and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft.
high, W. of cor.
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 4, 5, 8 and 9, marked on brass
cap

T9N R5W
S 5 | S 4
S 8 | S 9
1916

Dig pits, 18 X 18 X 12 ins., in each sec., $5\frac{1}{2}$ ft. dist.;
and raise a mound of earth, 4 ft. base, 2 ft. high, W.
of cor.
Land, gently rolling.
Soil, gravelly and sandy, 3rd rate.
No timber.
Undergrowth, mesquite, cat claw and palo verde.

40.00
79.92

N.89° 57' E., on a random line, bet. secs. 4 and 9.
Set temp. $\frac{1}{4}$ sec. cor.
Intersect N. and S. line, 2 lks. N. of the cor. of secs.
3, 4, 9 and 10.

9.60
39.96

Thence
S.89° 58' W., on a true line, bet. secs. 4 and 9.
Over gently rolling land, through scattering undergrowth.
Wash, 30 lks. wide, course S.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 4
S 9
1916

79.92

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N.
of cor.
The cor. of secs. 4, 5, 8 and 9.
Land, gently rolling.
Soil, gravelly and sandy, 3rd rate.
No timber.
Undergrowth, mesquite, cat claw, and greasewood.

40.00
80.00

N.0° 2' W., on a random line, bet. secs. 4 and 5.
Set temp. $\frac{1}{4}$ sec. cor.
Intersect N. bdy. of Tp., 2 lks. E. of the cor. of secs.

36.

Subdivision of T. 9 N., R. 5 W.

Chains.

4, 5, 32 and 33, which is an iron post, hereinbefore described.
 Thence
 S.0° 3' E., on a true line, bet. secs. 4 and 5.
 Over gently rolling land, through scattering undergrowth.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
 S 5 | S 4
 1916

80.00 Dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft. dist. $\frac{3}{8}$ and raise a mound of earth, $3\frac{1}{8}$ ft. base, $1\frac{1}{2}$ ft. W. of cor.
 The cor. of secs. 4, 5, 8 and 9.
 Land, gently rolling.
 Soil, sandy, 3rd rate.
 No timber.
 Undergrowth, mesquite, cat claw and greasewood.

7.60 From the cor. of secs. 28, 29, 32 and 33,
 35.50 West on sectional correction line, bet. secs. 29 and 32.
 40.00 Over rolling land, through dense undergrowth.
 Asc. to
 Spur, slopes S. Desc. 60 ft. to
 Wash, course S. Asc. 35 ft. to
 Spur, slopes S. Desc. 80 ft.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S29
 S32
 1916

50.70 And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
 Martinez Creek Wash, course S. Thence over gently rolling land.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 29, 30, 31 and 32, marked on brass cap

T9N R5W
 S30 | S29
 S31 | S32
 1916


40.00 Dig pits, 18 X 18 X 12 ins., in each sec., $5\frac{1}{8}$ ft. dist.;
 80.29 and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.
 Land, rolling.
 Soil, gravelly and sandy, 3rd rate.
 No timber.
 Undergrowth, palo verde, mesquite, cat claw and greasewood.

40.00 From the cor. of secs. 29, 30, 31 and 32,
 80.29 S.0° 3' E., on a random line, bet. secs. 31 and 32.
 Set temp. $\frac{1}{4}$ sec. cor.,
 Intersect 2nd Standard Parallel North, 21 lks. N. of the standard cor. of secs. 31 and 32, which is a granite stone, hereinbefore described,
 Thence
 N.0° 6' E., on a true line, bet. secs. 31 and 32.
 Over gently rolling land through dense undergrowth.

Subdivision of T. 9 N., R. 5 W. 37.

Chains.

40.29 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap



Dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft. dist.; and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

80.29 The cor. of secs. 29, 30, 31 and 32.
Land, gently rolling.
Soil, sandy, 3rd rate.
No timber.
Undergrowth, palo verde, mesquite, cat claw and greasewood.


40.00 West on a random line, bet. secs. 30 and 31.
Set temp. 1/4 sec. cor.

80.11 Intersect W. bdy. of Tp., 10 lks. N. of the cor. of secs. 25, 30, 31 and 36, which is a granite stone, hereinbefore described, (reestablished in May, 1897).

Thence N.89° 56' E., on a true line, bet. secs. 30 and 31.
Over gently rolling land, through dense undergrowth.

11.10 Wash, course S.20° E.

40.11 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap



Dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft. dist.; and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

49.50 Wash, 30 lks. wide, course S.20° E.

80.11 The cor. of secs. 29, 30, 31 and 32.
Land, gently rolling.
Soil, sandy, 3rd rate.
No timber.
Undergrowth, mesquite, cat claw and greasewood.

N.0° 3' W., bet. secs. 29 and 30.
Over gently rolling land, through dense undergrowth.

17.80 Desc. 40 ft. to

24.00 Asc. 35 ft. to

29.35 Desc. 65 ft. to

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap



And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

48.00 Foot of descent, thence over gently rolling land.

66.30 Dim road, brs. N.20° W. and S.20° E.

71.40 Martinez Creek Wash, 1 ch. wide, course S.40° E.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 19, 20, 29 and 30, marked on brass cap

38. Subdivision of T. 9 N. R. 5 W.

Chains.

T9N R5W
 S19 | S20
 S30 | S29
 1916

Dig pits, 18 X 18 X 12 ins., in each sec., 5½ ft. dist.; and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.
 Land, rolling and gently rolling.
 Soil, sandy, 3rd rate.
 No timber.
 Undergrowth, palo verde, mesquite, cat claw and greasewood.

40.00 East on a random line, bet. secs. 20 and 29.
 79.98 Set temp. ¼ sec. cor.
 Intersect N. and S. line, 2 lks. N. of the cor. of secs. 20, 21, 28 and 29.
 Thence
 N.89° 59' W., on a true line, bet. secs. 20 and 29.
 Over gently rolling land, through dense undergrowth..
 24.50 Wash, 30 lks. wide, course S.50° E.
 39.99 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

¼ S20
 ¼ S29
 1916

46.20 Dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft. dist.; and raise a mound of earth, 3½ ft. base, 1½ ft. high, N. of cor.
 46.20 Road, brs. N. and S.
 59.85 Wash, 20 lks. wide, course S. Asc. 25 ft. to
 71.20 Spur, slopes S. Desc. 55 ft. to
 79.98 The cor. of secs. 19, 20, 29 and 30.
 Land, rolling and gently rolling.
 Soil, sandy, 3rd rate.
 No timber.
 Undergrowth, palo verde, mesquite, cat claw and greasewood.

40.00 S.89° 56' W., on a random line, bet. secs. 19 and 30.
 Set temp. ¼ sec. cor.
 80.15 Intersect W. bdy. of Tp., at the reestablished cor. of secs. 19, 24, 25 and 30, which is an iron post, hereinbefore described.
 Thence
 N.89° 56' E., on a true line, bet. secs. 19 and 30.
 Over gently rolling mesa, through dense undergrowth.
 40.15 Set an iron post, 3 ft. long, 1 in. diam., 26 ins in the ground, for ¼ sec. cor., marked on brass cap

¼ S19
 ¼ S30
 1916


50.20 Dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft. dist.; and raise a mound of earth, 3½ ft. base, 1½ ft. high, N. of cor.
 50.20 Desc. 85 ft. to
 64.15 Martinez Creek Wash, course S.20° E.
 66.15 Leave Martinez Creek Wash, course S.20° E.
 80.15 The cor. of secs. 19, 20, 29 and 30.
 Land, gently rolling.
 Soil, sandy loam, 2nd rate.
 No timber.

Subdivision of T. 9 N., R. 5 W.

Chains.

Undergrowth, cat claw and mesquite.

32.00 N.0° 3' W., bet. secs. 19 and 20.
 Over gently rolling land, through scattering undergrowth.
 Asc. 60 ft. to
 38.24 Top of ascent, thence over gently rolling mesa.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap




80.00 Dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft.
 dist.; and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft.
 high, W. of cor.
 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 17, 18, 19 and 20, marked on
 brass cap



Dig pits, 18 X 18 X 12 ins., in each sec., $5\frac{1}{2}$ ft. dist.;
 and raise a mound of earth, 4 ft. base, 2 ft. high, W.
 of cor.
 Land, gently rolling.
 Soil, sandy and gravelly, 3rd rate.
 No timber.
 Undergrowth, palo verde, greasewood and cat claw.

40.00 S.89° 59' E., on a random line, bet. secs. 17 and 20.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.98 Intersect N. and S. line, 5 lks. S. of the cor. of secs.
 16, 17, 20 and 21.
 S.89° 59' W.; on a true line, bet. secs. 17 and 20.
 Over gently rolling land, through scattering undergrowth.
 24.20 Wash, course S.
 36.00 Wash, course S.30° E.
 39.99 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



50.10 Dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft.
 dist.; and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft.
 high, N. of cor.
 79.98 Road, brs. N.30° W. to Congress Junction and S.30° E.
 The cor. of secs. 17, 18, 19 and 20.
 Land, gently rolling.
 Soil, gravelly and sandy, 3rd rate.
 No timber.
 Undergrowth, mesquite, palo verde and cat claw.

40.00 S.89° 56' W., on a random line, bet. secs. 18 and 19.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.17 Intersect W. bdy. of Tp., 14 lks. S. of the cor. of secs.
 13, 18, 19 and 24, which is a mesquite post, hereinbefore
 described.

40.

Subdivision of T. 9 N., R. 5 W.

Chains.

Thence
S.89° 58' E., on a true line, bet. secs. 18 and 19.
Over gently rolling land, through scattering undergrowth.
Desc. 90 ft. to
Foot of descent, thence over level land.
The true point for $\frac{1}{4}$ sec. cor. falls in Martinez Creek
Wash, course S.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for witness cor. to $\frac{1}{4}$ sec. cor., marked on
brass cap

WC $\frac{1}{4}$ S18
S19
1916

Dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft.
dist.; and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft.
high, N. of cor.

42.25 Main channel of Martinez Creek Wash, course S.
56.15 Leave level land, asc. 70 ft. to
80.17 The cor. of secs. 17, 18, 19 and 20.
Land, level, rolling and gently rolling.
Soil, deep, loose, sandy loam, 2nd rate.
No timber.
Undergrowth, mesquite and cat claw.

N.0° 3' W., bet. secs. 17 and 18.
Over gently rolling land, through scattering undergrowth.
Road, brs. N.10° W. and S.10° E.
Road, brs. N.10° W. and S.30° E.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
S18 | S17
1916

Dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft.
dist.; and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft.
high, W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 7, 8, 17 and 18, marked on
brass cap

T9N R5W
S 7 | S 8
S18 | S17
1916

Dig pits, 18 X 18 X 12 ins., in each sec., 5 $\frac{1}{2}$ ft. dist.;
and raise a mound of earth, 4 ft. base, 2 ft. high, W.
of cor.
Land, gently rolling.
Soil, sandy loam, 2nd rate.
No timber.
Undergrowth, mesquite, cat claw, and greasewood.

40.00 N.89° 59' E., on a random line, bet. secs. 8 and 17.
Set temp. sec. cor.
79.97 Intersect N. and S. line, 5 lks. N. of the true point for
cor. of secs. 8, 9, 16 and 17.

Thence
N.89° 59' W., on a true line, bet. secs. 8 and 17.
Over gently rolling land, through scattering undergrowth.
Wash, course S.
24.75 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
39.98 $\frac{1}{2}$

Subdivision of T. 9 N., R. 5 W.

Chains.

ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 8
S17
1916

Dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft. dist.; and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. N. of cor.

55.77 Road, brs. N.70° W. and S.70° E.
70.27 Wash, course S.
79.97 The cor. of secs. 7, 8, 17 and 18.

Land, gently rolling.
Soil, sandy loam, 2nd rate.
No timber.
Undergrowth, palo verde, mesquite, cat claw and greasewood.

40.00 N.89° 58' W., on a random line, bet. secs. 7 and 18.
80.13 Set temp. $\frac{1}{4}$ sec. cor.
Intersect W. bdy. of Tp., at the cor. of secs. 7, 12, 13 and 18, which is a granite stone, hereinbefore described.

Thence
15.15 S.89° 58' E., on a true line, bet. secs. 7 and 18.
31.55 Over rolling land, through scattering undergrowth.
39.95 Wash, course S.
40.13 Wash, course S.

40.13 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 7
S18
1916

Dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft. dist.; and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

50.95 Road, brs. N.20° W. to Congress Junction and S.20° E.
80.13 The cor. of secs. 7, 8, 17 and 18.

Land, rolling and gently rolling.
Soil, sandy loam, 2nd rate.
No timber.
Undergrowth, cat claw, mesquite and greasewood.

19.20 N.0° 3' W., bet. secs. 7 and 8.
40.00 Over gently rolling land, through scattering undergrowth.
Road, brs. N.50° W. and S.50° E.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
S 7 | S 8
1916

Dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft. dist.; and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

45.40 Wash, course S.50° E.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 5, 6, 7 and 8, marked on brass cap

42.

Subdivision of T. 9 N., R. 5 W.

Chains.

T9N R5W
 S 6 | S 5
 S 7 | S 8
 1916

Dig pits 18 x 18 x 12 ins., in each sec., 5 1/2 ft. dist.; and raise mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, gently rolling.
 Soil, deep, sandy loam, 2nd rate.
 No timber.
 Undergrowth, mesquite, palo verde and cat claw.

40.00 S. 89° 59' E., on a random line, bet. secs. 5 and 8.
 Set temp. 1/4 sec. cor.
 80.00 Intersect E. bdy. of T. 9 N., at the cor. of secs. 4, 5, 8 and 9.
 Thence N
 N. 89° 59' W., on a true line, bet. secs. 5 and 8.
 Over gently rolling land, through scattering undergrowth.
 31.90 Wash, course S.
 35.20 Wash, course S. 30° E.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap

1/4 S 5
 1/4 S 8
 1916

45.80 Dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft. dist.; and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.
 67.60 Wash, course S. 30° E.
 80.00 Wash, course S.
 The cor. of secs. 5, 6, 7 and 8.
 Land, gently rolling.
 Soil, sandy, 3rd rate.
 No timber.
 Undergrowth, palo verde, mesquite, cat claw and greasewood.

40.00 N. 89° 58' W., on a random line, bet. secs. 6 and 7.
 Set temp. 1/4 sec. cor.
 80.09 Intersect W. bdy. of Tp., 2 lks. N. of the cor. of secs. 1, 6, 7 and 12, which is a granite stone, 6 X 6 X 6 ins. above ground, firmly set, marked and witnessed as described by the Surveyor-General.
 Thence
 S. 89° 59' E., on a true line, bet. secs. 6 and 7.
 Over gently rolling land, through scattering undergrowth.
 30.80 Road, brs. N. 50° W. and S. 50° E.
 40.09 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap

1/4 S 6
 1/4 S 7
 1916

80.09 Dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft. dist.; and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.
 The cor. of secs. 5, 6, 7 and 8.
 Land, gently rolling.
 Soil, sandy loam, 2nd rate.
 No timber.
 Undergrowth, mesquite, cat claw, and greasewood.

Subdivision of T. 9 N. R. 5 W.

Chains.

40.00 N.0° 3' W., on a random line, bet. secs. 5 and 6.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.00 Intersect N. bdy. of Tp., 3 lks. E. of the cor. of secs. 5, 6, 31 and 32, which is an iron post, hereinbefore described.
 Thence
 S.0° 4' E., on a true line, bet. secs. 5 and 6.
 Over gently rolling land, through scattering undergrowth.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$$S \ 6 \frac{1}{4} \ S \ 5$$
 1916

Dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft. dist.; and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 45.00 Bend in wash, course S.40°E. Comes from N. 30° E.
 62.40 Wash, course S.45° E.
 80.00 The cor. of secs. 5, 6, 7 and 8,
 Land, gently rolling.
 Soil, sandy loam, 2nd rate.
 No timber.
 Undergrowth, mesquite, cat claw and palo verde.

GENERAL DESCRIPTION.

This township lies south of the Weaver Mountains, and the drainage is south into the Hassayampa river. The west part of the Tp. is a deep, loose, sandy loam, from the granite hills to the north. The central portion is largely a malpais and volcanic ash formation. There is no grass. The only feed for stock is the catclaw, palo verde and mesquite brush, and in the spring alfilaria. There is no water in the township. Mr. Akard in sec. 11 gets his water from a well in Antelope Creek, about $2\frac{1}{2}$ miles north. He also has two small reservoirs, one in sec. 16, and one in sec. 23, which furnish a small water supply during the early summer months. These reservoirs could not be seen from any point on the section lines, and therefore, could not be accurately located without a special traverse for the purpose. The Tp. is only valuable for winter and early spring grazing. There is no available water for irrigation.

4-680

FIELD ASSISTANTS.
to Chas. M. Pidgeon, U.S.S.

NAMES.	CAPACITY.
Rezin E. Pidgeon,	1st Chainman,
Wm. H. Brown,	2nd Chainman,
P. W. Warren,	Rodman,
B. S. Lennan,	Axeman,
Frank Durcher,	Moundman,

96
BOOK 3163
46

For CERTIFICATE OF UNITED STATES SURVEYOR.

See Book "A.")

I, Chas. M. Pidgeon, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General for bearing date of the _____ day of _____, 191____, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of _____ of the _____ Meridian, in the State of _____, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General for _____ and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

U. S. Surveyor

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix, Arizona, November 8, 1918

The foregoing field notes of the ^{re-}survey of a portion of the 2nd Standard Parallel North, thru Range 5 West, and portion of West bdy., and

Survey of the


East boundary, and Subdivision lines of

TOWNSHIP 9 NORTH, RANGE 5 WEST,

of the Gila and Salt River Base & Meridian, in the State of Arizona,

executed by Charles M. Pidgeon, U.S. Surveyor,

under ~~his~~ special instructions dated Oct. 5, 1915, for Group 60, Arizona, ~~191~~, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the ^{re-}surveys and surveys they describe, are hereby approved.

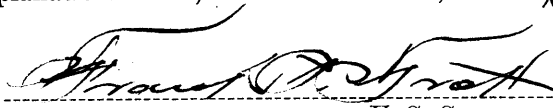

U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above described surveys in

_____ has been correctly copied from the original notes on file in this office.

U. S. Surveyor General.