

211

3240
Book "R"
4-679

3240

BOOK 3240

(Subdivisions)

FIELD NOTES

OF THE SURVEY OF THE

SUBDIVISION LINES

of

TOWNSHIP 10 NORTH, RANGE 13 WEST.

3240

Of the Gila and Salt River Base and Meridian,

In the State of Arizona.

EXECUTED BY

Hugo Price.

3240

In the capacity of U. S. Transitman, under instructions dated July 23., 1914.,
issued by the United States Surveyor General to govern surveys; included in
Group No. 36, which were approved by the Commissioner of the General Land
Office, August 15., 1914.

Survey commenced February 25., 1917.

Survey completed April 22., 1917.

Executed under Assignment
Instructions dated


1A
212

3240
Book "R"

Group 36 - - - Arizona.

BOOK 3240

INDEX DIAGRAM.

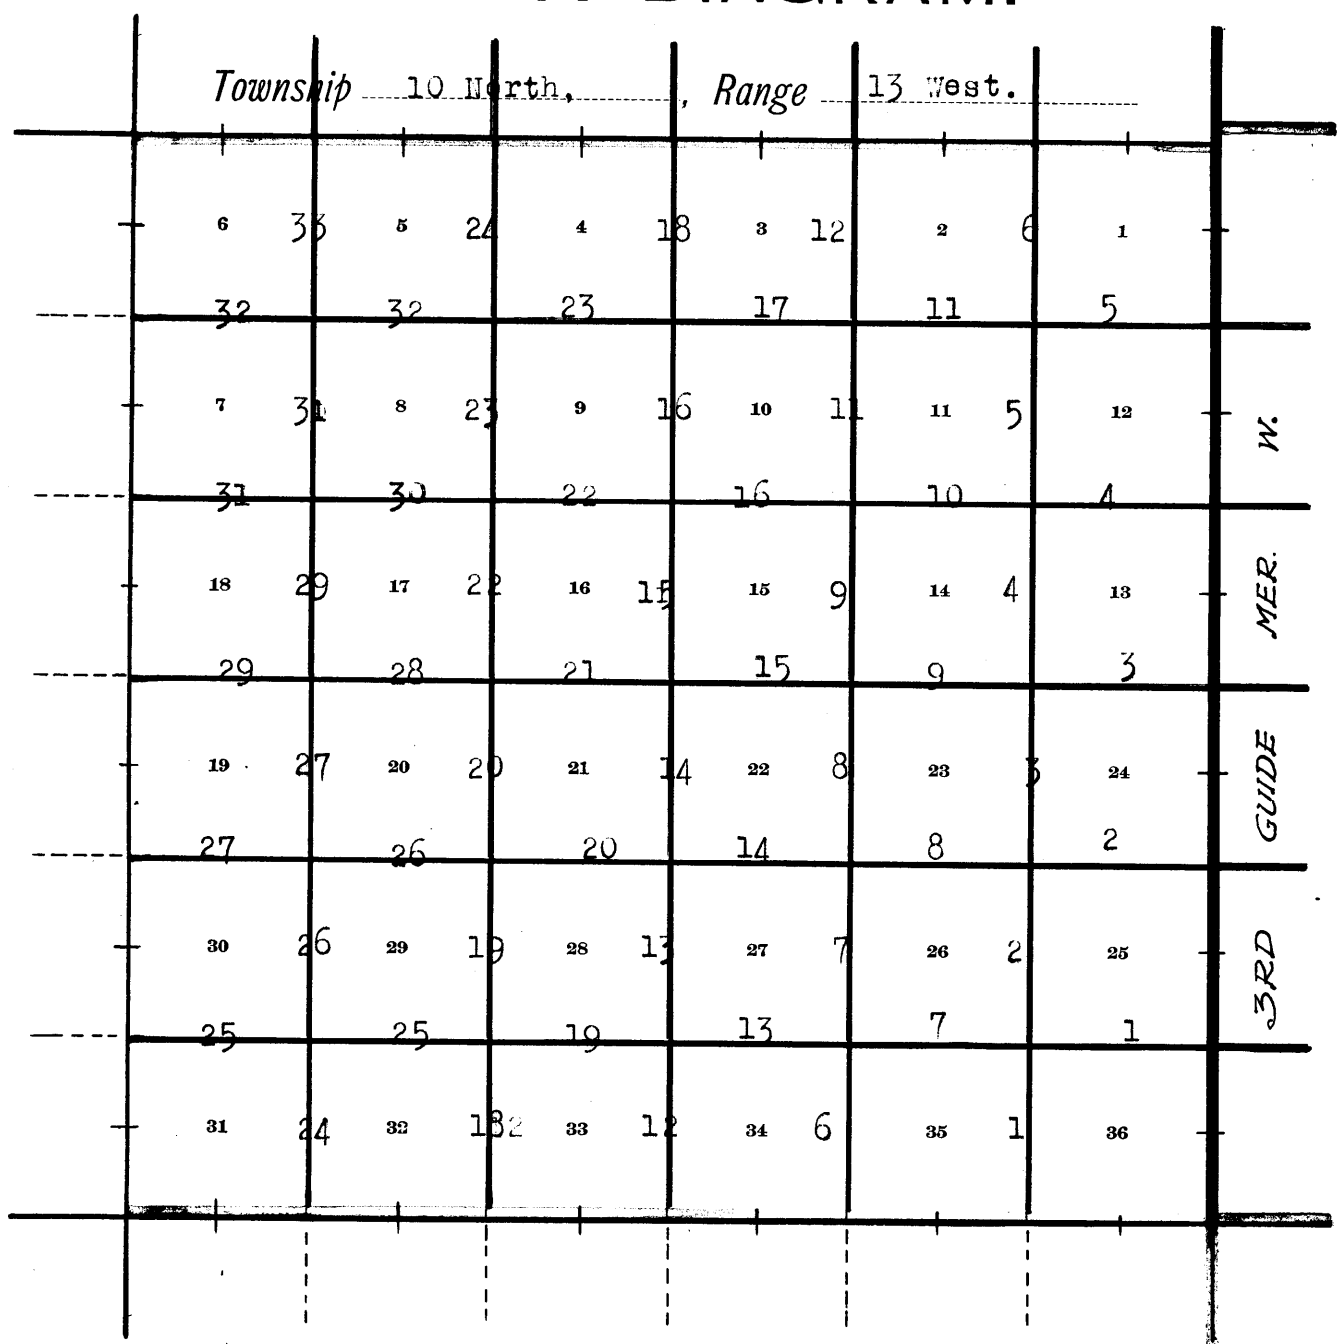

- Subdivision lines surveyed under this group.
- Township boundaries surveyed under this group.
Notes in Book "A." 3223
- Standard Lines resurveyed under this group.
Notes in Book "B." 3224
- Accepted surveys.
- Unsurveyed.

Subdivision of Township 10 North, Range 13 West

Chains

Surveys hereinafter described were executed by Hugo Price, U. S. Transitman, on dates shown on diagram on page 35 hereof, using a Young and Sons light mountain transit No. 8539. Description, tests and approval of this instrument in Book "A" of this group.

From the cor. of secs. 1, 2, 35, and 36, on the South bdy. of the township, as described in Book "A".
 N. 02° 2' W., bet. secs. 35 and 36.
 Over mountainous land, through scattering undergrowth.
 7.00 Wash, 20 lks. wide, course SE., ascend S. slope
 11.00 Spur, E. 90 ft. above wash, descend north slope.
 25.10 Ravine, course E., 120 ft. below the spur,
 Ascend SE. slope
 36.80 Ridge, 110 ft. above ravine, bears NE. and SW.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in ground, supported by mound of stone, for the $\frac{1}{4}$ sec. cor. marked on cap,

$$\begin{array}{c} \frac{1}{4} S35 | S36 \\ 1915 \end{array}$$
 raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W of cor.
 Descend north slope
 49.70 Wash, 180 ft. below $\frac{1}{4}$ cor., 20 lks. wide, course E.
 Ascend south slope
 55.80 Ridge, 50 ft. above the wash, brs. E. and W., Desc. N slope.
 73.40 Wash, 420 ft. below the ridge, 30 lks. wide, course NE.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. ground, supported by mound of stone, for the cor. of secs. 25, 26, 35, and 36, marked on brass cap,

T10N R13W

$$\begin{array}{c} S26 | S25 \\ S35 | S36 \\ 1915 \end{array}$$

raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of the cor.

Land, mountainous.
Soil, rocky, 4th. rate.
Undergrowth, palo verde, cactus, and bunch grass.
No timber.

40.00 N. 89° 57' E., on a random line bet. secs. 25 and 36.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.90 Intersect E. bdy. of Tp., (3rd. Guide Mer. W.), 5 lks. S. of the reestablished cor. of secs. 25, 30, 31 and 36, described in Book "B." Thence,
 S. 89° 55' W., on a true line, bet. secs. 25 and 36.
 Over mountainous land, through medium undergrowth.
 Ascend SE. slope
 0.40 Spur, bears SE., descend W. slope.
 14.30 Wash, 280 ft. below spur, 20 lks. wide, course S.
 Ascend SE. slope
 35.20 Ridge, 220 ft. above wash, brs. NE. and SW., descend W. slope.
 39.95 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground, supported by mound of stone, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

$$\begin{array}{c} \frac{1}{4} S25 \\ S36 \\ 1915 \end{array}$$

raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of the cor.

This cor. is 180 ft. below the ridge, descend W. slope.
 44.80 Wash, 90 ft. below $\frac{1}{4}$ cor., 30 lks. wide, course NE.
 Ascend E. slope.
 51.90 Spur, 100 ft. above wash, brs. N., along broken N. slope.

Subdivision of Township, 10 North, Range 13 West.

Chains

63.20 Spur, brs. NE., descend NW. slope.
 75.50 Wash, 180 ft. below spur, 20 lks. wide, course N.
 Ascend NE. slope.
 79.90 The cor. of secs. 25, 26, 35, and 36; 70 ft. above wash.

Land, mountainous.
 Soil, rocky, 4th. rate.
 Undergrowth, palo verde, greasewood, and cactus.
 No timber.

N. 0° 2' W., bet. secs. 25 and 26,
 Over mountainous land, through medium undergrowth.
 Descend NE. slope.

21.60 Spur, 40 ft. below cor., brs. NE., descend N. slope.
 27.70 Wash, 120 ft. below spur, 30 lks. wide, course NE.
 Ascend along E. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in
 ground, and supported by a mound of stone, for the $\frac{1}{4}$
 sec. cor., marked on brass cap,

$\frac{1}{4}$ S26 | S25
 1915

raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
 W. of cor.

This cor. is 50 ft. above the wash.

43.30 Ridge, bears NE. and SW., descend N. slope.
 64.80 Wash, 390 ft. below ridge, 30 lks. wide, course NW.
 Ascend SW. slope.

71.10 Spur, 50 ft. above wash, brs. W., descend NW. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 10 ins.
 in ground and supported by mound of stone, for the
 cor. of secs. 23, 24, 25, and 26, marked on brass cap,

T10N R13W
 S23 | S24
 S26 | S25
 1915

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
 W. of cor.

This cor. is 160 ft. below spur.

Land, mountainous.
 Soil, rocky, 4th. rate.
 Undergrowth, palo verde, greasewood, cactus, and bunch
 grass.
 No timber.

40.00 N. 89° 55' E., on a random line, bet. secs. 24 and 25.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.04 Intersect E. bdy. of Tp., (3rd Guide Mer. W.), at reestablished
 cor. of secs. 19, 24, 25 and 30, described in
 Book "B."

S. 89° 55' W. on a true line bet. secs. 24 and 25.
 Over mountainous land, through medium undergrowth.
 Ascend E. slope.

33.30 Spur, 90 ft. above cor., Brs. S., descend NW. slope.
 8.70 Wash, 30 ft. below spur, 10 lks. wide, course NW.
 Along a broken S. slope.

20.90 Spur, bears N., descend NW. slope.
 40.02 Set an iron post 3 ft. long, 1 in. in diam., 12 ins. in
 ground, supported by mound of stone, for the $\frac{1}{4}$ cor.
 secs. 24 and 25, marked on brass cap,

$\frac{1}{4}$ S24
 S25
 1915

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
 N. of the cor.

This cor. is 280 ft. below the spur.

Subdivision of Township 10 Northm Range 13 West.

Chains

Descend NW. slope.
 48.00 Wash, 50 ft. below cor., course NW., ascend SE. slope.
 60.00 Spur, 220 ft. above wash, brs, NE.
 Ascend and descend along N. slope.
 71.00 Ridge, bears SE. and NW., descend SW. slope.
 80.04 The cor. of secs. 23, 24, 25, and 26.
 Land,, mountainous.
 Soil, rocky, 4th. rate.
 Undergrowth, greasewood and palo verde; bunch and wiregrass.
 No timber.

N.0°2'w. bet. secs. 23 and 24.
 Over mountainous land, through medium undergrowth.

1.50 Small wash, course NW., ascend SW. slope.
 15.10 Ridge, 250 ft. above wash, brs. NW. and SE.
 Descend rocky N. slope.
 30.80 Wash, 280 ft. below ridge, 30 lks. wide, course NW.
 Ascend SW. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground and supported by mound of stone, for the 1/4 sec. cor., marked on brass cap,

1/4 S23 | S24
 1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.

This cor. is 60 ft. above the wash.
 41.30 Small spur, brs. W. descend N. slope.
 64.00 Wash, 220 ft. below spur, 30 lks. wide, course NE.
 65.10 Wash (same), 40 lks. wide, course NW.
 Ascend rocky SW. slope.
 75.60 Top of ascent, 110 ft. above wash, descend NW. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., on solid rock supported by mound of stone, for the cor. secs. 13, 14, 23, and 24, marked on brass cap,

T10N R13W
 S14 | S13
 S23 | S24
 1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.

This cor. is 80 ft. below point at 75.60.

Land, mountainous.
 Soil, rocky, 4th. rate.
 Undergrowth, palo verde, greasewood, and cactus.
 No timber.

N.89°55'E., on a random line bet. secs. 13 and 24.
 Over mountainous land, through medium undergrowth.

40.00 Set temp. 1/4 sec. cor.
 79.96 Intersect E. bdy. of Tp. (3rd Guide Mer. W.), 11 lks. S. of the reestablished cor. of secs. 13, 18, 19 and 24, described in Book "B." Thence,

S.89°50'W., on a true line bet, secs. 13 and 24.
 Over mountainous land, through medium undergrowth.

Descend NW. slope.
 1.20 Wash, 20 lks. wide, course N., ascend NE. slope.
 9.20 Ridge, 170 ft. above wash, brs. N. and SW., descend SW slope.
 27.00 Wash, 200 ft. below ridge, 80 lks. wide, course N.
 Ascend rocky NE. slope:
 38.30 Ridge, 410 ft; above wash, brs. N. and S., descend W. slope.
 39.98 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground, supported by mound of stone, for the 1/4 sec. cor., marked on brass cap,

1/4 S13
 S24
 1915

Subdivision of Township 10 North, Range 13 West.

Chains

- and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
This cor. is 30 ft. below ridge.
- 47.50 Wash, 220 ft. below cor., 20 lks. wide, course N.
Ascend NE. slope.
- 58.60 Spur, 180 ft. above wash, brs. NW., along N. slope.
- 69.00 Spur, brs. NW., descend SW. slope.
- 79.96 The cor. of secs. 13, 14, 23, and 24., 200 ft. below spur.
Land, mountainous.
Soil, rocky, 4th. rate.
Undergrowth, palo verde, greasewood and cactus.
No timber.

- N. $0^{\circ} 2' W.$, bet. secs. 13 and 14.
Over mountainous land, thru. medium undergrowth.
Descend NW. slope.
- 6.80 Wash, 150 ft. below cor., 40 lks. wide, course NE.
Ascend SE. slope.
- 18.30 Spur, 130 ft. above wash, brs. NE., descend NE. slope.
- 30.50 Wash, 170 ft. below spur, 20 lks. wide, course NE.
Ascend SE. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in ground and supported by mound of stone, for the $\frac{1}{4}$ sec. cor., marked on brass cap,
- $\frac{1}{4} S14 | S13$
1915
- and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
This cor. is 190 ft. above wash; ascend SE. slope.
- 43.30 Ridge, 80 ft. above cor., brs. NE. and SW., descend N slope.
- 62.80 Wash, 380 ft. below ridge, 20 lks. wide, course NE.
Ascend SE. slope.
- 71.00 Top of ascent, 190 ft. above wash, descend NE. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for the cor. of secs. 11, 12, 13, and 14, marked on brass cap,

T10N R13W
 $\frac{1}{4} S11 | S12$
 $\frac{1}{4} S14 | S13$
1915

- and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
This cor. is 220 ft. below point at 71.00 chs.
Land, mountainous.
Soil, rocky, 4th rate.
Undergrowth, palo verde, greasewood, and cactus.
No timber.

- N. $89^{\circ} 50' E.$, on a random line bet. secs. 12 and 13.
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 80.04 Intersect E. bdy. of Tp. (3rd Guide Mer. W.) 8 lks. S. of the reestablished true point for cor. of secs. 7, 12, 13 and 18, witnessed as described in Book "B."
Thence,
S. $89^{\circ} 47' W.$, on a true line bet. secs. 12 and 13.
Over mountainous land, through medium undergrowth.
- 0.80 Wash, 30 lks. wide, course NW.
Descend gradual NW. slope.
- 31.00 Wash, 60 ft. below wash at 0.80 chs., 40 lks. wide, course NW. (in canyon).
- 40.02 Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in ground and supported by mound of stone, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4} S12$
 $\frac{1}{4} S13$
1915

Subdivision of Township 10 North, Range 13 West.

Chains

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

This cor. is 20 ft. above wash.

Along NE. slope.

53.40 Wash, 20 lks. wide, course N., ascent across broken N. slope.

59.40 Spur, 40 ft. above wash, brs. NW., descend SW. slope.

76.90 Wash, 100 ft. below spur, 50 lks wide, course NE.

80.04 The cor. of secs. 11, 12, 13, and 14.

Land. mountainous.

Soil, rocky, 4th rate.

Undergrowth, palo verde, greasewood, and cactus.

No timber.

N.0° 2'W., bet. secs. 11 and 12.

Ascend precipitous SE. slope.

7.80 Spur, 120 ft. above cor., brs. NE., descend NW. slope.

22.00 Head of wash, 220 ft. below spur, course E.

Ascend SE. slope.

27.00 Spur, 160 ft. above wash, brs. NE.; descend NW. slope.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in ground and supported by a mound of stone, for the 1/4 sec. cor., marked on brass cap,

1/4 S11 | S12
1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high W. of the cor. This cor. is 160 ft. below spur.

Descend NW. slope.

58.00 Wash, 280 ft. below cor., 40 lks. wide, course NW.

Ascend along W. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for the cor. of secs. 1, 2, 11, and 12, marked on brass cap,

T10N R13W
S2 | S1
S11 | S12
1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the Cor. This cor. is 30 ft. above wash.

Land. mountainous.

Soil, rocky, 4th rate.

Undergrowth, palo verde, greasewood, and cactus.

No timber.

N.89°47'E., on a random line bet. secs. 1 and 12.

40.00 Set temp. 1/4 sec. cor.

79.94 Intersect E. bdy. of Tp. (3rd Guide Mer. W.), 9 lks. N. of the reestablished cor. of secs. 1, 6, 7 and 12, described in Book "B." Thence,

S.89°51'W., on a true line bet. secs. 1 and 12.

Over rolling land, through scattering undergrowth.

3.70 Wash, 30 lks. wide, course NW.

10.80 Wash, 20 lks. wide, course NW.

17.20 Low ridge, 130 ft. above wash, brs. N. and S.

Descend gradual W. slope.

29.30 Wash, 120 ft. below ridge, 30 lks. wide, course NW.

Ascend E. slope.

33.80 Low ridge, 90 ft. above wash, brs. NW. and SE.

Descend SW. slope.

39.15 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for W.C. to the 1/4 sec. cor., marked on brass cap,

WC 1/4 S 1
S12
1915

Subdivision of Township 10 North, Range 13 West.

Chains

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of the cor. This cor. is 80 ft. below ridge.
 39.97 True point for $\frac{1}{4}$ sec. cor. falls in wash, where it would be destroyed. Wash is 30 lks, wide, course NW.
 Ascend E. slope.
 45.20 Low ridge, 70 ft. above wash, brs. N. and S.
 Descend gradual W. slope.
 55.90 Wash, 170 ft. below ridge, 25 lks, wide, course NW.
 66.00 Wash, 25 lks. wide, course NW.
 67.00 Low spur, brs, NW., descend gradual SW. slope.
 79.94 The cor. of secs. 1, 2, 11, and 12.
 This cor. is 210 ft. below Wash at 56.90 chs.
 Land, rolling.
 Soil, rocky, 4th rate.
 Undergrowth, palo verde, greasewood, and cactus.
 No timber.

 N. $0^{\circ}1'W.$, on a random line bet. secs. 1 and 2.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.37 Intersect N. bdy. of Tp., 14 lks. E. of the cor. of secs. 1, 2, 35, and 36, described in Book "A".
 Thence,
 S. $0^{\circ}7'E.$, on a true line bet. secs. 1 and 2.
 Over rolling land, through scattering undergrowth.
 4.20 Wash, 20 lks. wide, course NW.
 14.60 Wash, 30 lks. wide, course NW.
 24.50 Wash, 100 lks. wide, course W.
 34.00 Wash, 50 lks. wide, course, NW.
 39.40 Wash, 50 lks. wide, course N., recrossed.
 40.37 set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}S2|S1$
 1915

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of the cor. This cor. is 80 ft. above sec. cor.
 46.50 Wash, 50 lks, wide, course Nw.
 80.37 The cor. of secs. 1, 2, 11, 12.
 Land, rolling.
 Soil, rocky, 4th rate.
 Undergrowth, palo verde, greasewood, and cactus.
 No timber.

 From the cor. of secs. 2, 3, 34, and 35, on the South bdy. of the Tp., described in Book "A".
 N. $0^{\circ}2'W.$, bet. secs. 34 and 35.
 Over mountainous land, through medium undergrowth.
 Descend along broken NW. slope.
 5.90 Head of wash, 20 lks. wide, course NW.
 17.80 Spur, brs. NW., 220 ft. below cor., descend NE. slope.
 24.70 Wash, 130 ft. below spur, 20 lks. wide, course W.
 Ascend SW. slope.
 30.00 Ridge, 40 ft. above wash, brs. NW. and SE., change to E slope.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in ground and supported by mound of stone, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}S34|S35$
 1915

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 This cor. is 50 ft. below ridge,
 Ascend SE. slope.
 42.50 Ridge, brs. NE. and SW., descend NW. slope.
 54.70 Wash, 100 ft. below ridge, 20 lks. wide, course NW.
 Ascend SW. slope.
 59.70 Spur, 140 ft. above wash, brs, NW., descend NE. slope.
 70.00 Head draw, 230 ft. below spur, brs. NW.

Subdivision of Township 10 North, Range 13 West.

Chains

76.40 Ascend SE. slope.
 Spur, 110 ft. above wash, brs. NE., descend NW. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for the cor. of secs. 26, 27, 34, and 35, marked on brass cap.

T10N R13W
 S27 | S26
 S34 | S35
 1918

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

This cor. is 40 ft. below spur.

Land, mountainous.

Soil, rocky, 4th rate.

Undergrowth, palo verde, greasewood, and cactus.

No timber.

40.00 N. 89° 57' E., on a random line bet. secs. 26 and 35.
 Set temp. ¼ sec. cor.

79.92 Intersect the cor. of secs. 25, 26, 35, and 36.

Thence,

S. 89° 57' W., on a true line bet. secs. 26 and 35.

Over mountainous land, through medium undergrowth.

3.60 Ridge, 110 ft. above cor., brs. NW. and SE.

Descend NW. slope.

13.00 Wash, 140 ft. below ridge, 20 lks. wide, course NW.

Ascend NE. slope.

16.60 Spur, 20 ft. above wash, brs. NW., descend SW. slope.

22.20 Wash, 149 ft. below spur, 50 lks. wide, course NW.

Ascend NE. slope.

29.20 Spur, 130 ft. above wash, brs. N., descend NW. slope.

39.96 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in ground and supported by mound stone, for the ¼ sec. cor., marked on brass cap,

¼ S26
 S35
 1915

and raise a mound stone, 2 ft. base, 1½ ft. high, N. of the cor.

This cor. is 140 ft. below spur.

41.00 Wash, 40 lks, wide, course NE., ascend NE. slope.

55.00 Spur, 320 ft. above wash, brs. SE., continue up SE. slope.

65.20 Ridge, 190 ft. above spur, brs. NW. and S., along N. slope.

72.60 Spur, 40 ft. above ridge, brs. NW., descend NW. slope.

79.92 The cor. of secs. 26, 27, 34, and 35.

This cor. is 340 ft. below spur.

Land, mountainous.

Soil, rocky 4th rate.

Undergrowth, palo verde, greasewood, and cactus.

N. 0° 2' W., bet. secs. 26 and 27.

Over mountainous land, through medium undergrowth.

Ascend NW. slope.

5.30 Spur, 90 ft. above cor., brs. NW., descend NE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in ground and supported by a mound of stone, for the ¼ sec. cor., marked on brass cap,

¼ S27 | S26
 1915

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of the cor.

This cor. is 450 ft. below the spur.

Descend NE. slope.

Subdivision of Township 10 North, Range 13 West.

Chains

- 42.40 Wash, 60 ft. below cor., 40 lks. wide, course NE.
Ascend SE. slope.
59.30 Spur, 210 ft. above wash, brs. NE., descend N. slope.
80.00 Wash, 330 ft. below spur, 40 lks. wide, course N.
Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in
ground and supported by mound of stone, for the cor.
of secs. 22, 23, 26, and 27, marked on brass cap,

T10N R13W

S22 | S23

S27 | S26

1915

and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of the cor.
Land, mountainous.
Soil, rocky, 4th rate.
Undergrowth, palo verde, greasewood, and cactus.
No timber.

- 40.00 N. 89° 57' E., on a random line bet. secs. 23 and 26.
Set temp. ¼ sec. cor.
80.00 Intersect N. and S. line, 17 lks. S. of the cor. of secs.
23, 24, 25, and 26,
Thence,
S. 89° 50' W., on a true line bet. secs. 23 and 26.
Over mountainous land, through medium undergrowth.
Descend NW. slope.
4.40 Wash, 40 ft. below cor., 20 lks. wide, course NW.
Ascend E. slope.
15.40 Spur, 170 ft. above wash, brs. NE., descend W. slope.
30.00 Wash, 220 ft. below spur, 40 lks. wide, course NW.
Ascend E. slope.
38.50 Ridge, 280 ft. above wash, brs. NE. and SW., descend W slope.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
ground, for the ¼ sec. cor., marked on brass cap,

¼ S23

S26

1915

- and raise a mound of stone 2 ft. base, 1½ ft. high,
N. of the cor.
47.20 Wash, 169 ft. below cor., 20 lks. wide, course N.
Ascend NE. slope.
52.50 Spur, 160 ft. above wash, brs. N., continue up NE. slope.
63.30 Spur, 50 ft. above spur, brs. NW., descend NW. slope.
80.00 The cor. of secs. 22, 23, 26, and 27.
This cor. is 360 ft. below spur.
Land, mountainous.
Soil, rocky 4th rate.
Undergrowth, palo verde, greasewood, and cactus.
No timber.

- N. 0° 2' W., bet. secs. 22 and 23.
Over mountainous land, through medium undergrowth.
N. in wash.
3.60 Leave wash, course NW., thence along W. slope.
33.00 Wash, 80 ft. below cor., 50 lks. wide, course NE.
Ascend SE. slope.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in
ground and supported by mound of stone, for the ¼
sec. cor., marked on brass cap,

¼ S22 | S23

1915

and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of the cor.
This cor. is 100 ft. above the wash.

Subdivision of Township 10 North, Range 13 West.

Chains

- Ascend SE. slope.
- 51.70 Spur, 70 ft. above cor., brs. NE., descend NW. slope.
- 71.45 Wash, 310 ft. below spur, 20 lks. wide, course NE.
- Ascend SE. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in ground and supported by mound of stone, for the cor. secs. 14, 15, 22, and 23, marked on brass cap,

T10N R13W
 S15 | S14
 S22 | S23
 1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.

This cor. is 210 ft. above the wash.

Land, mountainous.

Soil, rocky, 4th rate.

Undergrowth, palo verde, greasewood, and cactus.

No timber.

- N. 89° 50' E., on a random line bet. secs. 14 and 23.
- 40.00 Set temp. 1/4 sec. cor.
- 80.08 Intersect N. and S. line, 7 lks. S. of the cor. of secs. 13, 14, 23, and 24.

Thence,

S. 89° 47' W., on a true line bet. secs. 14 and 23.

Over mountainous land, through medium undergrowth.

Descend W. slope.

- 4.30 Wash, 140 ft. below cor., 30 lks. wide, course NE.

Ascend E. slope.

- 15.00 Spur, 330 ft. above wash, brs. N., along N. slope.
- 28.30 Ridge, 50 ft. below spur, brs. NW. and SE., descend W. slope.
- 40.04 Set and iron post, 3 ft. long, 1 1/2 in. in diam., 12 ins. in ground and supported by mound of stone, for the 1/4 sec. cor., marked on brass cap,

1/4 S14
 S23
 1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of the cor.

This cor. is 150 ft. below ridge.

- 53.10 Wash, 180 ft. below cor., 20 lks. wide, course N.

Ascend E. slope.

- 63.60 Spur, 280 ft. above wash, brs. N., descend W. slope.

- 73.00 Wash, 220 ft. below spur, 20 lks. wide, course N.

Ascend SE. slope.

- 80.00 The cor. of secs. 14, 15, 22, and 23.

This cor. is 210 ft. above the wash.

Land, mountainous.

Soil, rocky 4th rate.

Undergrowth, palo verde, greasewood, and cactus.

No timber.

N. 0° 2' W., bet. secs. 14 and 15.

Over mountainous land, through medium undergrowth.

Ascend SE. slope.

- 1.60 Spur, brs. NE., descend NW. slope.
- 11.00 Wash, 120 ft. below spur, 20 lks. wide, course NE.
- 16.90 Recross wash, 70 ft. below first crossing, 20 lks. wide, course NW., along broken W. slope.
- 29.20 Spur, brs. NE., descend NW. slope.
- 38.30 Wash, 240 ft. below spur, 20 lks. wide, course NE.
- Ascend SE. slope.

Subdivision of Township 10 North, Range 13 West.

Chains	
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the $\frac{1}{4}$ sec. cor., marked on brass cap, <div style="text-align: center;"> $\frac{1}{4}$S15 S14 1915 </div> and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ high, W. of the cor. This cor. is 100 ft. above the wash.
44.00	Spur, 70 ft. above cor., brs. NE., descend NE. slope.
54.20	Wash, 200 ft. below spur, 500 lks. wide, course NW. Ascend SW. slope.
65.80	Spur, 240 ft. above wash, brs. NW., descend NE. slope.
77.00	Wash, 70 ft. below spur, 20 lks. wide, course NW. Ascend SW. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in ground and supported by mound of stone, for the cor. secs. 10, 11, 14, and 15, marked on brass cap, <div style="text-align: center;"> T10N R13W $\frac{1}{4}$S10 S11 $\frac{1}{4}$S15 S14 1915 </div> and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of the cor. Land, mountainous. Soil, rocky, 4th rate. Undergrowth, palo verde, greasewood. and cactus. No timber.

	N. $89^{\circ}47'E.$, on a random line bet. secs. 11 and 14.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.90	Intersect N. and S. line, 9 lks N. of the cor. of secs. 11, 13, 13, and 14. Thence, S. $89^{\circ}51'W.$, on a true line bet. secs. 11 and 14. Over mountainous land, thru medium undergrowth. Asc. E. slope.
1.70	Top of rim rock.
12.20	Spur, 250 ft. above cor., brs. NE., along N. slope.
19.00	Spur, 30 ft. below spur at 12.20 chs., brs. NE. Descend NW. slope.
26.20	Wash, 180 ft. below spur, 20 lks. wide, course NW. Along a broken N. slope.
35.90	Wash, 20 lks. wide, course NE., ascend E. slope.
39.95	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the $\frac{1}{4}$ sec. cor., marked on brass cap, <div style="text-align: center;"> $\frac{1}{4}$ S11 S14 1915 </div> and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor. This cor. is 70 ft. above the wash.
52.30	Ridge, 100 ft. above cor., brs. NW. and SE., descend W. slope.
60.00	Wash, 90 ft. below ridge, 20 lks. wide, course N. Ascend E. slope.
65.00	Ridge, 80 ft. above wash, brs. NW. and SE. Descend SW. slope.
79.90	The cor. of secs. 10, 11, 14, and 15. This cor. is 230 ft. below ridge. Land, mountainous. Soil, rocky, 4th rate. Undergrowth, palo verde, greasewood, and cactus. No timber.

BOOK 8000

Subdivision of Township 10 North, Range 13 West.

Chains

N.0°2'W., bet. secs. 10 and 11.
 Over mountainous land, through medium undergrowth.
 Ascend SW. slope.
 12.40 Ridge, 140 ft. above cor., brs. NW. and SE.
 Descend NE. slope.
 29.30 Wash, 120 ft. below ridge, 30 lks. wide, course NE.
 Ascend SE. slope.
 40.00 Set an iron post, 3 ft; long, 1 in. in diam., on solid
 rock and supported by mound stone, for the 1/4 sec. cor.,
 marked on brass cap,

1/4 S10 | S11
 1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
 W. of the cor.

This cor. is 80 ft. above wash.
 40.50 Spur, brs. NE., descend general N. slope.
 49.80 Spur, brs. NE., continue descent.
 61.00 Wash, 320 ft. below cor., 30 lks. wide, course NE.
 Ascend S. slope.
 65.00 Spur, 100 ft. above wash, brs. E., descent broken NE slope.
 73.30 Spur, 50 ft. below spur, NE., descend along NW. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., on solid
 rock and supported by mound of stone, for the cor.
 of secs. 2, 3, 10, and 11, marked on brass cap,

T10N R13W
 S3 | S2
 S10 | S11
 1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high.
 W. of the cor.

This cor. is 40 ft. below spur.
 Land, mountainous.
 Soil, rocky, 4th rate.
 Undergrowth, palo verde, greasewood, and cactus.
 No timber.

N.89°51'E., on a random line bet. secs. 2 and 11.
 Over mountainous land, through medium undergrowth.
 40.00 Set temp. 1/4 sec. cor.
 79.94 Intersect N. and S. line, 2 lks. S. of the cor. of secs.
 1, 2, 11, and 12.
 Thence,
 S.89°50'W., on a true line bet. secs. 2 and 11.
 Over mountainous land, through medium undergrowth.
 5.50 Right bank of wash.
 14.00 Center of wash, course NW.
 18.70 Left bank of wash.
 36.00 Wash, 20 lks. wide, course NW.
 39.97 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in
 ground and supported by mound of stone, for the 1/4
 sec. cor., marked on brass cap,

1/4 S.2
 S11
 1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
 N. of the cor.

42.20 Wash, 30 lks. wide, course NE., ascend NE. slope.
 60.80 Ridge, 90 ft. above wash, brs. N. and S., descend NW slope.
 69.20 Wash, 140 ft. below ridge, 30 lks. wide, course N.
 Ascend NE. slope.
 79.30 Spur, 100 ft. above wash, descend NW. slope.

Subdivision of Township 10 North, Range 13 West.

Chains

79.94 The cor. of secs. 2, 3, 10, and 11.
Land, mountainous.
Soil, rocky, 4th rate.
Undergrowth, palo verde, greasewood, and cactus.
No timber.

N.0°7'W., on a random line bet. secs. 2 and 3.
40.00 Set Temp. $\frac{1}{4}$ sec. cor.
80.36 Intersect N. bdy. of Tp., 2 lks. E. of the cor. of secs.
2, 3, 34, and 35, as described in Book "A".
Thence,
SO°8'E., on a true line bet. secs. 2 and 3.
Over rolling, mountainous land, thru medium undergrowth.
1.60 Road, bears NW. and SE.
22.30 Enter Bill Williams River bed, course SW.
27.30 Leave Bill Williams River bed, course SW.
Ascend NW. slope,
38.70 Spur, 110 ft. above river, brs. NE., along E. slope.
40.36 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
a mound of stone, for the $\frac{1}{4}$ sec. cor., marked on brass cap;

$\frac{1}{4}$ S3|S2
1915

and raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

59.00 Spur, 110 ft. above cor., brs. NW., descend S. slope.
71.80 Wash, 90 ft. below spur, 20 lks. wide, course NW.
Ascend NE. slope.
76.30 Spur, 150 ft. above wash, brs. NW., descend SW. slope.
80.36 The cor. of secs. 2, 3, 10, and 11.
Land, mountainous, and rolling.
Soil, rocky, 4th rate.
Undergrowth, palo verde, greasewood, scattering mesquite,
and cactus.
No timber.

From the cor. of secs. 3, 4, 33, and 34, on the South
bdy. of the Tp., as described in Book "A".
N.0°3'W., bet. secs. 33 and 34.
Over mountainous land, through medium undergrowth.
Along a general W. slope.
8.40 Head wash, course SW., ascend rocky S. slope.
27.20 Ridge, 390 ft. above wash, brs. E. and W., descend NE.
slope across head of canyon.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in
ground and supported by mound of stone, for the $\frac{1}{4}$
sec. cor., marked on brass cap,

$\frac{1}{4}$ S33|S34
1915

and raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of the cor.

This cor. is 160 ft. below ridge.
52.50 Wash, 300 ft. below cor., 20 lks. wide, course NW.
Ascend SW. slope.
59.10 Ridge, 120 ft. above wash, brs. NW. and SE., descend NE slope.
77.40 Wash, 270 ft. below ridge, 30 lks. wide, course N.
continue in same.
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in
ground and supported by mound of stone, for the cor.
of secs. 27, 28, 33, and 34, marked on brass cap,

T10N R13W.
S28|S27
S33|S34
1915

Subdivision of Township 10 North, Range 13 West.

Chains

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.
Land, mountainous.
Soil, rocky, 4th rate.
Undergrowth, palo verde, greasewood, and cactus.
No timber.

- 40.00 N. 89° 57' E., on a random line bet. secs. 27 and 34. Set temp. 1/4 sec. cor.
- 80.10 Intersect N. and S. line, 7 lks. S. of the cor. of secs. 26, 27, 34, and 35.

Thence,
S. 89° 54' W., on a true line bet. secs. 27 and 34.
Over mountainous land, through medium undergrowth.
Descend rocky, NW. slope.

- 9.20 Wash, 230 ft. below cor., 30 lks. wide, course N. Ascend E. slope.
- 19.60 Ridge, 220 ft. above wash, brs. NE. and SW. Descend NW. slope.
- 40.05 Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in ground and supported by mound stone, for the 1/4 sec. cor., marked on brass cap,

1/4 S27
S34
1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of the cor.

This cor. is 340 ft. below the Ridge.

- 43.10 Wash, 50 ft. below cor., 35 lks. wide, course NW.
- 47.20 Wash, 50 lks. wide, course NE., ascend NE. slope.
- 56.30 Spur, 140 ft. above wash, brs. NE., descend NW. slope.
- 62.70 Wash, 120 ft. below spur, 20 lks. wide, course NE. Ascend NE. slope.
- 70.40 Ridge, 170 ft. above wash, brs. N. and S. Descend W. slope.
- 80.10 Wash, 220 ft. below ridge, 20 lks. wide, course NE. The cor. of secs. 27, 28, 33, and 34.
Land, mountainous.
Soil, rocky, 4th rate.
Undergrowth, palo verde, greasewood, cactus, bunch, and wire grass.
No timber.

N. 0° 3' W., bet. secs. 27 and 28.

Over mountainous land, through medium undergrowth.

- 0.60 Wash, 30 lks. wide, course NE.
- 5.00 Enter wash, 30 lks. wide.
- 6.50 Leave wash, course NW., ascend and descend broken NW slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in ground and supported by mound of stone, for the 1/4 sec. cor., marked on brass cap,

1/4 S28 | S27
1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.

This cor. is 110 ft. below the sec. cor.

- 57.10 Descend NW. slope. Wash, 130 ft. below cor., 30 lks. wide, course NE. Ascend and descend along broken SE. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for the cor. of secs. 21, 22, 27, and 28, marked on brass cap,

Subdivision of Township 10 North, Range 13 West.

Chains

T10N R13W
 S 21 | S22
 S 28 | S27
 1915

and raise a mound of stone, 2 ft. base, 1½ ft. high,
 W. of the cor.
 This cor. is 60 ft. below the wash.
 Land, mountainous.
 Soil, rocky, 4th. rate.
 Undergrowth, palo verde, greasewood, cactus, and wire grass.
 No timber.

40.00 N. 89° 54' E., on a random line bet. secs. 22 and 27.
 Set temp. ¼ sec. cor.
 80.00 Intersect the cor. of secs. 22, 23, 26, and 27.
 Thence,
 S. 89° 54' W., on a true line bet. secs. 22 and 27.
 Over mountainous land, through medium undergrowth.
 Ascend SE. slope.
 10.00 Ridge, 280 ft. above cor., brs. NE. and SW., descend W. slope.
 34.00 Wash, 300 ft. below ridge, 200 lks. wide, course N.
 Ascend E. slope.
 39.75 Ridge, 30 ft. above wash, brs. NW. and SE.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 ground, for the ¼ sec. cor., marked on brass cap,

¼ S22
 S27
 1915

and raise a mound of stone, 2 ft. base, 1½ ft. high,
 N. of the cor.
 Descend NW. slope.
 58.40 Wash, 140 ft. below cor., 40 lks. wide, course NW.
 Ascend over broken SE. slope.
 76.50 Spur, 170 ft. above wash, brs. NE., descend W. slope.
 80.00 The cor. of secs. 21, 22, 27, and 28.
 Land, mountainous.
 Soil, rocky, 4th rate.
 Undergrowth, palo verde, greasewood, cactus, and bunchgrass.
 No timber.

9.00 N0° 3' W., bet. secs. 21 and 22.
 Over mountainous land, through medium undergrowth.
 14.00 Spur, bears NW.
 18.00 Wash, course NW.
 27.00 Ridge, brs. E. and W., descend across broken NE. slope.
 32.00 Spur, brs. NE., descend NE. slope.
 39.20 Head swale, 140 ft. below spur, brs. NE., ascend E. slope.
 40.00 Top of spur, NE. Desc. NE. slope.
 Set an iron post 3 ft. long, 1 in. in diam., 10 ins. in ground &
 supported by mound of stone, for ¼ sec. cor., marked on brass
 cap,

S21 | S22
 1917

and raise a mound of stone, 2 ft. base, 1½ ft. high,
 W. of the cor.
 Descend NE. slope.
 46.20 Wash, 100 ft. below cor., 30 lks. wide, course NW.
 Ascend SW. slope.
 68.00 Ridge, 210 ft. above wash, brs. NW. and SE.
 Descend NE. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 16 ins. in
 ground and supported by mound of stone, for the cor.

EBOOK 3240

Subdivision of Township 10 North, Range 13 West.

Chains

of sec.s. 15, 16, 21, and 22, marked on brass cap,

T10N R13W	
S16	S15
S21	S22
1917	

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of the cor.

This cor. is 190 ft. below ridge.

Land, mountainous.

Soil, rocky, 4th. rate.

Undregrowth, greasewood, palo verde, cactus, and grass.

No timber.

N. 89° 54' E., on a random line bet. secs. 15 and 22.

40.00 Set temp. ¼ sec. cor.

80.02 Intersect the N. and S. line, 9 lks. N. of the cor. of secs. 14, 15, 22, and 23.

Thence,

S. 89° 58' W., on a true line bet. secs. 15 and 22.

Over mountainous land, through medium undergrowth.

Ascend SE. slope.

1.40 Spur, brs NE., ascend and descend across N. slope.

12.30 Descend abrupt W. slope.

19.40 Wash, 190 ft. below top of descent, 30 lks. wide, (in canyon) course NE., ascend steep, rocky E. slope.

25.40 Spur, 240 ft. above awsh, brs, NE., along N. slope.

32.30 Ridge, bears N. and S., descend NW. slope.

38.00 Wash, 120 ft. below ridge, 20 lks. wide, course N.

40.01 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the ¼ sec. cor., marked on brass cap,

¼	S15
	S22
1917	

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of the cor.

Ascend NE. slope.

46.90 Spur, 40 ft. above cor., brs. NE., descend W. slope.

52.80 Wash, 140 ft. below spur, 30 lks. wide, course NE.

Ascend E. slope.

62.70 Spur, 130 ft. above wash, brs. NE., descend NW. slope.

68.70 Wash, 190 ft. below spur, 20 lks. wide, course NE.

Ascend NE. slope.

78.00 Spur, 150 ft. above wash, brs, NE.

80.02 The cor. of secs. 15, 16, 21, and 22.

Land, mountainous.

Soil, rocky 4th rate.

Undergrowth, palo verde, greasewood, and cactus.

No timber.

N. 0° 3' W., bet. secs. 15 and 16.

Over mountainous land, through medium undergrowth.

Descend NE. slope.

2.70 Wash, 70 ft. below cor., 20 lks. wide, course NE.

Ascend SE. slope.

9.00 Spur, 140 ft. above wash, brs. NE., descend broken NW slope.

30.40 Head wash, 230 ft. below spur, brs. NE., ascend SW. slope.

39.40 Ridge, 100 ft. above wash, brs. NE. and SW.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the ¼ sec. cor., marked on brass cap,

S	16	S	15
1917			

and raise a mound of stone, 2 ft. base, 1½ ft. high,

Subdivision of Township 10 North, Range 13 West.

Chains

W. of the cor.
 Descend NW. slope.
 51.50 Head swale, 160 ft. below cor., course W; ascend SW. slope.
 56.20 Ridge (rocky), 90 ft. above swale, brs. NW. and SE.
 Descend NE. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 8 ins. in ground and supported by mound of stone, for the cor. of secs. 9, 10, 15, and 16, marked on brass cap,

T10N R13W	
S 9	S10
S16	S15
1917	

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of the cor.

This cor. is 230 ft. below the ridge.

Land. mountainous.

Soil, rocky, 4th rate.

Undergrowth, palo verde, greasewood, cactus, and bunch grass.

No timber.

N. 89° 58' E., on a random line bet. secs. 10 and 15.
 40.00 Set temp. ¼ sec. cor.
 80.00 Intersect N. and S. line, 2 lks. N. of the cor of secs. 10, 11, 14, and 15.

Thence,

S. 89° 59' W., on a true line bet. secs. 10 and 15.
 Over mountainous land, through medium undergrowth.

Descend SW. slope.

5.50 Small wash, 80 ft. below cor., course NW.

Ascend NE. slope.

9.70 Spur, 30 ft. above wash, brs. NW., descend W; slope.

15.50 Edge rimrock, bears NW. and SE., descend W. slope over large boulders and sliderock.

25.00 Enter wash, 190ft. below spur, course NW.

30.40 Leave wash, .

33.00 Wash, 20 lks. wide, course NE., ascend E. slope.

40.00 Set an iron post, 3ft. long, 1 in. in diam., 10 ins. in ground and supported by mound of stone, for the ¼ sec. cor., marked on brass cap,

¼ S 10
¼ S 15
1917

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of the cor.

This cor. is 110 ft. above the main wash.

49.20 Ridge, 90 ft. above the cor. brs. NE. and SW.

Descend W. slope.

56.20 Wash, 40 ft. below ridge, 20 lks. wide course N.
 Ascend and descend along broken N. slope.

73.00 Spur, NW., descend abrupt, rocky SW. slope.

78.80 Wash, 160 ft. below spur, 40 lks. wide, course N.

80.00 The cor. of secs. 9, 10, 15, and 16.

Land, mountainous.

Soil, rocky, 4th rate.

Undergrowth, palo verde, greasewood, and cactus.

No timber.

N. 0° 3' W., bet. secs. 9 and 10.

Over mountainous land, through medium undergrowth.

Descend NE. slope.

58.0 Bend of wash, 60 ft. below cor., course NE.

BOOK 2240

Subdivision of Township 10 North, Range 13 West.

Chains.

- Ascend SE. slope.
- 16.70 Spur, 170 ft. above wash, brs. NE.
- Along broken NE. slope, cut by small washes.
- 37.70 Spur, brs. NE., descend N. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in ground and supported by mound of stone, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
 S 9 | S 10
 1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of the cor., descend N. slope.

- 46.10 Foot of descent, 70 ft. below cor., ascend S. slope.
- 49.00 Rocky knoll, 50 ft. high, descend N. slope.
- 62.20 Wash, 290 ft. below knoll, 300 lks. wide, course NW.
- 68.20 Rocky ridge, 180 ft. above wash, brs. NW. and SE.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., on solid rock and supported by mound of stone, for the cor. of secs. 3, 4, 9, and 10, marked on brass cap,

T10N R13W
 S 4 | S 3
 S 9 | S 10
 1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of the cor.

Note:- This cor. stands on the left bank of Bill Williams River, 290 ft. below ridge, and is above high water mark.

Land, mountainous.
 Soil, rocky, 4th rate.
 Undergrowth, palo verde, grease-wood, and cactus.
 No timber.

- N. $89^{\circ}59'E.$, on a random line bet. secs. 3 and 10.
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 79.90 Intersect N. and S. line, 4 lks. N. of the cor. of secs. 2, 3, 10, and 11.
- Thence,
- N. $89^{\circ}59'W.$, on a true line bet. secs. 3 and 10.
- Over mountainous land, through meedium undergrowth.
- 1.70 Wash, 20 lks, wide, course N., along N. slope.
- 10.00 Small wash, course NE., ascend E. slope.
- 16.50 Ridge, 100 ft. above wash, brs. NE. and SW.
- Descend NW. slope.
- 23.00 Wash, 160 ft. below ridge, 30 lks. wide, course NE.
- Ascend E. slope.
- 28.60 Spur, 100 ft. above wash, brs. NE., descend NW. slope.
- 39.95 Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in ground and supported by mound of stone, for the $\frac{1}{4}$ sec, cor., marked on brass cap,

$\frac{1}{4}$ S 3
 S 10
 1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of the cor.

This cor. is 100 ft. below the spur.
 Ascend NE. slope.

- 43.80 Spur, 70 ft. above cor., brs. N.
- Descend a rocky NW. slope.

Subdivision of Township 10 North, Range 13 West.

Chains.
 57.10 Enter bed of Bill Williams River, 400 ft. below spur, course SW.
 59.80 Leave bed of Bill Williams River.
 71.80 Enter bed of Bill Williams River, course NW.
 75.40 Leave bed of Bill Williams River.
 79.90 The cor. of secs. 3, 4, 9, and 10.
 Land, mountainous.
 Soil, rocky, 4th rate.
 Undergrowth, palo verde, grease-wood, cat-claw, and cactus.
 No timber.

N.0°8'W., on a random line bet. secs. 3 and 4.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.23 Intersect the N. bdy. of the Tp., 9 lks, E. of the cor. of secs. 3, 4, 33, and 34., described in Book "A".
 Thence,
 S.0°12'E., on a true line bet. secs. 3 and 4.
 3.30 Wash, 50 lks. wide, course E., ascend broken NE. slope.
 40.23 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in ground and supported by mound of stone, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
 S 4 | S 3
 1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of the cor.
 This cor. is 180 ft. above the wash.
 48.80 Ridge, 160 ft. above cor., brs. SE. and NW.
 Descend slightly across broken SE. slope cut by small wash.
 60.50 Rocky spur, 90 ft. below ridge, brs. SE.
 Descend abrupt, rocky SE. slope.
 73.80 Enter bed of Bill Williams River, 530 ft. below spur, course W.
 77.60 Leave bed of Bill Williams River, ascend NE. slope.
 80.23 The cor. of secs. 3, 4, 9, and 10.
 This cor. is 40 ft. above the bed of the river.
 Land, mountainous.
 Soil, rocky, 4th rate.
 Undergrowth, palo verde, grease-wood, and cactus.
 No timber.

From the cor. of secs. 4, 5, 32, and 33, on the South bdy. of Tp., as described in Book "A".
 N.0°3'W., bet. secs. 32 and 33.
 Over mountainous land, through medium undergrowth.
 Descend across broken NW. slope cut by small washes.
 13.20 Wash, 60 ft. below cor., 20 lks. wide, course NW. along W. slope
 29.10 Wash, 15 lks. wide, course SW., ascend SW. slope.
 37.80 Ridge, 270 ft. above wash, brs. NW. and SE.
 Descend along W. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in ground and supported by mound of stone, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S32 | S33
 1915

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of the cor.
 This cor. is 40 ft. below the ridge.
 Ascend rocky SW. slope.
 46.10 Ridge, 100 ft. above cor., brs. E. and W., descend N slope.

Subdivision of Township 10 North, Range 13 West.

Chains.

- 48.00 Follow along on top of spur bearing N.
- 63.20 Descend abruptly, north end of spur.
- 65.40 Wash, 450 ft. below ridge, 30 lks. wide, course SW.
Ascend steep, rocky S. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 14 ins. in ground, resting on solid rock, and supported by mound of stone, for the cor. of secs. 28, 29, 32, and 33, marked on brass cap,

T10N R13W
 S29|S28
 S32|S33
 1915

and raise a mound of stone, 2 ft. base, 1½ ft. high,
 W. of the cor.

This cor. is 340 ft. above the wash.

Land, mountainous.

Soil, rocky, 4th rate.

Undergrowth, palo verde, grease-wood, cactus, and scattering bunch grass.

No timber.

- N.89°57'E., on a random line bet. secs. 28 and 33.
- 40.00 Set temp. ¼ sec. cor.
- 80.14 Intersect the N. and S. line, 7 lks. S. of the cor. of secs. 27, 28, 33, and 34.

Thence,

S.89°54'W., on a true line bet, secs. 28 and 33,
Over mountainous land, through medium undergrowth.

- 6.80 Ascend NE. slope.
- 6.80 Ridge, 150 ft. above cor., brs. NW. and SE.
Descend W. slope.
- 15.70 Wash, 200 ft. below ridge, 25 lks. wide, course N.
Ascend NE. slope.
- 22.90 Spur, 90 ft. above wash, brs. NE., descend NW. slope.
- 39.50 Wash, 40 ft. below spur, 20 lks. wide, course NE.
- 40.07 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in ground and supported by mound of stone, for the ¼ sec. cor., marked on brass cap,

¼ S. 28
 S 33
 1915

and raise a mound of stone, 2 ft. base, 1½ ft. high,
 N. of the cor.

- Ascend SE. slope.
- 51.40 Recross head of wash, 20 lks. wide, course SE.
Ascend E. slope.
- 54.00 Ridge, 150 ft. above cor., brs. NW. and SE., descend SW. slope.
- 69.00 Wash, 370 ft. below ridge, 15 lks. wide, course SW.
Descend and ascend across S. slope.
- 80.14 The cor. of secs. 28, 29, 32, and 33.
Land, mountainous.
Soil, rocky, 4th rate.
Undergrowth, palo verde, cactus, and scattering bunch grass.
No timber.

- N.0°3'W., bet. secs. 28 and 29.
Over mountainous land, through medium undergrowth.
Ascend steep rocky S. slope.
- 10.00 Main ridge, 400 ft. above cor., brs. E. and W.
Descend N. slope.
- 33.10 Wash, 440 ft. below ridge, 25 lks. wide, course SW.

Subdivision of Township 10 North, Range 13 West.

Chains

39.80 Ascend steep, rocky S. slope,
 Ridge, 130 ft. above wash, brs. NW. and SE.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in
 ground and supported by mound of stone, for the $\frac{1}{4}$
 sec. cor., marked on brass cap,
 $\frac{1}{4}$ S 29 | S 28
 1915

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of the cor.

Descend NW. slope.

69.70 Wash, 450 ft. below cor., 20 lks. wide, course NE.
 72.50 Recross wash, 20 lks. wide, course NW., along W. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
 ground, for the cor. of secs, 20, 21, 28, and 29,
 marked on brass cap,

T10N R13W
 S20 | S21
 S29 | S28
 1915

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of the cor.

Land, mountainous.

Soil, rocky, 4th. rate.

Undergrowth, palo verde, grease-wood, and cactus.

No timber.

40.00 N. $89^{\circ}54'E.$, on a random line bet. secs. 21 and 28.
 Set temp. $\frac{1}{4}$ sec. cor.

80.14 Intersect the cor. of secs. 21, 22, 27, and 28.

Thence;

S. $89^{\circ}54'W.$, on a true line bet. secs. 21 and 28.

Over mountainous land, through medium undergrowth.

Along N. slope.

1.20 Spur, bears NW., descend W. slope, along N. slope.

15.00 Small wash, 60 ft. below spur, course NE., ascend NE. slope.

22.40 Ridge, 150 ft. above wash, brs. NW. and SE.

Descend SW. slope.

36.40 Wash, 120 ft. below ridge, 20 lks. wide, course NW.

Ascend NE. slope.

40.07 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 ground, for the $\frac{1}{4}$ sec. cor, marked on brass cap,

$\frac{1}{4}$ S 21
 S 28
 1915

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 N. of the cor.

This cor. is 30 ft. above wash; ascend NE. slope.

46.60 Spur, 110 ft. above cor., brs. N., descend NW. slope.

57.90 Wash, 150 ft. below spur, 20 lks. wide, course N.

Continue along N. slope.

74.80 Spur, bears NE., descend W. slope.

80.14 The cor. of secs. 20, 21, 28, and 29; 50 ft. below spur.

Land, mountainous.

Soil, rocky, 4th rate.

Undergrowth, palo verde, grease-wood, and cactus.

No timber.

N. $0^{\circ}3'W.$, bet. secs. 20 and 21.

Over mountainous land, through medium undergrowth.

Descend NW. slope.

Doc 3240

Subdivision of Township 10 North, Range 13 West.

Chains.

- 4.00 Wash, 70 ft. below cor. 20 lks, wide, course NE. Ascend broken SE. slope.
- 27.00 Ridge, 70 ft. above wash, brs. N. and S., descend along same.
- 34.00 Spur, brs. E. 500 lks., descend NE. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in ground and supported by mound of stone, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 20 | S 21
1915

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of the cor.

- This cor. is 170 ft. below ridge., descend NE. slope.
- 49.70 Water hole bears SE. 3.00 chains.
- 57.00 Wash, 200 ft. below cor., 30 lks. wide, course NW. Ascend S. slope.
- 65.10 Spur, 160 ft. above wash, brs. NW., ascend and descend across NW. slope.
- 77.50 Spur, 80 ft. below spur at 65.10 chs., brs. N. Descend 60 ft. on N. slope to cor.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., on solid rock and supported by mound of stone, for the cor. of secs. 16, 17, 20, and 21, marked on brass cap,

T10N R13W
S17 | S16
S20 | S21
1915

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of the cor.

Land, mountainous.
Soil, rocky, 4th rate.
Undergrowth, palo verde, grease-wood, and cactus.
No timber.

- N. $89^{\circ}54'E.$, on a random line bet. secs. 16 and 21.
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 80.18 Intersect the N. and S. line, 2 lks. N. of the cor. of secs. 15, 16, 21, and 22.
- Thence,
S. $89^{\circ}55'W.$, On a true line bet. secs. 16 and 21.
Over mountainous land, through medium undergrowth:
Ascend E. slope.
- 12.70 Ridge, 130 ft. above cor., brs. NW. and S., descend NW slope.
- 25.00 Ridge, 80 ft. below ridge at 12.70 chs., NW. and SE. Descend and ascend across SW. slope.
- 40.09 Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in ground and supported by mound of stone, for, the $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 16
S21
1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of the cor.

- 41.40 Ridge, bears NW, and SE., descend broken SW. slope.
- 51.90 Wash, 280 ft. below ridge, 30 lks. wide, course N. Ascend NE. slope.
- 62.00 Spur, 300 ft. above wash, brs. NW., descend NW. slope.
- 72.90 Wash, 270 ft. below spur, 30 lks. wide, course N. Ascend NE. slope 30 ft. to cor.
- 80.18 The cor. of secs. 16, 17, 20, and 21.
Land, mountainous.
Soil, rocky, 4th rate.

Subdivision of Township 10 North, Range 13 West.

Chains.

Undregrowth, palo verde, greasewood, and cactus.
No timber.

N.0°3'W., bet. secs. 16 and 17.
Over mountainous land, through medium undergrowth.
Descend N. slope.

- 7.70 Wash, 180 ft. below cor., 30 lks.wide, course NE.
Ascend along SE. slope.
- 27.90 Spur, 150 ft. above wash, brs. NE., descend rocky NW slope.
- 38.90 Edge of small cliff, brs, E. and W.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., on solid rock and supported by mound of stone, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

S 17 $\frac{1}{4}$ S 16
1917

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
W. of the cor.

- 42.50 Wash 60 ft. below cor., (in canyon) course SW.
Ascend SE slope over cliffs.
- 44.80 Spur, 90 ft. above wash, brs, SW., descend over cliffs on NW. slope.
- 55.00 Bottom of descent, 150 ft. below spur; ascend steep and rocky, SW. slope.
- 66.10 Cliffs.
- 72.30 Spur, 220 ft. point at 55.00 chs., brs. NW., descend NW.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for the cor. of secs. 8, 9, 16, and 17, marked on brass cap,

T10N R 13W
S 8 | S 9
S 17 | S 16
1917

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
W. of the cor.

This cor. is 190 ft. below spur.
Land, mountainous.
Soil, rocky, 4th. rate.
Undergrowth, cactus, cat-claw, palo verde, and grease-wood.
No timber.

N.89°55'E., on a random line bet. secs. 9 and 16.

- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 80.14 Intersect the N. and S. line, 7 lks. S. of the cor. of secs. 9, 10, 15, and 16,

Thence,
S89°52'W., on a true line bet. secs. 9 and 16.
Over mountainous land, through medium undergrowth.
Ascend NE. slope.

- 6.00 Spur, 130 ft. above cor., brs. NE., descend rocky NW slope.
- 10.65 Wash, 110ft. below spur, 30 lks. wide, course NE.
Ascend SE. slope.
- 24.50 Ridge, 240 above wash, brs. NE. and SW., ascend NE slope.
- 34.50 Spur; 90 ft. above ridge; brs. NW., descend SW. slope.
- 40.07 Set an iron post, 3 ft. long, 1 in. in diam., 9 ins. in ground and supported by mound of stone, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 9
S 16
1917

Subdivision of Township 10 North, Range 13 West.

Chains.

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of the cor.

49.70 Wash, 170 ft. below cor., 20 lks. wide, course NW. Ascend E. slope.

59.50 Main ridge, 300 ft. above wash, brs. N. and S.

68.30 Spur, bears NW., descend NW. slope.

74.00 Spur, bears N., descend abrupt, rocky NW. slope.

80.14 The cor. of secs. 8, 9, 16, and 17. This cor. is 470 ft. below spur at 68.30 chs. Land, mountainous. Soil, rocky, 4th rate. Undergrowth, palo verde, grease-wood, and cactus. No timber.

N.0°3'W., bet. secs. 8 and 9. Over mountainous land, through medium undergrowth. Ascend steep, rocky SW. slope.

14.30 Spur, 260 ft. above cor., brs. NW., descend NE. slope.

27.50 Wash, 280 ft. below spur, 20 lks. wide, course NW.

30.10 Wash, 20 lks. wide, course W., ascend rocky S. slope.

39.90 Ridge, 210 ft. above wash, brs. NW. and SE.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., on solid rock and supported by mound of stone, for the ¼ sec. cor., marked on brass cap.

$\frac{1}{4}$
 S 8 | S 9
 1917

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of the cor.

Ascend broken SW. slope.

50.30 Point 90 ft. above cor., descend N. slope to River.

68.00 Center Bill Williams River, (approx. dist.) in box canyon, course W., ascend S. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., on solid rock and supported by mound of stone, for the cor. of secs. 4, 5, 8, and 9, marked on brass cap.

T10N R13W
 S 5 | S4
 S 8 | S9
 1917

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of the cor.

This cor. is 270 ft. above the point at 50.30 chs. Land, mountainous. Soil, rocky, 4th rate. Undergrowth, cactus, catclaw, palo verde, and greasewood. No timber.

N. 89°52'E., on a random line bet. secs. 4 and 9.

40.00 Set temp. ¼ sec. cor.

80.12 Intersect N. and S. line, 7 lks. N. of the cor. of secs. 3, 4, 9, and 10.

Thence, S. 89°55'W., on a true line bet. secs 4 and 9. Over mountainous land, through medium undergrowth. Descend NW. slope, 50 ft. to River.

16.00 Enter bed of Bill Williams River, course SW.

20.80 Leave bed of Bill Williams River, ascend E. slope.

40.06 Set an iron post, 3 ft. long, 1 in. in diam., on solid rock and supported by mound of stone, for the ¼

Subdivision of Township 10 North, Range 13 West.

Chains

sec cor., marked on brass cap,

$$\frac{1}{4} \frac{S}{S} 4$$

$$\frac{S}{S} 9$$

$$1917$$
and raise a mound of stone, 2 ft. base, 1½ ft. high,
N. of the cor.

- This cor. is 280 ft. above the river; ascend E. slope.
 47.00 Spur, 100 ft. above cor., brs. SE., descend SW. slope.
 58.50 Wash, 130 ft. below spur, 10 lks. wide, course SE.
 Ascend SE. slope.
 63.00 Rimrock, bears NW. and SE.
 80.12 The cor. of secs. 4, 5, 8, and 9; 240 ft. above wash.
 Land mountainous.
 Soil, rocky, 4th rate.
 Undergrowth, palo verde, greasewood and cactus.
 No timber.

- N.0°12'W., on a random line bet. secs. 4 and 5.
 40.00 Set temp. $\frac{1}{4}$ secs. cor.
 80.27 Intersect the N. bdy. of Tp. 2 lks. W. of the cor. of
 secs. 4, 5, 32, and 33, as described in Book "A".
 Thence,
 S.0°11'E., on a true line bet. secs. 4 and 5.
 Over mountainous land, through medium undergrowth.
 Descend SE. slope.
 3.60 Wash, 70 ft. below cor., 20 lks. wide, course E.
 Ascend NE. slope.
 7.60 Ridge, 120 ft. above wash, brs. SE. and NW., descend S. slope.
 28.60 Wash, 260 ft. below ridge, 15 lks. wide, course SE.
 Ascend and descend across rolling, mountainous land..
 37.00 Wash, 15 lks. wide, course SE.
 38.80 Low spur, bears E.
 40.27 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 ground, for the $\frac{1}{4}$ sec. cor. marked on brass cap,

$$S \frac{1}{4} S 4$$

$$1917$$
and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of the cor.

- 44.00 Wash, 15 lks. wide, course NE., ascend N. slope.
 49.00 Low ridge, 110 ft. above wash, brs. E. and W.
 Descend SE. slope.
 58.50 Wash, 100 ft. below ridge, 15 lks. wide, course NE.
 Ascend NE. slope.
 67.00 Spur, 110 ft. above wash, brs. SE., descend S. slope.
 73.30 Wash, 10 lks. wide, course SE.
 80.27 The cor. of secs. 4, 5, 8, and 9.
 This cor. is 110 ft. below spur at 67.00 chs.
 Land, mountainous.
 Soil, Soil, rocky 4th rate.
 Undergrowth, palo verde, greasewood, and cactus.
 No timber.

- From the cor. of secs. 5, 6, 31, and 32, on the South
 bdy. of Tp. as described in Book "A".
 N.0°4'W., bet. secs. 31 and 32.
 Over rolling mountainous land, through medium undergrowth.
 Descend broken NE. slope.
 7.60 Wash, 150 ft. below cor., 100 lks. wide, course NW.
 Ascend SW. slope.
 13.20 Ridge, 130 ft. above wash, brs. NE. and SE.
 Descend NW. slope.

Subdivision of Township 10 North, Range 13 West.

Chains.

22.40 Recross ridge, bears NW. and SE., descend and ascend across rolling land cut by washes.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in ground and supported by mound of stone, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
 S31 | S32
 1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of the cor.

This cor. is 120 ft. below the ridge.

59.80 Wash, 90 ft. below cor., 25 lks. wide, course NW.
 67.35 Enter bed of wash, course W.
 78.85 Leave bed of wash.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in ground and supported by mound of stone, for the cor. of secs. 29, 30, 31, and 32, marked on brass cap,

T10N R13W
 S30 | S29
 S31 | S32
 1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of the cor.

Land, rolling mountainous.

Soil, rocky, 4th rate.

Undergrowth, palo verde, greasewood, cactus, and scattering bunch grass.

No timber.

40.00 N. 89° 57' E., on a random line bet. secs. 29 and 32. Set temp. $\frac{1}{4}$ sec. cor.
 80.00 Intersect N. and S. line, 5 lks. S. of the cor. of secs. 28, 29, 32, and 33.

Thence,

S. 89° 55' W., on a true line bet. secs. 29 and 32.

Descend SW. slope; over rolling land, thru medium undergrowth.

16.00 Spur, 140 ft. below cor., brs. SW., continue descent.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in ground and supported by mound of stone, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 29
 S 32
 1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of the cor.

This cor. is 210 ft. below spur., descend broken SW. slope.

57.80 Wash, 70 ft. below cor., 20 lks. wide, course NW.

Descend along general NW. slope.

80.00 The cor. of secs. 29, 30, 31, and 32; 100 ft. below wash.

Land, rolling.

Soil, rocky, 4th rate.

Undergrowth, palo verde, greasewood, and cactus.

No timber.

40.00 S. 89° 57' W., on a random line bet. secs. 30 and 31. Set temp. $\frac{1}{4}$ sec. cor.

81.66 Intersect West bdy. of Tp., 7 lks. N. of the cor. of secs. 25, 30, 31, and 36, which is a 3 in. iron post, firmly set, mkd. and wit., as described by the Sur. Gen.

Thence, N. 89° 54' E., on a true line, bet. secs. 30 and 31.

Subdivision of Township 10 North, Range 13 West.

Chains.

38.00 Over rolling mountainous land, through medium undergrowth.
 Enter shallow bed of wash, 90 ft. above cor., course NW.
 41.66 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in
 ground and supported by mound of stone, for the $\frac{1}{4}$
 sec. cor., marked on brass cap,

$\frac{1}{4}$ S 30
 S 31
 1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 N. of the cor.

49.90 Leave shallow wash, and continue over rolling land.

81.66 The cor. of secs. 29, 30, 31, and 32.

This cor. is 60 ft. above wash.

Land, rolling mountainous.

Soil, rocky, 4th rate.

Undergrowth, palo verde, greasewood, and cactus.

No timber.

N.0°4'W., bet. secs. 29 and 30.

Over rolling and mountainous land, thru medium undergrowth.

1.30 Spur, bears W.

4.50 Wash, 70 ft. below spur, 30 lks. wide, course W.

23.30 Wash, 20 lks. wide, course NW.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 ground, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
 S 30 | S 29
 1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of the cor.

41.60 Wash, 30 lks. wide, course W., ascend and descend over
 general NW. slope.

57.70 Spur, 150 ft. above wash, b'rs. W., descend NW. slope.

61.00 Wash, 110 ft. below spur, 30 lks. wide, course SW.

Ascend broken S. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., on solid
 rock and supported by mound of stone, for the cor.
 of secs, 19, 20, 29, and 30, marked on brass cap,

T10N R13W
 S19 | S20
 S30 | S29
 1917

marked, marked "X B10 S 19" on face of cliff.

Run N. 24°15' W., 36 lks., dist., and raise
 a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

This cor. is 500 ft. above wash.

Land, rolling and mountainous.

Soil, rocky, 4th rate.

Undergrowth, palo verde, greasewood, and cactus.

No timber.

N.89°55'E., on a random line bet. secs. 20 and 29.

40.00 Bet temp. $\frac{1}{4}$ sec. cor.

79.98 Intersect the N. and S. line, 2 lks. S. of the cor. of
 20, 21, 28, and 29.

Thence,

S.89°54'W., on a true line bet. secs. 20 and 29.

Over mountainous land, through medium undergrowth.

Descend W. slope.

Subdivision of Township 10 North, Range 13 West.

Chains.

- 3.20 Wash, 70 ft. below cor., 20 lks. wide, course NE.
Ascend E. slope.
- 14.00 Ridge, 140 ft. above wash, brs. NE. and S., descend SW.
- 21.50 Wash, 140 ft. below ridge, 15 lks. wide, course NW.
Ascend NE. slope.
- 26.00 Spur, 60 ft. above wash, brs. NW., descend SW. slope.
- 39.99 Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in
ground and supported by mound of stone, for the $\frac{1}{4}$
sec. cor., marked on brass cap,

$\frac{1}{4}$ S 20
 $\frac{1}{4}$ S 29
 1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
N. of the cor. This cor. is 100 ft. below spur.

- 41.30 Wash, 50 ft. above cor., 30 lks. wide, course NW.
- 52.30 Wash, 30 lks. wide, course NW., ascend NE. slope.
- 76.00 Ridge, 400 ft. above wash, brs. NE. and S.
- 79.98 The cor. of secs. 19, 20, 29; and 30.
Land, mountainous.
Soil, rocky, 4th rate.
Undergrowth, palo verde, greasewood, and cactus.
No timber.

-
- S. 89° 54' W., on a random line bet. secs. 19 and 30.
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 - 81.59 Intersect the West bdy. of Tp., 7 lks., S. of the cor. of
secs. 19, 24, 25 and 36, which is a 3 in. iron post, properly
thence, (set, mkd. and wit. as described by the surv. gen.
N. 89° 57' E., on a true line bet. secs. 19 and 30.
Over rolling, mountainous land, thru medium undergrowth.
 - 2.40 Wash, 15 lks. wide, course NW.
Ascend broken NW. slope cut by washes.
 - 41.59 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in
ground and supported by mound of stone, for the $\frac{1}{4}$
sec. cor., marked on brass cap;

$\frac{1}{4}$ S 19
 $\frac{1}{4}$ S 30
 1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
N. of the cor.

- This cor. is 340 ft. above the wash. Descend NE. slope.
- 46.10 Wash, 40 ft. below cor., 10 lks. wide, course N.
Ascend SW. slope.
- 54.00 Rocky spur, 240 ft. above wash, brs. NW., descend NE. slope.
- 58.60 Wash, 50 ft. below spur, 10 lks. wide, course NW.
Ascend NW. slope.
- 67.40 Spur, 270 ft. above wash, brs. NW., descend NE. slope.
- 70.60 Head wash, 40 ft. below spur, course N., ascend W. slope.
- 80.10 Spur, 230 ft. above wash, brs. SW.
- 81.59 The cor. of secs. 19, 20, 29, and 30.
Land, rolling and mountainous.
Soil, rocky 4th rate.
Undergrowth, palo verde, greasewood, and cactus.
No timber.

-
- N. 0° 4' W., bet. secs. 19 and 20.
Over mountainous land, through medium undergrowth.
Ascend rocky, S. slope.
- 1.00 Rocky point, 40 ft. above cor., descend broken NW. slope
over cliffs into canyon.
 - 9.80 Head gulch, 410 ft. below point, course NW.
Continue down gradual NW. slope.

240

BOOK 3240

Subdivision of Township 10 North, Range 13 West.

Chains.

- 39.30 Wash, 340 ft. below gulch, 40 lks. wide, course SW. Road, in wash, bears NE. and SW.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., on solid rock and supported by mound of stone, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
 S 19 | S 20
 1917

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of the cor.

- Ascend SE. slope.
- 47.50 Spur, 220 ft. above cor., brs SE., ascend and descend along broken E. slope.
- 59.80 Wash, 65 ft. below spur, 20 lks. wide, course SE. Ascend SW. slope.
- 68.10 Ridge, 200 ft. above wash, brs. NE. and SW. Descend N. slope; 50 ft. to sec. cor.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in ground and supported by mound of stone. for the cor. of secs. 17, 18, 19, and 20, marked on brass cap,

T10N R13W
 S18 | S17
 S19 | S20
 1917

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of the cor.

Land, mountainous.
 Soil, rocky, 4th rate.
 Undergrowth, palo verde, greasewood, and cactus.
 No timber.

- 40.00 N. 89° 54' E., on a random line bet. secs. 17 and 20. Set temp. $\frac{1}{4}$ sec. cor.
- 80.00 Intersect the cor. of secs. 16, 17, 20, and 21. Thence, S. 89° 54' W., on a true line bet. secs. 17 and 20. Over mountainous land, through medium undergrowth. Descend abrupt, rocky NW. slope.
- 12.80 Wash, 130 ft. below cor., 30 lks. wide, course NE. Ascend NE. slope.
- 24.07 U. S. L. M., No. 2344 (Santa Maria Min. Dist.) brs. N. 41° 40' W.
- 24.40 Ridge, 310 ft. above wash, brs. NW. and SE., descend W slope.
- 26.30 Road, bears NE. and SW.
- 38.90 Wash, 80 ft. below ridge, 10 lks. wide, course NW. Ascend 25 ft. to $\frac{1}{4}$ sec. cor.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 17
 S 20
 1917

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of the cor.

- Ascend broken NE. slope.
- 46.23 U. S. L. M., No. 2344 (Santa Maria Min. Dist.) brs. N. 3° 4' W.
- 63.50 Ridge, 130 ft. above cor., brs. NW. and SE. Descend SW. slope.
- 74.40 Road, bears N. and S.
- 80.00 The cor. of secs. 17, 18, 19, and 20. This cor. is 75 ft. below the ridge. Land, mountainous. Soil, rocky, 4th rate. Undergrowth, palo verde, greasewood, and cactus. No timber

Subdivision of Township 10 North, Range 13 West.

- Chains.
- S. 89° 57' W., on a random line bet. secs. 18 and 19.
 - 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 - 81.62 Intersect the West bdy. of Tp., 2 lks. N. of the cor. of secs. 13, 18, 19, and 24, which is a 3 in. iron post, properly thence, (set, mkd. and wit. as described by the Sur. Gen. N. 89° 56' E., on a true line bet. secs. 18 and 19. Over mountainous land, through medium undergrowth. Ascend cliffy and rocky NW. slope.
 - 7.10 Rocky point, 190 ft. above cor., brs. SW., descend SE. slope.
 - 13.00 Wash, 60 ft. below point, 10 lks. wide, course SW. Ascend NW. slope.
 - 24.20 Spur, 190 ft. above wash, brs. SW., continue ascending along rocky and broken SW. slope.
 - 33.20 Main ridge, 200 ft. above spur, brs. NW. and SE. Descend NE. slope 40 ft. to cor.
 - 41.62 Set an iron post, 3 ft. long, 1 in. in diam., on solid rock and supported by mound of stone, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 18
 $\frac{1}{4}$ S 19
 1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of the cor.

- 41.90 Spur, bears NW., descend NE. slope.
- 55.30 Wash, 160 ft. below spur, 15 lks. wide, course NW. Ascend NW. slope.
- 62.30 Spur, 200 ft. above wash, brs. NW. Ascend and descend along N. slope.
- 72.10 Spur, 30 ft. below spur, brs. NE., descend NE. slope.
- 79.10 Wash, 90 ft. below spur, 10 lks. wide, course NW.
- 81.62 The cor. of secs. 17, 18, 19, and 20. Land, mountainous. Soil, rocky, 4th rate. Undergrowth, palo verde, greasewood, and cactus. No timber.

-
- N. 0° 4' W., bet. secs. 17 and 18. Over mountainous land, through medium undergrowth. Descend across NW. slope.
 - 7.40 Wash, 110 ft. below cor., 15 lks. wide, course NW. Ascend SW. slope.
 - 15.40 Road, bears NW. and SE., 150 ft. above wash.
 - 17.40 Ridge, 170 ft. above wash, brs. NW. and SE. Descend and ascend across E. slope. Tent house, bears West, 40 lks. dist.
 - 19.60 Road, bears E. and W.
 - 20.45 Intersect south side of Summit (patented) Mining Claim, (Min. Sur., No 2344) at 8.79 chs., N. 55° 20' W. from Cor. No. 3 thereof, thence across patented mineral land.
 - 24.80 Road brs. E. and W.
 - 26.58 U.S.L.M. No 2344 brs. N. 89° 50' E.
 - 26.60 Ridge, bears NE. and SW., descend general N. slope.
 - 33.10 Mouth of tunnel, brs. E., 130 lks. dist. (Montana Group)
 - 38.70 Road, bears NW. and SE.
 - 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in ground and supported by mound of stone, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
 S 18 | S 17
 1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of the cor.

- This cor. is 120 ft. below the ridge; ascend SW. slope.
- 41.80 Spur, bears NW., descend SW. slope.

Subdivision of Township 10 North, Range 13 West.

Chains.

- 47.12 SE. corner of machine house. on line.
- 50.70 Wash, 230 ft. below spur, 40 lks. wide, course NW.
Ascend S. slope.
- 58.20 Spur, 110 ft. above wash, brs. W., descend N. slope.
- 65.00 Intersect north side of Manhattan (patented) Mining Claim,
(Min.Sur., No. 2345) at 5.93 chs. S.55°20'E. from
Cor. No 3 thereof.
- Leave patented mineral land.
- 74.30 Wash, 240 ft. below spur, 20 lks. wide, course NE.
Ascend SE. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., on solid
rock and supported by mound of stone, for the cor. of
secs. 7, 8, 17, and 18, marked on brass cap,

T10N R13W
 S 7 | S 8
 S18 | S17
 1917

and raise a mound of stone, 2 ft. base, 1½ ft. high,
 W. of the cor.
 This cor. is 60 ft. above wash.
 Land, mountainous.
 Soil, rocky, 4th rate.
 Undergrowth, palo verde, greasewood, and cactus.
 No timber.

- N.89°54'E., on a random line bet, secs 8 and 17.
- 40.00 Set temp. ¼ sec. cor.
- 80.04 Intersect N. and S. line, 5 lks. N. of the cor. of Secs.
8, 9, 16, and 17.
- Thence,
S.89°56'W., on a true line bet. secs. 8 and 17.
Over mountainous land, through medium undergrowth.
Descend abrupt, rocky NW. slope.
- 14.60 Wash, 100 ft. below cor, 40 lks. wide, course N.
Ascend steep, rocky SE. slope.
- 30.60 Ridge, 450 ft. above wash, brs. NE. and SW. Desc. W. slope.
- 37.30 Wash, 170 ft. below ridge, 20 lks. wide, course N.
- 40.02 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
ground, for the ¼ sec. cor., marked on brass cap,


¼ S 8
 S 17
 1917

- and raise a mound of stone, 2ft. base, 1½ ft. high,
 N. of the cor.
 This cor. is 60 ft. above wash.
 Ascend precipitious E. slope.
- 45.30 Rocky ridge, 250 ft. above cor., brs. N. and S.
Descend across NW. slope.
- 53.80 Rocky point, 40 ft. below ridge; descend W. slope.
- 59.70 Head wash, 200 ft. below point, course N. Asc. NE. slope.
- 69.80 Spur, 90 ft. above wash, brs. NE. descend NW. slope.
- 75.50 Wash, 160 ft. below spur, 35 lks. wide, course NE.
Ascend SE. slope 50 ft. to cor.
- 80.04 The cor. of secs. 7, 8, 17, and 18.
Land, mountainous.
Soil, rocky, 4th rate.
Undergrowth, palo verde, greasewood, and cactus.
No timber.


Subdivision of Township 10 North, Range 13 West.

Chains.

- S. 89° 56' W., on a random line bet. secs. 7 and 18.
- 40.00 Set temp. 1/4 sec. cor.
- 81.64 Intersect the West bdy. of Tp. 9 lks. S. of true point for corner of sections 7, 12, 13, and 18, witnessed by a 3 in. iron post, properly set, mkd. and wit. as described by Sur. Gen. From true point for cor., East, on a true line bet. secs. 7 and 18. Over mountainous land, through medium undergrowth.
- 0.02 Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in ground and supported by mound of stone, for the witness corner to cor. of secs. 7, 12, 13, and 18, marked on brass cap,




- and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.
- 1.10 Enter bed of Bill Williams River, course SW. 60 ft. below cor
- 8.70 Leave bed of Bill Williams River. Ascend rocky NW. slope.
- 13.10 Rocky spur, 200 ft. above river, slopes NW., Desc. NE slope
- 23.10 Bend of river, 220 ft. below spur. Ascend NW. slope.
- 36.10 Spur, 340 ft. above river, slopes N. Descend NE. slope.
- 41.64 Set an iron post, 3 ft. long, 1 in. in diam., on solid rock and supported by mound of stone, for the 1/4 sec. cor., marked on brass cap,



- and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of the cor.
- This cor. is 60 ft. below spur, and is on west side of large boulder. Ascend across broken NE. slope.
- 41.80 Gulch, course N. Ascend broken NW. slope.
- 53.30 Ridge, 300 ft. above gulch, bears NE. and SW. Descend rocky SE. slope.
- 61.80 Wash, 160 ft. below ridge, 30 lks. wide, course N. Ascend NW. slope.
- 72.90 Spur, 160 ft. above wash, slopes NE. Descend SE. slope.
- 81.64 The cor. of secs. 7, 8, 17, and 18. Land, mountainous. Soil, rocky, 4th rate. Undergrowth, palo verde, greasewood, and cactus. No timber.

-
- N. 0° 4' W., bet. secs. 7 and 8. Over mountainous land, through medium undergrowth. Ascend SE. slope.
 - 0.80 Spur, slopes E. Ascend and descend along E. slope.
 - 13.80 Ridge, 50 ft. below spur, bears E. and W., descend N. slope.
 - 33.00 Descend abruptly over cliffs.
 - 40.00 Set an iron post, 3 ft. long, 1 in. in diam., on solid rock and supported by mound of stone, for the 1/4 sec. cor., marked on brass cap,



from which
 A. B. C. On a cliff, bearings S. 10° W., 10 lks. dist., marked "X B O S 7"
 and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.

Subdivision of Township 10 North, Range 13 West.

Chains.

- 44.90 This cor. is 460 ft. below ridge.
Enter bed of Bill Williams River, course SW., continue in same
- 62.40 Leave Bill Williams River. Ascend broken, rocky SW. slope, over cliffs and slide-rock.
- 79.10 Rocky ridge, 560 ft. above river, bears SE. and NW.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in ground and supported by mound of stone, for the cor. of secs. 5, 6, 7, and 8, marked on brass cap,

T10N R13W
 $\frac{S\ 6}{S\ 7} | \frac{S\ 5}{S\ 8}$
 1917

and raise a mound of stone, 2ft. base, 1½ ft. high, W. of the cor.
 Land, mountainous broken by cliffs.
 Soil, rocky, 4th rate.
 Undergrowth, palo verde, greasewood, and cactus.
 No timber.

- 40.00 N. 89° 56' E., on a random line bet. secs. 5 and 8.
Set temp. ¼ sec. cor.
- 79.94 Intersect the N. and S. line, 5 lks. N. of the cor. of secs. 4, 5, 8, and 9.

Thence, S. 89° 58' W., on a true line bet. secs. 5 and 8.
 Over mountainous land, through medium undergrowth.
 Ascend E. slope.

- 23.80 Spur, 270 ft. above cor., slopes S. Descend SW. slope.
- 39.97 Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in ground and supported by mound of stone, for the ¼ sec. cor., marked on brass cap,

$\frac{1}{4} \frac{S\ 5}{S\ 8}$
 1917

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of the cor.

- This cor. is 70 ft. below spur, descend SW. slope.
- 43.00 Wash, 120 ft. below cor., 20 lks. wide, course S. 30° E.
Ascend NE. slope.
- 55.40 Spur, 230 ft. above wash, slopes SE.
- 64.50 Ridge, bears NW. and SE., descend SW. slope.
- 70.30 Wash, in canyon, 130 ft. below ridge, 20 lks. wide, course S. 10° W. Ascend E. slope.
- 74.00 Rocky spur, 90 ft. above wash, slopes SE. Descend SW. slope 60 ft. to cor.
- 79.94 The cor. of secs. 5, 6, 7, and 8.
Land, mountainous.
Soil, rocky, 4th rate.
Undergrowth, palo verde, greasewood, and cactus.
No timber.

- West., on a random line bet. secs. 6 and 7.
- 40.00 Set temp. ¼ sec. cor.
- 81.68 Intersect the west bdy. of Tp. at cor. of secs. 1, 6, 7, and 12, which is a 3 in. iron post, properly set, mkd. and witnessed as described by the surveyor general.
Thence, on a true line bet. secs. 6 and 7.
East, on a true line bet. secs. 6 and 7.
Over mountainous land, through medium undergrowth.
Descend SE. slope, cor., 20 lks. wide, course S.
- 4.70 Wash, 110 ft. below cor., 20 lks. wide, course S.

Subdivision of Township 10 North, Range 13 West.

Chains.

- 12.40 Ascend SW. slope.
- Ridge, 120 ft. above wash, brs. SE. and NW.
- Descend broken Sg. slope.
- 41.68 Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in ground and supported by mound of stone, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ $\frac{S\ 6}{S\ 7}$
 1917

- and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of the cor.
- This cor. is 190 ft. below ridge.
- 56.80 Wash, 140 ft. below cor., 16 lks. wide course S.
- Ascend SW. slope.
- 60.90 Spur, 110 ft. above wash, slopes SW. Descend SE. slope.
- 67.90 Wash, 270 ft. below spur, 25 lks. wide, course S.
- Ascend precipitous NW. slope.
- 77.00 Ridge, 350 ft. above wash, brs. SW. and NE.
- 81.68 The cor. of secs. 5, 6, 7, and 8.
- Land, mountainous.
- Soil, rocky, 4th rate.
- Undergrowth, palo verde, greasewood, and cactus.
- No timber.

- N.0°11'W., on a random line bet. secs. 5 and 6.
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 80.18 Intersect the north bdy. of Tp., 7 lks. W. of the cor. of secs. 5, 6, 31, and 32, as described in Book "A"
- Thence,
- S.0°8'E., on a true line bet. secs. 5 and 6.
- Over mountainous land, through medium undergrowth.
- Ascend N. slope.
- 1.50 Ridge, bears E. and W. Descend broken SW. slope.
- 11.80 Wash, 200 ft. below ridge, 10 lks. wide, course SE.
- Descend SW. slope.
- 26.40 Ridge, bears SE. and NW. Descend broken SW. slope.
- 40.18 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in ground and supported by mound of stone, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
 S 6 | S 5
 1917

- and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of the cor.
- This cor. is 140 ft. below ridge.
- 52.60 Ridge, bears SW. and NE. Descend along general E. slope.
- 73.00 Ridge, 50 ft. lower, bears SE. and NW.
- Descend 140 ft. on SW. slope to cor.
- 80.18 The cor. of secs. 5, 6, 7, and 8.
- Land, mountainous.
- Soil, rocky, 4th rate.
- Undergrowth, palo verde, greasewood, and cactus.
- No timber.

.Subdivision of Township 10 North, Range 13 West.

GENERAL DESCRIPTION.

This Township is composed of rough mountainous land, badly cut by deep washes and canyons most all of which drain into the Bill Williams River.

The Bill Williams River enters the township in Sec. 2 and leaves the township at the corner of sections 7 and 18. All this distance, the river is in a deep box canyon with high precipitous walls.

The soil is all rocky and of fourth rate.

There is no timber in the township. The undergrowth consists of cactus, catclaw, greasewood, palo verde, and ocotillo, while an abundant growth of bunch grass is found in the south portion of township.

A small spring is located in section 23. It dries up however in the dry season and as there is no other water available, the land has no value except for grazing purposes during the rainy season.

A considerable portion of the township contains mineral and several old mines are located in the western half.

The Montana Group, located in section 17, is said to have produced ore in paying quantity.

One settler is located in section 2.

Book "R"
Group 36 --- Arizona

Township 10 North, Range 13 West

DATE DIAGRAM

	2-22-17	2-22-17	2-22-17, 2-21-17	2-21-17	2-21-17	2-21-17	
	6	5	4	3	2	1	
	4-14-17	4-22-17	4-11-17	4-5-17	4-5-17	2-25-17	1-15-15
	7	8	9	10	11	12	1-15-15 WEST
	4-13-17	4-12-17	4-12-17	4-4-17	3-31-17	2-25-17	
	18	17	16	15	14	13	1-15-15 MER.
	4-10-17	4-11-17	4-11-17	4-3-17	4-2-17	4-2-17	
	19	20	21	22	23	24	1-14-15 GUIDE
	4-10-17	4-9-17	4-8-17	3-30-17	3-28-17	3-28-17	
	30	29	28	27	26	25	1-14-15 BRD
	4-9-17	4-9-17	4-8-17	3-30-17	3-29-17	3-29-17	
	31	32	33	34	35	36	1-14-15
	4-9-17	4-8-17	3-30-17	3-27-17	3-27-17		
					4-30-15	4-30-15	

Lines dated in black were executed by L. E. Wilkes,
U. S. Surveyor.

Lines dated in red were executed by H. N. Bradstreet,
U. S. Transitman.

Lines dated in green were executed by John G. Collins,
U. S. Transitman.

Lines dated in blue were executed by Hugo Price,
U. S. Transitman.

Accepted surveys.

For list of field assistants see Book "A".

For **CERTIFICATE OF UNITED STATES** ~~SURVEYOR~~ **TRANSITMAN**
 See Book "C" _____

I, _____, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General for _____ bearing date of the _____ day of _____, 191____, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of _____ of the _____ Meridian, in the State of _____, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General for _____ and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

U. S. Surveyor

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix, Arizona, Jan. 20, 1919, ~~1918~~


The foregoing field notes of the survey of _____ the _____ Subdivision Lines of _____

TOWNSHIP 10 NORTH, RANGE 13 WEST,

of the Gila and Salt River Base and Meridian, in the State of Arizona,

executed by Hugo Price, U.S. Transitman

under ~~his~~ special instructions dated July 23, 1915, for Group 36, Arizona, ~~1914~~, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.


U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above described surveys in Book "R", of Group 36, has been correctly copied from the original notes on file in this office.

U. S. Surveyor General.