

3263

Book "D"

4-879

BOOK 3263

91

①

FIELD NOTES

OF THE SURVEY OF THE

North boundary, and

Subdivision lines of

TOWNSHIP 26 NORTH, RANGE 9 EAST,

Of the Gila and Salt River Base and Meridian,

In the State of Arizona.

EXECUTED BY

Philip L. Inch,

U. S. Transitman,

~~In the capacity of U. S. Surveyor~~, under instructions dated January 4, 1916,
issued by the United States Surveyor General to govern surveys included in
Group No. 66, which were approved by the Commissioner of the General Land
Office, January 17, 1916.

Survey commenced March 14, 1916.

Survey completed April 10, 1916.

Executed under Assignment
Instructions dated Feb. 3, 1916.

3263

3263


1A






3263
Book "D"

Group 66 - - - Arizona.

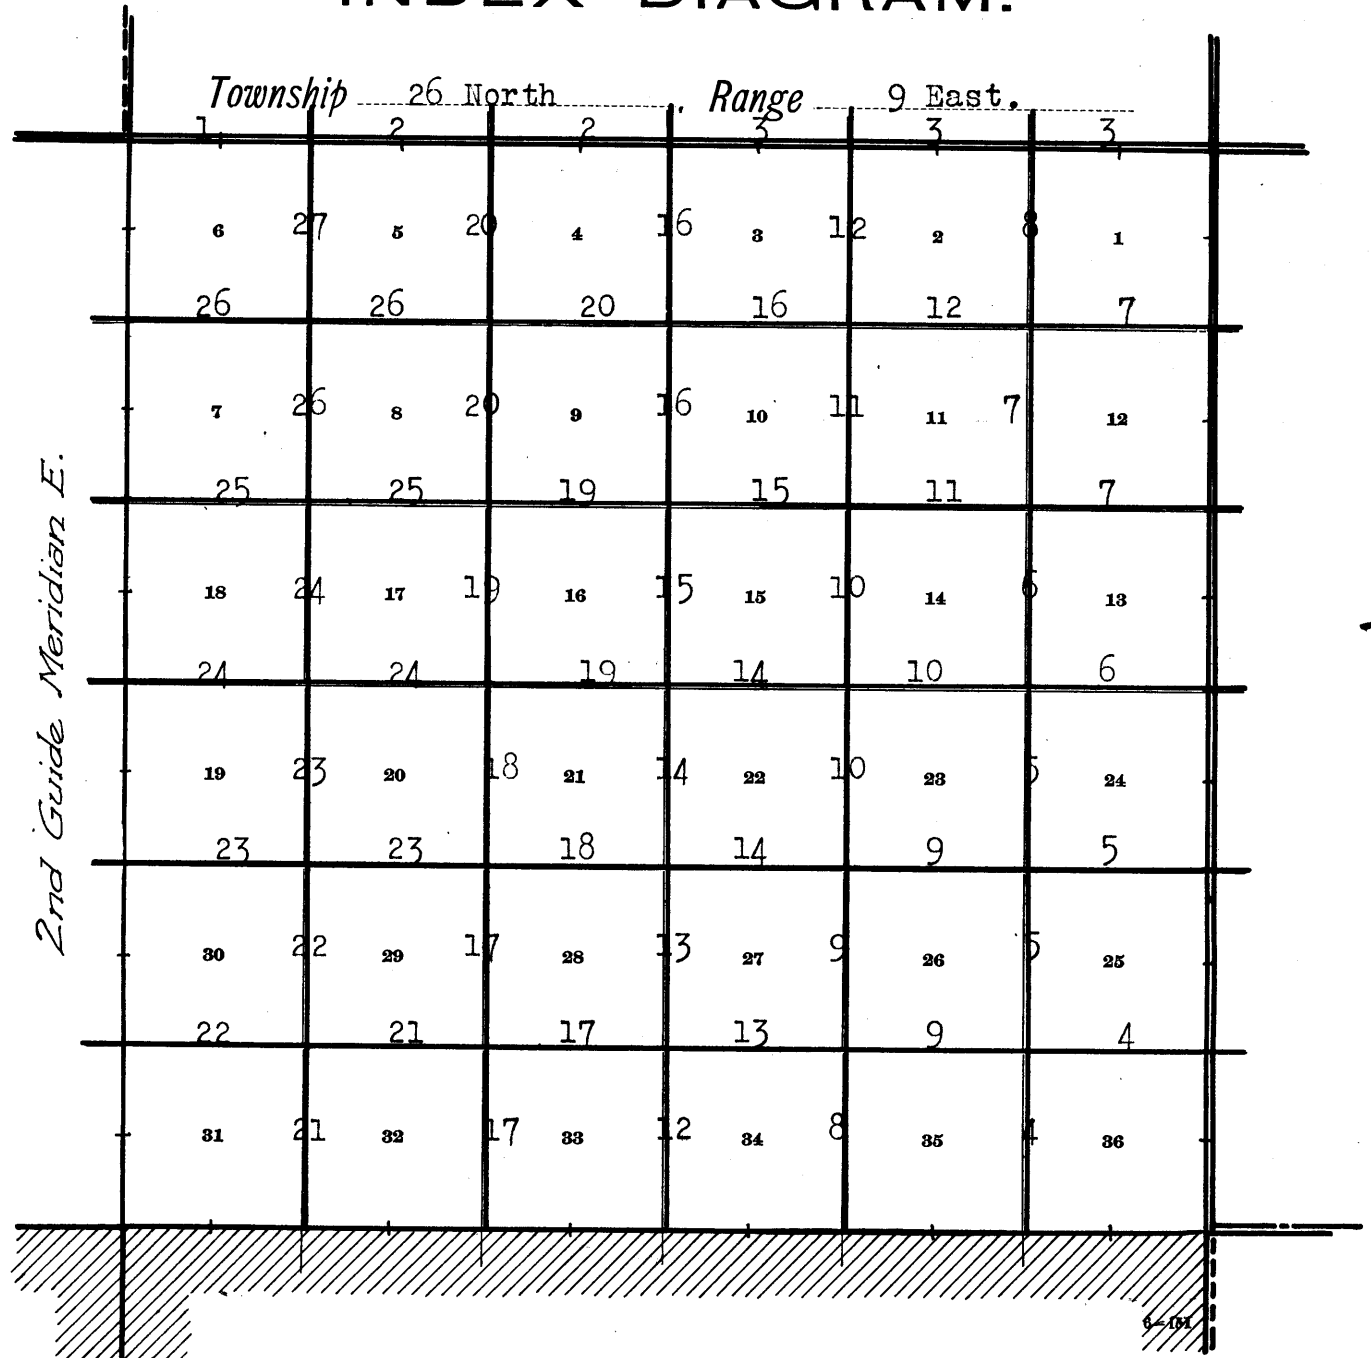BOOK 3263

INDEX DIAGRAM.



-  Lines surveyed under this Group.
-  " retraced " " "
-  " resurveyed " " "
-  Accepted surveys.
-  Areas surveyed as per accepted plats on file.

Survey of N. Bdy. and Subdivision, T. 26 N., R. 9 E. 13

Chains

Survey executed by Philip, L. Inch, U. S. Transitman, using Instrument No. 8496, which is described, with record of approval by the Assistant Supervisor of Surveys, District No. 5, and of field tests, in Book A. Dates of survey shown on diagram on page 29 hereof. All lines were originated and checked by deflection from true meridians determined by observations on Polaris at elongation by Theo. O. Johnston, U. S. Surveyor, records of which appear in books C, F, and G.; said lines being projected with transit, and by carefully measured angles.

The W. bdy. of this Tp., (2nd Guide Meridian E.) and the S. bdy., were retraced preliminary to surveying the N. bdy. and subdivisional lines, and were found to be within allowable limits of error in alinement and measurement, with monuments in good condition.

N. Bdy., T. 26 N., R. 9 E.

From the cor. of Tps. 26 and 27 N., Rs. 9 and 10 E., described in book C;

West, on a random line, on N. bdy. of Tp., setting temp. cors. at intervals of 40.00 chs.

478.55

Intersect 2nd G. M. E., 154 lks. S. of the cor. of Tps. 26 and 27 N., Rs. 8 and 9 E., which is a stone, firmly set, marked and witnessed as described by the Surveyor General.

Therefore the true return course is S.89°49'E.

S.89°49'E., bet. secs. 6 and 31, over rolling land.

7.50

Road bears N. and S.

10.50

Telephone line bears N. and S.

15.00

Ft. of mesa. Asc. 75 ft., on W.slope.

21.00

Summit, on W. edge of mesa.

38.55

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked

S31

1/4

S 6

1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

78.55

Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 5, 6, 31 and 32, with brass cap, marked

T27N | R9E
S31 | S32

S6 | S5

T26N

1916

Chains

and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.

Land, rolling and mountainous.
Soil, sandy clay loam; 3rd rate.
No timber.

S.89°49'E., bet. secs. 5 and 32,
over rolling land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for ¼ sec. cor., with brass cap, marked
S32

¼

S 5
1916

and raise a mound of stone, 2 ft. base, 1½ ft. high,
N. of cor.

80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the
ground, for cor. of secs. 4, 5, 32 and 33, with brass
cap, marked

T27N | R9E
S32 | S33

S5 | S4
T26N
1916

and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.

Land, rolling.
Soil, sandy clay loam; 3rd rate.
No timber.

S.89°49'E., bet. secs. 4 and 33,
over rolling land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for ¼ sec. cor., with brass cap, marked
S33

¼

S 4
1916

and raise a mound of stone, 2 ft. base, 1½ ft. high,
N. of cor.

80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the
ground, for cor. of secs. 3, 4, 33 and 34, with brass
cap, marked

T27N | R9E
S33 | S34


S4 | S3
T26N
1916

and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.


Land, rolling.
Soil, sandy clay loam; 3rd rate.
No timber.

Chains

S. 89° 49' E., bet. secs. 3 and 34,
 over rolling land.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., in a mound of
 stone, (impracticable to set post in the ground) for $\frac{1}{4}$
 sec. cor., with brass cap, marked
 S34



and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
 N. of cor.
 80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in a
 mound of stone, (impracticable to set post in the ground)
 for cor. of secs. 2, 3, 34 and 35, with brass cap, marked




T26N
 1916

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
 W. of cor.


Land, rolling.
 Soil, sandy clay loam: 3rd rate.
 No timber.

S. 89° 49' E., bet. secs. 2 and 35,
 over rolling land.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 S35



dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.,
 and raise a mound of earth, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high,
 N. of cor.

80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the
 ground, for cor. of secs. 1, 2, 35 and 36, with brass
 cap, marked




T26N
 1916

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
 W. of cor.

Land, rolling.
 Soil, sandy clay loam; 3rd rate.
 No timber.

S. 89° 49' E., bet. secs. 1 and 36,
 over rolling land.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in a
 mound of stone, (impracticable to set post in the ground)
 for $\frac{1}{4}$ sec. cor., with brass cap, marked
 S36



and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
 N. of cor.


Chains

55.00 Wash, course NE.
 80.00 The cor. of Tps. 26 and 27 N., Rs. 9 and 10 E. described in Book "C."
 Land, rolling.
 Soil, clay loam; 3rd rate.
 No timber.


Subdivision of T. 26 N., R. 9 E.

From the cor. of secs. 1, 2, 35 and 36, on S. bdy. of Tp. which is a stone, firmly set, marked and witnessed as described by the Surveyor General;

N.0°01'W., bet. secs. 35 and 36,
 over nearly level land.
 19.00 S. edge of ravine, course E.
 23.00 N. edge of same.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



1916
 and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 25, 26, 35 and 36, with brass cap, marked




1916
 and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, rolling.
 Soil, gravelly clay; 3rd rate.
 No timber.

40.00 East, on a random line, bet. secs. 25 and 36.
 79.96 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect E. bdy. of Tp. 40 lks. N. of the cor. of secs. 25, 30, 31 and 36; described in book C.

Thence N.89°43'W., on a true line, bet. secs. 25 and 36, over rolling land.
 39.98 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
 79.96 The cor. of secs. 25, 26, 35 and 36.

Land, rolling. Soil, gravel and clay; 3rd rate. No timber.

Subdivision of T. 26 N., R. 9 E.

Chains

N.0°01'W., bet. secs. 25 and 26,
over rolling land.
40.00 Set an iron post, 3 ft. long, 1 in. diam., in a mound of
stone, (impracticable to set post in the ground) for $\frac{1}{4}$
set.cor., with brass cap, marked

$\frac{1}{4}$
S26 | S25

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 23, 24, 25 and 26, with brass
cap, marked

T26N | R9E
S23 | S24

S26 | S25

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

Land, rolling.
Soil, gravelly clay; 3rd rate.
No timber.

40.00 East, on a random line, bet. secs. 24 and 25.
Set temp. $\frac{1}{4}$ sec. cor.
80.06 Intersect E. bdy. of Tp. 26 lks. N. of the cor. of secs.
19, 24, 25 and 30, described in book C.

Thence N.89°49'W., on a true line, bet. secs. 24 and 25,
over rolling land.

15.05 Wash, course NE.
40.03 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S24
 $\frac{1}{4}$

S25
1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
N. of cor.

80.06 The cor. of secs. 23, 24, 25 and 26.

Land, rolling.
Soil, gravelly clay; 3rd rate.
No timber.

N.0°01'W., bet. secs. 23 and 24,
over rolling land.

25.00 Road bears NE. and SW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in a
mound of stone, (impracticable to set post in the ground)
for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
S23 | S24

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in
a mound of stone, (impracticable to set post in the
ground, for cor. of secs. 13, 14, 23 and 24, with brass
cap, marked

6

Subdivision of T. 26 N., R. 9 E.

Chains

T26N	R 9E
S14	S13
S23	S24

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.
Land, rolling.
Soil, gravelly clay; 3rd and 4th rate.
No timber.

40.00
80.02

East, on a random line, bet. secs. 13 and 24.
Set temp. ¼ sec. cor.
Intersect E. bdy. of Tp. 28 lks. N. of the cor. of secs.
13, 18, 19 and 24, described in book C.

40.01

Thence N.89°48'W., on a true line, bet. secs. 13 and 24,
over rolling land.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for ¼ sec. cor., with brass cap, marked
S13

¼
S24
1916

78.00
80.02

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
Road bears NW. and SE.
The cor. of secs. 13, 14, 23 and 24.

Land, rolling.
Soil, gravelly clay; 3rd rate.
No timber.

2.50
40.00

N.0°01'W., bet. secs. 13 and 14,
over rolling land.
Road bears NW. and SE.
Set an iron post, 3 ft. long, 1 in. diam., in a mound of
stone, (impracticable to set post in the ground) for ¼
sec. cor., with brass cap, marked

¼	
S14	S13
1916	

80.00

and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 11, 12, 13 and 14, with brass
cap, marked

T26N	R 9E
S11	S12
S14	S13
1916	

and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.

Land, rolling.
Soil, gravelly clay; 3rd rate.
No timber.

Chains

East, on a random line, bet. secs. 12 and 13.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.06 Intersect E. bdy. of Tp. 23 lks. N. of the cor. of secs. 7, 12, 13 and 18, described in book C.

Thence N.89°50'W., on a true line, bet. secs. 12 and 13, over rolling land.
 40.03 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S12
 $\frac{1}{4}$
 S13
 1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

80.06 The cor. of secs. 11, 12, 13 and 14.

Land, rolling.
 Soil, 3rd rate.
 No timber.

N.0°01'W., bet. secs. 11 and 12, over rolling land.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, for $\frac{1}{4}$ sec. cor., (impracticable to set post in the ground) with brass cap, marked

$\frac{1}{4}$
 S11 | S12
 1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

60.00 Box canyon, 4 chs. wide, course NE.
 65.00 S. edge of mesa.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 1, 2, 11 and 12, with brass cap, marked

T26N | R9E
 S2 | S1
 S11 | S12
 1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling.
 Soil, rocky clay; 4th rate.
 No timber.

S.89°50'E., on a random line, bet. secs. 1 and 12.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79190 Intersect E. bdy. of Tp. at the cor. of secs. 1, 6, 7 and 12, described in book C.

Thence N.89°50'W., on a true line, bet. secs. 1 and 12, over rolling and broken land,
 9.90 Broken rocky canyon, course NE.
 20.00 Point of spur projecting S.
 34.90 Wash, course S.
 39.95 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S 1
 $\frac{1}{4}$
 S12
 1916

Chains

and raise a mound of stone, 2 ft. base, 1½ ft. high,
N. of cor.
45.00 SE. edge of point of mesa projecting S. Thence across pt.
46.70 SW. edge of same.
60.00 Draw, course NE.
79.00 The cor. of secs. 1, 2, 11 and 12.

Land, rolling, broken and mountainous.
Soil, 4th rate.
No timber.

North, on a random line, bet. secs. 1 and 2.
40.00 Set temp. ¼ sec. cor.
80.00 Intersect N. bdy. of Tp. 9 lks. W. of the cor. of secs.
1, 2, 35 and 36, hereinbefore described.

Thence S.0°04'W., on a true line, bet. secs. 1 and 2,
over broken, rolling land.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for ¼ sec. cor., with brass cap, marked
¼
S2 | S1
1916
and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.
80.00 The cor. of secs. 1, 2, 11 and 12.

Land, rolling and broken.
Soil, rocky clay; 4th rate.
No timber.

From the cor. of secs. 2, 3, 34 and 35, on S. bdy. of Tp.,
which is a stone, firmly set, marked and witnessed as
described by the Surveyor General;

N.0°01'W., bet. secs. 34 and 35,
over broken rolling land.
2.00 S. edge of canyon, course E.
7.70 N. edge of same.
40.00 On S. edge of mesa,
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for ¼ sec. cor., with brass cap, marked
¼
S34 | S35
1916
and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.
52.40 N. edge of mesa. Desc.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 26, 27, 34 and 35, with brass
cap, marked
T26N | R9E
S27 | S26
S34 | S35
1916
and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.

Land, rolling and broken. Soil, gravelly clay; 3rd and 4th
rate. No timber.

Chains

40.00 S. 89°55'E., on a random line, bet. secs. 26 and 35.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.92 Intersect N. and S. line 9 lks. S. of the cor. of secs.
 25, 26, 35 and 36.

Thence N. 89°59'W., on a true line, bet. secs. 26 and 35,
 over rolling land.
 39.96 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 S26

$\frac{1}{4}$
 S35
 1916
 and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
 N. of cor.
 79.92 The cor. of secs. 26, 27, 34 and 35.

Land, rolling.
 Soil, gravelly clay: 4th rate.
 No timber.

40.00 N. 0°01'W., bet. secs. 26 and 27,
 over rolling land.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
 S27 | S26
 1916
 and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
 W. of cor.

77.60 Road bears E. and W.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 22, 23, 26 and 27, with brass
 cap, marked

T26N	R 9E
S22	S23
S27	S26

1916
 and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
 W. of cor.

Land, rolling.
 Soil, clay loam: 3rd rate.
 No timber.

40.00 East, on a random line, bet. secs. 23 and 26.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.90 Intersect N. and S. line 14 lks. N. of the cor. of secs.
 23, 24, 25 and 26.

Thence N. 89°54'W., on a true line, bet. secs. 23 and 26,
 over rolling land.
 39.95 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 S23

$\frac{1}{4}$
 S26
 1916
 and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
 N. of cor.


54.90 Road bears NE. and SW.

Chains

79.90 The cor. of secs. 22, 23, 26 and 27.

Land, rolling.
Soil, rocky clay; 3rd rate.
No timber.


40.00 N.0°01'W., bet. secs. 22 and 23,
over rolling land.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for 1/4 sec. cor., with brass cap, marked



1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 14, 15, 22 and 23, with brass
cap, marked



1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
W. of cor.


Land, rolling.
Soil, rocky clay; 3rd and 4th rate.
No timber.

40.00 East, on a random line, bet. secs. 14 and 23.
Set temp. 1/4 sec. cor.

80.00 Intersect N. and S. line 22 lks. N. of the cor. of secs.
13, 14, 23 and 24.

40.00 Thence N.89°51'W., on a true line, bet. secs. 14 and 23,
over rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for 1/4 sec. cor., with brass cap, marked




and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
N. of cor.

80.00 The cor. of secs. 14, 15, 22 and 23.

Land, rolling.
Soil, gravelly clay; 3rd rate.
No timber.

40.00 N.0°01'W., bet. secs. 14 and 15,
over rolling land.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for 1/4 sec. cor., with brass cap, marked




1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,

Subdivision of T. 26 N., R. 9 E.

Chains

80.00 W. of cor.
Set an iron post, 3 ft. long, 2 ins. diam., 2 3/4 ins. in the ground, for cor. of secs. 10, 11, 14 and 15, with brass cap, marked




1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling.
Soil, rocky clay; 3rd rate.
No timber.

40.00 East, on a random line, bet. secs. 11 and 14.
Set temp. 1/4 sec. cor.
80.00 Intersect N. and S. line 24 lks. N. of the cor. of secs. 11, 12; 13 and 14.

40.00 Thence N.89°50'W., on a true line, bet. secs. 11 and 14, over rolling land.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked




and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

52.50 Reservoir, 40x60 ft.
80.00 The cor. of secs. 10, 11, 14 and 15.


Land, rolling.
Soil, rocky clay; 3rd rate.
No timber.

2.50 N.0°01'W., bet. secs. 10 and 11, over broken rolling land.
Road bears NW. and SE.
32.00 S. edge of canyon, course NE.
35.00 N. edge of same.
40.00 Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, (impracticable to set post in the ground) for 1/4 sec. cor., with brass cap, marked



and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

50.00 Asc. on S. slope, 140 ft.
S. edge of mesa. Thence over same.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 2, 3, 10 and 11, with brass cap, marked



1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Chains

Land, rolling and broken.
Soil, rocky clay; 4th rate.
No timber.

40.00
79.96

S. 89° 50' E., on a random line, bet. secs. 2 and 11.
Set temp. $\frac{1}{4}$ sec. cor.
Intersect N. and S. line at the cor. of secs. 1, 2, 11 and 12.

10.00
25.00
39.98

Thence N. 89° 50' W., on a true line, bet. secs. 2 and 11, over rocky, broken land.
Box canyon, course S.
Wash, course SE.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S 2
 $\frac{1}{4}$
S 11
1916

63.00
79.96

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.
Wash, course NE.
The cor. of secs. 2, 3, 10 and 11.

Land, rocky and broken.
Soil, 4th rate.
No timber.

40.00
79.88

North, bet. secs. 2 and 3, on a random line.
Set temp. $\frac{1}{2}$ sec. cor.
Intersect N. bdy. of Tp. 9 lks. W. of the cor. of secs. 2, 3, 34 and 35, hereinbefore described.

39.88

Thence S. 0° 04' W., on a true line, bet. secs. 2 and 3, over rolling land.
Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, (impracticable to set post in the ground) for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
S 3 | S 2
1916

68.90
79.88


and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
Wash, course E.
The cor. of secs. 2, 3, 10 and 11.

Land, rolling.
Soil, gravelly clay; 3rd rate.
No timber.

15.00
38.60
40.00

From the cor. of secs. 3, 4, 33 and 34, on S. bdy. of Tp., which is a stone, firmly set, marked and witnessed as described by the Surveyor General;
N. 0° 02' W., bet. secs. 33 and 34, over rolling land.
S. edge of mesa. Thence over top.
N. edge of same. Desc.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked


Chains



1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 27, 28, 33 and 34, with brass cap, marked



1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling.
Soil, gravelly clay; 3rd rate.
No timber.


East, on a random line, bet. secs. 27 and 34.

40.00 Set temp. ¼ sec. cor.

79.94 Intersect N. and S. line 18 lks. N. of the cor. of secs. 26, 27, 34 and 35.

Thence N. 89° 52' W., on a true line, bet. secs. 27 and 34, over rolling land.

39.97 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked




and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

79.94 The cor. of secs. 27, 28, 33 and 34.

Land, rolling.
Soil, gravelly clay; 3rd rate.
No timber.

N. 0° 02' W., bet. secs. 27 and 28, over rolling land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in a mound of stone, (impracticable to set post in the ground) for ¼ sec. cor., with brass cap, marked




1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

74.00 Road bears E. and W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in a mound of stone, for cor. of secs. 21, 22, 27 and 28, (impracticable to set post in the ground) with brass cap, marked



1916


and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Chains

Land, rolling.
Soil, gravelly clay; 3rd rate.
No timber.

40.00 S. 89°52'E., on a random line, bet. secs. 22 and 27.
Set temp. $\frac{1}{4}$ sec. cor.
80.10 Intersect N. and S. line 8 lks. N. of the cor. of secs.
22, 23, 26 and 27.

40.05 Thence N. 89°49'W., on a true line, bet. secs. 22 and 27,
over rolling land.
Set an iron post, 3 ft. long, 1 in. diam., in a mound of
stone, (impracticable to set post in the ground) for $\frac{1}{4}$
sec. cor., with brass cap, marked




and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
N. of cor.

52.60 Road bears NE. and SW.
80.10 The cor. of secs. 21, 22, 27 and 28.


Land, rolling.
Soil, gravelly clay; 3rd rate.
No timber.

40.00 N. 0°02'W., bet. secs. 21 and 22,
over rocky rolling land.
Set an iron post, 3 ft. long, 1 in. diam., in a mound of
stone, (impracticable to set post in the ground) for $\frac{1}{4}$
sec. cor., with brass cap, marked



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., in a mound
of stone, (impracticable to set post in the ground) for
cor. of secs. 15, 16, 21 and 22, with brass cap, marked



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.


Land, rolling.
Soil, rocky clay; 3rd and 4th rate.
No timber.

40.00 S. 89°49'E., on a random line, bet. secs. 15 and 22.
Set temp. $\frac{1}{4}$ sec. cor.
80.06 Intersect ~~N. and S. line~~ at the cor. of secs. 14, 15, 22
and 23.

24.00 N. 89°49'W., on a true line, bet. secs. 15 and 22,
over rolling land.
29.00 E. edge of canyon, course NE.
W. edge of same.

chains

40.03 Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, (impracticable to set post in the ground) for $\frac{1}{4}$ sec. cor., with brass cap, marked




and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

80.06 The cor. of secs. 15, 16, 21 and 22.

Land, rolling.
Soil, gravelly clay; 3rd rate.
No timber.

N.0°02'W., bet. secs. 15 and 16, over rolling land.


40.00 Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. Impracticable to set post in the ground.

43.00 Wash, course NE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., in a mound of stone, (impracticable to set post in the ground) for cor. of secs. 9, 10, 15 and 16, with brass cap, marked



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, rolling.
Soil, clay and stone; 3rd rate.
No timber.


East, on a random line, bet. secs. 10 and 15.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.92 Intersect N. and S. line 19 lks. N. of the cor. of secs. 10, 11, 14 and 15.

Thence N.89°52'W., on a true line, bet. secs. 10 and 15, over rolling land.

39.96 Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, (impracticable to set post in the ground) for $\frac{1}{4}$ sec. cor., with brass cap, marked



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

45.40 Wash, course NE.

79.92 The cor. of secs. 9, 10, 15 and 16.

Land, rolling.
Soil, clay and rocky; 3rd rate.
No timber.

16

Subdivision of T. 26 N., R. 9 E.

Chains

40.00 N.0°02'W., bet. secs. 9 and 10,
over rolling land.
Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone,
(impracticable to set post in the ground) for $\frac{1}{4}$ sec. cor.,
with brass cap, marked

$$\frac{1}{4}$$

S9	S10
----	-----

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

66.30 Asc. 85 ft.

73.70 S. edge of mesa. Thence over top of same.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 3, 4, 9 and 10, with brass
cap, marked

T26N	R 9E
S4	S3
S9	S10

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

Land, rolling.

Soil, gravelly clay; 4th rate.

No timber.

40.00 East, on a random line, bet. secs. 3 and 10.
Set temp. $\frac{1}{4}$ sec. cor.

80.06 Intersect N. and S. line 21 lks. N. of the cor. of secs.
2, 3, 10 and 11.

40.03 Thence N.89°51'W., on a true line, bet. secs. 3 and 10,
over rolling land, across top of mesa.

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$$\frac{1}{4}$$

S 3

S10

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
N. of cor.

80.06 The cor. of secs. 3, 4, 9 and 10.

Land, rolling.

Soil, rocky clay; 3rd and 4th rate.

No timber.

40.00 N.0°02'W., on a random line, bet. secs. 3 and 4.
Set temp. $\frac{1}{4}$ sec. cor.

79.94 Intersect N. bdy. of Tp. 12 lks. W. of the cor. of secs.
3, 4, 33 and 34, hereinbefore described.

39.94 Thence S.0°03'W., on a true line, bet. secs. 3 and 4,
over rolling land, over mesa.

Set an iron post, 3 ft. long, 1 in. diam., in a mound of
stone, (impracticable to set post in the ground) for $\frac{1}{4}$
sec. cor., with brass cap, marked

$$\frac{1}{4}$$

S4	S3
----	----

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

Chains


79.94 The cor. of secs. 3, 4, 9 and 10.

Land, rolling.
Soil, sandy clay; 4th rate.
No timber.

From the cor. of secs. 4, 5, 32 and 33, on S. bdy. of Tp.,
which is a stone, firmly set, marked and witnessed as
described by the Surveyor General;

N.0°03'W., bet. secs. 32 and 33,
over broken land.


40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 28, 29, 32 and 33, with brass
cap, marked



1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

Land, rolling and broken.
Soil, gravelly clay; 3rd rate.
No timber.

S.89°55'E., on a random line, bet. secs. 28 and 33.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.90 Intersect N. and S. line 6 lks. N. of the cor. of secs.
27, 28, 33 and 34.

Thence N.89°52'W., on a true line, bet. secs. 28 and 33,
over rolling land.

39.95 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S28



S33

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
N. of cor.


79.90 The cor. of secs. 28, 29, 32 and 33.

Land, rolling.
Soil, gravelly clay; 3rd rate.
No timber.

N.0°03'W., bet. secs. 28 and 29,
over rolling land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., in a mound of
stone, (impracticable to set post in the ground) for $\frac{1}{4}$
sec. cor., with brass cap, marked

Chains




1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

50.00 Road bears E. and W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., in a mound of stone, (impracticable to set post in the ground) for cor. of secs. 20, 21, 28 and 29, with brass cap, marked



1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling.

Soil, gravelly clay; 3rd rate.

No timber.


S.89°52'E., on a random line, bet. secs. 21 and 28.

40.00 Set temp. ¼ sec.cor.

80.00 Intersect N. and S. line 9 lks. N. of the cor. of secs. 21, 22, 27 and 28.

Thence N.89°48'W., on a true line, bet. secs. 21 and 28, over rolling land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, (impracticable to set post in the ground) for ¼ sec. cor., with brass cap, marked



and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

80.00 The cor. of secs. 20, 21, 28 and 29.


Land, rolling.

Soil, gravelly clay.

No timber.

N.0°03'W., bet. secs. 20 and 21, over rolling land.


40.00 Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, (impracticable to set post in the ground) for ¼ sec. cor., with brass cap, marked



1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., in a mound of stone, (impracticable to set post in the ground) for cor. of secs. 16, 17, 20 and 21, with brass cap, marked



1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Subdivision of T. 26 N., R. 9 E.

Chains

Land, rolling.
Soil, clay and rocky; 3rd rate.
No timber.


East, on a random line, bet. secs. 16 and 21.
40.00 Set temp. $\frac{1}{4}$ sec. cor.
80.14 Intersect N. and S. line 33 lks. N. of the cor. of secs.
15, 16, 21 and 22.

Thence N.89°46'W., on a true line, bet. secs. 16 and 21,
over rolling land.
40.07 Set an iron post, 3 ft. long, 1 in. diam., in a mound of
stone, (impracticable to set post in the ground) for $\frac{1}{4}$
sec. cor., with brass cap, marked
S16
 $\frac{1}{4}$
S21
1916


and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
N. of cor.
80.14 The cor. of secs. 16, 17, 20 and 21.

Land, rolling.
Soil, 4th rate.
No timber.

N.0°03'W., bet. secs. 16 and 17,
over rolling land.
40.00 Set an iron post, 3 ft. long, 1 in. diam., in a mound of
stone, (impracticable to set post in the ground) for $\frac{1}{4}$
sec. cor., with brass cap, marked



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., in a mound of
stone, (impracticable to set post in the ground) for
cor. of secs. 8, 9, 16 and 17, with brass cap, marked



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

Land, rolling.
Soil, clay, rocky; 3rd rate.
No timber.

East, on a random line, bet. secs. 9 and 16.
40.00 Set temp. $\frac{1}{4}$ sec. cor.
80.10 Intersect N. and S. line 23 lks. N. of the cor. of secs.
9, 10, 15 and 16.

Thence N.89°50'W., on a true line, bet. secs. 9 and 16,
over rolling land.
40.05 Set an iron post, 3 ft. long, 1 in. diam., in a mound of
stone, (impracticable to set post in the ground) for $\frac{1}{4}$
sec. cor., with brass cap, marked

Chains

S 9
 $\frac{1}{4}$
 S16
 1916

80.10 and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
 The cor. of secs. 8, 9, 16 and 17.

Land, rolling.
 Soil, rocky clay; 4th rate.
 No timber.

40.00 N.0°03'W., bet. secs. 8 and 9, over rolling land.
 Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, (impracticable to set post in the ground) for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
 S8 | S9
 1916

80.00 and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 Set an iron post, 3 ft. long, 2 ins. diam., in a mound of stone, (impracticable to set post in the ground) for cor. of secs. 4, 5, 8 and 9, with brass cap, marked

T26N | R 9E
 S5 | S4
 S8 | S9
 1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, rolling.
 Soil, gravelly clay; 3rd rate.
 No timber.

40.00 S.89°50'E., on a random line, bet. secs. 4 and 9.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.06 Intersect N. and S. line 8 lks. S. of the cor. of secs. 3, 4, 9 and 10.

13.35 Thence N.89°53'W., on a true line, bet. secs. 4 and 9, over rolling and broken land, on mesa.
 SW. edge of mesa. Desc.
 40.03 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S 4
 $\frac{1}{4}$
 S 9
 1916

80.06 and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
 The cor. of secs. 4, 5, 8 and 9.


Land, rolling.
 Soil, gravelly clay; 4th rate.
 No timber.

40.00 North, on a random line bet. secs. 4 and 5.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.99 Intersect N. bdy. of Tp. 6 lks. W. of the cor. of secs.

Chains

4, 5, 32 and 33, hereinbefore described.

Thence S.0°03'W., on a true line, bet. secs. 4 and 5,
 over rolling land.
 30.00 Trail bears NW. and SE.
 39.99 Set an iron post, 3 ft. long, 1 in. diam., in a mound of
 stone, (impracticable to set post in the ground) for $\frac{1}{4}$
 sec. cor., with brass cap, marked




and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.
 52.20 S. edge of mesa. Desc.
 66.00 Road bears NW. and SE.
 79.99 The cor. of secs. 4, 5, 8 and 9.


Land, rolling.
 Soil, rocky clay; 4th rate.
 No timber.

From the cor. of secs. 5, 6, 31 and 32, on S. bdy. of Tp.,
 which is a stone, firmly set, marked and witnessed as
 described by the Surveyor General:

N.0°03'W., bet. secs. 31 and 32,
 over rolling land.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., in a mound of
 stone, (impracticable to set post in the ground) for
 cor. of secs. 29, 30, 31 and 32, with brass cap, marked



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.

Land, rolling.
 Soil, clay and rock; 3rd rate.
 No timber.

East, on a random line, bet. secs. 29 and 32.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.92 Intersect N. and S. line 33 lks. N. of the cor. of secs.
 28, 29, 32 and 33.

Thence N.89°46'W., on a true line, bet. secs. 29 and 32,
 over rolling land.
 39.96 Set an iron post, 3 ft. long, 1 in. diam., in a mound of
 stone, (impracticable to set post in the ground) for $\frac{1}{4}$
 sec. cor., with brass cap, marked

Chains

S29

$\frac{1}{4}$

S32

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high,
N. of cor.

79.92 The cor. of secs. 29, 30, 31 and 32.

Land, rolling.
Soil, gravelly clay; 3rd rate.
No timber.

West, on a random line, bet. secs. 30 and 31.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.20 Intersect W. bdy. of Tp., (2nd G. M. E.) 2 lks. S. of the
cor. of secs. 25, 30, 31 and 36, which is a stone,
firmly set, marked and witnessed as described by the
Surveyor General.

Thence S.89°59'E., on a true line, bet. secs. 30 and 31,
over rolling land,

37.20 Road bears NE and SW.

39.20 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S30

$\frac{1}{4}$

S31

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high,
N. of cor.

79.20 The cor. of secs. 29, 30, 31 and 32.

Land, rolling.
Soil, rocky clay; 3rd rate.
No timber.

N.0°03'W., bet. secs. 29 and 30,
over rolling land.

18.00 Road bears NE. and SW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$

S30 | S29

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 19, 20, 29 and 30, with brass
cap, marked

T26N | R 9E

S19 | S20

S30 | S29

1916

dig pits, 18x18x12 ins., in each sec., 5½ ft. dist.,
and raise a mound of earth, 4 ft. base, 2 ft. high,
W. of cor.

Land, rolling.
Soil, gravelly clay; shallow, 3rd rate.
No timber.


Subdivision of T. 26 N., R. 9 E.

Chains

40.00 East, on a random line, bet. secs. 20 and 29.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.90 Intersect N. and S. line 35 lks. N. of the cor. of secs. 20, 21, 28 and 29.

Thence N.89°45'W., on a true line, bet. secs. 20 and 29, over rolling land.

39.95 Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, (impracticable to set post in the ground) for $\frac{1}{4}$ sec. cor., with brass cap, marked



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.


79.90 The cor. of secs. 19, 20, 29 and 30.

Land, rolling.
 Soil, gravelly clay; 3rd rate.
 No timber.

40.00 West, on a random line, bet. secs. 19 and 30.
 Set temp. $\frac{1}{4}$ sec. cor.
 78.90 Intersect W. bdy. of Tp. (2nd G. M. E.) 8 lks. S. of the cor. of secs. 19, 24, 25 and 30, which is a stone, firmly set, marked and witnessed as described by the Surveyor General.

Thence S.89°57'E., on a true line, bet. secs. 19 and 30, over rolling land.

38.90 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked




and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

78.90 The cor. of secs. 19, 20, 29 and 30.


Land, rolling.
 Soil, gravelly clay; 3rd rate.
 No timber.

40.00 N.0°03'W., bet. secs. 19 and 20, over rolling land.
 Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, (impracticable to set post in the ground) for $\frac{1}{4}$ sec. cor., with brass cap, marked



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., in a mound of stone, (impracticable to set post in the ground) for cor. of secs. 17, 18, 19 and 20, with brass cap, marked



Chains

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

Land, rolling.
Soil, rocky clay; 3rd rate.
No timber.

40.00

S. $89^{\circ}45'E.$, on a random line, bet. secs. 17 and 20.
Set temp. $\frac{1}{4}$ sec. cor.

79.90

Intersect N. and E. line at the cor. of secs. 16, 17,
20 and 21.

39.95

Thence N. $89^{\circ}45'W.$, on a true line, bet. secs. 17 and 20,
over rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S17

 $\frac{1}{4}$

S20

1916

79.90

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
N. of cor.

The cor. of secs. 17, 18, 19 and 20.

Land, rolling.
Soil, rocky clay; 3rd and 4th rate.
No timber.

40.00

West, on a random line, bet. secs. 18 and 19.

78.75

Set temp. $\frac{1}{4}$ sec. cor.
Intersect W. bdy. of Tp., (2nd G. M. E.) 7 lks. S. of the
cor. of secs. 13, 18, 19 and 24, which is a stone,
firmly set, marked and witnessed as described by the
Surveyor General.

38.75

Thence S. $89^{\circ}57'E.$, on a true line, bet. secs. 18 and 19,
over rolling land.

Set an iron post, 3 ft. long, 1 in. diam., in a mound of
stone, (impracticable to set post in the ground) for $\frac{1}{4}$
sec. cor., with brass cap, marked

S18

 $\frac{1}{4}$

S19

1916

78.75

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
N. of cor.

The cor. of secs. 17, 18, 19 and 20.

Land, rolling.
Soil, rocky clay; 3rd rate.
No timber.

40.00

N. $0^{\circ}03'W.$, bet. secs. 17 and 18,
over rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

 $\frac{1}{4}$

S18 | S17

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

Chains

55.00 Desc. on N. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., in a mound of stone, (impracticable to set post in the ground) for cor. of secs. 7, 8, 17 and 18, with brass cap, marked

T26N	R 9E
S7	S8
<hr/>	
S18	S17

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling.
 Soil, gravelly clay; 3rd and 4th rate.
 No timber.

40.00 East, on a random line, bet. secs. 8 and 17.
 80.06 Set temp. ¼ sec. cor.
 Intersect N. and S. line 30 lks. N. of the cor. of secs. 8, 9, 16 and 17.

Thence N. 89° 47' W., on a true line, bet. secs. 8 and 17, over rolling land.
 40.03 Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, (impracticable to set post in the ground) for ¼ sec. cor., with brass cap, marked

S 8
<hr/>
S17
1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
 80.06 The cor. of secs. 7, 8, 17 and 18.

Land, rolling.
 Soil, gravelly clay; 3rd rate.
 No timber.

40.00 West, on a random line, bet. secs 7 and 18.
 78.66 Set temp. ¼ sec. cor.
 Intersect W. bdy. of Tp. 16 lks. S. of the cor. of secs. 7, 12, 13 and 18, which is a stone, firmly set, marked and witnessed as described by the Surveyor General.

Thence S. 89° 53' E., on a true line, bet. secs. 7 and 18, over rolling land.
 12.00 E. edge of mesa, bearing N. and S. Desc.
 17.65 Ditch, course SW.
 38.66 Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, (impracticable to set post in the ground) for ¼ sec. cor., with brass cap, marked


S 7
<hr/>
S18
1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
 56.65 E. edge of cliff.
 78.66 The cor. of secs. 7, 8, 17 and 18.

Land, rolling.
 Soil, rocky clay; 4th rate.
 No timber.

Chains


N.0°03'W., bet. secs. 7 and 8,
over rolling land.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$
S7 | S8
1916
and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
W. of cor.
69.10 S. edge of mesa.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., in a mound of
stone, (impracticable to set post in the ground) for cor.
of secs. 5, 6, 7 and 8, with brass cap, marked



1916
and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
W. of cor.
Land, rolling.
Soil, rocky clay; 4th rate.
No timber.

40.00 East, on a random line, bet. secs. 5 and 8.
Set temp. $\frac{1}{4}$ sec. cor.
80.10 Intersect N. and S. line 33 lks. N. of the cor. of secs.
4, 5, 8 and 9.

40.05 Thence N.89°46'W., on a true line, bet. secs. 5 and 8,
over rolling land.
Set an iron post, 3 ft. long, 1 in. diam., in a mound of
stone, (impracticable to set post in the ground) for $\frac{1}{4}$
sec. cor., with brass cap, marked



and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
N. of cor.
41.00 Top of butte.
65.00 Wash, course SE.
73.00 Wash, course S.
75.50 S. edge of mesa.
80.10 The cor. of secs. 5, 6, 7 and 8.

Land, rolling.
Soil, rocky clay; 3rd and 4th rate.
No timber.

40.00 West, on a random line, bet. secs. 6 and 7.
Set temp. $\frac{1}{4}$ sec. cor.
78.59 Intersect W. bdy. of Tp., (2nd G. M. E.) 21 lks. S. of the
cor. of secs. 1, 6, 7 and 12, which is a stone, firmly
set, marked and witnessed as described by the Surveyor
General.

38.59 Thence S.89°51'E., on a true line, bet. secs. 6 and 7,
over rolling land.
Set an iron post, 3 ft. long, 1 in. diam., in a mound of
stone, for $\frac{1}{4}$ sec. cor., (impracticable to set post in
the ground) with brass cap, marked

Chains

$$\begin{array}{r} S\ 6 \\ \frac{1}{4} \\ \hline S\ 7 \\ 1916 \end{array}$$

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

78.59 The cor. of secs. 5, 6, 7 and 8.

Land, rolling.
Soil, rocky clay; 4th rate.
No timber.

40.00 North, bet. secs. 5 and 6, on a random line.
Set temp. ¼ sec. cor.

80.02 Intersect N. bdy. of Tp. 8 lks. W. of the cor. of secs. 5, 6, 31 and 32, hereinbefore described.

40.02 Thence S.0°03'W., on a true line, bet. secs. 5 and 6, over rolling land.
Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, for ¼ sec. cor., (impracticable to set post in the ground) with brass cap, marked

$$\begin{array}{r} \frac{1}{4} \\ S6 | S5 \\ 1916 \end{array}$$

78.00 and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
Wash, course E.

80.02 The cor. of secs. 5, 6, 7 and 8.

Land, rolling.
Soil, rocky clay; 4th rate.
No timber.

Boundaries of T. 26 N., R. 9 E.

Latitudes, Departures, and Closing Errors.

Line designated	True Course	Dist. chs.	Latitudes		Departures	
			N. chs.	S. chs.	E. chs.	W. chs.
South Boundary	N.89°55'W.	479.27	.72			479.27
West Boundary (2nd G. M. E.)	North	480.00	480.00			
North Boundary	S.89°49'E.	478.55		1.56	478.55	
East Boundary	South	480.00		480.00		
Convergency					.52	
Totals			480.72	481.56	479.07	479.27
				480.72		479.07
Error in latitude				.84		
						Error in departure .20

This township consists of open, rolling land, somewhat broken by low mesas and small ravines. General course of drainage is east.

The soil is shallow, less than a foot deep, and rocky; non-agricultural. The township contains no permanent water.

With the exception of a few soap weed and a small amount of rabbit brush, there is no vegetation.

There are no settlers.

No evidence of valuable mineral was observed.

T. 26 N., R. 9 E.

Date Diagram.

BOOK 8268

2nd Guide Meridian East

	3-14-16	3-14-16	3-14-16	3-14-16	3-14-16	3-14-16					
6	4-10-16	5	4-10-16	4	4-10-16	3	4-8-16	2	4-8-16	1	3-6-16
4-10-16		4-10-16		4-10-16		4-8-16		4-8-16		4-8-16	
7	4-10-16	8	4-10-16	9	4-8-16	10	4-7-16	11	4-7-16	12	3-6-16
4-10-16		4-10-16		4-7-16		4-7-16		4-5-16		4-4-16	
18	4-10-16	17	4-7-16	16	4-7-16	15	4-5-16	14	4-4-16	13	3-6-16
4-8-16		4-7-16		4-7-16		4-6-16		4-5-16		4-2-16	
19	4-8-16	20	4-7-16	21	4-6-16	22	4-5-16	23	4-4-16	24	3-6-16
4-6-16		4-7-16		4-6-16		4-6-16		4-5-16		4-2-16	
30	4-6-16	29	4-6-16	28	4-6-16	27	4-5-16	26	4-2-16	25	3-6-16
4-2-16		4-6-16		4-2-16		4-5-16		4-4-16		4-2-16	
31	4-2-16	32	4-2-16	33	4-5-16	34	4-5-16	35	4-2-16	36	3-6-16
4-2-16		4-2-16		4-5-16		4-5-16		4-2-16		3-6-16	

Lines run by Surveyor Johnston on dates shown above.

Lines run by Transitman Inch on dates shown above.

CERTIFICATE OF UNITED STATES SURVEYOR-

TRANSITMAN.

941827.1338

U.S. Transitman,

I, Philip L. Inch, U.S. Surveyor, hereby certify upon honor that, in pursuance

of special instructions received from the U. S. Surveyor General for Group 66, Arizona,

bearing date of the 4th day of January, 1916, I have well, faithfully, and truly

in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instruc-

tions, and the laws of the United States, surveyed all those parts or portions of the

North Boundary, and

Subdivision lines of

TOWNSHIP 26 NORTH, RANGE 9 EAST,

of the Gila and Salt

River Base and Meridian, in the State of Arizona,

and by diagram on page 29 hereof

the foregoing field notes as having been executed by me, and under my direction; and that all the corners of

said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instruc-

tions, and the special written instructions of the U. S. Surveyor General for Group 66, Arizona,

and in the specific manner described in the field notes, and that the foregoing are the original field notes of

such survey.

Philip L. Inch
U.S. Surveyor
U.S. Transitman.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix, Ariz. FEB 8 1919.

The foregoing field notes of the survey of the

North Boundary, and

Subdivision lines of

TOWNSHIP 26 NORTH, RANGE 9 EAST,

of the Gila and Salt River Base and Meridian, in the State of Arizona,

executed by Philip L. Inch, U.S. Transitman,

under his special instructions dated Jan. 4, 1916, for Gp. 66, Ariz., 1916, having been

critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys

they describe, are hereby approved.

Francis A. Frost
U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above described surveys in

has been correctly copied from the original notes on file in this office.