

3264

Book "E"

4-679

BOOK 3264

125

(1)

FIELD NOTES

OF THE SURVEY OF THE

East and North boundaries, and

Subdivision lines of

TOWNSHIP 27 NORTH, RANGE 9 EAST.

Of the Gila and Salt River Base and Meridian,

In the State of Arizona.

EXECUTED BY

Theodore O. Johnston, U. S. Surveyor,

and

Philip L. Inch, U. S. Transitman.

~~In the capacity of U. S. Surveyor~~, under instructions dated January 4, 1916, issued by the United States Surveyor General to govern surveys included in Group No. 66, which were approved by the Commissioner of the General Land Office, January 17, 1916.

Survey commenced March 15, 1916.

Survey completed " 28, 1916.

Executed under Assignment
Instructions dated Feb. 3, 1916.

3264

3264

1A


3264

Book "E"

Group 66 - - - Arizona.

BOOK 3264

INDEX DIAGRAM.

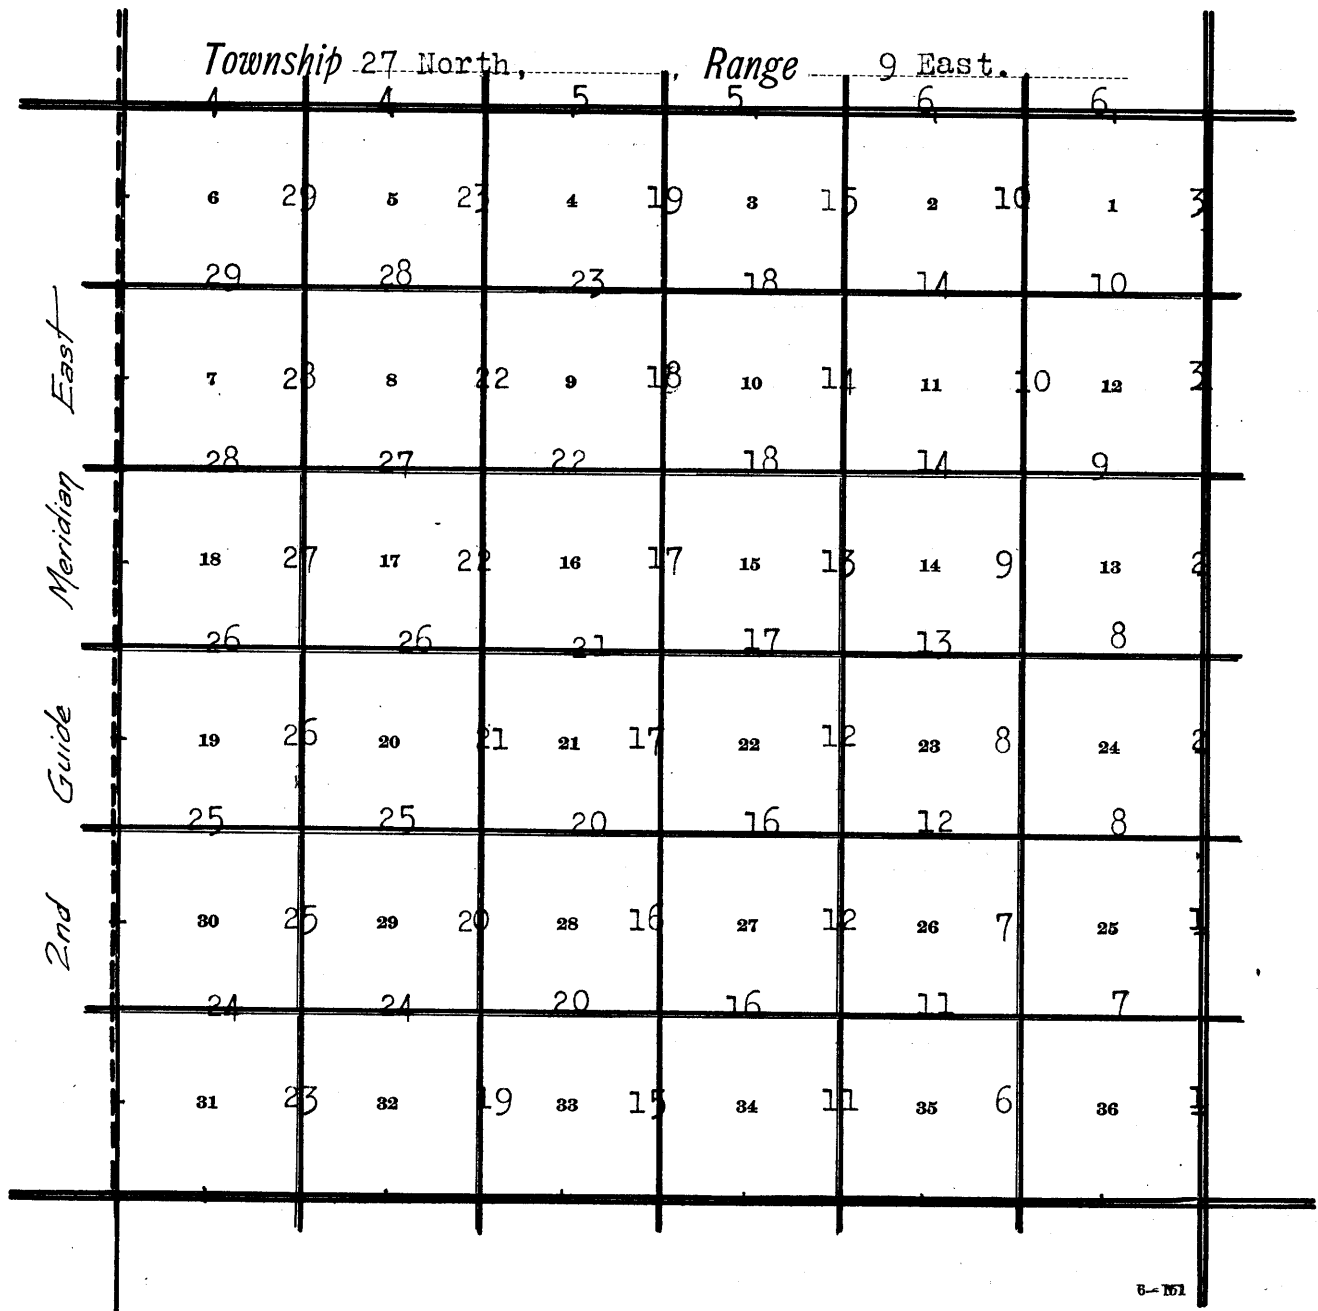

==== Lines surveyed under this Group.

----- " retraced " " "

_____ Accepted surveys.

Chains

Survey executed by Theo. O. Johnston, U. S. Surveyor, and Philip L. Inch, U. S. Transitman. The dates of survey shown on diagram on page 31 hereof. The instruments used are described, with record of approval by the Assistant Supervisor of Surveys, District No. 5, and field tests, in book A.

All lines were originated by deflection from true meridians determined by observations on Polaris at elongation, records of which appear in books C and F; and were projected by transit lines, with carefully measured angles.

E. Bdy., T. 27 N., R. 9 E.

From the cor. of Tps., 26 and 27 N., Rs. 9 and 10 E., described in book C;

North, bet. secs. 31 and 36, over broken land.

27.50

Wash, course E.

39.90

Wash, course E.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S36 | S31

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

63.00

N. edge of mesa. Desc. 200 ft., on N. slope.

80.00

Left edge of main wash, course NW.

Set an iron post, 3 ft. long, 3 ins. diam., in a mound of stone, (impracticable to set post in the ground) for cor. of secs. 25, 30, 31 and 36, with brass cap, marked

T T27N
R9E | R10E
S25 | S30

S36 | S31

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, broken mesa and mountainous. Soil, rocky; 4th rate. No timber.

North, bet. secs. 25 and 30, over broken land.

16.00

Wash, course NW.

17.00

Point of malpais spur, projecting W.

27.50

Wash, course NW.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked


S25 | S30

1916

Chains

and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.

- 45.00 Wash, course NW. Asc. 95 ft.
- 50.00 Point of malpais spur, projecting W. Desc. 80 ft.
- 60.00 ft. of descent.
- 80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 19, 24, 25 and 30, with brass cap, marked




1916

and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.

Land, broken, rolling and mountainous.
Soil, rocky; 4th rate.
No timber.

North, bet. secs. 19 and 24,
over broken land.


- 5.00 Wash, course NE.
- 31.00 Wash, course NW.
- 33.75 Top of low spur, projecting W.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked



1916

and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.

- 50.00 Wash, course NW.
- 76.00 Wash, course E.
- 80.00 Set an iron post, 3 ft. long, 3 ins. diam., in a mound of stone, (impracticable to set post in the ground) for cor. of secs. 13, 18, 19 and 24, with brass cap, marked




1916

and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.

Land, broken and rolling.
Soil, rocky; 4th rate.
No timber.

North, bet. secs. 13 and 18,
over rolling broken land, descending over sandstone
boulders.

- 40.00 Set an iron post, 3 ft. long, 1 in. diam., in stone mound, (impracticable to set post in the ground) for ¼ sec. cor., with brass cap, marked




1916

and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.

Chains

78.00 Wash, course E.
 80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 7, 12, 13 and 18, with brass cap, marked




1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling and broken.
 Soil, clay; 4th rate.
 No timber.


40.00 North, bet. secs. 7 and 12, over rolling land.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked



1916

dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, 3½ ft. base, 1½ ft. high, W. of cor.

80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 1, 6, 7 and 12, with brass cap, marked




1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling.
 Soil, rocky clay; 4th rate.
 No timber.


40.00 North, bet. secs. 1 and 6, over rolling land.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked



1916

dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, 3½ ft. base, 1½ ft. high, W. of cor.

80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of Tps. 27 and 28 N., Rs. 9 and 10 E., with brass cap, marked



Chains

and raise a mound of stone, 2 ft. base, 1½ ft. high, S. of cor.

Land, rolling.
Soil, rocky clay; 3rd and 4th rate.
No timber.

N. Bdy., T. 27 N., R. 9 E.

From the cor. of Tps. 27 and 28 N., Rs. 9 and 10 E., hereinbefore described;

477.84 West, on a random line, on N. bdy. of Tp., setting temp. cors. at intervals of 40.00 chs.
Fall 24 lks. S. of the cor. of Tps. 27 and 28 N., Rs. 8 and 9 E., on 2nd G. M. E., which is a stone, firmly set, marked and witnessed as described by the Surveyor General.

33.85 Thence S. 89° 58' E., on a true line, bet. secs. 6 and 31, over rolling land.
37.84 Wash, course N.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

S 31
¼
S 6
1916

46.85 and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
77.84 Wash, course N.
Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 5, 6, 31 and 32, with brass cap, marked

T28N	R 9E
S31	S32
S6	S5
T27N	
1916	

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling.
Soil, rocky; 3rd and 4th rate.
No timber.

31.00 S. 89° 58' E., on a true line, bet. secs. 5 and 32, over rough, broken land.
36.00 Flagstaff-tuba road bears NE. and SW.
40.00 Ravine, course NE.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

S 32
¼
S 5
1916

43.00 and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
49.00 Left edge of canyon 140 ft. deep, course NE.
67.00 Right edge of same.
Wash, course N.

Chains

80.00 Set an iron post, 3 ft. long, 3 ins. diam., in a mound of stone, (impracticable to set post in the ground) for cor. of secs. 4, 5, 32 and 33, with brass cap, marked

T28N	R 9E
S32	S33
S5	S4
T27N	
1916	

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rough and broken.
Soil, 4th rate.
No timber.

S. 89° 58' E., bet. secs. 4 and 33, over broken land, across mesa. E. edge of mesa bears NE. and SW. Desc. on gradual E. slope.

25.00


40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

S33	
¼	
S 4	
1916	

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

50.00 Ft. of mesa.

80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 3, 4, 33 and 34, with brass cap, marked



and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, broken.
Soil, rocky clay; 3rd and 4th rate.
No timber.

S. 89° 58' E., bet. secs. 3 and 34, over rolling land.


40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

S34	
¼	
S 3	
1916	

dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, 3½ ft. base, 1½ ft. high, N. of cor.

65.50 Small wash, course S.

80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 2, 3, 34 and 35, with brass cap, marked



Chains

dig pits, 18x18x12 ins., in each sec., 5 1/2 ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, rolling.
Soil, clay loam; 3rd rate.
No timber.

S. 89° 58' E., bet. secs. 2 and 35, over rolling land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked S35

1/4
S 2
1916

dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 1, 2, 35 and 36, with brass cap, marked

T28N | R 9E
S35 | S36

S2 | S1

T27N
1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling.
Soil, sandy clay loam; 3rd rate.
No timber.

S. 89° 58' E., bet. secs. 1 and 36, over rolling land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked S36

1/4
S 1
1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

80.00 The cor. of Tps. 27 and 28 N., Rs. 9 and 10 E., hereinbefore described.

Land, rolling.
Soil, sandy clay loam; 3rd rate.
No timber.

Subdivision of T. 27 N., R. 9 E.

From the cor. of secs. 1, 2, 35 and 36, on S. bdy. of Tp., described in book D;

N. 0° 01' W., bet. secs. 35 and 36, over rolling land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked

Subdivision of T. 27 N., R. 9 E.

7

Chains

		$\frac{1}{4}$ S35 S36 1916 and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. 46.60 N. edge of mesa. Desc. 75 ft. 50.00 Ft. of slope. 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 25, 26, 35 and 36, with brass cap, marked T27N R 9E S26 S25 S35 S36 1916 and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. Land, rolling and rocky. Soil, rocky; 4th rate. No timber.

40.00	Set temp. $\frac{1}{4}$ sec. cor.	East, on a random line, bet. secs. 25 and 36.
80.00	Intersect E. bdy. of Tp. 35 lks. N. of the cor. of secs. 25, 30, 31 and 36, hereinbefore described.	
40.00	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked	Thence N.89°45'W., on a true line, bet. secs. 25 and 36 over broken land.
		$\frac{1}{4}$ S25 S36 1916 and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor. 80.00 The cor. of secs. 25, 26, 35 and 36. Land, rolling. Soil, 4th rate. No timber.

40.00	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec; cor., with brass cap, marked	N.0°01'W., bet. secs. 25 and 26, over broken land.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 23, 24, 25 and 26, with brass cap, marked	$\frac{1}{4}$ S26 S25 1916 and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. T27N R 9E S23 S24 S26 S25 1916 and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Chains

Land, rolling and broken.
Soil, rocky; 4th rate.
No timber.

40.00 East, on a random line, bet. secs. 24 and 25.
79.94 Set temp. $\frac{1}{4}$ sec. cor.
Intersect E. Bdy. of Tp. 40 lks. N. of the cor. of secs.
19, 24, 25 and 30, hereinbefore described.

.50 Thence N.89°43'W., on a true line, bet. secs. 24 and 25,
39.97 over mountainous land.
Ascend.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
S24

$\frac{1}{4}$
S25
1916

50.00 and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
79.94 N. of cor.
Summit of ascent, 425 ft. above 0.50 ch. pt.
The cor. of secs. 23, 24, 25 and 26.

Land, mountainous and rolling.
Soil, rocky; 4th rate.
No timber.

10.00 N.0°01'W., bet. secs. 23 and 24,
40.00 over broken land.
Wash, course E.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
S23 | S24
1916

44.00 and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
58.00 W. of cor.

Wash, course NE.

71.00 Wash, course NE.

80.00 Wash, course E.

Set an iron post, 3 ft; long, 2 ins. diam., in a mound of
stone, (impracticable to set post in the ground) for cor.
of secs. 13, 14, 23 and 24, with brass cap, marked

T27N | R 9E
S14 | S13
S23 | S24

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

Land, broken.
Soil, gravelly clay; 3rd and 4th rate.
No timber.

40.00 East, on a random line, bet. secs. 13 and 24.
79.86 Set temp. $\frac{1}{4}$ sec. cor.
Intersect E. bdy. of Tp. 38 lks. N. of the cor. of secs.
13, 18, 19 and 24, hereinbefore described.

Thence N.89°44'W., on a true line, bet. secs. 13 and 24,
over broken land.

Chains

4.85 Wash, course SE.
39.93 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S13
 $\frac{1}{4}$
S24
1916

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

45.00 Asc. 80 ft., on rocky SE. slope.

56.00 Point of spur, projecting NE. Desc. 20 ft., on rocky slope.

60.00 Ft. of descent. Asc. 150 ft., on SE. slope.

79.86 The cor. of secs. 13, 14, 23 and 24.

Land, rocky and broken.
Soil, rocky; 4th rate.
No timber.

N.0°01'W., bet. secs. 13 and 14,
over broken land, descending slightly.

7.00 Wash, course NE.

14.00 Wash, course NE.

37.50 Wash, course E. Ft. of descent.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
S14 | S13
1916

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

46.00 Wash, course E.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 11, 12, 13 and 14, with brass cap, marked

T27N | R 9E
S11 | S12

S14 | S13

1916

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Land, broken.
Soil, rocky; 3rd rate.
No timber.

East \downarrow on a random line, bet. secs. 12 and 13.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.94 Intersect E. bdy. of Tp. 20 lks. N. of the cor. of secs. 7, 12, 13 and 18, hereinbefore described.

Thence N.89°51'W., on a true line, bet. secs. 12 and 13, over broken land.

30.00 Asc. on E. slope.

31.00 Top of small butte. Desc. on NW. slope.

35.00 Wash, course SW.

39.97 Set an iron post 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S12
 $\frac{1}{4}$
S13
1916

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,

Chains

79.94 N. of cor.
Desc. gradually.
The cor. of secs. 11, 12, 13 and 14.

Land, broken.
Soil, rocky clay; 4th rate.
No timber.

40.00 N.0°01'W., bet. secs. 11 and 12,
over rolling land.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
S11 | S12

1916

80.00 dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.,
and raise a mound of earth, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high,
W. of cor.
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 1, 2, 11 and 12, with brass
cap, marked

T27N | R 9E
S2 | S1

S11 | S12

1916

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
W. of cor.

Land, rolling.
Soil, rocky clay; 4th rate.
No timber.

40.00 East, on a random line, bet. secs. 1 and 12.
Set temp. $\frac{1}{4}$ sec. cor.
79.82 Intersect E. bdy. of Tp. 16 lks. N. of the cor. of secs.
1, 6, 7 and 12, hereinbefore described.

Thence N.89°53'W., on a true line, bet. secs. 1 and 12,
over broken land.

4.80 Wash, course NE.
39.91 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S 1

$\frac{1}{4}$

S12

1916

79.82 dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.,
and raise a mound of earth, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high,
N. of cor.
The cor. of secs. 1, 2, 11 and 12.

Land, rolling and broken.
Soil, rocky clay; 4th rate.
No timber.

40.00 N.0°01'W., on a random line, bet. secs. 1 and 2,
Set temp. $\frac{1}{4}$ sec. cor.
79.74 Intersect N. bdy. of Tp. 12 lks. E. of the cor. of secs.
1, 2, 35 and 36, hereinbefore described.

Subdivision of T. 27 N., R. 9 E.

Chains

Thence S.0°06'E., on a true line, bet. secs. 1 and 2,
 over broken, rolling land.
 39.74 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
 S2 | S1

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.
 46.95 N. bank of wash, course NE.
 79.74 The cor. of secs. 1, 2, 11 and 12.

Land, rolling and broken.
 Soil, rocky clay; 4th rate:
 No timber.

From the cor. of secs. 2, 3, 34 and 35, on S. bdy. of Tp.,
 described in book D;

N.0°01'W., bet. secs. 34 and 35,
 over rolling land.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
 S34 | S35

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 26, 27, 34 and 35, with brass
 cap, marked

T27N | R 9E
 S27 | S26

 S34 | S35

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.

Land, rolling and broken.
 Soil, sandy clay loam; 3rd rate.
 No timber.

East, on a random line, bet. secs. 26 and 35.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.00 Intersect N. and S. line 4 lks. N. of the cor. of secs.
 25, 26, 35 and 36,

Thence N.89°58'W., on a true line, bet. secs. 26 and 35,
 over rolling land.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S26
 $\frac{1}{4}$
 S35

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 N. of cor.
 42.60 E. edge of mesa. Thence over top of same.
 80.00 The cor. of secs. 26, 27, 34 and 35.
 Land, rolling. Soil, rocky clay and sand; 3rd and 4th rate.
 No timber.

12

Subdivision of T. 27 N., R. 9 E.

Chains

- N.0°01'W., bet. secs. 26 and 27,
over rolling land.
- 10.00 N. edge of mesa. Desc. on N. slope.
- 15.00 Ft. of descent.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
- $\frac{1}{4}$
S27 | S26
- 1916
- dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.,
and raise a mound of earth, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high,
W. of cor.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 22, 23, 26 and 27, with brass
cap, marked
- T27N | R 9E
S22 | S23

S27 | S26
- 1916
- and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
W. of cor.
- Land, rolling.
Soil, rocky clay; 3rd rate.
No timber.
-
- East, on a random line, bet. secs. 23 and 26.
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 80.18 Intersect N. and S. line 12 lks. N. of the cor. of secs.
23, 24, 25 and 26.
- Thence N.89°55'W., on a true line, bet. secs. 23 and 26,
over rolling land.
- 40.09 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
- S23
 $\frac{1}{4}$ -----
S26
1916
- and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
N. of cor.
- 80.18 The cor. of secs. 22, 23, 26 and 27.
- Land, rolling.
Soil, clay loam; 3rd rate.
No timber.
-
- N.0°01'W., bet. secs. 22 and 23,
over open rolling land.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
- $\frac{1}{4}$
S22 | S23
- 1916
- and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
W. of cor.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 14, 15, 22 and 23, with brass
cap, marked.

Subdivision of T. 27 N., R. 9 E.

Chains

T27N	R 9E
S15	S14
S22	S23

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling.

Soil, rocky clay; 3rd rate.

No timber.

40.00 S.89°55'E., on a random line, bet. secs. 14 and 23.
 Set temp. ¼ sec. cor.
 80.22 Intersect N. and S. line 9 lks. N. of the cor. of secs. 13, 14, 23 and 24.

Thence N.89°51'W., on a true line, bet. secs. 14 and 23, over broken land, descending slightly.

5.00 Wash, course NE.

17.50 Wash, course NE.

40.11 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

S14

¼

S23

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

80.22 The cor. of secs. 14, 15, 22 and 23.

Land, rolling.

Soil, rocky and sandy clay; 3rd and 4th rate.

No timber.

40.00 N.0°01'W., bet. secs. 14 and 15, over broken land.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

¼

S15	S14
-----	-----

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

47.00 Wash, course E.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 10, 11, 14 and 15, with brass cap, marked

T27N	R 9E
S10	S11
S15	S14

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling and broken.

Soil, rocky clay; 4th rate.


No timber.

Chains

40.00 East, on a random line, bet. secs. 11 and 14.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.14 Intersect N. and S. line 28 lks. N. of the cor. of secs.
 11, 12, 13 and 14.

Thence N.89°48'W., on a true line, bet. secs. 11 and 14,
 over broken rolling land.

15.00 Asc. gradually.
 33.00 Limestone ridge bears NW. and SE.
 37.65 Wash, course N.
 40.07 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked




and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 N. of cor.

48.00 Butte.
 56.00 Ridge bears NE. and SW.
 60.65 Wash, course NE. Asc. 250 ft.
 80.14 The cor. of secs. 10, 11, 14 and 15.

Land, broken, rolling and mountainous.
 Soil, rocky clay; 4th rate.
 No timber.


N.0°01'W., bet. secs. 10 and 11,
 over mountainous land, descending on rocky NE. slope.

23.90 Rocky ravine, 40 ft. deep, course NE.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.

45.80 Wash, course NE. Thence over rolling land.
 55.40 Wash, course NE.
 75.00 Wash, course NE.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 2, 3, 10 and 11, with brass
 cap, marked



1916
 and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.

Land, mountainous and rolling.
 Soil, rocky, 4th rate.
 No timber.

40.00 East, on a random line, bet. secs. 2 and 11.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.28 Intersect N. and S. line 21 lks. N. of the cor. of secs.
 1, 2, 11 and 12.

40.14 Thence N.89°51'W., on a true line, bet. secs. 2 and 11,
 over rolling land.
 Set an iron post, 3 ft. long, 1 in. diam., in a mound of
 stone, (impracticable to set post in the ground) for $\frac{1}{4}$

Chains

sec. cor., with brass cap, marked

S 2

$\frac{1}{4}$

S11

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

Cor is on rocky ridge bearing N. and S.

80.28 The cor. of secs. 2, 3, 10 and 11.

Land, rolling.

Soil, rocky and sandy; 4th rate.

No timber.

N.0°01'W., on a random line, bet. secs. 2 and 3.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.80 Intersect N. bdy. of Tp. 10 lks. W. of the cor. of secs. 2, 3, 34 and 35, hereinbefore described.

Thence S.0°03'W., on a true line, bet. secs. 2 and 3, over rolling land.

39.80 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$

S3 | S2

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

79.80 The cor. of secs. 2, 3, 10 and 11.

Land, rolling.

Soil, sandy; 4th rate.

No timber.

From the cor. of secs. 3, 4, 33 and 34, on S. bdy. of Tp., described in book D;

N.0°02'W., bet. secs. 33 and 34, over open rolling land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$

S33 | S34

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

55.00 Desc. on N. slope.

65.00 Ft. of descent, at N. ft. of mesa.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 27, 28, 33 and 34, with brass cap, marked

T27N | R 9E

S28 | S27

S33 | S34

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling. Soil, 3rd rate, clay; No timber.

Chains

40.00 East, on a random line, bet. secs. 27 and 34.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.00 Intersect N. and S. line 33 lks. N. of the cor. of secs.
 26, 27, 34 and 35.

Thence N.89°46'W., on a true line, bet. secs. 27 and 34,
 over rolling land.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$

 S34
 1916

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
 N. of cor.
 42.00 Spur projecting N.
 80.00 The cor. of secs. 27, 28, 33 and 34.

Land, rolling.
 Soil, rocky clay; 3rd rate.
 No timber.

40.00 N.0°02'W., bet. secs. 27 and 28,
 over open rolling land.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$

 S28 | S27
 1916

dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.,
 and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
 W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 21, 22, 27 and 28, with brass
 cap, marked

T27N | R 9E
 S21 | S22

 S28 | S27

1916
 and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
 W. of cor.

Land, rolling.
 Soil, rocky clay; 3rd rate.
 No timber.

40.00 East, on a random line, bet. secs. 22 and 27.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.06 Intersect N. and S. line 30 lks. N. of the cor. of secs.
 22, 23, 26 and 27.

Thence N.89°47'W., on a true line, bet. secs. 22 and 27,
 over rolling land.
 40.03 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$

 S27
 1916


and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
 N. of cor.

80.06 The cor. of secs. 21, 22, 27 and 28.
 Land, rolling. Soil, rocky clay; 3rd rate. No timber.

Chains

N.0°02'W., bet. secs. 21 and 22,
over open rolling land.


40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 15, 16, 21 and 22, with brass
cap, marked



1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

Land, rolling.

Soil, rocky clay; 3rd rate.

No timber.


East, on a random line, bet. secs. 15 and 22.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.10 Intersect N. and S. line 21 lks. N. of the cor. of secs.
14, 15, 22 and 23.

Thence N.89°51'W., on a true line, bet. secs. 15 and 22,
over rolling land, ascending slightly.

40.05 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
N. of cor.

80.10 The cor. of secs. 15, 16, 21 and 22.


Land, rolling.

Soil, sandy clay; 3rd rate.

No timber.

N.0°02'W., bet. secs. 15 and 16,
over rolling land.


40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



1916

dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.,
and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 9, 10, 15 and 16, with brass
cap, marked



1916

Chains

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling.
Soil, rocky; 4th rate.
No timber.

East, on a random line, bet. secs. 10 and 15.

40.00

Set temp. ¼ sec. cor.

80.18

Intersect N. and S. line 40 lks. N. of the cor. of secs. 10, 11, 14 and 15.


Thence N.89°43'W., on a true line, bet. secs. 10 and 15, over rolling land. Asc. 90 ft., on rocky NE. slope.

15.00

Summit of ascent.

40.09

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked



and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

80.18

The cor. of secs. 9, 10, 15 and 16.

Land, rolling and rolling mountainous.
Soil, rocky; 4th rate.
No timber.


N.0°02'W., bet. secs. 9 and 10, over rolling land.

27.50

Rocky canyon, 3 chs. wide, course E.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked




and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

80.00

Desc. gradually, on broken NE. slope.

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in a mound of stone, (impracticable to set post in the ground) for cor. of secs. 3, 4, 9 and 10, with brass cap, marked



and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling.
Soil, rocky; 4th rate.
No timber.

East, on a random line, bet. secs. 3 and 10.

40.00

Set temp. ¼ sec. cor.

80.10

Intersect N. and S. line 33 lks. N. of the cor. of secs. 2, 3, 10 and 11.

Thence N.89°46'W., on a true line, bet. secs. 3 and 10,

Chains

over rolling mountainous and broken land.
 28.00 Wash, course SE.
 35.00 Asc. over sandstone ledges, on NE. slope.
 40.05 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$ S 3
 S10
 1916
 and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 N. of cor.
 41.00 Asc. over gray sandstone formation.
 43.60 Rocky ravine, course NE. Asc.
 68.00 Rocky wash, course NE.
 80.10 The cor. of secs. 3, 4, 9 and 10,
 300 ft. above ravine.
 Land, rolling mountainous and broken.
 Soil, rocky; 4th rate.
 No timber.

North, on a random line, bet. secs. 3 and 4.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.62 Intersect N. bdy. of Tp. 7 lks. W. of the cor. of secs.
 3, 4, 33 and 34, hereinbefore described.
 Thence S.0°03'W., on a true line, bet. secs. 3 and 4,
 over broken, rolling land,
 39.62 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$
 S4 | S3
 1916
 and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.
 72.80 S. edge of canyon, course NE.
 79.62 The cor. of secs. 3, 4, 9 and 10.
 Land, rolling and broken.
 Soil, rocky; 4th rate.
 No timber.

From the cor. of secs. 4, 5, 32 and 33, on S. bdy. of Tp.,
 described in book D;
 N.0°03'W., bet. secs. 32 and 33,
 over rolling land.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$
 S32 | S33
 1916
 and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.
 50.00 N. edge of mesa.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 28, 29, 32 and 33, with brass
 cap, marked
 T27N | R 9E
 S29 | S28
 S32 | S33
 1916

Chains

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling and broken.
Soil, rocky clay; 3rd rate.
No timber.

40.00
80.00

East, on a random line, bet. secs. 28 and 33,
Set temp. ¼ sec. cor.
Intersect N. and S. line 32 lks. N. of the cor. of secs. 27, 28, 33 and 34.

40.00

Thence N.89°46'W., on a true line, bet. secs. 28 and 33, over rolling land.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

S28
¼
S33
1916

80.00

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
The cor. of secs. 28, 29, 32 and 33.

Land, rolling.
Soil, rocky clay; 3rd rate.
No timber.

11.20
40.00

N.0°03'W., bet. secs. 28 and 29, over rolling land.
Spur, projecting NE.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

¼
S29 | S28
1916

80.00

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 20, 21, 28 and 29, with brass cap, marked

T27N R 9E
S20 | S21
S29 | S28

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling.
Soil, rocky clay; 3rd and 4th rate.
No timber.

40.00
80.04

East, on a random line, bet. secs. 21 and 28.
Set temp. ¼ sec. cor.
Intersect N. and S. line 26 lks. N. of the cor. of secs. 21, 22, 27 and 28.

Thence N.89°49'W., on a true line, bet. secs. 21 and 28, over rolling and broken land.

Subdivision of T. 27 N., R. 9 E.

21

Chains

5.00 Butte.
40.02 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
S21
 $\frac{1}{4}$
S28
1916
and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.
80.04 The cor. of secs. 20, 21, 28 and 29.

Land, rolling and broken.
Soil, rocky clay; 3rd and 4th rate.
No timber.

40.00 N.0°03'W., bet. secs. 20 and 21, over rolling land.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$
S20 | S21
1916
and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 16, 17, 20 and 21, with brass cap, marked
T27N | R 9E
S17 | S16
S20 | S21
1916
and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Land, rolling.
Soil, rocky clay; 4th rate.
No timber.

40.00 East, on a random line, bet. secs. 16 and 21.
Set temp. $\frac{1}{4}$ sec. cor.
80.06 Intersect N. and S. line 33 lks. N. of the cor. of secs. 15, 16, 21 and 22.

Thence N.89°46'W., on a true line, bet. secs. 16 and 21, over rolling land.
40.03 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
S16
 $\frac{1}{4}$
S21
1916
and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.
80.06 The cor. of secs. 16, 17, 20 and 21.

Land, rolling.
Soil, rocky clay; 4th rate.
No timber.

Chains

40.00 N.0°03'W., bet. secs. 16 and 17,
over rolling land.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor.;, with brass cap, marked

$\frac{1}{4}$
S17 | S16
1916

80.00 and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
W. of cor.
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 8, 9, 16 and 17, with brass
cap, marked

T27N | R 9E
S8 | S9

S17 | S16
1916

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
W. of cor.

Land, rolling.
Soil, rocky clay; 3rd and 4th rate.
No timber.

40.00 East, on a random line, bet. secs. 9 and 16.
Set temp. $\frac{1}{4}$ sec. cor.

80.10 Intersect N. and S. line 35 lks. N. of the cor. of secs.
9, 10, 15 and 16.

40.05 Thence N.89°45'W., on a true line, bet. secs. 9 and 16,
over rolling land.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S 9
 $\frac{1}{4}$

S16
1916

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
N. of cor.

65.00 Wash, 4 chs. wide, course NW.

80.10 The cor. of secs. 8, 9, 16 and 17.

Land, rolling.
Soil, rocky; 4th rate.
No timber.

40.00 N.0°03'W., bet. secs. 8 and 9,
over rolling land.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
S8 | S9
1916

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 4, 5, 8 and 9, with brass cap,
marked

T27N | R 9E
S5 | S4

S8 | S9
1916

Subdivision of T. 27 N., R. 9 E.

Chains

and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.

Land, rolling.
Soil, rocky clay; 3rd rate.
No timber.

40.00 East, on a random line, bet. secs. 4 and 9;
Set temp. ¼ sec. cor.
80.12 Intersect N. and S. line 32 lks. N. of the cor. of secs.
3, 4, 9 and 10.

15.10 Thence N. 89°46' W., on a true line, bet. secs. 4 and 9,
over rolling and broken land.
W. edge of canyon, course NE.
40.06 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for ¼ sec. cor., with brass cap, marked

S 4
¼

S 9
1916

73.50 and raise a mound of stone, 2 ft. base, 1½ ft. high,
N. of cor.
E. edge of draw, course NE.
79.10 W. edge of same.
80.12 The cor. of secs. 4, 5, 8 and 9.

Land, rolling and broken.
Soil, rocky clay; 4th rate.
No timber.

40.00 North, on a random line, bet. secs. 4 and 5.
Set temp. ¼ sec. cor.
79.55 Intersect N. bdy. of Tp. 2 lks. W. of the cor. of secs.
4, 5, 32 and 33, hereinbefore described.

Thence S. 0°01' W., bet. secs. 4 and 5, on a true line,
over rolling and broken land.
.85 Left edge of canyon, course NE.
4.50 Right edge of same.
39.55 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for ¼ sec. cor., with brass cap, marked

¼
S 5 S 4

1916

79.55 and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.
The cor. of secs. 4, 5, 8 and 9.

Land, broken and rolling.
Soil, rocky clay; 4th rate.
No timber.

From the cor. of secs. 5, 6, 31 and 32, on S. bdy. of Tp.,
described in book D;

40.00 N. 0°03' W., bet. secs. 31 and 32,
over rolling land.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for ¼ sec. cor., with brass cap, marked

Chains

$$\frac{1}{4}$$

S31	S32
-----	-----

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 29, 30, 31 and 32, with brass cap, marked

T27N	R 9E
S30	S29
S31	S32

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling.
Soil, clay; 3rd rate.
No timber.

40.00 East, on a random line, bet. secs. 29 and 32. Set temp. ¼ sec. cor.

79.98 Intersect N. and S. line 26 lks. N. of the cor. of secs. 28, 29, 32 and 33.

Thence N.89°49'W., on a true line, bet. secs. 29 and 32, over rolling land, ascending.

3.30 E. edge of mesa, 55 ft. above sec. cor.

39.99 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

S29

$$\frac{1}{4}$$

S32

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

79.98 The cor. of secs. 29, 30, 31 and 32.

Land, rolling.
Soil, 3rd rate.
No timber.

40.00 N.89°49'W., on a random line, bet. secs. 30 and 31. Set temp. ¼ sec. cor.

78.38 Intersect W. bdy. of Tp., (2nd G. M. E.) 5 lks. N. of the cor. of secs. 25, 30, 31 and 36, which is a stone, firmly set, marked and witnessed as described by the Surveyor General.

Thence S.89°51'E., on a true line, bet. secs. 30 and 31, over rolling land.

35.40 Road bears N. and S.

38.38 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

S30

$$\frac{1}{4}$$

S31

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

38.78 Telephone line bears N. and S.

57.40 W. edge of mesa.

78.38 The cor. of secs. 29, 30, 31 and 32.

Land, rolling. Soil, rocky clay; 4th rate. No timber.

Chains

N.0°03'W., bet. secs. 29 and 30,
over rolling land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
S30 | S29

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

41.80 Road bears NE. and SW.

50.00 N. edge of mesa.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 19, 20, 29 and 30, with brass
cap, marked

T27N | R 9E
S19 | S20

S30 | S29

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

Land, rolling.
Soil, clay; 4th rate.
No timber.

East, on a random line, bet. secs. 20 and 29.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.06 Intersect N. and S. line 4 lks. N. of the cor. of secs.
20, 21, 28 and 29.

Thence N.89°58'W., on a true line, bet. secs. 20 and 29,
over rolling land.

40.03 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S20
 $\frac{1}{4}$ -----
S29
1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft high,
N. of cor.

80.06 The cor. of secs. 19, 20, 29 and 30.

Land, rolling.
Soil, rocky clay; 4th rate.
No timber.

West, on a random line, bet. secs. 19 and 30.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

78.16 Intersect W. bdy. of Tp. 26 lks. S. of the cor. of secs.
19, 24, 25 and 30, (on 2nd G. M. E.) which is a stone,
firmly set, marked and witnessed as described by the
Surveyor general.

Thence S.89°49'E., on a true line, bet. secs. 19 and 30,
over rolling land.

26.50 Butte.

38.16 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S19
 $\frac{1}{4}$ -----
S30
1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
N. of cor.

Chains

56.50 Road bears N. and S.
78.16 The cor. of secs. 19, 20, 29 and 30.

Land, rolling.
Soil, rocky clay; 3rd rate.
No timber.

40.00 N.0°03'W., bet. secs. 19 and 20,
over rolling land.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S19 | S20

1916

80.00 and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 17, 18, 19 and 20, with brass
cap, marked

T27N	R 9E
S18	S17
S19	S20

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

Land, rolling.
Soil, rocky clay; 3rd rate.
No timber.

40.00 East, on a random line, bet. secs. 17 and 20.
Set temp. $\frac{1}{4}$ sec. cor.
80.12 Intersect N. and S. line 10 lks. N. of the cor. of secs.
16, 17, 20 and 21.

40.06 Thence N.89°56'W., on a true line, bet. secs. 17 and 20,
over rolling land,
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S17

$\frac{1}{4}$

S20

1916

80.12 and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
N. of cor.
The cor. of secs. 17, 18, 19 and 20.

Land, rolling.
Soil, rocky clay; 3rd and 4th rate.
No timber.

40.00 West, on a random line, bet. secs. 18 and 19.
Set temp. $\frac{1}{4}$ sec. cor.
78.00 Intersect W. bdy. of Tp. (2nd G. M. E.) 8 lks. N. of the
cor. of secs. 13, 18, 19 and 24, which is a stone,
firmly set, marked and witnessed as described by the
Surveyor General.

Thence N.89°57'E., on a true line, bet. secs. 18 and 19,
over rolling land.

Chains

38.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S18

$\frac{1}{4}$

S19

1916

dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

62.80 Road bears NE. and SW.

70.80 Tuba City road bears N. and S.

78.00 The cor. of secs. 17, 18, 19 and 20.

Land, rolling.

Soil, rocky and sandy; 4th rate.

No timber.

N.0°03'W., bet. secs. 17 and 18, over rolling land.

27.00 Fence bears NW. and SE.

29;00 Corral fence, at gate.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$

S18 | S17

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

41.50 W. end of James Giddings reservoir, 10 chs. long, 4 chs. wide,

50.00 James Giddings house bears E., about 12 chs. dist.

54.10 Fence bears N.70°E. and S.70°W.

55.15 Road from Tuba City to Flagstaff bears NE. and SW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 7, 8, 17 and 18, with brass cap, marked

T27N | R 9E

S7 | S8

S18 | S17

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, rolling.

Soil, rocky; 4th rate.

No timber.

East, on a random line, bet. secs. 8 and 17.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.12 Intersect N. and S. line 28 lks. N. of the cor. of secs. 8, 9, 16 and 17.

Thence N.89°48'W., on a true line, bet. secs. 8 and 17, over rolling land.

26.10 Rocky wash, 100 lks. wide, course NW.

38.80 Box canyon, 3 chs. wide, course NW.

40.06 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S 8

$\frac{1}{4}$

S17

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.


Chains

78.80 Flagstaff-Tuba City road bears N. and S.
80.12 The cor. of secs. 7, 8, 17 and 18.

Land, rolling.
Soil, rocky; 4th rate.
No timber.

40.00 West, on a random line, bet. secs. 7 and 18.
Set temp. 1/4 sec. cor.
78.00 Intersect W. bdy. of Tp., (2nd G. M. E.) 12 lks. N. of the
cor. of secs. 7, 12, 13 and 18, which is a stone, firmly
set, marked and witnessed as described by the Surveyor
General.

38.00 Thence N. 89° 55' E., on a true line, bet. secs. 7 and 18,
over rolling land.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for 1/4 sec. cor., with brass cap, marked




and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
N. of cor.

78.00 The cor. of secs. 7, 8, 17 and 18.


Land, rolling.
Soil, rocky; 4th rate.
No timber.

40.00 N. 0° 03' W., bet. secs. 7 and 8,
over rolling land.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for 1/4 sec. cor., with brass cap, marked



and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 5, 6, 7 and 8, with brass cap,
marked



and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
W. of cor.

Land, rolling.
Soil, rocky; 4th rate.
No timber.

40.00 East, on a random line, bet. secs. 5 and 8.
Set temp. 1/4 sec. cor.
80.00 Intersect ... line at the cor. of secs. 4, 5, 8 and 9.

20.00 Thence West, on a true line, bet. secs. 5 and 8,
over broken land.
Desc. on W. slope.

Chains	
32.00	E. edge of canyon, course N.
35.75	W. edge of same.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
	$\begin{array}{r} S\ 5 \\ \frac{1}{4} \\ \hline S\ 8 \\ 1916 \end{array}$
	and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
49.50	E. edge of coulee, course NE.
54.50	W. edge of same.
60.00	Telephone line bears N. and S.
63.40	Flagstaff-Tuba City road bears N. and S.
80.00	The cor. of secs. 5, 6, 7 and 8.
	Land, rolling. Soil, clay and gravel; 3rd rate. No timber.

	West. on a random line, bet. secs. 6 and 7.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
77.78	Intersect W. bdy. of Tp., (2nd G. M. E.) 20 lks. N. of the cor. of secs. 1, 6, 7 and 12, which is a stone, firmly set, marked and witnessed as described by the Surveyor General.
	Thence N. $89^{\circ}51'$ E., on a true line, bet. secs. 6 and 7, over rolling land.
37.78	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
	$\begin{array}{r} S\ 6 \\ \frac{1}{4} \\ \hline S\ 7 \\ 1916 \end{array}$
	dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist. and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
77.78	The cor. of secs. 5, 6, 7 and 8.
	Land, rolling. Soil, clay; 4th rate. No timber.

	N. $0^{\circ}03'$ W., on a random line, bet. secs. 5 and 6.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.65	Intersect N. bdy. of Tp. 16 lks. W. of the cor. of secs. 5, 6, 31 and 32, hereinbefore described.
	Thence S. $0^{\circ}04'$ W., on a true line, bet. secs. 5 and 6, over rolling land, ascending gradually on gentle N. slope.
19.65	Summit of ascent.
39.65	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
	$\begin{array}{r} \frac{1}{4} \\ S6\ \ S5 \\ \hline 1916 \end{array}$
	and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
79.65	The cor. of secs. 5, 6, 7 and 8.
	Land, rolling. Soil, rocky; 4th rate. No timber.

Boundaries of T. 27 N., R. 9 E.

Latitudes, Departures, and Closing Errors.

Line designated	True Course	Dist. chs.	Latitudes		Departures	
			N. chs.	S. chs.	E. chs.	W. chs.
South Boundary	N.89°49'W.	478.55	1.56			478.55
West Boundary (2nd G. M. E.)	N.0°05'E.	39.96	39.96			.06
	N.0°06'E.	40.02	40.02			.07
	N.0°05'E.	39.96	39.96			.06
	N.0°05'E.	40.00	40.00			.06
	N.0°06'E.	40.00	40.00			.07
	N.0°06'E.	40.00	40.00			.07
	N.0°09'E.	40.02	40.02			.11
	N.0°02'E.	40.02	40.02			.02
	N.0°09'E.	40.03	40.03			.11
	N.0°07'E.	40.00	40.00			.08
	N.0°08'E.	39.97	39.97			.09
	N.0°06'E.	40.05	40.05			.07
North Boundary	S.89°58'E.	477.84		.24	477.84	
East Boundary	South.	480.00		480.24		
Convergency					.52	
Totals			481.59	480.24	479.23	478.55
			480.24		478.55	
Error in latitude,			1.35			
	Error in departure				0.68	

General Description.

The surface of this township varies from gently rolling to rolling mountainous, broken by the slopes of mesas and ravines, drainage north and east.

The soil is shallow and rocky; 3rd and 4th rate. It supports a light growth of soap weed, rabbit brush and short grass, which furnishes fair grazing.

The only existing water is contained in a small reservoir in section 17. This reservoir, with other improvements, among which are a house and corral, valued approximately at \$3000, are the property of James Giddings.

There are no other settlers in the township.

Road and telephone line, N. and S., passes thru. the W. part of the Tp.

T. 27 N., R. 9 E.

Date Diagram.

	3-18-16	3-18-16	3-18-16	3-18-16	3-18-16	3-18-16		
Retraced Guide Meridian East 2nd	3-16-16	6	5	4	3	2	1	3-16-16
	3-28-16	3-28-16	3-28-16	3-28-16	3-28-16	3-28-16	3-26-16	3-16-16
	3-16-16	7	8	9	10	11	12	3-15-16
	3-28-16	3-28-16	3-28-16	3-28-16	3-28-16	3-26-16	3-22-16	3-15-16
	3-16-16	18	17	16	15	14	13	3-15-16
	3-28-16	3-28-16	3-28-16	3-28-16	3-22-16	3-22-16	3-20-16	3-15-16
3-16-16	19	20	21	22	23	24	3-15-16	
3-28-16	3-28-16	3-27-16	3-27-16	3-25-16	3-25-16	3-20-16	3-17-16	3-15-16
3-13-16	30	29	28	27	26	25	3-15-16	3-15-16
3-27-16	3-27-16	3-27-16	3-25-16	3-25-16	3-17-16	3-17-16	3-15-16	3-15-16
3-13-16	31	32	33	34	35	36	3-15-16	3-15-16
3-27-16	3-27-16	3-25-16	3-25-16	3-20-16	3-17-16	3-14-16	3-14-16	3-14-16

Lines run by Surveyor Johnston on dates shown above.

" " " Transitman Inch " " " "

FIELD ASSISTANTS. to

Philip L. Inch, U.S. Transitman.

NAMES.	CAPACITY.
Ernest C. Johnston,	1st chairman,
H. E. Longmaid,	2nd chairman,
Neil O'Connell,	Flagman,
Chas. E. Rubi,	Axman,
Gregorio C. Gonzales,	Moundman.

160
BOOK 34 264

TRANSITMAN.
CERTIFICATE OF UNITED STATES SURVEYOR.

JAN 21 1918

I Philip L. Inch, U.S. Transitman, U.S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General for Group 66, Arizona, bearing date of the 4th day of January, 1916, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the North and East Boundaries, and all of those parts or portions of the Subdivision lines of

TOWNSHIP 27 NORTH, RANGE 9 EAST,

of the Gila and Salt River Base & Meridian, in the State of Arizona, which are represented in and by diagram on page 31 hereof the foregoing field notes, as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General for Group 66, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Philip L. Inch
U.S. Surveyor
U.S. Transitman.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

....., 191

The foregoing field notes of the survey of

executed by under his special instructions dated, 191 , having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

.....
U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above-described surveys in, has been correctly copied from the original notes on file in this office.

.....
U. S. Surveyor General.

4-680

BOOK 3204

FIELD ASSISTANTS. to

Theodore O. Johnston, U.S. Surveyor.

NAMES.	CAPACITY.
Grant S. Johnston,	1st chainman,
Theodore VanderMeer,	2nd chainman,
Aaron J. Oppenheim,	Flagman,
Chester M. Johnson,	Moundman.
J. H. Wood,	Axman.

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Theodore O. Johnston, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General for Group 66, Arizona, bearing date of the 4th day of January, 1916, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the

Subdivision lines of

TOWNSHIP 27 NORTH, RANGE 9 EAST.

of the Gila and Salt

River Base & Meridian, in the State of Arizona, which are represented in and by diagram on page 31 hereof the foregoing field notes, as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General for Group 66, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Theodore O. Johnston U. S. Surveyor.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix, Ariz. FEB 6, 1916

The foregoing field notes of the survey of the North and East Boundaries, and Subdivision lines of

TOWNSHIP 27 NORTH, RANGE 9 EAST;

of the Gila and Salt River Base and Meridian, in the state of Arizona, executed by Theodore O. Johnston, U.S.S. and Philip L. Inch, U.S.T. under his special instructions dated Jan. 4, 1916, for Gr. 66, Ariz., 1916, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Frank D. Smith U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above described surveys in, has been correctly copied from the original notes on file in this office.

U. S. Surveyor General.