

3266

Book "G"

4-679

BOOK 3266

209

(1)

# FIELD NOTES

of the RETRACEMENT & RESURVEY

of a

Portion of the North bdy. of Township 25 North, Range 8 East,

and SURVEY of the

Subdivision lines of Township 26 North, Range 8 East,

3266

Of the Gila and Salt River Base and Meridian,

In the State of Arizona.

EXECUTED BY

Theodore O. Johnston,

U. S. Surveyor,

3266

~~In the capacity of U. S. Surveyor~~, under instructions dated January 4, 1916, issued by the United States Surveyor General to govern surveys included in Group No. 66, which were approved by the Commissioner of the General Land Office, January 17, 1916.

Retracement,  
Resurvey & Survey commenced March 13, 1916.

Retracement,  
Resurvey & Survey completed April 8, 1916.

(A)


3266






Book "G"

Group 66 - - - Arizona.

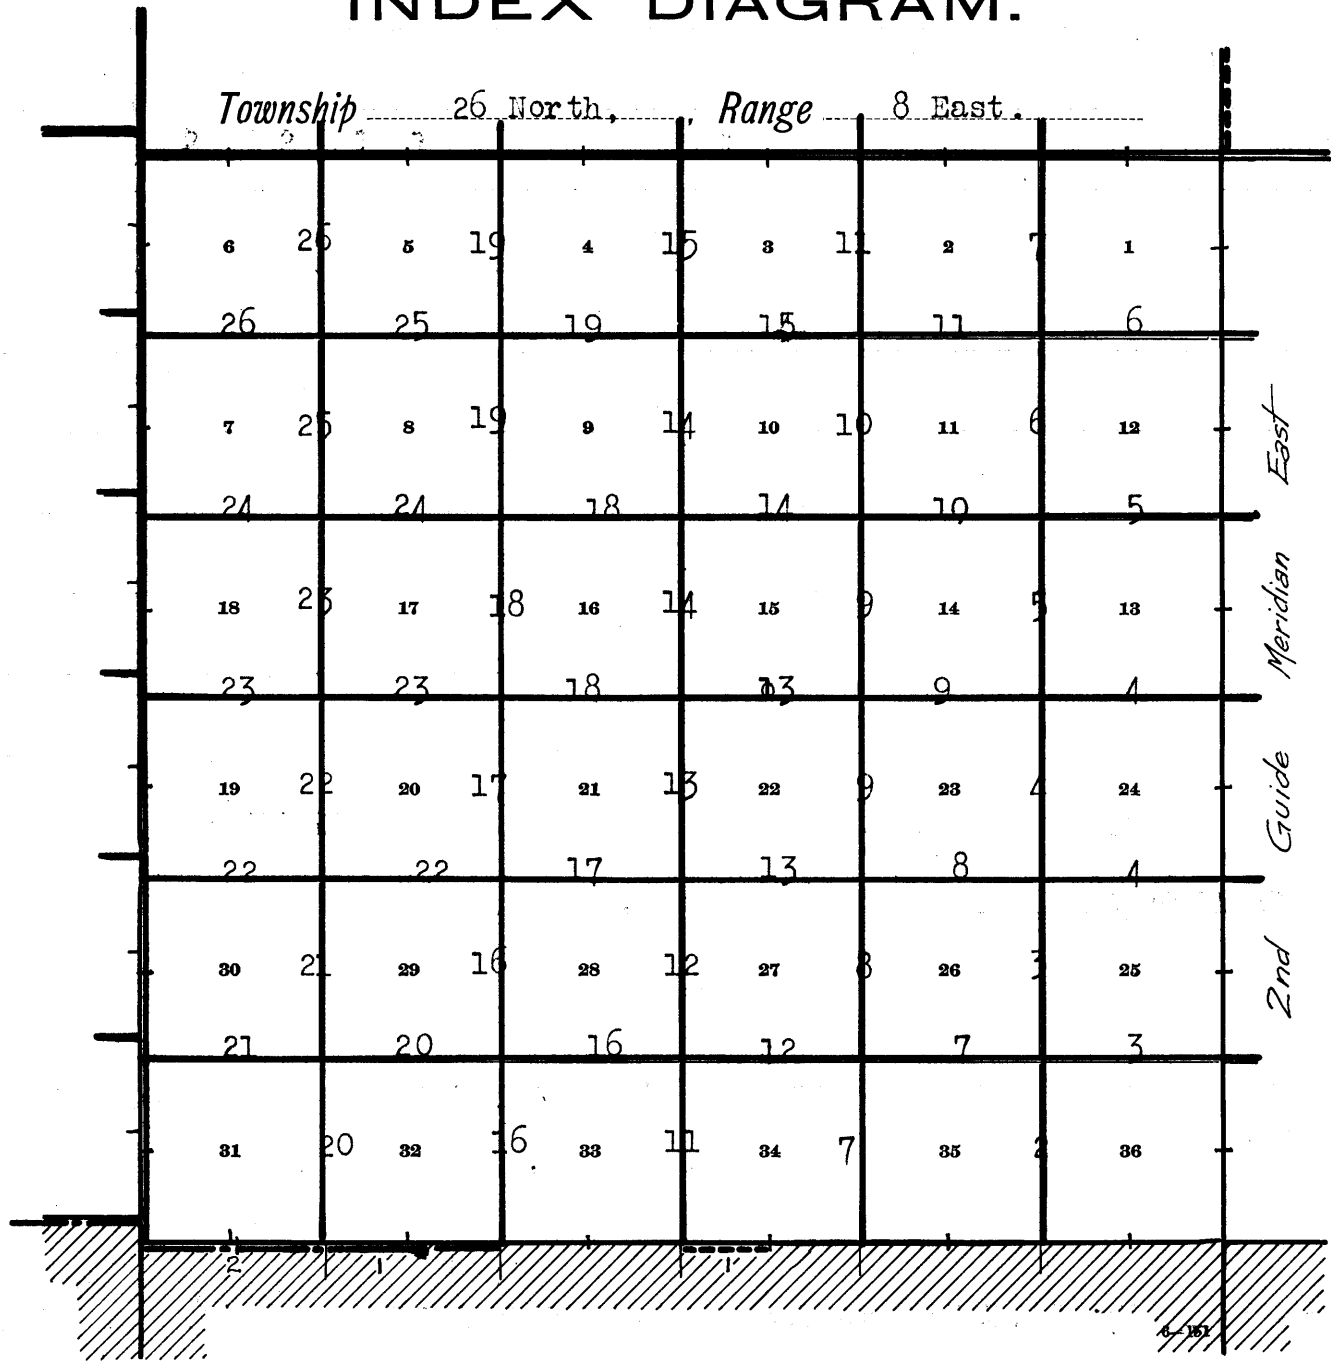BCCK 3266

### INDEX DIAGRAM.



-  Lines surveyed under this Group.
-  " retraced " " "
-  " resurveyed " " "
-  Accepted surveys.
-  Areas surveyed as per accepted plats on file.

Retracement of Portion and Resurvey of Portion of  
N. Bdy., T. 25 N., R. 8 E.,  
and Subdivision of T. 26 N., R. 8 E.

13

Chains

Work executed by Theo. O. Johnston, U. S. Surveyor.  
Dates of survey shown on diagram on page 28 hereof.  
The instrument used is described, with record of approval by the Assistant Supervisor of Surveys, District No. 5, and field tests, in book A.

All lines were deflected from the true meridian as determined by observations on Polaris at elongation, one of which observations is described in book F, and the other following herein.

Polaris Observation.

Mar. 29, 1916.

At my camp in sec. 13, T. 26 N., R. 8 E., in lat.  $35^{\circ}38\frac{1}{2}'N.$ , long.  $111^{\circ}29\frac{1}{2}'W.$ , at 6h 58m, p.m., l.m.t., I observe Polaris at western elongation, in accordance with instructions in the Manual, and mark a point in the line thus determined by a tack driven in a wooden stake 5 chs. N. of my station.

Mar. 30, 1916.

I turn off the azimuth of Polaris  $1^{\circ}24'$  to the E., and mark the meridian thus determined by a tack driven in a wooden stake E. of the point established last night.

-----  
Retracement of Portion of N. Bdy., T. 25 N., R. 8 E.

From the  $\frac{1}{4}$  sec. cor. on N. bdy. of sec. 3, on N. bdy. of T. 25 N., R. 8 E., which is a stone, firmly set, marked and witnessed as described by the Surveyor General;

N.  $89^{\circ}51'W.$ , on a true line, on N. bdy. of W. half of sec. 3.

39.70

The old cor. of secs. 3, 4, 33 and 34, which is a stone, firmly set, marked and witnessed as described by the Surveyor General.

-----  
Resurvey of Portion on N. Bdy., T. 25 N., R. 8 E.

From the old cor. of secs. 4, 5, 32 and 33, which is a stone, firmly set, marked and witnessed as described by the Surveyor General;

S.  $89^{\circ}39'W.$ , on N. bdy. of sec. 5.

39.25

The old  $\frac{1}{4}$  sec. cor., which is a stone, firmly set, marked and witnessed as described by the Surveyor General. This cor. will henceforth relate solely to sec. 5.

.75

Thence S.  $89^{\circ}51'W.$ , on N. bdy. of W. half of sec. 5. (40.00 chs. W. of the cor. of secs. 4, 5, 32 and 33) Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished  $\frac{1}{4}$  sec. cor. of sec. 32, with brass cap, marked.

Chains

1/4 S32

1916

dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

39.98 The old cor. of secs. 5, 6, 31 and 32, which is a stone, firmly set, marked and witnessed as described by the Surveyor General. This cor. will henceforth pertain solely to secs. 5 and 6.

-----

.77 N. 89° 39' W., on N. bdy. of sec. 6. (80.00 chs. W. of the cor. of secs. 4, 5, 32 and 33) Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for reestablished cor. of secs. 31 and 32, with brass cap, marked

T26N | R 8E  
S31 | S32

1916

dig pits, 24x24x12 ins., NE. & NW. of post, 6 ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, N. of cor.

39.88 The old 1/4 sec. cor., which is a stone, firmly set, marked and witnessed as described by the Surveyor General. This cor. will henceforth pertain solely to sec. 6.

.89 Thence N. 89° 45' W., on N. bdy. of W. half of sec. 6. Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 31, with brass cap, marked

1/4 S31

1916

dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

40.19 Intersect the closing corner of T. 25 N. & R. 8 E., which is a stone, firmly set, marked and witnessed as described by the Surveyor General.

-----

Subdivision of T. 26 N., R. 8 E.

From the cor. of secs. 1, 2, 35 and 36, on S. bdy. of Tp. which is a stone, firmly set, marked and witnessed as described by the Surveyor General:

N. 0° 01' W., bet. secs. 35 and 36, over rolling land.

35.00 Telephone line bears N. 12° E. and S. 12° W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked

1/4  
S35 | S36

1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

40.50 Road from Flagstaff to Tuba City bears N. 12° E. and S. 12° W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 25, 26, 35 and 36, with brass cap, marked

Subdivision of T. 26 N., R. 8 E.

Chains

T26N	R 8E
S26	S25
S35	S36

1916

dig pits, 18x18x12 ins., in each sec., 5 1/2 ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, rolling.  
Soil, sandy and rocky; 4th rate.  
No timber.

East, on a random line, bet. secs. 25 and 36.

40.00 Set temp. 1/4 sec. cor.  
80.10 Intersect E. bdy. of Tp. (2nd G. M. E.) 5 lks. N. of the cor. of secs. 25, 30, 31 and 36, which is a stone, firmly set, marked and witnessed as described by the Surveyor General.

Thence N.89°58'W., on a true line, bet. secs. 25 and 36, over rolling land.

40.05 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked

1/4	S25
	S36
	1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

49.40 Road bears N. and S.  
69.60 Flagstaff-Tuba City road bears N. and S.  
71.10 Telephone line bears N.12°E. and S.12°W.  
80.10 The cor. of secs. 25, 26, 35 and 36.

Land, rolling.  
Soil, rocky and sandy; 4th rate.  
No timber.

N.0°01'W., bet. secs. 25 and 26, over rolling land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked

1/4	
S26	S25

1916

dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 23, 24, 25 and 26, with brass cap, marked

T26N	R 8E
S23	S24
S26	S25

1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling.  
Soil, sandy and rocky; 4th rate.  
No timber.



Subdivision of T. 26 N., R. 8 E.

Chains

- 40.16 Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, (impracticable to set post in the ground) for  $\frac{1}{4}$  sec. cor., with brass cap, marked  

$$\begin{array}{c} S13 \\ \hline \frac{1}{4} \\ S24 \\ 1916 \end{array}$$
 and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.
- 40.17 Telephone line bears N.12°E. and S.12°W.
- 42.50 Flagstaff-Tuba City road bears NE. and SW.
- 70.30 Asc. on E. slope of low bench.
- 78.10 Summit of ascent.
- 80.32 The cor. of secs. 13, 14, 23 and 24.

Land, rolling.  
 Soil, rocky; 4th rate.  
 No timber.

- N.0°01'W., bet. secs. 13 and 14, over rolling land.
- 5.00 Asc. on SE. slope.
- 12.80 Summit of ascent bears NE. and SW.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked  

$$\begin{array}{c} \frac{1}{4} \\ S14 | S13 \\ \hline 1916 \end{array}$$
 and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.
- 52.00 Desc. on rocky NE. slope.
- 70.00 Ft. of descent bears NW. and SE.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 11, 12, 13 and 14, with brass cap, marked  

$$\begin{array}{c} T26N | R 8E \\ S11 | S12 \\ \hline S14 | S13 \\ \hline 1916 \end{array}$$
 dig pits, 18x18x12 ins., in each sec.,  $5\frac{1}{2}$  ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, rolling and broken.  
 Soil, rocky and gravelly; 4th rate.  
 No timber.

- East, on a random line, bet. secs. 12 and 13.
- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.
- 80.34 Intersect E. bdy. of Tp. 8 lks. S. of the cor. of secs. 7, 12, 13 and 18, (on 2nd G. M. E.) which is a stone, firmly set, marked and witnessed as described by the Surveyor General.
- Thence S.89°57'W., on a true line, bet. secs. 12 and 13, over rolling and broken land.
- 29.34 Telephone line bears N.15°E. and S.15°W.
- 39.85 Flagstaff-Tuba City road bears N.10°E. and S.10°W.
- 40.17 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked  

$$\begin{array}{c} S12 \\ \hline \frac{1}{4} \\ S13 \\ 1916 \end{array}$$

Chains

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.  
55.35 Asc. on NE. slope.  
58.35 Summit of ascent.  
62.55 Desc. on NW. slope.  
70.35 Ft. of descent.  
80.34 The cor. of secs. 11, 12, 13 and 14.

Land, rolling and broken.  
Soil, rocky; 4th rate.  
No timber.

N.0°01'W., bet. secs. 11 and 12,  
over rolling land.  
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked

$\frac{1}{4}$   
S11 | S12

1916

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
W. of cor.  
50.00 Asc. on SE. slope.  
Thence along rocky E. slope.  
70.00 Desc. on NE. slope.  
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the  
ground, for cor. of secs. 1, 2, 11 and 12, with brass  
cap, marked

T26N | R 8E  
S2 | S1  
-----  
S11 | S12

1916

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
W. of cor.  
Land, rolling.  
Soil, rocky; 4th rate.  
No timber.

East, on a random line, bet. secs. 1 and 12.  
40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
80.14 Intersect E. bdy. of Tp., (2nd G. M. E.) 4 lks. S. of the  
cor. of secs. 1, 6, 7 and 12, which is a stone, firmly  
set, marked and witnessed as described by the Surveyor  
General.

Thence S.89°58'W., on a true line, bet. secs. 1 and 12,  
over rolling land.  
3.54 Telephone line bears N.15°E. and S.15°W.  
5.04 Flagstaff-Tuba City road bears N.15°E. and S.15°W.  
17:50 Desc. on NW. slope.  
30.15 Ft. of descent.  
40.07 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked

S 1  
 $\frac{1}{4}$   
-----  
S12  
1916

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.  
80.14 The cor. of secs. 1, 2, 11 and 12.

Land, rolling and broken.  
Soil, sandy and rocky; 4th rate.  
No timber.




Subdivision of T. 26 N., R. 8 E.

Chains

N.0°01'W., on a random line, bet. secs. 1 and 2.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.18 Intersect N. bdy. of Tp. 29 lks. W. of the cor. of secs. 1, 2, 35 and 36, described in book F.

Thence S.0°08'W., on a true line, bet. secs. 1 and 2, over rolling land, descending on N. slope of butte.  
 1.20 Thence across top of butte.  
 15.20 Desc. on S. slope of same.  
 20.20 ft. of slope.  
 40.18 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked




1916

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.  
 A dam and small reservoir bear E., 15 chs. dist.  
 52.70 Ditch, course NE.  
 80.18 The cor. of secs. 1, 2, 11 and 12.

Land, rolling.  
 Soil, rocky and sandy; 4th rate.  
 No timber.


From the cor. of secs. 2, 3, 34 and 35, on S. bdy. of Tp. which is a stone, firmly set, marked and witnessed as described by the Surveyor General;

N.0°01'W., bet. secs. 34 and 35, over rolling land.  
 10.00 Asc. on SE. slope.  
 15.00 Summit of ascent bears NE. and SW.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked



1916

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.  
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 26, 27, 34 and 35, with brass cap, marked



1916

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.


Land, rolling.  
 Soil, rocky; 4th rate.  
 No timber.

East, on a random line, bet. secs. 26 and 35.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.90 Intersect N. and S. line 3 lks. N. of the cor. of secs. 25, 26, 35 and 36.

Thence N.89°59'W., on a true line, bet. secs. 26 and 35, over rolling land.

Chains

7.90 Low ridge bears NE. and SW.  
 24.90 Asc. on rocky E. slope.  
 29.90 Summit of ascent.  
 39.95 Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, (impracticable to set post in the ground) for  $\frac{1}{4}$  sec. cor., with brass cap, marked




and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.

42.90 Wash, course N. Asc. on gradual E. slope.  
 79.90 The cor. of secs. 26, 27, 34 and 35.


Land, rolling.  
 Soil, rocky; 4th rate.  
 No timber.

40.00 N.0°01'W., bet. secs. 26 and 27, over rolling land.  
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked



and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

67.00 Wash, course NE.  
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 22, 23, 26 and 27, with brass cap, marked




1916

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

Land, rolling.  
 Soil, rocky; 4th rate.  
 No timber.

40.00 East, on a random line, bet. secs. 23 and 26.  
 Set temp.  $\frac{1}{2}$  sec. cor.  
 79.88 Intersect N. and S. line 5 lks. N. of the cor. of secs. 23, 24, 25 and 26.

9.90 Thence N.89°58'W., on a true line, bet. secs. 23 and 26, over rolling land.  
 19.90 ft. of slope bears NE. and SW. Asc. on E. slope.  
 39.94 Ridge bears N. and S.  
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked



and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.

49.90 Summit of NE. slope.  
 79.88 The cor. of secs. 22, 23, 26 and 27.

Land, rolling. Soil, rocky; 4th rate. No timber.

Subdivision of T. 26 N., R. 8 E.

Chains	
40.00	N.0°01'W., bet. secs. 22 and 23, over rolling land. Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
80.00	$\begin{array}{c} \frac{1}{4} \\ \hline S22   S23 \\ \hline 1916 \end{array}$ and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 14, 15, 22 and 23, with brass cap, marked
	$\begin{array}{c} T26N   R 6W \\ \hline S15   S14 \\ \hline S22   S23 \\ \hline 1916 \end{array}$ and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
	Land, rolling. Soil, rocky; 4th rate. No timber.
-----	
40.00	East, on a random line, bet. secs. 14 and 23. Set temp. $\frac{1}{4}$ sec. cor.
79.94	Intersect N. and S. line 5 lks. N. of the cor. of secs. 13, 14, 23 and 24.
5.00	Thence N.89°58'W., on a true line, bet. secs. 14 and 23, over rolling land.
15.00	Asc. on SE. slope.
39.97	Summit of ascent.
39.97	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
79.94	$\begin{array}{c} S14 \\ \hline \frac{1}{4} \\ \hline S23 \\ \hline 1916 \end{array}$ and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
79.94	The cor. of secs. 14, 15, 22 and 23.  Land, rolling. Soil, rocky; 4th rate. No timber.
-----	
40.00	N.0°01'W., bet. secs. 14 and 15, over rolling land. Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
45.00	$\begin{array}{c} \frac{1}{4} \\ \hline S15   S14 \\ \hline 1916 \end{array}$ and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
50.00	Desc. on N. slope.
80.00	Foot of descent.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 10, 11, 14 and 15, with brass cap, marked

Chains

T26N	R 8E
S10	S11
S15	S14

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling.

Soil, rocky; 4th rate.

No timber.

East, on a random line, bet. secs. 11 and 14.

40.00 Set temp. ¼ sec. cor.

79.96 Intersect N. and S. line 5 lks. N. of the cor. of secs. 11, 12, 13 and 14.

Thence N.89°58'W., on a true line, bet. secs. 11 and 14, over rolling and broken land.

20.00 Asc. on rocky E. slope.

25.00 Summit of ascent.

39.98 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked S11

¼
S14
1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

79.96 The cor. of secs. 10, 11, 14 and 15.

Land, rolling and broken.

Soil, rocky; 4th rate.

No timber.

N.0°01'W., bet. secs. 10 and 11, over rolling land.

6.50 Ditch, course NE.

19.50 Ditch, course E.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

¼

S10	S11
-----	-----

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 2, 3, 10 and 11, with brass cap, marked

T26N	R 8E
S3	S2
S10	S11

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling.

Soil, rocky; 4th rate.

No timber.

Subdivision of T. 26 N., R. 8 E.

Chains

40.00 East, on a random line, bet. secs. 2 and 11,  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.98 Intersect N. and S. line 4 lks. S. of the cor. of secs.  
 1, 2, 11 and 12.

Thence S.  $89^{\circ}58'W.$ , on a true line, bet. secs. 2 and 11,  
 over rolling land.

5.00 Asc. on E. slope.  
 8.40 Summit of ascent.  
 15.00 Rocky point bears N., 5 chs. dist. Desc. on SW. slope.  
 23.00 Ditch, course N.  
 25.00 Ft. of descent.  
 39.99 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked  
 S 2

$\frac{1}{4}$   
 S11  
 1916

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
 N. of cor.

45.00 Top of NE. slope.  
 50.00 Desc. on NW. slope.  
 55.00 Ft. of descent. Ascend. on SE. slope.  
 57.50 Wash, course NE.  
 73.00 Summit of ascent.  
 79.98 The cor. of secs. 2, 3, 10 and 11.

Land, rolling and mountainous.  
 Soil, rocky; 4th rate.  
 No timber.

40.00 N.  $0^{\circ}01'W.$ , on a random line, bet. secs. 2 and 3.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.21 Intersect N. bdy. of Tp. 19 lks. W. of the cor. of secs.  
 2, 3, 34 and 35, described in book F.

Thence S.  $0^{\circ}07'W.$ , on a true line, bet. secs. 2 and 3,  
 over rolling land.

20.20 Desc. on S. slope.  
 25.20 Ft. of slope.  
 33.70 Ditch, course E.  
 39.00 Road bears E. and W.  
 40.21 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked

$\frac{1}{4}$   
 S3 | S2  
 1916

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
 W. of cor.

45.20 Asc. on N. slope.  
 54.20 Summit of ascent.  
 80.21 The cor. of secs. 2, 3, 10 and 11.

Land, rolling.  
 Soil, rocky; 4th rate.  
 No timber.

From the cor. of secs. 3, 4, 33 and 34, on S. bdy. of Tp.,  
 hereinbefore described;

N.  $0^{\circ}02'W.$ , bet. secs. 33 and 34,  
 over rolling land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked

Chains

$\frac{1}{4}$   
 S33 | S34  
 1916  
 and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
 W. of cor.  
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the  
 ground, for cor. of secs. 27, 28, 33 and 34, with brass  
 cap, marked  


T26N	R 8E
S28	S27
S33	S34

 1916  
 and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
 W. of cor.

Land, rolling.  
 Soil, rocky; and sandy; 4th rate.  
 No timber.

40.00 East, on a random line, bet. secs. 27 and 34.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.74 Intersect N. and S. line 21 lks. N. of the cor. of secs.  
 26, 27, 34 and 35.


39.87 Thence N.  $89^{\circ}51'$  W., on a true line, bet, secs. 27 and 34,  
 over rolling land.  
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked




64.75 and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
 N. of cor.  
 79.74 Top of E. edge of bench.  
 The cor. of secs. 27, 28, 33 and 34.

Land, rolling.  
 Soil, rocky; 4th rate.  
 No timber.

40.00 N.  $0^{\circ}02'$  W., bet. secs. 27 and 28,  
 over rolling land.  
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked



80.00 1916  
 and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
 W. of cor.  
 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the  
 ground, for cor. of secs. 21, 22, 27 and 28, with brass  
 cap, marked.



1916  
 and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
 W. of cor.  
 Land, rolling. Soil, rocky; 4th rate. No timber.

Subdivision of T. 26 N., R. 8 E.

Chains

40.00 S.89°51'E., on a random line, bet. secs. 22 and 27.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.78 Intersect the corner of sections 22, 23, 26 and 27.  
 25 and 27.


Thence N.89°51'W., on a true line, bet. secs. 22 and 27,  
 over rolling land.  
 39.89 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked  
 S22  
 $\frac{1}{4}$   
 S27  
 1916

dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.,  
 and raise a mound of earth,  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
 N. of cor.  
 79.78 The cor. of secs. 21, 22, 27 and 28.  
 Land, rolling.  
 Soil, gravelly and rocky; 4th rate.  
 No timber.

40.00 N.0°02'W., bet. secs. 21 and 22,  
 over rolling land.  
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked  
 $\frac{1}{4}$   
 S21 | S22

1916  
 and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
 W. of cor.

64.00 Rocky butte.  
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the  
 ground, for cor. of secs. 15, 16, 21 and 22, with brass  
 cap, marked



1916  
 and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
 W. of cor.

Land, rolling.  
 Soil, rocky; 4th rate.  
 No timber.

40.00 S.89°51'E., on a random line, bet. secs. 15 and 22.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.74 Intersect the corner of secs. 14, 15, 22 and 23, 15,  
 22 and 23.


Thence N.89°51'W., on a true line, bet. secs. 15 and 22,  
 over rolling land.  
 39.87 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground,  
 for  $\frac{1}{4}$  sec. cor., with brass cap, marked  
 S15  
 $\frac{1}{4}$   
 S22  
 1916

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
 N. of cor.


47.25 Rocky butte, 10 ft. high,  
 79.74 The cor. of secs. 15, 16, 21 and 22.  
 Land, rolling. Soil, rocky; 4th rate. No timber.

Chains

N.0°02'W., bet. secs. 15 and 16,  
over rolling land.  
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked



1916  
and raise a mound of stone, 2 ft. base, 1½ ft. high,  
W. of cor.  
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the  
ground, for cor. of secs. 9, 10, 15 and 16, with brass  
cap, marked




1916  
and raise a mound of stone, 2 ft. base, 1½ ft. high,  
W. of cor.

Land, rolling.  
Soil, rocky; 4th rate.  
No timber.

S.89°51'E., on a random line, bet. secs. 10 and 15.  
40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
79.72 Intersect the corner of sections 10, 11, 14 and 15,


Thence N:89°51'W., on a true line, bet. secs. 10 and 15,  
over rolling land.  
2.90 Ditch, course NE.  
9.70 Asc. on NE. slope.  
18.70 Summit of ascent.  
29.70 Wash, course NE.  
39.86 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked



1916  
and raise a mound of stone, 2 ft. base, 1½ ft. high,  
N. of cor.  
50.70 Rocky point.  
79.72 The cor. of secs. 9, 10, 15 and 16.

Land, rolling.  
Soil, rocky; 4th rate.  
No timber.

N.0°02'W., bet. secs. 9 and 10,  
over rolling land.  
4.00 Draw, course NE. Asc. on broken SE. slope.  
30.00 Summit of ascent bears NE. and SW.  
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked



1916  
and raise a mound of stone, 2 ft. base, 1½ ft. high,  
W. of cor.  
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the  
ground, for cor. of secs. 3, 4, 9 and 10, with brass cap,



Subdivision of T. 26 N., R. 8 E.

Chains

marked

T26N	R 8E
S4	S3
S39	S10

1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling, and broken.  
Soil, rocky; 4th rate.  
No timber.

40.00  
79.82

S.89°51'E., on a random line, bet. secs. 3 and 10.  
Set temp. 1/4 sec. cor.  
Intersect N. and S. line 5 lks. S. of the cor. of secs. 2, 3, 10 and 11.

39.91

Thence N.89°53'W., on a true line, bet. secs. 3 and 10, over rolling land.  
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked

S 3
1/4
S10

1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

49.80  
57.30  
64.80  
69.57  
79.82

Thence along rocky N. slope.  
Wash, course NE. Asc. on NE. slope.  
Summit of slope.  
Wash, course NE.  
The cor. of secs. 3, 4, 9 and 10.

Land, rolling.  
Soil, rocky; 4th rate.  
No timber.

40.00  
80.14

N.0°02'W., on a random line, bet. secs. 3 and 4.  
Set temp. 1/4 sec. cor.  
Intersect N. bdy. of Tp. 12 lks. W. of the cor. of secs. 3, 4, 33 and 34, described in book F.

40.14

Thence S.0°03'W., on a true line, bet. secs. 3 and 4, over rolling land.  
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked

S4	S3
----	----

1916

dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist. and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

47.20  
65.00  
80.14

Road bears E. and W. Asc. on NW. slope.  
Summit of ascent bears NE. and SW.  
The cor. of secs. 3, 4, 9 and 10.


Land, rolling.  
Soil, rocky; 4th rate.  
No timber.

Chains

From the cor. of secs. 4, 5, 32 and 33, on S. bdy. of Tp. hereinbefore described,

N.0°03'W., bet. secs. 32 and 33, over rolling land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked




1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

45.50 Road bears NW. and SE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 28, 29, 32 and 33, with brass cap, marked



1916

dig pits, 18x18x12 ins., in each sec., 5 1/2 ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, rolling.

Soil, gravelly; 4th rate.

No timber.


East, on a random line, bet. secs. 28 and 33.

40.00 Set temp. 1/4 sec. cor.

80.08 Intersect the corner of secs. 27, 28, 33 and 34, 2, 33

Thence West, on a true line, bet. secs. 28 and 33, over rolling land.

40.04 Set an iron post, 3-ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked



1916

dig pits, 18x18x12 ins., E and W. of post, 3 ft. dist., and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

80.08 the cor. of secs. 28, 29, 32 and 33.


Land, rolling.

Soil, gravelly and rocky; 3rd and 4th rate.

No timber.

N.0°03'W., bet. secs. 28 and 29, over rolling land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked



1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

55.00 Rocky butte, 40 ft. high, 2 chs. W. of line.


73.00 Rocky knoll, 10 ft. high.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 20, 21, 28 and 29, with brass

Subdivision of T. 26 N., R. 8 E.

Chains

cap, marked



1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling.  
Soil, rocky; 4th rate.  
No timber.


East, on a random line, bet. secs. 21 and 28.

40.00 Set temp. ¼ sec. cor.

80.06 Intersect N. and S. line 2 lks. S. of the cor. of secs. 21, 22, 27 and 28.

Thence S. 89° 59' W., on a true line, bet. secs. 21 and 28, over rolling land.

40.03 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked



1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

45.05 Wash, course NE.


80.06 The cor. of secs. 20, 21, 28 and 29.

Land, rolling.  
Soil, rocky and gravelly; 4th rate.  
No timber.

N. 0° 03' W., bet. secs. 20 and 21, over rolling land.

10.00 Wash, course NE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked




1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Asc. on SE. slope.

45.00 Summit of ascent bears NE. and SW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 16, 17, 20 and 21, with brass cap, marked



1916

dig pits, 18x18x12 ins., in each sec., 5½ ft. dist., and raise a mound of earth, 4 ft. base, 1½ ft. high, W. of cor.

Land, rolling.  
Soil, rocky; 4th rate.  
No timber.

## Chains

East, on a random line, bet. secs. 16 and 21.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.02 Intersect N. and S. line 4 lks. S. of the cor. of secs.  
 15, 16, 21 and 22.

Thence S.  $89^{\circ}58'W.$ , on a true line, bet. secs. 16 and 21,  
 over rolling land.  
 40.01 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked  
 S16  
 $\frac{1}{4}$   
 S21  
 1916  
 dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.,  
 and raise a mound of earth,  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
 N. of cor.  
 45.00 Asc. on E. slope.  
 50.00 Summit of ascent.  
 80.02 The cor. of secs. 16, 17, 20 and 21.

Land, rolling.  
 Soil, rocky; 4th rate.  
 No timber.

N.  $0^{\circ}03'W.$ , bet. secs. 16 and 17,  
 over rolling land.  
 21.50 Road bears NE. and SW.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked  
 $\frac{1}{4}$   
 S17 | S16  
 1916  
 and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
 W. of cor.  
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the  
 ground, for cor. of secs. 8, 9, 16 and 17, with brass  
 cap, marked  
 T26N | R 8E  
 S8 | S9  
 S17 | S16  
 1916  
 and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
 W. of cor.

Land, rolling.  
 Soil, rocky; 4th rate.  
 No timber.

East, on a random line, bet. secs. 9 and 16.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.98 Intersect N. and S. line 5 lks. N. of the cor. of secs.  
 9, 10, 15 and 16.


Thence N.  $89^{\circ}58'W.$ , on a true line, bet. secs. 9 and 16,  
 over rolling land.  
 6.70 Wash, course NE. Asc. on SE. slope.  
 16.00 Summit of ascent.  
 39.99 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked  
 S 9  
 $\frac{1}{4}$   
 S16  
 1916  
 and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,

Subdivision of T. 26 N., R. 8 E.


Chains

79.98 N. of cor.  
 The cor. of secs. 8, 9, 16 and 17.  
 Land, rolling.  
 Soil, rocky; 4th rate.  
 No timber.

17.70 N.0°03'W., bet. secs. 8 and 9,  
 over rolling land.  
 Desc. on rocky N. slope.  
 31.10 Rocky draw, 75 lks. wide, 15 ft. deep, course NE.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked




1916  
 and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
 W. of cor.  
 65.50 Road bears NE. and SW.  
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the  
 ground, for cor. of secs. 4, 5, 8 and 9, with brass cap,  
 marked



1916  
 and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
 W. of cor.  
 Land, rolling and broken.  
 Soil, rocky; 4th rate.  
 No timber.

40.00 S.89°58'E., on a random line, bet. secs. 4 and 9.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.96 Intersect the cor. of secs. 3, 4, 9 and 10.

Thence N.89°58'W., on a true line, bet. secs. 4 and 9,  
 over rolling land.  
 30.00 Desc. on rocky NW. slope.  
 35.00 Ft. of descent bears NE. and SW.  
 39.50 Road bears NE. and SW.  
 39.98 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked



and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
 N. of cor.  
 60.00 Deep draw, course NE.  
 76.00 Road bears N. and S.  
 79.96 The cor. of secs. 4, 5, 8 and 9.

Land, rolling and broken.  
 Soil, rocky; 4th rate.  
 No timber.

40.00 N.0°03'W., on a random line, bet. secs. 4 and 5.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.20 Intersect N. bdy. of Tp. 6 lks. W. of the cor. of secs.

20

Subdivision of T. 26 N., R. 8 E.

Chains

4, 5, 32 and 33, described in book F.

Thence South, on a true line, bet. secs. 4 and 5,  
over rolling land, along rocky E. slope.

19.70 Rocky wash, course N.10°E. Asc. on NW. slope.

25.20 Summit of ascent.

26.20 Road bears NE. and SW.

40.20 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked
$$\begin{array}{c} \frac{1}{4} \\ | \\ S5 | S4 \end{array}$$

1916

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
W. of cor.

45.20 Desc. on SE. slope.

50.20 Ft. of descent.

80.20 The cor. of secs. 4, 5, 8 and 9.

Land, rolling.

Soil, rocky; 4th rate.

No timber.

From the reestablished corner of secs. 31 and 32, on S. bdy. of  
Tp. hereinbefore described;

N.0°03'W., bet. secs. 31 and 32,  
over rolling land.40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked
$$\begin{array}{c} \frac{1}{4} \\ | \\ S31 | S32 \end{array}$$

1916

dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.,  
and raise a mound of earth,  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high,  
W. of cor.

41.00 Wash, 15 lks. wide, course NE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the  
ground, for cor. of secs. 29, 30, 31 and 32, with brass  
cap, marked
$$\begin{array}{c} T26N | R 8E \\ S30 | S29 \\ \hline S31 | S32 \end{array}$$

1916

dig pits, 18x18x12 ins., in each sec.,  $5\frac{1}{2}$  ft. dist.,  
and raise a mound of earth, 4 ft. base, 2 ft. high,  
W. of cor.

Land, rolling.

Soil, gravelly; 2nd rate.

No timber.

East, on a random line, bet. secs. 29 and 32.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.80.00 Intersect N. and S. line 37 lks. S. of the cor. of secs.  
28, 29, 32 and 33.Thence S.89°44'W., on a true line, bet. secs. 29 and 32,  
over rolling land.

5.10 Road bears N. and S.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked

Subdivision of T. 26 N. R. 8 E.

Chains

S29  
1  
4

S32  
1916

dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

68.20  
80.00

Road bears N. and S.  
The cor. of secs. 29, 30, 31 and 32.

Land, rolling.  
Soil, gravelly and rocky; 3rd and 4th rate.  
No timber.

40.00  
79.20

West, on a random line, bet. secs. 30 and 31.  
Set temp. 1/4 sec. cor.  
Intersect W. bdy. of Tp. 39 lks. S. of the cor. of secs. 30 and 31, described in book H.

33.20  
39.20

thence S.89°43'E., on a true line, bet. secs. 30 and 31, over rolling land.  
Ridge bears N. and S. Desc. on E. slope.  
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked

S30  
1  
4  
S31  
1916

79.20

dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.  
The cor. of secs. 29, 30, 31 and 32.

Land, rolling.  
Soil, gravelly and rocky; 3rd and 4th rate.  
No timber.

40.00

N.0°03'W., bet. secs. 29 and 30, over rolling land.  
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked

1/4  
S30 | S29  
1916

41.50  
80.00

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.  
Asc. on S. slope.  
Summit of ascent bears NE. and SW.  
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 19, 20, 29 and 30, with brass cap, marked

T26N | R 8E  
S19 | S20  
S30 | S29

1916  
and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling.  
Soil, rocky and gravelly; 3rd and 4th rate.  
No timber.

## Chains

	East, on a random line, bet. secs. 20 and 29.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.02	Intersect N. and S. line 44 lks. S. of the cor. of secs. 20, 21, 28 and 29.
	Thence S. $89^{\circ}41'W.$ , on a true line, bet. secs. 20 and 29, over rolling land.
18.00	Road bears N. $10^{\circ}E.$ and S. $10^{\circ}W.$
23.20	Road bears N. and S.
40.01	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
	S20
	$\frac{1}{4}$
	S29
	1916
	and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
58.30	Road bears NE. and SW.
67.00	Road bears N. and S.
80.02	The cor. of secs. 19, 20, 29 and 30.
	Land, rolling. Soil, rocky; 4th rate. No timber.
-----	
	N. $89^{\circ}43'W.$ , on a random line, bet. secs. 19 and 30.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.00	Intersect W. bdy. of Tp. at the cor. of secs. 19 and 30, described in book H.
	Thence S. $89^{\circ}43'E.$ , on a true line, bet. secs. 19 and 30, over rolling land.
9.70	Road bears NE. and SW.
33.00	Rocky ridge bears NE. and SW.
39.00	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
	S19
	$\frac{1}{4}$
	S30
	1916
	and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
79.00	The cor. of secs. 19, 20, 29 and 30.
	Land, rolling. Soil, rocky; 4th rate. No timber.
-----	
	N. $0^{\circ}03'W.$ , bet. secs. 19 and 20, over rolling land.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
	$\frac{1}{4}$
	S19   S20
	1916
	dig pits, $18 \times 18 \times 12$ ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
	Asc. on SE. slope.
45.00	Summit of ascent bears NE. and SW.
55.00	Desc. on N. slope.
60.00	Ft. of descent bears E. and W.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 17, 18, 19 and 20, with brass cap, marked



Chains

T26N	R 8E
S18	S17
S19	S20

1916

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
W. of cor.

Land, rolling.

Soil, rocky; 4th rate.

No timber.

East, on a random line, bet. secs. 17 and 20.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.80.00 Intersect N. and S. line 23 lks. S. of the cor. of secs.  
16, 17, 20 and 21.

Thence S.  $89^{\circ}50'$  W., on a true line, bet. secs. 17 and 20,  
over rolling land.

23.50 Road bears NE. and SW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked

S17

 $\frac{1}{4}$ 

S20

1916

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.

53.00 Road bears N.  $10^{\circ}$  E. and S.  $10^{\circ}$  W.

80.00 The cor. of secs. 17, 18, 19 and 20.

Land, rolling.

Soil, rocky; 4th rate.

No timber.

West, on a random line, bet. secs. 18 and 19.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.78.80 Intersect W. bdy. of Tp. 23 lks. S. of the cor. of secs.  
18 and 19, described in book H.

Thence S.  $89^{\circ}50'$  E., on a true line, bet. secs. 18 and 19,  
over rolling land.

38.70 Road bears NE. and SW.

38.80 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked

S18

 $\frac{1}{4}$ 

S19

1916

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.

64.30 Ditch, course N.

78.80 The cor. of secs. 17, 18, 19 and 20.

Land, rolling.

Soil, rocky; 4th rate.

No timber.

N.  $0^{\circ}03'$  W., bet. secs. 17 and 18,  
over rolling land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked

Chains

1916  
S18 | S17

- 42.00 and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
- 42.00 Rocky wash, course E. A small reservoir, known as Black Tank, on this wash, bears W., 10 chs. dist., and two small reservoirs, on same wash, are in the SW. ¼ of the NW. ¼ of sec. 17.
- 52.20 Road bears NE. and SW.
- 78.20 Road bears NE. and SW.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 7, 8, 17 and 18, with brass cap, marked

T26N | R 8E  
S7 | S8  
-----  
S18 | S17

1916  
and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling.  
Soil, rocky; 4th rate.  
No timber.

- 40.00 East, on a random line, bet. secs. 8 and 17.
- 40.00 Set temp. ¼ sec. cor.
- 80.04 Intersect N. and S. line 16 lks. S. of the cor. of secs. 8, 9, 16 and 17.
- Thence S.89°53'W., on a true line, bet. secs. 8 and 17, over rolling land.
- 20.00 Desc. on W. slope.
- 25.00 Rocky wash, 50 lks. wide, course N.10°E.
- 31.00 Wash, course NE.
- 33.50 Road bears NE. and SW.
- 40.02 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

S 8  
-----  
¼  
S17  
1916

- 49.05 dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, 3½ ft. base, 1½ ft. high, N. of cor.
  - 49.05 Road bears NE. and SW.
  - 55.05 Wash, course NE. Asc. on gradual E. slope.
  - 56.50 Rocky butte.
  - 79.05 Road bears NE. and SW.
  - 80.04 The cor. of secs. 7, 8, 17 and 18.
- Land, rolling.  
Soil, rocky; 4th rate.  
No timber.

- 40.00 West, on a random line, bet. secs. 7 and 18.
- 40.00 Set temp. ¼ sec. cor.
- 78.70 Intersect W. bdy. of Tp. 26 lks. S. of the cor. of secs. 7 and 18, described in book H.
- Thence S.89°49'E., on a true line, bet. secs. 7 and 18, over rolling land.
- Asc. on NW. slope.
- 10.70 Rocky point on N. side of butte.

Chains

38.70 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked

S 7  
 $\frac{1}{4}$   
S18  
1916

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.

53.70 Desc. on E. slope.  
59.70 Ft. of descent.  
71.80 Road bears NE. and SW.  
78.70 The cor. of secs. 7, 8, 17 and 18.

Land, rolling.  
Soil, rocky; 4th rate.  
No timber.

N.0°03'W., bet. secs. 7 and 8, over rolling land.

16.50 Road bears NE. and SW.  
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked

$\frac{1}{4}$   
S7 | S8  
1916

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

44.00 Rocky wash, course NE.  
61.00 Desc. on rocky N. slope.  
67.00 Ft. of descent.  
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 5, 6, 7 and 8, with brass cap, marked

T26N | R 8E  
S6 | S5  
-----  
S7 | S8  
1916

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

Land, rolling.  
Soil, rocky; 4th rate.  
No timber.

East, on a random line, bet. secs. 5 and 8.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
80.10 Intersect N. and S. line 12 lks. S. of the cor. of secs. 4, 5, 8 and 9.

Thence S.89°55'W., on a true line, bet. secs. 5 and 8, over rolling land.

10.30 Road bears NW. and SE.  
15.10 Asc. on E. slope.  
20.10 Summit of ascent.  
29.00 Road bears NE. and SW.  
38.10 Wash, course N.  
40.05 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked

S 5  
 $\frac{1}{4}$   
S 8  
1916

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.

Chains

45.10 Desc. on W. slope.  
 50.10 Ft. of descent.  
 80.10 The cor. of secs. 5, 6, 7 and 8.

Land, rolling.  
 Soil, rocky; 4th rate.  
 No timber.

40.00 N.89°49'W., on a random line, bet. secs. 6 and 7.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 78.65 Intersect W. bdy. of Tp. at the cor. of secs. 6, and 7, de-  
 scribed in Book "H."

Thence S.89°49'E., on a true line, bet. secs. 6 and 7,  
 over rolling land.

18.00 Wash, course N. Thence over broken slopes.  
 38.65 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked

S 6  
 $\frac{1}{4}$   
 S 7  
 1916

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
 N. of cor.

64.00 Wash, course N.  
 78.65 The cor. of secs. 5, 6, 7 and 8.

Land, rolling.  
 Soil, rocky; 4th rate.  
 No timber.

40.00 N.0°03'W., on a random line, bet. secs. 5 and 6.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.26 Intersect N. bdy. of Tp. 12 lks. W. of the cor. of secs.  
 5, 6, 31 and 32, described in book F.

Thence S.0°02'W., on a true line, bet. secs. 5 and 6,  
 over rolling land.

40.26 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked

$\frac{1}{4}$   
 S6 | S5

1916

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
 W. of cor.

45.25 Wash, course NE.  
 80.26 The cor. of secs. 5, 6, 7 and 8.

Land, rolling.  
 Soil, rocky and sandy; 4th rate.  
 No timber.


Boundaries of T. 26 N., R. 8 E.

Latitudes, Departures and Closing Errors.							
Line designated	True Course	Dist.	Latitudes		Departures		
			N.	S.	E.	W.	
		chs.	chs.	chs.	chs.	chs.	chs.
South Boundary	West	200.00					200.00
	N. 89° 51' W.	39.70	.11				39.70
	West	80.00					80.00
	S. 89° 39' W.	39.25		.24			39.25
	S. 89° 51' W.	39.98		.11			39.98
	N. 89° 39' W.	39.88		.24			39.88
	N. 89° 45' W.	40.19	.18				40.18
West Boundary	North	480.00	480.00				
North Boundary	S. 89° 58' E.	478.65		.28	478.65		
East Boundary (2nd G. M. E.)	South	480.00		480.00			
Convergency					.52		
Totals			480.29	480.87	479.17	478.99	
				480.29	478.99		
Error in latitude				0.58			
	Error in departure					.18	

General Description.

This township consists of rolling bench land, draining towards the NE., broken in places by the slopes of mesas and ravines. There is no permanent water, though a few reservoirs of small capacity have been constructed to empound flood waters by means of ditches.

The soil is very rocky and gravelly, producing a fair growth of short grass furnishing limited grazing. There is no timber or undergrowth. There are no settlers. No evidence of valuable mineral deposits was found. Several roads traverse the township.



T. 26 N., R. 8 E.

Date Diagram.

	3-17-16	3-17-16	3-17-16	3-17-16	3-17-16	3-17-16
3-14-16	6 4-8-16	5 4-8-16	4 4-7-16	3 4-7-16	2 4-6-16	1 4-5-16
3-14-16	7 4-8-16	8 4-8-16	9 4-7-16	10 4-6-16	11 4-5-16	12 4-4-16
3-14-16	18 4-8-16	17 4-7-16	16 4-6-16	15 4-5-16	14 4-4-16	13 4-4-16
3-14-16	19 4-7-16	20 4-6-16	21 4-5-16	22 4-4-16	23 4-2-16	24 4-2-16
3-13-16	30 4-8-16	29 4-5-16	28 4-4-16	27 4-2-16	26 4-2-16	25 4-2-16
3-13-16	31 4-5-16	32 4-5-16	33 4-4-16	34 4-2-16	35 4-2-16	36 3-13-16

2nd Guide Meridian East

Lines run by Surveyor Johnston on dates shown above.



BOOK 3266

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Theodore O. Johnston, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General for Group 66, Arizona,

bearing date of the 4th day of January, 1916, I have well, faithfully, and truly

in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, retraced and re-

surveyed all those parts or portions of the North Boundary of Township 25 North, Range 8 East, and surveyed all of the Subdivision lines of

TOWNSHIP 26 NORTH, RANGE 8 EAST,

of the Gila and Salt

River Base & Meridian, in the State of Arizona, which are represented in and by diagram on page 28 hereof

the foregoing field notes as having been executed by me, and under my direction; and that all the corners of retracement and resurvey and

said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General for Group 66, Arizona,

and in the specific manner described in the field notes, and that the foregoing are the original field notes of such retracement, resurvey and survey.

Theodore O. Johnston U. S. Surveyor.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix, Ariz. FEB 8 1916

The foregoing field notes of the survey of the Retracement and Resurvey of a Portion of the North Boundary of Township 25 North, Range 8 East,

and Survey of the Subdivision lines of

TOWNSHIP 26 NORTH, RANGE 8 EAST,

of the Gila and Salt River Base and Meridian, in the State of Arizona,

executed by Theodore O. Johnston, U.S. Surveyor,

under his special instructions dated Jan. 4, 1916, for Gr. 66, Ariz., having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above described surveys in has been correctly copied from the original notes on file in this office.