

3267

Book "H"

4-679

BOOK 3267

241
①

FIELD NOTES

RE-
OF THE SURVEY OF THE

North Boundary of Township 25 North, Range 7 East,

and SURVEY of the

East, West and North boundaries, and

Subdivision lines of

TOWNSHIP 26 NORTH, RANGE 7 EAST.

Of the Gila and Salt River Base and Meridian,

In the State of Arizona.

EXECUTED BY

Theodore O. Johnston, U. S. Surveyor,

and

Philip L. Inch, U. S. Transitman,

~~In the capacity of U. S. Surveyor~~, under instructions dated January 4, 1916,
issued by the United States Surveyor General to govern surveys included in
Group No. 66, which were approved by the Commissioner of the General Land
Office, January 17, 1916.

Resurvey & Survey commenced March 13, 1916.

Resurvey & Survey completed April 20, 1916.

Executed under Assignment
Instructions dated Feb. 3, 1916.

3267

3267


3267






Book "H"

Group 66- - - Arizona.

BOOK 3267

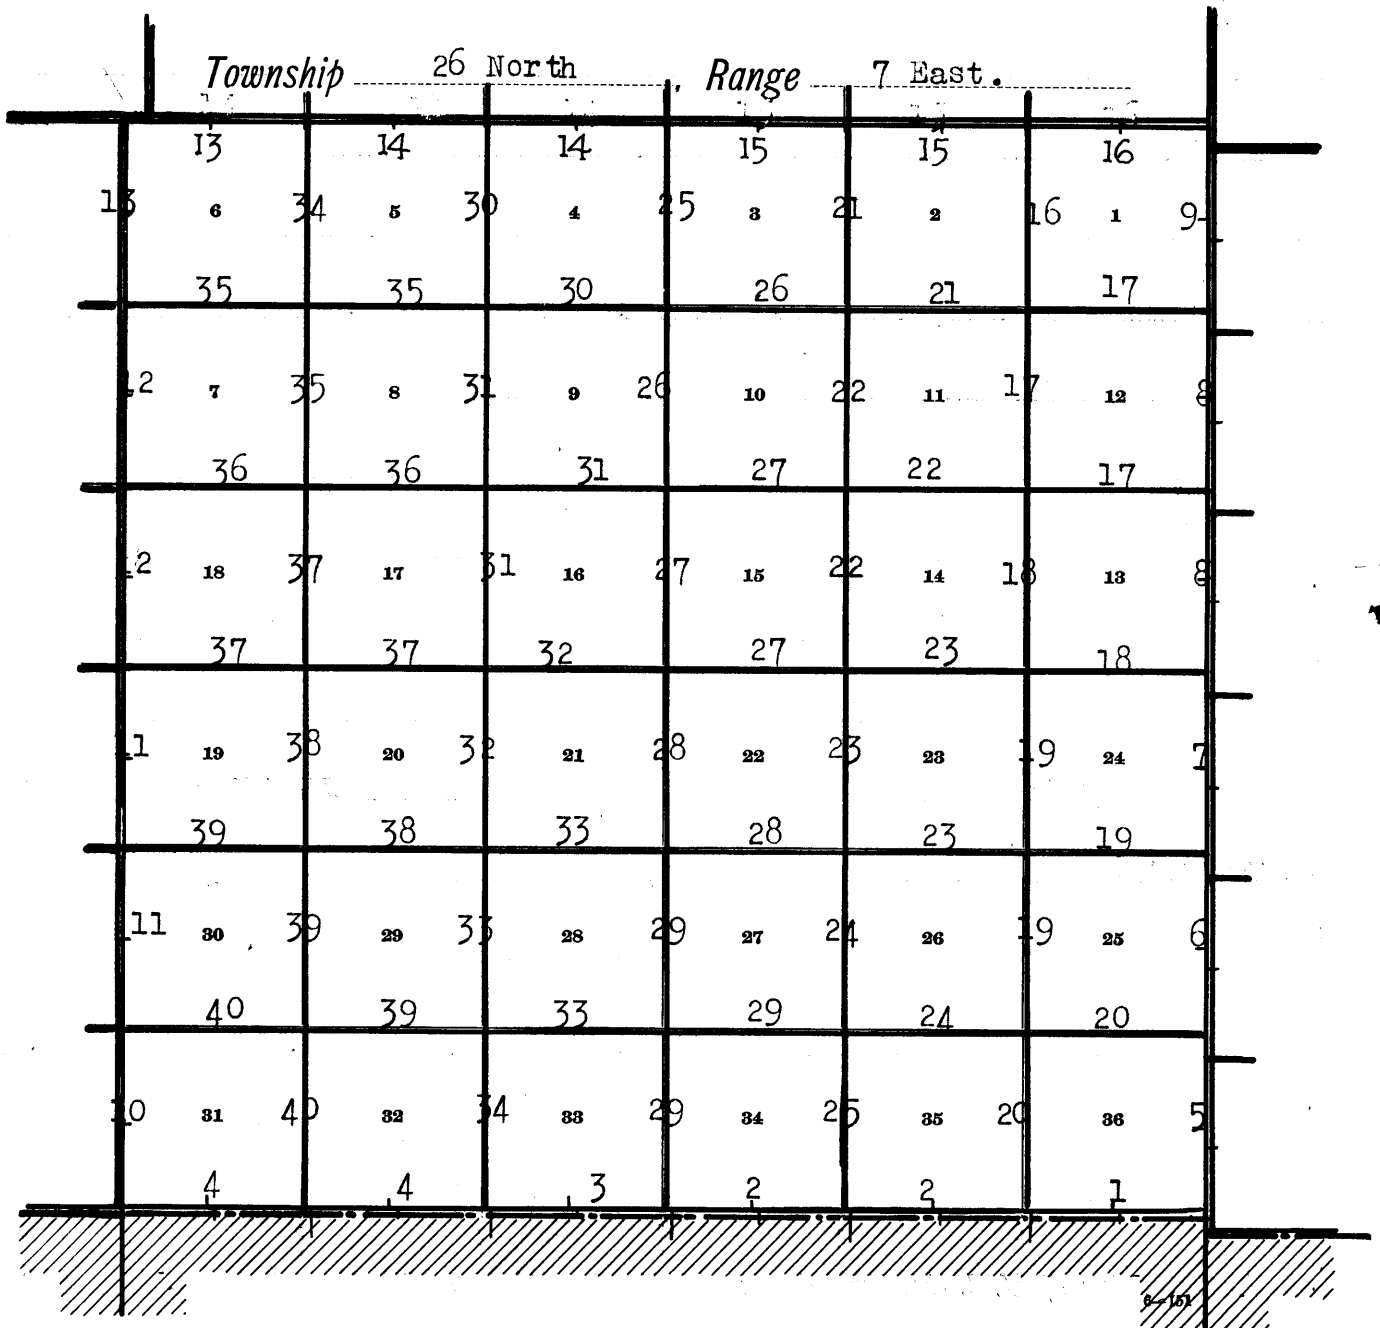INDEX DIAGRAM.



-  Lines surveyed under this Group.
-  " resurveyed " " "
-  " run under current Group 55.
-  Accepted surveys.
-  Areas surveyed, as per accepted plats on file.

Resurvey of N. Bdy., T. 25 N., R. 7 E., and
Survey of E., W., and N. Bdrs., with
Subdivision of T. 26 N., R. 7 E.

Chains

Work executed by Theo. O. Johnston, U. S. Surveyor, and Philip L. Inch, U. S. Transitman. Dates of survey shown on diagram on page 43 hereof. The instruments used are described, with record of approval by the Assistant Supervisor of Surveys, District No. 5, and field tests, in book A.

All lines were deflected from true meridians determined by observations on Polaris at elongation; one of which observations being described in book G, and a description of a second following herein. Lines were projected by fore and back sights and carefully measured angles with transits.

Polaris Observation, by Theo. O. Johnston.

April 11, 1916.

At my camp in sec. 3, T. 26 N., R. 7 E., in lat. 35°40' N., Long. 111°38' W., at 6h 07m, p.m., l.m.t., I observe Polaris at western elongation, in accordance with instructions in the Manual, and mark a point in the line thus determined by a tack driven in a wooden stake firmly set in the ground 5 chs. N. of my station.

April 12, 1916.

I turn off the azimuth of Polaris 1°24' to the E., and mark the meridian thus determined by a tack driven in a wooden stake firmly set in the ground E. of the point established last night.

Resurvey of N., Bdy., T. 25 N., R. 7 E.

From the cor. of Ts. 25 and 26 N., Rs. 7 E., which is a stone, firmly set, marked and witnessed as described by the Surveyor General;

- N. 88°39' W., on a true line, on N. bdy. of sec. 1; 36, ascending on SE. slope of butte.
- 15.00 Summit of ascent, on S. side of butte, 125 ft. above Tp. cor. Thence along broken S. slope.
- 27.20 Desc. on SW. slope 185 ft.
- 39.35 Ft. of slope.
- 39.36 Intersect old $\frac{1}{4}$ sec. cor. which will henceforth pertain solely to sec. 1. Cor. is a stone, firmly set, marked and witnessed as described by the Surveyor General.

Thence N. 87°58' W., on N. bdy. of W. half of sec. 1, over rolling land.
.65 (40.00 chs. W. of the cor. of Ts. 25 and 26 N., Rs. 7 E.) Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 36, with brass cap, as marked

4S36

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

- 39.93 Intersect old cor. of secs. 2, 235 and 36, which is a stone, firmly set, marked and witnessed as described by the Surveyor General. Cor. will henceforth pertain solely

Chains

to secs. 1 and 2.

Land, mountainous and rolling.
Soil, rocky; 4th rate.
No timber.

.74

N. $88^{\circ}25'W.$, on N. bdy. of sec. 2,
over rolling land.
(80.00 chs. W. of the cor. of Ts. 25 and 26 N., Rs. 7 E.)
Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the
ground for reestablished cor. of secs. 35 and 36, with brass cap,
marked

T26N	R 7E
S35	S36

1916

dig pits, 24x24x12 ins. NW. & NE. of post, 6 ft. dist.,
and raise a mound of earth, 4 ft. base, 2 ft. high,
N. of cor.

35.00

Asc. on E. slope.

39.96

Intersect old $\frac{1}{2}$ sec. cor. which will henceforth pertain solely
to sec. 2. Cor. is a stone, firmly set, marked and
witnessed as described by the Surveyor General.

Thence S. $86^{\circ}03'W.$, on N. bdy. of W. half of sec. 2.

.79

(40.00 chs. W. of reestablished cor. of secs. 35 and 36),
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{2}$ sec. cor. of sec. 35, with brass cap,
marked reestablished

$\frac{1}{2}$ S35

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
N. of cor.

39.83

Intersect old cor. of secs. 2, 3, 34 & 35, which is a stone,
firmly set, marked and witnessed as described by the
Surveyor General. This cor. will henceforth pertain
solely to secs. 2 and 3.
Land, rolling. Soil, rocky; 4th rate. No timber.

S. $89^{\circ}01'W.$, on N. bdy. of sec. 3, over mountainous land,
ascending on NE. slope of high butte formed by an extinct
volcano 1000 ft. high.

1.06

(80.00 chs. W. of reestablished cor. of secs. 35 & 36),
Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the
ground, for reestablished cor. of secs. 34 and 35, with
brass cap, marked

T26N	R 7E
S34	S35

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
N. of cor.

15.00

Enter scattering timber, bearing N. and S.

27.00

Summit of ascent, 540 ft. above sec. cor., on N. side of
butte. Top of same, 15 chs. diam., crater of extinct
volcano, bears S., 10 chs. dist.

32.00

Desc. on NW. slope.

Resurvey of N. Bdy., T. 26 N., R. 7 E.

Chains

38.15 Intersect old ~~1 sec.~~ cor. of secs 3 & 34, which is a stone, firmly set, marked and witnessed as described by the Surveyor General. This cor. will henceforth pertain solely to sec. 3.

Thence S.89°05'W., on N. bdy. of W. half of sec. 3.

2.92 (40.00 chs. W. of reestablished cor. of secs 34 and 35), Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished ~~1 sec.~~ cor. of sec. 34, with, brass cap, marked

1/2 S34

1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

6.86 Leave timber, bearing NE. and SW.
14.85 Ft. of slope, 380 ft. below 27 ch. pt. on first half mile. Thence along broken N. slope.

29.85 Enter scattering timber.

36.15 Intersect old cor. of secs 4, 33 & 34, which is a stone, firmly set, marked and witnessed as described by the Surveyor General. This cor. will henceforth pertain solely to secs. 3 and 4. Destroy marks on bearing tree, NW. of cor.

Land, mountainous. Soil, rocky, 4th rate. Timber, pinyon and juniper.

N.88°52'W., on N. bdy. of sec. 4, along broken N. slope, through scattering timber.

6.78 (80.00 chs. W. of reestablished cor. of secs 34 and 35), Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for reestablished cor. of secs 33 and 34, with brass cap, marked

T26N R 7E
S33 S34

1916

from which
A pinyon, 10 ins. diam., bears N.44 1/4°E., 95 lks. dist., marked T26N R7E S34 BT, and
A cedar, 8 ins. diam., bears N.24 1/2°W., 68 lks. dist., marked T26N R7E S33 BT.

10.00 Leave timber, bearing N. and S.
21.50 Ridge bears NW. and SE. Desc. on broken SW. slope.

39.13 Intersect old ~~1 sec.~~ cor. of secs 4 and 33, which is a stone, firmly set, marked and witnessed as described by the Surveyor General. This cor. will henceforth pertain solely to sec. 4.

Thence S.89°16'W., on N. bdy. of W. half of sec. 4.

6.00 Ft. of descent, 170 ft. below ridge. Thence along rolling N. slope.

7.66 (40.00 chs. W. of reestablished cor. of secs 33 and 34), Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished ~~1 sec.~~ cor. of sec. 33, with, brass cap, marked

1/2 S33

1916

4

Resurvey of N. Bdy. T. 25 N. R. 7 E.

Chains

and raise a mound of stone, 2 ft. base, 1½ ft. high,
N. of cor.
28.88 Road from Flagstaff to Grand Canyon bears N. and S.
30.88 Small rocky canyon, course N.
39.83 Intersect old cor. of secs. 4, 5, 32 & 33, which is a stone
firmly set, marked and witnessed as described by the
Surveyor General. This cor. will henceforth pertain
solely to secs. 4 and 5.

Land, mountainous and rolling.
Soil, rocky; 4th rate.
Timber, pinyon and juniper.

7.83 N. 89° 55' W., on N. bdy. of sec. 5,
over rolling land.
(80.00 chs. W. of reestablished cor. of secs. 33 and 34),
Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the
ground, for reestablished cor. of secs. 32 and 33, with
brass cap, marked

T26N | R. 7E
S32 | S33

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high,
N. of cor.
40.00 Intersect old cor. of secs. 5 and 32, which is a stone
firmly set, marked and witnessed as described by the
Surveyor General. This cor. will henceforth pertain
solely to sec. 5.

7.83 Thence West, on N. bdy. of W. half of sec. 5.
(40.00 chs. W. of reestablished cor. of secs. 32 and 33),
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for reestablished cor. of sec. 32, with brass
cap, marked

¼ S32

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high,
N. of cor.
37.70 Ditch, course NE.
39.84 Intersect old cor. of secs. 5, 6, 31 & 32, which is a stone,
firmly set, marked and witnessed as described by the
Surveyor General. This cor. will henceforth pertain
solely to secs. 5 and 6.

Land, rolling.
Soil, rocky; 4th rate.
No timber.

7.99 S. 89° 24' W., on N. bdy. of sec. 6,
over rolling land.
(80.00 chs. W. of reestablished cor. of secs. 32 and 33),
Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the
ground, for reestablished cor. of secs. 31 and 32, with
brass cap, marked

T26N | R. 7E
S31 | S32


1916

Resurvey of N. Bdy. T. 26 N. R. 7 E.

Chains

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

40.00 Intersect old 1/4 sec. cor. of secs. 6 and 31, which is a stone, firmly set, marked and witnessed as described by the Surveyor General. This cor. will henceforth pertain solely to sec. 6.



Thence N. 89° 40' W., on N. bdy. of W. half of sec. 6.

7.99 (40.00 chs. W. of reestablished cor. of secs. 31 and 32), Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 31, with brass cap, marked

1/4 S 31


1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

23.80 Road bears NW. and SE.

43.20 Intersect old cor. of Ts. 25 and 26 N., Rs. 6 and 7 E., which is a stone, firmly set, marked and witnessed as described by the Surveyor General.

Land, rolling.
Soil, rocky; 4th rate.
No timber.



Survey of
E. Bdy., T. 26 N., R. 7 E.

From the cor. of Ts. 25 and 26 N., Rs. 7 E., hereinbefore described;

North, on E. bdy. of sec. 36,
over rolling land, along E. slope.

28.30 Road bears NW. and SE.

28.90 (40.00 chs. N. of the closing cor. of Ts. 25 and 26 N., Rs. 8 E., described in book G.)

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor. of sec. 31, with brass cap, marked

1/4 S 31

1916

dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist. and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, E. of cor.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor. of sec. 36, with brass cap, marked

1/4 S 36

1916

dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist. and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

Chains

68.90 (80.00 chs. N. of the closing cor. of Ts. 25 and 26 N.,
Rs. 8 E.)
Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the
ground, for $\frac{1}{4}$ sec. cor. of secs. 31 and 31, with brass
cap, marked

T26N
S30
—
S31
R 8E

1916

dig pits, 24x24x12 ins., NW. & SW. of post, 6 ft. dist.,
and raise a mound of earth, 4 ft. base, 2 ft. high,
E. of cor.

80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the
ground, for cor. of secs. 25 and 36, with brass cap,
marked

T26N
S25
—
S36
R 7E

1916

dig pits, 24x24x12 ins., NW. and SW. of post, 6 ft. dist.,
and raise a mound of earth, 4 ft. base, 2 ft. high,
W. of cor.

Land, rolling.

Soil, gravelly, cinders; 2nd and 3rd rate.
No timber.

28.90 North, on E. bdy. of sec. 25,
over rolling land.
(40.00 chs. N. of the cor. of secs. 30 and 31)
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor. of sec. 30, with brass cap,
marked

$\frac{1}{4}$ S30

1916

dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.,
and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
E. of cor.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor. of sec. 25, with brass cap,
marked

$\frac{1}{4}$ S25

1916

dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.,
and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

42.90 Wash, course NE.

44.80 Road bears NE. and SW.

68.90 (80.00 chs. N. of the cor. of secs. 30 and 31)
Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the
ground, for cor. of secs. 19 and 30, with brass cap,
marked

T26N
S19
—
S30
R 8E

1916

Chains

dig pits, 24x24x12 ins., NE and SE of post, 50 ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, E. of cor.

80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 24 and 25, with brass cap, marked

T26N
S24

S25
R 7E

1916

dig pits, 24x24x12 ins., NW and SW of post, 50 ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, rolling.
Soil, gravel and cinders; 2nd and 3rd rate.
No timber.

North, on E. bdy. of sec. 24, over rolling land.

22.40 Rocky knoll, 20 ft. high,
28.90 (40.00 chs. N. of the cor. of secs. 19 and 30)
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor. of sec. 19, with brass cap, marked

1/4 S19

1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor. of sec. 24, with brass cap, marked

1/4 S24

1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

68.90 (80.00 chs. N. of the cor. of secs. 19 and 30)
Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 18 and 19, with brass cap, marked

T26N
S18

S19
R 8E

1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

78.90 Wash, course NE.

80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 13 and 24, with brass cap, marked

T26N
S13

S24
R 7E

1916

Chains

and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.

Land, rolling.

Soil, rocky and gravelly; 3rd and 4th rate.
No timber.

28.90

North, on E. bdy. of sec. 13,
over rolling land.

(40.00 chs. N. of the cor. of secs. 18 and 19)

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for ¼ sec. cor. of sec. 18, with brass cap,
marked

¼S18

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high,
E. of cor.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for ¼ sec. cor. of sec. 13, with brass cap,
marked

¼S13

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.

68.90

(80.00 chs. N. of the cor. of secs. 18 and 19)

Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the
ground, for cor. of secs. 7 and 18, with brass cap,
marked

T26N

S7

S18

R 8E

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high,
E. of cor.

80.00

Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the
ground, for cor. of secs. 12 and 13, with brass cap,
marked

T26N

S12

S13

R 7E

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.

Land, rolling.

Soil, rocky; 4th rate.
No timber.

28.90

North, on E. bdy. of sec. 12,
over rolling land.

(40.00 chs. N. of the cor. of secs. 7 and 18),

Chains

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor. of sec. 7, with brass cap, marked

1S7

1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

40.00 Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, (impracticable to set post in the ground) for 1/4 sec. cor. of sec. 12, with brass cap, marked

1S12

1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

55.90 Wash, course NE.

68.90 (80.00 chs. N. of the cor. of secs. 7 and 18) Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 6 and 7, with brass cap, marked

T26N

S6

S7

R 8E

1916

from which

A juniper, 6 ins. diam., bears S.36°E., 30 lks. dist., marked T26N R8E S7 BT.

No other trees within limits. Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 1 and 12, with brass cap, marked

T26N

S1

S12

R 7E

1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling.

Soil, rocky; 4th rate.

No timber.

North, on E. bdy. of sec. 1, over rolling and broken land.

27.90 Head of rocky wash, 40 ft. deep, course E.

28.90 (40.00 chs. N. of the cor. of secs. 6 and 7)

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in a mound of stone, (impracticable to set post in the ground,) for 1/4 sec. cor. of sec. 6, with brass cap, marked

1S6

1916

10

E. bdy., T. 26 N., R. 7 E.

Chains

and raise a mound of stone, 2 ft. base, 1½ ft. high,
E. of cor.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for ¼ sec. cor., of sec. 1, with brass cap,
marked

½S1
|
1916

and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.

68.90 (80.00 chs. N. of the cor. of secs. 6 and 7)
Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the
ground, for cor. of Ts. 26 and 27 N., Rs. 8 E., with
brass cap, marked

T27N
R8E
S31
—
S6
T26N

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high,
E. of cor.

80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the
ground, for cor. of Ts. 26 and 27 N., Rs. 7 E., with
brass cap, marked

T27N
R 7E
S36
—
S1
T26N

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.

Land, rolling and broken.
Soil, rocky; 4th rate.
No timber.

W. Bdy., T. 26 N., R. 7 E.

From the cor. of Ts. 25 and 26 N., Rs. 6 and 7 E., here-
inbefore described;

North, bet. secs. 31 and 36,
over rolling land.

19.40 Road bears NW. and SE.

20.00 Enter timber, bearing NW. and SE., and asc. on SW. slope.

26.00 Summit of ascent bears NW. and SE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground for ¼ sec. cor., with brass cap, marked

½
S36 | S31


1916

from which

Chains

A pinyon, 12 ins. diam., bears N.8 $\frac{1}{4}$ °E., 180 lks. dist., marked $\frac{1}{4}$ S31 BT, and
 A pinyon, 14 ins. diam., bears N.9°W., 374 lks. dist., marked $\frac{1}{4}$ S36 BT.

61.00 Leave timber, bearing NE. and SW.
 79.00 Road bears NE. and SW:
 80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 25, 30, 31 and 36, with brass cap, marked




1916
 and raise a mound of stone 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Land, rolling.
 Soil, rocky; 4th rate.
 Timber, pinyon and juniper.


North, bet. secs. 25 and 30,
 over rolling land.

20.00 Enter scattering timber and asc. on SE. slope.
 24.00 Summit of ascent bears NE. and SW.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



from which
 A pinyon, 6 ins. diam., bears S.65°W., 332 lks. dist., marked $\frac{1}{4}$ S25 BT, and
 A juniper, 6 ins. diam., bears N.65 $\frac{1}{2}$ °E., 28 lks. dist., marked $\frac{1}{4}$ S30 BT.

44.20 Leave timber, bearing E. and W., and desc. on NW. slope.
 73.00 Wash, course NE.
 80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 19, 24, 25 and 30, with brass cap, marked



1916
 and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Land, rolling.
 Soil, rocky; 4th rate.
 Timber, pinyon and juniper.


North, bet. secs. 19 and 24,
 over rolling land.

4.50 Rocky wash, course E.
 21.00 Wash, course E. Asc. on SE slope.
 33.70 Summit of ascent bears E. and W.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

12


W. Bdy. T. 26 N. R. 7 E.

Chains



from which
 A pinyon, 8 ins. diam., bears S.29 3/4°E., 337 lks. dist.,
 marked 1/4 S19 BT, and
 A pinyon, 12 ins. diam., bears N.81 1/4°W., 220 lks. dist.,
 marked 1/4 S24 BT.

47.40 Desc. on NE. slope.
 67.30 Leave timber, bears NW. and SE. Desc. on N. slope.
 78.50 Rocky wash, course NE.
 80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the
 ground, for cor. of secs. 13, 18, 19 and 24, with brass
 cap, marked




1916
 and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
 W. of cor.

Land, rolling and broken.
 Soil, rocky; 4th rate.
 Timber, pinyon and juniper.


North, bet. secs. 13 and 18,
 over rolling mountainous land, ascending on SE. slope.

1.17 Summit of ascent. Desc. on N. slope.
 16.70 Road from Flagstaff to Grand Canyon bears E. and W.
 17.50 Wash, course E. Asc. on S. slope.
 33.00 Ridge bears E. and W. Desc. on N. slope.
 38.00 Rocky wash, course E. Asc. on rocky S. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for 1/4 sec. cor., with brass cap, marked



and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
 W. of cor.

49.00 Summit of ascent, on spur projecting E. Desc. on NE. slope.
 80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the
 ground, for cor. of secs. 7, 12, 13 and 18, with brass
 cap, marked



1916
 and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
 W. of cor.

Land, rolling and mountainous.
 Soil, rocky; 4th rate.
 No timber.

North, bet. secs. 7 and 12,
 Over rolling and mountainous land, descending on N. slope.

17.50 Wash, course NE.
 25.00 Asc. on SE. slope.
 34.20 Ridge bears E. and W. Desc. on N. slope.

Chains

37.50 Wash, course E. Asc. on S. slope.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked

S12 | S 7

1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

42.00 Summit of ascent. Thence over rolling land.

80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 1, 6, 7 and 12, with brass cap, marked

T26N
R6E | R7E
S1 | S6

S12 | S 6

1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, mountainous and rolling.
Soil, rocky; 4th rate.
No timber.

North, bet. secs. 1 and 6,
over rolling land, ascending on SE. slope.

1.00 Summit of ascent bears NE. and SW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked

S1 | S6

1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Asc. on SE. slope.

55.00 Summit of ascent bears E. and W.

80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of Ts. 26 N., Rs. 6 and 7 E., with brass cap, marked

S1 | S6
R6E | R7E

T26N
1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, S. of cor.

Land, rolling and mountainous.
Soil, rocky; 4th rate.
No timber.

14


N. 26 N., R. 7 E.

Chains

475.28 temp. cors. at intervals of 40.00 chs.
Intersect cor. of Ts. 26 N., Rs. 6 and 7 E., hereinbefore described.

Thence East, on a true line, on N. bdy of sec. 31, over rolling land.

35.28 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked S31




and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

44.80 Rocky butte. Desc. on NE. slope.

66.30 Rocky wash, course SE.

75.28 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 5, 6, 31 and 32, with brass cap, marked



T26N
1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.


Land, rolling.

Soil, rocky; 4th rate.

No timber.

East, on a true line, bet. secs. 5 and 32, over rolling land.


40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked



and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

59.00 Ridge bears N. and S.

80.00 Set an iron post, 3 ft. long, 3 ins. diam., 26 ins. in the ground, for cor. of secs. 4, 5, 32 and 33, with brass cap, marked



T26N
1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling.

Soil, rocky; 4th rate.

No timber.

East, bet. secs. 4 and 33, over rolling land. Ascending on broken SE. slope.

15.00 Head of gulch, course NE. Asc. on SW. slope.

22.50 Summit of ascent.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins in the ground, for 1/4 sec. cor., with brass cap, marked

Chains

S33
1
4-S 4

1916

80.00 and raise a mound of stone, 2 ft. base, 1½ ft. high,
N. of cor.
Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the
ground, for cor. of secs. 3, 4, 33 and 34, with brass
cap, marked

T27N | R 7E
S33 | S34

S4 | S3

T26N
1916

and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.

Land, rolling.
Soil, rocky; 4th rate.
No timber.

13.80 East, bet. secs. 3 and 34,
over rolling land, through scattering scrub juniper, along
edge of bench.
22.00 Desc. on steep E. slope of bench.
38.20 Ft. of slope, 175 ft. below top of bench.
40.00 Canyon, course N. Asc. on W. slope.
Summit of ascent.

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for ¼ sec. cor., with brass cap, marked

S34
1
4 S 3
1916

80.00 and raise a mound of stone, 2 ft. base, 1½ ft. high,
N. of cor.
Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the
ground, for cor. of secs. 2, 3, 34 and 35, with brass
cap, marked

T27N | R 7E
S34 | S35

S3 | S2

T26N
1916

and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.

Land, mountainous and rolling.
Soil, rocky; 4th rate.
Timber, juniper.

3.00 East, bet. secs. 2 and 35,
over rolling land.
15.30 Wash, course NW.
31.50 Road bears NW. and SE.
40.00 Wash, course NW.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for ¼ sec. cor., with brass cap, marked

S35
1
4 S 2
1916

and raise a mound of stone, 2 ft. base, 1½ ft. high,
N. of cor.

Chains

80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 1, 2, 35 and 36, with brass cap, marked

T27N	R 7E
S35	S36
<hr/>	
S2	S1

T26N
1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling.
Soil, rocky: 4th rate.
No timber.

East, bet. secs. 1 and 36,
over rolling land.

1.30 Road bears N. and S.

20.00 Top of butte.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

<hr/>	
¼	
<hr/>	
S 1	
<hr/>	
1916	

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

80.00 The cor. of Ts. 26 and 27 N., Rs. 7 E., hereinbefore described.
Land, rolling.
Soil, rocky; 4th rate.
No timber.

Subdivision of T. 26 N., R. 7 E.

The S. bdy. of this Tp. being outside of allowable limits of error in alinement and measurement, the subdivision lines were run from N. to S.

Beginning at the cor. of secs. 1, 2, 35 and 36, on N. bdy. of Tp., hereinbefore described;

S.0°01'E., bet. secs. 1 and 2,
over rolling land.

40.00 Road bears NE. and SW.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

<hr/>	
¼	
<hr/>	
S2	S1
<hr/>	
1916	

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 1, 2, 11 and 12, with brass cap, marked

T26N	R 7E
S2	S1
<hr/>	
S11	S12
<hr/>	
1916	

Subdivision of T. 26 N., R. 7 E.

Chains

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling.
Soil, rocky clay; 4th rate.
No timber.

East, on a random line, bet. secs. 1 and 12.


40.00
80.06

Set temp. ¼ sec. cor.
Intersect E. bdy. of Tp. 12 lks N. of the cor. of secs. 1 and 12, hereinbefore described.

Thence N. 89° 55' W., on a true line, bet. secs. 1 and 12, over rolling land.

40.03

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked



dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist. and raise a mound of earth, 3½ ft. base, 1½ ft. high, N. of cor.

55.00
80.06


Wash, course N.
The cor. of secs. 1, 2, 11 and 12.

Land, rolling.
Soil, rocky clay; 4th rate.
No timber.

S. 0° 01' E., bet. secs. 11 and 12, over rolling land.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked




and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

45.00
50.00
74.00
79.00

Road, at forks, bears NW. and NE.
Road bears NE. and SW.
Road bears NW. and SE.
Edge of lava beds.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 11, 12, 13 and 14, with brass cap, marked



1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling and broken.
Soil, rocky clay; 4th rate.
No timber.

East, on a random line, bet. secs. 12 and 13.

40.00
80.00

Set temp. ¼ sec. cor.
Intersect E. bdy. of Tp. 7 lks. N. of the cor. of secs. 12 and 13, hereinbefore described.

Chains

Thence N. 89° 57' W., on a true line, bet. secs. 12 and 13,
over rolling land.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
S12
 $\frac{1}{4}$
S13
1916
and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
N. of cor.
53.00 Cattle trail bears NW. and SE.
77.00 Road bears NW. and SE.
78.00 Edge of lava bed.
80.00 The cor. of secs. 11, 12, 13 and 14.

Land, rolling.
Soil, rocky clay; 4th rate.
No timber.

S. 0° 01' E., bet. secs. 13 and 14,
over broken, mountainous land, across lava bed.
40.00 Set an iron post, 3 ft. long, 1 in. diam., in a mound of
stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
S14 | S13

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in a
mound of stone, for cor. of secs. 13, 14, 23 and 24,
with brass cap, marked

T26N | R 7E
S14 | S13
S23 | S24

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

Land, mountainous and broken.
Soil, lava; 4th rate.
No timber.

East, on a random line, bet. secs. 13 and 24.
40.00 Set temp. $\frac{1}{4}$ sec. cor.
80.12 Intersect E. bdy. of Tp. 14 lks. N. of the cor. of secs.
13, and 24, hereinbefore described.

Thence N. 89° 54' W., on a true line, bet. secs. 13 and 24,
over mountainous land. Asc. 320 ft., on SE. slope.
29.00 Summit of ascent, on S. slope of butte. Desc. 115 ft.,
on W. slope of same.

35.10 Head of ravine, course NE. Asc. 45 ft., on E. slope.

40.06 Summit of ascent bears N. and S.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S13
 $\frac{1}{4}$

S24

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
N. of cor.

50.00 Desc. 150 ft., on SW. slope.
ft. of slope.

Chains

54.12 Road bears NW. and SE.
 55.00 Edge of lava bed bears N. and S. Thence across same.
 80.12 The cor. of secs. 13, 14, 23 and 24.

Land, mountainous.
 Soil, rocky lava; 4th rate.
 No timber.

40.00 S. 0° 01' E., bet. secs. 23 and 24,
 over rough and broken land, mountainous; across lava bed.
 Set an iron post, 3 ft. long, 1 in. diam., in a mound of
 stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S23	S24
-----	-----

80.00 1916
 and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.
 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 23, 24, 25 and 26, with brass
 cap, marked

T26N	R 7E
S23	S24
S26	S25

1916
 and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.

Land, mountainous.
 Soil, lava; 4th rate.
 No timber.

40.00 East, on a random line, bet. secs. 24 and 25.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.10 Intersect E. bdy. of Tp. 16 lks. N. of the cor. of secs.
 24 and 25, hereinbefore described.

40.05 Thence N. 89° 53' W., on a true line, bet. secs. 24 and 25,
 over rolling land.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S24
$\frac{1}{4}$
S25
1916

dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.,
 and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
 N. of cor.


45.10 Road bears N. and S.
 46.10 Road bears NE. and SW.
 66.30 Road bears NE. and SW.
 68.10 Edge of lava bed bears N. and S. Thence across same.
 80.10 The cor. of secs. 23, 24, 25 and 26.

Land, mountainous and rolling.
 Soil, gravelly E. of lava bed; balance volcanic.
 No timber.

20.00 S. 0° 01' E., bet. secs. 25 and 26,
 over rough broken land, across lava bed.
 Leave lava bed, bearing NE. and SW. Thence over rolling
 land.

Chains

29.40 Road bears NE. and SW.
 32.40 Wash, course NE.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked




1916

dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Asc. on NE. slope of high butte, with crater of extinct volcano on top; 470 ft.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 25, 26, 35 and 36, with brass cap, marked



1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, mountainous, broken and rolling.

Soil, lava and gravelly; 4th rate.

No timber.


40.00 East, on a random line, bet. secs. 25 and 36.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.14 Intersect E. bdy. of Tp. 21 lks. N. of the cor. of secs. 25 and 36, hereinbefore described.

Thence N.89°51'W., on a true line, bet. secs. 25 and 36, over rolling land.

19.00 Road bears NE. and SW.

22.90 Road bears NW. and SE.

40.07 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



1916

dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

60.00 Asc. 370 ft., on E. slope of butte.

80.14 The cor. of secs. 25, 26, 35 and 36.

Land, rolling and mountainous.

Soil, gravelly; 4th rate.


No timber.

40.00 S.0°01'E., on a random line, bet. secs. 35 and 36.
 Set temp. $\frac{1}{4}$ sec. cor.
 77.85 Intersect S. bdy. of Tp. 5 lks. N. of reestablished cor. of secs. 35 and 36, hereinbefore described.

Thence N.0°03'W., on a true line, bet. secs. 35 and 36, over rolling land.

32.85 Ft. of SE. slope of butte bears NE. and SW. Asc.

37.85 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



1916


Chains

and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.
62.85 Summit of ascent, 320 ft. above ft. of slope; on E. side
of butte. Thence along E. slope.
72.85 Desc. 25 ft., on NE. slope.
77.85 The cor. of secs. 25, 26, 35 and 36.


Land, mountainous and rolling.
Soil, gravelly and rocky; 4th rate.
No timber.

From the cor. of secs. 2, 3, 34 and 35, on N. bdy. of Tp.
hereinbefore described;

S.0°01'E., bet. secs. 2 and 3,
over rolling land.
Asc. on N. slope, 25 ft.
3.00 Summit.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for ¼ sec. cor., with brass cap, marked




80.00 and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.
Set an iron post, 3 ft. long, 2 ins. diam., in a mound of
stone, for cor. of secs. 2, 3, 10 and 11, with brass
cap, marked



and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.
Land, rolling.
Soil, rocky clay; 4th rate.
No timber.

40.00 East, on a random line, bet. secs. 2 and 11.
Set temp. ¼ sec. cor.
80.00 Intersect the corner of secs. 11, 12, 10 and 11, 2, 11 and
12.

Thence West, on a true line, bet. secs. 2 and 11,
over rolling land.
3.00 Road bears N. and S.
11.00 W. edge of mesa.
39.00 Road bears N. and S.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins in the
ground, for ¼ sec. cor., with brass cap, marked




80.00 and raise a mound of stone, 2 ft. base, 1½ ft. high,
N. of cor.
The cor. of secs. 2, 3, 10 and 11.

Land, rolling.
Soil, rocky clay; 4th rate.
No timber.


Chains

1.70 S.0°01'E., bet. secs. 10 and 11,
over rolling land.
40.00 Road bears NW. and SE.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 10, 11, 14 and 15, with brass
cap, marked




1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

Land, rolling.
Soil, rocky; 4th rate.
No timber.

40.00 East, on a random line, bet. secs. 11 and 14.
Set temp. $\frac{1}{4}$ sec. cor.
79.98 Intersect N. and S. line 2 lks. N. of the cor. of secs.
11, 12, 13 and 14.

39.99 Thence N.89°59'W., on a true line, bet. secs. 11 and 14,
over broken lava bed.
Set an iron post, 3 ft. long, 1 in. diam., in a mound of
stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked




and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
N. of cor.

45.00 Top of NW. slope bears NE. and SW. Desc. 120 ft.
51.00 Ft. of slope bears NE. and SW. Leave lava bed. Thence over
rolling land.

79.98 The cor. of secs. 10, 11, 14 and 15.

Land, rolling and mountainous.
Soil, rocky and lava; 4th rate.
No timber.

40.00 S.0°01'E., bet. secs. 14 and 15,
over rolling land.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



1916

and raise a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

45.00 Asc. on NW. slope.
Summit of ascent bears NE. and SW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 14, 15, 22 and 23, with brass
cap, marked

Chains

T26N	R 7E
S15	S14
S22	S23

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling.
Soil, rocky; 4th rate.
No timber.

40.00
79.82

East, on a random line, bet. secs. 14 and 23,
Set temp. ¼ sec. cor.
Intersect N. and S. line 14 lks. N. of the cor. of secs. 13, 14, 23 and 24.

39.91

Thence N.89°54'W., on a true line, bet. secs. 14 and 23, over broken lava bed.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in a mound of stone, for ¼ sec. cor., with brass cap, marked

S14
¼
S23
1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

71.00
77.00
79.82

Desc. on NW. slope.
Ft. of descent. Leave lava bed, bearing NE. and SW.
The cor. of secs. 14, 15, 22 and 23.

Land, mountainous and broken.
Soil, lava; 4th rate.
No timber.

40.00

S.0°01'E., bet. secs. 22 and 23, over mountainous land, ascending on NW. slope of lava bed.
Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, for ¼ sec. cor., with brass cap, marked

S22	S23
1916	

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in a mound of stone, for cor. of secs. 22, 23, 26 and 27, with brass cap, marked

T26N	R 7E
S22	S23
S27	S26

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, mountainous.
Soil, lava; 4th rate.
No timber.

40.00

East, on a random line, bet. secs. 23 and 26.
Set temp. ¼ sec. cor.

Chains

79.96 Intersect N. and S. line 9 lks. S. of the cor. of secs. 23, 24, 25 and 26.

Thence S. 89° 56' W., on a true line, bet. secs. 23 and 26, over broken lava bed.

39.98 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked S23

$\frac{1}{4}$ ———
S26
1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

79.96 The cor. of secs. 22, 23, 26 and 27.

Land, mountainous.
Soil, lava; 4th rate.
No timber.

S. 0° 01' E., bet. secs. 26 and 27, over mountainous land, across lava bed.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ ———
S27 | S26
1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

49.00 Leave lava bed, bearing E. and W. Thence over rolling land.

70.40 Road bears NE. and SW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 26, 27, 34 and 35, with brass cap, marked

T26N | R7 E
S27 | S26
S34 | S35
1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, mountainous and rolling.
Soil, lava and gravelly; 4th rate.
No timber.

40.00 East, on a random line, bet. secs. 26 and 35. Set temp. $\frac{1}{4}$ sec. cor.

79.84 Intersect N. and S. line 7 lks. S. of the cor. of secs. 25, 26, 35 and 36.

Thence S. 89° 57' W., on a true line, bet. secs. 26 and 35, over mountainous land. Asc. 100 ft., on E. slope of butte.

6.10 Summit of ascent. Desc. 160 ft., on W. slope, into crater.

12.00 Bottom of crater. Asc. 85 ft., on E. slope of same.

17.00 W. rim of crater. Desc. 480 ft., on W. slope of butte.

35.50 Ft. of slope. Fence bears N. and S. Thence over rolling land.

39.92 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S26
 $\frac{1}{4}$ ———
S35
1916

Subdivision of T. 26 N. R. 7 E.

Chains

dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

50.00 L. Wheeler's house bears N., 20 chs. dist.
53.80 Road bears N. and S.
79.84 The cor. of secs. 26, 27, 34 and 35.


Land, mountainous and rolling.
Soil, rocky; 4th rate.
No timber.

S.0°01'E., on a random line, bet. secs. 34 and 35.

40.00 Set temp. 1/2 sec. cor.
79.30 Intersect S. bdy. of Tp. 7 lks. E. of ~~the~~ established cor. of secs. 34 and 35, here in before described.

Thence N.0°02'E., on a true line, bet. secs. 34 and 35, over rolling land, descending on NE. slope.

5.00 Ft. of descent.
39.30 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked



1916

dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.


39.70 Fence bears N.70°W. and S.70°E.
79.30 The cor. of secs. 26, 27, 34 and 35.

Land, rolling.
Soil, gravelly and rocky; 4th rate.
No timber.

From the cor. of secs. 3, 4, 33 and 34, on N. bdy. of Tp. hereinbefore described;

S.0°02'E., bet. secs. 3 and 4, over rolling land.


31.00 Enter scattering timber, bearing NE. and SW.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked



1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

55.00 Desc. on S. slope. Leave timber.
61.70 Fence bears NE. and SW.
65.50 Reservoir, 60 lks. wide, in rocky wash, course NE., on line. Concrete dam, 2 chs. down wash.
70.30 Fence bears NE. and SW.
71.00 Road bears NE. and SW.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 3, 4, 9 and 10, with brass cap, marked



1916

Chains

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling and broken.
Soil, rocky; 4th rate.
Timber, scrub juniper.

East, on a random line, bet. secs. 3 and 10.

40.00 Set temp. ¼ sec. cor.
80.00 Intersect N. and S. line 4 lks. S. of the cor. of secs. 2, 3, 10 and 11.

S. 89° 58' W., on a true line, bet. secs. 3 and 10, over rolling land.

1.20 Road bears NW. and SE.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

S 3

¼
S10
1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

55.00 Wash, course N.
65.00 Ft. of SE. slope bears N. and S. Asc. 200 ft.
74.50 Summit of ascent.
75.50 Desc. 110 ft., on NW. slope.
80.00 The cor. of secs. 3, 4, 9 and 10.

Land, rolling and mountainous,
Soil, rocky; 4th rate.
No timber.

S. 0° 02' E., bet. secs. 9 and 10, over rolling land. Asc. 130 ft., on SW. slope.

7.40 Summit of ascent.
38.00 N. edge of canyon, course E.
40.00 Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, for ¼ sec. cor., with brass cap, marked

¼
S9 | S10

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

49.60 S. edge of canyon.
55.40 N. edge of second canyon, course E.
64.50 S. edge of same.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., in a mound of stone, for cor. of secs. 9, 10, 15 and 16, with brass cap, marked

T26N | R 7E
S 9 | S10

S16 | S15

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor. A cedar, 6 ins. diam., bears S. 30½° W., 332 lks. dist., marked T26N R7W S16 BT. No other trees available.

Land, rolling, mountainous and rolling.
Soil, rocky clay; 4th rate.
No timber.

Subdivision of T. 26 N., R. 7 E.

Chains

East, on a random line, bet. secs. 10 and 15.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.96 Intersect the corner of secs. 10, 11, 14 and 15.
 and 15.

Thence West, on a true line, bet. secs. 10 and 15,
 over rolling land.
 20.00 Top of rise, at summit of gradual E. slope.
 39.98 Set an iron post, 3 ft. long, 1 in. diam., in a mound of
 stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
 S10
 S15
 1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 N. of cor.
 66.00 Ft. of E. slope. Wash, course NE. Asc.
 68.00 Road bears N. and S.
 79.90 Summit of E. slope, 150 ft. above ft.
 79.96 The cor. of secs. 9, 10, 15 and 16.

Land, rolling and rolling mountainous.
 Soil, rocky clay; 4th rate.
 No timber.

S.0°02'E., bet. secs. 15 and 16,
 over rolling land.
 22.00 Desc. on S. slope.
 27.00 Ft. of descent.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
 S16 | S15
 1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in a
 mound of stone, for cor. of secs. 15, 16, 21 and 22,
 with brass cap, marked

T26N | R 7E
 S16 | S15
 S21 | S22
 1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.

Land, rolling and broken.
 Soil, rocky clay; 4th rate.
 No timber.

East, on a random line, bet. secs. 15 and 22.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.94 Intersect N. and S. line 4 lks. S. of the cor. of secs.
 14, 15, 22 and 23.

Thence S.89°58'W., on a true line, bet. secs. 15 and 22,
 over rolling land.
 35.00 Ft. of W. slope.
 39.97 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
 S15
 S22
 1916

Chains

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

64.95 Wash, course N.

79.94 The cor. of secs. 15, 16, 21 and 22.

Land, rolling, and broken.
Soil, rocky clay; 4th rate.
No timber.

S.0°02'E., bet. secs. 21 and 22,
over rolling land, along foot of steep rocky W. slope.
39.50 Wash, course NE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

S21 | S22

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

40.25 Enter lava bed, bearing NE. and SW.

65.50 Leave same, bearing NW. and SE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 21, 22, 27 and 28, with brass cap, marked

T26N | R. 7E

S21 | S22

S28 | S27

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling and broken.

Soil, rocky; 4th rate.

No timber.

East, on a random line, bet. secs. 22 and 27.

40.00 Set temp. ¼ sec. cor.

80.04 Intersect N. and S. line 7 lks. S. of the cor. of secs. 22, 23, 26 and 27.

Thence S.89°57'W., on a true line, bet. secs. 22 and 27, over broken land, across lava bed.

40.02 Set an iron post, 3 ft long, 1 in. diam., in a mound of stone, for ¼ sec. cor., with brass cap, marked

S22

¼

S27

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

45.00 Desc. 140 ft.

56.00 Ft. of descent. Leave lave bed, bearing N. and S.

72.10 Desc. 60 ft., on NW. slope.

76.00 Ft. of descent bears NE. and SW.

80.04 The cor. of secs. 21, 22, 27 and 28.

Land, mountainous and rolling.

Soil, rocky; 4th rate.

No timber.

Subdivision of T. 26 N., R. 7 E.

Chains

S.0°02'E., bet. secs. 27 and 28,
over rolling land.

39.00 Asc. on NE. slope of lava bed.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
S28 | S27
1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

44.40 Top of slope, 125 ft. above ft.

60.00 Leave lava bed, bearing NW. and SE.

70.00 Enter scattering scrub timber, bearing NE. and SW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 27, 28, 33 and 34, with brass cap, marked

T26N | R 7E
S28 | S27

S33 | S34
1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, rolling and mountainous.
Soil, rocky lava; 4th rate.
Timber, scrub pinyon and juniper.

40.00 East, on a random line, bet. secs. 27 and 34.
Set temp. $\frac{1}{4}$ sec. cor.

80.02 Intersect N. and S. line 5 lks. N. of the cor. of secs. 26, 27, 34 and 35.

Thence N.89°58'W., on a true line, bet. secs. 27 and 34, over rolling land.

6.20 Road bears NE. and SW.

20.50 Asc. on E. slope of lava bed.

21.65 Top of ascent bears NE. and SW. Thence over top of lava bed.

40.01 Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S27
 $\frac{1}{4}$

S34
1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

62.00 Ft. of descent bears N. and S. Leave lava bed.

65.00 Enter scattering timber, bearing N. and S.

75.00 Leave timber, bearing N. and S.

80.02 The cor. of secs. 27, 28, 33 and 34.

Land, rolling and mountainous.
Soil, gravelly and lava; 4th rate.
No timber.

40.00 S.0°02'E., on a random line, bet. secs. 33 and 34.
Set temp. $\frac{1}{4}$ sec. cor.

80.57 Intersect S. bdy. of Tp. 18 lks. E. of reestablished cor. of secs. 33 and 34, hereinafter described.

Thence N.0°06'E., on a true line, bet. secs. 33 and 34, over mountainous land, through scattering timber. Desc. on N. slope.

30

Subdivision of T. 26 N., R. 7 E.

Chains

10.60 Leave timber, bearing E. and W.
 25.60 Ft. of slope, 340 ft. below sec. cor.
 30.50 Road bears E. and W.
 31.57 Fence bears E. and W.
 40.57 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$$\frac{1}{4}$$

S33	S34
-----	-----

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

55.60 Enter scattering timber, bearing NW. and SE.
 80.57 The cor. of secs. 27, 28, 33 and 34.

Land, rolling and rolling mountainous.
 Soil, rocky; 4th rate.
 Timber, pinyon and juniper.

From the cor. of secs. 4, 5, 32 and 33, on N. bdy. of Tp. hereinbefore described;

S.0°03'E., bet. secs. 4 and 5, over rolling land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$$\frac{1}{4}$$

S5	S4
----	----

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

75.00 Desc. on S. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., in a mound of stone, for cor. of secs. 4, 5, 8 and 9, with brass cap, marked

T26N	R 7E
S5	S4
S8	S9

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, rolling and broken.
 Soil, rocky clay; 4th rate.
 No timber.

40.00 East, on a random line, bet. secs. 4 and 9.
 Set temp. $\frac{1}{4}$ sec. cor.

80.12 Intersect N. and S. line 6 lks. S. of the cor. of secs. 3, 4, 9 and 10.

Thence S.89°57'W., on a true line, bet. secs. 4 and 9, over rolling land.

5.12 Fence bears NE. and SW.

10.10 Wash, course NE.

11.62 Fence bears NE. and SW.

20.00 Asc. \approx 30 ft., on W. side of canyon, course N.

27.10 Summit of ascent, on W. edge of canyon.

40.06 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$$\frac{1}{4}$$

S4	S9
----	----

1916

Chains	
80.12	<p>and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor. The cor. of secs. 4, 5, 8 and 9.</p> <p>Land, rolling. Soil, rocky clay; 4th rate. No timber.</p>

10.00 11.00 20.00 40.00	<p>S.0°03'E., bet. secs. 8 and 9, over rocky and rolling land. Desc. 115 ft. ft. of descent. Wash, course NE. Road bears NE. and SW. Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked</p>
<p style="text-align: center;">¼ S8 S9</p>	
80.00	<p style="text-align: center;">1916</p> <p>and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor. Set an iron post, 3 ft. long, 2 ins. diam., in a mound of stone, for cor. of secs. 8, 9, 16 and 17, with brass cap, marked</p>
<p style="text-align: center;">T26N R 7E S8 S9 ----- S17 S16</p>	
<p style="text-align: center;">1916</p> <p>and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.</p>	
<p>Land, rolling and broken. Soil, rocky clay; 4th rate. No timber.</p>	

40.00	<p>East, on a random line, bet. secs. 9 and 16. Set temp. ¼ sec. cor.</p>
80.00	<p>Intersect N. and S. line 16 lks. S. of the cor. of secs. 9, 10, 15 and 16.</p>
40.00	<p>Thence S.89°53'W., on a true line, bet. secs. 9 and 16, over roughly rolling land. Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked</p>
<p style="text-align: center;">S 9 ¼ ----- S16 1916</p>	
75.50	<p>and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor. W. edge of mesa bears N. and S. Desc. 100 ft.</p>
80.00	<p>The cor. of secs. 8, 9, 16 and 17.</p> <p>Land, rolling. Soil, rocky clay; 4th rate. No timber.</p>

40.00	<p>S.0°03'E., bet. secs. 16 and 17, over rolling land. Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, for ¼ sec. cor., with brass cap, marked</p>

Chains

$$\frac{1}{4}$$

S17	S16
-----	-----

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 16, 17, 20 and 21, with brass cap, marked

T26N	R 7E
S17	S16
S20	S21

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling.
Soil, rocky clay; 4th rate.
No timber.

40.00 East, on a random line, bet. secs. 16 and 21.
Set temp. ¼ sec. cor.

80.16 Intersect N. and S. line 22 lks. S. of the cor. of secs. 15, 16, 21 and 22.

Thence S.89°51'W., on a true line, bet. secs. 16 and 21, over broken land. Asc. 135 ft., on E. slope.

6.00 Summit of ascent.

23.00 Wash, course NE.

40.08 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

S16	
$\frac{1}{4}$	
S21	

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

80.16 The cor. of secs. 16, 17, 20 and 21.

Land, rolling and broken.
Soil, rocky clay; 4th rate.
No timber.

40.00 S.0°03'E., bet. secs. 20 and 21, over rolling land.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

$$\frac{1}{4}$$

S20	S21
-----	-----

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

43.00 N. edge of wash, course E.

53.50 S. edge of same.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 20, 21, 28 and 29, with brass cap, marked

T26N	R 7E
S20	S21
S29	S28

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high,

Subdivision of T. 26 N., R. 7 E.

Chains

W. of cor.

Land, rolling.
Soil, rocky clay; 4th rate.
No timber.

40.00 East, on a random line, bet. secs. 21 and 28.
Set temp. $\frac{1}{4}$ sec. cor.
80.22 Intersect N. and S. line 7 lks. S. of the cor. of secs.
21, 22, 27 and 28.

Thence S. $89^{\circ}57'W.$, on a true line, bet. secs. 21 and 28,
over rolling land.
1.22 Wash, course N.
6.20 Ft. of E. slope bears N. and S. Asc. 150 ft.
18.80 Summit of ascent.
40.11 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
S21
 $\frac{1}{4}$
S28
1916

and raise a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high, N.
of cor.

80.22 The cor. of secs. 20, 21, 28 and 29.
Land, rolling.
Soil, rocky; 4th rate.
Timber, very scattering scrub cedar and pinyon on middle
part of mile.

40.00 S. $0^{\circ}03'E.$, bet. secs. 28 and 29,
over rolling land.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 $\frac{1}{4}$
S29 | S28
1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.
46.00 Desc. on SW. slope.
52.50 Ft. of descent bears NW. and SE.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 28, 29, 32 and 33, with brass
cap, marked
T26N | R 7E
S29 | S28
S32 | S33
1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

Land, rolling.
Soil, rocky; 4th rate.
Timber, a few scrub cedars and pinyon trees.

40.00 East, on a random line, bet. secs. 28 and 33.
Set temp. $\frac{1}{4}$ sec. cor.
80.30 Intersect N. and S. line 7 lks. S. of the cor. of secs.
27, 28, 33 and 34.

Chains


	Thence S.89°57'W., on a true line, bet. secs. 28 and 33, over rolling and broken land, descending gradually on NW. slope, through scattering timber.
6.00	Ft. of descent. Leave timber.
10.00	Wash, course N.
16.00	Asc. on E. slope. Enter timber bearing N. and S.
25.00	Fence bears NE. and SW.
35.00	Summit of ascent, 130 ft. above ft. of slope; bears N. and S.
40.15	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
	$\begin{array}{r} S28 \\ \frac{1}{4} \\ \hline S33 \\ 1916 \end{array}$
	and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
71.60	Desc. on SW. slope.
75.00	Ft. of descent. Leave timber, bearing N. and S.
80.30	The cor. of secs. 28, 29, 32 and 33.
	Land, rolling and broken. Soil, rocky; 4th rate. Timber, scrub pinyon and juniper.

40.00	S.0°03'E., on a random line, bet. secs. 32 and 33, Set temp. $\frac{1}{4}$ sec. cor.
80.20	Intersect S. bdy. of Tp. at the reestablished corner of secs. 32 and 33, hereinbefore described.
40.20	Thence N.0°03'W., on a true line, bet. secs. 32 and 33, over rolling land. Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
	$\begin{array}{r} \frac{1}{4} \\ S32 S33 \\ \hline 1916 \end{array}$
	and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
62.20	Road bears NW. and SE.
66.30	Flagstaff-Grand Canyon road bears N.30°W. and S.30°E.
80.20	The cor. of secs. 28, 29, 32 and 33.
	Land, rolling. Soil, rocky; 4th rate. No timber.

	From the cor. of secs. 5, 6, 31 and 32, on N. bdy. of Tp., hereinbefore described;
	S.0°03'W., bet. secs. 5 and 6, over rolling land.
9.00	Wash, course SE.
17.60	Desc. 90 ft., on S. slope.
25.00	Ft. of descent.
40.00	Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked
	$\begin{array}{r} \frac{1}{4} \\ S6 S5 \\ \hline 1916 \end{array}$
	and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 5, 6, 7 and 8, with brass cap,

Chains

marked



1916


and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling and broken.
Soil, rocky clay; 4th rate.
No timber.

40.00 East, on a random line, bet. secs. 5 and 8.
Set temp. ¼ sec. cor.
80.08 Intersect N. and S. line 14 lks. N. of the cor. of secs. 4, 5, 8 and 9.

10.00 Thence N. 89° 54' W., on a true line, bet. secs. 5 and 8, over rolling land, descending gradually.
Ft. of descent.

40.04 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked




dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist. and raise a mound of earth, 3½ ft. base, 1½ ft. high, N. of cor.

50.00 Road bears N. and S.
80.08 The cor. of secs. 5, 6, 7 and 8.

Land, rolling and broken.
Soil, rocky clay; 4th rate.
No timber.

40.00 West, on a random line, bet. secs. 6 and 7.
Set temp. ¼ sec. cor.
75.30 Intersect W. bdy. of Tp. at the cor. of secs. 1, 6, 7 and 12, hereinbefore described.

35.30 Thence East, on a true line, bet. secs. 6 and 7, over rolling land.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked



and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.


75.30 The cor. of secs. 5, 6, 7 and 8.

Land, rolling.
Soil, rocky clay; 4th rate.
No timber.

20.00 S. 0° 03' E., bet. secs. 7 and 8, over rolling land.
N. edge of wash, course E.
29.60 S. edge of same.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

Chains

marked




1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

60.00 Dim road bears NE. and SW.

79.50 Wash, course NE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 7, 8, 17 and 18, with brass cap, marked



1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling.

Soil, rocky clay; 4th rate.

No timber.

40.00 East, on a random line, bet. secs. 8 and 17.

79.94 Set temp. ¼ sec. cor.


Intersect the cor. of secs. 8, 9, 16 and 17.

Thence West, on a true line, bet. secs. 8 and 17, over rolling land.

4.95 Wash, course N. Asc. 100 ft., on W. side of canyon.

10.00 Summit of ascent, on W. edge of canyon.

39.97 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked



and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

65.00 Desc. 80 ft., on gradual W. slope.

79.94 The cor. of secs. 7, 8, 17 and 18.

Land, rolling.

Soil, rocky clay; 4th rate.

No timber.


40.00 West, on a random line, bet. secs. 7 and 18.

75.48 Set temp. ¼ sec. cor.

Intersect W. bdy. of Tp. 14 lks. N. of the cor. of secs. 7, 12, 13 and 18, hereinbefore described.

Thence N. 89° 54' E., on a true line, bet. secs. 7 and 18, over rolling land.

35.48 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked



and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

56.50 Road bears N. and S.

71.50 Wash, course NE.


Subdivision of T. 26 N., R. 7 E.

Chains

75.48 The cor. of secs. 7, 8, 17 and 18.

Land, rolling.
Soil, rocky clay; 4th rate.
No timber.

40.00 S.0°03'E., bet. secs. 17 and 18,
over rolling land.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked





1916

and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.

68.00 Road bears NW. and SE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 17, 18, 19 and 20, with brass
cap, marked



1916


and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.

Land, rolling.
Soil, rocky clay; 4th rate.
No timber.

40.00 East, on a random line, bet. secs. 17 and 20.
Set temp. $\frac{1}{4}$ sec. cor.
80.00 Intersect N. and S. line 5 lks. N. of the cor. of secs.
16, 17, 20 and 21.

23.20 Thence N.89°58'W., on a true line, bet. secs. 17 and 20,
over rolling land.
wash, course NE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



1916

and raise a mound of stone, 2 ft. base, 1½ ft. high,
N. of cor.

74.00 Road bears NW. and SE.

80.00 The cor. of secs. 17, 18, 19 and 20.


Land, rolling.
Soil, rocky clay; 4th rate.
No timber.

40.00 West, on a random line, bet. secs. 18 and 19.
Set temp. $\frac{1}{4}$ sec. cor.
75.46 Intersect W. bdy. of Tp. 20 lks. N. of the cor. of secs.
13, 18, 19 and 24, hereinbefore described.

Thence N.89°51'E., on a true line, bet. secs. 18 and 19,
over rolling and broken land, descending on W. slope.

Chains

15.45 Wash, course N. Asc.
 35.46 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

46.45 Wash, course N. Asc. on W. slope.
 50.00 Summit.


75.46 The cor. of secs. 17; 18, 19 and 20.

Land, rolling and broken.
 Soil, rocky clay; 4th rate.
 No timber.

36.00 S.0°03'E., bet. secs. 19 and 20,
 over rolling land.


40.00 Wash, course NE.

Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 19, 20, 29 and 30, with brass cap, marked



1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, rolling and broken.
 Soil, rocky clay; 4th rate.
 No timber.

40.00 East, on a random line, bet. secs. 20 and 29.
 Set temp. $\frac{1}{4}$ sec. cor.


79.90 Intersect N. and S. line 10 lks. S. of the cor. of secs. 20, 21, 28 and 29.

Thence S.89°56'W., on a true line, bet. secs. 20 and 29, over rolling land.

22.00 Wash, course N.

29.00 Flagstaff-Grand Canyon road bears N. and S.

39.95 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

50.00 Wash, course NE.

79.90 The cor. of secs. 19, 20, 29 and 30.

Land, rolling. Soil, rocky clay; 4th rate. No timber.

Subdivision of T. 26 N., R. 7 E.

Chains

West, on a random line, bet. secs. 19 and 30.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 75.44 Intersect W. bdy. of Tp. 20 lks N. of the cor. of secs. 19, 24, 25 and 30, hereinbefore described.

Thence N. $89^{\circ}51'E.$, on a true line, bet. secs. 19 and 30, over rolling land.
 1.45 Wash, course N.
 11.45 Wash, course N. Asc. 140 ft., on W. slope.
 28.00 Summit of ascent.
 35.44 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
S30
1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
 75.44 The cor. of secs. 19, 20, 29 and 30.

Land, rolling.
 Soil, rocky clay; 4th rate.
 No timber.

S. $0^{\circ}03'E.$, bet. secs. 29 and 30, over rolling land.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
S30 S29
1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 49.00 Road bears E. and W.
 50.00 Wash, course E.
 56.00 Ditch, course NE.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 29, 30, 31 and 32, with brass cap, marked

T26N R 7E
S30 S29
S31 S32
1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, rolling and broken.
 Soil, rocky clay; 4th rate.
 No timber.

East, on a random line, bet. secs. 29 and 32.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.84 Intersect N. and S. line 20 lks. S. of the cor. of secs. 28, 29, 32 and 33.

Thence S. $89^{\circ}51'W.$, on a true line, bet. secs. 29 and 32, over rolling land.
 6.10 Road from Flagstaff to Grand Canyon bears N. $30^{\circ}W.$ and S. $30^{\circ}E.$
 16.00 Road bears N. $30^{\circ}W.$ and S. $30^{\circ}E.$
 19.00 Drain ditch, course NW.
 39.92 Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked

Chains

S29
 $\frac{1}{4}$
 S32
 1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

50.00 Reservoir bears N., about 40 chs. dist.
 58.00 Wash, course NE.
 79.84 The cor. of secs. 29, 30, 31 and 32.

Land, rolling.
 Soil, rocky; 4th rate.
 No timber.

40.00 West, on a random line, bet. secs. 30 and 31.
 Set temp. ¼ sec. cor.
 75.34 Intersect W. bdy. of Tp. 22 lks. N. of the cor. of secs. 25, 30, 31 and 36, hereinbefore described.

Thence N.89°50'E., on a true line, bet. secs. 30 and 31, over rolling land.

1.35 Road bears NE. and SW.

35.34 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in a mound of stone, for ¼ sec. cor., with brass cap, marked

S30
 $\frac{1}{4}$
 S31
 1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor. Top. of butte.

39.35 The cor. of secs. 29, 30, 31 and 32.
 75.34

Land, rolling.
 Soil, rocky clay; 4th rate.
 No timber.

40.00 South, on a random line, bet. secs. 31 and 32.
 Set temp. ¼ sec. cor.
 79.90 Intersect S. bdy. of Tp. 16 lks. E. of the reestablished cor. of secs. 31 and 32, hereinbefore described.

Thence N.0°07'E., on a true line, bet. secs. 31 and 32, over rolling land.

39.90 Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, for ¼ sec. cor., with brass cap, marked

$\frac{1}{4}$
 S31 | S32
 1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

79.90 The cor. of secs. 29, 30, 31 and 32.

Land, rolling.
 Soil, rocky clay; 4th rate.
 No timber.

Boundaries of T. 26 N., R. 7 E.

Latitudes, Departures, and Closing Errors.							
Line designated	True Course	Dist.	Latitudes		Departures		
			N.	S.	E.	W.	
		chs.	chs.	chs.	chs.	chs.	chs.
South boundary	N.88°39'W.	39.36	.93				39.35
	N.87°58'W.	39.93	1.42				39.91
	N.88°25'W.	39.96	1.10				39.95
	S.86°03'W.	39.83			2.74		39.73
	S.89°01'W.	38.15			.66		38.14
	S.89°05'W.	36.15			.58		36.14
	N.88°52'W.	39.13	.77				39.12
	S.89°16'W.	39.83			.51		39.83
	N.89°55'W.	40.00	.06				40.00
	West	39.84					39.84
	S.89°24'W.	40.00			.42		40.00
N.89°40'W.	43.20	.25				43.20	
West Boundary	North	480.00	480.00				
North Boundary	East	475.28			475.28		
East boundary	South	480.00		480.00			
Convergency					.52		
Totals			484.53	484.91	475.80	475.21	
				484.53	475.21		
Error in latitude,				.38			
					.59		

General Description

This township consists of rolling land in the NE., rolling mountainous and mountainous in SE. central and NW., and rolling in SW. portion. The only water of permanent nature is contained in reservoirs, one of which is located in sections 3 and 4, and another in sec. 29.

The soil is very rocky and practically valueless, except for grazing purposes. The grass, however, is very thin and short, the best being in the SE. portion of the township. A scattering growth of scrub pinyon and juniper is found extending N. and S. in the central part of the township, and on the W. boundary. It has no value, except for fuel and fence posts.

L. Wheeler has a house and about 10 acres of cultivated land in section 26. There are also vacant houses in the vicinity of the two reservoirs previously described.

A lava bed, having its origin in an extinct crater located in section 3, T. 25 N., R. 7 E., covers portions of secs. 11, 13, 14, 21, 22, 23, 24, 25, 26, 27, 28 and 34. Another old crater lies in secs. 26 and 35.

No evidence of valuable mineral could be found. Several roads traverse the township.

T. 26 N., R. 7 E.

Date Diagram.

BOOK 3267

	4-11-16	4-11-16	4-11-16	4-11-16	4-11-16	4-11-16
4-15-16	6 4-17-16	5 4-16-16	4 4-16-16	3 4-11-16	2 4-15-16	1 4-15-16
4-15-16	7 4-17-16	8 4-17-16	9 4-16-16	10 4-16-16	11 4-16-16	12 4-15-16
4-15-16	18 4-20-16	17 4-17-16	16 4-18-16	15 4-18-16	14 4-16-16	13 4-16-16
4-15-16	19 4-20-16	20 4-18-16	21 4-20-16	22 4-18-16	23 4-17-16	24 4-17-16
4-15-16	30 4-20-16	29 4-20-16	28 4-20-16	27 4-18-16	26 4-17-16	25 4-17-16
4-15-16	31 4-20-16	32 4-20-16	33 4-20-16	34 4-20-16	35 4-20-16	36 4-20-16

RESURVEYED.

Lines run by Surveyor Johnston on dates shown above.

" " " Transitman Inch " " " "

BOOK 3267

TRANSITMAN.
CERTIFICATE OF UNITED STATES SURVEYOR.

JAN 21 1918

I, Philip L. Inch, U.S. Transitman, U.S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General for Group 66, Arizona,

bearing date of the 4th day of January, 1916, I have well, faithfully, and truly

in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, re-surveyed all those parts or portions of the

North Boundary of Township 25 North, Range 7 East, and surveyed all those parts or portions of the Subdivisions of

TOWNSHIP 26 NORTH, RANGE 7 EAST.

of the Gila and Salt

River Base and Meridian, in the State of Arizona, which are represented in

and by diagram on page 43 hereof the foregoing field notes, as having been executed by me, and under my direction; and that all the corners of resurvey and said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instruc-

tions, and the special written instructions of the U. S. Surveyor General for Group 66, Arizona,

and in the specific manner described in the field notes, and that the foregoing are the original field notes of such re-survey & survey.

Philip L. Inch
-U.S. Surveyor.
U.S. Transitman,

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

....., 191

The foregoing field notes of the survey of

executed by

under his special instructions dated, 191 , having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

.....
U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above-described surveys in, has been correctly copied from the original notes on file in this office.

.....
U. S. Surveyor General.

BOOK 3267

4-680

FIELD ASSISTANTS. to

Theo. O. Johnston, U. S. Surveyor.

NAMES.	CAPACITY.
Grant S. Johnston,	1st chairman,
Theodore VanderMeer,	2nd chairman,
Aaron J. Oppenheim,	Flagman,
Chester M. Johnson,	Moundman,
J. H. Wood,	Axman.

48
BOOK 3267

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Theodore O. Johnston, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General for Group 66, Arizona, bearing date of the 4th day of January, 1916, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, ^{re-} surveyed all those parts or portions of the North Boundary of Township 25 North, Range 7 East, and surveyed all those parts or portions of the North, East and West boundaries, and the Subdivision lines of TOWNSHIP 26 NORTH, RANGE 7 EAST, of the Gila and Salt River Base & Meridian, in the State of Arizona, which are represented in and by diagram on page 43 hereof the foregoing field notes, ^{re-} as having been executed by me, and under my direction; and that all the corners of resurvey and said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General for Group 66, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such ^{re-} survey. and survey.

Theodore O. Johnston
U. S. Surveyor.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix, Ariz. FEB 8 1916

The foregoing field notes of the ^{re-} survey of the North Boundary of Township 25 North, Range 7 East, and survey of the North, East and West boundaries, and of the Subdivision lines of TOWNSHIP 26 NORTH, RANGE 7 EAST, of the Gila and Salt River Base and Meridian, in the State of Arizona, executed by Theodore O. Johnston, U.S.S. and Philip L. Inch, U.S.T. under ~~his~~ special instructions dated Jan. 4, 1916, for Gp. 66, Ariz., ~~191~~ having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Stanley D. Frost
U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above described surveys in _____, has been correctly copied from the original notes on file in this office.