

3268

Book "I"

4-679

BOOK 3268

291

(1)

FIELD NOTES

OF THE SURVEY OF THE

West and North boundaries, and

Subdivision lines of

TOWNSHIP 27 NORTH, RANGE 7 EAST,

Of the Gila and Salt River Base and Meridian,

In the State of Arizona,

EXECUTED BY

Theodore O. Johnston, U. S. Surveyor,

and

Philip L. Inch, U. S. Transitman,

~~In the capacity of U. S. Surveyor~~, under instructions dated January 4, 1916,

issued by the United States Surveyor General to govern surveys included in

Group No. 66, which were approved by the Commissioner of the General Land

Office, January 17, 1916.

Survey commenced April 21, 1916.

Survey completed " 29, 1916.

Executed under Assignment
Instructions dated Feb. 3, 1916.

3268

3268

1A


3268

Book "I"




Group 66 - - - - - Arizona.

BOOK 3268

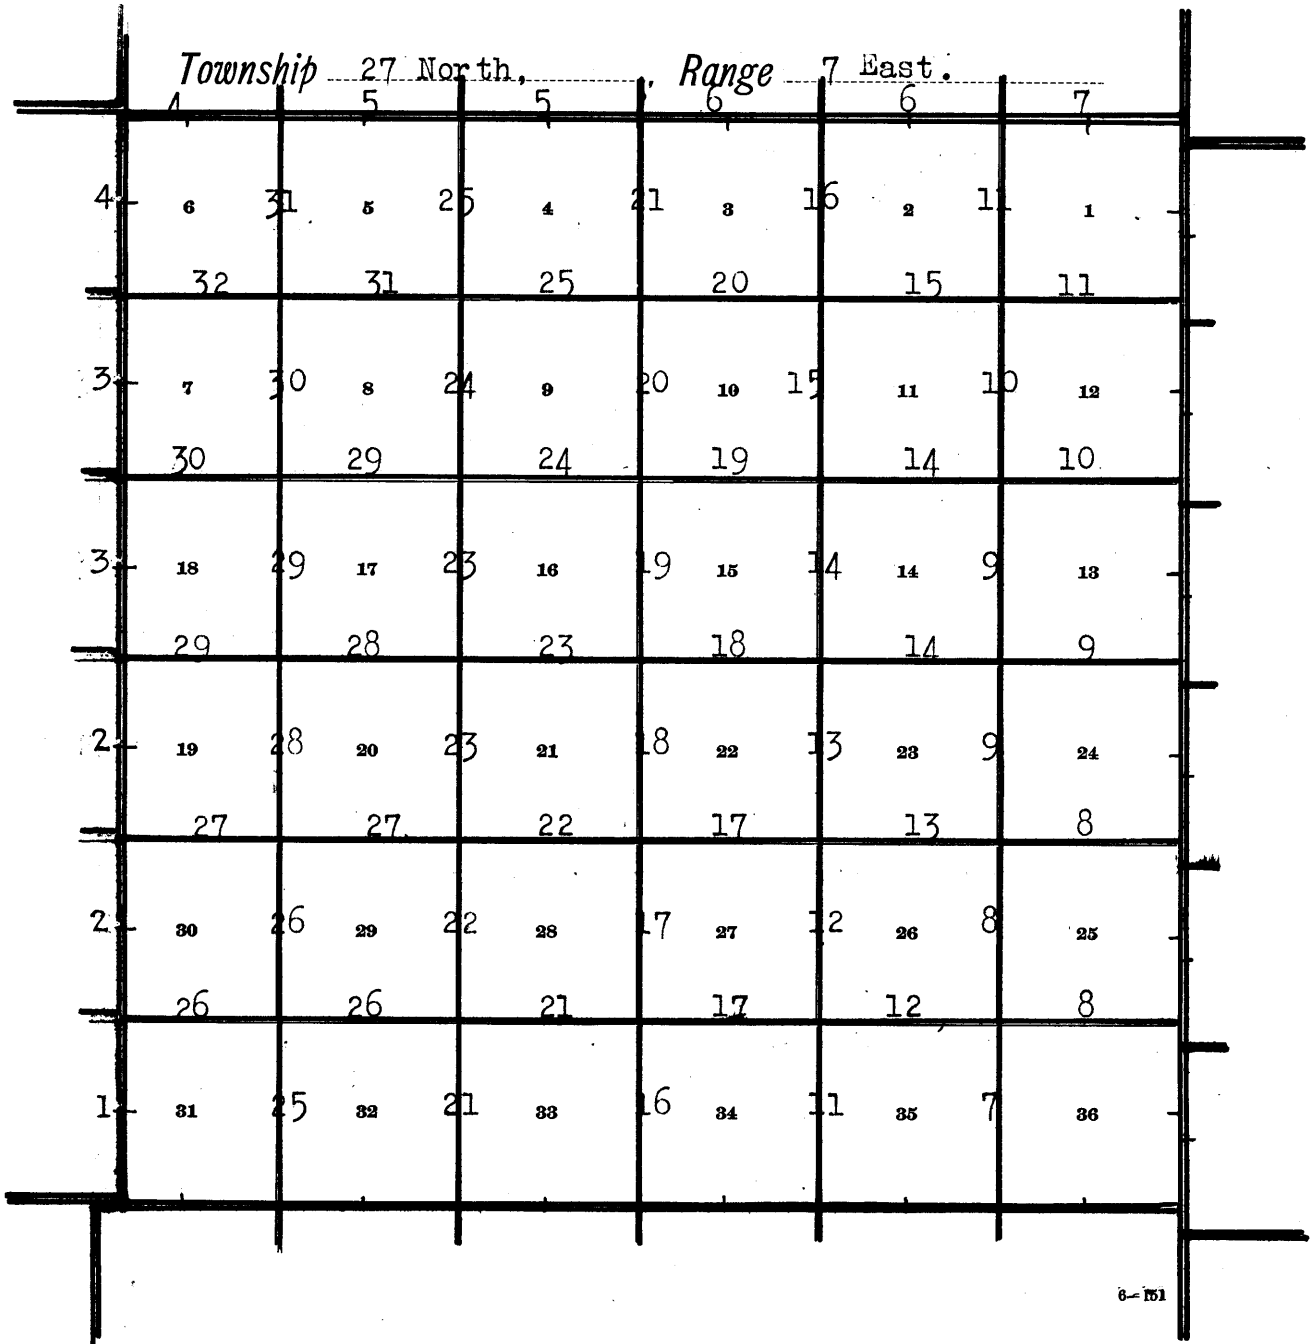INDEX DIAGRAM.



6-151

-  Lines surveyed under this group.
-  Lines run under current Group 55.
-  " " " " " 67.

Survey of W. and N. Bdrs. and Subdivision, T. 27 N., R. 7 E.

Chains

Work executed by Theo. O. Johnston, U. S. Surveyor, and Philip L. Inch, U. S. Transitman. Dates of survey shown on diagram on page 33 hereof. The instruments used are described, with record of approval by the Assistant Supervisor of Surveys, District No. 5, and field tests, in book A.

All lines were originated by deflection from true meridians determined by observations on Polaris at elongation described or referred to in book H, and an observation hereinafter described; and were projected with transits by fore and back sights and carefully measured angles.

Polaris Observation, by Theo. O. Johnston.

April 25, 1917.

At camp in sec. 21, T. 27 N., R. 7 E., in lat. 35°42' N., long. 111°39' W., at 5 h 21 m, a.m., l.m.t., observe Polaris at Eastern Elongation, in accordance with instructions in the Manual, and mark a point in the line thus determined by a tack driven in a wooden stake 5 chs. N. of my instrument.

At 7h 00m, a.m., turn off the azimuth of Polaris 1°24' to the W., and mark the meridian thus established by a tack driven in a wooden stake W. of the one previously set.

Survey of
W. Bdy., T. 27 N., R. 7 E.

To determine the point for the SW. cor. of the Tp., I proceed as follows:
From a point 320 chs. E. of the old cor. of secs. 4, 5, 8 and 9, T. 27 N., R. 6 E., which is a stone, firmly set, marked and witnessed as described by the Surveyor General; I project a transit line S. to an intersection with the N. bdy. of T. 26 N., R. 7 E., on which line falls 10.05 chs. E. of the cor. of Ts. 26 N., Rs. 6 and 7 E., described in book H.

At point of intersection
Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of Ts. 27 N., Rs. 6 and 7 E., with brass cap, marked

T27N
R6E | R7E
S36 | S31

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

Thence North, bet. secs. 31 and 36,
Over rolling and mountainous land.

15.00 Desc. on N. slope.
24.90 Wash, course S.80°E. Asc. on gradual S. slope.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

¼
S36 | S31

1916

Chains

54.40 and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.
80.00 Road bears E. and W.
Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the
ground, for cor. of secs. 25, 30, 31 and 36, with brass
cap, marked

T27N	
R6E	R7E
S25	S30

S36	S31

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.

Land, rolling & mountainous.
Soil, rocky; 4th rate.
No timber.

1.10 North, bet. secs. 25 and 30,
Over rolling & mountainous land.
9.00 Desc. on NW. slope.
40.00 Wash, course NE. Asc. on broken SE. slope.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for ¼ sec. cor., with brass cap, marked

¼	
S25	S30

1916

54.00 and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.
63.50 Wash, course SE.
80.00 Ridge bears NE. and SW.
Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the
ground, for cor. of secs. 19, 24, 25 and 30, with brass
cap, marked

T27N	
R6E	R7E
S24	S19

S25	S30

1916

and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.

Land, rolling & mountainous.
Soil, rocky; 4th rate.
No timber.

40.00 North, bet. secs. 19 and 24,
Over rolling & mountainous land.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for ¼ sec. cor., with brass cap, marked

¼	
S24	S19

1916

55.00 and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.
61.00 Desc. on NW. slope.
80.00 Wash, course NE. Asc. 130 ft., on SE. slope.
Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the
ground, for cor. of secs. 13, 18, 19 and 24, with brass

Chains

cap, marked

T27N	
R6E	R7E
S13	S18

S24	S19

1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling & mountainous.

Soil, rocky: 4th rate.

Timber, a few scrub junipers along line.

- 12.00 North, bet. secs. 13 and 18, over mountainous land. Asc. 160 ft., on SE. slope. Spur projects NE. Desc. on NW. slope, through scattering timber.
- 28.10 Canyon, 325 ft. below spur, course NE. Asc. 115 ft., on SE. slope. Leave timber.
- 32.00 Rocky spur, projecting E. Desc. 220 ft., on N. slope.
- 38.00 Canyon, course E.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, for 1/4 sec. cor., with brass cap, marked

1/4	
S13	S18

1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

- 55.00 Asc. 340 ft., on rocky S. slope. Summit of ascent bears E. and W. Thence across top of flat ridge.
- 60.00 Desc. 120 ft., on NE. slope.
- 66.80 Gulch, course SE. Asc. 100 ft., on SW. slope.
- 72.00 Summit of ascent bears NW. and SE. Thence over rolling land.
- 80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 7, 12, 13 and 18, with brass cap, marked

T27N	
R6E	R7E
S12	S 7

S13	S18

1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, mountainous and rolling.

Soil, rocky; 4th rate.

Timber, scrub pinyon and juniper.

- 40.00 North, bet. secs. 7 and 12, over rolling land. Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked

1/4	
S12	S 7

1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Survey of W. Bdy., T. 27 N., R. 7 E.

Chains As my blank line, hereinbefore described, shows that a
 80.00 Set an iron post, 3 ft. long, 3 ins. diam., 18 ins. in the
 ground, surrounded by a mound of stone, for cor. of secs.
 6 and 7 only, with brass cap, marked

T27N
 S6
 S7
 R7E

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 E. of cor.

Land, rolling.

Soil, rocky; 4th rate.

Timber, a few scrub juniper trees along line.

14.00 North, on W. bdy. of sec. 6,
 over rolling land.

40.00 Wash, course SE.

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor. of sec. 6, with brass cap, marked

$\frac{1}{4}$ S6

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 E. of cor.

80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the
 ground, for cor. of Ts. 27 and 28 N., Rs. 7 E., with
 brass cap, marked

T28N
 R7E
 S31
 S6
 T27N

1916

from which

A pinyon, 12 ins. diam., bears N 66° E., 65 lks. dist.,
 marked T27N R7E S31 BT.

No other trees within limits. Raise a mound of stone,
 2 ft. base, $1\frac{1}{2}$ ft. high, E. of cor.

Land, rolling.

Soil, rocky; 4th rate.

Timber, scattering juniper and pinyon.

Survey of

N. Bdy., T. 27 N., R. 7 E.

From the cor. of Ts. 27 and 28 N., Rs. 7 E., described in
 book F; (on line bet. Rs. 7 and 8 E.)

West, on a random line, bet. Ts. 27 and 28 E., setting
 temp. cors. at intervals of 40.00 chs.

464.50 Fall 84 lks. S. of the cor. of Ts. 27 and 28 N., Rs. 7 E.,
 (on line bet. Rs. 6 and 7 E.), hereinbefore described.

Thence S. $89^{\circ}54'$ E., on a true line, bet. secs. 6 and 31,
 over rolling & mountainous land, through scattering timber.

9.60 Gulch, course SE.

24.50 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

Survey of North bdy. of T. 27 N., R. 7 E.

Chains

S31
 $\frac{1}{4}$ ———
 S 6
 1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

52.10 Road bears NW and SE.

64.10 Same road bears NE and SW.

64.50 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 5, 6, 31 and 32, with brass cap, marked

T28N	R 7E
S31	S32
S6	S5

T27N
 1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling & mountainous.
Soil, rocky; 4th rate.
Timber, pinyon and juniper.

S.89°54'E., bet. secs. 5 and 32, over rolling land.

24.00 Road bears NW. and SE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

S32
 $\frac{1}{4}$ ———
 S 5
 1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 4, 5, 32 and 33, with brass cap, marked

T28N	R 7E
S32	S33
S5	S4

T27N
 1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling.
Soil, rocky; 4th rate.
Timber, a few juniper trees only.

S.89°54'E., bet. secs. 4 and 33, over rolling land.

30.00 Top of E. slope bears N. and S. Desc. over mountainous land.
33.00 Canyon, course NE. Asc. on NW. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

S33
 $\frac{1}{4}$ ———
 S 4
 1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

44.75 Ridge bears N. and S. Desc. 420 ft., on SE. slope.

64.50 Canyon, course NE. Asc. 290 ft.

6

Survey of N. Bdy., T. 27 N., R. 7 E.

Chains

80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 3, 4, 33 and 34, with brass cap, marked

T28N	R 7E
S33	S34

S4	S3
----	----

T27N

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, rolling and mountainous.

Soil, rocky; 4th rate.

Timber, a few scrub pinyon and juniper trees.

S. $89^{\circ}54'$ E., bet. secs. 3 and 34, over mountainous land. Asc. 185 ft., on steep rocky NW. slope, through scattering timber.

6.00 Summit of ascent, out of canyon. Thence over rolling land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S34

 $\frac{1}{4}$

S 3

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 2, 3, 34 and 35, with brass cap, marked

T28N	R 7E
S34	S35

S3	S2
----	----

T27N

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, rolling and mountainous.

Soil, rocky; 4th rate.

Timber, pinyon and juniper.

S. $89^{\circ}54'$ E., bet. secs. 2 and 35, over rolling land.

10.20 Top of SE. slope bears N. and S. Desc. 80 ft., over mountainous land.

21.40 Wash, course NE.

45.00 Desc. on broken NE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S35

 $\frac{1}{4}$

S 2

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

80.00 (440 ft. below top of slope)

Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 1, 2, 35 and 36, with brass cap, marked

Chains

T28N	R 7E
S35	S36
S2	S1

T27N
1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling and mountainous.
Soil, rocky 4th rate.
No timber.

S.89°54'E., bet. secs. 1 and 36,
over mountainous land. Desc. 170 ft., on NE. slope.

20.00
40.00

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

S36
¼
S 1
1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

49.00
80.00

Wash, course SE.
The cor. of Ts. 27 and 28 N., Rs. 7 E., described in Book "F."

Land, mountainous and rolling.
Soil, rocky: 4th rate.
No timber.

Survey of
Subdivision of T. 27 N., R. 7 E.

From the cor. of secs. 1, 2, 35 and 36, on S. bdy. of Tp. described in book H,

N.0°01'W., bet. secs. 35 and 36,
over rolling land.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

S35	S36
1916	

dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist. and raise a mound of earth, 3½ ft. base, 1½ ft. high, W. of cor.

54.00
70.00
80.00

Road bears N.10°W. and S.10°E.
Road bears NE. and SW.

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 25, 26, 35 and 36, with brass cap, marked

T27N	R 7E
S26	S25
S35	S36
1916	

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling. Soil, rocky; 4th rate. No timber.

Chains

40.00 East, on a random line, bet. secs. 25 and 36.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.92 Intersect E. bdy. of Tp. at the cor. of secs.
 25 and 36, described in book F.

Thence West, on a true line, bet. secs. 25 and 36,
 over rolling land.
 39.96 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S25
 $\frac{1}{4}$ ———
 S36
 1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 N. of cor.
 74.90 Dim road bears N. and S.
 79.92 The cor. of secs. 25, 26, 35 and 36.

Land, rolling.
 Soil, rocky clay; 4th rate.
 No timber.

N.0°01'W., bet. secs. 25 and 26,
 over rolling land.
 20.00 Wash, course NW.
 30.00 Thence along rocky edge of mesa, sloping W.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
 S26 | S25
 1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.

57.00 Road bears NW. and SE.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 23, 24, 25 and 26, with brass
 cap, marked

T27N | R 7E
 S23 | S24
 S26 | S25
 1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.

Land, rolling.
 Soil, rocky; 4th rate.
 No timber.

40.00 East, on a random line, bet. secs. 24 and 25.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.92 Intersect E. bdy. of Tp. 2 lks. N. of the cor. of secs.
 24 and 25, described in book F.

Thence N.89°59'W., on a true line, bet. secs. 24 and 25,
 over rolling land.

15.00 Road bears NE. and SW.

25.00 Wash, course N.

39.96 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S24
 $\frac{1}{4}$ ———
 S25
 1916

Chains

73.00 and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
N. of cor.

79.92 Road bears NW. and SE.


The cor. of secs. 23, 24, 25 and 26.

Land, rolling.
Soil, rocky clay; 4th rate.
No timber.

22.90 N.0°01'W., bet. secs. 23 and 24,
over rolling land.

40.00 Road bears NW. and SE.

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for 1/4 sec. cor., with brass cap, marked




1916

48.50 and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
W. of cor.

80.00 Box canyon, 3 chs. wide, course E., 65 ft. deep.

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 13, 14, 23 and 24, with brass
cap, marked



1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
W. of cor.

Land, rolling.
Soil, rocky; 4th rate.
No timber.

40.00 East, on a random line, bet. secs. 13 and 24.


79.84 Set temp. 1/4 sec. cor.

Intersect E. bdy. of Tp. 6 lks. S. of the cor. of secs.
13 and 24, described in book F.

29.85 Thence S.89°57'W., on a true line, bet. secs. 13 and 24,
over rolling land.

39.92 Ridge bears NE. and SW.

Set an iron post, 3 ft. long, 1 in diam., 26 ins. in the
ground, for 1/4 sec cor., with brass cap, marked



1916

79.84 and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
N. of cor.

The cor. of secs. 13, 14, 23 and 24.


Land, rolling.
Soil, rocky; 4th rate.
No timber.

30.00 N.0°01'W., bet. secs. 13 and 14,
over rolling land.

40.00 Wash, course E.

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for 1/4 sec. cor., with brass cap, marked

Chains



1916


and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

50.00

Wash, course E.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 11, 12, 13 and 14, with brass cap, marked



1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling.

Soil, rocky; 4th rate.

No timber.

40.00

East, on a random line, bet. secs. 12 and 13.

79.90

Set temp. ¼ sec. cor.


Intersect E. bdy. of Tp. at the cor. of secs. 12 and 13, described in book F.

Thence West, on a true line, bet. secs. 12 and 13, over rolling land.

39.95

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

S12



and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

79.90

The cor. of secs. 11, 12, 13 and 14.

Land, rolling.

Soil, rocky; 4th rate.

No timber.


18.00

N.0°01'W., bet. secs. 11 and 12, over rolling land.

40.00

Wash, course NE.

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked



1916


dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, 3½ ft. base, 1½ ft. high, W. of cor.

69.00

Wash, course SE.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 1, 2, 11 and 12, with brass cap, marked



1916

Subdivision of T. 27 N., R. 7 E.

Chains

and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.


Land, rolling.
Soil, rocky; 4th rate.
No timber.

East, on a random line, bet. secs. 1 and 12.

40.00 Set temp. ¼ sec. cor.
80.00 Intersect E. bdy. of Tp. 2 lks. S. of the cor. of secs.
1 and 12, described in book F.

Thence S.89°59'W., on a true line, bet. secs. 1 and 12,
over rolling land.

8.00 Wash, course NE.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for ¼ sec. cor., with brass cap, marked



dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
and raise a mound of earth, 3½ ft. base, 1½ ft. high,
N. of cor.

76.00 Low ridge bears N. and S. Desc. gradually on W. slope.
80.00 The cor. of secs. 1, 2, 11 and 12.


Land, rolling.
Soil, rocky; 4th rate.
No timber.

N.0°01'W., on a random line, bet. secs. 1 and 2,

40.00 Set temp. ¼ sec. cor.
80.01 Intersect N. bdy. of Tp. at the cor. of secs. 1, 2, 35
and 36, hereinbefore described.

Thence S.0°01'E., on a true line, bet. secs. 1 and 2,
over broken land.

10.00 Wash, course E.
19.00 Wash, course E.
33.00 Wash, course E.
40.01 Set an iron post, 3 ft. long, 1 in. diam., in a mound of
stone, for ¼ sec. cor., with brass cap, marked



and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.

49.00 Wash, course E.
56.00 Wash, course E.
80.01 The cor. of secs. 1, 2, 11 and 12.

Land, mountainous in N. half mile and broken on balance.
Soil, rocky clay; 4th rate.
No timber.

From the cor. of secs. 2, 3, 34 and 35, on S. bdy. of Tp.
described in book H,

N.0°01'W., bet. secs. 34 and 35,
over rolling land.

Chains


40.00 Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

70.00 Corral bears SW., 50 lks. dist.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 26, 27, 34 and 35, with brass cap, marked



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, rolling.

Soil, rocky clay; 4th rate.
No timber.


East, on a random line, bet. secs. 26 and 35.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.86 Intersect N. and S. line 8 lks. S. of the cor. of secs. 25, 26, 35 and 36.

Thence S. $89^{\circ}57'$ W., on a true line, bet. secs. 26 and 35, over rolling land.

39.93 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

61.85 Wash, course N.

74.85 Desc. 50 ft., on W. slope.

79.86 The cor. of secs. 26, 27, 34 and 35.


Land, rolling.

Soil, rocky clay; 4th rate.
No timber.

N. $0^{\circ}01'$ W., bet. secs. 26 and 27, over rolling land.

20.00 Wash, course NE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

43.00 Wash, course NW.

55.00 Wash, course NE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 22, 23, 26 and 27, with brass cap, marked

Subdivision of T. 27 N., R. 7 E.

Chains

T27N	R 7E
S22	S23
S27	S26

1916
and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.

Land, rolling.
Soil, rocky clay; 4th rate.
No timber.

40.00 East, on a random line, bet. secs. 23 and 26,
Set temp. ¼ sec. cor.
80.00 Intersect the corner of sections 23, 24, 25 and 26,
25 and 26.

9.00 Thence West, on a true line, bet. secs. 23 and 26,
over rolling land.
25.00 Road bears NW. and SE.
40.00 Wash, course NW.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for ¼ sec. cor., with brass cap, marked

S23
¼
S26
1916

and raise a mound of stone, 2 ft. base, 1½ ft. high,
N. of cor.
47.00 Road bears N. and S.
54.00 Wash, course NW.
80.00 The cor. of secs. 22, 23, 26 and 27.

Land, rolling.
Soil, rocky clay; 4th rate.
No timber.

17.50 N.0°01'W., bet. secs. 22 and 23,
over rolling land.
30.00 Road bears E. and W.
35.00 Desc. on NW. slope.
40.00 Ft. of descent bears NW. and SW.
In ravine, course NE.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for ¼ sec. cor., with brass cap, marked

S22	S23
1916	

and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.
71.50 Wash, course E.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 14, 15, 22 and 23, with brass
cap, marked

T27N	R 7E
S15	S14
S22	S23

1916
and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.

Land, rolling. Soil, rocky; 4th rate. No timber.

14

Subdivision of T. 27 N., R. 7 E.

Chains

40.00 East, on a random line, bet. secs. 14 and 23.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.10 Intersect N. and S. line 14 lks. S. of the cor. of secs.
 13, 14, 23 and 24.

Thence S. $89^{\circ}54'$ W., on a true line, bet. secs. 14 and 23,
 over rolling land.

40.05 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
 S14

$\frac{1}{4}$
 S23
 1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 N. of cor.

54.60 Top of W. slope bears N. and S. Desc.

56.10 Ft. of slope.

57.10 Wash, course W.

80.10 The cor. of secs. 14, 15, 22 and 23.

Land, rolling.

Soil, rocky; 4th rate.

No timber.

N. $0^{\circ}01'$ W., bet. secs. 14 and 15,
 over rolling land.

20.00 Wash, course NE. Asc. gradually, on S. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., in a mound of
 stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
 S15 | S14

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.

65.00 Ft. of steep slope. Asc. 115 ft.

70.00 Summit of ascent, bearing E. and W.

75.00 Desc. on W. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 10, 11, 14 and 15, with brass
 cap, marked

T27N | R 7E
 S10 | S11
 S15 | S14

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.

Land, rolling and mountainous.

Soil, rocky clay; 4th rate.

No timber.

40.00 East, on a random line, bet. secs. 11 and 14.

Set temp. $\frac{1}{4}$ sec. cor.

80.12 Intersect the corner of sections 11, 12, 13 and 14, 12,
 13 and 14.

Thence West, on a true line, bet. secs. 11 and 14,
 over rolling land.

40.06 Set an iron post, 3 ft. long, 1 in. diam., in a mound of
 stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S11
 $\frac{1}{4}$
 S14
 1916


X

Chains

80.12 and raise a mound of stone, 2 ft. base, 1½ ft. high,
 N. of cor.
 the cor. of secs. 10, 11, 14 and 15.


Land, rolling.
 Soil, rocky clay; 4th rate.
 No timber.

15.00 N.0°01'W., bet. secs. 10 and 11,
 over rolling land.
 40.00 Wash, course E. Asc. on steep slope.
 Set an iron post, 3 ft. long, 1 in. diam., in a mound of
 stone, for ¼ sec. cor., with brass cap, marked



50.00 1916
 and raise a mound of stone, 2 ft. base, 1½ ft. high,
 W. of cor.
 Summit, 340 ft. above wash. Desc. 165 ft.

60.00 Wash, course E.
 69.00 Wash, course E.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., in a mound of
 stone, for cor. of secs. 2, 3, 10 and 11, with brass
 cap, marked




1916
 and raise a mound of stone, 2 ft. base, 1½ ft. high,
 W. of cor.

Land, rolling and mountainous.
 Soil, rocky clay; 4th rate.
 No timber.

40.00 East, on a random line, bet. secs. 2 and 11.
 Set temp. ¼ sec. cor.
 79.82 Intersect N. and S. line 6 lks. S. of the cor. of secs.
 1, 2, 11 and 12.

Thence S.89°57'W., on a true line, bet. secs. 2 and 11,
 over mountainous land.
 5.80 Wash, course SE.
 9.80 Wash, course SE. Asc.
 39.91 Set an iron post, 3 ft. long, 1 in. diam., in a mound of
 stone, for ¼ sec. cor., with brass cap, marked




1916
 and raise a mound of stone, 2 ft. base, 1½ ft. high,
 N. of cor.
 45.00 Summit of ascent, 420 ft. above wash.
 50.00 Desc. 50 ft.
 55.00 Wash, course SE. Asc. 160 ft.
 65.00 Summit of ascent.
 79.82 The cor. of secs. 2, 3, 10 and 11.

Land, rough and mountainous.
 Soil, rocky clay; 4th rate.
 No timber.

Chains

N.0°01'W., on a random line, bet. secs. 2 and 3.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.08 Intersect N. bdy. of Tp. 20 lks. E. of the cor. of secs.
 2, 3, 34 and 35, hereinbefore described.

Thence S.0°10'E., on a true line, bet. secs. 2 and 3,
 over mountainous land.
 5.00 Top of S. slope bears E. and W. Desc. 115 ft.
 10.40 Canyon, course S.80°E. Asc. 20 ft.
 12.10 Spur projects E. Desc. 55 ft.
 14.60 Canyon, course E. Asc. 115 ft., on NE. slope.
 20.00 Summit.
 40.08 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked




1916
 and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.
 Desc. 145 ft.
 45.10 Canyon, course SE. Asc. 245 ft., on N. slope.
 60.10 Spur, projecting E. Desc. 50 ft., on S. slope.
 66.30 Ravine, course SE. Asc. on NE. slope.
 70.10 Spur, projecting E. Desc. 100 ft., on S. slope.
 80.08 The cor. of secs. 2, 3, 10 and 11.


Land, mountainous.
 Soil, rocky; 4th rate.
 No timber.

from the cor. of secs. 3, 4, 33 and 34, described in
 book H, on S. bdy. of Tp.,

N.0°02'W., bet. secs. 33 and 34,
 over rolling land.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., in a mound of
 stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked



1916
 and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.
 71.90 S. edge of canyon, course E.
 79.30 N. edge of same.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 27, 28, 33 and 34, with brass
 cap, marked



1916
 and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.


Land, rolling and broken.
 Soil, rocky clay; 4th rate.
 No timber.

Subdivision of T. 27 N., R. 7 E.

Chains

East, on a random line, bet. secs. 27 and 34.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.10 Intersect N. and S. line 9 lks. N. of the cor. of secs.
 26, 27, 34 and 35.


Thence N.89°56'W., on a true line, bet. secs. 27 and 34,
 over rolling land.
 2.00 W. edge of small reservoir bears N. and S.
 31.00 Wash, course NE.
 34.00 Road bears NE. and SW.
 40.05 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked




and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 N. of cor.
 70.00 Asc. 130 ft., on E. slope.
 79.80 Summit of ascent.
 80.10 The cor. of secs. 27, 28, 33 and 34.

Land, rolling.
 Soil, rocky clay; 4th rate.
 No timber.

N.0°02'W., bet. secs. 27 and 28,
 over rolling land.
 8.00 Rocky gorge, 3 chs. wide, 60 ft. deep, course E.
 30.00 Desc. 80 ft., on N. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.
 40.20 Road bears NW. and SE.
 40.50 Wash, course SE. Asc. 85 ft., on SW. slope.
 53.70 Top of slope bears NW. and SE.
 60.00 Desc. on NW. slope.
 75.00 Ft. of descent bears NE. and SW.
 79.78 Road bears E. and W.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 21, 22, 27 and 28, with brass
 cap, marked



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.
 Land, rolling and broken.
 Soil, rocky; 4th rate.
 No timber.

East, on a random line, bet. secs. 22 and 27.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.90 Intersect N. and S. line 23 lks. N. of the cor. of secs.
 22, 23, 26 and 27.

Thence N.89°50'W., on a true line, bet. secs. 22 and 27,
 over rolling land.

Chains

23.00 Wash, course NE.
 39.95 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$$\begin{array}{c} S22 \\ \frac{1}{4} \\ \hline S27 \\ 1916 \end{array}$$
 and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
 Asc. on broken E. slope.
 57.30 Summit of ascent bears N. and S. Thence across top of ridge, bears N. and S.
 68.00 Desc. on W, slope.
 79.80 Road bears NE. and SW.
 79.90 The cor. of secs. 21, 22, 27 and 28.
 Land, rolling and broken.
 Soil, rocky; 4th rate.
 No timber.

 N.0°02'W., bet. secs. 21 and 22, over rolling & mountainous land.
 5.00 Desc. 110 ft.
 12.35 Bottom of canyon, course E. Asc. 120 ft.
 22.00 Summit of ascent bears E. and W.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$$\begin{array}{c} \frac{1}{4} \\ \hline S21 | S22 \\ \hline 1916 \end{array}$$
 and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 55.00 Desc. on NE. slope.
 60.00 Thence along E. slope.
 70.00 Desc. 35 ft., on E. slope.
 74.00 Canyon, course SE., 5 chs. wide and 100 ft. deep.
 Asc. on SW. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 15, 16, 21 and 22, with brass cap, marked

$$\begin{array}{c} T27N | R 7E \\ \hline S16 | S15 \\ \hline S21 | S22 \\ \hline 1916 \end{array}$$
 and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 Land, rolling & mountainous.
 Soil, rocky; 4th rate.
 No timber.

 East, on a random line, bet. secs. 15 and 22.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.74 Intersect N. and S. line 21 lks. N. of the cor. of secs. 14, 15, 22 and 23.
 Thence N.89°51'W., on a true line, bet. secs. 15 and 22, over rolling land.
 39.87 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$$\begin{array}{c} S15 \\ \frac{1}{4} \\ \hline S22 \\ 1916 \end{array}$$

Subdivision of T. 27 N., R. 7 E.

Chains

dig pits, 18x18x12 ins., E. and W. of post, 3 ft dist., and raise a mound of earth, 3½ ft. base, 1½ ft. high, N. of cor.

49.75 Ft. of NE. slope bears NW. and SE. Asc. 200 ft., over mountainous land.

64.75 Summit of ascent.

79.74 The cor. of secs. 15, 16, 21 and 22.

Land, rolling and mountainous.
Soil, rocky; 4th rate.
No timber.

N.0°02'W., bet. secs. 15 and 16, over mountainous land.


11.50 Desc. 100 ft.

15.00 Gulch, course E. Asc. 90 ft.

19.50 Summit. Desc. 110 ft.

36.00 Gulch, course E. Asc.

40.00 Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, for ¼ sec. cor., with brass cap, marked



1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

48.70 Summit of ascent, 260 ft. above bottom of gulch.


51.40 Desc. 55 ft.

55.00 Gulch, course SE. Asc. 135 ft.

64.20 Summit of ascent.

74.30 Desc. 45 ft.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., in a mound of stone, for cor. of secs. 9, 10, 15 and 16, with brass cap, marked



1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, mountainous.
Soil, rocky clay; 4th rate.
No timber.

East, on a random line, bet. secs. 10 and 15.

40.00 Set temp. ¼ sec. cor.

79.90 Intersect N. and S. line 20 lks. N. of the cor. of secs. 10, 11, 14 and 15.

Thence N.89°51'W., on a true line, bet. secs. 10 and 15, over broken land.


24.90 Asc. 115 ft., over mountainous land.

30.30 Summit.

32.40 Wash, course SE.

35.00 Ascend of steep slope.

39.95 Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, for ¼ sec. cor., with brass cap, marked



1916


and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

Chains


49.00 Summit of ascent, 190 ft. above ft. of slope.
 56.90 Wash, course SE. Asc. 210 ft.
 69.90 Summit.
 79.90 The cor. of secs. 9, 10, 15 and 16.

Land, mountainous.
 Soil, rocky clay; 4th rate.
 No timber.

N.0°02'W., bet. secs. 9 and 10,
 over broken land.
 39.50 Wash, course SE.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., in a mound of
 stone, for $\frac{1}{4}$ sec. cor.; with brass cap, marked




and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 3, 4, 9 and 10, with brass cap,
 marked



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.
 Land, broken.
 Soil, rocky clay; 4th rate.
 Timber, scrub cedar.

East, on a random line, bet. secs. 3 and 10.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.96 Intersect N. and S. line 14 lks. N. of the cor. of secs.
 2, 3, 10 and 11.

Thence N.89°54'W., on a true line, bet. secs. 3 and 10,
 over mountainous land. Asc. 75 ft., on E. slope.
 10.00 Spur projects S. Desc. 50 ft., on SW. slope.
 18.25 Bottom of canyon, course S.20°E. Asc. 115 ft., on NE.
 slope.
 25.00 Summit of ascent. Thence on general SE. slope.
 39.98 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 N. of cor.
 79.96 The cor. of secs. 3, 4, 9 and 10.

Land, rolling and mountainous.
 Soil, rocky; 4th rate.
 No timber.

Chains

40.00 N.0°02'W., on a random line, bet. secs. 3 and 4.
Set temp. $\frac{1}{4}$ sec. cor.
80.04 Intersect N. bdy. of Tp. 21 lks E. of the cor. of secs.
3, 4, 33 and 34, hereinbefore described.

Thence S 0°11'E., on a true line, bet. secs. 3 and 4,
over mountainous land. Asc. 175 ft., on steep rocky
NW. slope, through scattering timber.
8.20 Summit, on NW. edge of mesa. Thence across top of same.
40.04 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S4	S3
----	----

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.
80.04 The cor. of secs. 3, 4, 9 and 10.

Land, rolling and mountainous.
Soil, rocky; 4th rate.
Timber, scrub pinyon and juniper.

From the cor. of secs. 4, 5, 32 and 33, on S. bdy. of Tp.,
described in book H,

N.0°03'W., bet. secs. 32 and 33,
over rolling land.
25.00 Wash, course E. Asc. on S. slope.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S32	S33
-----	-----

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 28, 29, 32 and 33, with brass
cap, marked

T27N	R 7E
S29	S28

S32	S33
-----	-----

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

Land, rolling.
Soil, rocky; 4th rate.
No timber.

40.00 East, on a random line, bet. secs. 28 and 33.
Set temp. $\frac{1}{2}$ sec. cor.
80.08 Intersect N. and S. line at the cor. of secs. 27, 28,
33 and 34.

Thence West, on a true line, bet. secs. 28 and 33,
over rolling land.
10.00 Asc. on gentle E. slope.
35.00 Summit of ascent.
40.04 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

Chains

S28
 $\frac{1}{4}$
 S33
 1916

80.08 and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
 The cor. of secs. 28, 29, 32 and 33.

Land, rolling.
 Soil, rocky; 4th rate.
 No timber.

40.00 N.0°03'W., bet. secs. 28 and 29, over rolling land.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

S29 | S28
 1916

51.00 and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
 Road bears NE. and SW.

54.00 Road bears E. and W.
 61.50 Desc. on gradual N. slope.
 69.00 Wash, course E., at ft. of descent.
 72.00 N. edge of wash.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., in a mound of stone, for cor. of secs. 20, 21, 28 and 29, with brass cap, marked

T27N | R 7E
 S20 | S21
 S29 | S28
 1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling.
 Soil, rocky clay; 4th rate.
 No timber.

40.00 East, on a random line, bet. secs. 21 and 28.
 80.14 Set temp. ¼ sec. cor.
 Intersect the corner of secs. 21, 22, 27 and 28, 29, 28 and 28.

19.00 Thence West, on a true line, bet. secs. 21 and 28, over rolling and broken land.
 25.00 Road bears NW. and SE., in wash, course SE.
 27.20 Old deserted stone house bears N., 4 chs. dist.
 32.00 Road bears NE. and SW.
 40.07 Canyon, course NE. Asc. on SE. slope.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

S21
 $\frac{1}{4}$
 S28
 1916


46.10 and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
 Summit of ascent bears NE. and SW. Thence over gently rolling land.

80.14 The cor. of secs. 20, 21, 28 and 29.

Land, rolling. Soil, rocky; 4th rate. No timber.


Chains

40.00 N.0°03'W., bet. secs. 20 and 21,
over rocky and rolling land.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in a
mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked



1916
and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

54.50 Wash, course SE.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in a
mound of stone, for cor. of secs. 16, 17, 20 and 21,
with brass cap, marked




1916
and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

Land, rolling.
Soil, rocky clay; 4th rate.
No timber.

40.00 East, on a random line, bet. secs. 16 and 21.
Set temp. $\frac{1}{4}$ sec. cor.
80.22 Intersect N. and S. line 20 lks. S. of the cor. of secs.
15, 16, 21 and 22.

Thence S.89°51'W., on a true line, bet. secs. 16 and 21,
over rolling land.

12.20 Wash, course SE.
40.11 Set an iron post, 3 ft. long, 1 in. diam., in a mound of
stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked




1916
and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
N. of cor.

80.22 The cor. of secs. 16, 17, 20 and 21.

Land, rolling.
Soil, rocky clay; 4th rate.
No timber.

40.00 N.0°03'W., bet. secs. 16 and 17,
over roughly rolling land.
Set an iron post, 3 ft. long, 1 in. diam., in a mound of
stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked



1916
and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

70.00 Wash, course SE.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 8, 9, 16 and 17, with brass
cap, marked

Chains

T27N	R 7E
S8	S9
S17	S16

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

Land, rolling and broken.
Soil, rocky clay; 4th rate.
No timber.

40.00

East, on a random line, bet. secs. 9 and 16.

80.16

Set temp. $\frac{1}{4}$ sec. cor.

Intersect N. and S. line 16 lks. S. of the cor. of secs.
9, 10, 15 and 16.

Thence S. $89^{\circ}53'$ W., on a true line, bet. secs. 9 and 16,
over rolling land.

7.15

Wash, course SE.

40.08

Set an iron post, 3 ft. long, 1 in. diam., in a mound of
stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S 9

 $\frac{1}{4}$

S16

1916

and raise a mound of stone; 2 ft. base, $1\frac{1}{2}$ ft. high,
N. of cor.

68.85

Desc. 135 ft., on W. slope.

80.16

The cor. of secs. 8, 9, 16 and 17.

Land, rolling and broken.
Soil, rocky clay; 4th rate.
No timber.

N. $0^{\circ}03'$ W., bet. secs. 8 and 9,
over broken land.

11.70

Wash, course SW.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

 $\frac{1}{4}$

S8 | S9

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

45.00

Desc. 185 ft., on NW. slope.

60.00

Ft. of descent. Wash, course SW.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 4, 5, 8 and 9, with brass cap,
marked

T27N	R 7E
S5	S4
S8	S9

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

Land, rolling and broken.
Soil, rocky clay; 4th rate.
No timber.

Chains

East, on a random line, bet. secs. 4 and 9.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.98 Intersect N. and S. line 5 lks. S. of the cor. of secs.
 3, 4, 9 and 10.

Thence S. $89^{\circ}58'W.$, on a true line, bet. secs. 4 and 9,
 over rolling land, across mesa.
 39.99 Set an iron post, 3 ft. long, 1 in. diam., in a mound of
 stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S 4
 $\frac{1}{4}$
 S 9
 1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 N. of cor.
 50.00 Desc. 195 ft., on NW. slope.
 65.00 Ft. of descent.
 67.00 Wash, course S.
 75.00 Spur projects S.
 79.00 Wash, course S.
 79.98 The cor. of secs. 4, 5, 8 and 9.

Land, rolling and mountainous.
 Soil, rocky clay; 4th rate.
 Timber, scattering timber.

North, on a random line, bet. secs. 4 and 5.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.98 Intersect N. bdy. of Tp. 12 lks. E. of the cor. of secs.
 4, 5, 32 and 33, hereinbefore described.

Thence S. $0^{\circ}05'E.$, on a true line, bet. secs. 4 and 5,
 over broken land.
 36.00 Wash, course SW.
 39.98 Set an iron post, 3 ft. long, 1 in. diam., in a mound of
 stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
 S5 | S4
 1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.
 57.00 Wash, course S.
 74.00 Wash, course SE.
 79.98 The cor. of secs. 4, 5, 8 and 9.

Land, roughly rolling and broken.
 Soil, rocky clay; 4th rate.
 No timber.
 Undergrowth, scrub cedar.

From the cor. of secs. 5, 6, 31 and 32, on S. bdy. of Tp.,
 described in book H,
 N. $0^{\circ}03'W.$, bet. secs. 31 and 32,
 over rolling land.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
 S31 | S32
 1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.

Chains

79.00 Road bears NE. and SW.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in a mound of stone, for cor. of secs. 29, 30, 31 and 32, with brass cap, marked

T27N	R 7E
S30	S29
S31	S32

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, rolling.

Soil, rocky clay; 4th rate.

No timber.

40.00 East, on a random line, bet. secs. 29 and 32.
79.94 Set temp. $\frac{1}{4}$ sec. cor. line at the cor. of secs. 29, 30, 31 and 32.
79.94 Intersect the cor. of secs. 28, 29, 32 and 33.

Thence West, on a true line, bet. secs. 29 and 32, over rolling land.

3.95 Road bears N. and S.

39.97 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S29
$\frac{1}{4}$

S32

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

78.95 Road bears NE. and SW.

79.94 The cor. of secs. 29, 30, 31 and 32.

Land, rolling.

Soil, rocky clay; 4th rate.

No timber.

40.00 West, on a random line, bet. secs. 30 and 31.
65.15 Set temp. $\frac{1}{4}$ sec. cor.
65.15 Intersect W. bdy. of Tp. 4 lks. N. of the cor. of secs. 25, 30, 31 and 36, hereinbefore described.

Thence N. $89^{\circ}58'E.$, on a true line, bet. secs. 30 and 31, over broken land.

25.15 Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S30

 $\frac{1}{4}$

S31

1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

30.15 Wash, course N.

65.15 The cor. of secs. 29, 30, 31 and 32.

Land, rolling and broken.

Soil, rocky clay; 4th rate.

No timber.

N. $0^{\circ}03'W.$, bet. secs. 29 and 30, over rolling land.

Subdivision of T. 27 N., R. 7 E.

Chains

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked


$\frac{1}{4}$
S30 | S29

1916

dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

74.50 Road bears NW. and SE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., in a mound of stone, for cor. of secs. 19, 20, 29 and 30, with brass cap, marked



1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, rolling:
Soil, rocky clay; 4th rate.
No timber.

East, on a random line, bet. secs. 20 and 29.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.00 Intersect N. and S. line 4 lks. N. of the cor. of secs. 20, 21, 28 and 29.

Thence N. $89^{\circ}58'$ W., on a true line, bet. secs. 20 and 29, over rolling land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S20
 $\frac{1}{4}$
S29
1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

40.50 Road bears NW. and SE.

53.00 Asc. on E. slope.

74.00 Summit of ascent.

78.00 Desc. on W. slope.

80.00 The cor. of secs. 19, 20, 29 and 30.

Land, rolling and broken.
Soil, rocky clay; 4th rate.
No timber.

West, on a random line, bet. secs. 19 and 30.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

65.00 Intersect W. bdy. of Tp. 5 lks. N. of the cor. of secs. 19, 24, 25 and 30, hereinbefore described.

Thence N. $89^{\circ}57'$ E., on a true line, bet. secs. 19 and 30, over rolling land.

25.00 Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S19
 $\frac{1}{4}$
S30
1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.


Chains

60.00 Wash, course S.
65.00 The cor. of secs. 19, 20, 29 and 30.

Land, rolling.
Soil, rocky clay; 4th rate.
No timber.

22.70 N.0°03'W., bet. secs. 19 and 20,
over broken land.
34.00 Desc. 125 ft., on NE. slope, over mountainous land.
Ft. of descent. Wash, course SE. Old dim. road bears
NW. and SE.


40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



1916
and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

53.00 Wash, course SE.
60.00 Ft. of SW. slope. Asc. 215 ft.
73.20 Summit.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 17, 18, 19 and 20, with brass
cap, marked




1916
and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

Land, broken and mountainous.
Soil, rocky clay; 4th rate.
No timber.

40.00 East, on a random line, bet. secs. 17 and 20.
Set temp. $\frac{1}{4}$ sec. cor.
79.84 Intersect N. and S. line 6 lks. N. of the cor. of secs.
16, 17, 20 and 21.

14.85 Thence N.89°57'W., on a true line, bet. secs. 17 and 20,
over rolling land.
30.00 Wash, course SE. Asc. 140 ft.
Summit of ascent.
39.92 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in a mound
of stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
N. of cor.

79.84 The cor. of secs. 17, 18, 19 and 20.

Land, rolling and broken.
Soil, rocky clay; 4th rate.
No timber.

Subdivision of T. 27 N., R. 7 E.

Chains

West, on a random line, bet. secs. 18 and 19.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 64.92 Intersect W. bdy. of Tp. 2 lks. N. of the cor. of secs. 13, 18, 19 and 24, hereinbefore described.

Thence N. $89^{\circ}59'$ E., on a true line, bet. secs. 18 and 19, over rolling land.
 24.92 Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
S18
1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

30.70 Desc. 210 ft., into canyon, course SE.
 40.00 Ft. of descent.
 42.92 road bears NW. and SE.
 44.92 Wash, course SE.
 50.00 Asc. 160 ft., out of canyon.
 57.30 Summit of ascent, on E. edge of same.
 64.92 The cor. of secs. 17, 18, 19 and 20.

Land, rolling and mountainous.
 Soil, rocky clay; 4th rate.
 No timber.

N. $0^{\circ}03'$ W., bet. secs. 17 and 18, over broken land.
 35.00 Desc. on NW. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
S18 S17
1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

55.00 Ft. of descent, 315 ft. below summit.
 75.00 Asc. 60 ft., on SE. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., in a mound of stone, for cor. of secs. 7, 8, 17 and 18, with brass cap, marked

T27N R 7E
S7 S8
S18 S17
1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, broken and mountainous.
 Soil, rocky clay; 4th rate.
 No timber.

East, on a random line, bet. secs. 8 and 17.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.86 Intersect N. and S. line 14 lks. N. of the cor. of secs. 8, 9, 16 and 17.

Thence N. $89^{\circ}54'$ W., on a true line, bet. secs. 8 and 17, over mountainous land.
 .15 Wash, course SE. Asc. on E. slope.
 4.85 Trail bears NW. and SE.
 9.85 Summit of ascent, 130 ft. above wash.

Chains

34.85 Desc. on NW. slope.
 39.93 Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S 8
 $\frac{1}{4}$ -----
 S17
 1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
 44.85 ft. of slope, 120 ft. below top.
 49.85 Wash, course SE.
 79.86 The cor. of secs. 8, 9, 16 and 17.

Land, rolling, broken and mountainous.
 Soil, rocky clay; 4th rate.
 No timber.

40.00 West, on a random line, bet. secs. 7 and 18.
 Set temp. $\frac{1}{4}$ sec. cor.
 64.80 Intersect W. bdy. of Tp. 9 lks. N. of the cor. of secs. 7, 12, 13 and 18, hereinbefore described.

Thence N. $89^{\circ}55'E.$, on a true line, bet. secs. 7 and 18, over broken land.

24.80 Set an iron post, 3 ft. long, 1 in. diam., in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S 7
 $\frac{1}{4}$ -----
 S18
 1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

31.70 W. edge of canyon, course S.
 37.70 E. edge of same.
 64.80 The cor. of secs. 7, 8, 17 and 18.

Land, broken and mountainous.
 Soil, rocky clay; 4th rate.
 No timber.

13.00 N. $0^{\circ}03'W.$, bet. secs. 7 and 8, over mountainous land. Asc. 250 ft., on SE. slope.

Summit of ascent.
 20.60 S. edge of canyon, course E.
 26.60 N. edge of same.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ -----
 S7 | S8
 1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., in a mound of stone, for cor. of secs. 5, 6, 7 and 8, with brass cap, marked

T27N | R 7E
 S6 | S5

 S7 | S8
 1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.


Land, mountainous and rolling. Soil, 4th rate. No timber.

Subdivision of T. 27 N., R. 7 E.

Chains

40.00 East, on a random line, bet. secs. 5 and 8.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.90 Intersect N. and S. line 6 lks. N. of the cor. of secs.
 4, 5, 8 and 9.

Thence N.89°57'W., on a true line, bet. secs. 5 and 8,
 over broken land, ascending.
 6.60 Road bears N. and S.
 17.80 Summit of ascent, 165 ft. above sec. cor.
 22.00 Wash, course S.
 36.00 Wash, course SE.
 39.95 Set an iron post, 3 ft. long, 1 in. diam., in a mound of
 stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked




and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 N. of cor.
 48.50 E. edge of canyon, course S.
 65.00 W. edge of same.
 79.90 The cor. of secs. 5, 6, 7 and 8.

Land, mountainous and broken.
 Soil, rocky clay; 4th rate.
 No timber.

40.00 West, on a random line, bet. secs. 6 and 7.
 Set temp. $\frac{1}{4}$ sec. cor.
 64.56 Intersect W. bdy. of Tp. 5 lks. N. of the cor. of secs.
 6 and 7, hereinbefore described.

Thence N.89°57'E., on a true line, bet. secs. 6 and 7,
 over rolling land.
 24.56 Set an iron post, 3 ft. long, 1 in. diam., in a mound of
 stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked




and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 N. of cor.
 64.56 The cor. of secs. 5, 6, 7 and 8.

Land, rolling.
 Soil, rocky clay; 4th rate.
 No timber.

40.00 N.0°03'W., on a random line, bet. secs. 5 and 6.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.96 Intersect N. bdy. of Tp. 7 lks. E. of the cor. of secs.
 5, 6, 31 and 32, hereinbefore described.

Thence S.0°06'E., on a true line, bet. secs. 5 and 6,
 over rough broken land.

.16 Road bears NE. and SW.
 9.45 Road bears NW. and SE.
 32.95 Wash, course SE.
 39.96 Set an iron post, 3 ft. long, 1 in. diam., in a mound of
 stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.

Chains

42.95 Wash, course SE. Asc. on gentle N. slope.
 61.15 Summit of ascent.
 79.96 The cor. of secs. 5, 6, 7 and 8.

Land, rough and broken.
 Soil, rocky clay; 4th rate.
 Timber, scattering cedar.

Boundaries of T. 27 N., R. 7 E.

Latitudes, Departures and Closing Errors.

Line designated	True Course	Dist. chs.	Latitudes		Departures	
			N. chs.	S. chs.	E. chs.	W. chs.
South Boundary	West	465.23				465.23
West Boundary	North	480.00	480.00			
North Boundary	S.89°54'E.	464.50		.83	464.50	
East Boundary	South	480.00		480.00		
Convergency					.52	
Totals			480.00	480.83	465.02	465.23
				480.00		465.02
Error in latitude				.83		
						.21

General Description.

The east range of sections in this township is rolling bench land. The balance consists of high plateau like ridges, traversed by deep rocky canyons. General course of drainage is east.

Water, suitable only for stock, exists in a small natural pond in section 21, and in a small reservoir in section 23.

The soil is very rocky and produces but little vegetation, which consists of a very scant growth of short grass and a few scrub pinyon and juniper trees.

There are no settlers.

No evidence of valuable mineral could be found.

Several roads traverse the township.

T. 27 N., R. 7 E.

Date Diagram.

3208

	4-27-16	4-27-16	4-27-16	4-27-16	4-27-16	4-27-16
4-26-16	6 4-29-16	5 4-29-16	4 4-27-16	3 4-29-16	2 4-28-16	1 4-28-16 3-15-16
4-26-16	7 4-29-16	8 4-27-16	9 4-26-16	10 4-25-16	11 4-25-16	12 4-21-16 3-15-16
4-26-16	18 4-27-16	17 4-26-16	16 4-25-16	15 4-22-16	14 4-21-16	13 4-21-16 3-15-16
4-26-16	19 4-26-16	20 4-22-16	21 4-22-16	22 4-21-16	23 4-21-16	24 4-21-16 3-15-16
4-26-16	30 4-22-16	29 4-22-16	28 4-22-16	27 4-21-16	26 4-21-16	25 4-21-16 3-15-16
4-26-16	31 4-11-16	32 4-11-16	33 4-11-16	34 4-11-16	35 4-11-16	36 4-11-16 3-15-16

Lines run by Surveyor Johnston on dates shown above.

" " " Transitman Inch " " " "

328
BOOK 2268
36

TRANSITMAN
CERTIFICATE OF UNITED STATES SURVEYOR.

I, Philip L. Inch, U.S. Transitman, ~~U.S. Surveyor~~, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General for Group 66, Arizona, bearing date of the 4th day of January, 1916, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the
Subdivision lines of

TOWNSHIP 27 NORTH, RANGE 7 EAST.

of the Gila and Salt
River Base & Meridian, in the State of Arizona, which are represented in and by diagram on page 33 hereof the foregoing field notes, as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General for Group 66, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Philip L. Inch
~~U. S. Surveyor.~~
U. S. Transitman.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

....., 191

The foregoing field notes of the survey of

executed by
under his special instructions dated, 191 , having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above-described surveys in
....., has been correctly copied from the original notes on file in this office.

U. S. Surveyor General.

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Theodore O. Johnston, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General for Group 66, Arizona, bearing date of the 4th day of January, 1916, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the North and West Boundaries, and all those parts or portions of the Subdivision lines of

TOWNSHIP 27 NORTH, RANGE 7 EAST,

of the Gila and Salt

River Base and Meridian, in the State of Arizona, and by diagram on page 33 hereof foregoing field notes, as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General for Group 66, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Theodore O. Johnston U. S. Surveyor.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix, Ariz., FEB 8, 1919

The foregoing field notes of the survey of the North and West Boundaries, and the Subdivision lines of

TOWNSHIP 27 NORTH, RANGE 7 EAST,

of the Gila and Salt River Base and Meridian, in the State of Arizona,

executed by Theodore O. Johnston, U.S.S. and Philip L. Inch, U.S.T. under his special instructions dated Jan 4, 1916, for Gp. 66, Ariz., 1916, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above described surveys in has been correctly copied from the original notes on file in this office.