

245
1

3277

Book "B"

4-679

BOOK 3277

FIELD NOTES

OF THE RESURVEY OF

Part of the Subdivision lines, and

SURVEY OF

East boundary, and

Part of the Subdivision lines of

TOWNSHIP 28 NORTH, RANGE 6 EAST.

Of the Gila and Salt River Base and Meridian,

In the State of Arizona.

EXECUTED BY

Thomas B. Matthews, U. S. Surveyor,

and

Elmer F. Strickler, U. S. Transitman,

~~In the capacity of U. S. Surveyor~~, under Special Instructions dated January 5, 1916, issued by the United States Surveyor General to govern surveys included in Group No. 67, which were approved by the Commissioner of the General Land Office, January 22, 1916, and Assignment Instructions dated March 20, 1917.

Resurvey & Survey commenced April 12, 1917.

Resurvey & Survey completed April 24, 1917.

3277


3277

3277
Book "B"

Group 67 - - - Arizona.

BOOK 3277

INDEX DIAGRAM.

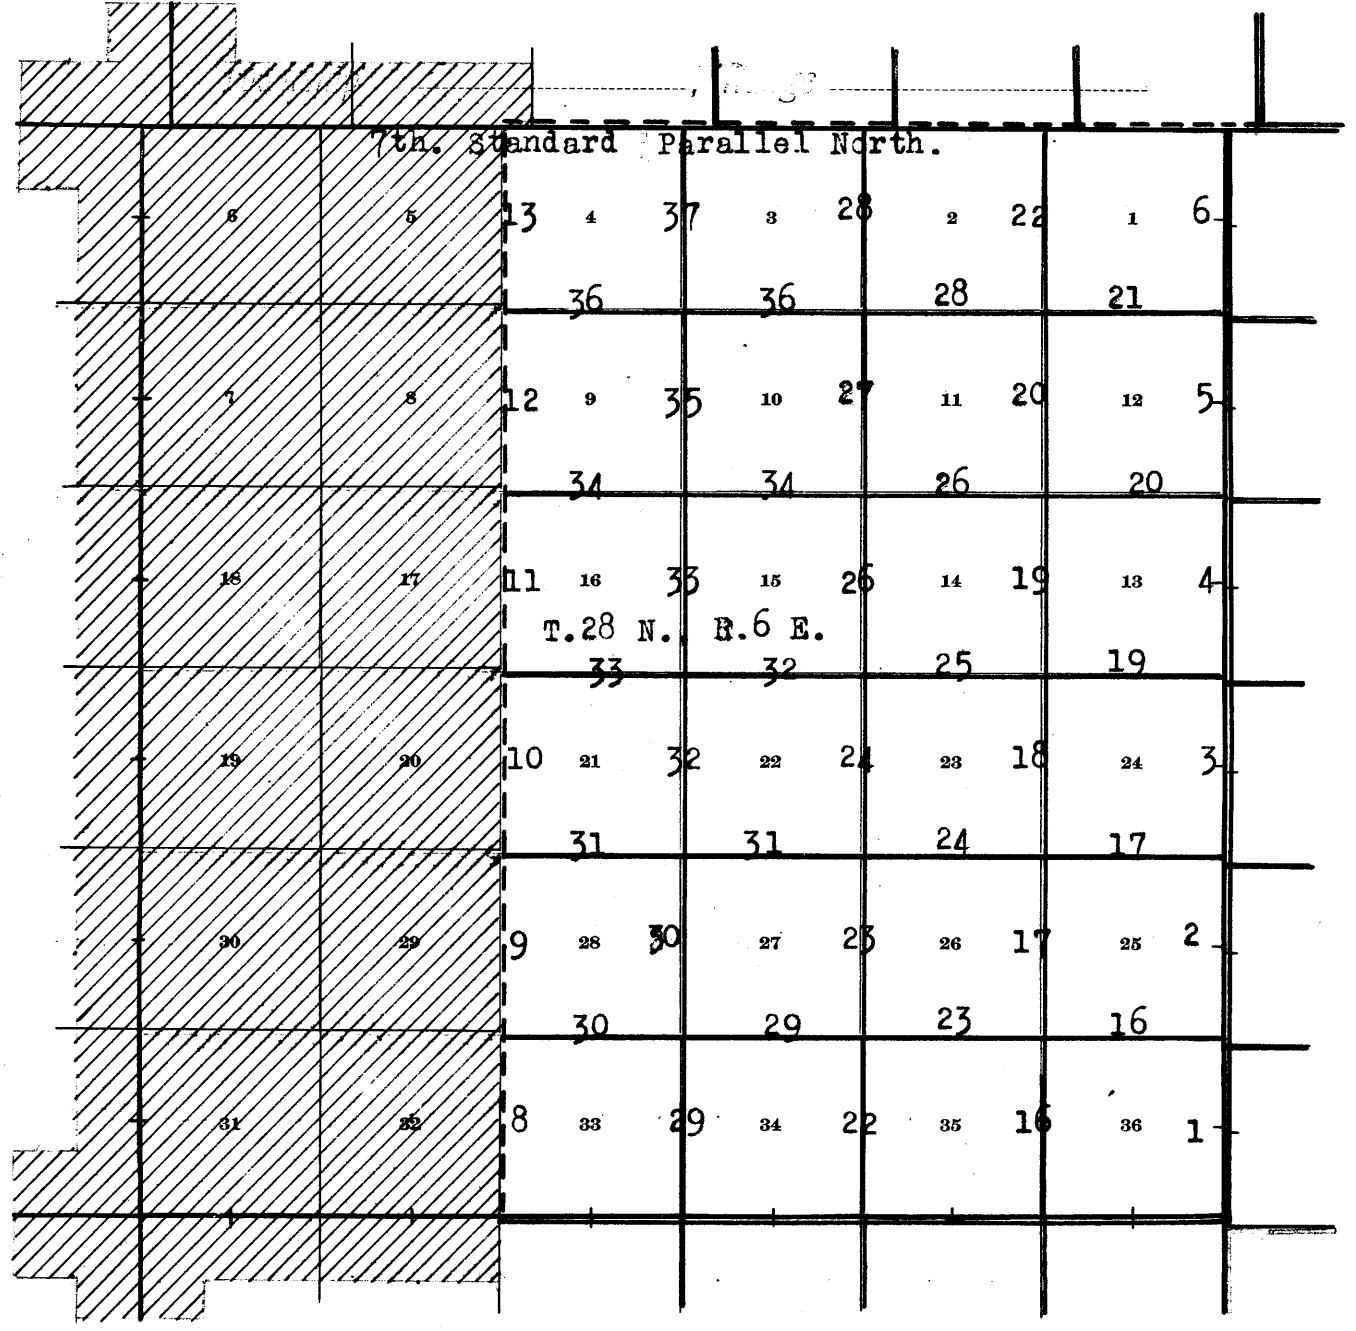

- Lines surveyed under this group.
- - - - Lines resurveyed under this Group.
- Lines surveyed under current Group No.66.
- Accepted surveys.
- ▨ Areas surveyed as per accepted plats on file.

Chains.

Resurveys and Surveys hereinafter described, executed by Thomas B. Matthews, U.S. Surveyor, using a Buff and Buff light mountain transit No. 10124, and Elmer F. Strickler, U.S. Transitman, using a Young and Son's light mountain transit No. 8588, both instruments being equipped with Smith solar attachments.

For a complete description of instruments, together with a record of approval and field tests, see beginning of notes in Book "A."

Chinometers and five-chain steel tapes were the instruments employed in determining all distances.

Dates of survey shown on diagram on page 2 of Book "A." of this group.

Survey of East boundary of Township 28 North, Range 6 East.

In the survey of the E. bdy. of T. 28 N., R. 6 E., corners are set at intervals of 40.00 chs. N. from the cor. of Ts. 27 and 28 N., R. 7 E., referring to the areas east of the line and corners are also set at intervals of 40 chs. north from the corner of Ts. 27 and 28 N., R. 6 E., referring to areas west of the line.

From the cor. of Ts. 27 and 28 N., R. 6 E., described in Book "A,"


North, on E. bdy. of sec. 36.

Over rolling land, thru scattering timber and undergrowth.

29.00 Shallow wash, 10 lks. wide, course SE.

32.10 Old road brs. NW and SE.

37.92 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,




from which,

A pinon, 13 ins. in diam., brs. N. $48\frac{3}{4}^{\circ}$ E., 159 lks. dist., marked $\frac{1}{4}$ S 31 B T.

A cedar, 12 ins. in diam., brs. S. 49° E., 212 lks. dist., marked $\frac{1}{4}$ S 31 B T.


38.70 Old road, brs. NW and SE.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,



and raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Descend gentle NE. slope.

53.00
 77.92 Set an iron post, 3 ft. long, 3 ins. in diam., 12 ins. in the ground, in a mound of stone, for cor. of secs. 30 and 31, T. 28 N., R. 7 E., marked on brass cap,



1917

from which,

A pinon, 8 ins. in diam., brs. N. 15° E., 68 lks. dist., marked T28N R7E S30 BT.

A cedar, 12 ins. in diam., brs. S. 7° E., 243 lks. dist., marked T28N R7E S31 BT.

80.00 Set an iron post, 3 ft. long, 3 ins. in diam., 20 ins. in the ground, in a mound of stone, for cor. of secs. 25 and

2 Survey of East bdy of Township 28 North Range 6 East.

Chains.

36, marked on brass cap,

T28N
R6W
S25
S36

1917

from which,

- A pinon, 14 ins. in diam., brs. S. 73 1/2° W., 138 lks. dist., marked T28N R6W S36 BT.
- A pinon, 16 ins. in diam., brs. N. 29° W., 158 lks. dist., marked T28N R6W S25 B T.

Land, rolling.

Soil, thin rocky loam, 10 ins. deep, subsoil, gravelly, 12 ins. deep.

Timber, cedar and pinon.

Undergrowth, tumble weed, brigham brush, greasewood and dagger brush.

Short grass.

North, on east bdy of sec. 25.

Over rolling land, thru scattering timber and undergrowth.

- .50 Right rim of canyon. Descend rocky NW. slope, 86 ft. to
- 6.15 Wash, in bottom of canyon, 20 lks. wide, course NE. Ascend rocky SE. slope, 84 ft. to
- 13.20 Thence over gently rolling land.
- 37.92 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor. of T. 28 N., R. 7 E., marked on brass cap,

1/4 S30

1917

and raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor.

- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

S25

1917.

from which,

- A cedar, 10 ins. in diam., brs. S. 75 1/2° W., 468 lks. dist., marked 1/4 S 25 B T.
- A cedar, 8 ins. in diam., brs. N. 85 1/2° W., 265 lks. dist., marked 1/4 S 25 B T.

- 63.80 Right rim of canyon, Descend steep rocky NW. slope, 250 ft. to

71.29 Bottom of canyon, 50 lks. wide, course E. Ascend 209 ft. to

- 77.92 Set an iron post 3 ft. long, 3 ins. in diam., 20 ins. in the ground, in a mound of stone, for cor. of secs. 19 and 30, T. 28 N., R. 7 E., marked on brass cap,

T28N
R7E
S19
S30

1917

from which

- A pinon, 12 ins. in diam., brs. N. 33 1/2° E., 78 lks. dist., marked T28N R7E S19 BT.

Survey of East Bdy. of T. 28 N., R. 6 E.

Chains

80.00 A pinion, 10 ins. diam., brs. S. $3\frac{1}{2}^\circ$ E.
 74 lks. dist. mkd. T 28 N R 7 E S 30 B T.
 Set an iron post, 3 ft. long, 3 ins. diam., on surface
 rock, in a mound of stone, for cor. of secs. 24 and 25,
 mkd. on brass cap

T28N
 R 6E
 S24
 S25

1917

from which,

A pinion, 13 ins. diam., brs. S. 26° W.
 18 lks. dist. mkd. T 28 N R 6 E S 25 B T.
 A pinion, 12 ins. diam., brs. N. 68° W.
 43 lks. dist.; mkd. T 28 N R 6 E S 24 B T.

Land, rolling and broken.
 Soil, thin, rocky loam, 10 ins. deep; subsoil, loose gravel.
 Timber, pinion and cedar.
 Undergrowth, tumble weed, greasewood, brigham brush and
 dagger brush.
 Short grass.

10.38
37.92

North on E. bdy. of sec. 24.
 Over rolling land, through scattering timber and under-
 growth.
 Desc. rocky NE. slope, 162 ft. to
 Wash, 15 lks. wide, course E. Asc. 125 ft. to
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., sec. 19, T. 28 N., R. 7 E.,
 mkd. on brass cap.

$\frac{1}{4}$
 S19
 1917

from which,

A cedar, 9 ins. diam., brs. S. $31\frac{3}{4}^\circ$ E.
 152 lks. dist.; mkd. $\frac{1}{4}$ S 19 B T.
 A pinion, 6 ins. diam., brs. N. $85\frac{1}{4}^\circ$ E.
 100 lks. dist.; mkd. $\frac{1}{4}$ S 19 B T.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$
 S24
 1917

from which,

A cedar, 14 ins. diam., brs. S. $68\frac{1}{2}^\circ$ W.
 96 lks. dist. mkd.; $\frac{1}{4}$ S 24 B T.
 A cedar, 8 ins. diam., brs. N. $69\frac{3}{4}^\circ$ W.
 17 lks. dist. mkd.; $\frac{1}{4}$ S 24 B T.

42.00
77.92

Thence over gently rolling land.
 Dim road brs. E. and W.
 Set an iron post, 3 ft. long, 3 ins. diam., 10 ins. in the
 ground, in a mound of stone, for cor. of secs. 18 and
 19, T. 28 N., R. 7 E., mkd. on brass cap

T28N
 R 7E
 S18
 S19

1917

from which,

Survey of East Bdy. of T. 28 N., R. 6 E.

Chains

80.00 Set an iron post, 3 ft. long, 3 ins. diam., 12 ins. in the ground, in a mound of stone, for cor. of secs. 13 and 24, mkd. on brass cap

T28N
R 6E
S13
—
S24

1917

from which,

A pinion, 12 ins. diam., brs. S. $18\frac{1}{2}^\circ$ W.
126 lks. dist. mkd. T 28 N R 6 E S 24 B T.
A cedar, 14 ins. diam., brs. N. $35\frac{1}{4}^\circ$ W.
84 lks. dist.; mkd. T 28 N R 6 E S 13 B T.

Land, rolling.

Soil, thin, sandy loam, 12 ins. deep; subsoil "hard pan" and clay.

Timber, cedar and pinion.

Undergrowth, greasewood and brigham brush.

Short grass.

12.80
37.92

North on E. bdy. of sec. 13.
Over gently rolling land, through open country, general drainage, NE. Desc. 81 ft. to.

Open flat drains NE. Thence over level land.

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., sec. 18, T. 28N., R. 7 E., mkd. on brass cap

$\frac{1}{4}$
|
S18
1917

40.00

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, E. of cor.

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$
|
S13
1917

from which,

A pinion, 8 ins. diam., brs. S. $78\frac{3}{4}^\circ$ W.
270 lks. dist.; mkd. $\frac{1}{4}$ S 13 B T.
A pinion, 10 ins. diam., brs. N. $82\frac{1}{2}^\circ$ W.
260 lks. dist.; mkd. $\frac{1}{4}$ S 13 B T.

52.50
77:92

Leave flat, gentle slope to NE.

Set an iron post, 3 ft. long, 3 ins. diam., 26 ins. in the ground, for cor. of secs. 7 and 18, T. 28 N., R. 7 E., mkd. on brass cap

T28N
R 7E
S 7
—
S18

1917

from which,

A pinion, 10 ins. diam., brs. N. $77\frac{1}{4}^\circ$ E.
637 lks. dist. mkd. T 28 N R 7 E S 7 B T.

Survey of East Bdy. of T. 28 N., R. 6 E.

Chains	<p>A pinion, 8 ins. diam., brs. S. 44$\frac{3}{4}$° E. 138 lks. dist.; mkd. T 28 NR 7 E S 18 B T.</p> <p>80.00 Set an iron post, 3 ft. long, 3 ins. diam., 26 ins. in the ground, for cor. of secs. 12 and 13, mkd. on brass cap</p> <p style="text-align: center;">T28N R 6E S12 <u>S13</u> 1917</p> <p>from which, A pinion, 12 ins. diam., brs. S. 39$\frac{1}{2}$° W. 408 lks. dist.; mkd. T 28 NR 6 E S 13 B T. A pinion, 8 ins. diam., brs. N. 78$\frac{1}{2}$° W. 567 lks. dist.; mkd. T 28 NR 6 W S 12 B T.</p> <p>Land, rolling and level. Soil, sandy loam, 14 ins. deep; subsoil, gravelly, medium texture, 12 ins. deep. Timber, pinion and cedar. Undergrowth, tumble weed, greasewood and brigham brush. Short grass.</p>
24.40 27.74 37.92	<p>North on E. bdy. of sec. 12. Over rolling land, through scattering timber and undergrowth. Desc. gradual slope. Right rim of canyon, course E. Desc. N. slope, 155 ft. to Rocky wash, 30 lks. wide, course E. Asc. S. slope, 172 ft.</p> <p>Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground, in a mound of stone, for $\frac{1}{4}$ sec. cor. of sec. 7, T. 28 N., R. 7 E., mkd. on brass cap</p> <p style="text-align: center;">$\frac{1}{4}$ S 7 1917</p> <p>from which, A pinion, 12 ins. diam., brs. N. 9$\frac{1}{4}$° E. 57 lks. dist.; mkd. $\frac{1}{4}$ S 7 B T. A pinion, 12 ins. diam., brs. S. 29° E. 333 lks. dist.; mkd. $\frac{1}{4}$ S 7 B T.</p>
40.00	<p>Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap</p> <p style="text-align: center;">$\frac{1}{4}$ S12 1917</p> <p>from which, A pinion, 8 ins. diam., brs. S. 41° W 34 lks. dist.; mkd. $\frac{1}{4}$ S 12 B T. A pinion, 9 ins. diam., brs. N. 34° W. 100 lks. dist.; mkd. $\frac{1}{4}$ S 12 B T.</p>
72.80 73.80	<p>Enter old tree corral. Leave old tree corral. Thence across flat, draining NE.</p>
77.92	<p>Set an iron post, 3 ft. long, 3 ins. diam., 26 ins. in the ground, for cor. of secs. 6 and 7, T. 28 N., R. 7 E., mkd. on brass cap</p> <p style="text-align: center;">T28N R 7E S 6 <u>S 7</u> 1917</p> <p>from which, A pinion, 14 ins. diam., brs. N. 32$\frac{1}{4}$° E. 500 lks. dist.; mkd. T 28 NR 7 E S 6 B T. A pinion, 12 ins. diam., brs. S. 14$\frac{1}{2}$° E. 414 lks. dist.; mkd. T 28 NR 7 E S 7 B T.</p>
80.00	<p>Set an iron post, 3 ft. long, 3 ins. diam., 26 ins. in the ground, for cor. of secs. 1 and 12, mkd. on brass cap</p>

Chains

T28N
R 6E
S 1
— S12
1917

and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.
Land, rolling.
Soil, sandy loam; subsoil, gravelly and loose.
Timber, pinion and cedar.
Undergrowth, tumble weed, greasewood and brigham brush.
Short grass.

37.92

North on E. bdy. of sec. 1.
Over rolling land, through scattering timber and under-
growth.
Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the
ground, in a mound of stone, for ¼ sec. cor., of sec.
6, T. 28 N., R. 7 E., mkd. on brass cap

¼
| S 6
1917

from which,
A cedar, 12 ins. diam., brs. N. 55½° E.
263 lks. dist.; mkd. ¼ S 6 B T.
No other trees within limits.
Raise a mound of stone, 2 ft. base, 1½ ft. high, E. of cor.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for ¼ sec. cor., mkd. on brass cap

40.00

¼
| S 1
1917

from which,
A pinion, 12 ins. diam., brs. S. 3° W.
177 lks. dist.; mkd. ¼ S 1 B T.
A cedar, 8 ins. diam., brs. N. 1° W.
539 lks. dist.; mkd. ¼ S 1 B T.
Intersect 7th standard parallel N., 13.12 chs. S. 89° 50' W.
of the standard cor. of Ts. 29 N., Rs. 6 and 7 E.,
which is a broken granite stone, 8 X 8 X 12 ins.,
lying loose on the ground, mkd. and witnessed as
described by the Surveyor General. Set an iron post
3 ft. long, 3 ins. diam., 24 ins. in the ground, for
reestablished standard cor. of Ts. 29 N., Rs. 6 and 7
E., mkd. on brass cap

82.42

T29N
R 6E R 7E
S36 | S31

1917

from which,
A cedar, 12 ins. diam., brs. N. 22¾° E.
374 lks. dist.; mkd. S C T 29N R 7 E S 31 B T.
At the point of intersection
Set an iron post, 3 ft. long, 3 ins. diam., 20 ins. in
the ground, in a mound of stone, for closing cor. of
Ts. 28 N., Rs. 6 and 7 E., mkd. on brass cap

C | C
S 1 | S 6
R 6E R 7E
T28N
1917

Survey of East bdy of Township 28 North, Range 6 East. 7.

Chains.

from which,

- A cedar, 14 ins. in diam., brs. S. 30° E., 503 lks. dist., marked T28N R7E S6 CC BT.
- A pinon, 12 ins. in diam., brs. S. 31 3/4° W., 441 lks. dist., marked T28N R6W S1 CC BT.

Land, gently rolling.
 Soil, sandy loam, subsoil, gravelly and loose.
 Timber, cedar and pinon.
 Undergrowth, greasewood and brigham brush.
 Short grass.

Retracement for Resurvey- Part of the Subdivision lines
 of Township 28 North, Range 6 East.

From original cor. of secs. 4, 5, 32 and 33 on S. bdy. of Tp., described in Book "A,"

- 40.15 North, on random line, on E. bdy. of sec. 32 (S. 1/2). Fall 9 lks. E. of original 1/4 sec. cor., hereinafter described. True course and dist. of S. 1/2 of E. bdy. of sec. 32 are therefore N. 0° 8' W., 40.15 chs.
- 39.98 Thence, North, on random line on E. bdy. of sec. 32 (N. 1/2). Fall 8 lks. W. of original cor. of secs. 28, 29, 32 and 33, hereinafter described. True course and dist. of N. 1/2 of E. bdy. of sec. 32 are therefore N. 0° 7' E., 39.98 chs.

- 40.09 North, on random line, on E. bdy. of sec. 29 (S. 1/2). Fall 2 lks. W. of original 1/4 sec. cor., hereinafter described. True course and dist. of S. 1/2 of E. bdy. of sec. 29 are therefore N. 0° 2' E., 40.09 chs.
- 40.49 Thence, North, on random line, on E. bdy. of sec. 29 (N. 1/2). Fall 15 lks. E. of original cor. of secs. 20, 21, 28 and 29, hereinafter described. True course and dist. of N. 1/2 of E. bdy. of sec. 29, are therefore N. 0° 13' W., 40.49 chs.

- 40.06 North, on random line, on E. bdy. of sec. 20 (S. 1/2). Fall 15 lks. E. of original 1/4 sec. cor., hereinafter described. True course and dist. of S. 1/2 of E. bdy. of sec. 20 are therefore, N. 0° 13' W., 40.06 chs.
- 40.09 Thence, North, on random line, on E. bdy. of sec. 20 (N. 1/2). Fall 12 lks. E. of original cor. of secs. 16, 17, 20 and 21, hereinafter described. True course and dist. of N. half of E. bdy. of sec. 20 are therefore, N. 0° 10' W., 40.09 chs.

- 40.06 North, on random line, on E. bdy. of sec. 17 (S. 1/2). Fall 4 lks. E. of original 1/4 sec. cor., hereinafter described. True course and dist. of S. 1/2 of E. bdy. of sec. 17 are therefore N. 0° 3' W., 40.06 chs.
- 40.03 Thence, North, on random line, on E. bdy. of sec. 17 (N. 1/2). Fall 12 lks. E. of original cor. of secs. 8, 9, 16 and 17, hereinafter described. True course and dist. of N. 1/2 of E. bdy. of sec. 17 are therefore, N. 0° 10' W., 40.03 chs.

8. Retracement for Resurvey-Part of Subdivision of T.28N.R6E.

Chains.

40.08 North, on random line, on E. bdy. of sec. 8 (S. 1/2).
Fall 7 lks. W. of original 1/4 sec. cor., hereinafter described.
True course and dist. of S. 1/2 of E. bdy. of sec. 8 are therefore N. 0° 6' E., 40.08 chs.

Thence,
40.30 North, on random line, on E. bdy. of sec. 8 (N. 1/2).
Fall 4 lks. W. of original cor. of secs. 4, 5, 8 and 9, hereinafter described.
True course and dist. of N. 1/2 of E. bdy. of sec. 8 are therefore N. 0° 3' E., 40.30 chs.

40.13 North, on random line, on E. bdy. of sec. 5 (S. 1/2).
Fall 6 lks. E. of original 1/4 sec. cor. hereinafter described.
True course and dist. of S. 1/2 of E. bdy. of sec. 5 are therefore, N. 0° 5' W., 40.13 chs.

Thence,
40.12 North, on random line, on E. bdy. of sec. 5 (N. 1/2).
Intersect the original closing cor. of secs. 4 and 5, hereinafter described.
True course and dist. of N. 1/2 of E. bdy. of sec. 5 are therefore N., 40.12 chs.


Dependent Resurvey of portion of Subdivision of T.28N.R6E.

Preliminary to commencing the subdivision of the unsurveyed portion of this township, resurvey the subdivisional W. bdy. of the unsurveyed portion, setting 1/4 sec. and sec. cors. at intervals of 40 chs., referring to the areas E. of line, and reestablishing the original 1/4 sec. and sec. cors. in their original positions, as found in the retracement hereinbefore described to refer to the surveyed areas W. of line.

From the original cor. of secs. 4, 5, 32 and 33 on S. bdy. of Tp., which is a limestone, 10x8x12 ins. above ground, firmly set, marked and witnessed as described by the surveyor general,

N. 0° 8' W., on W. bdy. of sec. 33.
Over rolling land, thru dense timber and scattering undergrowth.

10.00 Ascend 29 ft. to
15.00 Enter opening. Thence over gently rolling land.
32.50 Small draw, course SE.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 33, marked on brass cap,



from which,
A pinon, 16 ins. in diam., brs. N. 84 1/2° E., 43 lks. dist., marked 1/4 S 33 B T.
A pinon, 14 ins. in diam., brs. S. 29 1/2° E., 93 lks. dist., marked 1/4 S 33 B T.

40.15 Intersect the original 1/4 sec. cor. of secs. 32 and 33, which is a limestone, 17x13x6 ins., loosely set, marked "1 S" and witnessed by one tree N. 16 1/2° W., 26 lks. dist., properly marked, and one tree S. 75 1/2° E., 44 lks. dist., properly marked. Reestablish this cor. to refer to sec. 32 only, by resetting the same stone, 12 ins. in the ground, with marking to the W., obliterating marking on the original SE. bearing tree, and establishing new bearing trees as follows:


On a pinon, 14 ins. in diam., bearing N. 88 3/4° W., 92 lks. dist., mark 1/4 S 32 B T., and

Dependent Resurvey of portion of Subdivision of T. 28 N., R. 6 E. 9

Chains.

On a pinon, 12 ins. in diam., bearing N. 50 1/2° W., 80 lks. dist., mark 1/4 S 32 B T.

75.00 Thence, N. 0° 7' E., continuing measurement of W. bdy. of sec. 33.
80.00 Enter open land.
Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 28 and 33, marked on brass cap.



1917

from which,

A pinon, 24 ins. in diam. brs. N. 47° E., 600 lks. dist., marked T28N R6E S28 B T.

No other trees within limits. Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.
Land, rolling.
Soil, sandy, gravelly subsoil.
Timber, pinon and cedar.
Undergrowth, greasewood and brigham brush.
Short grass.

N. 0° 7' E., on W. bdy. of sec. 28.

13 Over rocky, level land, thru dense timber and undergrowth. (39.98 chs. N. 0° 7' E. from reestablished 1/4 sec. cor. of sec. 32) Intersect the original cor. of secs. 28, 29, 32 and 33, which is a limestone, 16x10x6 ins. above ground, firmly set, marked with 1 notch on S. edge, and 4 notches on E. edge, & witnessed by one tree N. 81° W., 261 lks. dist., properly marked. The original SW. bearing tree as described by the surveyor general cannot be found.
Reestablish this cor. to refer to secs. 29 and 32 only by obliterating notches on E. edge of stone, marking 5 notches on N. edge, and establishing additional bearing tree as follows:

On a pinon, 12 ins. in diam., bearing S. 39 1/4° W., 240 lks. dist. mark T 28 N R6E S 32 BT.

40.00 Thence, N. 0° 2' E., continuing measurement of W. bdy. of sec. 28.
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished 1/4 sec. cor. of sec. 28, marked on brass cap.



1917

from which,

A pinon, 12 ins. in diam., brs. N. 74 1/4° E., 48 lks. dist., marked 1/4 S 28 B T.

A pinon, 12 ins. diam., brs. S. 33 1/4° E., 57 lks. dist., marked 1/4 S 28 B T.

40.22 (40.09 chs. N. 0° 2' E., from reestablished cor. of secs. 29 & 32) Intersect the original 1/4 sec. cor. of secs. 28 and 29, which is a limestone, 14x6x5 ins. above ground, firmly set, marked "1/4 S" on W. face, and witnessed by one tree S. 80 1/2° E., 47 lks. dist., properly marked, and one tree S. 32° W., 66 lks. dist., properly marked.
Reestablish this cor. to refer to sec. 29 only, by obliterating marking on SE. bearing tree, and establishing new bearing tree as follows:


On a pinon, 16 ins. in diam., bearing N. 50 1/2° W., 89 lks. dist., mark 1/4 S 29 BT.

No change made in marking on stone.

10. Dependent Resurvey of portion of subdivision of T.28 N..R.6 E.

Chains.

Thence,
 N.0°13'W., continuing measurement of W. bdy. of sec. 28.
 76.00 Leave dense timber, brs. NW and SE.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 21 and 28, marked on brass cap,




from which,
 A pinon, 10 ins. in diam., brs. N. 71½° E., 615 lks. dist., marked T 28 N R 6 E S 21 B T.
 A pinon, 12 ins. in diam., brs. S. 29½° E., 415 lks. dist., marked T 28 N R 6 E S 28 B T.

Land, level.
 Soil, sandy, gravelly subsoil.
 Timber, pinon and cedar.
 Undergrowth, brigham brush and greasewood.
 Short grass.

N.0°13'W., on W. bdy. of sec. 21.
 Over rolling land, thru scattering timber and undergrowth.
 .71 (40.49 chs. N.0°13'W. from reestablished ¼ sec. cor. of sec. 29) Intersect original cor. of secs. 20, 21, 28 and 29, which is a wood post, 4 ins square, 12 ins. above ground, badly decayed, but marking still legible, and the accessories (pits NE., SE., SW. and NW., and mound of earth W. of cor.) still remain, and are in fair state of preservation.

Reestablish this cor. as follows:
 Alongside of old post, set a limestone, 18x10x5 ins., 12 ins. in the ground, for reestablished cor. of secs. 20 and 29, marked with 4 notches on N. edge and 2 notches on S. edge.
 Fill in the NE. and SE. pits, enlarge the NW. and SW. pits to 24x24x12 ins., and rebuild mound in same place to 4 ft. base, 2 ft. high.

No trees within prescribed limits for B. Ts.
 Continue line and measurement.
 25.70 Center of large shallow draw, course SE.
 28.70 Enter dense timber, brs. SE. and W.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished ¼ sec. cor. of sec. 21, marked on brass cap,




from which,
 A pinon, 12 ins. in diam., brs. N. 62¾° E., 264 lks. dist., marked ¼ S 21 B T.
 A pinon, 18 ins. in diam., brs. S. 22¾° E., 263 lks. dist., marked ¼ S 21 B T.

40.77 (40.06 chs. N.0°13'W., from reestablished cor. of secs. 20 and 29) Intersect the original ¼ sec. cor. of secs. 20 and 21, which is a limestone, 14x7x12 ins. above ground, firmly set, marked "1/4 S" on W. face, and witnessed by one tree N. 51½° W., 125 lks. dist., properly marked, and one tree N. 61½° E., 183 lks. dist., properly marked.
 Reestablish this cor. to refer to sec. 20 only by obliterating the marking on the NE. tree, and establishing new bearing tree as follows:
 On a cedar, 14 ins. in diam., bearing S. 51° W., 108 lks. dist., mark ¼ S 20 B T.
 No change made in marking on stone.
 Thence,

Dependent Resurvey of portion of subdivision of T.28 N.R.6.E. 11

Chains.

80.00 N.0°10'W., continuing measurement of W.bdy. of sec.21.
Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 16 and 21; marked on brass cap,



from which,
A cedar, 24 ins. in diam., brs. N.44 $\frac{3}{4}$ °E., 11 lks. dist., marked T28N R6E S16 BT.
A cedar, 22 ins. in diam., brs. S.52 $\frac{1}{2}$ °E., 45 lks. dist., marked T28N R6E S21 BT.


Land, gently rolling.
Soil, sandy loam, gravelly subsoil.
Timber, cedar and pinon.
Undergrowth, brigham brush and greasewood.
Short grass.

N.0°10'W., on W.bdy. of sec.16.
Over rolling land, thru dense timber and scattering undergrowth.

.86 (40.09 chs. N.0°10'W., from reestablished $\frac{1}{4}$ sec. cor. of sec. 20) intersect the original cor. of secs. 16, 17, 20 and 21, which is a wood post, 4 ins. sq., 12 ins. above ground, badly decayed, marks faint but legible. Cor. is witnessed by one tree N.9 $\frac{1}{2}$ °E., 21 lks. dist., properly marked, one tree S.17 $\frac{3}{4}$ °E., 106 lks. dist., properly marked, and one tree S.32 $\frac{1}{4}$ °W., 77 lks. dist., properly marked. No trace of the original NW. bearing tree can be found.

Reestablish this cor. as follows:
Alongside of old post, set a limestone, 19x9x8 ins., 8 ins. in the ground, for reestablished cor. of secs. 17 and 20, marked with 3 notches on each of N. and S. edges, and establish new bearing tree as follows:
On a pinon, 16 ins. in diam., bearing N.23 $\frac{1}{2}$ °W., 85 lks. dist., mark T 28 N R 6 E S 17 BT.

40.00 Thence, N.0°3' W., continuing measurement of W bdy. of sec.16.
Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground, in a mound of stone, for reestablished $\frac{1}{4}$ sec. cor. of sec.16, marked on brass cap,



from which,
A pinon, 12 ins. in diam., brs. N.86°E., 33 lks. dist. marked $\frac{1}{4}$ S 16 B T.
A cedar, 8 ins. in diam., brs. S.15°E., 66 lks. dist., marked $\frac{1}{4}$ S 16 B T.

40.92 (40.06 chs. N.0°3'W., from reestablished cor. of secs. 17 and 20) intersect the original $\frac{1}{4}$ sec. cor. of secs. 16 and 17, which is a wood post, 4 ins. square, 12 ins. above ground, well preserved, firmly set, marked " $\frac{1}{4}$ S17" on W. face, and witnessed by one tree N.42 $\frac{1}{2}$ °E., 13 lks. dist., properly marked, and one tree S.66 $\frac{1}{2}$ °W., 38 lks. dist., properly marked. Reestablish this cor. to refer to secs. 17 only, by obliterating marking on NE bearing tree, and establish new bearing tree as follows:

On a pinon, 10 in. in diam., bearing N.29°W., 80 lks. dist., mark $\frac{1}{4}$ S 17 B T.

No change made in marking on post.
Thence,
N.0°10'W., continuing measuring of W. bdy. of sec.16.

12 Dependent Resurvey of portion of Subdivision of T.28 N., R.6 E.

Chains.

64.92

80.00

Cross small opening.
Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground, in a mound of stone, for reestablished cor. of secs. 9 and 16, marked on brass cap,

T28N
R6E
S 9
S16

1917

from which,

A cedar, 16 ins. in diam., brs. N. 74 1/4° E., 71 lks. dist., marked T28N R6E S9 BT.

A pinon, 12 ins. in diam., brs. S. 37° E., 63 lks. dist., marked T28N R6E S16 BT.

Land, gently rolling.

Soil, sandy, with gravelly subsoil.

Timber, cedar and pinon.

Undergrowth, brigham brush and greasewood.

Short grass.

N. 0° 10' W., on W. bdy. of sec. 9.

Over rolling, broken land, thru dense timber and scattering undergrowth.

.95 (40.03 chs. N. 0° 10' W. from reestablished 1/4 sec. cor. of sec. 17)

Intersect the original cor. of secs. 8, 9, 16 and 17, which is a wood post, 4 ins. square, 12 ins. above ground, firmly set, but badly decayed and faintly marked, and witnessed by one tree S. 65 3/4° W., 140 lks. dist., properly marked, one tree N. 52 1/2° W., 35 lks. dist., properly marked, one tree N. 27 3/4° E., 100 lks. dist., properly marked, and one tree S. 30 1/2° E., 102 lks. dist., properly marked.

Reestablish this cor. as follows:

Alongside of old post, set a limestone, 20x10x4 ins., 15 ins. in the ground, for reestablished cor. of secs. 8 and 17, marked with 2 notches on N. edge, and 4 notches on S. edge.

Obtiterate markings on the NE. and SE. bearing trees. Thence,

N. 0° 6' E., continuing measurement of W bdy. of sec. 9.

24.50

Bottom of wide draw, course SE. Ascend 28 ft. to

28.00

Thence over rolling land.

40.00

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 9, marked on brass cap,

1/4
S 9

1917

from which,

A cedar, 12 ins. in diam., brs. S. 36 1/4° W., 240 lks. dist., marked 1/4 S 9 B T.

A pinon, 14 ins. in diam., brs. N. 69° W., 79 lks. dist., marked 1/4 S 9 BT.

41.03

(40.08 chs. N. 0° 6' E. from reestablished cor. of secs. 8 and 17) Intersect the original 1/4 sec. cor. of secs. 8 and 9, which is a wood post, 4 ins. square, 12 ins. above ground, firmly set, but badly decayed and faintly marked, and witnessed by one tree S. 28 1/2° W., 36 lks. dist., properly marked, and one tree S. 44 3/4° E., 105 lks. dist., properly marked.

Reestablish this cor. as follows:

Alongside of old post, set a limestone, 15x10x4 ins., 10 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 8, marked 1/4 on W. face, and establish new bearing tree as follows:

On a cedar, 14 ins. in diam., bearing N. 23 1/2° W., 159 lks. dist., mark 1/4 S 8 BT.

Dependent Resurvey of portion of Subdivision of T.28 N., R.6 E. 13

Chains. Thence,
 N.0°3'E., continuing measurement of W. bdy. of sec.9.
 44.50 Descend 40 ft. to
 54.00 Center of large draw, course SE. Ascend 89 ft. to
 71.00 Thence over gently rolling land.
 80.00 Set an iron post, 3 ft. long, 2 ins. on ledge of rock, in a mound of stone, for reestablished cor. of secs.4 and 9, marked on brass cap,

T28N
 R6E
 S 4
 S 9

1917

from which,
 A pinon, 12 ins. in diam., brs. N.72 $\frac{3}{4}$ °E., 50 lks. dist., marked T28N R6E S4BT.
 A pinon, 10 ins. in diam., brs. S.52 $\frac{1}{4}$ °E., 53 lks. dist., marked T28N R6E S9, BT.

Land, rolling and broken.
 Soil, sandy and rocky.
 Timber, cedar and pinon.
 Undergrowth, brigham brush and greasewood.
 Short grass.

N.0°3' E., on W. bdy. of sec.4.
 Over rolling, broken land, thru. dense timber and scattering undergrowth.

1.33 (40.30 chs. N.0°3'E. from reestablished $\frac{1}{4}$ sec. cor. of sec.8),
 Intersect the original cor. of secs.4, 5, 8 and 9, which is a limestone, 18x14x8 ins. loosely set, marked with 4 notches on E. edge, and 5 notches on S. edge, and witnessed by one tree N.8 $\frac{1}{2}$ °E., 14 lks. dist., one tree S.54 $\frac{1}{2}$ °E., 29 lks. dist., one tree S.62 $\frac{1}{2}$ °W., 72 lks. dist., and one tree N.60 $\frac{1}{2}$ °W., 63 lks. dist., all properly marked.
 Reestablish this cor. to refer to secs.5 and 8 only, by firmly resetting same stone in same place, 12 ins. in the ground, obliterating notches on E. edge, and marking 1 notch on N. edge, and obliterating markings on the original NE. and SE. bearing trees.

Thence,
 N.0°5'W., continuing measurement of W. bdy. of sec.4.
 5.30 Descend 82 ft.
 8.60 Bottom of draw, course NE.
 9.60 Road brs. NE. and SW. Descend 92 ft. to
 11.30 Ascend 75 ft. to
 18.30 Thence over gently rolling land.
 24.60 Head of draw. course SE.
 29.00 Ascend 23 ft. to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., on ledge of rock, in a mound of stone, for reestablished $\frac{1}{4}$ sec. cor. of sec.4, marked on brass cap,

$\frac{1}{4}$
 S 4

1917

from which,
 A pinon, 14 ins. in diam., brs. N.20 $\frac{1}{2}$ °E., 76 lks. dist., marked $\frac{1}{4}$ S 4 B T.
 A pinon, 12 ins. in diam., brs. S.14°E., 210 lks. dist., marked $\frac{1}{4}$ S 4 B T.

413.46 (40.13 chs. N.0°5'W., from reestablished cor. of secs.5 and 8)
 Intersect the original $\frac{1}{4}$ sec. cor. of secs.4 and 5, which is a wood post, 4 ins. square, 12 ins. above ground, firmly set but badly decayed and faintly marked, and witnessed by one tree N.89°W., 41 lks. dist., properly marked, and one tree N.84°E., 6 lks. dist., properly marked. Reestablish this cor. to refer to sec.5 only as follows:

14 Dependent Resurvey of portion of subdivision of T.28 N.R.6 E.

Chains.

Alongside old post, set a limestone, 16x12x6 ins. 11 ins. in the ground, marked "1" on W. face.

Obliterate marking on the original NE. bearing tree, and establish a new bearing tree as follows:

On a cedar, 16 ins. in diam., bearing N.34 $\frac{1}{2}$ °W. 35 lks. dist., mark $\frac{1}{2}$ S 5 B T.

Thence,

North, continuing measurement of W. bdy. of sec. 4.

49.00 Wash, 60 lks. wide, course SE.

81.58 (40.12 chs. North from reestablished $\frac{1}{4}$ sec. cor. of sec. 5), intersect the original closing cor. of secs. 4 and 5, on 7th. Standard Parallel N., which is a pine post, 4 ins. square, 12 ins. above ground, firmly set, in good state of preservation, properly marked and witnessed by one tree S.39 $\frac{3}{4}$ °W., 43 lks. dist. properly marked, and one tree S.38 $\frac{1}{2}$ °E., 120 lks. dist., properly marked, Re-establish this cor. as follows:

Alongside of old post, set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished closing cor. of secs. 4 and 5, marked on brass cap,

C	C
S5	S4
T28N	R6E
1917	

Land, rolling and broken. Soil, sandy and rocky.

Timber, cedar and pinon. Undergrowth, brigham brush and greasewood. Short grass.


Boundaries of that portion of Township 28 North, Range 6 East, subdivided under this group.

Latitudes, Departures, and Closing Errors.

Line designated.	True course.	Dist.	Latitudes,		Departures.	
			N	S.	E.	W.
South boundary,	West,	319.68				319.68
Subdivisional boundary.	N.0°8'W,	40.15	40.15			.09
	N.0°7'E.	39.98	39.98		.08	
	N.0°2'E.	40.09	40.09		.02	
	N.0°13'W.	80.55	80.55			.30
	N.0°10'W.	40.09	40.09			.12
	N.0°3'W.	40.06	40.06			.04
	N.0°10'W.	40.03	40.03			.12
	N.0°6'E.	40.08	40.08		.07	
	N.0°3'E.	40.30	40.30		.04	
N.0°5'W.	40.13	40.13			.06	
North,	40.12	40.12				
North boundary, (7th. Std. Par. N)	S.89°50'E.	12.50		.03	12.50	
	N.89°44'E.	40.15	.19		40.15	
	N.89°59'E.	40.09	.01		40.09	
	East,	40.04			40.04	
	N.89°52'E.	40.16	.09		40.16	
	N.89°51'E.	40.14	.11		40.14	
	N.89°57'E.	40.14	.04		40.14	
	N.89°50'E.	67.15	.19		67.15	
East boundary,	South,	482.42		482.42		
Convergency,					.35	
Totals,			482.21	482.45	320.93	320.41
			482.21	320.41		
Error in latitude,				0.24		
Error in departure,					0.52	


16. Survey of Subdivision of portion of T. 28 N., R. 6 E.

Chains. From the cor. of secs. 1, 2, 35 and 36 on the S. bdy. of Tp., described in Book "A," N. 0° 1' W., bet. secs. 35 and 36. Over rolling land, thru scattering timber and undergrowth. 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap.



from which,
 A pinon, 12 ins. in diam., brs. S. 43° E., 129 lks. dist., marked $\frac{1}{4}$ S 36 B T.
 A pinon, 8 ins. in diam., brs. N. 2° W., 145 lks. dist., marked $\frac{1}{4}$ S 35 B T.

75.00 Across flat, drains ENE.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 25, 26, 35 and 36, marked on brass cap.




and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor. Land, rolling. Soil, thin, sandy loam, 12 ins. deep; subsoil, gravelly, medium texture. Timber, cedar and pinon. Undergrowth, tumble weed, brigham brush and greasewood. Short grass.

40.00 East, on a random line, bet. secs. 25 and 36. Set temp. $\frac{1}{4}$ sec. cor.
 80.01 Intersect E l. bdy. of Tp., 3 lks. N. of cor. of secs. 25 and 36, hereinbefore described.

Thence, N. 89° 59' W., on true line, bet. secs. 25 and 36. Over gently rolling land, thru scattering timber & undergrowth. Descend gradual NW. slope, 25 ft. to

5.00 Ascend along NE. slope of canyon, 73 ft. to
 15.00 Thence over level land, general drainage to the NW.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap.



from which,
 A pinon, 9 ins. in diam., brs. N. 74° E., 259 lks. dist., marked $\frac{1}{4}$ S 25 B T.
 A pinon, 8 ins. in diam., brs. S. 58 3/4° E., 355 lks. dist., marked $\frac{1}{4}$ S 25 B T.

52.30 Old road, brs. NW. and SE.
 60.00 Over gently rolling land to
 80.01 The cor. of secs. 25, 26, 35 and 36. Land, level and rolling. Soil, thin, rocky loam, 12 ins. deep; subsoil, gravelly, medium texture. Timber, pinon and cedar. Undergrowth, tumble weed, greasewood and brigham brush. Short grass.

Survey of Subdivision of Portion of T. 28 N. R. 6 E.

Chains

N. 0° 1' W. bet. secs. 25 and 26.
 Over open flat.
 20.00 Leave flat to NE.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$
 S26 | S25
 1917

from which,
 A pinion, 14 ins. diam., brs. S. 56 $\frac{1}{2}$ ° E.
 270 lks. dist.; mkd. $\frac{1}{4}$ S 25 B T.
 A cedar, 14 ins. diam., brs. N. 29 $\frac{3}{4}$ ° W.
 47 lks. dist.; mkd. $\frac{1}{4}$ S 26 B T.
 Enter scattering timber.
 47.80 Old road brs. NW. and SE.
 75.00 Right rim of gulch, course E. Desc. N. slope, 21 ft..
 77.98 Wash, 10 lks. wide, course E. Asc. gradual slope.
 80.00 Set an iron post, 3 ft. long, 2 in. diam., on surface rock in a mound of stone, for cor. of secs. 23, 24, 25 and 26, mkd. on brass cap

T28N R 6E
 S23 | S24
 S26 | S25
 1917

from which,
 A pinion, 8 ins. diam., brs. N. 77 $\frac{1}{4}$ ° E.
 180 lks. dist.; mkd. T 28 NR 6 ES 24 B T.
 A pinion, 6 ins. diam., brs. S. 62° E.
 54 lks. dist.; mkd. T 26 NR 6 ES 25 B T.
 A pinion, 13 ins. diam., brs. S. 33 $\frac{1}{4}$ ° W.
 113 lks. dist.; mkd. T 28 NR 6 ES 26 B T.
 A pinion, 8 ins. diam., brs. N. 17 $\frac{1}{4}$ ° W.
 131 lks. dist.; mkd. T 28 NR 6 ES 23 B T.
 Land, level and rolling.
 Soil, rocky loam, 2 ft. deep; gravelly subsoil.
 Timber, pinion and cedar.
 Undergrowth, greasewood, brigham brush, tumble weed.
 Short grass.

40.00 East on a random line bet. secs. 24 and 25.
 79.92 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect E. bdy. of Tp., 7 lks. N. of cor. of secs. 24 and 25, hereinbefore described.
 Thence
 N. 89° 57' W, on a true line bet. secs. 24 and 25.
 Over broken land, through timber and undergrowth.
 8.92 Desc. rocky SW. slope.
 16.90 Asc. broken slope, 38 ft. to
 22.70 Thence over level land.
 39.96 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$ S 24
 S 25
 1917

from which,
 A pinion, 10 ins. diam., brs. N. 15 $\frac{1}{2}$ ° E.
 18 lks. dist.; mkd. $\frac{1}{4}$ S 24 B T.
 A pinion, 12 ins. diam., brs. S. 68° W.
 125 lks. dist.; mkd. $\frac{1}{4}$ S 25 B T.
 Desc. rocky W. slope, 28 ft. to
 43.20 Rocky gulch, 20 lks. wide, course S. Asc. 17 ft. to
 43.90 Thence across level top to
 44.90 Desc. SW. slope, 41 ft. to

26
 1812 Survey of Subdivision of Portion of T. 28 N., R. 6 E.

Chains
 46.80 Bottom of canyon, 50 lks. wide, course SE. Asc. NE. slope
 81 ft.
 50.90 Desc. along N. slope. 12 ft. to
 53.00 Desc. NW. slope to
 56.80 Rocky wash, 30 lks. wide, course NE. Asc. SE. slope
 124 ft.
 61.40 Top of ascent. Thence over level land.
 77.40 Desc. 14 ft. to
 79.92 The cor. of secs. 23, 24, 25 and 26.
 Land, level and broken.
 Soil, rocky, thin; subsoil, hardpan.
 Timber, pinion and cedar.
 Undergrowth, greasewood and brigham brush.
 Short grass.

N. 0° 1' W. bet. secs. 23 and 24.

Over rolling land, through scattering timber and under-
 growth.

Asc. gradual S. slope, 13 ft.

16.00 Desc. N. slope of canyon, 73 ft. to

21.28 Rocky wash, 20 lks. wide, course E. Asc. SE. slope.

26.00 Point slopes E. Desc. NE. slope, 51 ft. to

30.83 Bottom of canyon, 50 lks. wide, course SE. Asc. SW. slope
 57 ft. to

40.00 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$
 S23 | S24
 1917

from which,

A pinion, 10 ins. diam., brs. N. $72\frac{1}{4}^\circ$ E.

27 lks. dist.; mkd. $\frac{1}{4}$ S 24 B T.

A pinion, 12 ins. diam., brs. S. $27\frac{1}{2}^\circ$ W.

50 lks. dist.; mkd. $\frac{1}{4}$ S 23 B T.

Thence across level open land to

67.15 Old road brs. NE. and SW. Leave open land, enter timber.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the
 ground, for cor. of secs. 13, 14, 23 and 24, mkd. on
 brass cap

T28N R 6E
 S14 | S13
 S23 | S24
 1917

from which,

A pinion, 8 ins. diam., brs. N. $22\frac{1}{2}^\circ$ E.

260 lks. dist.; mkd. T 28 N R 6 E S 13 B T.

A pinion, 10 ins. diam., brs. S. $70\frac{1}{4}^\circ$ E.

105 lks. dist.; mkd. T 28 N R 6 E S 24 B T.

A pinion, 14 ins. diam., brs. S. $16\frac{3}{4}^\circ$ W.

115 lks. dist.; mkd. T 28 N R 6 E S 23 B T.

A pinion, 10 ins. diam., brs. N. 70° W.

350 lks. dist.; mkd. T 28 N R 6 E S 14 B T.

Land, rolling broken and level.

Soil, sandy loam, 12 ins. deep, gravelly subsoil.

Timber, pinion and cedar.

Undergrowth, greasewood and brigham brush.

Short grass.

Subdivision of Portion of T. 28 N. R. 6 E.

Chains	<p>East on a random line bet. secs. 13 and 24. Set temp. $\frac{1}{4}$ sec. cor. 79.96 Intersect E. bdy. of Tp., 9 lks. S. of cor. of secs. 13 and 24, hereinbefore described. Thence S. $89^{\circ} 56'$ W. on a true line bet. secs. 13 and 24. Over rolling land, through scattering timber and undergrowth. 5.00 Enter flat, general drainage NE. 14.00 Asc. gradual slope. 20.00 Over level land. 39.98 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., mkd. on brass cap</p> <p style="text-align: center;"> $\frac{1}{4}$ S 13 $\frac{1}{4}$ S 24 1917</p> <p>from which, A pinion, 12 ins. diam., brs. S. $61\frac{1}{4}^{\circ}$ W. 168 lks. dist.; mkd. $\frac{1}{4}$ S 24 B T. A pinion, 10 ins. diam., brs. N. 15° W. 79 lks. dist.; mkd. $\frac{1}{4}$ S 13 B T.</p> <p>79.96 The cor. of secs. 13, 14, 23 and 24. Land, rolling and level. Soil, sandy loam, 1 ft. deep; subsoil, gravelly, medium texture. Timber, pinion and cedar. Undergrowth, greasewood and brigham brush. Short grass.</p>	
<p>10.00 21.00 40.00 45.00 75.00 78.20 79.19 80.00</p>	<p>N. $0^{\circ} 1'$ W. bet. secs. 13 and 14. Over rolling land, through scattering timber and undergrowth. Enter open space brs. E. and W. Enter timber. Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., mkd. on brass cap</p> <p style="text-align: center;"> $\frac{1}{4}$ S14 S13 1917</p> <p>from which, A pinion, 12 ins. diam., brs. N. 55° E. 150 lks. dist.; mkd. $\frac{1}{4}$ S 13 B T. A cedar, 8 ins. diam., brs. S. $1\frac{3}{4}^{\circ}$ W. 190 lks. dist.; mkd. $\frac{1}{4}$ S 14 B T.</p> <p>Leave timber. Enter timber. Desc. gradual N. slope. Wash, 20 lks. wide, course N. 80° E. Asc. gradual S. slope. Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 11, 12, 13 and 14, mkd. on brass cap</p>	
	<p style="text-align: center;"> T28N R 6E S11 S12 S14 S13 1917</p> <p>from which,</p>	

Subdivision of Portion of T. 28 N. R. 6 E.

Chains

A cedar, 14 ins. diam., brs. S. $41\frac{1}{2}^\circ$ E.
 233 lks. dist.; mkd. T 28 N R 6 E S 13 B T.
 A pinion, 8 ins. diam., brs. S. 40° W.
 140 lks. dist.; mkd. T 28 N R 6 E S 14 B T.
 A pinion, 10 ins. diam., brs. N. $85\frac{1}{2}^\circ$ W.
 239 lks. dist.; mkd. T 28 N R 6 E S 11 B T.

No other trees within limits.

Land, rolling.

Soil, rocky loam, 1 ft. deep; subsoil, gravelly, medium texture.

Timber, pinion and cedar.

Undergrowth, greasewood, brigham brush.

Short grass.

East on a random line bet. secs. 12 and 13.

40.00

Set temp. $\frac{1}{4}$ sec. cor.

80.08

Intersect E. bdy. of Tn., 10 lks. S. of cor. of secs. 12 and 13, hereinbefore described.

Thence

S. $89^\circ 56'$ W. on a true line bet. secs. 12 and 13.

Over rolling land, through scattering timber and undergrowth.

Asc. 45 ft. to

5.00

Desc. 35 ft. to

10.65

Wash, 20 lks. wide, course N. (heads N. 2 chs. dist.)

Asc. 14 ft. to

11.80

Left rim of gulch, course N. Asc. 42 ft. to

24.80

Rocky point, 50 lks. wide, 20 ft. high, brs. N. and S.

40.04

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$ S 12
 S 13
 1917

from which,

A pinion, 12 ins. diam., brs. N. $54\frac{3}{4}^\circ$ E.
 92 lks. dist.; mkd. $\frac{1}{4}$ S 12 B T.

A pinion, 24 ins. diam., brs. S. 35° W.
 193 lks. dist.; mkd. $\frac{1}{4}$ S 13 B T.

Thence over level land to

69.10

Enter rolling land. Desc. gradual slope.

74.40

Wash, course NE. Asc. gradual SE. slope, 23 ft.

80.08

The cor. of secs. 11, 12, 13 and 14.

Land, level, rolling and broken.

Soil, rocky loam, gravelly subsoil, medium texture.

Undergrowth, greasewood and brigham brush.

Timber, pinion and cedar.

Short grass.

N. $0^\circ 1'$ W. bet. secs. 11 and 12.

Over rolling land, through scattering timber and undergrowth.

Asc. gradual slope.

10.83

Dim road brs. NE. and SW. Desc. gradual NE. slope, 74 ft.

34.12

Wash, 20 lks. wide, course E. Asc. S. slope 25 ft. to

37.00

Thence over level land.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$
 S 11 | S 12
 1917

Subdivision of Portion of T. 28 N. R. 6 E. 21

Chains

from which,
 A pinion, 8 ins. diam., brs. S. $51\frac{3}{4}^{\circ}$ E.
 55 lks. dist.; mkd. $\frac{1}{4}$ S 12 B T.
 A pinion, 12 ins. diam., brs. S. $27\frac{1}{2}^{\circ}$ W.
 277 lks. dist.; mkd. $\frac{1}{4}$ S 11 B T.
 44.00 Desc. NE. slope 14 ft. to
 47.49 Wash, 10 lks. wide, course E. Asc. SE. slope, 23 ft. to
 74.00 Thence over gently rolling land.
 76.00 Desc. 28 ft. to
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in the
 ground, in a mound of stone, for cor. of secs. 1, 2,
 11 and 12, mkd. on brass cap

T 28 N R 6 E
 S 2 | S 1
 S 11 | S 12
 1917

from which,
 A cedar, 12 ins. diam., brs. N. $51\frac{1}{2}^{\circ}$ E.
 179 lks. dist.; mkd. T 28 N R 6 E S 1 B T.
 A pinion, 12 ins. diam., brs. S. 1° E.
 289 lks. dist.; mkd. T 28 N R 6 E S 12 B T.
 A pinion, 13 ins. diam., brs. S. $23\frac{1}{2}^{\circ}$ W.
 127 lks. dist.; mkd. T 28 N R 6 E S 11 B T.
 A pinion, 8 ins. diam., brs. N. $62\frac{1}{4}^{\circ}$ W.
 147 lks. dist.; mkd. T 28 N R 6 E S 2 B T.
 Land, rolling and broken.
 Soil, rocky loam, 12 ins. deep, hardpan subsoil.
 Timber, pinion and cedar.
 Undergrowth, greasewood and brigham brush.
 Short grass.

40.00 East on a random line bet. secs. 1 and 12.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.09 Intersect E. bdy. of Tp., 6 lks. S. of cor. of secs. 1
 and 12, hereinbefore described.
 Thence
 S. $89^{\circ} 57'$ W. on a true line bet. secs. 1 and 12.
 Over gently rolling land, through scattering timber and
 undergrowth.
 10.00 Asc. gradual NE. slope.
 15.00 Desc. SW. slope, 63 ft. to
 33.65 Rocky wash, 30 lks. wide, course SE. Asc. 49 ft. to
 40.04 $\frac{1}{2}$ Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$ S 1
 S 12
 1917

from which,
 A pinion, 8 ins diam., brs. S. $11\frac{1}{2}^{\circ}$ W.
 157 lks. dist.; mkd. $\frac{1}{4}$ S 12 B T.
 A cedar, 14 ins. diam., brs. N. $60\frac{1}{2}^{\circ}$ W.
 133 lks. dist.; mkd. $\frac{1}{4}$ S 1 B T.
 Asc. NE. slope 52 ft. to
 45.00 Thence across level land.
 58.00 Desc. SW. slope, 38 ft. to
 65.00 Enter gulch bottom, 1 ch. wide, course SE. from W.
 Thence up gulch.
 69.80 Old road brs. N. 70° W. and S. 70° E.
 72.00 Leave gulch, course E. from NW. Asc. gradual NE. slope,
 48 ft. to
 80.09 The cor. of secs. 1, 2, 11 and 12.
 Land, level and broken.
 Soil, rocky loam, -- Timber, pinion and cedar.
 Undergrowth, greasewood and brigham brush.
 Short grass.

Chains

N. 0° 1' W. on a true line bet. secs. 1 and 2.
 Over rolling land, through scattering timber and under-
 growth.
 Desc. gradual NE. slope, 29 ft. to
 5.00 Asc. 29 ft..
 8.90 Old road brs. N. 70° W. and S. 70° E.
 10.25 Wash, 20 lks. wide, course E. Asc. SW. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the
 ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., mkd. on
 brass cap

$\frac{1}{4}$
 S 2 | S 1
 1917

from which,

A pinion, 12 ins. diam., brs. N. 19 $\frac{3}{4}$ ° E.
 88 lks. dist.; mkd. $\frac{1}{4}$ S 1 B T.

A pinion, 12 ins. diam., brs. N. 35 $\frac{1}{2}$ ° W.
 120 lks. dist.; mkd. $\frac{1}{4}$ S 2 B T.

Desc. 62 ft. to
 62.27 Dim road brs. E. and W..
 62.77 Shallow wash, 1 ch. wide, course E.
 66.90 Dim road brs. E. and W. Asc. SW. slope, 58 ft. to
 82.25 Intersect 7th standard parallel N. 13.03 chs. S. 89° 57'
 W. of reestablished std. cor. of secs. 35 and 36, T.
 29 N., R. 6 E., described in Book "D" etc.

At the point of intersection

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for closing cor. of secs. 1 and 2, mkd. on
 brass cap

C | C
 S 2 | S 1
 T 28 N R 6 E
 1917

from which,

A pinion, 10 ins. diam., brs. S. 69 $\frac{3}{4}$ ° E.
 137 lks. dist.; mkd. T 28 N R 6 E S 1 C C B T.

A pinion, 8 ins. diam., brs. S. 20 $\frac{1}{2}$ ° W.
 132 lks. dist.; mkd. T 28 N R 6 E S 2 C C B T.

Land, rolling.
 Soil, sandy and gravelly.
 Timber, cedar and pinion.
 Undergrowth, greasewood and brigham brush.
 Short grass.

From the cor. of secs. 2, 3, 34 and 35, on S. bdy. of Tp.,
 described in Book "A",

N. 0° 1' W. bet. secs. 34 and 35.

Over level land, through scattering timber and under-
 growth.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the
 ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., mkd. on
 brass cap

$\frac{1}{4}$
 S 34 | S 35
 1917

from which,

A pinion, 8 ins. diam., brs. N. 19° E.
 299 lks. dist.; mkd. $\frac{1}{4}$ S 35 B T.

A pinion, 12 ins. diam., brs. N. 68 $\frac{1}{4}$ ° W.
 191 lks. dist.; mkd. $\frac{1}{4}$ S 34 B T.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the
 ground, in a mound of stone, for cor. of secs. 26,
 27, 34 and 35, mkd. on brass cap

Chains

T28N R 6E
 S27 | S26
 S34 | S35
 1917

from which,

- A pinion, 8 ins. diam., brs. N. $79\frac{1}{4}^\circ$ E.
333 lks. dist.; mkd. T 28 N R 6 E S 26 B T.
- A pinion, 8 ins. diam., brs. S. $20\frac{1}{4}^\circ$ E.
630 lks. dist.; mkd. T 28 N R 6 E S 35 B T.
- A pinion, 10 ins. diam., brs. S. $74\frac{3}{4}^\circ$ W.
378 lks. dist.; mkd. T 28 N R 6 E S 34 B T.
- A pinion, 12 ins. diam., brs. N. $69\frac{3}{4}^\circ$ W.
522 lks. dist.; mkd. T.28 N R 6 E S 27 B T.

Land, level.
 Soil, rocky loam, 10 ins. deep to limestone subsoil.
 Timber, cedar and pinion.
 Undergrowth, greasewood and brigham brush.
 Short grass.

- 40.00 East on a random line bet. secs. 26 and 35.
- 80.06 Set temp. $\frac{1}{4}$ sec. cor.
Intersect N. and S. line, 5 lks. N. of cor. of secs.
25, 26, 35 and 36.

Thence
 N. $89^\circ 58'$ W; on a true line bet. secs. 26 and 35.
 Over gently rolling land, through scattering timber and
 undergrowth.

- 15.00 Asc. gradual E. slope.
- 40.03 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$ S 26
 S 35
 1917

from which,

- A pinion, 8 ins. diam., brs. N. $76\frac{1}{4}^\circ$ W.
213 lks. dist.; mkd. $\frac{1}{4}$ S 26 B T.
- A pinion, 12 ins. diam., brs. S. $70\frac{3}{4}^\circ$ W.
478 lks. dist.; mkd. $\frac{1}{4}$ S 35 B T.

- 50.00 Thence over level land.
- 80.06 The cor. of secs. 26, 27, 34 and 35.
Land, gently rolling and level.
Soil, rocky loam, 12 ins. deep, gravelly subsoil, loose
texture.
Timber, scattering cedar and pinion.
Undergrowth, greasewood and brigham brush.
Short grass.

- 40.00 N. $0^\circ 1'$ W. bet. secs. 26 and 27.
Over level land, through scattering timber and under-
growth.
Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the
ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., mkd. on
brass cap

$\frac{1}{4}$
 S27 | S26
 1917

from which,

- A pinion, 8 ins. diam., brs. S. 82° E.
52 lks. dist.; mkd. $\frac{1}{4}$ S 26 B T.

824

Subdivision of Portion of T. 28 N., R. 6 E.

Chains

80.00 A pinion, 10 ins. diam., brs. N. $75\frac{1}{4}^{\circ}$ W.
239 lks. dist.; mkd. $\frac{1}{4}$ S 27 B T.
Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the
ground, in a mound of stone, for cor. of secs. 22,
23, 26 and 27, mkd. on brass cap

T28N R 6E

S22 | S23

S27 | S26

1917

from which,

A pinion, 14 ins. diam., brs. N. $14\frac{1}{4}^{\circ}$ E.
126 lks. dist.; mkd. T 28 N R 6 E S 23 B T.

A cedar, 12 ins. diam., brs. S. 43° E.
173 lks. dist.; mkd. T 28 N R 6 E S 26 B T.

A pinion, 10 ins. diam., brs. S. $31\frac{1}{2}^{\circ}$ W.
46 lks. dist.; mkd. T 28 N R 6 E S 27 B T.

A pinion, 8 ins. diam., brs. N. $70\frac{3}{4}^{\circ}$ W.
122 lks. dist.; mkd. T 28 N R 6 E S 22 B T.

Land, level.

Soil, rocky loam, 12 ins. deep, hardpan subsoil.

Timber, cedar and pinion.

Undergrowth, greasewood and brigham brush.

Short grass.

40.00 East on a random line bet. secs. 23 and 26.
Set temp. $\frac{1}{4}$ sec. cor.

80.07 Intersect N. and S. line 4 lks. S. of cor. of secs. 23,
24, 25 and 26.

Thence

S. $89^{\circ} 58'$ W. on a true line bet. secs. 23 and 26.Over gently rolling land, through scattering timber and
undergrowth. Desc. gradual SW. slope.

5.00 Wash, 10 lks. wide; course SE. Asc. NE. slope 57 ft. to

10.00 Thence over level land.

17.00 Old road brs. NW. and SE.

40.03 $\frac{1}{2}$ Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

 $\frac{1}{4}$ S 23

S 26

1917

from which,

A pinion, 12 ins. diam., brs. N. $63\frac{1}{4}^{\circ}$ W.
302 lks. dist.; mkd. $\frac{1}{4}$ S 23 B T.

A pinion, 12 ins. diam., brs. S. $73\frac{1}{8}^{\circ}$ W.
301 lks. dist.; mkd. $\frac{1}{4}$ S 26 B T.

80.07 The cor. of secs. 22, 23, 26 and 27.

Land, level and broken.

Soil, rocky loam, 1 ft. deep; subsoil, gravelly.

Timber, pinion and cedar.

Undergrowth, greasewood and brigham brush.

Short grass.

N. $0^{\circ} 1'$ W. bet. secs. 22 and 23.Over level land, through scattering timber and under-
growth.

9.00 Top of small level topped raise, brs. NW. and SE. 6 chs.
long.

13.80 Leave raise. Desc. gradual slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

Subdivision of Portion of T. 28 N. R. 6 E.

Chains

S22 S23
1917

from which,

- A pinion, 10 ins. diam., brs. S. $29\frac{1}{4}^\circ$ E.
86 lks. dist.; mkd. $\frac{1}{4}$ S 23 B T.
- A pinion, 12 ins. diam., brs. S. $76\frac{1}{4}^\circ$ W.
191 lks. dist.; mkd. $\frac{1}{4}$ S 22 B T.

43.40
47.26
48.87

Desc. gradual NW. slope, 78 ft.
Barbed wire fence brs. E. and W.
Road brs. NE. and SW.
Wash, 20 lks. wide, course NE. Rock and earth dam brs.
W. 2 chs. dist.
Asc. SE. slope 36 ft.

57.77
63.90
80.00

Willows Ranch brs. N. $81\frac{1}{2}^\circ$ E.
Willows ranch brs. S. $82^\circ 54'$ E.
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in
the ground, for cor. of secs. 14, 15, 22 and 23, mkd. on
brass cap

T28N R 6E
S15 S14
S22 S23
1917

from which,

- A pinion, 13 ins. diam., brs. N. $77\frac{1}{2}^\circ$ E.
52 lks. dist.; mkd. T 28 N R 6 E S 14 B T.
- A cedar, 24 ins. diam., brs. S. 54° E.
80 lks. dist.; mkd. T 28 N R 6 E S 23 B T.
- A pinion, 14 ins. diam., brs. S. $33\frac{1}{2}^\circ$ W.
140 lks. dist.; mkd. T 28 N R 6 E S 22 B T.
- A pinion, 10 ins. diam., brs. N. 20° W.
297 lks. dist.; mkd. T 28 N R 6 E S 15 B T.

Land, level and broken.
Soil, rocky loam, 1 ft. deep, gravelly subsoil, medium
texture.
Timber, pinion and cedar.
Undergrowth, greasewood and brigham brush.
Short grass.

40.00
79.96

East on a random line bet. secs. 14 and 23.
Set temp. $\frac{1}{4}$ sec. cor.
Intersect N. and S. line, 3 lks. N. of cor. of secs.
13, 14, 23 and 24.

Thence
N. $89^\circ 59'$ W. on a true line bet. secs. 14 and 23.
Over gently rolling land, through scattering timber
and undergrowth.

39.98

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$ S 14
S 23
1917

from which,

- A cedar, 18 ins. diam., brs. N. $0^\circ 30'$ E.
293 lks. dist.; mkd. $\frac{1}{4}$ S 14 B T.
- A pinion, 14 ins. diam., brs. S. $37\frac{1}{2}^\circ$ W.
149 lks. dist.; mkd. $\frac{1}{4}$ S 23 B T.

41.00
45.50
51.60
54.90
79.96

Old road brs. N. and S.
Barbed wire fence brs. N. and S. Desc. gradual W. slope,
13 ft. to
Wash, 40 lks. wide, course SE. Asc. NE. slope, 65 ft.
Old road brs. NW. and SE.
The cor. of secs. 14, 15, 22 and 23.

2626

Subdivision of Portion of T. 28 N. R. 6 E.

Chains

Land, gently rolling.
Soil, rocky loam, 10 ins. deep; gravelly subsoil.
Timber, pinion and cedar.
Undergrowth, greasewood and brigham brush.
Short grass.

N. 0° 1' W. bet. secs. 14 and 15.
Over gently rolling land, through scattering timber and undergrowth.

6.50 Line of fence posts, brs. E. and W.
33.13 Barbed wire fence brs. E. and W.
34.55 Old road brs. NW. and SE.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$
S15 | S14
1917

from which,

A pinion, 8 ins. diam., brs. S. 20° W.
63 lks. dist.; mkd. $\frac{1}{4}$ S 15 B T.

No other trees within limits.

And raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Desc. gradual NE. slope, 23 ft.
57.00 Wash, 15 lks. wide, course SE. Thence across draw.
Asc. 86 ft.

60.45 Dim road brs. NW. and SE.
Dim road brs. E. Asc. SW. slope.

79.00 Top of ascent. Thence over level land.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 10, 11, 14 and 15, mkd. on brass cap

T28 N R 6E
S10 | S11
S15 | S14
1917

from which,

A cedar, 24 ins. diam., brs. N. 68 $\frac{3}{4}$ ° E.
243 lks. dist.; mkd. T 28 N R 6 E S 11 B T.

A cedar, 18 ins. diam., brs. S. 16 $\frac{1}{2}$ ° E.
299 lks. dist.; mkd. T 28 N R 6 E S 14 B T.

A pinion, 4 ins. diam., brs. S. 78° W.
129 lks. dist.; mkd. T 28 N R 6 E S 15 B T.

A pinion, 12 ins. diam., brs. N. 72 $\frac{1}{4}$ ° W.
212 lks. dist.; mkd. T 28 N R 6 E S 10 B T.

Land, rolling.

Soil, rocky loam, 14 ins. deep, hard limestone subsoil.

Timber, pinion and cedar.

Undergrowth, greasewood, white sagebrush and brigham brush.

Short grass.

40.00 East on a random line bet. secs. 11 and 14.

Set temp. $\frac{1}{4}$ sec. cor.

79.91 Intersect N and S. line, 15 lks. N. of cor. of secs. 11, 12, 13 and 14.

Thence

N. 89° 53' W. on a true line bet. secs. 11 and 14.

Over gently rolling land, through scattering timber and undergrowth.

2.20 Enter wash, course from W. to SE. Thence up wash to

5.00 Leave wash, course from NW. to E.

Subdivision of Portion of T. 28 N., R. 6 E.

Chains
 18.60 Old road brs. NE. and SW.
 39.95 1/2 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, for 1/4 sec. cor., mkd. on brass cap

$$\begin{array}{r} \frac{1}{4} S 11 \\ \frac{1}{4} S 14 \\ 1917 \end{array}$$

from which,
 A cedar, 24 ins. diam., brs. N. 22 3/4° E.
 184 lks. dist.; mkd. 1/4 S 11 B T.
 A pinion, 9 in. diam., brs. S. 61° W.
 88 lks. dist.; mkd. 1/4 S 14 B T.

79.91 The cor. of secs. 10, 11, 14 and 15.
 Land, gently rolling.
 Soil, rocky loam, 14 ins. deep, gravelly subsoil, loose texture.
 Timber, pinion and cedar.
 Undergrowth, greasewood and brigham brush.
 Short grass.

N. 0° 1' W. bet. secs. 10 and 11.
 Over gently rolling land, through scattering timber and undergrowth.

30.98 Dim road brs. NW. and SE.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, in a mound of stone, for 1/4 sec. cor., mkd. on brass cap

$$\begin{array}{r} \frac{1}{4} \\ S10 | S11 \\ 1917 \end{array}$$

from which,
 A pinion, 10 ins. diam., brs. S. 46° E.
 48 lks. dist.; mkd. 1/4 S 11 B T.
 A cedar, 18 ins. diam., brs. N. 83 1/4° W.
 52 lks. dist.; mkd. 1/4 S 10 B T.

42.50 Desc. NE. slope 92 ft.
 44.44 Old road brs. NW. and SE.
 50.00 Wash, 20 lks. wide, course SE. Asc. SW. slope 89 ft. to
 58.50 Thence over level land.
 77.55 Old tree fence brs. E. and W.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in the ground, in a mound of stone, for cor. of secs. 2, 3, 10 and 11, mkd. on brass cap

$$\begin{array}{r} T28 N R 6 E \\ S 3 | S 2 \\ S10 | S11 \\ 1917 \end{array}$$

from which,
 A pinion, 10 ins. diam., brs. N. 21 1/2° E.
 42 lks. dist.; mkd. T 28 N R 6 E S 2 B T.
 A pinion, 13 ins. diam., brs. S. 84° E.
 133 lks. dist.; mkd. T 28 N R 6 E S 11 B T.
 A cedar, 10 ins. diam., brs. S. 68° W.
 260 lks. dist.; mkd. T 28 N R 6 E S 10 B T.
 A pinion, 12 ins. diam., brs. N. 49 1/4° W.
 800 lks. dist.; mkd. T 28 N R 6 E S 3 B T.

Land, rolling and broken.
 Soil, rocky loam, 1 ft. deep, hard limestone subsoil.
 Timber, cedar and pinion.
 Undergrowth, white sagebrush in bottoms, brigham brush.
 Short grass.

2828

Subdivision of Portion of T. 28 N. R. 6 E.

Chains

East on a random line bet. secs. 2 and 11.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.71 Intersect N. and S. line, 5 lks. S. of cor. of secs.
 1, 2, 11 and 12.
 Thence
 S. $89^{\circ} 58'$ W. on a true line bet. secs. 2 and 11.
 Over rolling land, through scattering timber and under-
 growth.
 Asc. gradual slope, 126 ft.
 39.85 $\frac{1}{2}$ Set an iron post, $\frac{3}{4}$ ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$$\frac{1}{4} \begin{array}{c} S \ 2 \\ S \ 11 \\ 1917 \end{array}$$

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 N. of cor.

Asc. 47 ft. to
 48.50 Rocky point slopes NE. Thence over rolling ascent, 62 ft.
 79.71 The cor. of secs. 2, 3, 10 and 11.
 Land, rolling; E. $\frac{1}{4}$ mile nearly level.
 Soil, rocky loam, 10 ins. deep, hard limestone subsoil.
 Timber, scattering cedar and pinion.
 Undergrowth, greasewood and brigham brush.
 Short grass.

N. $0^{\circ} 1'$ W. on a true line bet. secs. 2 and 3.
 Over gently rolling land, through scattering timber and
 undergrowth.
 Desc. gradual NE. slope 109 ft. to
 26.05 Wash, 30 lks. wide, course SE. Asc. SW. slope, 96 ft. to
 40.00 Set an iron post, $\frac{3}{4}$ ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$$S \ 3 \begin{array}{c} \frac{1}{4} \\ S \ 2 \\ 1917 \end{array}$$

from which,

A cedar, 16 ins. diam., brs. S. $59\frac{3}{4}^{\circ}$ E.
 78 lks. dist.; mkd. $\frac{1}{4}$ S 2 B T.

A pinion, 18 ins. diam., brs. S. $59\frac{3}{4}^{\circ}$ W.
 57 lks. dist.; mkd. $\frac{1}{4}$ S 3 B T.

Desc. along NE. slope 21 ft. to
 72.40 Shallow wash, 20 lks. wide, course SE. Asc. SE. slope,
 23 ft. to
 82.17 Intersect 7th standard parallel N., 12.53 chs. S. $89^{\circ} 52'$
 W. of the reestablished standard cor. of secs. 34 and
 35, described in Book D. U.

At the point of intersection
 Set an iron post, $\frac{3}{4}$ ft. long, 2 ins. diam., 26 ins. in the
 ground, for closing cor. of secs. 2 and 3, mkd. on
 brass cap

$$\begin{array}{c} C \ C \\ S \ 3 \ S \ 2 \\ T \ 28 \ N \ R \ 6 \ E \\ 1917 \end{array}$$

from which,

A pinion, 14 ins. diam., brs. S. $31\frac{1}{2}^{\circ}$ E.
 198 lks. dist.; mkd. T 28 N R 6 E S 2 C C B T.

A pinion, 14 ins. diam., brs. S. 36° W.
 103 lks. dist.; mkd. T 28 N R 6 E S 3 C C B T.

Land, rolling.
 Soil, rocky loam.
 Timber, pinion and cedar.

Subdivision of Portion of T. 28 N. R. 6 E. 2029

Chains

Undergrowth, greasewood and brigham brush, buck brush. Short grass.


From the cor. of secs. 3, 4, 33 & 34 on s. . bdy. of Tp., described in Book "A," N. 0° 2' W. bet. secs. 33 and 34.

35.00
40.00

Over rolling land, through scattering timber and undergrowth.

Road brs. NE. and SW.

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap



53.00
58.44

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.


Asc. SE. slope to

Enter mesa brs. NE. and SW. Enter dense timber, brs. N. and S.

80.00

Thence along E. rim of mesa.

Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 27, 28, 33 and 34, mkd. on brass cap



from which,

A pinion, 8 ins. diam., brs. N. 15° E. 105 lks. dist.; mkd. T 28 N R 6 E S 27 B T.

A pinion, 6 ins. diam., brs. S. 30 $\frac{1}{2}$ ° E. 50 lks. dist.; mkd. T 28 N R 6 E S 34 B T.

A pinion, 10 ins. diam., brs. S. 49 $\frac{3}{4}$ ° W. 98 lks. dist.; mkd. T 28 N R 6 E S 33 B T.

A cedar, 8 ins. diam., brs. N. 58° W. 132 lks. dist.; mkd. T 28 N R 6 E S 28 B T.

Land, rolling.

Soil, thin and rocky,

Timber, cedar and pinion.

Undergrowth, greasewood and brigham brush.

Short grass.

40.00
80.10

East on a random line bet. secs. 27 and 34.

Set temp. $\frac{1}{4}$ sec. cor.,

Intersect N. and S. line, 10 lks. N. of cor. of secs. 26, 27, 34 and 35.


Thence

N. 89° 56' W. on a true line bet. secs. 27 and 34.

Over rolling land, through scattering timber and undergrowth.

40.05

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., mkd. on brass cap



from which,

A pinion, 12 ins. diam., brs. N. 50° W. 216 lks. dist.; mkd. $\frac{1}{4}$ S 27 B T.

30

Subdivision of Portion of T. 28 N., R. 6 E.

Chains

- A pinion, 14 ins. diam., brs. S. $10\frac{1}{2}^{\circ}$ W.
199 lks. dist.; mkd. $\frac{1}{4}$ S 34 B T.
- 57.00 Leave scattering timber brs. N. and S.
73.60 Road brs. NE. and SW. Thence across wide open swale brs.
N. and S. ~~asc. E. slope~~
- 75.00 Asc. E. slope, 55 ft. to
79.35 Enter timber brs. N. and S. Edge of mesa brs. N. and S.
80.10 The cor. of secs. 27, 28, 33 and 34.
- Land, gently rolling.
Soil, thin rocky.
Timber, scattering cedar and pinion.
Undergrowth, greasewood and brigham brush.
Fair grass.
-
- West on a random line bet. secs. 28 and 33.
40.00 Set temp. $\frac{1}{4}$ sec. cor.
79.52 Intersect N. and S. line, 13 lks. N. of reestab. cor. of secs.
28 and 33, hereinbefore described.
Thence
N. 89° 54' E. on a true line bet. secs. 28 and 33.
Over gently rolling land, through scattering undergrowth,
through opening.
- 5.90 Leave opening and enter timber.
23.00 Desc. 54 ft. to
31.40 Bottom of draw, course S. Asc. 57 ft. to
39.76 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the
ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$$\frac{1}{4} \text{ S } 28$$

$$\frac{1}{4} \text{ S } 33$$

1917

from which,

- A pinion, 14 ins. diam., brs. N. $48\frac{1}{2}^{\circ}$ W.
163 lks. dist.; mkd. $\frac{1}{4}$ S 28 B T.
A pinion, 18 ins. diam., brs. S. $44\frac{3}{4}^{\circ}$ W.
200 lks. dist.; mkd. $\frac{1}{4}$ S 33 B T.
- Asc. gradual slope.
60.00 Leave timber brs. N. and S.
67.00 Enter timber brs. N. and S.
79.52 The cor. of secs. 27, 28, 33 and 34.
Land, gently rolling.
Soil, thin and rocky.
Timber, cedar and pinion.
Undergrowth, brigham brush and greasewood.
Fair grass.

- N. 0° 2' W. bet. secs. 27 and 28.
Over gently rolling land, through dense timber and scatter-
ing undergrowth.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the
ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., mkd. on
brass cap

$$\frac{1}{4}$$

$$\text{S}28 \text{ | } \text{S}27$$

1917


from which,

- A pinion, 12 ins. diam., brs. N. 84° E.
59 lks. dist.; mkd. $\frac{1}{4}$ S 27 B T.
A pinion, 12 ins. diam., brs. S. $80\frac{3}{4}^{\circ}$ E.
22 lks. dist.; mkd. $\frac{1}{4}$ S 28 B T.

Subdivision of Portion of T. 28 N., R. 6 E.

Chains
80.00

Set an iron post, 3 ft. long, 2 ins. diam., on ledge of rock, in a mound of stone, for cor. of secs. 21, 22, 27 and 28, mkd. on brass cap



- from which,
- A pinion, 8 ins. diam., brs. N. 23 $\frac{1}{2}$ ° E.
20 lks. dist.; mkd. T 28 N R 6 E S 22 B T.
 - A pinion, 12 ins. diam., brs. S. 81 $\frac{3}{4}$ ° E.
28 lks. dist.; mkd. T 28 N R 6 E S 27 B T.
 - A pinion, 10 ins. diam., brs. S. 62 $\frac{1}{4}$ ° W.
61 lks. dist.; mkd. T 28 N R 6 E S 28 B T.
 - A pinion, 14 ins. diam., brs. N. 29 $\frac{1}{2}$ ° W.
93 lks. dist.; mkd. T 28 N R 6 E S 21 B T.

Land, gently rolling.
Soil, thin, rocky.
Timber, cedar and pinion.
Undergrowth, greasewood and brigham brush.
Fair grass.


40.00
80.06

East on a random line bet. secs. 22 and 27.
Set temp. $\frac{1}{4}$ sec. cor.
Intersect N. and S. line, 5 lks. N. of cor. of secs. 22, 23, 26 and 27.

Thence
N. 89° 58' W. on a true line bet. secs. 22 and 27.
Over gently rolling land, through scattering undergrowth and dense timber.

40.03

Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap



- from which,
- A pinion, 10 ins. diam., brs. N. 72 $\frac{1}{4}$ ° E.
37 lks. dist.; mkd. $\frac{1}{4}$ S 22 B T.
 - A pinion, 12 ins. diam., brs. S. 8° W.
25 lks. dist.; mkd. $\frac{1}{4}$ S 27 B T.

60.00
65.00
70.00
71.50
75.00
80.06

Desc. 40 ft. to
Asc. 29 ft. to
Thence across swale.
Road brs. N. and S. in bottom of swale.
Asc. 50 ft.
The cor. of secs. 21, 22, 27 and 28.
Land, gently rolling.
Soil, thin and rocky.
Timber, cedar and pinion.
Undergrowth, brigham brush and greasewood.
Fair grass.

40.00
79.74

West on a random line bet. secs. 21 and 28.
Set temp. $\frac{1}{2}$ sec. cor.
Intersect N. and S. line, 10 lks. N. of reestablished cor. of secs. 21 & 28, hereinbefore described.

Thence
N. 89° 56' E. on a true line bet. secs. 21 and 28.
Over nearly level land.

5.00
32.00

Wide swale drains SE.
Across small opening.

A 32 52

Subdivision of Portion of T. 28 N., R. 6 E.

Chains
39.87Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap
$$\begin{array}{r} \frac{1}{4} S 21 \\ \frac{1}{4} S 28 \\ 1917 \end{array}$$

from which,

A pinion, 14 ins. diam., brs. N. $25\frac{1}{2}^{\circ}$ E.
11 lks. dist.; mkd. $\frac{1}{4}$ S 21 B T.A pinion, 16 ins. diam., brs. S. $34\frac{3}{4}^{\circ}$ W.
61 lks. dist.; mkd. $\frac{1}{4}$ S 28 B T.

Thence over nearly level land.

79.74

The cor. of secs. 21, 22, 27 and 28.

Land, rolling and level.

Soil, thin and gravelly.

Timber, dense cedar and pinion.

Undergrowth, greasewood and brigham brush.

Fair grass.

N. $0^{\circ} 2' W.$ bet. secs. 21 and 22.

Over gently rolling land, through dense timber and undergrowth.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap
$$\begin{array}{r} \frac{1}{4} \\ S 21 | S 22 \\ 1917 \end{array}$$

from which,

A pinion, 12 ins. diam., brs. N. $27\frac{3}{4}^{\circ}$ E.
34 lks. dist.; mkd. $\frac{1}{4}$ S 22 B T.A pinion, 10 ins. diam., brs. S. $76\frac{1}{2}^{\circ}$ W.
34 lks. dist.; mkd. $\frac{1}{4}$ S 21 B T.

52.00

Bottom of shallow draw, course SE.

61.00

Leave timber.

76.00

Enter timber.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 15, 16, 21 and 22, mkd. on brass cap

$$\begin{array}{r} T 28 N R 6 E \\ S 16 | S 15 \\ S 21 | S 22 \\ 1917 \end{array}$$

from which,

A pinion, 14 ins. diam., brs. N. $30\frac{1}{2}^{\circ}$ E.
228 lks. dist.; mkd. T 28 N R 6 E S 15 B T.A pinion, 16 ins. diam., brs. S. $32\frac{1}{2}^{\circ}$ E.
151 lks. dist.; mkd. T 28 N R 6 E S 22 B T.A pinion, 14 ins. diam., brs. S. 13° W.
246 lks. dist.; mkd. T 28 N R 6 E S 21 B T.A pinion, 16 ins. diam., brs. N. $27\frac{1}{2}^{\circ}$ W.
288 lks. dist.; mkd. T 28 N R 6 E S 16 B T.

Land, gently rolling and level.

Soil, thin and gravelly.

Timber, dense cedar and pinion.

Undergrowth, brigham brush and greasewood.

Fair grass.

40.00

East on a random line bet. secs. 15 and 22.

80.24

Set temp. $\frac{1}{4}$ sec. cor.

Intersect N. and S. line, 7 lks. N. of cor. of secs.

Subdivision of Portion of T. 28 N. R. 6 E.

Chains 14, 15, 22 and 23.
 Thence N. 89° 57' W. on a true line bet. secs. 15 and 22.
 Over gently rolling land, through dense timber and undergrowth.
 25.75 Wire fence, brs. SW. and NE.
 34.20 Center of large draw, course S.
 40.12 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$ S 15
 $\frac{1}{4}$ S 22
 1917

from which,
 A pinion, 18 ins. diam., brs. N. 29 $\frac{1}{4}$ ° W.
 136 lks. dist.; mkd. $\frac{1}{4}$ S 15 B T.
 A pinion, 12 ins. diam., brs. S. 32 $\frac{3}{4}$ ° W.
 44 lks. dist.; mkd. $\frac{1}{4}$ S 22 B T.
 80.24 The cor. of secs. 15, 16, 21 and 22.
 Land, nearly level.
 Soil, thin and gravelly.
 Timber, cedar and pinion.
 Undergrowth, greasewood and brigham brush.
 Fair grass.

40.00 West on a random line bet. secs. 16 and 21.
 79.96 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect the reestablished corner of secs. 16 and 21.
 Thence East on a true line bet. secs. 16 and 21.
 Over gently rolling land, through dense timber and undergrowth.
 .50 Old trail brs. NW. and SE.
 39.98 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$ S 16
 $\frac{1}{4}$ S 21
 1917

from which,
 A pinion, 14 ins. diam., brs. N. 11 $\frac{1}{2}$ ° E.
 63 lks. dist.; mkd. $\frac{1}{4}$ S 16 B T.
 A cedar, 10 ins. diam., brs. S. 22° E.
 66 lks. dist.; mkd. $\frac{1}{4}$ S 21 B T.
 65.50 Center of shallow draw, course SE.
 79.96 The cor. of secs. 15, 16, 21 and 22.
 Land, nearly level.
 Soil, gravelly.
 Timber, dense cedar and pinion.
 Undergrowth, greasewood and brigham brush.
 Fair grass.

40.00 N. 0° 2' W. bet. secs. 15 and 16.
 Over level land, through dense cedar and pinion and dense undergrowth.
 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$
 S16 | S15
 1917

Subdivision of Portion of T. 28 N., R. 6 E.

Chains

80.00 from which,
 A pinion, 12 ins. diam., brs. S. $85\frac{3}{4}^{\circ}$ E.
 125 lks. dist.; mkd. $\frac{1}{4}$ S 15 B T.
 A pinion, 12 ins. diam., brs. S. 88° W.
 146 lks. dist.; mkd. $\frac{1}{4}$ S 16 B T.
 Set an iron post, 3 ft. long, 2 ins. diam., on rock ledge
 in a mound of stone, for cor. of secs. 9, 10, 15 and
 16, mkd. on brass cap.

T28N R 6E
 S9 | S10
 S16 | S15
 1917

from which,
 A pinion, 10 ins. diam., brs. N. 60° E,
 48 lks. dist.; mkd. T 28 NR 6 ES 10 B T.
 A pinion, 10 ins. diam., brs. S. $28\frac{3}{4}^{\circ}$ E.
 21 lks. dist.; mkd. T 28 NR 6 ES 15 B T.
 A pinion, 10 ins. diam., brs. S. 59° W.
 59 lks. dist.; mkd. T 28 NR 6 ES 16 B T.
 A pinion, 12 ins. diam., brs. N. 55° W.
 31 lks. dist.; mkd. T 28 NR 6 ES 9 B T.
 Land, nearly level.
 Soil, gravelly.
 Timber, cedar and pinion.
 Undergrowth, brigham brush and greasewood.
 Fair grass.

40.00 East on a random line bet. secs. 10 and 15.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.06 Intersect 1. and 2. line at the cor. of secs. 10, 11, 14
 and 15.
 Thence
 West on a true line bet. secs. 10 and 15.
 Over rolling land, through scattering timber and under-
 growth.
 5.90 Desc. SW. slope, 64 ft. to
 Wash, 50 lks. wide, course S.
 15.00 Desc. 96 ft. to
 23.92 Road brs. NW. and SE.
 26.92 Center of large draw, course SE.
 40.03 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$ S 10
 $\frac{1}{4}$ S 15
 1917

45.00 from which,
 A cedar, 10 ins. diam., brs. N. 64° W.
 87 lks. dist.; mkd. $\frac{1}{4}$ S 10 B T.
 A pinion, 18 ins. diam., brs. S. 37° W.
 240 lks. dist.; mkd. $\frac{1}{4}$ S 15 B T.
 Asc. gradual NE. slope, 73 ft.
 Enter dense cedar and pinion.
 80.06 The cor. of secs. 9, 10, 15 and 16.
 Land, rolling and broken.
 Soil, thin and rocky.
 Timber, dense cedar and pinion.
 Undergrowth, greasewood and brigham brush.
 Fair grass.

40.00 West on a random line bet. secs. 9 and 16.
 Set temp. $\frac{1}{4}$ sec. cor.

Subdivision of Portion of T. 28 N., R. 6 E.

Chains
80.28 Intersect N. and S. line, 19 lks. S. of reestab. cor. of secs. 9 and 16, hereinbefore described.

Thence
S. 89° 52' E. on a true line bet. secs. 9 and 16.
Over gently rolling land, through dense timber and undergrowth.

38.25 Bottom of draw, course SE.
40.14 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, for 1/4 sec. cor., mkd. on brass cap

1/4 S 9
S 16
1917

from which,
A pinion, 10 ins. diam., brs. N. 52 1/4° E.
18 lks. dist.; mkd. 1/4 S 9 B T.
A cedar, 10 ins. diam., brs. S. 40° E.
30 lks. dist.; mkd. 1/4 S 16 B T.

80.28 The cor. of secs. 9, 10, 15 and 16.
Land, gently rolling.
Soil, stony and gravelly.
Timber, dense cedar and pinion.
Undergrowth greasewood and brigham brush.
Fair grass.

N. 0° 2' W. bet. secs. 9 and 10.
Over rolling broken land, through dense timber and undergrowth.

Asc. gradual slope, 24 ft.
11.50 Wash, 20 lks. wide, course SE. Desc. 71 ft. to
31.11 Bottom of large draw, course SE.
32.66 Road brs. NW. and SE.
34.86 Asc. S. slope, 83 ft.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, for 1/4 sec. cor.; mkd. on brass cap

1
S 9 | S 10
1917

from which,
A pinion, 12 ins. diam., brs. S. 53 3/4° E.
50 lks. dist.; mkd. 1/4 S 10 B T.
A cedar, 18 ins. diam., brs. S. 50 1/4° W.
52 lks. dist.; mkd. 1/4 S 9 B T.

45.00 Top of slope. Thence along E. slope.
60.00 Leave timber brs NW. and SE. Desc. 23 ft.
77.45 Road brs. NE. and SW.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 3, 4, 9 and 10, mkd. on brass cap

T28N R 6E
S 4 | S 3
S 9 | S 10
1917

from which,
A pinion, 20 ins. diam., brs. S. 41 1/4° E.
502 lks. dist.; mkd. T 28 N R 6 E S 10 B T.

No other trees within limits.
Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.
Land, rolling.
Soil, thin and rocky.
Timber; dense cedar and pinion.
Undergrowth, brigham brush and greasewood.
Fair grass.

36.5

Subdivision of Portion of T. 28 N. R. 6 E.

Chains

East on a random line bet. secs. 3 and 10.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.00 Intersect N. and S. line, 3 lks. N. of cor. of secs. 2, 3, 10 and 11.
 Thence
 N. $89^{\circ} 59'$ W. on a true line bet. secs. 3 and 10
 Over rolling broken land, through scattering undergrowth, and timber.
 26.30 Stone house and tank brs. S. $34\frac{1}{2}^{\circ}$ E.
 27.00 East rim of canyon brs. SE. and NW. Desc. 55 ft. to
 30.88 Bottom of canyon course SE. Asc. 70 ft. to
 37.80 West rim of canyon brs. SE. and NW.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$ S $\frac{3}{10}$
 1917

from which,

A cedar, 14 ins. diam., brs. N. $0^{\circ} 30'$ E.
 151 lks. dist.; mkd. $\frac{1}{4}$ S 3 B T.
 A cedar, 20 ins. diam., brs. S. $79\frac{3}{4}^{\circ}$ E.
 92 lks. dist.; mkd. $\frac{1}{4}$ S 10 B T.

Thence through dead timber.

Desc. 40 ft. to
 59.96 South end of small basin. Asc. 34 ft.
 80.00 The cor. of secs. 3, 4, 9 and 10.
 Land, rolling and broken.
 Soil, thin and rocky.
 Timber, cedar and pinion.
 Undergrowth, scattering greasewood and brigham brush.
 Fair grass.

West on a random line bet. secs. 4 and 9.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.38 Intersect N. and S. line, 5 lks. N. of reestab. cor. of secs. 4 and 9, hereinbefore described.
 Thence
 N. $89^{\circ} 58'$ E. on a true line bet. secs. 4 and 9.
 Over rolling broken land, through dense timber and undergrowth.
 .87 West rim of canyon brs. N. and S. Desc. 150 ft.
 10.60 Over bottom of canyon course SE.
 11.60 Center of bottom.
 11.80 Road brs. NW and SE.
 20.60 Asc. SW. slope of canyon, 125 ft.
 29.40 Top of ascent. Over rolling land, across mesa.
 40.19 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$ S $\frac{4}{9}$
 1917

from which,

A pinion, 10 ins. diam., brs. N. $37\frac{1}{2}^{\circ}$ W.
 44 lks. dist.; mkd. $\frac{1}{4}$ S 4 B T.
 A cedar, 26 ins. diam., brs. S. $12\frac{1}{4}^{\circ}$ W
 72 lks. dist.; mkd. $\frac{1}{4}$ S 9 B T.

69.00 Leave mesa. Desc. SE. slope, 92 ft.
 80.38 The cor. of secs. 3, 4, 9 and 10.
 Land, rolling and broken
 Soil, thin, rocky.
 Timber, cedar and pinion.
 Undergrowth, brigham brush and greasewood.
 Fair grass.

Survey of Subdivision of portion of Township 28 N., R. 6 E.

Chains,
 N.0°2'W., on a true line, bet. secs. 3 and 4.
 Over rolling and broken land, thru scattering undergrowth.
 8.00 Enter scattering cedar and pinon.
 15.00 Along W. side of small basin.
 23.00 Mouth of small draw, course SE. Ascend 36 ft. to
 38.40 Descend 21 ft. to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

S 4 $\frac{1}{4}$ S 3

1917

from which,

A cedar, 16 ins. in diam., brs. S. 60° E., 102 lks.
 dist., marked $\frac{1}{4}$ S 3 B T.

A pinon, 12 ins. in diam., brs. S. 42 $\frac{3}{4}$ ° W., 49 lks.
 dist., marked $\frac{1}{4}$ S 4 B T.

42.00 Mouth of small draw, course SE.
 48.50 Ascend 36 ft. to
 50.00 Thru. dead, standing and fallen timber.
 69.95 Enter dense cedar and pinon, brs. E. and W.
 81.79 Intersect 7th. Standard Parallel N., 12.47 chs. S. 89° 59' W.,
 of reestablished standard cor. of secs. 33 and 34, de-
 scribed in Book "D."
 At the point of intersection,
 Set an iron post, 3 ft. long, 2 ins. in diam., on ledge of
 rock, in a mound of stone, for closing cor. of secs. 3
 and 4, marked on brass cap,

C C
 S 4 S 3
 T 28 N R 6 E
 1917

from which,

A pinon, 14 ins. in diam., brs. S. 17 $\frac{1}{2}$ ° E., 62 lks.
 dist., marked T 28 N R 6 E S 3 C C B T.

A cedar, 12 ins. in diam., brs. S. 18 $\frac{1}{2}$ ° W., 26 lks.
 dist., marked T 28 N R 6 E S 4 C C B T.

Land, rolling and broken.
 Soil, rocky and gravelly.
 Timber, cedar and pinon.
 Undergrowth, brigham brush and greasewood.
 Fair grass.

GENERAL DESCRIPTION.

The portion of T. 28 N., R. 6 E., subdivided as described in the foregoing notes, completes the subdivision of the Tp., the other portion having been previously surveyed in 1900. The surface is level, rolling and broken, with a scattering growth of pinon and cedar timber, and a scattering growth of greasewood and brigham brush. A fair growth of grass is prevalent over the greater part of the township, and would afford good grazing at certain periods. The soil is sandy, gravelly and rocky, 10 or 12 ins. deep, 2nd, 3rd and 4th rate. Willows Ranch in sec. 23 has house and fences, and a settler in sec. 10 has house, storage water, tank and fence. No other settlers or improvements were observed, and no evidence of valuable mineral deposits. No permanent water exists. Several roads traverse the township.

BOOK 3277

4-680

For FIELD ASSISTANTS to

Thomas B. Matthews, U. S. Surveyor,

and

~~NAMES.~~ Elmer F. Strickler, U.S. Surveyor, ~~CAPACITY.~~

See Book "A" of this Group.

40
BOOK 3271

Thomas B. Matthews
For CERTIFICATE OF UNITED STATES SURVEYOR, and

Elmer F. Strickler, U.S. Transitman.
See Book "A" of this group.

~~I, _____, U.S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General for _____ bearing date of the _____ day of _____, 191____, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of _____ of the _____ Meridian, in the State of _____, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General for _____ and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.~~

~~U. S. Surveyor~~

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix, Arizona, February 8, 1919

The foregoing field notes of the ~~survey of~~ Resurvey of part of the subdivision lines, and Survey of East boundary, and Part of Subdivision lines of
TOWNSHIP 28 NORTH, RANGE 6 EAST,
of the Gila and Salt River Base and Meridian, in the State of Arizona,

executed by Thomas B. Matthews, U.S.S. and Elmer F. Strickler, U.S.T.,
 under ~~his~~ special instructions dated Jan. 5, 1916, for Group 67, Arizona, 1916, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the ~~surveys~~ resurveys and surveys they describe, are hereby approved.


 U. S. Surveyor General.

~~I certify that the foregoing transcript of the field notes of the above described surveys in _____, has been correctly copied from the original notes on file in this office.~~

~~U. S. Surveyor General~~