

3280

Book "A".

4-679

BOOK 3280

FIELD NOTES

of the Retracement of

Part of the East Bdy. of T. 75, R. 24 E. and Part of South Bdy. of T. 6 S, R. 25 E.

Resurvey of

First Standard Parallel South Through Range 24 East,

and through part of Range 23 East to Range 25 East,

South, East and West Boundaries of Township 6 South, Range 24 East,

Subdivision Lines of Township 6 South, Range 24 East, and

SURVEY OF

MEANDERS of the Right and Left banks

of the Gila River, Range 6 S., R. 24 E.,

Of the Gila and Salt River Base and Meridian,

In the State of Arizona.

EXECUTED BY

A. B. Rich,

in the capacity of U. S. Surveyor, under Special Instructions dated November 17, 1915,

by the United States Surveyor General to govern surveys included in Group

65, which were approved by the Commissioner of the General Land

December 2, 1915, and Assignment Instructions dated February 1, 1916.

Retracement

Resurvey and Survey commenced February 14, 1916.


Retracement Resurvey and Survey completed March 17, 1916.

Book "A".

Group 65 --- Arizona.

BOOK 3280

INDEX DIAGRAM.

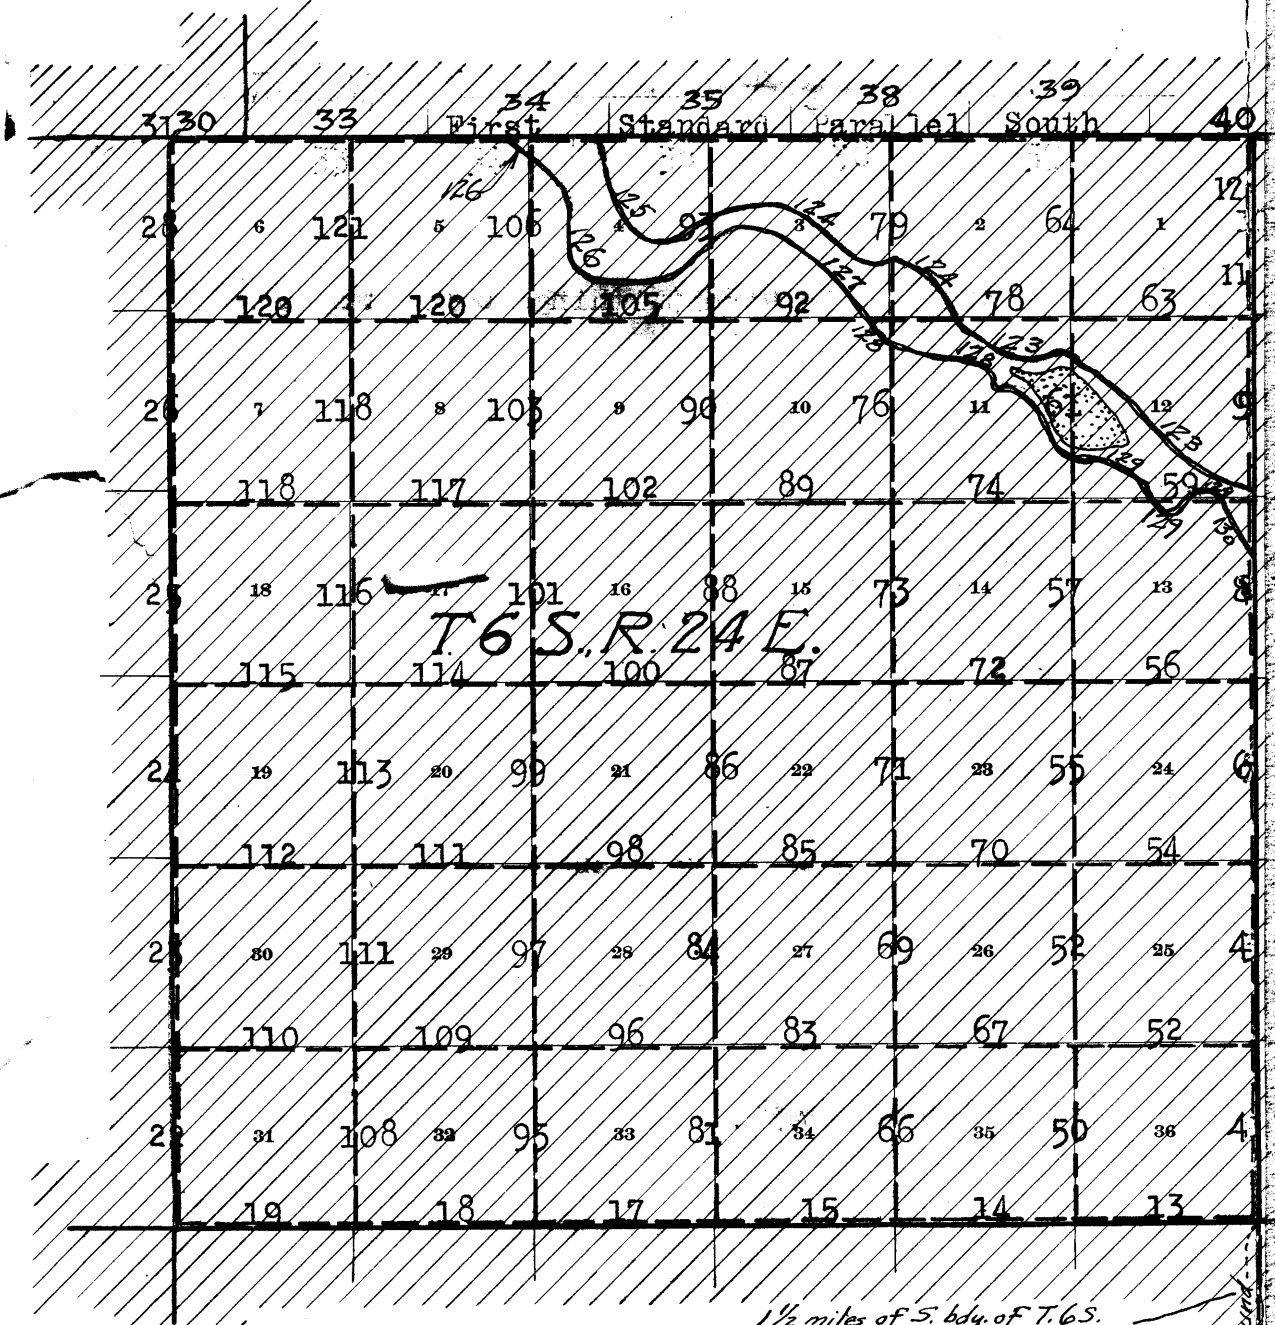

- Lines surveyed under this group.
- Lines resurveyed, under this groups
- Lines of accepted surveys.

Areas surveyed as per accepted plats on file.

1 1/2 miles of S. bdy. of T. 6 S.
R. 25 E. Retraced. No cars found
page 3

1 mile Retraced. No cars found

Chains.

Resurveys and surveys hereinafter described, were executed by A. B. Rich, U.S. Surveyor, on dates shown on diagram on page 132 hereof, using Buff and Buff transit No. 10126, with solar attachment. The horizontal limb is provided with two double verniers placed opposite to each other, reading to single minutes of arc, which is also the least count of the verniers of the latitude and declination arcs.

The instrument was examined and approved, subject to satisfactory field tests, by Assistant Supervisor of Surveys, A. C. Horton, Jr., at Phoenix, Arizona.

Examine the adjustments of the transit, find them correct; then to test the solar apparatus, by comparing its indications resulting from solar observations made during a.m. and p.m. hours, with a meridian determined by observations on Polaris, proceed as follows;

At camp in the SE. $\frac{1}{4}$ of sec. 13, T. 6 S., R. 24 E., in latitude $32^{\circ}54' N.$; long. $109^{\circ}49'5'' W.$, I set off $32^{\circ}54\frac{1}{2}' N.$ on the latitude arc; $13^{\circ}32' S.$ on the decl. arc, and at 3 p.m. apparent time, determine with the solar a meridian, and mark a point thereof, on a stake firmly set in the ground, 5 chs. N. of the transit.

At 9h. 54m. p.m., l.m.t., observe Polaris at western elongation, in accordance with the Manual of Instructions, and mark a point in the line thus determined, on a peg driven in the ground 5 chs. N. of instrument. This mark
February 13, 1916.

February 14, 1916. At 8h. a.m., lay off the azimuth of Polaris $1^{\circ}21'$ to the east, and mark the meridian thus determined on the stake set last evening, which coincides with the mark determined with the solar.

At 9 a.m., l.m.t., set off $32^{\circ}54\frac{1}{2}' N.$ on the lat. arc; $13^{\circ}17' S.$ on the decl. arc; and mark a point in the meridian with the solar on the stake already set 5 chs. N. of instrument; this mark falls 0.5 ins. west of the meridian established by the Polaris observation.

The solar apparatus by p.m. and a.m. observations defines positions for meridians, respectively coinciding with and 0'16" west of the meridian established by the Polaris observations; therefore, conclude that the adjustments of the instrument are satisfactory.

Keep the instrument in adjustment during the field season of 1916 by frequent comparison with the meridian established by Polaris observations, and correction of the adjustments when necessary.

The magnetic bearing of the true meridian, at 8 a.m. is N. $14^{\circ}30' W.$; the angle thus determined gives the magnetic decl. $14^{\circ}30' E.$

All measurements were made with an 8 chain steel tape, which was tested with a standard 1 chain tape, used only for this purpose.

Clinometers were used for determining slope angles; all distances are reduced to true horizontal distances, which alone appear in these field notes.

RETRACEMENT OF EAST BOUNDARY OF TOWNSHIP 6 S., R. 24 E.

From the original closing cor. of Ts. 6 S., Rs. 24 and 25 E. on 1st Standard Parallel South, hereinafter described,

39.35 South, on random line, bet. secs. 1 and 6 (N. $\frac{1}{2}$).

Fall 26 lks. E. of original $\frac{1}{4}$ sec. cor. hereinafter described.

True course and dist. of line back to township closing cor. is therefore N. $0^{\circ}23' E.$, 39,35 chs.

From $\frac{1}{4}$ sec. cor.,

40.00 South on random line, bet. secs. 1 and 6 (S. $\frac{1}{2}$).

Unable, after diligent search, to find any trace of

2 Retracement of East bdy. of Township 6 South, Range 24 East.

Chains.	original cor. of secs. 1, 6, 7 and 12. Set temp. cor. of said secs.
79.76	From temp. sec. cor. South, on random line, bet. secs. 7 and 12 (N. $\frac{1}{2}$). Continuing measurement from original $\frac{1}{4}$ sec. cor. of secs. 1 and 6. Fall 35 lks. E. of original $\frac{1}{4}$ sec. cor., hereinafter described. True course and dist. of line back to $\frac{1}{4}$ sec. cor. of secs. 1 and 6 is therefore N. $0^{\circ}15'$ E., 79.76 chs. giving for N. $\frac{1}{2}$ bet. secs. 7 and 12; and S. $\frac{1}{2}$ bet. secs. 1 and 6, a true course of N. $0^{\circ}15'$ E., 39.88 chs. for each.
40.00	From original $\frac{1}{4}$ sec. cor., South, on random line, bet. secs. 7 and 12 (S. $\frac{1}{2}$). Unable after diligent search, to find any trace or original cor. of secs. 7, 12, 13 and 18. Set temp. cor. of said secs.
80.00	From temp. sec. cor., South, on random line, bet. secs. 13 and 18. Continuing measurement from $\frac{1}{4}$ sec. cor. of secs. 7 and 12. Unable, after diligent search, to find any trace of original $\frac{1}{4}$ sec. cor. Set temp. $\frac{1}{4}$ sec. cor. Continue line and measurement.
119.25	Fall 24 lks. E. of recognized point of former location of original cor. of secs. 13, 18, 19 and 24, hereinafter described. True course and dist. of line back to original $\frac{1}{4}$ sec. cor. of secs. 7 and 12 is therefore N. $0^{\circ}7'$ E., 119.25 chs., giving for line bet. secs. 13 and 18, a true course and dist. of N. $0^{\circ}7'$ E., 79.50 chs., and for S. $\frac{1}{2}$ bet. secs. 7 and 12, a true course and dist. of N. $0^{\circ}7'$ E., 39.75 chs.
40.00	From recognized point for cor. of secs. 13, 18, 19 and 24, South, on random line, bet. secs. 19 and 24. No trace of original $\frac{1}{4}$ sec. cor. can be found.
80.00	No trace of original cor. of secs. 19, 24, 25 and 30 can be found.
120.00	Continue line and measurement, bet. secs. 25 and 30. No trace of original $\frac{1}{4}$ sec. cor. can be found.
160.00	No trace of original cor. of secs. 25, 30, 31 and 36 can be found.
200.00	Continue line and measurement, bet. secs. 31 and 36. No trace of original $\frac{1}{4}$ sec. cor. can be found.
240.00	No trace of original cor. of Ts. 6 and 7 S., Rs. 24 and 25 E. can be found; therefore, continue line and measurement.
RETRACING PART OF EAST BDY. OF TOWNSHIP 7 SOUTH, RANGE 24 E.	
280.00	Between secs. 1 and 6. No trace of original $\frac{1}{4}$ sec. cor. can be found.
320.00	No trace of original cor. of secs. 1, 6, 7 and 12 can be found.
360.00	Continue line and measurement bet. secs. 7 and 12. No trace of original $\frac{1}{4}$ sec. cor. can be found.
400.00	No trace of original cor. of secs. 7, 12, 13 and 18, can be found.
440.00	Continue line and measurement bet. secs. 13 and 18. No trace of original $\frac{1}{4}$ sec. cor. can be found.
480.00	No trace of original cor. of secs. 13, 18, 19 and 24 can be found.
520.00	Continue line and measurement bet. secs. 19 and 24. No trace of original $\frac{1}{4}$ sec. cor. can be found.

Retracement of part of East bdy. of Township 7 South Range 24 East 3

Chains.
557.90 Fall 131 lks. E. of original cor. of secs. 19, 24, 25 and 30, a granite stone, 17x12x8 ins. above ground, firmly set, marked with 4 notches on N. and 2 notches on S. edge, and witnessed by mound of stone N. of cor. No bearing trees.
True course and dist. of line back to cor. of secs. 13, 18, 19 and 24, Ts. 6 S., Rs. 24 and 25 E. is therefore N. 0° 8' E., 557.90 chs., which proportioned to the original distance gives a length of 79.70 chs. for each mile on the line.
From above described sec. cor., N. 0° 8' E., on trial N. and S. range line, E. of T. 7 S., R. 24 E. (Proportional dist.) Set temp. cor. of Ts. 6 and 7 S., Rs. 24 and 25 E.

RETRACEMENT OF PART OF SOUTH BDY. OF T. 6 S., R. 24 E.


40.00 From original cor. of secs. 1, 2, 35 and 36, on S. bdy. of T. 6 S., R. 24 E., hereinafter described, East, on random line, bet. secs. 1 and 36.
80.00 No trace of original 1/4 sec. cor. can be found.
No trace of original township cor. can be found.
Continue line and measurement.

RETRACING PART OF S. BDY. OF TOWNSHIP 6 SOUTH, RANGE 25 E. Between secs. 6 and 31.

118.15 No trace of original 1/4 sec. cor. can be found.
158.15 No trace of original cor. of secs. 5, 6, 31 and 32 can be found.
Continue line and measurement, bet. secs. 5 and 32 (W. 1/4).
197.58 Fall 12 lks. N. of original 1/4 sec. cor. of secs. 5 and 32, a 10 in. mesquite tree, marked "1/4 S" on N. side, and witnessed by one mesquite tree SE. of cor.
True course and dist. of line back to cor. of secs. 1, 2, 35 and 36 is therefore N. 89° 58' W., 197.58 chs.
From above described 1/4 sec. cor., N. 89° 58' W., on trial E. and W. Tp. line to locate point for reestablishment of missing Tp. cor.
117.67 Intersect the temp. N. and S. range line at a point 37 lks. N. 0° 8' E. from the temp. Tp. cor. set thereon.
117.81 (Proportional dist.) Set temp. Tp. cor.

REESTABLISHMENT OF COR. OF TS. 6 AND 7 S., RS. 24 & 25 E.

At a point 37 lks. S. from temp. Tp. cor. on trial E. and W. Tp. line, and 14 lks. W. from temp. Tp. cor. on trial N. and S. range line, reestablish the missing Tp. cor. as follows:
Set an iron post, 3 ft. long, 3 ins. in diam., 24 ins. in the ground, for cor. of Ts. 6 and 7 S., Rs. 24 and 25 E. with brass cap, marked,



Dig pits, 24x24x12 ins., on each line, N. E. and W., 4 ft. and S. of post, 8 ft. dist., and raise a mound of earth 5 ft. base, 2 1/2 ft. high, S. of cor.
The true course of S. 1/4 of E. bdy. of T. 6 S., R. 24 E. resulting from the reestablishment of the Tp. cor. is N. 0° 10' E., and of the S. bdy. of sec. 36 of same Tp. is N. 89° 42' W.

4. Dependent Resurvey of E. bdy. of Township 6 South, Range 24 East.

Chains.


From reestablished cor. of T6s. 6 and 7 S., R24 and 25 E.;
N. hereinbefore described, bet. secs. 35 and 36.
Over rolling land, along road to west.
N. 0° 10' E., on a true line, bet. secs. 31 and 36.

Over rolling land, along road to west.

1.05 SW. cor. of wire fence brs. E. 60 lks. dist.; thence along fence
to east.

33.30 Dry wash, 60 lks. wide, 6 ft. deep, course N. 85° E.

39.85 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in
diam., 26 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap,
marked



Raise mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

40.70 NW. cor. of wire fence, brs. E. 34 lks. dist.

42.90 Wagon road brs. E. and W.; continue along road to W.

79.70 (Proportional dist.) Set an iron post, 3 ft. long, 3 ins. diam.,
24 ins. in the ground, for cor. of secs. 25, 30, 31 and 36,
with brass cap, marked



Dig pits, 18x18x12 ins., in each sec. 5 1/2 ft. dist., and raise
a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, gently rolling.

Soil, light, fine dry, warm sandy loam, 4 to 8 ins. deep, on
sand subsoil, 2nd rate.

No timber.

Undergrowth, scattering mesquite, greasewood, sage and shad-
scale.

N. 0° 10' E., on a true line, bet. secs. 25 and 30.

Over nearly level land, along road to W.


0.10 Wagon road, brs. E. and W.; continue along road to W.; brs.
gradually E. to line.

0.20 SW. cor. of wire fence, brs. E. 12 lks. dist.

0.37 SE. cor. of wire fence, brs. W. 34 lks. dist.; thence along
fenced highway.

Chains.

- 15.70 Irrigation ditch, 20 lks. wide, 3 ft. deep, course S. 80° E.
- 20.65 Partition fence, turns W. from N. & S. about 30 lks. W. of line.
- 27.35 Irrigation ditch, 20 lks. wide, 3 ft. deep, course S. 70° W.
- 31.90 Partition fence at SE. cor. of cemetery, turns W. from N. and S. fence, about 20 lks. W. of line.
- 39.85 (Proportional dist.), Set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked




Road prevents construction of accessories; therefore, measure W. 15 lks. to W. bdy. of highway, and set a sandstone, 16x12x10 ins., 11 ins. in ground, for witness cor. to $\frac{1}{4}$ sec. cor., mkd., WC $\frac{1}{4}$ on E. face; dig pits 18x18x12 ins. N. and S. of stone, 3 ft. dist., and raise mound of earth, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

From the $\frac{1}{4}$ sec. cor., measure E. 10 lks. to E. bdy. of highway, and set a granite stone, 14x8x8 ins., 10 ins. in the ground, for witness cor. to $\frac{1}{4}$ sec. cor., mkd. WC $\frac{1}{4}$ on W. face; dig pits 18x18x12 ins. N. & S. of stone, 3 ft. dist., and raise a mound of earth, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

- 40.15 NE. cor. of wire fence and cemetery, brs. W. 15 lks. dist.
- 68.00 Wagon road, turns SW.; continue along road on line, brs. gradually to E.
- 68.40 Irrigation ditch, 15 lks. wide, 3 ft. deep, course SE.
- 69.70 Wire fence, brs. E. & W., SE. fence cor. brs. E. 10 lks. dist.
- 79.70 (Proportional dist.) Wire fence, brs. E. & W. NE. fence cor. brs. E. 10 lks. dist.

Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 19, 24, 25 & 30, with brass cap, marked




Dig pits, 18x18x12 ins., in each sec. 5 $\frac{1}{2}$ ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, gently rolling. Soil, light, fine, dry, warm sandy loam, 6 to 10 ins. deep on sand subsoil, 2nd rate.

Chains.	No timber. Undergrowth, scattering sage, shadscale, greasewood and mesquite.
	N. 0° 10' E., on a true line, bet. secs. 19 and 24.
	Over nearly level land, along road and fence to east.
0.20	Angle cor. of wire fences, bearing NE. & S., brs. E. 40 lks. dist. Wagon road brs. E. & W., continue along road to E.
0.40	Wire fence brs. E. and W.; SE. fence cor. brs. E. 10 lks. dist.; angle cor. of wire fences bearing N. & E. & SW., brs. E. 60 lks. dist. Enter cultivated land, along fenced highway to E.
27.80	Wire fence, brs. E. & W. NE. fence cor. brs. E. 40 lks. dist. NW. cor. of wire fence on E. side of N. & S. road, brs. E. about 1 chain dist. Leave cultivated land; enter highway.
28.10	Wagon road to Pima, brs. E. and W.
28.40	Wire fence brs. E. & W.; SE. fence cor. brs. E. 40 lks. dist.; leave highway.
32.00	Wire fence, brs. NW. and SE.; NE. fence cor. brs. SE. about 50 lks. dist.
32.70	Center of track, Arizona Eastern Railroad, brs. NW. & SE.
33.40	Wire fence, brs. NW. & SE.; SE. fence cor. brs. SE. about 50 lks. lks. dist. Enter cultivated land, along fence to E.
39.45	Wire fence brs. E. and W.; leave cultivated land.
39.85	(Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap, mkd.
	$\begin{array}{c} \uparrow \\ \text{S24} \mid \text{S19} \\ \downarrow \\ 1916 \end{array}$
	Dig pits, 18x18x12 ins. N. & S. of post, 3 ft. dist., and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
43.00	Cottonwood Creek, 50 lks. wide, clear water, 8 ins. deep, gentle current, sandy bottom, course N. 30° E.
45.30	SE. fence cor. brs. W. 25 lks. dist., along wire fence to W.
48.30	Road, from Pima to Fort Thomas, brs. N. and E.; along road on line.
58.50	NE. cor. of wire fence, brs. W. 25 lks. dist. SW. cor. of wire fence brs. E. 25 lks. dist.; along fence to E.
59.40	Road from Pima to Fort Thomas, turns W.; continue along road on line.

Chains.

- 59.80 SE.cor.of wire fence brs.W.25 lks.dist.; thence along fenced highway.
- 73.10 Irrigation ditch, 20 lks.wide, 5 ft. deep, course N.70°W.
- 79.45 NE.cor.of wire fence, brs.W. 25 lks.dist.
- 79.70 Point of original location of original cor.of secs.13, 18, 19 and 24, falls at intersection of roads bearing N., S.and W., and is marked by an iron pin, 12 ins.long, 1 in.in diam., driven a few inches below surface of road. This cor.was identified by H.J.Anderson, resident settler, who states the original cor.was standing when he located in this Tp., & that he placed the iron pin in place of the old cor., when the latter was destroyed during construction of road. In place thereof, Set an iron post, 3 ft.long, 3 ins.dia., 36 ins.in the ground, for cor.of secs.13, 18, 19 & 24, with brass cap, marked



Highway prevents construction of accessories; therefore, measure N.39°W., 38 lks.& set a granite stone, 16x8x6 ins., 11 ins.in the ground, for witness cor.to cor.of secs.13, 18, 19 and 24, marked WC on ESE.face, with 3 notches on N.& S.edges; dig pits, 18x18x12 ins.diagonally 5½ ft.dist., and raise a mound of earth 4 ft.base, 2 ft.high, W.of cor.

From the sec.cor., measure S.39°E., 39½ lks.dist., & set a granite stone, 18x12x9 ins., 12 ins.in the ground, for witness cor.to cor.of secs.13, 18, 19 and 24, marked WC on NW.face; with 3 notches on N.and S.edges; dig pits, diagonally 5½ ft.dist., and raise a mound of earth 4 ft. base, 2 ft.high, W.of cor.

Land, gently rolling.
 Soil, light, fine, dry, warm sandy loam, 8 to 12 ins.deep, on sand subsoil, 1st rate.
 No timber. Undergrowth, scattering sage, shadscale, grease-wood, and mesquite.

Chains.

N.0°07'E., on a true line, bet. secs.13 and 18.


Over level land, along fenced highway.

9.25 SE.cor.of wire fence, brs.W. 25 lks.dist.

17.00 Partition fence, turns W.from fence to W., 25 lks.dist.

32.90 Partition fence, turns E.from fence to E., 25 lks.dist.

39.75 (Proportional dist.) Set an iron post, 3 ft.long, 1 in. in diam., 26 ins.in the ground, for $\frac{1}{2}$ sec.cor., with brass cap, marked



Dig pits 18x18x12 ins.N.& S.of post, 3 ft.dist., & raise a mound of earth, $3\frac{1}{2}$ ft.base, $1\frac{1}{2}$ ft.high, W.of cor.

39.95 NE cor.of wire fence brs.E. 25 lks.dist.; wire fence turns N.from E.and W.fence, 50 lks.E.of line.


42.10 Partition fence turns W.from fence to W. 25 lks.dist.

44.20 Old river bank, 15 ft.high, brs.N.30°W., and S.70°E.

46.70 Irrigation ditch, 6 lks.wide, 2 ft.deep, course N.55° W.

65.93 Left bank of the Gila river, 15 ft.high, brs.N. 30° W.and S.60°E.

Set an iron post, 3 ft. long, 3 ins.in diam., 24 ins. in the ground, for meander cor.of fracl.secs.13 and 18, and witness cor.to cor.of secs.7, 12, 13 and 18, with brass cap, marked



Dig a pit, 36x36x12 ins., 8 ft.S.of post, and raise a mound of earth, 4 ft.base, 2 ft.high, S.of cor.

Cor.of wire fences bearing N7. and S., brs.W.40 lks.dist.

N.end of road, bearing S., brs.W.15 lks.dist.End of wire fence, bearing S., brs.E., 10 lks.dist.


66.20 Enter river channel, bourse N.30° W.

Dependent Resurvey of the East Bdy. of T. 6 S., R. 24 E. Chains.

To determine the dist. across, I set a flag on line on right shore of channel, and from this flag measure a base S. 89° 53' E. 8.00 chs. to a point from which the meander cor. on left bank of river bears S. 25° 11' W.; therefore, the dist. is $\tan 64^{\circ}56' \times \text{base}$, or $2.138 \times 8.00 \text{ chs.} = 17.10 \text{ chs.}$; which added to 65.93 chs., makes 83.03 chs. to flag on N. shore of channel.


83.03 chs. - 3.53 chs., gives
 >79.50 The proportionate point for cor. of secs. 7, 12, 13 and 18, falls in channel of the Gila River.

Land, level bottom.
 Soil, fine, dry, warm, rich alluvial sandy loam of great depth, on sand subsoil; 1st rate.
 Timber, scattering cottonwood.
 Undergrowth, scattering sage and mesquite.

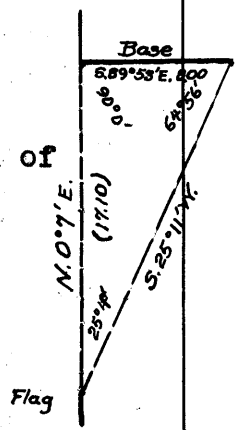

N. 0° 07' E. on a true line bet. secs. 7 and 12.
 Across river channel. Measurement by triangulation.


- 1.70 Right shore of channel, course N. 30° W.
 Thence over dry river bed, across sand bar.
- 3.53 Triangulation flag. Thence by chain measurement.
- 32.50 Right bank of Gila River, 10 ft. high, bears N. 75° E. and S. 75° W.
 Set an iron post, 3 ft. long, 3 ins. dia., 24 ins. in the ground, for meander cor. of frac. secs. 7 and 12, with brass cap mkd.



dig a pit, 36x36x12 ins., 8 ft. N. of post; and raise a mound of earth, 4 ft. base, 2 ft. high, N. of cor.
 Over level cultivated bottom land, along wire fence to E. about 50 lks. dist. bears gradually W. to line.

39.75 The true position of original 1/4 sec. cor., at cor. of wire fences bearing N., S., E. and W. With charred

stake and evidence of old pits at this point,
Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the
ground for $\frac{1}{4}$ sec. cor., with brass cap mkd.



dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.;
and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W.
of cor.

Thence

N. $0^{\circ} 15' E.$, on a true line bet. secs. 7 and 12, (N. $\frac{1}{2}$).
continuing my measurement; along fence on line.

49.45 Wire fence, bears E. and W. Leave cultivated land,
enter fenced highway, 75 lks. wide, bears N. and E.;
thence along highway.


39.39 NE. cor. of wire fence bears W. 37 lks. dist.

39.55 Wagon road turns W.; continue along road on line.

39.83 SE. cor. of wire fence bears W. 35 lks. dist.

39.88 The proportionate point for cor. of secs. 1, 6, 7 and
12, falls in road.

Set an iron post, 3 ft. long, 3 ins. dia., 36 ins. in the
ground for cor. of secs. 1, 6, 7 and 12, with brass cap
mkd.



Highway prevents construction of accessories; therefore,
I measure W. 35 lks. to W. bdy. of highway and set a
granite stone, 20x12x6 ins., 15 ins. in the ground for
witness cor. to cor. of secs. 1, 6, 7 and 12, mkd. WC on
NE. face, with 1 notch on N. and 5 notches on S. edge;
dig pits, 18x18x12 ins., diagonally from stone, $5\frac{1}{2}$ ft.
dist.; and raise a mound of earth, 4 ft. base, 12 ft.
High, W. of cor.

Dependent Resurvey of the East Bdy. of T. 6 S., R. 24 E.
Chains.


From the sec. cor. I measure E. 38 lks. to E. bdy. of highway and set a basalt stone, 14x12x8 ins., 10 ins. in the ground for witness cor. to cor. of secs. 1, 6, 7 and 12, mkd. WC on NE. face, with 1 notch on N. and 5 notches on S. edge; dig pits, 18x18x12 ins., diagonally from stone, 5½ ft. dist.; and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, level river bottom.
Soil, dark, fine, dry, warm, rich alluvial sandy loam, 8 to 12 ins. deep, on clay subsoil; 1st rate.
Timber, scattering cottonwood along highway.
Undergrowth, scattering sage and mesquite.

N. 0° 15' E., on a true line bet. secs. 1 and 6. (S. ½)
Over level bottom land, along fenced highway.

- 11.40 House, bears W. 1.50 chs. dist.
- 19.90 Partition fence turns W. from fence to W. 35 lks. dist. NW. cor. of wire fence bears E. 40 lks. dist.
- 31.80 Irrigation ditch, 10 lks. wide, 2½ ft. deep, course N. 25° W.
- 37.55 NE. cor. of wire fence bears W. 40 lks. dist.
- 37.70 Wagon road, bears W. and S.; leave bottom land, bears E. and W.; asc. over a steep rocky S. slope.
- 39.88 The original ¼ sec. cor., which is a wooden stake, 3 ins. sq., 2 ft. above ground in mound of stone, mkd. and witnessed as described by the surveyor general.

In place thereof
Set an iron post, 3ft. long, 1 ins. dia., 26 ins. in the ground for ¼ sec. cor., with brass cap mkd.



and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Thence

N. $0^{\circ} 23'$ E., on a true line bet. secs. 1 and 6, ($N\frac{1}{2}$)
continuing by measurement.

16.12 Top of ridge, 220 ft. high, bears N. 40° E. and S. 70° W.
desc. 140 ft. along a steep NW. slope.


27.12 Dry gulch, course SW.; asc. 185 ft. along a steep SE.
slope.

39.35 The original closing cor. of T. 6sS., Rs. 24 and 25 E.,
which is a wooden post, 4 ft. long, 4 ins. sq., set in
mound of stone, and mkd. and witnessed as described by
the surveyor general. Continue line and measurement.

39.40 Intersect the 1st St. Par. S. at N. $89^{\circ} 44'$ W. 27.53 chs.
from the standard cor. of T. 5 S., Rs. 24 and 25 E.,
hereinafter described.

At point of intersection

Set and iron post, 3 ft. long, 3 ins. dia., 14 ins. in the
ground to bedrock, in mound of earth and stone, 4 ft.
base, $1\frac{1}{2}$ ft. high, for closing cor. of T. 6 S., Rs. 24
and 25 E., with brass cap mkd.



and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, S.
of cor.

Mag. decl. $14^{\circ} 45'$ E.

Sand, level and mountainous.

Soil, on bottom, light, fine, dry, warm, rich sandy loam,
12 to 24 ins. deep on sand subsoil; 1st rate; on N.
half mile the soil is coarse, shallow and stony, on
basalt base; 4th rate; affords some grazing, but is
worthless for cultivation.

No timber.

Undergrowth, sage, shadscale, greasewood and mesquite.

Survey completed March 17, 1916.

C. B. Rice
U. S. Surveyor.

Chains.

Retracement for Resurvey.

- South bdy. of sec. 35 retraced as hereinbefore described. From original cor. of secs. 1, 2, 35 and 36, hereinafter described,
- West, on random line, bet. secs. 2 and 35.
- 40.00 No trace of original $\frac{1}{4}$ sec. cor. can be found.
- 80.00 No trace of original cor. of secs. 2, 3, 34 and 35 can be found.
- 119.13 Continue line and measurement bet. secs. 3 and 34 (E. $\frac{1}{2}$). Fall 38 lks. S. of original $\frac{1}{4}$ sec. cor. of secs. 3 and 34 hereinafter described. True course and dist. of line to this cor. is therefore N. 89° 49' W., 119.13 chs., which by proportion gives a true course and dist. N. 89° 49' W., 79.42 chs. for line bet. secs. 2 and 35, and N. 89° 49' W., 39.71 chs. for E. $\frac{1}{2}$ of line, bet. secs. 3 and 34. From $\frac{1}{4}$ sec. cor. of secs. 3 and 34, West, on random line, bet. secs. 3 and 34 (W. $\frac{1}{2}$).
- 40.00 No trace of original cor. of secs. 3, 4, 33 and 34 can be found.
- 79.72 Continue line and measurement bet. secs. 4 and 33 (E. $\frac{1}{2}$) Fall 18 lks. S. of original $\frac{1}{4}$ sec. cor. of secs. 4 and 33 hereinafter described. True course and dist. of line from $\frac{1}{4}$ sec. cor. of secs. 3 and 34 to this $\frac{1}{4}$ sec. cor. is therefore N. 89° 52' W., 79.72 chs. giving for W. $\frac{1}{2}$ of line bet. secs. 3 and 34, and E. half of line bet. secs. 4 and 33, a true course and dist. for each, N. 89° 52' W., 39.86 chs. From $\frac{1}{4}$ sec. cor. of secs. 4 and 33, West, on random line, bet. secs. 4 and 33 (W. $\frac{1}{2}$).
- 39.50 Fall 15 lks. S. of original cor. of secs. 4, 5, 32 and 33, hereinafter described. True course and dist. of W. $\frac{1}{2}$ bet. secs. 4 and 33 is therefore N. 89° 47' W., 39.50 chs. Thence, West, on random line, bet. secs. 5 and 32 (E. $\frac{1}{2}$).
- 40.18 Fall 10 lks. S. of original $\frac{1}{4}$ sec. cor., hereinafter described. True course and dist. of E. $\frac{1}{2}$, bet. secs. 5 and 32 is therefore N. 89° 52' W., 40.18 chs. Thence, West, on random line, bet. secs. 5 and 32 (W. $\frac{1}{2}$).
- 39.99 Fall 21 lks. S. of original cor. of secs. 5, 6, 31 and 32, hereinafter described. True course and dist. of W. $\frac{1}{2}$ bet. secs. 5 and 32 is therefore N. 89° 42' W., 39.99 chs. Thence, West, on random line, bet. secs. 6 and 31 (E. $\frac{1}{2}$).
- 39.64 Intersect the original $\frac{1}{4}$ sec. cor. hereinafter described. True course and dist. of E. $\frac{1}{2}$ bet. secs. 6 and 31 is therefore west, 39.64 chs. Thence, West on random line, bet. secs. 6 and 31 (W. $\frac{1}{2}$).
- 38.05 Fall 11 lks. S. of reestablished cor. of Ts. 6 and 7 S., Rs. 23 and 24 E., hereinafter described. True course and dist. of W. $\frac{1}{2}$ bet. secs. 6 and 31 is therefore N. 89° 50' W., 38.05 chs.

RESURVEY.

Return to reestablished cor. of Ts. 6 and 7 S., Rs. 24 and 25 E. hereinbefore described,

Thence,

N. 89° 42' W., on a true line, bet. secs. 1 and 36.

Over level land.

14. Dependent Resurvey of the S. bdy. of T. 6 S., R. 24 E.

Chains.

RESURVEY.

0.30 Road brs. N. and S.

38.30 Dry drain, 20 lks. wide, 3 ft. deep, course N. 10° E.

39.88½ (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for ¼ sec. cor., with brass cap, marked

¼ S 36
S 31
1916

Dig pits, 10x10x12 ins. E. & W. of post, 3 ft. dist., and raise a mound of earth, 3½ ft. base, 1½ ft. high, N. of cor.

60.80 Enter heavy greasewood undergrowth, brs. N. and S.

78.00 Leave level land & heavy undergrowth, brs. N. & S.; ascend gradually over low rolling hills.

79.77 The original cor. of secs. 1, 2, 35 and 36, which is a granite stone, 10x8x6 ins. above ground, firmly set, & marked & witnessed as described by surveyor general. In place thereof Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground for cor. of secs. 1, 2, 35 and 36, with brass cap, marked

T6S R24E
S35 | S36
S 2 | S 1
T7S
1916

and raise mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, level and rolling. Soil, light, fine, dry, warm sandy loam, 4 to 8 ins. deep on adobe clay subsoil; 2nd & 3rd rate.

No timber. Undergrowth, greasewood, sage, shade scale and scattering mesquite.

N. 89° 49' W., on a true line, bet. secs. 2 and 35.

Ascend 40 ft. over a steep E. slope.


3.20 Top of steep ascent, brs. N. & S.; thence over rolling land.

29.50 Descend 30 ft. over a gradual W. slope.

35.70 Dry drain, course N. 20° W.; ascend 40 ft. over gradual E. slope.


39.71 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap marked

Dependent Resurvey of the South Bdy. of T. 6 S., R. 24 E.
Chains.



dig pits, 18x18x 12 ins., E. and W. of post, 3 ft. dist.; and raise a mound of earth, 3½ ft. base, 1½ ft. high, N. of cor.

- 41.80 Wagon road, bears N. 20° W. and S. 20° E.
- 46.00 Top of ascent, bears N. and S.; thence over rolling land.
- 53.00 Desc. 50 ft. over a steep W. slope.
- 55.00 Foot of steep descent, bears N. 20° E. and S. 20° W.; leave rolling hills, enter level land.
- 65.00 Wagon road, bears N. 30° E. and S. 30° W.
- 69.00 Wire fence, bears N. 30° E. and S. 30° W.; enter cultivated land.
- 79.42 The proportionate point for cor. of secs. 2, 3, 34 and 35. Set an iron post, 3 ft. long, 3 ins. dia., 24 ins. in the ground for cor. of secs. 2, 3, 34 and 35, with brass cap mkd.



dig pits, 18x18x12 ins., in each sec., 5½ ft. dist.; and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor. Land, rolling and level

Soil, in hills, light, fine, dry, warm, stony, sandy loam, 4 to 8 ins. deep, on stiff adobe clay subsoil; 3rd rate; on W. 25 chs. the soil is light, fine, dry, warm, rich sandy loam, 8 to 16 ins. deep on sand subsoil; 1st rate.

No timber.

Undergrowth, greasewood, sage, shadscale, cactus, yucca and ocotillo.

N. 89° 49' W., on a true line bet. secs. 3 and 34. (E. ½).
Over level, cultivated land.


0.20 Wire fence, bears N. and S.; leave cultivated land.

8.50 Cottonwood Creek, 30 lks. wide; clear water, 8 ins. deep; gentle current, sandy bottom; course NE.

18.00 Leave level land, bears NE. and SW.; asc. 130 ft. along a steep, broken SE. slope.

38.50 Edge of mesa, bears NE. and SW.; thence over nearly level mesa, thru dense greasewood undergrowth.

39.71 The original $\frac{1}{4}$ sec. cor., which is a granite stone, 13x10 x6 ins. above ground, firmly set, and mkd. and witnessed as described by the surveyor general. In place thereof Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap mkd.




and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

Thence

N. 89° 52' W., on a true line bet. secs. 3 and 34, (W. 1/2) continuing my measurement.

39.86 The proportionate point for cor. of secs. 3, 4, 33 and 34. Set an iron post, 3 ft. long, 3 ins. dia., 24 ins. in the ground for cor. of secs. 3, 4, 33 and 34, with brass cap mkd.



dig pits, 18x18x12 ins., in each sec., 5 1/2 ft. dist.; and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, level, broken and rolling.

Soil, on E. 18 chs., light, fine, dry, warm, rich sandy loam, 8 to 16 ins. deep on sand subsoil; 1st rate; on W. 62 chs. the soil is light, coarse, gravelly and stony, 4 to 8 ins. deep on decomposed granites; 3rd rate.

Dependent Resurvey of the South Bdy. of T. 6 S., R. 24 E. Chains.

No timber.
Undergrowth, greasewood, sage, shadscale, mesquite,
ocotillo, cactus and yucca.

N. 89° 52' W., on a true line bet. secs. 4 and 33. (E. 1/4).

Over level mesa, thru dense greasewood undergrowth.

4.40 Wagon road, bears N. 65° E. and S. 65° W.

23.40 Desc. 40 ft. over abrupt W. slope.


24.80 Bottom of draw, course N. 25° E.; asc. 40 ft. over abrupt E. slope.

26.50 Top of abrupt ascent, bears N. 25° E. and S. 25° W.;
thence over rolling mesa.

39.86 The original 1/4 sec. cor., which is a granite stone,
16x8x8 ins. above ground, firmly set, and mkd. and
witnessed as described by the surveyor general.

In place thereof

Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the
ground for 1/4 sec. cor., with brass cap mkd.



and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N.
of cor.

Thence

N. 89° 47' W., on a true line bet. secs. 4 and 33, (W. 1/4)
continuing by measurement.

43.00 Desc. abruptly into draw.

46.40 Bottom of draw, 90 ft. deep, course N.; asc. abruptly.

48.10 Top of steep ascent, bears N. and S.; continue over
nearly level mesa.

50.40 Edge of mesa, bears NE. and SW.; leave heavy undergrowth,
desc. 100 ft. along a steep NW. slope.


58.60 Foot of steep descent, bears NE. and SW.; thence over
nearly level land.

64.84 Dry drain, course NE.

39.50 The original cor. of secs. 4, 5, 32 and 33, which is a wooden post, 3 in. sq., 3 ft. above ground, mkd. and witnessed as described by the surveyor general.

In place thereof

Set an iron post, 3 ft. long, 3 ins. dia., 24 ins. in the ground for cor. of secs. 4, 5, 32 and 33, with brass cap mkd.



and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, level, rolling and broken.

Soil, light, coarse, dry, warm, gravelly and stony, 4 to 8 ins. deep, on adobe clay and decomposed granite subsoil; 3rd rate.

No timber.

Undergrowth, greasewood, sage, shadscale, mesquite, ocotillo, cactus and yucca.

N. 89° 52' W., on a true line bet. secs. 5 and 32. (E. ½).

Over broken and rolling land.


21.70 Foot of steep ascent, bears N. 30° E. and S. 30° W.; asc. 60 ft. over steep E. slope.

24.90 Top of ridge, bears N. 30° E. and S. 30° W.; desc. 70 ft. over steep W. slope.

33.00 Dry drain, course NE.; asc. gradually along a steep SE. slope.

40.18 The original ¼ sec. cor. which is a granite stone, 16x10x 8 ins. above ground, loosely set, and mkd. and witnessed as described by the surveyor general. In place thereof Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for ¼ sec. cor. with brass cap mkd.

Dependent Resurvey of the South Bdy. of T. 6 S., R. 24 E.
Chains.




and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

Thence

N. $89^{\circ} 42'$ W., on a true line bet. secs. 5 and 32, ($W.\frac{1}{2}$) continuing by measurement; asc. along a steep SE. slope.

45.82 Edge of mesa, 160 ft. above basin, bears NE. and SW.; thence over nearly level mesa.

39.99 The original cor. of secs. 5, 6, 31 and 32, which is a wooden stake, 3 ins. sq., 3 ft. above ground, mkd. and witnessed by the surveyor general. In place thereof Set an iron post, 3 ft. long, 3 ins. dia., 24 ins. in the ground for cor. of secs. 5, 6, 31 and 32, with brass cap mkd.



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, broken, rough and rolling.

Soil, light, dry, warm, coarse, gravelly and stony, 8 to 12 ins. deep on clay and decomposed granites; 3rd and 4th rate.

No timber.

Undergrowth, greasewood, sage, shadscale, yucca, ocotillo, cactus and mesquite.

West, on a true line bet. secs. 6 and 31. ($E.\frac{1}{2}$).

Over level mesa.

11.80 Edge of mesa, bears NE. and SW.; desc. 50 ft. along a steep NW. slope.

16.30 Bottom of draw, course NE.; asc. 90 ft. along a steep

Dependent Resurvey of the South Bdy. of T. 6 S., R. 24 E. Chains.


SE. slope.

23.00 Top of ridge, bears NE. and SW.; desc. 200 ft. along a steep rocky NW. slope.

31.00 Foot of steep descent, bears NE. and SW.; desc. gradually over broken and rolling land.

39.64 The original 1/4 sec. cor., which is a wooden post, 3 ins. sq., 1 1/2 ft. above ground, set in mound of stone, and mkd. 1/4 on N. face. In place thereof

Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for 1/4 sec. cor., with brass cap mkd.




and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

Thence

N. 89° 50' W., on a true line bet. secs. 6 and 31, (W. 1/2). continuing my measurement,

38.05 The reestabl cor. of Tps. 6 and 7 S., Rs. 23 and 24 E., which is a granite stone, 16x10x8 ins. above ground, firmly set, and mkd. and witnessed as described by the surveyor general, (reestablished in May, 1900). In place thereof

Set an iron post, 3 ft. long, 3 ins. dia., 24 ins. in the ground for cor. of Tps. 6 and 7 S., Rs. 23 and 24 E., with brass cap mkd.



and raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.

Land, level, rolling, rough and broken.

Soil, light, dry, warm, coarse, gravelly and stony, 4 to 12 ins. deep on decomposed granites and clay sub-soil; 3rd and 4th rate.

Chains.	<u>Retracement for Resurvey.</u>
	From reestablished cor. of T. 6 and 7 S., Rs. 23 and 24 E., hereinbefore described,
40.09	N. 0° 5' E. on a random line, bet. secs. 31 and 36 (S. 1/2). Fall 1 lk. W. of reestablished 1/4 sec. cor. hereinafter described. True course and dist. of S. 1/2 bet. secs. 31 and 36 is therefore N. 0° 6' E., 40.09 chs.
40.10	Thence, N. 0° 5' E., on random line, bet. secs. 31 and 36 (N. 1/2). Fall 1 lk. W. of reestablished cor. of secs. 25, 30, 31 and 36, hereinafter described. True course and dist. of N. 1/2 bet. secs. 31 and 36 is therefore N. 0° 6' E., 40.10 chs.
39.88	Thence, N. 0° 5' E., on a random line, on W. bdy. of sec. 30 (S. 1/2). Fall 1 lk. E. of reestablished 1/4 sec. cor. of sec. 30, hereinafter described. True course and dist. of S. 1/2 of W. bdy. of sec. 30 is therefore N. 0° 4' E., 39.88 chs.
0.27	Thence, N. 0° 5' E., on a random line, on W. bdy. of sec. 30 (N. 1/2). (40.15 chs. northerly from cor. of secs. 25, 30, 31 and 36) the reestablished 1/4 sec. cor. of sec. 25, hereinafter described. Continue line and measurement.
39.76	Fall 1 lk. W. of reestablished cor. of secs. 19 and 30, hereinafter described. True course and dist. of N. 1/2 of W. bdy. of sec. 30 is therefore N. 0° 6' E., 39.76 chs.
0.54	Thence, N. 0° 5' E., on random line on W. bdy. of sec. 19 (S. 1/2). (40.03 chs. northerly from 1/4 sec. cor. of sec. 25) The reestablished cor. of secs. 24 and 25, hereinafter described. Continue line and measurement.
39.76	Fall 1 lk. E. of reestablished 1/4 sec. cor. of sec. 19, hereinafter described. True course and dist. of S. 1/2 of W. bdy. of sec. 19 is therefore N. 0° 4' E., 39.76 chs.
0.91	Thence, N. 0° 5' E., on random line, on W. bdy. of sec. 19 (N. 1/2). (40.13 chs. northerly from cor. of secs. 24 and 25) The reestablished 1/4 sec. cor. of sec. 24, hereinafter described. Continue line and measurement.
39.37	No trace of reestablished cor. of secs. 18 and 19 can be found; therefore set temp. cor. for said secs., and continue line and measurement on W. bdy. of sec. 18 (S. 1/2).
40.91	No trace of reestablished cor. of secs. 13 and 24 can be found; therefore, set temp. cor. for said secs., and continue line and measurement.
79.40	Fall 2 lks. W. of reestablished 1/4 sec. cor. of sec. 18, hereinafter described. True course and dist. of line from 1/4 sec. cor. of sec. 19 to this cor. is therefore N. 0° 6' E., 79.40 chs., which proportioned to the previous resurvey dist. gives for the N. 1/2 of W. bdy. of sec. 19, a true course and dist. of N. 0° 6' E., 39.49 chs. and for the S. 1/2 of W. bdy. of sec. 18, a true course and dist. of N. 0° 6' E., 39.91 chs.
1.75	Thence, N. 0° 5' E., on random line, on W. bdy. of sec. 18 (N. 1/2). (80.24 chs. northerly from 1/4 sec. cor. of sec. 24) The reestablished 1/4 sec. cor. of sec. 13, hereinafter described. Continue line and measurement.
40.05	Fall 5 lks. W. of reestablished cor. of secs. 7 and 18, hereinafter described. True course and dist. of N. 1/2 of W. bdy. of sec. 18, is therefore N. 0° 9' E., 40.05 chs.
1.86	Thence, N. 0° 5' E., on random line, on W. bdy. of sec. 7 (S. 1/2). (40.16 chs. northerly from 1/4 sec. cor. of sec. 13) The reestablished cor. of secs. 12 and 13, hereinafter described. Continue line and measurement.

22 Dependent Resurvey of W. bdy. of T. 6 S., R. 24 E.

- Chains.
- 39.88 Fall 5 lks. E. of reestablished $\frac{1}{4}$ sec. cor. of sec. 7, hereinafter described.
True course and dist. of S. $\frac{1}{2}$ of W. bdy. of sec. 7 is therefore N. $0^{\circ}1'E.$, 39.88 chs.
- 2.20 Thence N. $0^{\circ}5'E.$, on a random line, on W. bdy. of sec. 7 (N. $\frac{1}{2}$). (40.22 chs. northerly from cor. of secs. 12 and 13) The reestablished $\frac{1}{4}$ sec. cor. of sec. 12, hereinafter described.
Continue line and measurement.
- 39.19 Intersect the reestablished cor. of secs. 6 and 7, hereinafter described.
True course and dist. of N. $\frac{1}{2}$ of W. bdy. of sec. 7 is therefore N. $0^{\circ}5'E.$, 39.19 chs.
- 2.75 Thence N. $0^{\circ}5'E.$ on random line, on W. bdy. of sec. 6 (S. $\frac{1}{2}$). (39.74 chs. northerly from $\frac{1}{4}$ sec. cor. of sec. 12) The reestablished cor. of secs. 1 and 12, hereinafter described.
Continue line and measurement.
- 39.70 Fall 2 lks. E. of reestablished $\frac{1}{4}$ sec. cor. of sec. 6, hereinafter described. True course and dist. of S. $\frac{1}{2}$ of W. bdy. of sec. 6 is therefore N. $0^{\circ}3'E.$, 39.70 chs.
- 3.17 Thence N. $0^{\circ}5'E.$, on a random line on W. bdy. of sec. 6 (N. $\frac{1}{2}$). (40.12 chs. northerly from cor. of secs. 1 and 12) The reestablished $\frac{1}{4}$ sec. cor. of sec. 1, hereinafter described.
Continue line and measurement.
- 39.83 (36.66 chs. northerly from $\frac{1}{4}$ sec. cor. of sec. 1) Intersect the reestablished closing cor. of Ts. 6 S., Rs. 23 and 24 E. on 1st Standard Parallel South, hereinafter described.
True course and dist. of N. $\frac{1}{2}$ of W. bdy. of sec. 6, based on this closing cor. is N. $0^{\circ}5'E.$, 39.83 chs.
The location of this closing cor. is later changed as hereinafter described.

RESURVEY.

From reestablished cor. of Ts. 6 and 7 S., Rs. 23 and 24 E., hereinbefore described,

N. $0^{\circ}6'E.$, on a true line, bet. secs. 31 and 36 (S. $\frac{1}{2}$). Mag. decl. $14^{\circ}15'E.$

Over level land.

26.60 Dry drain, 50 lks. wide, 12 ft. deep, course N. $75^{\circ}E.$

39.00 Wagon road brs. N. $70^{\circ}E.$ and S. $70^{\circ}W.$

39.80 Dry drain 4 lks. wide, 2 ft. deep, course N. $70^{\circ}E.$

40.09 The reestablished $\frac{1}{4}$ sec. cor. of secs. 31 and 36, a granite stone, 10x8x7 ins. above ground, firmly set, marked and witnessed as described by the surveyor general.

In place thereof, set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap, marked

s36 ↑ s 31

1916

Dig pits, 18x18x12 ins. N. and S. of post, 3 ft. dist., and raise mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Thence N. $0^{\circ}6'E.$, on true line, bet. secs. 31 and 36 (N. $\frac{1}{2}$).

Dependent Resurvey of the West bdy. of T.6 S., R.24 E. 23

Chains


2.61 Dry drain, 12 lks. wide, 5 ft. deep, course N. 75° E.

8.81 Dry drain, 6 lks. wide, 2 ft. deep, course N. 70° E.

Enter heavy greasewood undergrowth, brs. NE. and SW.

10.71 Irrigation ditch, 10 lks. wide, 5 ft. deep, course NE.

40.10 The reestablished cor. of secs. 25, 30, 31 and 36, a granite stone, 12x8x8 ins. above ground, firmly set, and marked and witnessed as described by the surveyor general. In place thereof, set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 25, 30, 31 and 36, with brass cap, marked



Dig pits, 18x18x12 ins. in each sec. 5 1/2 ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, level. Soil, light, fine, dry, warm sandy loam, 8 to 12 ins. deep, on adobe clay subsoil, 2nd rate.

No timber. Undergrowth, greasewood, sage, shadscale, cactus, and mesquite.

N. 0° 04' E., on a true line, on W. bdy. of sec. 30 (S. 1/2).

Over level land, thru. dense greasewood undergrowth.

31.50 Wagon road brs. N. 80° E. and S. 80° W.

39.88 The reestablished 1/4 sec. cor. of sec. 30, a granite stone, 12x8x5 ins. above ground, firmly set, and marked and witnessed as described by the surveyor general. In place thereof, set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor. of sec. 30, with brass cap marked



1916

Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raised a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high. E. of cor. Thence;

N. 0° 6' E. on a true line on W. bdy. of sec. 30 (N. 1/2).

0.27 The reestablished 1/4 sec. cor. of sec. 25, which is a granite

24. Dependent resurvey of West bdy. of T. 6 S., R. 24 E.

Chains. stone, 8x7x6 ins. above ground, firmly set, and marked and witnessed as described by the surveyor general. Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

35.42 Dry wash, 2 chs. wide, 3 ft. deep, course N. 80° E.
 Leave heavy, enter scattering greasewood undergrowth.

39.76 The reestablished cor. of secs. 19 and 30, which is a granite stone, 8x5x6 ins. above ground, firmly set, and marked and witnessed as described by the surveyor general.
 In place thereof, set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground for cor. of secs. 19 and 30, with brass cap marked

T68
 S19
 S30
 R24E
 1916

Dig pits 24x24x12 ins. NE. & SE. of post, 6 ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, E. of cor.
 Land, level. Soil, light, fine, dry, warm, sandy loam, 8 to 12 ins. deep, on sandy clay subsoil, 2nd rate. No timber.
 Undergrowth, greasewood, sage, shadscale and mesquite,

 N. 0° 4' E., on a true line, on W. bdy. of sec. 19 (S. ½).
 Over level land.

0.54 The reestablished cor. of secs. 24 and 25, a granite stone, 10x10x6 ins. above ground, firmly set, and marked and witnessed as described by the surveyor general.

30.20 Wagon road, brs. N. 70° E. and S. 30° W.

39.76 The reestablished ¼ sec. cor. of sec. 19, a granite stone, 10x8x8 ins. above ground, loosely set, and marked and witnessed as described by the surveyor general.
 In place thereof, set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for ¼ sec. cor. of sec. 19, with brass cap marked

¼
 S19
 1916


Dig pits 18x18x12 ins. N. & S. of post, 3 ft. dist., and raise a mound of earth 3½ ft. base, 1½ ft. high, E. of cor.
 Thence,

Dependent Resurvey of the West Bdy. of T. 6 S., R. 24 E. Chains.

N. 0° 06' E., on a true line, on W. bdy. of sec. 19, (N. 1/2).
continuing my measurement,

0.91 The reestablished sec. cor. of sec. 24, a granite stone, 8x6x6 ins. above ground, firmly set, and mkd. and witnessed as described by the surveyor general.

39.79 [Proportional dist.] Reestablish the cor. of secs. 18 and 19, as follows:
Set an iron post, 3 ft. long, 3 ins. dia., 24 ins. in the ground for cor. of secs. 18 and 19, with brass cap mkd.



dig pits, 24x24x12 ins., NE and SE of post, 6 ft. dist. and raise a mound of earth, 4 ft. base, 2 ft. high, E. of cor. Land, level.
Soil, light, fine, dry, warm sandy loam, 5 to 10 ins. deep, on adobe clay subsoil; 2nd rate.
No timber.
Undergrowth, greasewood, sage and shadscale.

N. 0° 06' E., on a true line on W. bdy. sec. 18. (S. 1/2).
Over level land.


1.54 [Proportional dist.] Reestablish the cor. of secs. 13 & 24, as follows:
Set a granite stone, 14x10x8 ins., 10 ins. in the ground for cor. of secs. 13 and 24, mkd. with 3 notches on N. and S. edges; dig pits, 24x24x12 ins. NW & SW of cor, 66 ft. dist.; and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

32.70 Enter heavy greasewood undergrowth, bears E. and W.

39.91 The reestablished sec. cor. of sec. 18, a granite stone, 8x5x10 ins. above ground, firmly set, and mkd. and witnessed as described by the surveyor general.

In place thereof

Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for 1/4 sec. cor. of sec. 18 with brass cap mkd.



dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.;
and raise a mound of earth, 3½ ft. base, 1½ ft. high, E.
of cor. Thence

N. 0° 09' E., on a true line, on W. bdy. of sec. 18 (N. ½).
continuing by measurement,

41.75 The reestablished cor. of sec. 13, a granite stone,
8x6x4 ins. above ground, firmly set, and mkd. and witness-
ed as described by the surveyor general.


43.79 Leave heavy, enter scattering undergrowth, bears NE. and
SW.

36.39 Wagon road, bears E. and W.

40.05 The reestablished cor. of secs. 7 and 18, a limestone,
16x6x6 ins. above ground, firmly set, and mkd. and wit-
nessed as described by the surveyor general.

In place thereof

Set an iron post, 3 ft. long, 3 ins. dia., 24 ins. in the
ground for cor. of secs. 7 and 18, with brass cap mkd.



dig pits, 24x24x12 ins., NE. and SE. of post, 6 ft. dist., and
raise a mound of earth, 4 ft. base, 2 ft. high, E. of cor.
Land, level.

Soil, light, fine, dry, warm sandy loam, 4 to 8 ins.

deep on sandy clay subsoil; 2nd rate;

No timber.

Undergrowth, greasewood, sage, shadscale and mesquite.

N. 0° 01' E., on a true line on W. bdy. sec. 7. (S. ½).
Over level land.

1.86 The reestablished cor. of secs. 12 and 13, a limestone,

Dependent Resurvey of the West Bdy. of T. 6 S., R. 24 E. Chains.

stone, 8x8x8 ins. above ground, firmly set, and mkd. and witnessed as described by the surveyor general.


Enter heavy greasewood undergrowth, bears E. and W.

8.00 Wagon road, bears E. and W.

39.88 The reestablished $\frac{1}{4}$ sec. cor. of sec. 7, a limestone, 8x3x10 ins. above ground, loosely set, and mkd. $\frac{1}{4}$ on W. face.

In place thereof

Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for $\frac{1}{4}$ ^{sec.} cor. of sec. 7, with brass cap mkd.



dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.; and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, E. of cor. Thence

N. 0° 05' E., on a true line on W. bdy. of sec. 7 (N. 1/2), continuing my measurement.

42.20 The reestablished $\frac{1}{4}$ sec. cor. of sec. 12, a limestone, 8x6x5 ins. above ground, firmly set, and mkd. and witnessed as described by the surveyor general.

42.62 Leave heavy, enter scattering undergrowth, bears E. and W.

43.62 Foot of ridge, bears E. and W.; asc. 75 ft. over steep S. slope.

49.52 Top of ridge, bears E. and W.; desc. 70 ft. over steep N. slope.

15.12 Draw, course E.; asc. 90 ft. over steep S. slope.

23.12 Top of flat ridge, bears E. and W.; thence over level top.


27.12 Leave top of ridge, bears E. and W.; desc. 75 ft. over a gradual N. slope.

38.82 Foot of slope, bears E. and W.; thence over neatly level land.

39.19 The reestablished cor. of secs. 6 and 7, a limestone, 8x4x10 ins. above ground, firmly set, and mkd. as described by the surveyor general. In place thereof Set an iron post, 3 ft. long, 3 ins. dia., 18 ins. in

Chains.

the ground to bedrock, in mound of earth and stone, 3 ft. base, 1 ft. high, for cor. of secs. 6 and 7. with brass cap mkd.



dig pits, 24x24x12 ins., NE and SE of post, 6 ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, E. of cor. Land, level, rolling and rough.

Soil, on S. half mile, light, fine, dry, warm, sandy loam, 4 to 8 ins. deep on sandy clay subsoil; 2nd rate; on N. half mile the soil is coarse, shallow and stony, 4 to 8 ins. deep on limestone base or subsoil; 3rd and 4th rate.

No timber.

Undergrowth, greasewood, sage, shadscale and cactus.


N. 0° 03' W., on a true line on W. bdy. sec. 6, (S. 1/2) Over level land.

2.75 The reestablished cor. of secs. 6 and 7, a limestone, 8x5x6 ins. above ground, firmly set, and mkd. and witnessed as described by the surveyor general.

15.00 Enter low rolling sand-hills, bear E. and W.

30.50 Leave sand-hills, bear E. and W.; thence over nearly level land, thru dense greasewood undergrowth.

39.70 The reestablished 1/2 sec. cor. of sec. 6, a limestone 14x4x5 ins. above ground, firmly set, and mkd. and witnessed as described by the surveyor general. In place thereof Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for 1/4 cor. of sec. 6, with brass cap mkd.



dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.; and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, E.

Dependent Resurvey of the West Bdy. of T. 6 S., R. 24 E.

Chains:


of cor. Thence
N. 0° 05' E., on a true line on W. bdy. of sec. 6 (N. 1/2).
continuing my measurement.

73.17 The reestablished sec. cor. of sec. 1, a limestone,
14x5x4 ins. above ground, firmly set, and mkd. and
witnessed as described by the surveyor general, except
the old bearing tree which has been destroyed.

79.83 The reestablished closing cor. of T. 6, S. 23 and 24 E.,
which is a granite stone, 6x5x5 ins. above ground, firm-
ly set, and mkd. and witnessed as described by the
surveyor general. (Reestablished in May, 1900).

79.91 Intersect the 1st St. Par. S. at N. 89° 42' W., 25.70
chs. from the reestablished standard cor. of T. 5 S., R. 23,
and 24 E., hereinafter described.

At intersection, reestablish Tp. closing cor., as follows:
Set an iron post, 3 ft. long, 3 ins. dia., 24 ins. in
the ground for closing cor. of T. 6 S., R. 23 and 24 E.,
with brass cap mkd.



dig pits, 30x24x12 ins., crosswise on each line, E. and
W. 4 ft., and S. of post, 8 ft. dist.; and raise a mound
of earth, 5 ft. base, 2 1/2 ft. high, S. of cor.

Mag. decl. 14° 00' E.

Land, level and rolling.

Soil, light, fine, dry, warm, stony, sandy loam, 6 to 10
ins. deep on sand and gravel subsoil; 2nd and 3rd
rate.

No timber.

Undergrowth, greasewood, sage, shadscale, cactus and
ocotillo.

Note: - I refer all accessories to all records on this ap.
bdy. referring to T. 6 S., R. 23 E.

Survey completed March 8, 1916. *J. H. Park*
U. S. Surveyor.

Chains.

Retracement for Resurvey.

- From reestablished standard $\frac{1}{4}$ sec. cor. of sec. 36, T. 5 S., R. 23 E., hereinafter described, S. $89^{\circ}50'E.$ on random line, on S. bdy. of sec. 36 (E. $\frac{1}{2}$).
- 13.51 A point 8 lks. N. of closing cor. of T. 6 S., Rs. 23 and 24 E., reestablished in May, 1900.
- 39.21 Fall 9 lks. N. of reestablished standard cor. of T. 5 S., Rs. 23 and 24 E., hereinafter described. True course and dist. of E. $\frac{1}{2}$ of S. bdy. of sec. 36, T. 5 S., R. 23 E. is therefore N. $89^{\circ}42'W.$, 39.21 chs.

RESURVEY.

The standard cor. of T. 5 S., Rs. 23 and 24 E., as reestablished in May, 1900, is a granite stone, 12x8x5 ins. above ground, firmly set, and marked and witnessed as described by the surveyor general. In place thereof, set an iron post 3 ft. long, 3 ins. in diam., 24 ins. in the ground, for reestablished standard cor. of T. 5 S., Rs. 23 and 24 E., with brass cap, marked

S C
T 6 S
R 23 E | R 24 E
S 36 | S 31

1916

Dig pits, 30x24x12 ins., crosswise on each line, E. and W., 4 ft., and N. of post, 8 ft. dist.; and raise a mound of earth 5 ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor. Thence, N. $89^{\circ}42'W.$, on a true line on S. bdy. of sec. 36. Mag. decl. $14^{\circ}00'E.$

Asc. gradually over nearly level land, thru. dense grease-wood undergrowth.

- 25.70 Intersect reestablished closing cor. of T. 6 S., Rs. 23 & 24 E., hereinbefore described.

Leave heavy, enter scattering undergrowth, brs. NE. and SW.

- 39.21 The original standard $\frac{1}{4}$ sec. cor. of sec. 36, which is a limestone, 10x5x12 ins. above ground, loosely set, and marked and witnessed as described by the surveyor general. In place thereof, set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, in mound of earth and stone, 3 ft. base, 1 ft. high, for standard $\frac{1}{4}$ sec. cor. of sec. 36, with brass cap, marked

Dependent resurvey of the 1st. Std. Par. S. thru part of R. 23 E. 31

Chains.

S C
S 36

1916

Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and
raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, N. of
cor.

Land, gently rolling. Soil, light, fine, dry, warm, sandy loam,
8 to 12 ins. deep, on sand subsoil, 2nd rate.
No timber. Undergrowth, greasewood, sage, shadscale & cactus.

32 Dependent Resurvey of 1st Std. Par. S. thru E. 24 E.

Chains.

Retracement for Resurvey.

- From reestablished standard cor. of Ts. 5 S., Rs. 23 and 24 E., hereinbefore described,
East, on a random line, on S bdy. of sec. 31.
- 40.00 No trace of original standard $\frac{1}{4}$ sec. cor.
80.00 No trace of original standard cor. of secs. 31 and 32.
Continue line and measurement S of sec. 32.
- 120.00 No trace of original standard $\frac{1}{4}$ sec. cor.
160.00 No trace of original standard cor. of secs. 32 and 33.
Continue line and measurement S. of sec. 33 (W. $\frac{1}{2}$).
- 199.40 Fall 60 lks. N. of original standard $\frac{1}{4}$ sec. cor. of sec. 33, hereinafter described.
True course and dist. from reestablished standard township cor. to this cor. is therefore S. 89° 50' E., 199.40 chs., which by proportion gives for each of south boundaries of secs. 31 and 32, a true course and distance of S. 89° 50' E., 79.76 chs., and for W. $\frac{1}{2}$ of S. bdy. of sec. 33, S. 89° 50' E., 39.88 chs.
- Thence,
East, on random line, on S. bdy. of sec. 33 (E. $\frac{1}{2}$).
40.00 Fall 22 lks. N. of original standard cor. of secs. 33 and 34, hereinafter described.
True course and dist. of E. half of S. bdy. of sec. 33 is therefore S. 89° 41' E., 40.00 chs.
- Thence,
East, on random line, on S. bdy. of sec. 34 (W. $\frac{1}{2}$).
39.88 Fall 7 lks. N. of original standard $\frac{1}{4}$ sec. cor. of sec. 34, hereinafter described.
True course and dist. of W. $\frac{1}{2}$ of S. bdy. of sec. 34 is therefore S. 89° 54' E., 39.88 chs.
- Thence,
East, on a random line, on S bdy. of sec. 34 (E. $\frac{1}{2}$).
12.18 Fall 1 $\frac{1}{2}$ lks. N. of original closing cor. of secs. 2 and 3, hereinafter described.
- 39.67 Fall 5 lks. N. of original standard cor. of secs. 34 and 35, hereinafter described.
True course and dist. of E. half of S. bdy. of sec. 34 is therefore S. 89° 56' E., 39.67 chs.
- Thence,
East, on random line, on S bdy. of sec. 35.
40.00 No trace of original standard $\frac{1}{4}$ sec. cor.
80.00 No trace of original standard cor. of secs. 35 and 36.
91.60 Fall 44 lks. N. of original closing cor. of Ts. 6 S., Rs. 24 and 25 E., hereinbefore described.
- 119.13 Fall 52 lks. N. of original standard $\frac{1}{4}$ sec. cor. of sec. 36, hereinafter described.
True course and dist. of line from standard cor. of secs. 34 and 35, to this cor. is therefore S. 89° 45' E., 119.13 chs., which by proportion gives for south bdy. of sec. 35, a true course and dist. of S. 89° 45' E., 79.42 chs., and for W. $\frac{1}{2}$ of south bdy. of sec. 36, a true course and dist. of S. 89° 45' E., 39.71 chs.
- Thence,
East, on a random line, on S. bdy. of sec. 36 (E. $\frac{1}{2}$).
39.90 Fall 18 lks. N. of original standard cor. of Ts. 5 S., Rs. 24 and 25 E., hereinafter described.
True course and dist. of E. $\frac{1}{2}$ of S. bdy. of sec. 36 is therefore S. 89° 44' E., 39.90 chs.

Chains.

RESURVEY.

From reestablished standard cor. of T. 5 S., Rs. 23 and 24 E., hereinbefore described, S.89° 50'E., on a true line, on S. bdy. of sec. 31. Mag. decl. 14°00'E.

Descend over gently rolling land, sloping gradually NE., thru. dense greasewood undergrowth.

6.20 Irrigation ditch, 10 lks. wide, 2 ft. deep, course N.20° W.; leave undergrowth, brs. N. and S.

6.50 Wagon road, brs. NW. and E.; thence along road on line, bears gradually to south.

32.00 NW. cor. of wire fence, brs. S. 20 lks. dist., along fence to south.

39.70 Wire fence, brs. N. and S.

39.88 The proportionate point for a standard $\frac{1}{4}$ sec. cor. of sec. 31.

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for standard $\frac{1}{4}$ sec. cor., with brass cap, marked

S C
 $\frac{1}{4}$ S 31

1916

Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

52.16 Proportionate point for closing cor. of secs. 5 and 6, hereinafter described.

58.00 Wagon road brs. NE. and W.

79.50 Irrigation ditch, 10 lks. wide, 2 ft. deep, course NW.

79.60 Wire fence brs. N. and S.

79.76 The proportionate point for standard cor. of secs. 31 and 32.

Set an iron post, 3 ft. long, 3 ins. in diam., 24 ins. in

Chains.

the ground for standard cor. of secs. 31 and 32, with brass cap, marked

S C
T5 S | R24E
S31 | S32

1916

Dig pits 24x18x12 ins., crosswise on each line, E. and W. 3 ft., and N. of post, 7 ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, N. of cor.

Land, gently rolling.

Soil, light, fine, dry, warm sandy loam, 4 to 8 ins. deep, on sand subsoil; 2nd rate.

No timber.

Undergrowth, greasewood, sage, shadscale, cactus, yucca and mesquite.

s. 89° 50' E., on a true line, on S. bdy. of sec. 32.

Over nearly level land, sloping gently NE.; along fence to S. 10 lks. dist.

10.30 Wire fence, brs. N. 30° W., and S. 30° E.; leave fence to S. 10 lks. dist.

11.90 Center of track, Arizona Eastern Railroad, brs. N. 30° W. and S. 30° E.

13.70 Wire fence brs. N. 30° W. and S. 30° E.

14.00 Road, from Pima to Fort Thomas, brs. N. 30° W. and S. 30° E.

27.40 Old river bank, 15 ft. high. brs. N. 30° W., and S. 30° E. Descend over bank, thence over level bottom land.

32.90 Wire fence, brs. N. and S. Enter cultivated land.

39.88 The proportionate point for standard 1/4 sec. cor., Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for standard 1/4 sec. cor., with brass cap marked

S C
S 32

1916


Dependent resurvey of 1st. 2d. 3d. 4th. thru Range 24 East. 35

Chains.

Dig pits, 18x18x12 ins., N. and W. of post, 3 ft. dist., and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

47.62 Left bank of the Gila river, 10 ft. high, brs. N. 70° W. and S. 70° E.

Set an iron post, 3 ft. long, 3 ins. in diam., 24 ins. in the ground, for meander cor. on S. bdy. of sec. 32, with brass cap, marked



1916

Dig a pit, 36x36x12 ins., 8 ft. W. of post, and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor. Thence across dry river bed.

52.14 Proportionate point for closing cor. of secs. 4 and 5, witnessed as hereinafter described.

75.67 Set flag for triangulation.

77.00 Left shore of main channel of the Gila River, course N.; thence across channel.

79.76 The proportionate point for standard cor. of secs. 32 and 33, falls in channel of river.

Land, level, and gently rolling.

Soil, light, fine, dry, warm, sandy loam, 8 to 12 ins. deep on sand subsoil, 1st rate.

Timber, a few scattering cottonwood along river.

Undergrowth, scattering greasewood, sage, shadscale, mesquite, cactus, yucca and willow.

S. 89° 50' E., on a true line on S. bdy. of sec. 33.

Across river channel.

To determine the dist. across, I proceed as follows:

From the flag at 75.67 chs. on S. bdy. of sec. 32, I set point on line on right

Chains.

Flag

S. 89° 50' E.
23° 53' (11.26)

N. 65° 53' W.

3000
S. 0° 10' W. 500
Base

bank of river, and from this point, run a base S. 0° 10' W., 5.00 chs. to a point from which the flag brs. N. 65° 53' W., which gives the dist., $\tan. 66° 03' \times \text{base}$, or $2.2513 \times 5.00 \text{ chs.} = 11.26 \text{ chs.}$ $75.67 \text{ chs.} + 11.26 \text{ chs.} = 79.76 \text{ chs.} = 7.17 \text{ chs.}$

6.40 East shore of river channel, course north; thence across river bed over sand bar.

7.17 Right bank of the Gila river, 10 ft. high, brs. NW. and SE.

Set an iron post, 3 ft. ling, 3 ins. in diam., 24 ins. in the ground, for witness cor. to standard cor. of secs. 32 and 33, and meander cor. of S. bdy. of sec. 33, with brass cap, marked

WC SC
T5S R24E
S32 S33

MC

1916

Dig pits, 24x18x12 ins. crosswise on each line, E. and W. 3 ft., and N. of post, 7 ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, N. of cor. Thence over level bottom land, thru. dense undergrowth, along wire fence on line.

10.20 Corner of wire fences bearing E., W. and S.; enter cultivated land; along fence on line, bears gradually to north.

39.00 Leave cultivated bottom land; ascend over steep bank, 20 ft. high, brs. N. 30° W., and S. 30° E.

39.88 Top of bank, brs. N. 30° W. and S. 30° E.

The original standard $\frac{1}{4}$ sec. cor., which is a mound of

Chains

stone with no marks. In place thereof,
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground for standard $\frac{1}{4}$ sec. cor., with brass cap,
marked,

S C
1 S 33

1916

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.
Cor. of wire fences bearing N., E. and W., brs. N. 36 lks. dist.
Thence,

S. 89° 41' E., on a true line on S. bdy. of sec. 33 (E. $\frac{1}{8}$).

Ascend over nearly level land, sloping gently SW., along
fence to N., 36 lks. dist.

4.62 House brs. S. 4 chs. dist.

5.52 Wire fence, brs. N. and S.; NE. fence cor. brs. N. 30 lks.
dist.

7.02 Wagon road, brs. N. and S.

12.12 Wagon road brs. N. 35° W. and S. 35° E.

12.27 Proportionate point for closing cor. of secs. 3 and 4, here-
inafter described.

17.12 Dry wash, 80 lks. wide, 4 ft. deep, course S.

26.12 Dry wash, 50 lks. wide, 2 ft. deep, course S. 30° W.

37.12 Foot of steep ascent, brs. N. and S.; ascend 40 ft. over
abrupt W. slope.

38.42 Edge of mesa, brs. N. and S.; thence over level mesa.

40.00 The original standard cor. of secs. 33 and 34, which is a
lava stone, 8x6x5 ins. above ground, firmly set, and
marked and witnessed as described by the surveyor
general. In place thereof,

Set an iron post, 3 ft. long, 3 ins. in diam., 24 ins.
in the ground for standard cor. of secs. 33 and 34,
with brass cap, marked,

S C
T 5 S R 24 E
S 33 | S 34

1916

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

Chains.

of cor.

Land, level, and gently rolling.

Soil, on river bottom, light, fine, dry, warm, rich alluvial loam of great depth; 1st rate; on E. half mile the soil is light, coarse, washed, gravelly and stony. 4 ins. deep, on gravel subsoil, 3rd rate.

Timber, a few scattering cottonwood along river.

Undergrowth, greasewood, mesquite, shadscale, sage, cactus, and yucca.

S. 89° 54' E., on a true line, on S. bdy. of sec. 34 (W. $\frac{1}{2}$).

Over nearly level mesa, sloping gently west.

39.88 The original standard $\frac{1}{4}$ sec. cor., which is a lava stone, 14x8x6 ins. above ground, firmly set, and mkd. and witnessed as described by the surveyor general. In place thereof,

Set an iron post, $\frac{3}{8}$ ft. long, 1 in. in diam., 26 ins. in the ground, for standard $\frac{1}{4}$ sec. cor., with brass cap marked

S C
 $\frac{1}{4}$ S 34

1916

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor. Thence S. 89° 56' E. on a true line, on S. bdy. of sec. 34 (E. $\frac{1}{2}$).

11.12 Edge of mesa, brs. NE. and SW.; descend 70 ft. along steep SE. slope.

12.18 Intersect original closing cor. of secs. 2 and 3, hereinafter described.

15.62 Draw, from E. turns SW.; ascend gradually along draw.

26.12 Draw from SE., turns W. on line; leave draw; ascend 50 ft. over steep W. slope.

34.12 Edge of mesa, brs. N. and S.; thence over level mesa.


39.67 The original standard cor. of secs. 34 and 35, which is a lava stone, 8x7x8 ins. above ground, loosely set; no marks, and witnessed by a mound of stone.

In place thereof,

Dependent Resurvey of the 1st St. Par. S., thru R. 24 E.

Chains.

Set an iron post, 3 ft. long, 3 ins. dia., 18 ins. in the ground to bedrock, in mound of earth and stone, 3 ft. base, 1 ft. high, for standard cor. of secs. 34 and 35, with brass cap mkd.



and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

Land, nearly level and broken.

Soil, light, coarse, gravelly and stony, 3 ins. deep on gravel subsoil; 3rd rate.

No timber.

Undergrowth, scattering greasewood, catsclaw, mesquite, cactus, sage and shadscale.

S. 89° 45' E., on a true line on S. bdy. sec. 35.

Over level mesa.

15.30 Edge of mesa, bears N. and S.; desc. 100 ft., over steep E. slope.

25.20 Wagon road, at foot of steep descent, bears N. and S. Desc. gradually across bottom of draw.

26.90 Dry wash, 20 lks. wide, 1 ft. deep, course S. 20° W.; asc. 80 ft. over a steep W. slope.

29.50 Edge of mesa, bears N. 20° E. and S. 20° W.; thence across level point of mesa.

33.30 Edge of mesa, bears N. 30° E. and S. 30° W.; desc. 90 ft. along a steep SE. slope.

37.50 Foot of steep descent, bears N. 30° E. and S. 30° W.; desc. gradually.

39.71 The proportionate point for standard 1/4 sec. cor. Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for standard 1/4 sec. cor., with brass cap mkd.



Chains.

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

51.30 Dry wash, 50 lks. wide, 2 ft. deep, course SW. Asc. gradually.


51.80 Proportionate point for closing cor. of of secs. 1 and 2,
Asc. hereinafter described.

55.80 Foot of steep ascent, bears NE. and SW.; asc. 90 ft. along
a steep NW. slope.

60.50 Edge of mesa, bears NE. and SW.; thence over rolling mesa.

79.42 The proportionate point for standard cor. of secs. 35 and
36.

Set an iron post, 3 ft. long, 3 ins. dia., 24 ins. in the
ground for standard cor. of secs. 35 and 36, with brass
cap mkd.



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N.
of cor.

Land, level, rolling and broken.

Soil, light, coarse, washed, gravelly and stony, 3 to 5
ins. deep, on gravel subsoil; 3rd rate.

No timber.

Undergrowth, scattering greasewood, sage, shadscale,
catsclaw, cactus and mesquite.

S. $89^{\circ} 45'$ E., on a true line on S. bdy. sec. 36. ($W. \frac{1}{2}$).

Over rolling mesa.

0.50 Edge of mesa, bears N. and S. 20° W.; desc. 100 ft. over
steep E. slope.

6.20 Dry gulch, course S. 20° W.; asc. 190 ft. over steep W.
slope.

17.50 Ridge, bears N. 20° E. and S. 20° W.; desc. gradually
along a steep S. slope.


39.71 The original standard $\frac{1}{2}$ sec. cor., which is a lava stone,
12x8x12 ins. above ground, firmly set, and mkd. and wit-
nessed as described by the surveyor general.

In place thereof

Dependent Resurvey of the 1st St. Par. S., thru R. 24 E.


Chains

Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for standard $\frac{1}{4}$ sec. cor., with brass cap mkd.



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor. Thence S. $89^{\circ} 44'$ E., on a true line on S. bdy. sec. 36, (E. $\frac{1}{2}$). continuing by measurement.

- 43.29 Head of draw, course SW.; asc. 50 ft. over steep W. slope.
- 6.79 Ridge, bears NE. and SW.; desc. 160 ft. along a steep SE. slope.
- 12.37 Intersecting cor. of 1st, 6th S., Rs. 24 and 25 E., reestablished as hereinbefore described.
- 28.89 Dry gulch, course SW.; asc. 200 ft. along a steep NW. slope.
- 38.69 Ridge, bears NE. and SW.; desc. gradually along a steep SE. slope.
- 39.90 The original standard cor. of T. 5 S., Rs. 24 and 25 E., which is a lava stone, 10x8x5 ins. above ground, firmly set, and mkd. and witnessed as described by the surveyor general. In place thereof Set an iron post, 3 ft. long, 3 ins. dia., 14 ins. in the ground to bedrock, in mound of earth and stone, 4 ft. base, $1\frac{1}{2}$ ft. high, for standard cor. of T. 5 S., Rs. 24 and 25 E., with brass cap mkd.



and raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Land, rolling, broken and mountainous. Soil, light, coarse, washed, shallow and rocky, 2 to 4 ins. deep on gravel subsoil; 4th rate.

Boundaries of Township 6 South, Range 24 East.
 Latitudes, departures, and closing errors.

Line designated.	True bearing.	Dist.	Latitudes.		Departures.	
			N.	S.	E.	W.
North boundary, (1st. Standard Parallel South)	N. 89° 44' W.	12.37	0.06			12.37
	N. 89° 45' W.	119.13	0.52			119.13
	N. 89° 56' W.	39.67	0.05			39.67
	N. 89° 54' W.	39.88	0.07			39.88
	N. 89° 41' W.	40.00	0.22			40.00
	N. 89° 50' W.	199.40	0.58			199.40
	N. 89° 42' W.	25.70	0.13			25.70
West boundary,	S. 0° 05' W.	39.91		39.91	0.06	
	S. 0° 03' E.	39.70		39.70	0.03	
	S. 0° 05' W.	39.19		39.19		0.06
	S. 0° 01' W.	39.88		39.88		0.01
	S. 0° 09' W.	40.05		40.05		0.11
	S. 0° 06' W.	79.40		79.40		0.14
	S. 0° 04' W.	39.76		39.76		0.05
	S. 0° 06' W.	39.76		39.76		0.07
	S. 0° 04' W.	39.88		39.88		0.05
S. 0° 06' W.	80.19		80.19		0.14	
South boundary.	S. 89° 50' E.	38.05		0.11	38.05	
	East.	39.64			39.64	
	S. 89° 42' E.	39.99		0.21	39.99	
	S. 89° 52' E.	40.18		0.09	40.18	
	S. 89° 47' E.	39.50		0.15	39.50	
	S. 89° 52' E.	79.73		0.19	79.73	
	S. 89° 49' E.	119.13		0.38	119.13	
S. 89° 42' E.	79.77		0.42	79.77		
East boundary	N. 0° 10' E.	239.10	239.10		0.70	
	N. 0° 07' E.	119.25	119.25		0.24	
	N. 0° 15' E.	79.76	79.76		0.35	
	N. 0° 23' E.	39.40	39.40		0.27	
Convergency,						0.47
Totals.			479.14	479.27	477.58	477.31
				479.14	477.31	
Error in latitude,			0.13			
Error in departure,					0.27	

Chains.	Retracement for Resurvey.
	<u>1st. Meridional Line.</u>
	From reestablished cor. of secs. 1, 2, 35 and 36 on S. bdy. of Tp., hereinbefore described,
	North, on random line, bet. secs. 35 and 36.
40.00	No trace of original $\frac{1}{4}$ sec. cor. can be found. Set temp. cor.
80.19	Fall 26 lks. E. of original cor. of secs. 25, 26, 35 and 36, hereinafter described.
	Thence,
	North, on random line, searching diligently for the original cors., and setting temp. cors. at intervals of 40 chs.
	No trace of any original cor. is found, until at
397.19	Intersect N. bdy. of Tp. (1st. Standard Parallel South) at a point 162 lks. W. of proportionate point for reestablishment of missing closing cor. of secs. 1 and 2 located by maintaining the original proportion between the closing dist. and length of E. half of S. bdy. of sec. 35.
	Return on 1st. Meridional line, adjusting the position of temp. cors. on said line to maintain the original proportions.

	<u>2nd. Meridional Line.</u>
	From reestablished cor. of secs. 2, 3, 34 and 35, on S. bdy. of Tp., hereinbefore described,
	North, on random line, bet. secs. 34 and 35 (S. $\frac{1}{2}$).
39.60	Fall 20 lks. E. of original $\frac{1}{4}$ sec. cor.
	Thence,
	North, on random line, bet. secs. 34 and 35 (N. $\frac{1}{2}$).
39.75	Fall 6 lks. W. of original cor. of secs. 26, 27, 34 and 35.
	Thence,
	North, on random line, bet. secs. 26 and 27.
40.00	No trace of original $\frac{1}{4}$ sec. cor. can be found. Set temp. cor.
79.70	Fall 21 lks. W. of original cor. of secs. 22, 23, 26 and 27.
	Thence,
	North, on random line, bet. secs. 22 and 23. (S. $\frac{1}{2}$).
39.29	Fall 34 lks. E. of original $\frac{1}{4}$ sec. cor.
	Thence,
	North, on random line, searching diligently for original cors., and setting temp. cors. at intervals of 40 chs.
	No trace of any original cor. is found, until at
120.39	Fall 65 lks. W. of point of original location of cor. of secs. 10, 11, 14 and 15, determined from original bearing tree.
	Thence,
	North, on random line, searching diligently for original cors., and setting temp. cors. at intervals of 40 chs. No trace of any original cor. is found, until at
158.50	Fall 106 lks. W. of original closing cor. of secs. 2 and 3, on N. bdy. of Tp. (1st. Std. Parallel S.) hereinafter described.
	Return on 2nd Meridional Line, adjusting the position of the temp. cors. on said line to maintain the original proportion.

	<u>3rd. Meridional Line.</u>
	From reestablished cor. of secs. 3, 4, 33 and 34, on S. bdy. of Tp., hereinbefore described,
	North, on random line, bet. secs. 33 and 34 (S. $\frac{1}{2}$).
39.93	Fall 78 lks. W. of original $\frac{1}{4}$ sec. cor.
	Thence,
	North, on random line, bet. secs. 33 and 34 (N. $\frac{1}{2}$).
39.98	Fall 12 lks. E. of original cor. of secs. 27, 28, 33 and 34.
	Thence,

Dependent Resurvey of Subdivision of T. 6 S., R. 24 E. 45

Chains.
 39.50 North, on random line, bet. secs. 27 and 28 (S. $\frac{1}{2}$).
 Fall 49 lks. E. of original $\frac{1}{4}$ sec. cor.
 Thence,
 39.90 North, on random line, bet. secs. 27 and 28 (N. $\frac{1}{2}$).
 Fall 15 lks. E. of original cor. of secs. 21, 22, 27 and 28,
 Thence,
 39.58 North on random line, bet. secs. 21 and 22, (S. $\frac{1}{2}$).
 Fall 7 lks. W. of original $\frac{1}{4}$ sec. cor.
 Thence,
 40.05 North, on random line, bet. secs. 21 and 22 (N. $\frac{1}{2}$).
 Fall 7 lks. W. of original cor. of secs. 15, 16, 21 and 22.
 Thence,
 39.98 North, on random line, bet. secs. 15 and 16. (S. $\frac{1}{2}$).
 Fall 44 lks. W. of original $\frac{1}{4}$ sec. cor.
 Thence,
 39.75 North, on random line, bet. secs. 15 and 16 (N. $\frac{1}{2}$).
 Fall 1 lk. E. of original cor. of secs. 9, 10, 15 and 16.
 Thence,
 158.68 North, on random line, searching diligently for original
 cors. and setting temp. cors. at intervals of 40 chs.
 No trace of any original cor. can be found, and at
 Intersect N. bdy. of Tp. (1st Standard Parallel South) at
 a point 62 lks. W. of proportionate point for reestab-
 lishment of closing cor. of secs. 3 and 4. This point
 is established by maintaining the original proportion
 bet. the closing dist. and length of said bdy. of
 sec. 3. Return on 3rd Mer. line, adjusting the position
 of temp. cors. on said line to maintain the original
 proportion.

4th. Meridional Line.

From the reestablished cor. of secs. 4, 5, 32 and 33, on the
 S. bdy. of the township hereinbefore described,
 39.74 North, on a random line, bet. secs. 32 and 33. (S. $\frac{1}{2}$).
 Fall 8 lks. W. from the original $\frac{1}{4}$ sec. cor.
 Thence,
 39.67 North, on a random line, bet. secs. 32 and 33 (N. $\frac{1}{2}$).
 Fall 2 lks. W. of the original cor. of secs. 28, 29, 32 and 33.
 Thence,
 40.05 North, on a random line, bet. secs. 28 and 29. (S. $\frac{1}{2}$).
 Fall 2 lks. W. of the original $\frac{1}{4}$ sec. cor.
 Thence,
 119.46 North, on a random line, searching diligently for the
 original cor., and setting temp. cors. at intervals of
 40.00 chs. No trace of any original cor. is found un-
 til at
 119.46 Fall 28 lks. E. of original cor. of secs. 16, 17, 20 and 21.
 Thence,
 39.87 North, on random line, bet. secs. 16 and 17, (S. $\frac{1}{2}$).
 Fall 2 lks. W. of original $\frac{1}{4}$ sec. cor.
 Thence,
 119.76 North on a random line, searching diligently for the
 original cors. and setting temp. cors. at intervals
 of 40.00 chs. No trace of any original cor. is found
 until at
 119.76 Fall 13 lks. W. of recognized cor. of secs. 4, 5, 8 and 9,
 hereinafter described.
 Thence,
 39.91 North, on a random line, bet. secs. 4 and 5 (S. $\frac{1}{2}$)
 Fall 1 lk. W. of original $\frac{1}{4}$ sec. cor.
 Thence,
 39.09 North, on a random line, bet. secs. 4 and 5 (N. $\frac{1}{2}$).
 Intersect N. bdy. of Tp. (1st. Std. Par. S.) 50 lks. W. of
 true point for reestablishment of missing closing
 cor. of secs. 4 and 5, located by maintaining the original
 proportion bet. the closing dist. and the N. $\frac{1}{2}$ of the bdy. of
 sec. 3. Return on Fourth Meridional Line, adjusting the position
 of temp. cors. on said line to maintain the original
 proportion.

16. Dependent resurvey of Subdivision of Township 6 S. R. 24 W.

Chains.

5th. Meridional Line.

- From the cor. of secs. 5, 6, 31 and 32, on S. bdy. of Tp., hereinbefore described,
 North, on random line, bet. secs. 31 and 32 (S. $\frac{1}{2}$).
 39.68 Fall 61 lks. E. of original $\frac{1}{4}$ sec. cor.
 Thence,
 North, on random line, bet. secs. 31 and 32 (N. $\frac{1}{2}$).
 39.69 Fall 52 lks. W. of the original cor. of secs. 29, 30, 31 and 32.
 Thence,
 North, on a random line, bet. secs. 29 and 30.
 40.00 No trace of the original $\frac{1}{4}$ sec. cor. can be found at temp. cor.
 79.50 Fall 11 lks. W. of original cor. of secs. 19, 20, 29 and 30.
 Thence,
 North, on a random line, searching diligently for original cors. and setting temp. cors. at intervals of 49.00 chs.
 No trace of any original cor. is found until at,
 119.04 Fall 26 lks. W. of original $\frac{1}{4}$ sec. cor. of secs. 17 and 18.
 Thence,
 North, on a random line, bet. secs. 17 and 18 (N. $\frac{1}{2}$).
 39.97 Fall 15 lks. W. of the original cor. of secs. 7, 8, 17 and 18.
 Thence,
 North, on a random line, searching diligently for the original cors. and setting temp. cors. at intervals of 40.00 chains. No trace of any original cor. is found, until, at
 159.61 Fall 58 lks. W. of proportionate point for reestablishment of missing closing cor. of secs. 5 and 6 on North bdy. of Tp. (1st. Std. Par. Se.) This point located by maintaining the original proportion between the closing dist. and the ~~rest~~ half of South bdy. of sec. 31.
 Return on 5th. Meridional Line, adjusting the position of temp. cors. on said line to maintain the original proportion.

1st. Latitudinal Line.

- From the reestablished cor. of secs. 25, 30, 31 and 36 on the E. bdy. of the Tp., hereinbefore described,
 West, on a random line, bet. secs. 25 and 36.
 40.00 No trace of the original $\frac{1}{4}$ sec. cor. can be found. Set temp. cor.
 80.15 Fall 88 lks. S. of original cor. of secs. 25, 26, 35 and 36.
 Thence,
 West, on a random line, bet. secs. 26 and 35 (E. $\frac{1}{2}$).
 39.87 Fall 6 lks. N. of the original $\frac{1}{4}$ sec. cor.
 Thence,
 West on a random line, bet. secs. 26 and 35 (W. $\frac{1}{2}$).
 39.44 Fall 53 lks. N. of original cor. of secs. 26, 27, 34 and 35.
 Thence,
 West, on a random line, bet. secs. 27 and 34 (E. $\frac{1}{2}$).
 39.68 Fall 60 lks. S. of the original $\frac{1}{4}$ sec. cor.
 Thence,
 West, on a random line, bet. secs. 27 and 34 (W. $\frac{1}{2}$).
 39.02 Fall 16 lks. S. for the original cor. of secs. 27, 28, 33 and 34.
 Thence,
 West, on a random line, bet. secs. 28 and 33.
 40.00 No trace of original $\frac{1}{4}$ sec. cor. can be found. Set temp. cor.
 79.86 Fall 32 lks. N. of the original cor. of secs. 28, 29, 32 and 33.
 Thence,
 West, on a random line, bet. secs. 29 and 32 (E. $\frac{1}{2}$).
 40.66 Fall 20 lks. S. of the original $\frac{1}{4}$ sec. cor.
 Thence,
 West on a random line, bet. secs. 29 and 32 (W. $\frac{1}{2}$)

Chains.

- 39.64 Fall 9 lks. S. of original cor. of secs. 29, 30, 31 and 32. Thence, West, on a random line, bet. secs. 30 and 31.
- 40.00 No trace of original $\frac{1}{4}$ sec. cor. can be found. Set temp. cor.
- 77.36 Fall 90 lks. S. of reestablished cor. of secs. 25, 30, 31 and 36, on W. bdy. of Tp., hereinbefore described.

2nd. Latitudinal Line.

- From the reestablished cor. of secs. 19 and 30, on W. bdy. of Tp. hereinbefore described, East, on a random line, bet. secs. 19 and 30.
- 38.19 No trace of original $\frac{1}{4}$ sec. cor. could be found. Set temp. cor.
- 77.40 Fall 117 lks. N. of the original cor. of secs. 19, 20, 29 and 30. Thence, East, on a random line, bet. secs. 20 and 29 (W. $\frac{1}{2}$).
- 39.98 Fall 13 lks. N. of the original $\frac{1}{4}$ sec. cor. Thence, East, on a random line,
- 40.00 No trace of original cor. of secs. 20, 21, 28 and 29 can be found. Set temp. cor.
- 40.25 Continue line and measurement. Intersect 4th. Meridional line 21 lks. S. of adjusted temp. cor. of secs. 20, 21, 28 and 29, set thereon.
- 79.74 Fall 8 lks. S. of original $\frac{1}{4}$ sec. cor. of secs. 21 and 28. Thence, East, on a random line of secs. 21 and 28 (E. $\frac{1}{2}$).
- 39.69 Fall 2 lks. S. of original cor. of secs. 21, 22, 27 and 28. Thence, East, on a random line, bet. secs. 22 and 27 (W. $\frac{1}{2}$).
- 39.69 Fall 2 lks. N. of original $\frac{1}{4}$ sec. cor. Thence, East, on a random line, bet. secs. 22 and 27 (E. $\frac{1}{2}$).
- 39.89 Fall 42 lks. N. of the original cor. of secs. 22 and 23, 26 and 27. Thence, East, on a random line, bet. secs. 23 and 26 (W. $\frac{1}{2}$).
- 39.99 Fall 36 lks. S. of the original $\frac{1}{4}$ sec. cor. Thence, East, on a random line,
- 39.08 Intersect the adjusted temp. cor. of secs. 23, 24, 25 and 26, on First Meridional Line. Continue line and measurement.
- 40.00 Set temp. cor. of secs. 23, 24, 25 and 26.
- 80.00 No trace of original $\frac{1}{4}$ sec. cor. bet. secs. 24 and 25 can be found. Set temp. cor.
- 119.41 Fall 60 lks. N. of reestablished cor. of secs. 19, 24, 25 and 30, on E. bdy. of Tp. hereinbefore described. Return on 2nd. Latitudinal Line, adjusting the positions of the temp. cors. on said line to maintain the original proportion.

3rd. Latitudinal Line.

- From reestablished cor. of secs. 13, 18, 19 and 24, on E. bdy. of Tp., hereinbefore described, West, on a random line, bet. secs. 13 and 24, (E. $\frac{1}{2}$).
- 39.87 Fall 29 lks. S. of the original $\frac{1}{4}$ sec. cor. Thence, West, on a random line,
- 40.00 No trace of original cor. of secs. 13, 14, 23 and 24 can be found. Set temp. cor. of said secs. 13, 14, 23 and 24 set thereon.
- 40.69 Continue line and measurement. Intersect First Meridional line at a point 8 lks. S. of set temp. adjusted temp. cor. of secs. 13, 14, 23 and 24 set thereon.
- 80.00 No trace of original $\frac{1}{4}$ sec. cor. bet. secs. 14 and 23 can be found.

48. Dependent resurvey of subdivision of T. 6 S. R. 24 E.

Chains.	
120.00	No trace of original cor. of secs. 14, 15, 22 and 23 can be found. Set temp. cor.
120.07	Intersect 2nd. Meridional Line at a point 32 lks. N. of the adjusted temp. cor. of secs. 14, 15, 22 and 23 set thereon.
120.00	No trace of original sec. cor. can be found. Set temp. cor.
159.26	Fall 30 lks. S. of the original $\frac{1}{4}$ sec. cor. of secs. 15 and 22. Thence, West, on a random line, bet. secs. 15 and 22 ($W. \frac{1}{2}$).
39.93	Fall 9 lks. S. of the original cor. of secs. 15, 16, 21 and 22. Thence, West, on a random line, bet. secs. 16 and 21, ($E. \frac{1}{2}$).
39.81	Fall 8 lks. S. of the original $\frac{1}{4}$ sec. cor. Thence West, on a random line, bet. secs. 16 and 21 ($W. \frac{1}{2}$).
39.77	Fall 5 lks. S. of the original cor. of secs. 16, 17, 20 and 21. Thence, West, on a random line.
40.00	No trace of original $\frac{1}{4}$ sec. cor. bet. secs. 17 and 20 can be found. Set temp. cor.
79.94	Intersect the 5th. Meridional Line, at a point 37 lks. N. of the adjusted temp. cor. of secs. 17, 18, 19 and 20 set thereon.
80.00	Continue line and measurement. No trace of original $\frac{1}{4}$ sec. cor. could be found. Set temp. cor.
120.00	No trace of original $\frac{1}{4}$ sec. cor. bet. secs. 18 and 19 could be found. Set temp. cor.
157.22	Fall 67 lks. S. of the reestablished cor. of secs. 18 and 19, on W. bdy. of Tp. hereinbefore described. Return on the Third Latitudinal Line, adjusting position of temp. cors. on said line to maintain the original proportion.

4th. Latitudinal Line.

	From the reestablished cor. of secs. 7 and 18; on W. bdy. of Tp., hereinbefore described, East, on a random line, bet. secs. 7 and 18 ($W. \frac{1}{2}$).
37.67	Fall 111 lks. N. of the original $\frac{1}{4}$ sec. cor. Thence, East, on a random line, bet. secs. 7 and 18 ($E. \frac{1}{2}$).
39.80	Fall 15 lks. N. of the original cor. of secs. 7, 8, 17 and 18. Thence, East, on a random line, bet. secs. 8 and 17 ($W. \frac{1}{2}$).
39.67	Fall 60 lks. S. of the original $\frac{1}{4}$ sec. cor. Thence, East, on a random line.
39.93	Intersect 4th Meridional line at a point 5 lks. N. of adjusted temp. cor. of secs. 8, 9, 16 and 17 set thereon. Continue line and measurement.
40.00	No trace of original $\frac{1}{4}$ sec. cor. can be found. point 5 lks. N. of adjusted temp. cor. of said secs. set thereon.
80.00	No trace of original $\frac{1}{4}$ sec. cor. of secs. 9 and 16 can be found. Set temp. cor.
119.87	Fall 16 lks. N. of original cor. of secs. 9, 10, 15 and 16. Thence, East, on a random line, bet. secs. 10 and 15 ($W. \frac{1}{2}$).
39.73	Fall 8 lks. N. of the original $\frac{1}{4}$ sec. cor. Thence, East, on a random line, bet. secs. 10 and 15 ($E. \frac{1}{2}$).
39.69	Fall 5 lks. N. of point of original location for cor. of secs. 10, 11, 14 and 15. Thence, East, on a random line, bet. secs. 11 and 14 ($W. \frac{1}{2}$).
39.86	Fall 20 lks. N. of the original $\frac{1}{4}$ sec. cor. Thence, East, on a random line,
38.76	Intersect First Meridional Line, at a point 20 lks. N. of adjusted temp. cor. of secs. 11, 12, 13 and 14 set thereon.

Dependent Resurvey of Subdivision of T. 6 S. R. 24 E.

Chains	Continue line and measurement.
40.00	No trace of original sec. cor. can be found. Set temp. cor.
80.00	No trace of the original $\frac{1}{4}$ sec. cor. bet. secs. 12 and 13 can be found. Set temp. cor.
119.44	Fall 143 lks. N. of first point for reestablished cor. of secs. 7, 12, 13 and 18 on E. bdy. of Tp. hereinbefore described. Return on Fourth Latitudinal Line, adjusting position of temp. cors. on said line, to maintain the original proportion.

<u>5th. Latitudinal Line.</u>	
	From the reestablished cor. of secs. 1, 6, 7 and 12, on E. bdy. of Tp., hereinbefore described, West, on a random line.
40.00	No trace of original $\frac{1}{4}$ sec. cor. of secs. 1 and 12 can be found. Set temp. cor.
80.00	No trace of orig. cor. of secs. 1, 2, 11 and 12 can be found. Set temp. cor.
	Continue line and measurement.
89.84	Intersect First Meridional Line at a point 21 lks. S. of adjusted temp. cor. for secs. 1, 2, 11 and 12, set thereon.
80.00	No trace of original sec. cor. can be found. Set temp. cor.
120.00	No trace of original $\frac{1}{4}$ sec. cor. of secs. 2 and 11 can be found. Set temp. cor.
159.58	Intersect 2nd. Meridional Line at a point 58 lks. S. of the adjusted tem. cor. of secs. 2, 3, 10 and 11 set thereon.
160.00	No trace of original sec. cor. can be found. Set temp. cor.
199.14	Fall 85 lks. S. of the original $\frac{1}{4}$ sec. cor. bet. secs. 3 and 10. Thence, West, on a random line.
39.78	Intersect 3rd Meridional line at a point 25 lks. N. of the adjusted temp. cor. of secs. 3, 4, 9 and 10 set thereon
40.00	Continue line and measurement to a point 25 lks. N. of adjusted temp. cor. of secs. 3, 4, 9 and 10 set thereon.
40.00	No trace of original sec. cor. can be found. Set temp. cor.
80.00	No trace of original $\frac{1}{4}$ sec. cor. cor. of secs. 4 and 9 can be found. Set temp. cor.
119.50	Fall 38 lks. S. of recognized cor. of secs. 4, 5, 8 and 9. Thence, West, on a random line.
40.00	No trace of original $\frac{1}{4}$ sec. cor. of secs. 5 and 8 can be found.
79.70	Intersect 5th. Meridional line at a point 42 lks. N. of adjusted temp. cor. of secs. 5, 6, 7 and 8 set thereon. Continue line and measurement,
80.00	No trace of original sec. cor. can be found. Set temp. cor.
120.00	No trace of original $\frac{1}{4}$ sec. cor. of secs. 6 and 7 can be found. Set temp. cor.
157.08	Fall 15 lks. S. of reestablished cor. of secs. 6 and 7, on W. bdy. of Tp. hereinbefore described. Return on 5th. Latitudinal Line, adjusting position of temp. cors. on said line to maintain the original proportions.

Dependent Resurvey of Subdivision of T.6 S., R.24 E. 51.

Chains.

From reestablished cor. of secs. 1, 2, 35 and 36 on S. bdy. of the Tp., hereinbefore described,

N. 0° 11' W., on a true line, bet. secs. 35 and 36.

Over low rolling hills; asc. gradually along steep E. slope.


15.10 Low point falls E.; descend gradually.

17.00 Small draw, 25 ft. below point, course E.; asc. gradually.

25.50 Spur, 30 ft. above draw, falls E. desc. 50 ft. along steep NE. slope.

28.50 Foot of steep descent, brs. NW. and SE.; leave low hills; enter rolling land.

40.09 1/2 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked




and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

48.00 Enter low rolling hills. bear NE* and SW.

58.20 Wagon road brs. E. and W.

80.19 The original cor. of secs. 25, 26, 35 and 36, which is a wooden post, 3 1/2 ft. long, 3 ins sq., notched and firmly set in mound of stone; no other marks. In place thereof, Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground for cor. of secs. 25, 26, 35 and 36, with brass cap marked



and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling. Soil, light, coarse, dry, warm, stony sandy loam, 4 ins. deep, on sand and decomposed granite subsoil; 3rd rate. No timber.

Undergrowth, greasewood, sage, shadscale, ocotillo, cactus and yucca.

From the reestablished cor. of secs. 25, 30, 31 and 36 on E. bdy. of the Tp., hereinbefore described,

52. Dependent Resurvey of the Subdivision of T. 6 S. R. 24 E.


Chains.	N.89° 22' W., on a true line, bet. secs. 25 and 36. Over rolling land, along road to N. 10 lks. dist.
0.10	Wagon road brs. N. and S.; continue along road to N.
0.34	Along fence to N., 37 lks. dist.
5.00	Wagon road brs. N. 89° E. and S. 89° W.
10.00	Wire fence, brs. N. 89° E. and S. 89° W.
20.05	Wire fence, brs. N. and S.; continue along fence to S., 5 lks., and road to S. 30 lks. dist.
40.07½	(Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked
	$\frac{1}{4} \frac{S 25}{S 36}$ <p>1916</p>
	Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, 3½ ft. base, 1½ ft. high, N. of cor.
40.40	Wire fence brs. N. and S.; SW. fence cor. bears S. 40 lks. dist. Road to S., turns SW.
48.00	Center of reservoir, about 16 chs. E. and W. by 8 chs. N. and S., brs. N. about 14 chs. dist.
50.00	Dry wash, 30 lks. wide, 3 ft. deep, course N.
56.00	Enter low rolling hills, brs. N. and S.
80.15	The reestablished cor. of secs. 25, 26, 35 and 36. Land, level and rolling. Soil, light, fine, dry, warm, sandy loam, 4 to 8 ins. deep, on sand subsoil, 2nd rate. No timber. Undergrowth, greasewood, sage, shadscale, ocotillo, and mesquite.
	N. 0° 29' E.; on a true line, bet. secs. 25 and 26. Over low rolling hills.

Dependent Resurvey of the Subdivision of T. 6 S., R. 24 E.

Chains.

- 10.30 Wagon road, bears NE. and SW.; leave hills, enter rolling land, bears NE. and SW.
- 28.20 Cottonwood Creek, 50 lks. wide; clear water, 8 ins. deep; sandy bottom, gentle current; course NE.
- 30.05 Wire fence, bears E. and W.; SW. fence cor. bears W. about 70 lks. dist.; thence along fence to W.


39.73 At a point 5 1/2 lks. E. of temp. cor. on 1st Mer. line. Reestablish the corner as follows: Set an iron post, 3 ft. long, 2 in. diameter, 26 ins. in the ground for a sec. cor., with brass cap marked,



dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.; and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

- 59.35 Wire fence, bears E. and W.; continue along fence to W. 20 lks. dist.
- 79.13 Wire fence, bears E. and W.; NW. fence cor. bears W. 30 lks. dist.
- 79.46 At a point 67 lks. E. of temp. cor. on 1st Meridional line, and
- 79.48 The in place of temp. cor. on 2nd Lat. line, reestablish the 26. cor. as follows:


Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground for cor. of secs. 23, 24, 25 and 26, with brass cap mkd.



and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling.
 Soil, light, fine, dry, warm sandy loam, 8 to 12 ins. deep on adobe clay subsoil; 2nd rate.
 No timber.
 Undergrowth, greasewood, sage, shadscale, cactus and willow.

- From the reestablished cor. of secs. 19, 24, 25 and 30, on E. bdy. of the Tp., hereinbefore described, N. 89° 34' W., on a true line bet. secs. 24 and 25. Over nearly level land; along road to N. 20 lks. dist., and fence on line, bears gradually to S.
- 7.80 Irrigation ditch, 15 lks. wide, 3 ft. deep, course S. 20° E.
- 10.90 NW. cor. of wire fence bears S. 20 lks. dist.
- 13.00 House, bears S. 1.50 chs. dist.; continue along road on line.
- 20.30 SW. cor. of wire fence, bears N. 30 lks. dist.
- 25.50 Irrigation ditch, 15 lks. wide, 5 ft. deep, course N. 60° E.
- 30.30 Right bank of Cottonwood Creek, 15 ft. high, bears N. and S. Wagon road ends at bank.
- 30.70 Center of stream, 50 lks. wide; clear water, 8 ins. deep; gentle current, sandy bottom; course N.
- 32.80 Left bank of Cottonwood Creek, 2 ft. high, bears N. and S. Asc. gradually.
- 39.83 At the point 30 lks. S. of temp. cor. on 2nd Lat. line, reestablish the cor. as follows: set an iron post 3 ft. long, in a 9 in. diam., 26 in. in the ground, for sep. cor., with brass cap, marked



1/4 524
1/4 825
1916
- dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.; and raise a mound of earth, 3½ ft. base, 1½ ft. high, N. of cor.
- 46.80 NE. cor. of wire fence, bears S. 25 lks. dist.
- 75.00 House, bears N. 2 chs. dist.
- 79.66 The reestablished cor. of secs. 23, 24, 25 and 26. Land, gently rolling. Soil, light, fine, dry, warm sandy loam, 6 to 10 ins. deep on sand subsoil; 2nd rate. No timber.

Chains.

Undergrowth, greasewood, sage, shadscale, mesquite & cactus.

cactus.


N. 0° 09' E., on a true line, bet. secs. 23 and 24.

Over rolling land; true line bet. sec. 23 and 24.

39.73 At a point 77 1/2 lks. E. of temp. cor. on 1st Meridional line,

reestablish the corner as follows:

Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for 1/4 sec. cor., with brass cap mkd.



dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.; and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

39.80 SW. cor. of wire fence bears E. 20 lks. dist.; SE. cor. of wire fence bears W. 30 lks. dist.; wagon road bears N. and SW.; thence along fenced highway.


59.80 NW. cor. of wire fence bears E. 10 lks. dist.; partition fence turns W. from fence to W. 30 lks. dist.; continue along fence to W.

76.00 Leave wagon road, turns NE.

79.00 Partition fence turns W. from fence to W., 30 lks. dist.; continue along fence to W.

79.46 At a point 88 lks. E. of temp. cor. on 1st Mer. line, and 38 lks. N. of temp. cor. on 3rd. Lat. line, reestablish this cor. as follows:

Set an iron post, 3 1/2 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 13, 14, 23, and 24, with brass caps marked.



dig pits, 18x18x12 ins., in each sec., 5 1/2 ft. dist.; and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, rolling.

Soil, light, fine, dry, warm sandy loam, 6 to 10 ins.

Chains.

deep on sand subsoil; 2nd rate.

No timber.

Undergrowth, greasewood, mesquite, sage, shadscale and cactus.

From reestablished cor. of secs. 13, 18, 19, and 24, on E. bdy. of the Tp., hereinbefore described,

N. $89^{\circ}.35'$ W., on a true line bet. secs. 13 and 24, (E. $\frac{1}{2}$).

Over level land, along fenced highway, 50 lks. wide.

3.00 H. J. Anderson's house, bears N. 1.50 chs. dist.

3.90 House, bears S. 1.50 chs. dist.

7.20 Irrigation ditch, 15 lks. wide, 3 ft. deep, course N. 10° W.

9.50 House, bears N. 1.50 chs. dist.

11.80 House, bears N. 1.50 chs. dist.

13.50 Partition fence turns N. from fence to N., 25 lks. dist.

18.90 House, bears N. 1.50 chs. dist.

19.70 SW. cor. of wire fence, bears N. 25 lks. dist.


19.90 Wagon road, bears N. and E.

20.40 Wire fence, bears N. and S.; end of fence to S. 25 lks. dist.; leave fenced highway, turns N.; enter cultivated land.

39.87 Intersect recognized sec. cor., which is a 3 in. angle iron, 15 ins. long, set 12 ins. in the ground. This cor. was identified by H. J. Anderson, resident settler, having been set by him in place of the old cor. which was destroyed in clearing the land for cultivation.

In place thereof

Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.



dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.;

Dependent Resurvey of the Subdivision of T. 6 S., R. 24 E.

Chains.

- and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor. Thence N. $89^{\circ} 53'$ W., on a true line bet. secs. 13 and 24, ($W.\frac{1}{2}$). continuing by measurement.
- 40.18 Wire fence, bears N. and S.
- 45.43 Wire fence, bears NW. and SE.; leave cultivated land.
- 46.53 Center of track, Arizona Eastern Railroad, bears NW. and SE.
- 47.63 Wire fence, bears NW. and SE.; thence over rolling land.
- 21.23 Irrigation ditch, 15 lks. wide, 2 ft. deep, course NW.
- 23.73 Wire fence, bears NW. and SE.
- 25.93 Wagon road, from Pima to Fort Thomas, bears NW. and SE.
- 38.93 Wagon road, bears N. and S.
- 39.81 The reestablished cor. of secs. 13, 14, 23 and 24.
Land, level and rolling.
Soil, light, fine, dry, warm, rich sandy loam, 6 to 10 ins. deep on sand subsoil; 1st rate.
Timber, scattering cottonwood along highway.
Undergrowth, greasewood, mesquite, sage, shadscale and cactus, W. of railroad.


- N. $0^{\circ} 08'$ E., on a true line bet. secs. 13 and 14.
Over rolling land; along fence to W. 25 lks. dist., and road to E. 90 lks. dist.
- 12.30 House, bears W. 2 chs. dist.
- 18.70 Road, from Pima to Fort Thomas, bears N. and SE. Cor. of fences bearing N. and SE., bears E. 60 lks. dist.; thence along highway 90 lks. wide.
- 19.20 Irrigation ditch, 10 lks. wide, 2 ft. deep, course NW.
- 20.70 House, bears E. 2 chs. dist.
- 20.90 House, bears W. 2 chs. dist.
- 32.30 Cor. of wire fences bearing NW. and S., bears N. 45° W. 50 lks. dist. Cor. of wire fences bearing S. and SE., bears S. 45° E. 80 lks. dist.
- 33.40 Center of track, Arizona Eastern Railroad, bears NW. and SE.

Chains.

34.50 Cor. of wire fences bearing N. and NW., bears N. 45° W. 50 lks. dist. Cor. of wire fences bearing N. and SE., bears S. 45° E. 80 lks. dist.

39.70 NW. cor. of wire fence bears E. 55 lks. dist.; partition fence turns W. from fence to W. 35 lks. dist.

39.73 At a point 97 lks. E. of temp. corner on lat. Mer. line, reestablish the corner as follows: set a granite post, 3 ft. long, in a hole, 36 ins. in the ground for a sec. cor., with brass cap, mkd.,



Highway prevents construction of accessories; therefore, I measure N. 45° E. 77 lks. to E. bdy. of highway, and set a basalt stone, 17x11x6 ins., 12 ins. in the ground for witness cor. to $\frac{1}{4}$ sec. cor.; mkd. WC $\frac{1}{4}$ on W. face; dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.; and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high W. of cor. From the $\frac{1}{4}$ sec. cor. I measure S. 45° W. 46 lks. to W. bdy. of highway, and set a basalt stone, 10x10x8 ins., 7 ins. in the ground for witness cor. to $\frac{1}{4}$ sec. cor., mkd. WC $\frac{1}{4}$ on W. face; dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.; and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Thence over level bottom land.

39.80 Intersection of roads, bearing N., S. and E.

39.95 SW. cor. of wire fence, bears E. 55 lks. dist.

46.00 House, bears E. 2.50 chs. dist.

52.40 House, bears E. 2.00 chs. dist.

59.30 Partition fence turns W. from fence to W., 50 lks. dist.

60.40 House, bears W. 2 chs. dist.

66.50 NE. cor. of wire fence, bears W. 60 lks. dist.

67.00 Road, from Pima to Fort Thomas, turns W.; continue along road on line, bears gradually to W.

67.50 Irrigation ditch, 10 lks. wide, 2 ft. deep, course W.

Dependent Resurvey of the Subdivision of T. 6 S., R. 24 E. 59

Chains


67.80 SW. cor. of wire fence, bears W. 30 lks. dist.

68.50 House, bears W. 3 chs. dist.

79.46 At a point 106 lks. S. of temp. cor. of 1st Mer. line, & 120 lks.

S. of temp. cor. on 4th. lat. line, reestablish cor. as follows:

Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground for cor. of secs. 11, 12, 13 and 14, with brass cap mkd.



dig pits, 18x18x12 ins., in each sec. 5 1/2 ft. dist.; and raise a mound of earth, 4 ft. base, 2 ft. high. W. of cor. Land, level and rolling.

Soil, light, fine, dry, warm, rich alluvial sandy loam, 8 to 12 ins. deep, on sand subsoil; 1st rate.

No timber.

Undergrowth, scattering greasewood, sage, shadscale, and mesquite.

From point for reestablished cor. of secs. 7, 12, 13 and 18, on E. bdy. of the Tp., hereinafore described,


N. 89° 50' W., on a true line bet. secs. 12 and 13.

Across main channel of the Gila River, course N. 30° W.

7.70 Left shore of channel, course N. 30° W.; asc. over bank 15 ft. high.

8.00 Point for meander cor. falls on left bank of river, bears N. 30° W. and S. 30° E.; which was determined by course and dist. from the witness cor. to cor. of secs. 7, 12, 13 and 18, on E. bdy. of the Tp., at N. 30° 23' W. 15.76 chs. to above described point,

Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground for meander cor. of frac. secs. 12 and 13, with brass cap mkd.



Chains.

dig a pit, 36x36x12 ins., 8 ft. W. of post; and raise a mound of earth, 4 ft. base, 2 ft. high. W. of cor.

Thence over level bottom land, thru dense willow undergrowth.

8.90 E. end of wire fence bears N. 45 lks. dist.; thence along fence to N.

10.10 Wire fence, bears N. and S.; leave undergrowth, enter cultivated land.


20.80 Wire fence, bears NE. and SW.; leave fence to N.

21.60 Irrigation ditch, 10 lks. wide, 4 ft. deep, course NW.

27.10 Wire fence, bears N. and S.

33.10 Left bank of the Gila River, 6 ft. high, bears N. 60° E. and S. 70° W.

Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground for meander cor. of frac. secs. 12 and 13, with brass cap mkd.




dig a pit, 36x36x12 ins., 8 ft. E. of post; and raise a mound of earth, 4 ft. base, 2 ft. high, E. of cor.

Thence over dry river bed.

39.81 The proportionate point for 1/4 sec. cor. (3 1/2 lks. S. of temp. cor.) falls in bed of river:

45.20 Left bank of the Gila River, 6 ft. high, bears N. 65° W. and S. 80° E.

Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground for meander cor. of frac. secs. 12 and 13, with brass cap mkd.




dig a pit, 36x36x12 ins., 8 ft. W. of post; and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Over level cultivated land.

Dependent Resurvey of the Subdivision of T. 6 S., R. 24 E.

Chains.

45.60 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for witness cor. to 1/4 sec. cor., with brass cap mkd.



dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.; and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

50.40 Wire fence, bears N. and S.

50.60 Wagon road, bears N. and S.

50.80 Wire fence, bears N. and S.

69.30 Wire fence, bears NW. and SE.

71.00 Irrigation ditch, 10 lks. wide, 2 ft. deep, course NW.

71.20 Wire fence, bears NW. and SE.

79.40 Wire fence, bears N. and S.

79.62 The reestablished cor. of secs. 11, 12, 13 and 14. Land, level.

Soil, light, fine, dry, warm, rich alluvial sandy loam, 8 to 12 ins. deep on sand subsoil; 1st rate.

Timber, scattering cottonwood.

Undergrowth, scattering willow, sage, shadscale and mesquite.

N. 0° 04' E., on a true line bet. secs. 11 and 12.


Over level bottom land, along fenced highway, 55 lks. wide.

7.80 Irrigation ditch, 10 lks. wide, 2 ft. deep, course N. 60° W.

19.95 Partition fence turns E. from fence to E.

22.52 Left bank of the Gila River, 8 ft. high, bears NW. and S. 85° E.

Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground for meander cor. of frac. secs. 11 and 12, with brass cap mkd.



Chains.


dig a pit, 36x36x12 ins., 8 ft. S. of post; and raise a mound of earth, 4 ft. base, 2 ft. high, S. of cor.

Fenced highway ends at river bank; thence over dry river bed.

27.20 Channel, 2 chs. wide, 3 ft. deep, course W.

37.30 Bank, 4 ft. high, bears N. 60° W. and S. 60° E.; thence across small island, thru scattering cottonwood timber, and dense willow undergrowth.

39.73 At a point 110 lks. E. of temp. cor. on 1st Mer. Line, reestablish the cor. as follows: set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 2nd sec. cor., with brass cap, mkd.,



from which

A cottonwood, 8 ins. dia., bears S. 72° E. 24 lks. dist.; mkd. $\frac{1}{4}$ S 12 B T.

A cottonwood, 7 ins. dia., bears S. 61° W. 64 lks. dist.; mkd. $\frac{1}{4}$ S 11 B T.

42.30 Bank, 3 ft. high, bears E. and W.; leave island, bears E. about 10 chs. and W. 5 chs. dist.; thence over level bed of river.

57.27 Left shore of main channel of Gila River, ^{4 chs. wide,} course W.


Set flag for triangulation. To determine the dist. across channel, I set a point on line on right bank of river, and from this point run a base S. 81° 17' W. 2.40 chs. to a point from which the flag on left shore bears S. 30° 36' E.; therefore, the dist. is

$$\frac{\sin 68^{\circ}07'}{\sin 30^{\circ}40'} \times \text{base, or } \frac{0.928 \times 2.4}{0.510} = 4.37 \text{ chs.}$$

57.27 chs. + 4.37 chs. gives


61.64 To right bank of river, 5 ft. high, bears E. and W.

Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground for meander cor. of frac. secs. 11 and 12, with brass cap mkd.



Dependent Resurvey of the Subdivision of T. 6 S., R. 24 E.

Chains.



dig a pit, 36x36x12 ins., 8 ft. N. of post, and raise a mound of earth, 4 ft. base, 2 ft. high, N. of cor.

Thence over level bottom land, along fenced highway, 50 lks. wide.

73.50 Wire fence, bears N. 0° 30' E. and S. 0° 30' W.; leave highway.

79.40 Wire fence, bears E. and W.


79.46 At a point 114 lks. E. of temp. cor. on 1st Mer. line, and 21 lks.

N. of temp. cor. on 5th Nat. line, reestablish the cor. as follows:

Low set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in

ground, for cor. of secs. 1, 2, 11 and 12, with

brass cap marked



dig pits, 18x18x12 ins., in each sec., 5 1/2 ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, level.

Soil, on S. side of river, light, fine, dry, warm, rich

alluvial sandy loam, 8 to 12 ins. deep on sand sub-

soil; 1st rate; on N. side of river the soil is

dark, fine, dry, warm, rich, alluvial, sandy clay

loam, 10 to 14 ins. deep on clay subsoil; 1st rate.

Timber, scattering cottonwood.

Undergrowth, willow, mesquite, sage and shadscale.

From the reestablished cor. of secs. 1, 2, 11 and 12, on

E. bdy. of the Tp., hereinbefore described,

N. 89° 51' W., on a true line bet. secs. 1 and 12.

Over level land, across highway.

0.35 Wire fence, bears N. and S.; leave highway, enter cultivated land; along fence to S., 5 lks. dist.

16:50 Wire fence bears N. and S.; cor. of fences bearing N., E.

chains.

and NW., bears S. 10 lks. dist.


16.65 Wire fence, bears NW. and SE.; leave cultivated land, enter fenced highway, 50 lks. wide.

16.90 Wagon road, bears W. and SE.

29.55 Partition fence turns S. from fence to S. 30 lks. dist.

39.70 Partition fence turns N. from fence to N. 15 lks. dist.

39.85 At appointment of temporary 5th. Lat. line, reestablish the cor. as follows: Set an iron post 3 ft. long, in a diameter, 26 ins. in the ground, for a sec. cor., with brass cap, marked



dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.; and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

40.00 Partition fence turns S. from fence to S. 35 lks. dist.

40.80 House, bears N. 1 ch. dist.

49.65 Partition fence turns N. from fence to N.

58.55 Partition fence turns S. from fence to S.

71.70 Wire fence, bears E. and W.; leave highway, along edge of cultivated land.

79.15 Wire fence, bears N. and S.; SW. fence cor. bears S. 5 lks. dist.; NW. cor. of wire fence bears S. 60 lks. dist.; enter highway.

79.40 Wagon road, bears N. and S.

79.65 Wire fence bears N. and S.; leave highway.

79.70 The reestablished cor. of secs. 1, 2, 11 and 12. Land, level bottom.

Soil, dark alluvial, fine, dry, warm, rich sandy clay

loam, 10 to 15 ins. deep on clay subsoil; 1st rate.


Timber, scattering cottonwood along highway.

Undergrowth, scattering sage and shadscale.


N. 0° 21' E., on a true line bet. secs. 1 and 2.

Over level, cultivated bottom land; along fence to E., 5

Dependent Resurvey of the Subdivision of T. 6 S., R. 24 E. 65

Chains.	lks. dist.
4.30	House, bears W. 2 chs. dist.
19.70	Cor. of wire fences, bearing N., S., and W. Partition fence turns E. from fence to E. 50 lks. dist. Leave field, enter highway; thence along fenced road.
37.70	House, bears W. 2 chs. dist.
39.00	NE. cor. wire fence bears W. 5 lks. dist.; NW. cor. wire fence bears E. 45 lks. dist.
39.65	Intersection of roads, bearing E., W. and S.
39.73	At a point 138 lks. E. of temp. corner 1st Mer. line, reestablish the corner as follows: Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for base corner, with brass cap, marked
	
	dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.
40.05	Wire fence, bears E. and W.; leave highway, enter cultivated land, along fence to E. 25 lks. dist.
42.00	House, bears W. 3 chs. dist.
62.00	Irrigation ditch, 10 lks. wide, 2 ft. deep, course W.
68.70	Wire fence, bears E. and W.; end of fence to E. about 30 lks. dist. Leave level cultivated land, Asc. 60 ft. over a steep S. slope.
70.60	Spur, falls S. 80° W.; desc. 50 ft. over a steep NW. slope.
73.00	Foot of steep descent, bears NE. and SW.; thence over level bottom land.
79.35	Intersect the proportionate point for closing cor. of secs. 1 and 2 on 1st. Std. Parallel South. Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to bedrock, in mound of earth and stone, for closing cor. of secs. 1 and 2, on S. bdy. sec. 35, T. 5 S., R. 24 E., with brass cap mkd.

Chains.



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, S. of cor.

From this cor. the reestablished standard cor. of secs. 35 and 36, T. 5 S., R. 24 E., hereinbefore described, bears S. $89^{\circ} 45'$ E. 27.65 chs. dist.

Land, mostly level bottom, broken by sharp spur at N. end of mile.

Soil, dark, fine, dry, warm, rich, alluvial sandy clay loam, becomes gravelly and stony at N. end of mile; 1st and 3rd rate.


Timber, scattering cottonwood along highway.

Undergrowth, scattering greasewood, mesquite, sagebrush and shadscale.

From the reestablished cor. of secs. 2, 3, 34 and 35, on S. bdy. of the Tp., hereinbefore described, N. $0^{\circ} 17'$ W., on a true line bet. secs. 34 and 35, ($S. \frac{1}{2}$). Over level cultivated land.

- 0.40 Wire fence, bears E. and W. Leave cultivated land, enter scattering undergrowth.
- 3.00 Cottonwood Creek; Clear water, 8 ins. deep; gentle current over gravel bottom, 80 lks. wide; course NE.
- 15.60 Leave level land, bears N. 70° E. and S. 70° W.; asc. 90 ft. over a steep S. slope.
- 25.00 Spur, falls SE.; desc. 70 ft. over a steep NE. slope.
- 28.90 Draw, course S. 80° E.; asc. 80 ft. over an abrupt S. slope.
- 31.50 Rim of mesa, bears E. and W.; thence over rolling mesa.
- 39.60 The original $\frac{1}{4}$ sec. cor., which is a granite stone, $15 \times 8 \times 8$ ins., firmly set, and mkd. and witnesses as described by the surveyor general. In place thereof set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap mkd.

Chains.




and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor. Thence

N. 0° 05' E., on a true line bet. secs. 34 and 35, (N. ¼). continuing by measurement.

23.90 Road, bears E. and W.

39.75 The original cor. of secs. 26, 27, 34 and 35, which is a wooden stake, 3½ ft. long, 3 ins. diam., loosely set in mound of stone, and mkd. as described by the surveyor general. In place thereof

Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground for cor. of secs. 26, 27, 34 and 35, with brass cap mkd.



and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, level bottom and rolling mesa.

Soil, light, coarse, gravelly and stony, 3 to 6 ins. deep on gravel subsoil, 3rd rate.

No timber.

Undergrowth, greasewood, sagebrush, shadscale, cactus, yucca and ocotillo.

From the reestablished cor. of secs. 25, 26, 35 and 36,

S. 89° 55' W., on a true line bet. secs. 26 and 35. (E. ¼)

Over low rolling hills, thru dense undergrowth.

7.00 Road, bears NE. and SW.; leave rolling hills, enter level and gently rolling bottom land, bears NE. and SW.

16.50 Cottonwood Creek; clear water, 6 ins. deep; gentle current over gravel bottom, 1 chain wide; course NE.

32.00 House, bears S. about 15 chs. dist.

Dependent Resurvey of the Subdivision of T. 6 S., R. 24 E.


Chains.

39.87

The original $\frac{1}{4}$ sec. cor., which is a wooden stake, 3 ins. dia., 6 ins. above ground, firmly set, the top having been burned and broken off. Marks obliterated by fire.

In place thereof

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap mkd.



dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.,

and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N.

of cor. Thence

S. $89^{\circ} 14'$ W., on a true line bet. secs. 26 and 35, ($7\frac{1}{2}$).

continuing by measurement.

13.73

Leave level land, bears N. and S.; asc. 90 ft. over a steep E. slope.

17.03

Rim of mesa, bears N. and S.; thence over gently rolling mesa.

28.23

Road, bears N. 20° E. and S. 20° W.

39.44

The reestablished cor. of secs. 26, 27, 34 and 35.

Land, level and rolling.

Soil, light, coarse, dry, warm, gravelly and stony.

sandy loam, 4 to 8 ins. deep on gravel subsoil,

3rd rate.

No timber.

Undergrowth, greasewood, sagebrush, shadscale, cactus,

yucca, ocotillo and mesquite.

Dependent Resurvey of the Subdivision of T. 6 S., R. 24 E.


Chains

N. 0° 09' E., on a true line bet. secs. 26 and 27.
Over rolling mesa.

13.60 Edge of mesa, bears NE. and SW.; desc. 75 ft. along a steep NW. slope.

15.00 Foot of steep descent, bears NE. and SW. Enter bottom of draw, from SW. turns N. on line; thence along draw.

39.75 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for witness cor. to 1/4 sec. cor., with brass cap mkd.



dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.; and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

39.85 The proportionate point for 1/4 sec. cor. (10 1/2 lks. E. of temp. cor. on 2nd Mer. line) falls in bottom of wash; not set, as it would be destroyed if it would be destroyed.


40.10 Dry wash, 50 lks. wide, 3 ft. deep, course NW.

62.00 Leave draw, turns NW.; thence over rolling land.

79.70 The original cor. of secs. 22, 23, 26 and 27, which is a granite stone, 14x10x6 ins. above ground, firmly set, and mkd. and witnessed as described by the surveyor general.

In place thereof

Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground, for cor. of secs. 22, 23, 26 and 27, with brass cap mkd.



and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling.

Soil, light, coarse, dry, warm, gravelly and stony sandy loam, 4 to 8 ins. deep on gravel subsoil; 3rd rate.

No timber.

Undergrowth, sagebrush, shadscale, greasewood, cactus,


Chains.

yucca and ocotillo.

From the reestablished cor. of secs. 23, 24, 25 and 26, West, on a true line bet. secs. 23 and 26. (E. $\frac{1}{2}$)

Over rolling land:

- 0.45 Wagon road, bears N. and S.
- 12.70 Foot of steep ascent, bears N. and S.; asc. 100 ft. over a steep E. slope:
- 17.00 Edge of mesa, bears N. and S.; thence over rolling mesa.
- 27.30 Wagon road, bears N. 20° E. and S. 20° W.
- 30.00 Desc. 35 ft. over a gradual W. slope.
- 37.00 Bottom of draw, course N. 10° E.; asc. 50 ft. over a gradual E. slope.
- 39.75 The original $\frac{1}{4}$ sec. cor., which is a granite stone, 12x8 x5 ins. above ground, firmly set, and mkd. and witnessed as described by the surveyor general. In place thereof Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap mkd.



and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor. Thence S. 89° 29' W., on a true line bet. secs. 23 and 26, (W. $\frac{1}{2}$).

- 6.75 continuing my measurement,
- 16.75 Top of ascent, bears N. and S.; continue over rolling mesa.
- 26.950 Edge of mesa, bears N. and S.; desc. 110 ft. over a steep W. slope.
- 37.750 Foot of steep descent, bears N. and S.; desc. gradually.
- 39.99 The reestablished cor. of secs. 23, 24, 25 and 26. Land, rolling and broken. Soil, light, coarse, gravelly and stony, 3 to 6 ins. deep on gravel subsoil; 3rd and 4th rate.


Dependent Resurvey of the Subdivision of T. 6 S., R. 24 E.

Chains

No timber.
Undergrowth, greasewood, sage, shadscale, yucca, ocotilla, cactus and mesquite.


N. 0° 30' W., on a true line bet. secs. 22 and 23. (S. 1/2).
Over rolling land.

32.00 Leave rolling, enter level land, bears E. and W.
39.29 The original 1/4 sec. cor., which is a granite stone, 16x12x8 ins. above ground, firmly set, and mkd. and witnessed as described by the surveyor general.
In place thereof
Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for 1/4 sec. cor., with brass cap mkd.



dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.; and raise and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, W. of cor. Thence
N. 0° 49' E., on a true line bet. secs. 22 and 23, (N. 1/8).
continuing my measurement,

40.01 Leave level land, bears NW. and SE.; asc. 50 ft. along a steep SW. slope.
42.74 Edge of mesa, bears NW. and SE.; thence over level mesa.
49.21 Edge of mesa, bears NE. and SW.; desc. 40 ft. along a steep NW. slope.
25.21 Foot of descent, bears NE. and SW.; thence over level land.
40.13 At a point 57 lks. E. of temp. cor. on 2nd Mer. line, and 32 lks. S. of temp. cor. on 3rd Lat. line, reestablish the cor. as follows:
Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground for cor. of secs. 14, 15, 22 and 23, with brass cap mkd.



Chains.

from which

A mesquite, 6 ins. dia., bears S. 40° W. 14 lks. dist.;
mkd. T 6 S R 24 E S 22 B T.

No other trees within limits; raise a mound of stone, 2
ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, level, rolling and broken.

Soil, light, coarse, gravelly and stony, 4 to 8 ins.

deep on gravel subsoil; 3rd rate.

No timber.

Undergrowth, greasewood, sage, shadscale, cactus, yucca
and ocotillo.

From the reestablished cor. of secs. 13, 14, 23 and 24,
S. $89^{\circ} 43'$ W., on a true line bet. secs. 14 and 23.

Asc. gradually over rolling land.


0.25 Wire fence, bears N. and S.; along fence to S., 45 lks.
dist.

5.50 Top of ascent, bears N. and S.; thence over low rolling
mesa.

24.80 Dry wash, 30 lks. wide, 3 ft. deep, course N.

39.80 Wire fence, bears N. and S.; end of fence bearing E.,
bears S. 35 lks. dist.

39.84 At a point 12 lks. S. of fence, corner 3rd lat. line, reestab-
lish the cor. as follows: Set an iron post, 3 ft. long, 1 in.
in diam., 26 ins. in the ground, for a sec. cor., with a brass
cap, marked,



dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.;
and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N.
of cor.

78.30 Edge of mesa, bears N. and S.; desc. 40 ft. over a steep
W. slope.

79.00 Foot of steep descent, bears N. and S.; desc. gradually.

Dependent Resurvey of the Subdivision of T. 6 S., R. 24 E.

Chains

79.69 The reestablished cor. of secs. 14, 15, 22 and 23.
 Land, gently rolling.
 Soil, light, fine, dry, warm sandy loam, 4 to 8 ins. deep on sand and gravel subsoil; 2nd rate.
 No timber.
 Undergrowth, greasewood, sage, shadscale, mesquite, cactus and yucca.

N. 0° 07' E., on a true line bet. secs. 14 and 15.
 Over level land.

3.00 Leave level land, bears N. 30° W. and S. 30° E.; asc. 40 ft. along a steep SW. slope.
 6.30 Edge of mesa, bears N. 30° W. and S. 30° E.; thence over level mesa.
 18.80 Edge of mesa, bears NE. and SW.; desc. 50 ft. along a steep NW. slope.
 21.50 Foot of steep descent, bears NE. and SW.; thence over level land.
 40.13 At a point 61 lks. E. of temp. cor. on 2nd Mer. line, reestablish there a cor. as follows: Set an iron post 3 ft. long, the ground diam., 26 ins. in, the ground, for 1st sec. cor., with brass cap marked



dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.; and raise a mound of earth, 3½ ft. base, 1½ ft. high, W. of cor.

43.90 Irrigation ditch, 20 lks. wide, 3 ft. deep, course SW.
 44.80 Bank, 4 ft. high, bears NE. and SW.; enter dry wash, course NE.
 50.40 Bank, 4 ft. high, bears N. 60° E. and S. 60° W.; leave dry wash.
 52.50 Enter rolling land, bears NE. and SW.
 53.50 Irrigation ditch, 20 lks. wide, 4 ft. deep, course NE.

Chains.


60.10 Wire fence, bears E. and W.

67.70 Irrigation ditch, 20 lks. wide, 4 ft. deep, course NW.

69.50 Leave rolling, enter level bottom land, bears NW. and SE.

80.26 Point of original location of original cor. of secs. 10, 11, 14 and 15, at SW cor. of wire fence, and determined from original bearing trees. that this point.

Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground for cor. of secs. 10, 11, 14 and 15, with brass cap mkd.



from which

A mesquite, 7 ins. dia., bears N. 43° E. 95 lks. dist.; mkd. T 6 S R 24 E S 11 B T.

An original bearing tree, a mesquite, 23 ins. dia., bears S. 67° E. 172 lks. dist., mkd. SRXXIVEXIV. Beside old markings I add T 6 S R 24 E S 14 B T.

No other trees within limits; dig pits, 18x18x12 ins., in each sec., 5 1/2 ft. dist.; and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, level and rolling.

Soil, light, fine, dry, warm sandy loam, 6 to 10 ins. deep on sand subsoil; 2nd rate.

No timber.

Undergrowth, greasewood, mesquite, sage, shadscale and cactus.

From the reestablished cor. of secs. 11, 12, 13 and 14, N. 89° 43' W.; on a true line bet. secs. 11 and 14. (E. 1/2). Over level bottom land, across highway.


0.15 Wagon road, bears N. and S.

0.30 Wire fence, bears N. and S.; leave highway, enter cultivated land.

19.80 Wire fence, bears N. and S.; along fence to N. 5 lks. dist.

Dependent Resurvey of the Subdivision of T. 6 S., R. 24 E.

Chains


- 30.00 Wire fence, bears N. and S.; cor. of fences bearing N., S., E. and W., bears N. 10 lks. dist.
 - 38.20 House, bears N. about 4.50 chs. dist. House, bears S. about 6 chs. dist.
 - 38.50 Irrigation ditch, 20 lks. wide, 5 ft. deep, course NW.
 - 39.70 Wire fence, bears N. and S.; NW. fence cor. bears N. 5 lks. dist.; leave cultivated land.
 - 39.82 Intersection recognized $\frac{1}{4}$ sec. cor., which is an iron pipe, 1 in. dia., 12 ins. long, driven 12 ins. in the ground; and identified by C. B. Boren and P. A. Norton, resident settlers, as having been set in place of the original cor. In place thereof Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap mkd.
- 
- dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.; and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor. There is a N. $89^{\circ}43' W.$, on true line, bet. secs. 11 and 14 ($7\frac{1}{2}$).
 - 40.28 Enter wagon road, bears W. and S.; along road on line.
 - 40.38 SE. cor. of wire fence, bears N. about 50 lks. dist.
 - 44.58 House, bears S. 1 ch. dist.
 - 43.98 House, bears N. 2 chs. dist.
 - 49.38 Fairview post office and store, bears N. 1 ch. dist. Fence to N. turns NW. at store.
 - 49.58 Road, from Pima to Fort Thomas, bears N. $60^{\circ} W.$ and S. $60^{\circ} E.$
 - 20.28 wire fence, bears N. $60^{\circ} W.$ and S. $60^{\circ} E.$
 - 21.38 Center of track, Arizona Eastern Railroad, bears N. $60^{\circ} W.$ and S. $60^{\circ} E.$
 - 22.48 Wire fence, bears N. $60^{\circ} W.$ and S. $60^{\circ} E.$
 - 25.38 Fairview freight depot, bears N. 1 ch. dist.
 - 34.78 Dry wash, 50 lks. wide, 8 ft. deep, course N.

Dependent Resurvey of the Subdivision of T. 6 S., R. 24 E.

Chains.

- 60.20 Leave cultivated land, enter heavy timber and undergrowth, bears E. and W.
- 61.30 Wire fence, bears E. and W.; continue along fence to W.
- 67.45 Wire fence, bears E. and W.; NW. fence cor. bears W. about 50 lks. dist.
- 75.95 Left bank of the Gila River, 4 ft. high, bears N. 53° W. and S. 75° E.

Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground for meander cor. of frac. secs. 10 and 11, and witness cor. to cor. of secs. 2, 3, 10 and 11, with brass cap mkd.



from which

A cottonwood, 6 ins. dia., bears N. 5° E. 8 lks. dist.; mkd. WC T6S R24E S2 BT.

A cottonwood, 5 ins. dia., bears S. 4° E. 9 lks. dist.; mkd. WC T6S R24E S11 BT.

A cottonwood, 8 ins. dia., bears S. 7° W. 38 lks. dist.; mkd. WC T6S R24E S10 BT.

A cottonwood, 8 ins. dia., bears N. 16° 30' W. 80 lks. dist.; mkd. WC T6S R24E S3 BT.

Dig a pit, 36x36x12 ins., 8 ft. S. of post, and raise a mound of earth, 4 ft. base, 2 ft. high, S. of cor.

76.66 Left shore of channel, course N. 60° W. Set flag for triangulation.

79.32 The proportionate point for cor. of secs. 2, 3, 10 and 11, (25 lks.

79.32 Prof. temp. cor. on 2nd Mer. line, and 58 lks. N. of 3rd temp. cor. on 5th Lat. line) falls in channel of river.

Land, level bottom.

Soil, light, fine, dry, warm, rich, alluvial sandy loam, 10 to 15 ins. deep on sand subsoil, 1st rate.

Timber, cottonwood.

Undergrowth, mesquite, willow, sage, shadscale and cactus.

From the reestablished cor. of secs. 1, 2, 11, and 12.


N. $89^{\circ} 44'$ W., on a true line bet. secs. 2 and 11.

Over level, cultivated bottom land, along fence to S. 6 lks. dist., bears gradually N. to line.

31.70 Enter scattering timber and dense undergrowth, bears NW. and SE.

32.50 Irrigation ditch, 15 lks. wide, 3 ft. deep, course NW.

39.81 At a point 39½ lks. N. of temp. cor. on 5th. Lat. line, reestablish the cor. as follows: Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked



from which


A cottonwood, 24 ins. dia., bears N. 85° E. 63 lks. dist.; mkd. $\frac{1}{4}$ S 2 B T.

A cottonwood, 12 ins. dia., bears S. 62° W. 56 lks. dist.; mkd. $\frac{1}{4}$ S 11 B T.

40.30 Fence cor. on line; Wire fences bear N., S., E. and W. from cor; along fence on line.

45.36 End of fence, and right bank of the Gila River, 5 ft. high, bears N. 35° W. and S. 35° E.

Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground for meander cor. of frac. secs. 2 and 11, with brass cap mkd.



dig a pit, 36x36x12 ins., 8 ft. E. of post, and raise a mound of earth, 4 ft. base, 2 ft. high, E. of cor.

Thence over dry river bed.


50.65 Set point for triangulation.

51.40 Right shore of main channel of the Gila River, course N. To determine the dist. across, I proceed as follows:

Dependent Resurvey of the Subdivision of T. 6 S., R. 24 E.

Chains

From the point at 50.65 chs., the flag set on line bet. secs. 10 and 11 bears S. 85° 01' W.; from this same point I run a base N. 4° 59' W. 15.00 chs. to a point from which the flag bet. secs. 10 and 11 bears S. 57° 45' W.; therefore, the dist. is $\tan 62^{\circ}44'$ x base, or $1.9402 \times 15 = 29.10$ chs. Using this side as a base, and the sec. lines for the unknown sides of the triangle:

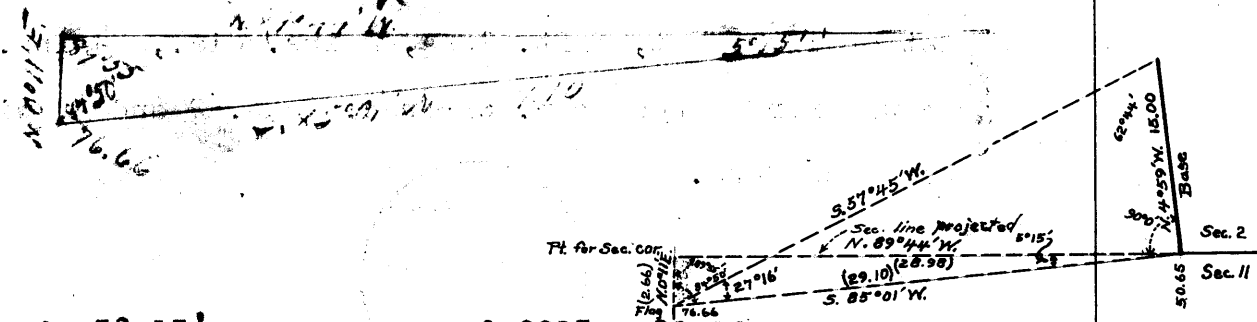

$$\frac{\sin 5^{\circ} 15'}{\sin 89^{\circ} 55'} \times \text{base}, \text{ or } \frac{0.0915 \times 29.10}{1} = 2.66 \text{ chs.}, \text{ the}$$

dist. from the flag set at 76.66 chs. bet. secs. 10 and 11, to the point for cor. of secs. 2, 3, 10 and 11.

$$\frac{\sin 84^{\circ} 50'}{\sin 89^{\circ} 55'} \times \text{base}, \text{ or } \frac{0.996 \times 29.10}{1} = 28.98 \text{ chs.}$$

Continuing on true line bet. secs. 2 and 11, across river channel.

$$50.65 \text{ chs.} + 28.98 \text{ chs.} =$$

79.63 Point for the reestablished cor. of secs. 2, 3, 10 and 11.

Land, level bottom.

Soil, fine, rich, dark, warm, alluvial, sandy loam, 12 to 18 ins. deep, on clay subsoil; 1st rate.


Timber, scattering cottonwood.

Undergrowth, willow, sage and shadscale.

In order to determine the dist. across the river on line bet. secs. 2 and 3, I set a point on right shore of channel, from which the flag set at 76.66 chs. on line bet. secs. 10 and 11, bears S. 0° 11' W.; and from this point run a base N. 84° 51' W. 14.22 chs. to a point from which the flag bet. secs. 10 and 11, bears S. 28° 24' E.

$$\frac{\sin 56^{\circ} 27'}{\sin 28^{\circ} 35'} \times \text{base} = \frac{0.8334 \times 14.22}{0.4784} = 24.77 \text{ chs.}$$

$$76.66 \text{ chs.} + 24.77 \text{ chs.} - 79.32 \text{ chs.} = 22.11 \text{ chs.}$$

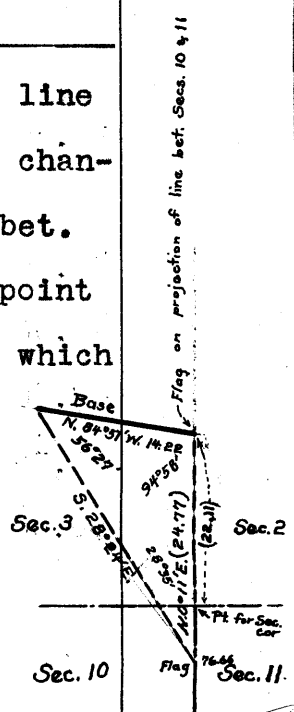

Chains


From the point for the reestablished cor. of secs. 2, 3, 10 and 11.

N. 0° 35' E., on a true line bet. secs. 2 and 3.

Across river channel.

22.11 Right shore of channel, course W. Triangulation point bears W. 15 lks. dist.; thence over dry river bed.


23.08 Right bank of the Gila River, 4 ft. high, bears N. 60° W. and S. 60° E. Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground for meander cor. of frac. secs. 2 and 3, with brass cap mkd.



dig a pit, 36x36x12 ins., 8 ft. N. of post; and raise a mound of earth, 4 ft. base, 2 ft. high, N. of cor. Thence over level bottom land.

28.70 Wire fence, bears E. and W.

39.66 At a point 65 1/2 lks. E. of temp. cor. on 2nd Mer. line, reestablish the cor. as follows: Set an iron post, 3 ft. long, 1 in. in dia., 26 ins. in the ground, for 1 sec. cor., with brass cap, marked



dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.; and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high. W. of cor.

39.85 Wire fence, bears E. and W.; cor. of fences bearing N., E. and W., bears W. about 80 lks. dist.

42.20 Wire fence, bears NW. and SE.

42.90 Irrigation ditch, 20 lks. wide, 3 ft. deep, course NW.


47.80 Irrigation ditch, 10 lks. wide, 2 ft. deep, course W.

60.30 Wagon road, bears NW. and SE.

60.60 Cor. of wire fences bearing NW. and S., bears W. about 50 lks. dist.

Chains.

- 66.50 Wagon road, bears E. and W. Leave level bottom land, bears E. and W.; asc. 30 ft. over a steep S. slope.
- 68.40 Point of spur, falls SW.; desc. gradually along a steep W. slope.
- 73.20 Bottom of draw, course S. 10° W.; asc. 40 ft. along a steep SE. slope.
- 79.18 Intersect original closing cor. of secs. 2 and 3, on S. bdy. Par. Sp., which is a lava stone, 10x10x4 ins. firmly set, and mkd. and witnessed as described by the surveyor general. In place thereof Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground for closing cor. of secs. 2 and 3, on S. bdy. of sec. 34, T. 6 S., R. 24 E., with brass cap, marked



and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, S. of cor. From this cor., the reestablished standard cor. of secs. 34 and 35, T. 6 S., R. 24 E., true in before described, bears S. 89° 56' E., 27.49 chs. dist. N. here in before described 27.49 chs. dist.

Land; level and rolling.
 Soil, on bottom, light, fine, dry, warm, rich sandy loam, 10 to 15 ins. deep, on yellow clay subsoil; 1st rate; on N. 13 chs. the soil is light, coarse, shallow, gravelly and stony; 4th rate.
 No timber.
 Undergrowth, scattering willow, greasewood, sage, shade scale, cactus and mesquite.

From the reestablished cor. of secs. 3, 4, 33 and 34, on S. bdy. of the Tp. hereinbefore described.
 N. 1° 07' E.; on a true line bet. secs. 33 and 34. (S. 1/2).
 Over level mesa, thru dense greasewood undergrowth.

- 2.00 Wagon road, bears N. 65° E. and S. 65° W.

Chains.


29.20 Edge of mesa, bears NE. and S. 80° W.; leave heavy, enter scattering undergrowth; desc. 100 ft. along a steep NW. slope.

38.30 Foot of steep descent, bears NE. and SW.; desc. gradually over rolling and broken land.

39.94 The original 1/4 sec. cor., which is a wooden post, 3 ft. long, 3 ins. sq., loosely set in mound of stone, and mkd. and witnessed as described by the surveyor general.

In place thereof

Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for 1/4 sec. cor., with brass cap mkd.



and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor. Thence

N. 0° 10' W., on a true line bet. secs. 33 and 34, (N. 1/2).


continuing my measurement,

32.96 Bottom of draw, 50 ft. below 1/4 sec. cor., course W.; asc. 75 ft. over a steep S. slope.

39.98 The original cor. of secs. 27, 28, 33 and 34, which is a granite stone, 10x5x9 ins. above ground, firmly set, and mkd. and witnessed as described by the surveyor general

In place thereof

Set an iron post 3 ft. long, 2 ins. dia., 18 ins. in the ground to bedrock, in mound of earth and stone, 3 ft. base, 1 ft. high, for cor. of secs. 27, 28, 33 and 34, with brass cap mkd.



and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, level, rolling and broken.

Soil, light, coarse sandy loam, gravelly and stony, 4 to


Dependent Resurvey of the Subdivision of T. 6 S., R. 24 E. 83

Chains

8 ins. deep on gravel and adobe clay subsoil; 3rd rate.
No timber.
Undergrowth, greasewood, sage, shadscale, mesquite,
ocotillo and yucca.

From the established cor. of secs. 26, 27, 34 and 35.
N. 89° 03' W., on a true line bet. secs. 27 and 34. (E. 1/2).

- Over level mesa.
- 5.10 Desc. 40 ft. over a steep W. slope.
- 10.00 Bottom of draw, course NE.; asc. 70 ft. over a steep E. slope.
- 15.00 Top of ascent, bears NE. and SW.; continue over nearly level mesa.
- 39.69 The original 1/4 sec. cor., which is a granite stone, 12x7x4 ins. above ground, firmly set, and mkd. and witnessed as described by the surveyor general. In place thereof Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for 1/4 sec. cor., with brass cap mkd.



dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.; and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, N. of cor. Thence

N. 89° 46' W., on a true line bet. secs. 27 and 34, (W. 1/2) continuing my measurement,

- 40.70 Edge of mesa, bears N. 30° E. and S. 30° E.; desc. 70 ft. over a steep W. slope.
- 44.30 Bottom of gulch, course N. 30° E.; asc. 75 ft. over a steep E. slope.
- 13.40 Edge of mesa, bears N. 30° E. and S.; thence over level mesa.
- 26.60 Edge of mesa, bears N. 80° W. and S.; desc. 50 ft. along a steep S. slope.
- 39.02 The reestablished cor. of secs. 27, 33 and 34.


Chains.

- Land, level and broken.
- Soil, light, coarse, gravelly and stony, 3 to 6 ins. deep on gravel subsoil; 3rd rate.
- No timber.
- Undergrowth, greasewood, sage, shadscale, mesquite, yucca, ocotillo and cactus.
-
- N. $0^{\circ} 43'$ W., on a true line bet. secs. 27 and 28, (S. $\frac{1}{2}$).
Asc. 60 ft. over an abrupt S. slope.
- 1.80 Edge of mesa, bears E. and W.; thence over level mesa.
- 9.40 Edge of mesa, bears N. 60° E. and S. 60° W.; desc. 150 ft. along a steep NW. slope.
- 27.00 Foot of descent, bears NE. and SW.; thence over rolling land.
- 39.50 The original $\frac{1}{4}$ sec. cor., which is a granite stone, 8x8x8 ins. above ground, firmly set, and mkd. and witnessed as described by the surveyor general. In place thereof
- Set an iron post, 3 ft. long, 1 in. dia., 16 ins. in the ground to bedrock, in mound of earth and stone, 3 ft. base, $1\frac{1}{2}$ ft. high, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
-
- and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. Thence
- N. $0^{\circ} 13'$ W., on a true line bet. secs. 27 and 28, (N. $\frac{1}{2}$).
continuing my measurement,
- 12.50 Foot of ascent, bears E. and W.; asc. 120 ft. over an abrupt S. slope.
- 17.70 Edge of mesa, bears E. and W.; thence over rolling mesa.
- 39.90 The original cor. of secs. 21, 22, 27 and 28, which is a wooden post, $2\frac{1}{2}$ ft. long, 3 ins. sq., lying on the ground beside old mound, mkd. and witnessed as described by the surveyor general. In place thereof

Dependent Resurvey of the Subdivision of T. 6 S., R. 24 E.

Chains.

Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground for cor. of secs. 21, 22, 27 and 28, with brass cap mkd.



and raise a mound of stone, 2 ft. base, 1 1/2 ft. high; W. of cor.

Land, level, rolling, rough and broken.

Soil, light, coarse, gravelly and stony, 3 to 6 ins. deep on decomposed granites and shales, 3rd rate.

No timber.


Undergrowth, greasewood, sage, shadscale, mesquite, yucca, ocotillo and cactus.

From the reestablished cor. of secs. 22, 23, 26 and 27,

N. 89° 24' W., on a true line bet. secs. 22 and 27. (E. 1/4).

Over rolling land.


- 21.20 Dry wash, 30 lks. wide, 2 ft. deep; course N.
- 23.20 Foot of steep ascent, bears N. and S.; asc. 100 ft. over a steep E. slope.
- 26.80 Edge of mesa, bears N. and S.; thence over level mesa.
- 37.70 Edge of mesa, bears NW. and SE.; desc. 35 ft. along a steep SW. slope.
- 39.89 Bottom of draw, course S. The original 1/4 sec. cor., which is a granite stone, 18x14x10 ins., loosely set, and mkd. and witnessed as described by the surveyor general. In place thereof
Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for 1/4 sec. cor., with brass cap mkd.



and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor. Thence

Chains.

- N. $89^{\circ} 58'$ W., on a true line bet. secs. 22 and 27, ($W. \frac{1}{2}$).
 continuing my measurement; asc. 50 ft. along a steep SE.
 slope.
- 2.20 Edge of mesa, bears NE. and SW.; thence over rolling
 mesa.
- 12.00 Desc. 50 ft. over a steep W. slope.
- 15.20 Bottom of draw, course N. 10° E.; asc. 50 ft. over a
 steep E. slope.
- 18.30 Top of ascent, bears N. 10° E. and S. 10° W.; continue
 over rolling mesa.
- 339.69 The reestablished cor. of secs. 21, 22, 27, and 28.
 Land, level, rolling and broken.
 Soil, light, coarse, gravelly and stony, 3 to 6 ins. deep
 on decomposed granites and shales; 3rd rate.
 No timber.
 Undergrowth, greasewood, sage, shadscale, mesquite,
 yucca, ocotillo and cactus.
-
- N. $0^{\circ} 06'$ E., on a true line bet. secs. 21 and 22. ($S. \frac{1}{2}$).
 Over rolling mesa.
- 1.80 Edge of mesa, bears NE. and SW.; desc. 125 ft. along a
 steep, broken NW. slope.
- 4.40 Top of adobe cliff 40 ft. high, bears NE. and SW.
- 5.10 Foot of same cliff; thence over level land, bears NE.
 and SW.
- 31.60 Enter low, rolling and broken hills, bear NW. and SE.
- 39.58 The original $\frac{1}{4}$ sec. cor., which is a granite stone,
 $8 \times 8 \times 14$ ins. above ground, firmly set, and mkd. and wit-
 nessed as described by the surveyor general. In place
 thereof
 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the
 ground for $\frac{1}{4}$ sec. cor., with brass cap mkd.



Dependent Resurvey of the Subdivision of T. 6 S., R. 24 E.

Chains.


and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.
Thence, N. 0° 6' E. on true line, bet. secs. 21 and 22 (N. 1/2).

10.00 Leave rolling hills, bear NW. and SE.; asc. 80 ft. along
a steep SW. slope.

13.40 Edge of mesa, bears NW. and SE.; thence over rolling mesa.

49.05 The original cor. of secs. 15, 16, 21 and 22, which is a
wooden post, 3 ft. long, 3 ins. sq.; firmly set, and mkd.
and witnessed as described by the surveyor general.

In place thereof
Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the
ground for cor. of secs. 15, 16, 21 and 22, with brass
cap mkd.



and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W.
of cor.

Mag. decl. 14° 15' E.

Land, level, rolling, rough and broken.

Soil, light, coarse, gravelly and stony, 4 to 6 ins.
deep on clay subsoil; 3rd rate.

No timber.

Undergrowth, greasewood, sage, shadscale, mesquite,
yucca, ocotillo and cactus.

From the reestablished cor. of secs. 14, 15, 22 and 23.
N. 89° 07' W., on a true line bet. secs. 15 and 22. (E. 1/2).
Over rolling land, thru dense greasewood undergrowth.


0.80 Dry wash, 50 lks. wide, 2 ft. deep, course N.

13.00 Asc. 50 ft. over a gradual E. slope.

19.00 Edge of mesa, bears N. and S.; thence over rolling mesa.

39.77 The original 1/4 sec. cor., which is a granite stone, 10x6x
5 ins. above ground, firmly set, and mkd. and witnessed
as described by the surveyor general. In place thereof
Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the
ground for 1/4 sec. cor., with brass cap mkd.

Chains



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor. Thence N. $89^{\circ} 52'$ W., on a true line bet. secs. 15 and 22, ($W.\frac{1}{2}$).

39.93 The reestablished cor. of secs. 15, 16, 21 and 22.

Land, rolling.

Soil, light, coarse, gravelly and stony, 3 to 6 ins.

deep on gravel and clay subsoil; 3rd rate.

No timber.

Undergrowth, mesquite, greasewood, sage, shadscale,

yucca, ocotillo and cactus.

N. $0^{\circ} 38'$ E., on a true line bet. secs. 15 and 16. ($S.\frac{1}{2}$).


Over rolling mesa.

17.10 Edge of mesa, bears NE. and SW.; desc. 40 ft. along a gradual NW. slope.

25.00 Draw, course W.; asc. 30 ft. along a gradual SW. slope.

37.00 Edge of mesa, bears NW. and SE.; continue over rolling mesa.

39.98 The original $\frac{1}{4}$ sec. cor., which is a wooden post, 3 ft. long, 3 ins. sq., firmly set, and mkd. and witnessed as described by the surveyor general. In place thereof Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap mkd.



dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.; and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor. Thence

N. $0^{\circ} 01'$ W., on a true line bet. secs. 15 and 16, ($N.\frac{1}{2}$)

Dependent Resurvey of the Subdivision of T. 6 S., R. 24 E.


17.52

Wagon road, bears N. 60° E., and S. 60° W.

39.76

The original cor. of secs. 9, 10, 15 and 16, which is a wooden post, 3 ins. sq., 18 ins. above ground, firmly set, and mkd. and witnessed as described by the surveyor general. In place thereof

Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground for cor. of secs. 9, 10, 15 and 16, with brass cap mkd.



and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling. Soil, light, coarse, gravelly and stony, 3 to 6 ins. deep on gravel subsoil; 3rd rate.

No timber..

Undergrowth, greasewood, sage, shadscale, yucca and cactus.

From reestablished cor. of secs. 10, 11, 14 and 15. N. 89° 55' W., on a true line bet. secs. 10 and 15. (E. 1/4). Over level cultivated land..

12.40

Leave cultivated land, enter dense undergrowth, bears NW. and SE.

20.20

Wire fence, bears N. and S.; cor. of fences bearing N., S. and W., bears N. about 60 lks. dist. Enter rolling land, bears NW. and SE.

22.90


Irrigation ditch, 20 lks. wide, 2 ft. deep, course N. 20° W.

39.69

The original 1/4 sec. cor., which is a partially decayed mesquite stake, 2 ft. long, 3 ins. sq., mkd. 1/4 S, and lying beneath a mound of stone, in which is set a sawed cedar stake, 2 ft. long, 4 ins. sq., mkd. 1/4. In place thereof

Chains.

Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap mkd.



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.. Thence

N. $89^{\circ} 53'$ W., on a true line bet. secs. 10 and 15, ($7\frac{1}{2}$) continuing by measurement,

4.91 SW. cor. of wire fence, bears N. about 60 lks. dist.

12.31 Asc. 30 ft. over a gradual E. slope.

19.31 Edge of mesa, bears N. and S. Wagon road, bears NE. and SW. Thence over low, rolling mesa.

39.73 The reestablished cor. of secs. 9, 10, 15, and 16.

Land, level and rolling.

Soil, light, coarse, gravelly and stony, 3 to 6 ins. deep on gravel subsoil; 3rd rate.

No timber.

Undergrowth, greasewood, sage, shadscale, ocotillo, yucca, mesquite and cactus.

N. $0^{\circ} 05'$ W., on a true line bet. secs. 9 and 10.


Over low rolling mesa.

35.30 Edge of mesa, bears E. and W.; desc. 25 ft. over a gradual N. slope.

39.60 Small dry drain, course E.; thence over rolling land.

39.66 At a point $5\frac{1}{2}$ lks. W. of temp. cor. on 3rd Mer. line, reestablish the cor. as follows:

Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap mkd.



dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.; and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W.

Dependent Resurvey of the Subdivision of T. 6 S., R. 24 E.

Chains

01

of cor.

46.60 Irrigation ditch, 20 lks. wide, 5 ft. deep, course NW.

59.00 Wagon road, bears N. and W.; leave rolling, enter level bottom land, bears E. and W.; along road on line, bears gradually to W.

59.10 Cor. of wire fences bearing N. and N. 60° W., bears N. 60° W. 40 lks. dist.; cor. of wire fences bearing N. and S. 60° E., bears S. 60° E. 20 lks. dist.

59.80 Center of track, Arizona Eastern Railroad, bears N. 60° W. and S. 60° E.

60.80 Cor. of wire fences bearing N. 60° W. and S., bears N. 60° W. 40 lks. dist.; cor. of wire fences bearing S. and S. 60° E. bears S. 60° E. 20 lks. dist.

61.60 Road, from Pima to Fort Thomas, bears N. 60° W. and S. 60° E.

62.20 Cor. of wire fences bearing N. and N. 60° W., bears N. 60° W. 40 lks. dist.; cor. of wire fences bearing N. and S. 60° E., bears S. 60° E. 20 lks. dist.; thence along fenced highway.


63.00 House, bears E. 50 lks. dist.

74.90 Cor. of wire fences bearing N., S. & W., bears W. 40 lks. dist.

79.32 At a point 11 lks. W. of temp. cor. on 3rd Meridional line, and

79.32 25 lks. S. of temp. cor. on 5th Lat. line, to establish the cor. as follows:

Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground for cor. of secs. 3, 4, 9 and 10, with brass cap mkd.



dig pits, 18x18x12 ins., in each sec. 5½ ft. dist.; and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor. Land, level and rolling.

Soil, S. of railroad track, light, coarse, gravelly and stony, 3 to 6 ins. deep on gravel subsoil; 3rd rate; N. of track the soil is light, fine, dry, warm, rich sandy clay loam, 6 to 10 ins. deep on adobe clay

Chains.

subsoil; 1st rate.

No timber.

Undergrowth, sage, shadscale, greasewood, and mesquite.

From ^{true} point for the reestablished cor. of secs. 2, 3, 10 and 11.


N. $89^{\circ} 36'$ W., on a true line bet. secs. 3 and 10. (E. $\frac{1}{2}$)

Across river channel.

4.00 Left shore of channel, course NW.

4.50 Point for meander cor. on left bank of the Gila River, 4 ft. high, bears NW. and SE.; and was determined by course and dist. from the witness cor. to cor. of secs. 2, 3, 10 and 11, at N. $52^{\circ} 51'$ W. 5.63 chs. to above described point

Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground for meander cor. of frac. secs. 3 and 10, with brass cap mkd.



from which

A cottonwood, 6 ins. dia., bears N. 40° W. 73 lks. dist.; mkd. T 6 S R 24 E S 3 M C B T.

A cottonwood, 5 ins. dia. bears S. 35° W. 25 lks. dist.; mkd. T 6 S R 24 E S 10 M C B T.

Thence over level bottom land, thru heavy timber and undergrowth.

8.20 End of wire fence bearing W., bears N. 5 lks. dist.; leave timber and undergrowth, enter cultivated land, bears N. and S.; along fence to N.


21.40 wire fence, bears N. and S.; cor. of wire fences bearing E., W. and S., bears N. 5 lks. dist.; continue along fence to N., bears gradually S. to line.

39.81 The original $\frac{1}{4}$ sec. cor., which is a wooden stake, 4 ft. long, 3 ins. sq., marks indistinct, firmly set in the ground at cor. of wire fences bearing E., W. and S.

Dependent Resurvey of the Subdivision of T. 6 S., R. 24 E.

Chains

In place thereof
Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for 1/4 sec. cor., with brass cap mkd.



dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.; and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, N. of cor. Thence S. 89° 38' W., on a true line bet. secs. 3 and 10, (7.1/2).

along fence on line.


- 34.29 SW. cor. of wire fence, on line.
- 34.69 wire fence, bears N. and S.
- 49.89 Wire fence, bears N. and S.
- 29.89. Wire fence, bears N. and S.
- 34.54 Wire fence, bears N. and S.; leave cultivated land, enter dense undergrowth.
- 34.69 Irrigation ditch, 20 lks. wide, 5 ft. deep, course N.
- 34.79. Wire fence, bears N. and S.; leave undergrowth, enter highway.
- 39.89. The reestablished cor. of secs. 3, 4, 9 and 10.
Land, level bottom.
Soil, light, fine, dry, warm, rich, alluvial sandy loam, 10 to 15 ins. deep on sand subsoil; 1st rate.
Timber, cottonwood.
Undergrowth, willow, mesquite, sage and shadscale.

N. 0° 32' E., on a true line bet. secs. 3 and 4.

Over level bottom land, along fenced highway.

- 2.80 House, bears E. 2 chs. dist.
- 7.80 End of wire fence, bearing S., bears W. 40 lks. dist.
- 15.97 Left bank of the Gila River, 10 ft. high, bears E. and W.
Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground for meander cor. of frac. secs. 3 and 4, with brass cap mkd.

Chains.



dig a pit, 36x36x12 ins., 8 ft. S. of post, and raise a mound of earth, 4 ft. base, 2 ft. high, S. of cor.

End of wire fence bearing S., bears E. 20 lks. dist.

End of wagon road bearing S., bears W. 20 lks. dist.

Thence over dry river bed.

37.72 Left shore of main channel of river, course SW.

Set point for triangulation.

39.66 The proportionate point for 1/4 sec. cor., (25 1/2 lks. E. of temp. cor. on 3rd Meridional line) falls in river.

To determine the dist. across, I set a flag on line on

right shore of river; and from the point at 37.72 chs.,

run a base S. 89° 28' E. 5.00 chs. to a point from which

the flag bears N. 41° 39' W.; therefore, the dist. is


$\tan 47° 49' \times 5 = 5.52$ chs.

37.72 chs. + 5.52 chs. =

43.24 To right shore of channel.

46.51 Right bank of the Gila River, 3 ft. high, bears N. 80° E. and SW.


Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground for meander cor. of frac. secs. 3 and 4, with brass cap mkd.




dig a pit, 36x36x12 ins., 8 ft. N. of post; and raise a mound of earth, 4 ft. base, 2 ft. high, N. of cor.

46.70 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for witness cor. to 1/4 sec. cor., with brass cap

mkd.




dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.;



Dependent Resurvey of the Subdivision of T. 6 S., R. 24 E.

Chains.

- and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
- 48.50 Bank, 3 ft. high, bears NE. and S. 10° W.; enter dry wash, course S. 10° W.
- 53.40 Bank, 3 ft. high, bears NE. and SW.; leave dry wash, course SW.; asc. over a gradual S. slope.
- 58.60 NE. cor. of wire fence, bears W. about 2 chs. dist.
- 70.50 House, bears W. 2 chs. dist.
- 71.10 Bank, 8 ft. high, bears N. 70° W. and S. 70° E.
- 79.10 Wagon road, bears N. 35° W. and S. 35° E.
- 79.36 The proportionate point for closing cor. of secs. 3 and 4. on 1st. Standard Parallel South, Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground for closing cor. of secs. 3 and 4; on 1st. bdy. of sec. 33, T. 6 S., R. 24 E., with brass cap, marked



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, S. of cor. From this cor. the reestablished standard cor. of secs. 33 and 34, T. 6 S., R. 24 E., hereinbefore described, bears S. $89^\circ 41'$ E., 27.73 chs. dist. bears S. $89^\circ 41'$ E. 27.73 chs. dist.

Land, level and gently rolling.

Soil, on S. side of the Gila River, light, fine, dry, warm, rich, alluvial sandy loam, 8 to 12 ins. deep on sandy clay subsoil; 1st rate. On N. side of river the soil is light, coarse, washed, gravelly and stony, 3 to 6 ins. deep on gravel subsoil; 3rd rate.

Timber, cottonwood along river.


Undergrowth, scattering, willow, sage and shadscale.

From the established cor. of secs. 4, 5, 32 and 33, on S. bdy. of the Tp., hereinbefore described, bears N. $0^\circ 07'$ E., on a true line bet. secs. 32 and 33. (S. $\frac{1}{2}$). Over rolling and broken land.

chains.

23.70 Dry wash, 30 lks. wide, 3 ft. deep, course NE.

39.74 The original $\frac{1}{4}$ sec. cor., which is a granite stone, 18x16 x8 ins. above ground, firmly set, and mkd. and witnessed as described by the surveyor general. In place thereof Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap mkd.



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. Thence


N. $0^{\circ} 02'$ E., on a true line bet. secs. 32 and 33, (N. $\frac{1}{2}$) continuing by measurement,

39.26 Leave broken, enter level land, bears NW. and SE.

39.67 The original cor. of secs. 28, 29, 32 and 33, which is a granite stone, 8x8x6 ins. above ground, firmly set, and mkd. and witnessed as described by the surveyor general.

In place thereof.

Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground for cor. of secs. 28, 29, 32 and 33, with brass cap mkd.



dig pits, 18x18x12 ins., in each sec. $5\frac{1}{2}$ ft. dist.; and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, level, broken and rolling.

Soil, light, coarse, shallow and stony; 4th rate.

No timber.

Undergrowth, scattering greasewood, sage, shadscale and cactus.


From the established cor. of secs. 27, 28, 33 and 34.

S. $89^{\circ} 46'$ W., on a true line bet. secs. 28 and 33.

Dependent Resurvey of the Subdivision of T. 6 S., R. 24 E.

Chains

- Asc. 55 ft. along a steep S. slope.
- 33.90 Edge of mesa, bears N. 80° E. and SW.; thence over level mesa.
- 19.00 Edge of mesa, bears N. 10° E. and SE.; desc. 160 ft. over a steep W. slope.
- 25.60 Foot of steep descent, bears N. and SE.; thence over rolling land.
- 35.00 Dry wash, 50 lks. wide, 1 ft. deep, course N.
- 39.93 The proportionate point for $\frac{1}{4}$ sec. cor.
Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap mkd.




- and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
- 45.60 Dry wash, 50 lks. wide, 3 ft. deep, course N.
- 69.10 Dry wash, 30 lks. wide, 2 ft. deep, course N; thence over level land, bears N. and S.
- 79.86 The reestablished cor. of secs. 28, 29, 32 and 33.
Land, rolling and broken.
Soil, light, coarse, gravelly and stony, 6 to 10 ins. deep on gravel subsoil; 3rd rate.
No timber.
Undergrowth, greasewood, mesquite, sage, shadscale, yucca, ocotillo and cactus.

- N. 0° 02' E., on a true line bet. secs. 28 and 29. (S. $\frac{1}{2}$).
Over level land.
- 26.00 Enter broken land, bears E. and W.
- 40.05 The original $\frac{1}{4}$ sec. cor., which is a granite stone, 12x10x8 ins. above ground, firmly set, mkd. $\frac{1}{4}$ on top, and witnessed by a mound of stone. In place thereof
Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the

Chains.

ground for $\frac{1}{4}$ sec. cor., with brass cap mkd.



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. Thence

N. $0^{\circ} 32'$ W., on a true line bet. secs. 28 and 29, (N. $\frac{1}{2}$). continuing by measurement,

47.45 Foot of ridge, bears NE. and SW.; asc. 150 ft. along a steep SE. slope.

20.95 Top of ridge, bears N. 50° E. and S. 50° W.; desc. 150 ft. along a steep NW. slope.

28.95 Foot of ridge, bears NE. and SW.; thence over broken land.

39.82 At a point 37 lks. W. of temp. cor. on 1st Mer. line, and 21 lks.

W. of temp. cor. on 2nd Lat. line, reestablish cor. as follows:

Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground for cor. of secs. 20, 21, 28 and 29, with brass cap mkd.



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, level, rolling, rough and broken.

Soil, light, coarse, gravelly and stony clay loam, 3 to 6 ins. deep, on adobe clay subsoil; 3rd rate.

No timber.

Undergrowth, scattering sage, shadscale and greasewood.

From reestablished cor. of secs. 21, 22, 27 and 28.

S. $89^{\circ} 58'$ W., on a true line bet. secs. 21 and 28. (E. $\frac{1}{2}$).


Over level mesa.

1.80 Edge of mesa, bears NE. and SW.; desc. 150 ft. along a steep NW. slope.

Dependent Resurvey of the Subdivision of T. 6 S., R. 24 E.

Chains

- 7.20 Foot of steep descent, bears NE. and SW.; desc. gradually over broken land.
- 24.00 Leave broken, enter level land, bears N. and S.. thru dense undergrowth.
- 39.69 The original $\frac{1}{4}$ sec. cor., which is a granite stone, 12x10 x8. ins. above ground, firmly set, and mkd. and witnessed as described by the surveyor general. In place thereof Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap mkd.




dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.; and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor. Thence N. $89^{\circ} 49'$ W., on a true line bet. secs. 21 and 28, ($W.\frac{1}{2}$) continuing my measurement.

- 47.83 Dry wash, 50 lks. wide, 3 ft. deep, course N. Leave heavy, enter scattering undergrowth, bears N. and S.
- 49.53 Leave level, enter rolling land, bears N. and S.
- 39.86 The reestablished cor. of secs. 20, 21, 28 and 29. Land, level, rough and rolling. Soil, light, fine, dry, warm, sandy and gravelly clay loam, 4 to 8 ins. deep on adobe clay subsoil; 3rd rate. No timber. Undergrowth, greasewood, sage, shadscale, mesquite, ocotillo, yucca and cactus.

N. $0^{\circ} 04'$ E., on a true line bet. secs. 20 and 21. Over rolling land,

- 12.60 Leave rolling, enter level land, bears E. and W.
- 39.82 The appointed $\frac{1}{4}$ sec. cor. on 4th Mer. line, reestablished as follows: Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap, marked


Chains.



dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.; and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

79.64 The original cor. of secs. 16, 17, 20 and 21, which is a wooden post, 4 ft. long, 3 ins. sq., loosely set, and mkd. and witnessed as described by the surveyor general. In place thereof.

Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground for cor. of secs. 16, 17, 20 and 21, with brass cap mkd.



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, rolling and level.

Soil, light, fine, dry, warm, sandy loam, 4 to 8 ins. deep, on clay subsoil; 3rd rate.

No timber.

Undergrowth, shadscale, sage and cactus.

From established cor. of secs. 15, 16, 21 and 22.

N. $89^{\circ} 53'$ W., on a true line bet. secs. 16 and 21. ($E\frac{1}{2}$)

Over rolling mesa, thru dense undergrowth.

5.60 Edge of mesa, bears N. and S.; desc. 75 ft. over a gradual W. slope.

11.60 Foot of descent, bears N. and S.; thence over level land, thru scattering undergrowth.

21.50 Enter rolling land, bears N. and S.


39.81 The original $\frac{1}{4}$ sec. cor., which is a granite stone, 10x8x6 ins. above ground, firmly set, and mkd. and wit-

Chains.

nessed as described by the surveyor general.

In place thereof

Set an iron post, 3 ft. long, 1 in. dia., 20 ins. in the ground to bedrock, in mound of earth and stone, 3 ft. base, 1 ft. high, for 1/4 sec. cor., with brass cap mkd.



dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.; and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, N. of cor. Thence

N. 89° 55' W., on a true line bet. secs. 16 and 21, (W. 1/2) continuing my measurement.

49.59 Dry wash, 50 lks. wide, 3 ft. deep, course N.; enter level land, bears N. and S.

49.99 Wagon road, bears N. and S.

11.39 Wire fence, bears N. and S.

12.69 Wagon road, bears N. and S.

29.19 Dry wash, 2 chs. wide, 3 ft. deep, course N.

36.19 Enter rolling land, bears N. and S.

39.77 The restored cor. of secs. 16, 17, 20 and 21.

Land, level and rolling.

Soil, light, fine, dry, warm, sandy and gravelly loam,

4 to 8 ins. deep on gravel subsoil; 3rd rate.

No timber.


Undergrowth, greasewood, sage, shadscale, mesquite and cactus.

N. 0° 02' E., on a true line bet. secs. 16 and 17. (S. 1/2)

Over gently rolling land.

39.87 The original 1/4 sec. cor., which is a wooden post, 3 ft. long, 3 ins. sq., loosely set, and mkd. and witnessed as described by the surveyor general. In place thereof Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for 1/4 sec. cor., with brass cap mkd.

Chains




dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.;
 and raise a mound of earth, 3½ ft. base, 1½ ft. high, W.
 of cor. Thence

N. 0° 04' W., on a true line bet. secs. 16 and 17, (N. ½).
 continuing my measurement,

- 47.99 Dry wash, 1 ch. wide, 10 ft. deep, course E.
- 49.88 Wagon road, bears E. and W.
- 28.63 Irrigation ditch, 12 lks. wide, 2 ft. deep, course N. 30°
W.
- 29.63 Wagon road, bears N. 30° W. and S. 30° E.
- 37.13 Dry wash, 30 lks. wide, 8 ft. deep, course N. 80° E.
- 39.88 SW. cor. of wire fence, bears E. 35 lks. dist.
- 39.92 The appoint 5 lks. W. of temporary corner of the Mer. line, and 5 lks. S.

Set temporary corner, 4 1/2 ch. lat. line, reestablish the cor. and follow
 towards set corner iron post, 3 ft. long, 2 ins. dia. 24 pins in
 the ground for cor. of secs. 8, 9, 16 and 17, with



brass cap, marked

dig pits, 18x18x12 ins., in each sec., 5½ ft. dist.; and
 raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, gently rolling.
 Soil, light, fine, dry, warm, sandy loam, 8 to 12 ins.
 deep on clay subsoil; 2nd rate.

No timber.
 Undergrowth, scattering sage, shadscale, greasewood and
 cactus.

From the established cor. of secs. 9, 10, 15, and 16.
 N. 89° 55' W., on a true line bet. secs. 9 and 16.
 Over rolling land, thru dense greasewood undergrowth.

- 31.30 Irrigation ditch, 20 lks. wide, 6 ft. deep, course N. 20°
E.

Dependent Resurvey of the Subdivision of T. 6 S., R. 24 E.

Chains.

Leave heavy, enter scattering undergrowth, bears N. and S.

38.00 Leave rolling, enter level land, bears N. and S.

39.99 At a point 10 lks. S. of temp. corner on 4th Lat. line, reestablish there a corner as follows: Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked.

$\frac{1}{4} \frac{5}{16}$
 1916

dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.; and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

41.30 Dry wash, 2.50 chs. wide, 10 ft. deep, course N.

45.00 Wire fence, bears N. and S., turns W. about 1 ch. N. of line; thence along fence to N.

73.60 Dry wash, 15 lks. wide, 10 ft. deep, course NE.

78.30 Wire fence, bears N. 88° E. and S. 88° W.

79.64 Wire fence, bears N. and S.

79.99 The reestablished cor. of secs. 8, 9, 16 and 17.

Land, rolling and level.

Soil, on E. half mile, light, coarse, gravelly and stony, 3 to 6 ins. deep on gravel subsoil; 3rd rate.

On W. half mile the soil is light, fine, dry, warm sandy loam, 6 to 10 ins. deep on clay subsoil; 2nd rate.

No timber.

Undergrowth, greasewood, sage, shadscale, yucca, ocotillo, cactus and mesquite.

N. 0° 08' E., on a true line bet. secs. 8 and 9.

3.00 Over level land, along fence to E.

6.50 Wagon road, bears N. and SW.; thence along road on line.

19.25 Dry wash, 1.60 chs. wide, 6 ft. deep, course E.

19.50 Wire fence, turns E. from about 50 lks. E.

20.00 Leave wagon road, turns E.


20.00 Enter rolling land, bears E. and W.

23.50 Irrigation ditch, 30 lks. wide, 20 ft. deep, course NE.

Chains

34.40 Leave rolling, enter nearly level land; bears NW. and SE. Wagon road, bears N. and SE. Cor. of wire fence, bearing N. and SE., bears E. about 20 lks. dist. Thence along road on line, bears gradually to W.

39.92 The point 4 lks. E. point of road on Mer. line, reestablish the corner follows; set an iron pipe 2 ft. long, 2 ins. dia. in the ground 26 ins. in the ground, for a sec. cor. with brass cap, marked



dig pits, 18x18x12 ins., N. and S. of post; 3 ft. dist.; and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

44.40 Irrigation ditch, 30 lks. wide, 2 ft. deep, course NW.

57.60 House, bears W. about 10 lks. dist.

59.00 Partition fence, turns E. from fence to E., 25 lks. dist.


59.50 Intersection of roads, bearing N., S. and W.

60.00 SE. cor. of wire fence, bears W. 25 lks. dist.; thence along fenced highway.

79.84 Recognized cor. of secs. 4, 5, 8 and 9, falls in road, and is mkd. by an iron pipe 2 ft. long, 2 ins. dia., set 24 ins. in the ground; and identified by J. M. Jarbol and H. J. Anderson, resident settlers; who state same was set to mark position of original sec. cor. when the latter was destroyed by construction of road.

In place thereof

Set an iron post, 3 ft. long, 2 ins. dia., 36 ins. in the ground for cor. of secs. 4, 5, 8 and 9, with brass cap mkd.



Highway prevents construction of accessories; therefore, I measure E. 24 lks. to E. bdy of highway, and set a granite stone, 14x8x7 ins., 10 ins. in the ground for witness

Dependent Resurvey of the Subdivision of T. 6 S., R. 24 E.

chains.

cor. to cor. of secs. 4, 5, 8 and 9, mkd. WC on NE. face, with 4 notches on E., and 5 notches on S. edge; dig pits, 18x18x12 ins., diagonally from stone, 5½ ft. dist.; and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor. From the sec. cor. I measure W. 24 lks. to W. bdy. of highway, and set a granite stone, 18x16x8 ins., 11 ins. in the ground for witness cor. to cor. of secs. 4, 5, 8 and 9, mkd. WC on NE. face, with 4 notches on E. and 5 notches on S. edge; dig pits, 18x18x12 ins.; diagonally from stone, 5½ ft.; and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, level and rolling.

Soil, light, fine, dry, warm sandy loam, 8 to 12 ins. deep on sand and clay subsoil; 2nd rate.

No timber.

Undergrowth, scattering greasewood, sage, shadscale and cactus.

From the reestablished cor. of secs. 3, 4, 9 and 10.

N. 89° 33' W., on a true line bet. secs. 4 and 9.

Over level bottom land, across highway.

0.20 Wagon road, bears N. and S.

0.40 Wire fence, bears N. and S.; leave highway.

1.60 House, bears N. 2.50 chs. dist.

11.40 Center of dry wash, 4.40 chs. wide, 20 ft. deep, course N. 10° E.

29.40 Wire fence, bears N. 60° W. and S. 60° E.

30.10 Road, from Pima to Fort Thomas, bears N. 60° W. and S. 60° E.

31.30 Wire fence, bears N. 60° W. and S. 60° E.

32.30 Center of track, Arizona Eastern Railroad, bears N. 60° W. and S. 60° E.


33.10 Wire fence, bears N. 60° W. and S. 60° E.

36.15 Irrigation ditch, 12 lks. wide, 2 ft. deep, course N.

39.81 At a point 6 lks. N. of temp. cor. on 5th. Lat. line, reestablish the cor. as follows:

Chains.

Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap mkd.



dig. pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.; and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

- 40.40 Irrigation ditch, 10 lks. wide, 2 ft. deep, course NW.
 58.10 Wire fence, bears N. and S.; enter cultivated land.
 79.36 Wire fence, bears N. and S.; leave cultivated land, enter highway.
 79.61 The re-established cor. of secs. 4, 5, 8 and 9.

Land, level.

Soil, light, fine, dry, warm sandy loam, 6 to 10 ins. deep, on clay subsoil; 2nd rate.

No timber.

Undergrowth, sage, shadscale, and mesquite.

N. $0^{\circ} 01'$ E., on a true line bet. secs. 4 and 5. (S. $\frac{1}{2}$).

Over level bottom land, along fenced highway.


- 0.30 Partition fence, turns W. from fence to W., 25 lks. dist.
 19.70 NW. cor. of wire fence, bears E. 25 lks. dist.
 20.10 Leave road, turns E.
 27.50 Fence to W. turns NW.
 28.50 Center of track, Arizona Eastern Railroad, bears N. 60° W. and S. 60° E.
 29.50 Wire fence, bears N. 60° W. and S. 60° E.
 29.70 Irrigation ditch, 10 lks. wide, 2 ft. deep, course N. 60° W.
 30.40 Road, from Pima to Fort Thomas, bears N. 60° W. and S. 60° E.
 31.30 Wire fence, bears N. 60° W. and S. 60° E.
 Along fence to W. 25 lks. dist.

Dependent Resurvey of the Subdivision of T. 6 S., R. 24 E.

Chains.

39.91 The original 1/4 sec. cor., at NE. fence cor., which is the end of a decayed wooden stake, 12 ins. long, 3 ins. sq., 12 ins. in the ground, with charred stake deposit. In place thereof

Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for 1/4 sec. cor., with brass cap mkd.



dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.; and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, W. of cor. Thence N. 0° 44' E., on a true line bet. secs. 4 and 5, (No. 1) using by measurement.


2.39 House, on line.

19.94 wire fence, bears E. and W.; enter cultivated land.

27.57 Wire fence, bears E. and W.

37.35 Left bank of the Gila River, 10 ft. high, bears N. 65° W. and E.

Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground for meander cor. of frac. seds. 4 and 5, and witness cor. to closing cor. of secs. 4 and 5, with brass cap mkd.



dig pits, 24x18x12 ins., crosswise on each line, E. and W., 3 ft., and S. of post 7 ft. dist.; and raise a mound of earth, 4 ft. base, 2 ft. high, S. of cor. Thence over dry river bed.

39.09 The proportionate point for closing cor. of secs. 4 and 5, on East Stand. Par. S., falls in bed of river.

From this point, the point for reestablished standard cor. of secs. 32 and 33, T. 5 S., R. 24 E., bears S. 89° 50' E. 27.62 chs. dist.

Chains

Land, level.


Soil, light, fine, dry, warm, rich alluvial sandy loam,
8 to 12 ins. deep on sand subsoil; 1st rate.

No timber.

Undergrowth, scattering sage, shadscale and cactus.

From reestablished cor. of secs. 5, 6, 31 and 32, on S. bdy.
of the Tp., hereinbefore described,
N. 0° 53' W., on a true line bet. secs. 31 and 32. (S. $\frac{1}{2}$)
Over rolling mesa.

- 2.00 Edge of mesa, bears NE. and SW.; desc. 140 ft. along a steep NW. slope.
- 11.50 Foot of steep descent, bears NE. and SW.; desc. 100 ft. gradually over broken and rolling land.
- 39.68 The original $\frac{1}{4}$ sec. cor., which is a granite stone, 12x8x8 ins., firmly set, and mkd. and witnessed as described by the surveyor general. In place thereof Set an iron post, 3 ft. long, 1 in. dia., 18 ins. in the ground to bedrock, in mound of earth and stone, 3 ft. base, 1 ft. high, for $\frac{1}{4}$ sec. cor., with brass cap mkd.




and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. Thence

N. 0° 45' E., on a true line bet. secs. 31 and 32, (N. $\frac{1}{2}$)
terminating my measurement.

- 42.82 Leave rolling, enter level land, bears NE. and S. 80° W.
- 39.69 The original cor. of secs. 29, 30, 31 and 32, which is a granite stone, 16x10x8 ins. above ground, firmly set, and mkd. and witnessed as described by the surveyor general. In place thereof Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground for cor. of secs. 29, 30, 31 and 32, with brass cap mkd.

Chains.



dig pits, 18x18x12 ins., in each sec. 5½ ft. dist.; and raise a mound of earth, 4 ft. base, 2 ft. high. W. of cor.

Land, level, broken and rolling.

Soil, light, fine, dry, warm, sandy, gravelly and stony, 4 to 8 ins. deep on decomposed granites, shales and clay subsoil; 3rd rate.

No timber.


Undergrowth, greasewood, sage, shadscale and cactus.

From reestablished cor. of secs. 28, 29, 32 and 33.

N. 89° 43' W., on a true line bet. secs. 29 and 32. (E. ¼).

Over level land.

- 5.00 Enter broken and rolling land, bears N. and S.
- 33.00 Dry wash, 20 lks. wide, 2 ft. deep, course NE.
- 40.00 Foot of ridge, bears NE. and SW.; asc. 160 ft. over a steep broken SE. slope.
- 40.66 The original ¼ sec. cor., which is a granite stone, 12x8x12 ins., above ground, firmly set, and mkd. and witnessed as described by the surveyor general. In place thereof Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for ¼ sec. cor., with brass cap mkd.



and raise a mound of stone, 2 ft. base, 1½ ft. high, N.

of cor. Thence

N. 89° 52' W., on a true line bet. secs. 29 and 32, (W. ¼). continuing by measurement.

- 46.50 Top of ridge, bears NE. and SW.; desc. 180 ft. over a steep NW. slope.

- 45.64 Foot of ridge, bears NE. and SW.; thence over level land.

Chains


39.64 The reestablished cor. of secs. 29, 30, 31 and 32.
 Land, level, rolling, rough and broken.
 Soil, light, fine, dry, warm, sandy, gravelly and stony,
 3 to 6 ins. deep, on decomposed granites and shales;
 3rd rate.
 No timber.
 Undergrowth, greasewood, sage, shadscale, mesquite, yuca, ocotillo and cactus.

N. 89° 20' W., on a true line bet. secs. 30 and 31.
 Over level land.

17.80 Dry wash, 20 lks. wide, 3 ft. deep, course NE.

39.60 The proportionate point for 1/4 sec. cor.

Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for 1/4 sec. cor., with brass cap mkd.



dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.; and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

42.60 Dry wash, 25 lks. wide, 3 ft. deep, course NE.

47.60 Enter dense greasewood undergrowth, bears N. and S.

56.50 Irrigation ditch, 10 lks. wide, 4 ft. deep, course N. 15° E.

70.70 Wagon road, bears N. and S.

77.37 Reestablished cor. of secs. 25, 30, 31 and 36, on W. bdy. of the Tp., hereinbefore described.
 Land, level.

Soil, light, fine, dry, warm sandy loam, 6 to 10 ins. deep on adobe clay subsoil; contains some alkali;

2nd rate.

No timber.

Undergrowth, greasewood, sage, shadscale and cactus.


Chains

From reestablished cor. of secs. 29, 30, 31 and 32.
 N. 0° 05' E., on a true line bet. secs. 29 and 30.
 Over level land.

29.00 Dry wash, 40 lks. wide, 12 ft. deep, course N. 75° E.

37.50 Enter dense greasewood undergrowth, bears E. and W.


39.75 At a point 5 1/2 lks. E. of temp. cor. on 5th Mer. line, reestablish cor. as follows: Set an iron post 3 ft. long, 1 in. in the diam., 26 in. in the ground, for sec. corner, with brass cap marked,



dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.; and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

79.50 The original cor. of secs. 19, 20, 29 and 30, which is a limestone, 8x4x3 ins. above ground, firmly set, and mkd. and witnessed as described by the surveyor general. In place thereof

Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground for cor. of secs. 19, 20, 29 and 30, with brass cap mkd.



dig pits, 18x18x12 ins., in each sec., 5 1/2 ft. dist.; and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor. Land, level.

Soil, light, fine, dry, warm, sandy clay loam, 6 to 10 ins. deep on clay subsoil; contains some alkali; 2nd rate.

No timber.

Undergrowth, greasewood, sage and shadscale.


From the reestablished cor. of secs. 20, 21, 28 and 29.

Chains.

S. 89° 42' W., on a true line bet. secs. 20 and 29. (E. 1/2).

Over rolling land.

39.88 The original 1/4 sec. cor., which is a granite stone, 8x6x4 ins. above ground, firmly set, and mkd. and witnesses as described by the surveyor general. In place thereof. Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for 1/4 sec. cor., with brass cap mkd.



dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.; and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, N. of cor. Thence

N. 89° 49' W., on a true line bet. secs. 20 and 29. (W. 1/2)

34.92 Dry wash, 1 ch. wide, 7 ft. deep, course N. 10° E.; thence over level land, thru dense greasewood undergrowth.

39.98 The reestablished corner of secs. 19, 20, 29 and 30.

Land, rolling and level.

Soil, light, fine, dry, warm, sandy and gravelly loam, 3 to 6 ins. deep on gravel and clay subsoil; 3rd rate.

No timber.

Undergrowth, greasewood, mesquite, sage, shadscale and cactus.

N. 89° 09' W., on a true line bet. secs. 19 and 30.

Over level land, thru dense undergrowth.


12.50 Dry wash, 1.30 chs. wide, 12 ft. deep, course N. 20° E.

16.75 Irrigation ditch, 15 lks. wide, 3 ft. deep, course N. 20° E.

35.50 wagon road, bears N. 20° E. and S. 20° W.

39.60 At a point 56 lks. S. of the cor. on 2nd. Lat. line, reestablish the cor. as follows: Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for 1/4 sec. cor., with brass cap mkd.

Chains.



dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.;
and raise a mound of earth, 4 ft. base, 2 ft. high, N.
of cor.

74.00 Dry wash, 80 lks. wide, 10 ft. deep, course N.

77.41 The reestablished cor. of secs. 19 and 20 on W. side of T. 6 S.,
hereinbefore described.

Land, level.

Soil, light, fine, dry, warm, sandy clay loam, 6 to 10
ins. deep on clay subsoil; contains some alkali;
2nd rate.

No timber.

Undergrowth, greasewood, sage, shadscale, cactus and
mesquite.


From the reestablished cor. of secs. 19, 20, 29, and 30,
N. 0° 17' E., on a true line bet. secs. 19 and 20.

Over level land, thru dense greasewood undergrowth.

16.00 Leave dense, enter scattering undergrowth, bears W. and
SE.

24.70 Dry wash, 1 ch. wide, 12 ft. deep, course N. 60° E.

39.68 At a point 19 1/2 lks. N. of temple on 5th Mer. line, reestab-
lish the cor. as follows:
Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the
ground for 1/4 sec. cor., with brass cap mkd.



dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.;
and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, W.
of cor.


45.30 Dry wash, 60 lks. wide, 12 ft. deep, course N. 80° E.

Chains

55.00 Wagon road, bears NE. and S. 80° W.

79.36 At a point 39 lks. S. of the cor. of 5th Mer. Line, and 937 lks. S. of temp. cor. on 3rd. Lat. line, reestablish the cor. as follows:

Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground for cor. of secs. 17, 18, 19 and 20, with brass cap mkd.



dig pits, 18x18x12 ins., in each sec., 5½ ft. dist.; and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor. Land, level.

Soil, light, fine, dry, warm, sandy clay loam, 6 to 10 ins. deep on adobe clay subsoil; contains some alkali; 2nd rate.

No timber.

Undergrowth, greasewood, sage, shadscale and mesquite.


From the established cor. of secs. 16, 17, 20 and 21. S. 89° 44' W., on a true line bet. secs. 17 and 20. Over rolling land.

10.00 Leave rolling, enter level land, bears N. and S.

15.30 Dry wash, 30 lks. wide, 3 ft. deep, course N. 20° E.

39.77 At a point 10½ lks. S. of temp. cor. on 2nd. Lat. line, reestablish thereon as follows:

Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for ¼ sec. cor., with brass cap mkd.



dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.; and raise a mound of earth, 3½ ft. base, 1½ ft. high, N. of cor.

43,40 Dry wash, 1 ch. wide, 15 ft. deep, course N. 70° E.

56.00 Wagon road, bear NE. and SW.


Chains

79.55 The reestablished cor. of secs. 17, 18, 19 and 20.
 Land, rolling and level.
 Soil, light, fine, dry, warm, sandy clay loam, 6 to 10 ins. deep, on adobe clay subsoil; contains some alkali; 2nd rate.
 No timber.
 Undergrowth, greasewood, sage, shadscale, and mesquite.

N. 89° 15' W., on a true line bet. secs. 18 and 19.
 Over level land.

14.80 Wagon road, bears NE. and SW.

39.84 At a point 15 lks. N. of temp. cor. on 3rd Lat. line, reestablish the cor. as follows:
 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap mkd.



dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.; and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

40.15 Dry wash, 30 lks. wide, 3 ft. deep, course NE.

42.00 Foot of ridge, bears NE. and SW.; asc. 50 ft. along a steep SE. slope.

46.00 Top of ridge, bears NE. and SW.; desc. 30 ft. along a gradual NW. slope.

52.00 Foot of ridge, bears NE. and SW.; thence over gently rolling land.

77.68 The reestablished cor. of secs. 18 and 19, on W. bdy. of the Tp., hereinbefore described.

Land, level and rolling.

Soil, light, fine, dry, warm sandy loam, 6 to 10 ins. deep on adobe clay subsoil; contains some alkali; 2nd rate.

No timber.


Undergrowth, mesquite, sage and shadscale.

Chains.

From the reestablished cor. of secs. 17, 18, 19 and 20.
N. $0^{\circ} 11'$ W., on a true line bet. secs. 17 and 18. (S. $\frac{1}{2}$)
Over level land.

12.15 Wagon road, bears E. and W.

39.68 The original $\frac{1}{4}$ sec. cor., which is a granite stone, 8x8x5
ins. above ground, firmly set, and mkd. and witnessed as
described by the surveyor general. In place thereof
Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the
ground for $\frac{1}{4}$ sec. cor., with brass cap mkd.



dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.;
and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W.
of cor. Thence

N. $0^{\circ} 13'$ E., on a true line bet. secs. 17 and 18, (N. $\frac{1}{2}$).
continuing my measurement,

48.82 Dry wash, 2 chs. wide, 6 ft. deep, course N. 75° E.

49.32 Enter dense greasewood undergrowth, bears E. and W.

28.62 Leave level, enter rolling land, bears E. and W.


Asc. 40 ft. over a gradual S. slope.

32.92 Top of ascent, bears E. and W.; thence over rolling mesa.

39.97 The original cor. of secs. 7, 8, 17 and 18, which is a
mound of earth and stone with charred stake deposit, from
which the blazed stump of an old mesquite bearing tree,
no marks, bears N. $14^{\circ} 15'$ E. 140 lks. dist.

In place thereof

Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the
ground for cor. of secs. 7, 8, 17 and 18, with brass cap
mkd.



dig pits, 18x18x12 ins., in each sec., $5\frac{1}{2}$ ft. dist.; and
raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Chains.

Land, level and rolling.

Soil, light, fine, dry, warm, gravelly and stony on N. 11 chs., 6 to 10 ins. deep, on adobe clay and sand subsoil; 2nd and 3rd rate.

No timber.


Undergrowth, greasewood, mesquite, sage and shadscale.

From the reestablished cor. of secs. 8, 9, 16 and 17.

N. 89° 56' W., on a true line bet. secs. 8 and 17. (E. 1/2)

Over level land.

- 1.85 Wagon road, bears NE. and SW.
- 10.00 Irrigation ditch, 10 lks. wide, 2 ft. deep, course N. 30° W.
- 17.00 Dry wash, 50 lks. wide, 5 ft. deep, course N. 80° E.
- 17.70 Foot of ascent, bears N. 80° E. and S. 80° W.; asc. 60 ft. along a steep S. slope.
- 28.50 Edge of mesa, bears N. 80° E. and S. 80° W.; thence over rolling mesa.
- 39.88 The original 1/4 sec. cor., which is a wooden post, 4 ft. long, 3 ins. dia., loosely set, and mkd. and witnessed as described by the surveyor general. In place thereof Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for 1/4 sec. cor., with brass cap. mkd.



and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor. Thence

S. 89° 08' W., on a true line bet. secs. 8 and 17, (W. 1/2). continuing my measurement.

39.57 The reestablished cor. of secs. 7, 8, 17 and 18.

Land, level and rolling.


Soil, light, dry, warm, coarse, gravelly and stony sandy loam, 3 to 6 ins. deep on clay and sand subsoil; 3rd rate.

Chains

No timber.
Undergrowth, greasewood, sage, shadscale, yucca, ocotillo and cactus.

N. 89° 47' W., on a true line bet. secs. 7 and 18. (E. $\frac{1}{2}$).
Over rolling mesa.

39.80 The original $\frac{1}{4}$ sec. cor., which is a wooden post, 4 ft. long, 3 ins. sq., loosely set, and mkd. and witnessed as described by the surveyor general. In place thereof Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap mkd.



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor. Thence

N. 88° 19' W., on a true line bet. secs. 7 and 18, (W. $\frac{1}{2}$) containing any measurement.

45.70 Edge of mesa, bears NE. and SW.; desc. 50 ft. along a steep NW. slope.

49.70 Foot of descent, bears NE. and SW.; thence over nearly level land.

13.70 Wagon road, bears NE. and SW.

37.68 The reestablished corner of secs. 7 and 18, on W. bdy. of the Tp. hereinbefore described.

Land, level and rolling.

Soil, light, dry, warm, coarse, gravelly and stony, 4 to 8 ins. deep on sand and gravel subsoil; 3rd rate.

No timber.
Undergrowth, greasewood, sage, shadscale, yucca, ocotillo and cactus.

From reestablished cor. of secs. 7, 8, 17 and 18.

N. 0° 06' E., on a true line bet. secs. 7 and 8.

Dependent Resurvey of the Subdivision of T. 6 S., R. 24 E.


Chains.

Over rolling mesa, thru scattering undergrowth.

34.30 Edge of mesa, bears E. and W.; desc. 50 ft. over a steep N. slope.

37.50 Wagon road, and foot of descent, bears E. and W.; thence over nearly level land, thru dense undergrowth, bears E. and W.

39.93 At the appointed point on 5th Mer. line, reestablish the cor. as follows: Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for 1/4 sec. cor., with brass cap mkd.




dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.; and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

76.00 Dry wash, 50 lks. wide, 2 ft. deep, course N. 60° E.; leave dense, enter scattering undergrowth, bears NE. and SW.

78.50 Wagon road, bears NE. and SW.

79.85 At the point 14 lks. E. of temp. cor. on 5th Mer. line, 874 lks. S. of temp. cor. on 5th Lat. line, reestablish the cor. as follows: Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground for cor. of secs. 5, 6, 7 and 8, with brass cap mkd.



dig pits, 18x18x12 ins., in each sec. 5 1/2 ft., dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor. Land, rolling and level.

Soil, on S. half mile, light, coarse, gravelly and stony, 4 to 8 ins. deep on sand and gravel subsoil; 3rd rate. On N. half mile the soil is light, fine, dry, warm sandy loam, 4 to 8 ins. deep on sand subsoil; 2nd rate.

No timber.

Chains.

Undergrowth, greasewood, sage, shadscale and mesquite.

From the established cor. of secs. 4, 5, 8 and 9.

S. $89^{\circ} 42'$ W., on a true line bet. secs. 5 and 8.


Over level land, across highway.

0.25 Wire fence, bears N. and S.; enter cultivated land, along fence to N. 30 lks. dist.

21.80 Wire fence, bears N. 89° E. and S. 89° W.; thence along fence to S.

39.60 Cor. of wire fences bearing E., W. and S., bears S. 25 lks. dist.

39.78 At a point 20 1/2 lks. S. of temp. cor. on 5th. Lat. line reestablish the cor. as follows:
Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for 1/4 sec. cor., with brass cap mkd.



dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.; and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

45.20 Irrigation ditch, 15 lks. wide, 2 ft. deep, course N. 10° W.

59.60 Wire fence, bears N. and S.; SW. fence cor. bears S. about 50 lks. dist.; leave cultivated land.

59.80 Wagon road, bears N. and S.

79.56 The reestablished cor. of secs. 5, 6, 7 and 8.

Land, level and gently rolling.

Soil, light, fine, dry, warm sandy loam, 4 to 8 ins. deep on sand subsoil; 2nd rate.

No timber.


Undergrowth, greasewood, sage, shadscale, cactus and mesquite.

N. $89^{\circ} 35'$ W., on a true line bet. secs. 6 and 7.

Over rolling land.

Chains

- 26.50 Dry wash, 50 lks. wide, 3 ft. deep, course NE.
- 39.75 At a point 14 lks. S. of temp. cor. on 5th. Lat. line, reestablish the cor. as follows:
Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap mkd.



dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.; and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

- 77.52 The reestablished cor. of secs. 6 and 7, on W. bdy. of T. 6 S., hereinbefore described.
Land, gently rolling.


Soil, light, fine, dry, warm sandy loam, 4 to 8 ins. deep on sand subsoil; 2nd rate.

No timber.

Undergrowth, greasewood, sage, shadscale, cactus and mesquite.

From the reestablished cor. of secs. 5, 6, 7 and 8. N. $0^{\circ} 19'$ E., on a true line bet. secs. 5 and 6. Over nearly level land.

- 19.00 Center of dry wash, 5 chs. wide, 4 ft. deep, course NE.
- 19.20 Wire fence, bears E. and W.; SW. fence cor. bears W. about 1.50 chs. dist.
- 37.50 Irrigation ditch, 12 lks. wide, 2 ft. deep, course NW.
- 39.70 Wire fence, bears E. and W.; cor. of fences bearing E., W. and S., bears W. about 1.50 chs. dist.; enter cultivated land.
- 39.93 At a point 13 lks. S. of temp. cor. on 5th. Mer. line, reestablish the cor. as follows:
Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap mkd.




Chains

dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.; and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

79.50 Wire fence, bears E. and W.; leave cultivated land.

79.60 Wagon road, bears E. and W.

79.76 The proportionate point for closing cor. of secs. 5 and 6 on 1st Standard Parallel South, Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground for closing cor. of secs. 5 and 6, on S. bdy. of sec. 31, T. 5 S., R. 24 E. with brass cap, marked



dig pits, 24x18x12 ins., crosswise on each line, E. and W., 3 ft., and S. of post, 7 ft. dist.; and raise a mound of earth, 4 ft. base, 2 ft. high, S. of cor.

From this cor., the reestablished standard cor. of secs. 31 and 32, T. 5 S., R. 24 E.; bears S. 89° 50' E. 27.60 chs. dist.

Land, nearly level.

Soil, light, fine, dry, warm sandy loam, 4 to 8 ins. deep on sand subsoil; 2nd rate.

No timber.

Undergrowth, sage, shadscale, greasewood and mesquite.

Meanders, T. 6.S., R. 24 E.

Meanders of the right bank of the Gila River, down stream.

Meanders of the right bank of the Gila River, down stream.

I commence at the meander cor. of frac. secs. 7 and 12, on the E. bdy. of the Tp., hereinbefore described,

Thence with meanders in sec. 12.

Thru dense undergrowth.

S. 74° 30' W. 24.40 chs. Bank 5ft. high. At 22.20 chs.

enter heavy timber, bears NE.

S. 81° 15' W. 5.20 " Bank 3 ft. high.

N. 73° 15' W. 8.20 "

N. 33° 45' W. 16.30 "

N. 51° 30' W. 5.90 "

N. 40° 30' W. 9.70 " Bank 4 ft. high..

N. 66° 15' W. 8.30. " At 0.50 chs. mouth of dry wash, 1 ch. wide, course SW.

N. 56° 15' W. 5.80 "

N. 58° W. 1.70 "

N. 75° 25' W. 9.46 " Bank 5 ft. high. At 9.05 chs.

wire fence, bears N. At 9.40

chs. road bears N. To the

meander cor. of frac. secs. 11

and 12, hereinbefore described.

Land, level river bottom.

Soil, alluvial; 1st rate.

Timber, few scattering cotton wood..

Undergrowth, willow, mesquite and sage.

Thence in sec. 11.

Thru heavy timber and dense undergrowth..

S. 80° 30' W. 3.20 chs. Bank 5 ft. high. At 0.10 chs.

wire fence bears N.

S. 84° 45' W. 13.20 "

N. 81° W. 6.90 "

N. 78° W. 4.80 "

N. 47° 15' W. 19.60 "

N. 35° 45' W. 5.40 " To meander cor. of frac. secs.

2 and 11, hereinbefore described.

Meanders of the right bank of the Gila River, down stream.

Land, level river bottom.

Soil, alluvial; 1st rate.

Timber, cottonwood.

Undergrowth, willow.

Thence in sec. 2.

Over level, cultivated bottom land.

N. 36° 15' W., 12.50 chs. Bank 5 ft. high.

N. 48° W. 12.90 " Bank 12 ft. high. At 8.80 chs. wire fence bears N.

N. 76° W. 6.90 "

S. 89° W. 3.60 " At 1.60 chs. leave cultivated land, enter dense undergrowth, bears N.

N. 87° W. 3.20 "

N. 53° W. 4.50 " Bank 4 ft. high. To meander cor. of frac. secs. 2 and 3, here ~~imbefore~~ described.

Land, nearly level.

Soil, alluvial; 1st rate.

Timber, scattering cottonwood.

Undergrowth, scattering willow and sage.

Thence in sec. 3.

Thru scattering timber and dense undergrowth.

N. 60° 45' W. 4.60 chs. Bank 5 ft. high.

N. 54° 15' W. 33.80 "

N. 58° W. 21.50 "

S. 68° 30' W. 14.60 " Bank 10 ft. high. At 5.60 chs. wire fence bears N.

S. 73° 15' W. 8.90 " Bank 12 ft. high. At 0.90 chs. wire fence bears N. At 6.00 chs.

wire fence bears N.; NE. fence cor. bears N. about 1 ch. dist.

S. 76° W. 7.92 " At 4.50 chs. wire fence bears N.;

Meanders, T. 6 S., R. 24 E.

The right bank of the Gila River, down stream

Meanders of the right bank of the Gila River, down stream.

... NW. fence cor. bears N. about
1.50 chs. dist. To meander
cor. of frac. secs. 3 and 4,
hereinbefore described,

Land, nearly level.

Soil, alluvial; 1st and 2nd rate.

Timber, scattering cottonwood.

Undergrowth, willow, sage and mesquite.

Thence in sec. 4.

Thru scattering timber and undergrowth.

S. 45° W. 11.30 chs. Bank 3 ft. high. At 1.30 chs.
mouth of dry wash, course S.

At 2.50 chs. wire fence bears N.;
enter cultivated land. At 11.00
chs. leave cultivated land, enter
scattering undergrowth, bears W..

S. 69° 30' W. 9.40 " Bank 8 ft. high. At 4.70 chs:
wire fence bears N.

N. 54° 45' W. 14.30 " Bank 5 ft. high,

N. 43° W. 9.80 " Bank 3 ft. high.

N. 33° W. 9.80 "

N. 11° 30' W. 21.06 " Bank 5 ft. high: To meander
cor. of frac. sec. 33 on S. bdy.
T. 5 S., R. 24 E. (lpt estd. Par. S.),
hereinbefore described.
described.

Land, nearly level.

Soil, alluvial, 1st rate.

Timber, scattering cottonwood.

Undergrowth, willow.

Meanders of the left bank of the Gila River, up stream.

Commence at the meander cor. of frac. sec. 32, on S.

bdy. of T. 5 S., R. 24 E. (1st std. Pay. Sec. 0 herein before de-
scribed.

Thence with meanders in sec. 5.

Over level cultivated bottom land.

S. 68° 45' E. 4.83 chs. Bank 10 ft. high. To meander

cor. of frac. secs. 4 and 5, here-
inbefore described.

Land, level.

Soil, alluvial; 1st rate.

No timber or undergrowth.

Thence in sec. 4.

Over level, cultivated bottom land.

N. 86° E. 4.70 chs. Bank 10 ft. high. At 1.40 chs.

leave cultivated land, enter
scattering undergrowth, bears

S. 70° E.

S. 68° E. 9.70 " Bank 6 ft. high.

S. 55° 15' E. 16.10 "

S. 1° W. 9.80 " Bank 5 ft. high. At 5.00 chs.

wire fence bears W.; enter heavy
timber.

S. 10° W. 21.60 " Bank 10 ft. high. At 3.90 chs.

wire fence bears NW.; leave tim-
ber and undergrowth, enter culti-
vated land.

S. 21° E. 6.00 "

S. 59° 30' E. 7.90 " Bank 15 ft. high. At end of

course leave cultivated land,

enter dense undergrowth, bears S.

S. 67° E. 15.60 " At 8.20 chs. wire fence bears S.;

leave undergrowth, enter cultivat-
ed land.

S. 88° E. 20.70 " At 12.50 chs. leave cultivated

land, enter dense undergrowth,
bears S.

Meanders, T. 6 S., R. 24 E.

Meanders of the left bank of the Gila River, up stream.

S. 81° E. 12.20 chs. Bank 20 ft. high. At 7.50 chs. enter mouth of dry wash, course N. At 11.00 chs. leave dry wash. At 12.00 chs. wagon road bears S. To meander cor. of frac. secs. 3 and 4, hereinbefore described.

Land, nearly level.

Soil, alluvial, 1st rate.

Timber, cottonwood.

Undergrowth, willow.

Thence in sec. 3.

Thru dense undergrowth.

N. 77° E. 20.50 chs. Bank 10 ft. high. At 0.20 chs. wire fence bears S. At 10.00 chs. wire fence bears S. At 20.30 wire fence bears S. enter open cultivated land.

N. 37° 30' E. 16.50 " Bank 5 ft. high. At 13.60 chs. cor. of wire fences bearing E. and S.; leave cultivated land, enter scattering timber and dense undergrowth.

N. 84° E. 5.90 " Bank 6 ft. high.

S. 40° 15' E. 3.00 "

S. 44° E. 29.90 " Bank 10 ft. high.

S. 60° E. 13.90 " At 1.30 chs. wire fence, course S.

S. 50° E. 0.90 " Bank 6 ft. high. At end of course enter heavy timber, bears S.

S. 89° 30' E. 1.00 "

S. 52° E. 1.70 " Bank 4 ft. high.

S. 39° 15' E. 2.73 " To meander cor. of frac. secs. 3 and 10. hereinbefore described.

Meanders of the left bank of the Gila River, up stream.
 Land, nearly level bottom land.
 Soil, alluvial; 1st rate.
 Timber, cottonwood.
 Undergrowth, willow.

Thence in sec. 10.

Thru heavy timber and dense undergrowth.

S. 52° 51' E. 5.63 chs. Bank 4 ft. high. To meander
 cor. of frac. secs. 10 and 11.
 hereinbefore described.

Land, level bottom.

Soil, alluvial; 2nd rate.

Timber, cottonwood.

Undergrowth, willow.

Thence in sec. 11.

Thru heavy timber and dense undergrowth.

S. 75° E. 0.60 chs. Bank 4 ft. high.

S. 64° E. 8.80 "

S. 58° E. 8.00 "

S. 57° 30' E. 4.60 "

S. 54° 30' E. 8.00 "

S. 51° E. 5.10 " Bank 5 ft. high.

S. 11° W. 3.40 "

S. 65° E. 13.90 " Bank 3 ft. high.

S. 87° 30' E. 10.10 "

S. 76° 15' E. 8.00 "

S. 31° 45' E. 11.90 " At 6.70 chs. wire fence bears W.;
 leave timber and undergrowth,
 enter cultivated land.

S. 45° 35' E. 19.42 " Bank 8 ft. high. At 18.80 chs.
 wire fence bears S. At 19.20
 chs. wagon road bears S. To
 meander cor. of frac. secs. 11
 and 12, hereinbefore described.

Land, level bottom.

Meanders of the left bank of the Gila River, up stream.
 Soil, alluvial; 1st rate.
 Timber, cottonwood.
 Undergrowth, willow.

Thence in sec. 12.

Over level cultivated bottom land.

S. 85° E. 19.40 chs. Bank 8 ft. high. At 0.10 chs.
 wire fence bears S.

S. 41° E. 9.60 " At 0.30 chs. wire fence bears S.

S. 11° E. 10.40 " Bank 5 ft. high. At 1.20 chs.
 wire fence bears W. At 4.40
 chs. wire fence bears W. At
 end of course wire fence bears
 NW. and SE.

S. 62° 45' E. 7.63 " Bank 6 ft. high. To meander
 cor. of frac. secs. 12 and 13.
 Land, level bottom. hereinbefore described.

Soil, alluvial; 1st rate.
 No timber or undergrowth.

Thence in sec. 13.

Over level cultivated bottom land.

S. 79° E. 8.00 chs. Bank 6 ft. high. At 5.50 chs.
 wire fence bears S.

N. 70° 35' E. 4.50 " To meander cor. of frac. secs.
 12 and 13, hereinbefore described.

Land, level.
 Soil; alluvial; 1st rate.
 No timber or undergrowth.

Thence in sec. 12.

Over level cultivated bottom land.

N. 59° E. 10.60 chs. Bank 6 ft. high.

S. 82° 45' E. 14.40 " Bank 8 ft. high.

S. 24° 35' E. 4.10 " To meander cor. of frac. secs.

Chains.

Meanders of the left bank of the Gila River, up stream.

Land, level.

Soil, alluvial; 1st rate.

Timber, few scattering cottonwood; with little scattering willow undergrowth.

Thence in sec. 13.

Over level bottom land, thru scattering timber and undergrowth.

S. 30° 23' E. 15.76 chs. Bank 12 ft. high. To meander

cor. of frac. secs. 13 and 18, & W.C. to cor. of secs. 7, 12, 13 & 18, on E. bdy. of the Tp., hereinafter described.

Land, level bottom.

Soil, alluvial; 1st rate.

Scattering cottonwood timber and willow undergrowth.

General Description.

The southern part of this township consists low mesa, with rough and broken surface, which becomes rolling in the central and western parts. The northern, eastern and southwestern portions are level, while the northeast corner is rough and mountainous.

The soil varies from rich alluvial loam along the Gila River, to coarse and stony in the central, southern, western, and northeast corner of the township; which is of little value for cultivation, but affords a small amount of grazing.

The township is drained by the Gila River which flows thru the northeastern, and Cottonwood Creek thru the southeastern part. The land along the river is all settled and under cultivation. Abundant crops of alfalfa, cereals, fruits and vegetables are obtained. Cottonwood timber is scattered along these streams; and various kinds of desert undergrowth are plentiful.


The town of Pima is located about one half mile east of the center of the east bdy. of sec. 24.

Survey completed March 17, 1916.

W. B. ...
U. S. Surveyor.

Book "A".
Group 65 - - - Arizona.
T. 6 S., R. 24 E.

DATE DIAGRAM

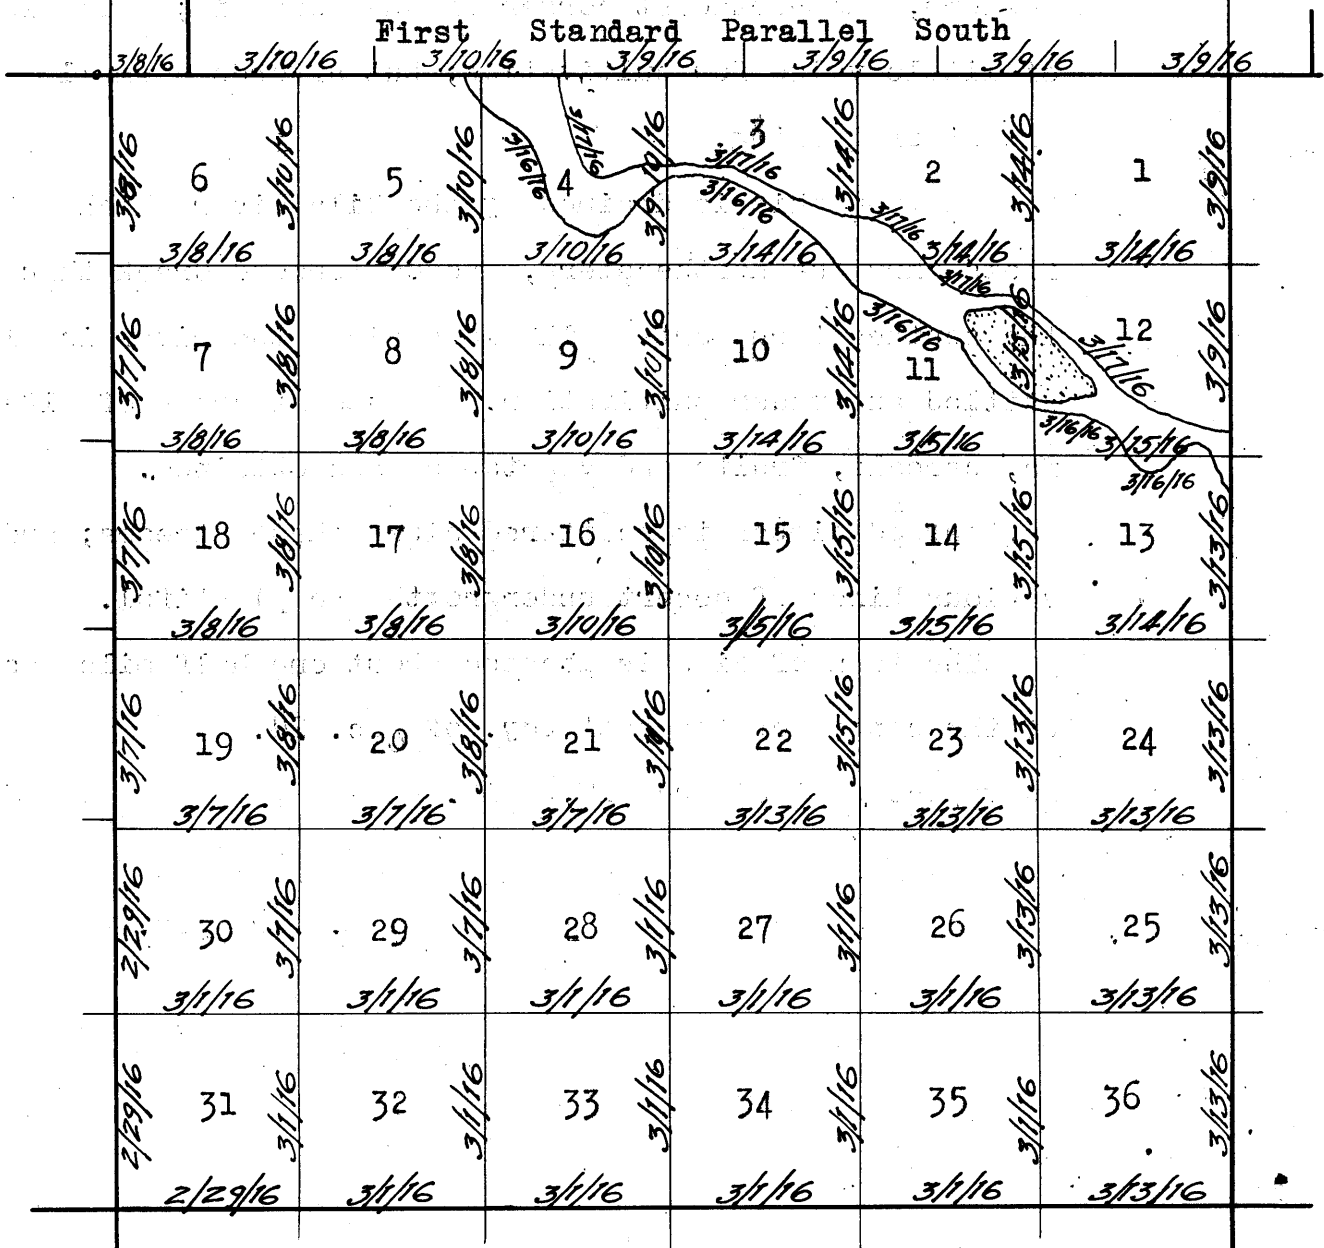

Resurveys and surveys executed on the dates shown on the above diagram by A. B. Rich, U. S. Surveyor.

THE UNDERSIGNED hereby certify that the corner re-established by A. B. Rich, U. S. Surveyor, General Land Office, is located at point recognized and accepted by adjoining settlers as being identical with the original survey corner, and is the section corner of sections 13, 18, 19 and 24, T. 6 S., Rs. 24 and 25 E., G. and S. R. B. and M.

133

H. J. Anderson
Pima Ariz

March 15, 1916.

THE UNDERSIGNED hereby certify that the corner re-established by A. B. Rich, U. S. Surveyor, General Land Office, is located at the point recognized and accepted by adjoining settlers as being identical with the original survey corner, and is the $\frac{1}{4}$ section corner of sections 13 & 24 T. 6 S., R. 24 E., G. and S. R. B. and M.

Karl Wilson

Pima Ariz

H. J. Anderson

Pima Ariz

March 15, 1916.

THE UNDERSIGNED hereby certify that the corner re-established by A. B. Rich, U. S. Surveyor, General Land Office, is located at the point recognized and accepted by adjoining settlers as being identical with the original survey corner, and is the section corner of sections 4, 5, 8 and 9, T. 6 S., R. 24 E., G. and S. R. B. and M.

J. M. Farber

Pima Ariz

H. J. Anderson

Pima Ariz

March 15, 1916.

THE UNDERSIGNED hereby certify that the corner re-established by A. B. Rich, U. S. Surveyor, General Land Office, is located at the point recognized and accepted by adjoining settlers as being identical with the original survey corner, and is the $\frac{1}{4}$ section corner of sections 13 & 14 T. 6 S., R. 24 E., G. and S. R. B. and M.

D. H. McBrick

Fairview Ariz

March 15, 1916.

THE UNDERSIGNED hereby certify that the corner re-established by A. B. Rich U. S. Surveyor, General Land Office, is located at the point recognized and accepted by adjoining settlers as being identical with the original survey corner, and is the $\frac{1}{4}$ section corner of sections 11 and 14, T. 6 S., R. 24 E., G. and S. R. B. and M.

L. B. Bossert

Fairview Ariz

Peter A. Norton

Fairview Ariz

March 15, 1916.

CERTIFICATE OF UNITED STATES SURVEYOR.

I, A. B. Rich, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 65, Arizona, bearing date of the 17th day of November, 1915, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, ^{re-} surveyed all those parts or portions of First Standard Parallel south, in Ranges 23 and 24 East, and the South, East and West boundaries, and subdivision lines of Township 6 South, Range 24 East, and surveyed all those parts or portions of Meander lines of the right and left banks of the Gila River, within Township 6 South, Range 24 East, of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in and by diagram on page 132 hereof the foregoing field notes as having been executed by me, and under my direction; and that all the corners of resurvey and survey said ~~survey~~ have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General for Group 65, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such ~~survey~~ resurvey and survey.

A. B. Rich
U. S. Surveyor.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix, Arizona, August 2, 1919.

The foregoing field notes of ~~the survey of~~ the Resurvey of the First Standard Parallel, South, thru Range 24 East, and part of Range 25 East, and the South, East and West boundaries, and the Subdivision lines of Township 6 South, Range 24 East, and the Survey of the Meander Lines of Right and Left Banks of the Colorado River, within Township 6 South, Range 24 East, of the Gila and Salt River Base and Meridian, in the State of Arizona,

executed by A. B. Rich, U. S. Surveyor, under his special instructions dated Nov. 17, 1915, for Group 65, Arizona, ~~and~~ having been critically examined, and the necessary corrections and explanations made, the said field notes, and the ^{re-} surveys and surveys they describe, are hereby approved.

Frank O. Frost
U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above-described surveys in _____, has been correctly copied from the original notes on file in this office.

U. S. Surveyor General.