

3301

Book "C"

4-679

BOOK 3301

FIELD NOTES

RE-
OF THE SURVEY OF THE

SUBDIVISION LINES

of

TOWNSHIP 20 SOUTH, RANGE 26 EAST.

Of the Gila and Salt River Base and Meridian,

In the State of Arizona.

EXECUTED BY

Sidney E. Blout,

In the capacity of U. S. Surveyor, under instructions dated November 8, 1915, issued by the United States Surveyor General to govern surveys included in Group No. 64, which were approved by the Commissioner of the General Land Office, November 23, 1915.

ReSurvey commenced March 11, 1916.

ReSurvey completed April 22, 1916.

Executed under Assignment
Instructions dated Jan. 14, 1916.

3301

3301


Book No. 3301

Book "C"

Group 64 - - - Arizona.

BOOK 3301

INDEX DIAGRAM.

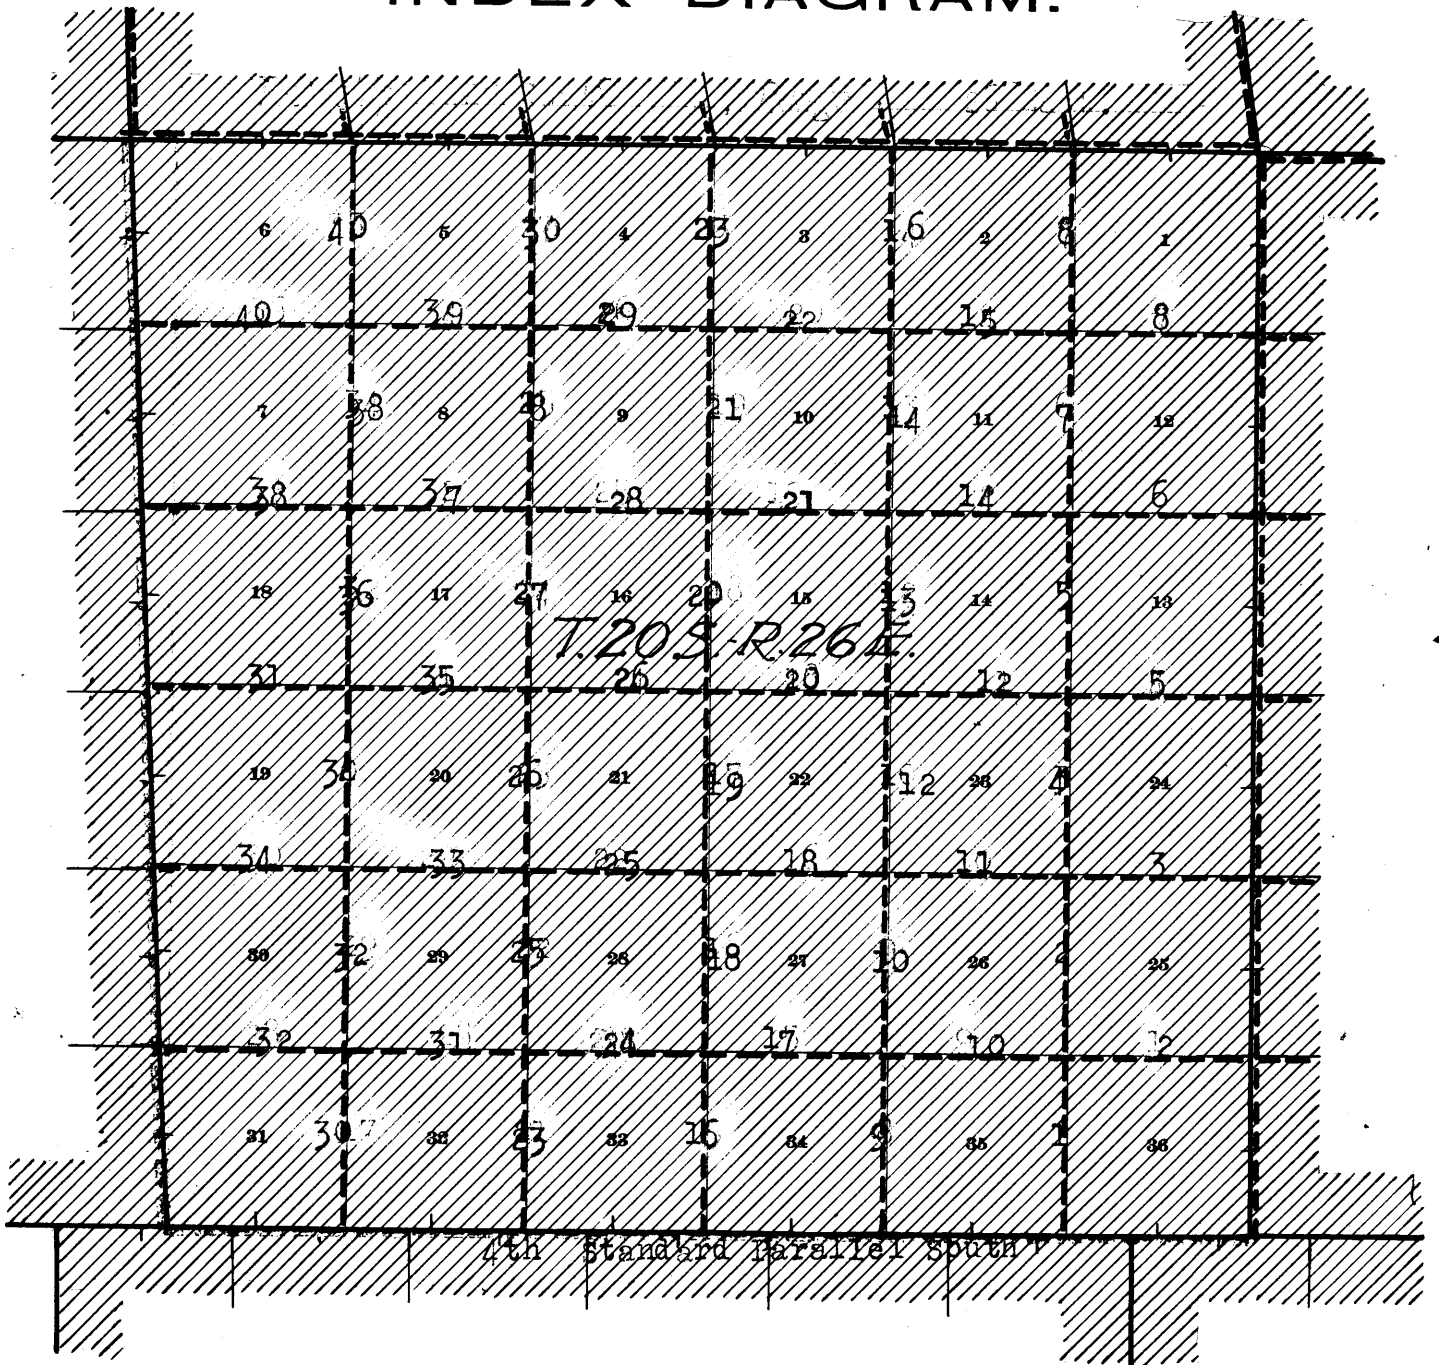

----- Lines resurveyed under this group.

_____ Accepted surveys.

//// Areas surveyed as per accepted plats on file.

Dependent resurvey of subdivision of township 20 S., R. 26 E., 1 B

Chains.

Resurveys hereinafter described, executed by Sidney E. Blout, U. S. Surveyor, on dates shown on diagram on page 42 hereof, using a Buff light mountain transit No. 9793 described with record of test and certificate of approval in Book "A," of this Group, and a later test described in Book "B."

Examine the adjustments of the transit and find them to be correct, and know from recent and repeated tests of the solar apparatus, by comparing its indications, resulting from solar observations, made during a.m. and p.m. hours with a meridian established by observations on Polaris, that the instrument is in satisfactory adjustment.

From the reestablished standard cor. of secs. 35 and 36 on S. bdy. of Tp. (4th. Standard Parallel South), an iron post 3 ins. in diam., 12 ins. above ground, firmly set, marked on brass cap,

T20S R26E
S C
S35 | S36
1914

and witnessed by pits E., W. and N., and mound of earth N. of cor.

N. 0° 19' W., on a true line, bet. secs. 35 and 36.

Over level land, thru scattering undergrowth.

No trace of original 1/4 sec. cor. can be found after diligent search; therefore, at

40.12

(One-fourth of dist. bet. existing cors. N. and S.),

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of secs. 35 and 36, marked on brass cap,

S35 | S36
1916

Dig pits 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

44.90

Road to McNeal, Arizona, brs. N. 30° E. and S. 60° W.

45.20

Wire fence brs. E. and W., 45 lks. W. of SE. cor.; leave scattering undergrowth, brs. E. and W.; enter cleared land, extends W. 10 chs.

55.85

Wire fence, brs. E. and W., 45 lks. W. of intersection with wire fence, brs. N. and S.; leave cleared land, brs. E. and W.; extends W. about 8.00 chs.; enter scattering undergrowth.

74.85

Wire fence, brs. E. and W., 55 lks. W. of intersection with wire fence, brs. N. and S.; leave scattering undergrowth, brs. E. and W.; enter cultivated land, brs. E. 50 lks., and W. 5.00 chs. dist.

78.30

H. A. Averill's house brs. W. 150 lks. dist.

79.16

Wire fence brs. E. and W., 60 lks. W. of NE. fence cor.; leave cultivated land, brs. E. 60 lks. and W. about 450 lks. dist.

79.60

Public road brs. E. and W.

No trace of original sec. cor. can be found after diligent search; therefore, at

80.24

(Mid point bet. existing cors. N. and S.) set an iron post 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for reestablished 1/4 sec. cor. of secs. 25, 26, 35 and 36, marked on brass cap,

T20S R26E
S26 | S25
S35 | S36
1916

Dig pits 18x18x12 ins., in each sec. 5 1/2 ft. dist., and

2. Dependant resurvey of Subdivision of Township 20 S. R. 26 E.

Chains.

raise a mound of earth 4 ft. base, 2 ft. high, W. of cor. Land, level valley, drains to the southwest. Soil, fine dry, sandy loam, about 14 ins. deep, 1st rate. No timber. Undergrowth, scattering mesquite and greasewood. Good grass.

From the reestablished cor. of secs. 25, 30, 31 and 36, on E. bdy. of Tp., described in Book "B," N. $89^{\circ}21'W.$, on a true line, bet. secs. 25 and 36. Over level land, along public road, thru dense undergrowth. .10 A point 20 lks. S. of SE. cor. of wire fence. No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at 40.21 (Proportional dist.), Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 25 and 36, marked on brass cap,

$\frac{1}{4}$ S 25
S 36
1916

Dig pits 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor. 40.43 A point about 6 lks. S. of end of wire fence, brs. N. thru. sec. 25. 40.45 Road brs. N. $10^{\circ}E.$ and S. $10^{\circ}W.$ 41.80 Road brs. N. $60^{\circ}E.$ and S. $60^{\circ}W.$ 47.70 Wire fence on N. side of road brs. N. $88^{\circ}45'E.$ and S. $88^{\circ}45'W.$ 78.76 Wire fence brs. N. and S., 40 lks. N. of SW. cor. of fence. 79.56 Road brs. N. and S. 24 lks. N. of intersection with road brs. E. and W. 80.42 Intersect the reestablished cor. of secs. 25, 26, 35 and 36, hereinbefore described. Land, level valley, drains to the southwest. Soil, rich dry, fine sandy loam, 12 ins. deep, 1st rate. No timber. Undergrowth, dense mesquite and greasewood. Good grass.

N. $0^{\circ}13'W.$, on a true line, bet. secs. 25 and 26. Over level land, thru scattering undergrowth, along W. side of public road. 28.40 A point about 30 lks. W. of end of wire fence, brs. E. about 5.00 chs. dist. 29.16 George W. Amberson's house brs. E. 125 lks. dist. 29.80 A point 30 lks. W. of end of wire fence at SW. cor. of cultivated field, brs. E. about 20.00 chs. dist. 39.92 A point, 26 lks. W. of end of wire fence at NW. cor. of cultivated field, brs. E. about 20.00 chs. dist. No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at 40.12 (One fourth of dist. bet. existing cors. N. and S.), Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 25 and 26, marked on brass cap,


$\frac{1}{4}$ S 26 | S 25
1916

Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor. From this cor.,

Dependent resurvey of Subdivision of Township 20 S., R. 26 E. 3.

Chains.

- A windmill, brs. S. 53° 30' E. about 7.00 chs. dist.
- 56.56 Paul Connolli's house brs. W. about 1.00 ch. dist.
- 58.36 A point 45 lks. E. of end of wire fence, and SE. cor. of cultivated field, brs. W.
- 67.20 Jno. M. Patterson's house brs. E. 2.00 chs. dist.
- 60.00 Enter public road, brs. N. and S.
- 70.12 A point 45 lks. W. of end of wire fence, and SW. cor. of cultivated field brs. E.; cultivated land extends E. about 18.00 chs. dist.
- 79.80 A point 45 lks. E. of NE. cor. of wire fence, and cultivated field, and 45 lks. W. of NW. cor. of wire fence and cultivated field.
- 80.24 Intersect the recognized cor. of secs. 23, 24, 25 and 26, an iron pipe 3 ins. in diam., driven firmly in the ground, at the intersection of public highways, and testified to by settlers in vicinity as occupying the same position formerly occupied by the original government corner. Reestablish this cor. as follows: Remove the iron pipe, and in the same place, set an iron post 3 ft. long, 2 ins. in diam., 36 ins. in the ground for cor. of secs. 23, 24, 25 and 26, marked on brass cap,



Omit the cor. accessories to this cor. since the same would interfere with the travel on the roads.


From this cor.,

- W. L. Kaneaster's house brs. N. 10° 45' W.
- W. L. Kaneaster's windmill brs. N. 11° 50' W.
- The SW. cor. of Wm. J. Schultz's house brs. N. 25° E.

Land, level valley, drainage southwest.
 Soil, dry, fine sandy loam, 12 to 16 ins. deep, 1st rate.
 No timber.
 Undergrowth, scattering mesquite.
 Good grass.

From the reestablished cor. of secs. 19, 24, 25 and 30, on E. bdy. of Tp., described in Book "B," S. 89° 52' W., on a true line, bet. secs. 24 and 25. Over level land, along public road; scattering undergrowth on both sides.

- 23.50 G. M. Kelley's house brs. N. 160 lks. dist.
- 36.90 B. T. Hampton's house brs. south 150 lks. dist.
- 37.00 Enter road, brs. E. and W.
- No trace of original 1/4 sec. cor. can be found after diligent search; therefore, at
- 40.58 1/2 (Mid point bet. existing cors. E. and W.), Set an iron post 3 ft. long, 1 in. in diam., 36 ins. in the ground for reestablished 1/4 sec. cor. of secs. 24 and 25, marked on brass cap,



Omit the cor. accessories to this cor. for the reason that the same would interfere with the travel on the road.

- 40.90 A point 45 lks. N. of end of wire fence brs. S. thru. sec. 25, and 45 lks. S. of SE. cor. of wire fence on N. side of road.
- 65.00 A point 50 lks. N. of NE. cor. of cultivated field.
- 79.72 A point 46 lks. N. of NW. cor., and 45 lks. S. of SW. cor. of wire fences.
- 81.17 Intersect the reestablished cor. of secs. 23, 24, 25 and 26, hereinbefore described.

4. Dependent resurvey of the subdivision of T120 S., R.26 E.

Chains.

Land, level valley, drainage southwest.
Soil, fine, dry, sandy loam, about 12 ins. deep, 1st rate.
No timber.
Undergrowth, scattering mesquite.
Good grass.

- .45 A point 45 lks. E. of SE. cor. and 45 lks. W. of SW. cor. of wire fences.
- .60 The SE. cor. of cultivated field brs. W. 50 lks. dist.; field extends W. about 5.00 chs. dist.
- 29.50 A point 45 lks. W. of end of wire fence at SW. cor. of cultivated field brs. E. and W. The cultivated land extends E. about 10.00 chs. dist.
- 23.90 A point 45 lks. W. of end of wire fence, and cor. of cultivated field brs. N. 50° E., about 23.00 chs. dist.
- 32.50 A point 45 lks. E. of end of wire fence, and NE. of cor. of cultivated land, brs. W. The cultivated land extends west about 15.00 chs. dist.
- 40.20 No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at Set an iron post 3 ft. long, 1 in. in diam., 30 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 23 and 24, marked on brass cap,

S23 | S24

1916

Dig pits 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

From this cor.,

The E. end gable of W.L. Kaneaster's house brs. S. 3° 35' W.

W.L. Kaneaster's windmill brs. S. 3° 10' W.

The SW. cor. of Wm. Schultz's house brs. S. 8° 40' E.

The SW. cor. of Chas. W. Kaneaster's house brs. N. 30° 45' E., about 5.00 chs. dist.

The chimney on Austin Bouldin's house brs. N. 66° 45' W.

A pumping plant and well brs. S. 88° 06' E. about 12.00 chs. dist.

A pumping plant and well brs. S. 62° 30' W., 250 lks. dist.

- 40.54 A point 45 lks. E. of end of wire fence brs. W.; and 45 lks. W. of end of wire fence, brs. E.

- 79.96 A point 45 lks. E. of NE. cor. & 45 lks. W. of NW. wire fence cor.

- 80.40 Intersect the recognized cor. of secs. 13, 14, 23 and 24, an iron pipe 3 ins. in diam., 8 ins. above ground, firmly set at the intersection of public roads. Reestablish the cor. as follows:

Remove the iron pipe, and in the same place, set an iron post 3 ft. long, 2 ins. in diam., 36 ins. in the ground, for cor. of secs. 13, 14, 23 and 24, marked on brass cap,

T20S | R26E

S14 | S13

S23 | S24

1916

This cor. falling at the intersection of public roads, omit the cor. accessories for the reason that the same would interfere with the travel on the roads.

From this cor.,

The NE. cor. of R.G. Dillman's house brs. N. 41° 30' W.

R.G. Dillman's windmill brs. N. 44° 55' W.

Wm. Hosmer's house brs. N. 32° 45' E.

Dependent resurvey of the Subdivision of T.20 S., R.26 E. 5.

Chains.

Wm. Hosmer's windmill brs. N.33°45'E.
Land, level valley, drainage SW.
Soil, fine dry sandy loam, 12 ins. deep, 1st rate.
No timber.
Undergrowth, scattering mesquite.
Good grass.

From the reestablished cor. of secs. 13, 18, 19 and 24, on E. bdy. of Tp., described in Book "B"
S.89° 45' W., on a true line, bet. secs. 13 and 24.
Over level land in road.

- .45 A point 45 lks. N. of NE. cor., and 45 lks. S. of SE. cor. of wire fences.
- 30.40 Jas. Mortenson's house brs. south 150 lks. dist.
- 32.30 C.M. Baldrige's house, brs. N. 5.00 chs. dist.
No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at
- 40.67 (Mid. point between existing cors. E. and W.) Set an iron post 3 ft. long, 1 in. in diam., 36 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. of secs. 13 and 24, marked on brass cap,

S 13
S 24
1916

This cor. falls in the road; therefore, omit the cor. accessories to this cor. for the reason that the same would interfere with the travel on the road.
From this cor.,

- Wm. Hosmer's house brs. N. 5° W.
- Wm. Hosmer's windmill, brs. N. 8° 43' W.
- C.M. Baldrige's house brs. N. 62° 20' E.
- C.M. Baldrige's windmill brs. N. 57° 30' E. about 12.25 chs. dist.
- 41.23 A point 45 lks. S. of SW. cor. of wire fence, and 45 lks. N. of end of wire fence, brs. S. thru. sec. 24.
- 80.89 A point 45 lks. N. of NW. cor., and 45 lks. S. of SW. cor. of wire fences.
- 81.34 Intersect the reestablished cor. of secs. 13, 14, 23 and 24 hereinbefore described.
Land, level valley, draining SW.
Soil, fine, dry sandy loam, about 14 ins. deep, 1st rate.
No timber.
Undergrowth, scattering mesquite.
Good grass.

N. 0° 08' W., on a true line, bet. secs. 13 and 14.
Over level land, along center line of road.

- .45 A point 45 lks. E. of SE. cor. and 45 lks. W. of SW. cor. of wire fences.
- .50 A point 50 lks. E. of SE. cor. of cultivated field, extends N. about 10.00 chs. and W. about 8.00 chs. dist.
- 9.90 A point 45 lks. E. of end of wire fence, and NE. cor. of cultivated field, brs. W. about 10.00 chs. dist.
- 40.32 A private road, brs. E. and W.
No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at
- 40.42 Set an iron post 3 ft. long, 1 in. in diam., 36 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. of secs. 13 and 14, marked on brass cap,


$\frac{1}{4}$ S 14 | S 13
1916

This cor. falls in road; therefore, omit the cor. accessories for the reason that the same would interfere

6. Dependent resurvey of Subdivision of T.20 S., R.26 E.


Chains

with the travel on the road.
 This cor. is in line with fences in secs.13 and 14, which bear E. and W. thru the center of these secs.
 From thks cor.,
 The chimney on G. Dillman's house brs.S.77°45'W.
 M.Crawford's house brs.N.10°20'W.
 M.Crawford's windmill brs.N.12°W.
 49.00 Wash, 10 lks.wide, 1 ft. deep, course S.60°W.
 56.00 A point 50 lks.E. of SE.cor. of cultivated field brs.W. about 15.00 chs. dist.
 60.67 A point 45 lks.W. of end of wire fence, brs.E.
 61.50 The SW.cor. of cultivated field, brs.E. 50 lks.dist. Field extends E. about 10.00 chs.dist. and N. about 15.00 chs. dist.
 76.00 Dry sand wash, 10 lks.wide, 1½ ft. deep, course S.60°W. The NW. cor. of cultivated field brs.E. 50 lks.dist. The cultivated land extends N.60°E. about 5.00 chs.dist.
 80.42 A point 45 lks.E. of NE.cor. of wire fence, and cultivated field and 45 lks.W. of NW.cor. of wire fence.
 80.84 Intersect the recognized cor. of secs.11,12,13 and 14, a mesquite stake driven in the ground at the intersection of public roads. Reestablish the cor. as follows:
 Destroy the stake, and in the same place set an iron post 3 ft.long, 2 ins. in diam., 36 ins. in the ground, for cor. of secs.11,12, 13 and 14, marked on brass cap,



This cor. falls in the road; therefore, omit the cor. accessories for the reason that the same would interfere with the travel.
 From this cor.,
 The chimney on M.Crawford's house brs.S.11°45' W.
 M.Crawford's windmill brs.S.13°W.
 Land, level valley, drainage SW.
 Soil, dry sandy loam, about 14 ins. deep, 1st rate.
 No timber.
 Undergrowth, scattering mesquite.
 Good grass.

 From the reestablished cor. of secs. 7,12,13 and 18, on E. bdy. of Tp., described in Book " B,"
 S.89°44'W., on a true line, bet.secs.12 and 13.
 Over level land, along road.
 .45 A point 45 lks. N. of NE. cor., and 45 lks.S. of SE. cor. of wire fences.
 40.50 A point 40 lks.S. of end of wire fence bears north. No trace of original ¼ sec.cor. can be found after diligent search; therefore, at
 40.86 (Mid point bet. existing cors.E. and W.), Set an iron post 3 ft.long, 1 in. in diam., 26 ins. in the ground for reestablished ¼ sec.cor. of secs.12 and 13, marked on brass cap,




This cor. falls in public road; therefore, omit the cor. accessories for the reason that the same would interfere with the travel on the road.
 45.70 M.B.William's house brs.S. about 15.00 chs.dist.
 61.60 A point 40 lks.S. of end of wire fence, brs.N.
 81.24 A point 45 lks.N. of NW.cor., and 45 lks.S. of SW.cor. of

Dependent resurvey of the Subdivision of T.20 S. R.26 E. 7


Chains.

81.72 wire fences.
Intersect the reestablished cor. of secs.11,12,13 and 14, hereinbefore described.
Land, level valley, drainage southwest.
Soil, dry, sandy loam about 12 ins. deep, 1st rate.
No timber.
Undergrowth, scattering mesquite.
Good grass.

N.0° 02' W., on a true line, bet. secs. 11 and 12.
Over level land, along center line of public road.
.45 A point 45 lks. E. of SE. cor., and 45 lks.W. of SW. cor. of wire fences.
9.88 A point 45 lks.W. of end of wire fence, brs.E.
9.95 The SW. cor. of cultivated field brs. E.50 lks.dist.; the field extends E. about 20.00 chs.
11.45 A point, 50 lks.E. of SE.cor. of cultivated land brs. N. and W.
20.08 A point 40 lks.W. of end of wire fence, brs.E.
29.20 Sarah E.Thomsen's house brs.E. about 8.00 chs.dist.
No trace of original $\frac{1}{4}$ sec.cor. can be found after diligent search; therefore, at
39.96 (Mid point bet. existing cors. N.and S.) Set an iron post 3 ft.long, 1 in. in diam., 30 ins. in the ground for reestablished $\frac{1}{4}$ sec.cor. of secs.11 and 12, marked on brass cap,



Dig pits, 18x18x12 ins., N.and S.of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W.of cor.
From this cor., the improvements belonging to W.H.Seaver, SR., bear as follows:
House brs.N.22°W.
Windmill brs.N.22°35'W.
Well, brs.N.35°E.
40.08 A point 45 lks.W. of end of wire fence, brs.E.
79.56 A point 46 lks.E. of NE.cor. of wire fence, and 45 lks.W. of end of wire fence brs.E.
79.92 Intersect the recognized cor. of secs.1,2,11 and 12, a mesquite stake driven in the ground at the intersection of public roads.
Reestablish the cor. as follows: Remove the stake, and in the same place, set an iron post, 3 ft.long, 2 ins. in diam., 36 ins. in the ground, for cor.of secs.1,2, 11 and 12, marked on brass cap,



This cor.falls in center of public roads; therefore, omit the cor. accessories for the reason that the same would interfere with the travel on the roads.
From this cor.,
House belonging to W.H.Seaver, Jr. brs.S.75°40'E.
Windmill belonging to W.H.Seaver, Jr. brs.S.80°05'E.
Well, belonging to W.H.Seaver, Sr., brs.S.30°E.
House brs.S.9°50'W. (W.H.Seaver, Sr.)
Windmill brs.S.11°15'W. (W.H.Seaver, Sr.)
Joseph Mortensen's house brs.S.87°25'W.
Chimney on Joseph Kirby's house brs.N.74°30'W.
Joseph Kirby's windmill brs.N.73°W.
Land, level valley, drainage southwest.

8. Dependent resurvey of the subdivision of T. 20 S. R. 26 W.

Chains. Soil, rich fine, sandy loam about 14 ins. deep, 1st rate.
 No timber.
 Undergrowth, scattering mesquite.
 Good grass.

From the reestablished cor. of secs. 1, 6, 7 and 12, on E. bdy. of Tp., described in Book "B,"
 S. 89° 06' W., on a true line, bet. secs. 1 and 12.
 Over level land, thru scattering undergrowth.

28.30 Wire fence, brs. N. 20° E. and S. 20° W. about 50 lks. N. of intersection with fence, brs. E. and W.

34.90 White Water wash, 25 lks. wide, banks 4 ft. high, course S. 10° W.; leave undergrowth, brs. N. and S.
 No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at

41.06 (Midpoint bet. existing cors. E. and W.) Set an iron post 3 ft. long, 1 in. in diam., 30 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 1 and 12, marked on brass cap,

$\frac{1}{4}$ S 1
 S 12
 1916

Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor. From this cor., the improvements of W. H. Seaver, Jr., bear as follows:

House brs. S. 78° 30' W.
 Windmill brs. S. 80° 25' W.

44.30 Wire fence brs. N. and S., intersecting E. and W. fence, at 1.00 chain S. of line.

60.75 Wire fence, brs. N. 40° E. and S. 40° W., intersecting E. and W. fence, about 1.00 chain S. of line.

81.68 Wire fence brs. N. and S.

82.12 Intersect the reestablished cor. of secs. 1, 2, 11 and 12, hereinbefore described.
 Land, level valley, drainage southwest.
 Soil, dry, sandy and gravelly loam about 16 ins. deep, 1st rate.
 No timber.
 Undergrowth, scattering mesquite.
 Poor grass.

From the reestablished cor. of secs. 1, 2, 35 and 36 on N. bdy. of Tp., described in Book "D" of this Group,
 S. 1° 19' W., on a true line, bet. secs. 1 and 2.
 Over level land; along center line of public road.

.45 A point 45 lks. E. of NE. cor., and 45 lks. W. of NW. cor. of wire fences.

.50 A point about 50 lks. W. of NW. cor. of cultivated field, brs. E. and S.

20.00 A point, 50 lks. W. of SW. cor. of cultivated field bears N. and E. about 20.00 chs. dist.

41.41 No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at

41.41 (Proportional dist.), Set an iron post 3 ft. long, 1 in. in diam., 36 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. of secs. 1 and 2, marked on brass cap,

$\frac{1}{4}$ S2 | S1
 1916

This cor. falls in the road; therefore, omit the cor. accessories to this cor. for the reason that the same would interfere with the travel on the road.

42.35 A point about 50 lks. E. of end of wire fence, brs. west thru the center of sec. 2.

Dependent resurvey of the Subdivision of T.20 S., R. 26 E.

Chains

81.90 A point about 45 lks.E. of the SE.cor. of wire fence.
 82.36 Intersect the reestablished cor. of secs.1,2,11 and 12,
 hereinbefore described.
 Land,level, slopes to the SW.
 Soil, dry,sandy loam, about 12 ins. deep, 1st rate.
 No timber, or undergrowth.
 Good grass.

 From the reestablished standard cor. of secs.34 and 35 on
 S.bdy.of Tp. (4th.Std.Par. S.),which is an iron post
 3 ins. in diam., 12 ins. above ground, firmly set,
 marked on brass cap,

T20S R26E
 S C
 S34|S35
 1911,

and witnessed by pits, E.,W. and N., and mound of earth
 N.of cor.,

N.0° 21'W., on a true line, bet. secs.34 and 35.
 Over level land, along center line of public road.

.45 A point about 50 lks.E. of SE. and 45 lks.W.of SW.wire
 fence cors.
 .60 A point 60 lks.E. of SE.cor. of cultivated field, brs.N.
 about 30 chs. and W. about 10.00 chs.dist.
 39.98 A point 60 lks.E. of end of wire fence brs.W. and 40 lks.
 W.of end of wire fence, brs.E.
 40.00 A point about 60 lks.E of SE.cor. of cultivated field brs.
 N. about 40.00 chs. and W. about 6.00 chs.dist.
 No trace of original sec.cor. can be found after dili-
 gent search; therefore, at
 40.10 (One fourth of dist. bet.existing cors. N.and S.), Set
 an iron post 3 ft.long, 1 in. in diam., 30 ins. in
 the ground for reestablished sec.cor. of secs. 34
 and 35, marked on brass cap,

S34|S35
 1916

Dig pits 18x18x12 ins., N.and S.of post, 3 ft. dist.,and
 raise a mound of earth 3½ ft. base, 1½ ft. high,W.of
 cor.

71.20 Edward L.Martin's house brs.W. 125 lks.dist.

79.55 A point 60 lks.E.of NE. and 10 lks.W.of NW. cor.of wire
 fences.

80.00 Road brs.E. and W.

No trace of original sec.cor. can be found after diligent
 search; therefore, at

80.20 (Mid point bet. existing cors.N.and S.) Set an iron post,
 3 ft.long, 2 ins. in diam., 30 ins. in the ground for
 reestablished cor.of secs. 26,27, 34 and 35, marked
 on brass cap,

T20S|R26E
 S27|S26
 S34|S35
 1916

Dig pits 18x18x12 ins., in each sec. 5½ ft. dist., and
 raise a mound of earth 4 ft. base, 2 ft.high,W.of cor.
 Land,level valley, drains to the SW.
 Soil, rich fine dry sandy loam, about 12 ins.deep,1st
 rate.
 No timber.
 Undergrowth, scattering mesquite.
 Good grass.

10. Dependent resurvey of the Subdivision of T. 20 S. R. 26 E.

Chains. From the reestablished cor. of secs. 25, 26, 35 and 36, here-
inbefore described,
N. 89° 55' W., on a true line, bet. secs. 26 and 35.
.58 Over level land, in lane, brs. N. and S.
Wire fence brs. N. and S., about 58 lks. N. of SE. cor. of fence.
Enter scattering undergrowth.
20.40 Wire fence brs. N. and S. 40 lks. N. of SW. and 10 lks. N. of
SE. fence cors.
No trace of original $\frac{1}{4}$ sec. cor. can be found after dili-
gent search; therefore, at
40.23 (Proportional dist.), Set an iron post 3 ft. long, 1 in. in
diam., 26 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor.
of secs. 26 and 35, marked on brass cap,

 $\frac{1}{4}$ S 26
S 35
1916
Dig pits 18x18x12 ins., N. and W. of post, 3 ft. dist., and
raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of
cor.
From this cor.,
A windmill brs. N. 19° W. about 15.00 chs. dist.
40.35 A point about 100 lks. N. of end of wire fence on S. side of
lane, brs. S. thru. sec. 35.
40.40 The NE. cor. of cultivated field, brs. S. about 110 lks. dist.;
cultivated land extends S. about 10.00 chs. dist.
45.00 Wire fence brs. N. and S. 40 lks. N. of SW. cor.; leave under-
growth, brs. N. and S.; enter lane, brs. E. and W.
51.50 James Brogan's house brs. N. about 10.00 chs. dist.
53.50 A point about 50 lks. N. of NW. cor. of cultivated field,
brs. S. about 10 chs. dist.
54.20 C. McGinty's house brs. S. about 4.00 chs. dist.
58.72 A point 40 lks. S. of end of wire fence, brs. N. thru. sec. 26.
58.90 A point 60 lks. N. of end of wire fence, brs. S. thru. sec. 35.
80.46 (Proportional dist.) Intersect the reestablished cor. of
secs. 26, 27, 34 and 35.
Land, level valley, drains to the southwest.
Soil, medium rich fine dry, sandy loam, 8 to 16 ins. deep,
1st rate.
No timber.
Undergrowth, scattering mesquite and greasewood.
Good grass.


N. 0° 13' W., on a true line, bet. secs. 26 and 27.
Over level land, thru. scattering undergrowth, along W. side
of road.
21.37 Wire fence, brs. E. and W., 160 lks. E. of SW. cor. Road turns
west at this point.
26.80 A windmill and tank, brs. E. 35 lks. dist.
27.30 J. R. Blalock's house brs. W. 4.50 chs. dist.
39.75 Wire fence brs. E. and W., 1.00 chain E. of NW. cor. Enter
road.
40.00 A point 50 lks. E. of SE. cor., and 40 lks. W. of SW. cor. of
wire fences.
40.05 A point 50 lks. W. of SW. cor. of cultivated field brs. N.
about 10.00 chs. and E. 40.00 chs. dist.
No trace of original $\frac{1}{4}$ sec. cor. can be found after dili-
gent search; therefore, at
40.10 (One-fourth of dist. bet. existing cors. N. and S.), Set
an iron post 3 ft. long, 1 in. in diam., 36 ins. in the
ground for reestablished $\frac{1}{4}$ sec. cor. of secs. 26 and 27,
marked on brass cap,

$\frac{1}{4}$ S 27 | S 26

Dependent resurvey of the Subdivision of T.20 S., R.26 E., 11

Chains.

- This cor. falls in the road; therefore, omit the cor. accessories for the reason that the same would interfere with the travel on the road.
- 47.80 Thos. Patterson's house brs.W. about 4.00 chs. dist.
- 51.45 Thos. Patterson's pumping plant and well brs.E. 6.00 chs. dist.
- 54.30 A point 45 lks.W. of NW. cor. of cultivated field brs.E. about 40.00 chs. dist.
- 54.38 A point 45 lks.W. of end of wire fence, brs.E. thru. sec. 26.
- 79.73 A point 45 lks.E. of NE. cor., and 45 lks.W. of NW. cor. of wire fences.
- 80.20 Intersect the recognized cor. of secs. 22, 23, 26, and 27, an iron pipe, 3 ins. in diam., 8 ins. above ground, driven firmly in the ground at the intersection of public roads, and testified to by settlers as marking the point formerly occupied by the original cor. Re-establish this cor., as follows:
Remove the iron pipe, and in the same place set an iron post 3 ft. long, 2 ins. in diam., 36 ins. in the ground, for cor. of secs. 22, 23, 26 and 27, marked on brass cap.




Omit the cor. accessories to this cor. for the reason that the same would interfere with the travel on the roads.

Land, level valley, drains to the southwest.
Soil, fine, dry sandy loam about 12 ins. deep, 1st rate.
No timber.
Undergrowth, scattering mesquite and greasewood.
Good grass.

From the reestablished cor. of secs. 23, 24, 25 and 26, hereinbefore described,
S. 89° 59' W., on a true line, bet. secs. 23 and 26.
Over level land, along center line of road.

- 45 A point 45 lks. N. of NE. cor. and 45 lks. S. of SE. cor. of wire fences.
- 10.00 A point 50 lks. N. of NW. cor. of cultivated field, brs. S. about 20.00 chs. dist., and east 9.50 chs.
- 20.12 A point 45 lks. N. of end of wire fence brs. S.
- 37.90 A school house brs. N. 150 lks. dist.
No trace of original 1/4 sec. cor. can be found after diligent search; therefore, at
- 40.24 1/2 (Mid point bet. existing cors. E. and W.) Set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in the ground for reestablished 1/4 sec. cor. of secs. 23 and 26, marked on brass cap.



This cor. falls in the center of road; therefore, omit cor. accessories for the reason that the same would interfere with the travel on the road.

- 40.29 A point 45 lks. S. of end of wire fence brs. N. thru. sec. 23.
- 80.04 A point 45 lks. N. of NW. cor., and 45 lks. S. of SW. cor. of wire fences.
- 80.49 Intersect the reestablished cor. of secs. 22, 23, 26 and 27, hereinbefore described.
Land, level valley, drains to the southwest.
Soil, dry, sandy loam about 12 ins. deep, 1st rate.
No timber.
Undergrowth, scattering mesquite and greasewood. Good grass.

12. Dependent resurvey of the Subdivision of T.20 S. R.26 E.

Chains.

- N.0°02'W. on a true line, bet. secs. 22 and 23.
 Over level land, along center line of public road.
 .45 A point 45 lks.E. of SE.cor. and 45 lks.W. of SW.cor. of wire fences.
 9.00 Peter A.Dillman's house brs.W. about 2.00 chs.dist.
 9.75 White Water postoffice brs.W.2.25 chs.dist.
 40.05 Intersect the recognized $\frac{1}{4}$ sec.cor., an iron pipe 3 ins. in diam., 6 ins. above ground; Reestablish cor. as follows:
 Remove the iron pipe, and in the same place set an iron post 3 ft.long, 1 in. in diam., 30 ins. in the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,

$\frac{1}{4}$ S22 | S23

1916

Dig pits, 18x18x12 ins., N.and S.of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

This cor.is 45 lks.E. of end of wire fence in sec.22, brs. W. and 45 lks.W. of end of wire fence in sec.23, brs. E.

Continue measurement,

- N.0°2'W. on a true line, bet. secs.22 and 23.
 50.15 R.Z.Hodge's house brs. W. about 170 lks.dist.
 79.65 A point 45 lks.E. of NE.cor., and 45 lks.W. of NW.cor. of wire fences.
 80.10 Intersect the recognized cor. of secs.14,15,22 and 23, a mesquite stake driven in the ground alongside of post at SEcor. of wire fence; reestablish the cor. as follows:
 Remove the stake, and in the same place, set an iron post, 3 ft.long, 2 ins. in diam., 30 ins. in the ground, for cor. of secs.14,15,22 and 23, marked on brass cap,

T20S | R26E

S15 | S14

S22 | S23

1916

Dig pits 18x18x12 ins. in each sec. $5\frac{1}{2}$ ft. dist., and raise, a mound of earth 4 ft. base, 2 ft. high, W. of cor.
 Land, level valley, drains to the SW.
 Soil, dry, sandy loam, about 12 ins. deep, 1st rate.
 No timber.
 Undergrowth, scattering mesquite and greasewood.
 Good grass.

From the reestablished cor. of secs. 13,14,23 and 24, here-
 inbefore described,

- S.89°48'W., on a true line, bet. secs.14 and 23.
 Over level land, along center line of road.
 .45 A point 45 lks.N. of NE. cor. and 45 lks.S. of SE.cor. of wire fences.
 .50 A point 50 lks. S. of SE. cor. of cultivated field brs.N. and W.
 12.00 A point, 50 lks. S. of SW. cor. of cultivated field brs. N. and E.
 No trace of original $\frac{1}{4}$ sec.cor. can be found after diligent search; therefore, at
 40.28 (Mid point bet. existing cors. E. and W.) Set an iron post 3 ft.long, 1 in. in diam., 30 ins. in the ground for reestablished $\frac{1}{4}$ sec.cor. of secs.14 and 23, marked on brass cap,

$\frac{1}{4}$ S 14

S 23

1916

Dependent resurvey of the Subdivision of T.20 S., R.26 E., 13.

Chains.


Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

This cor. is 45 lks. N. of end of wire fence, bears south in sec. 23, and 45 lks. S. of end of wire fence, brs. N. in sec. 14.


From this cor.,
G. R. Dillman's house brs. N. 74° 30' E.
G. R. Dillman's windmill, brs. N. 74° E.
Another house belonging to G. R. Dillman brs. N. 28° 40' E.
The chimney on Austin Bouldin's house brs. S. 2° 30' W.

73.25 J.M. Mortensen's house brs. N. about 8.00 chs. dist.
79.94 A point 50 lks. S. of SW. cor. of wire fence.
80.56 Intersect the reestablished cor. of secs. 14, 15, 22 and 23, hereinbefore described.
Land, level valley, drains to the southwest.
Soil, fine dry sandy loam, about 14 ins. deep, 1st rate.
No timber.
Undergrowth, scattering mesquite.
Good grass.

N. 0° 03' W., on a true line, bet. secs. 14 and 15.
.50 Over level land, along E. side of wire fence in lane.
A point 70 lks. W. of SW. cor. of cultivated field brs. N. about 60 chs., and E. about 8.00 chs. dist.
12.00 Enter road, brs. N. and S. 10° E.
25.04 A point 45 lks. W. of end of wire fence, brs. E. in sec. 14.
32.60 J.M. Mortensen's house, brs. E. about 170 lks. dist.
36.00 Leave road, brs. N. 10° E.
No trace of original 1/4 sec. cor. can be found after diligent search; therefore, at
40.35 (Mid point bet. existing cors. N. and S.), Set an iron post 3 ft. long, 1 in. in diam., 30 ins. in the ground for reestablished 1/4 sec. cor. of secs. 14 and 15, marked on brass cap,



Dig pits 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.
This cor. is 45 lks. E. of end of wire fence, brs. W. in sec. 15, and 45 lks. W. of the NW. cor. of wire fence on E. side of road.
50.00 Enter road, brs. N. and S. 20° E.
58.90 A point 45 lks. E. of end of wire fence, brs. W. in sec. 15.
59.00 A point 50 lks. E. of SE. cor. of cultivated field brs. N. and W.; extends W. about 5.00 chs. dist.
70.80 E. Berry's house brs. W. about 5.00 chs. dist.
79.30 A point, 60 lks. E. of NE. cor. of cultivated field, brs. S. and W.; extends W. about 5.00 chs. dist.
79.35 A point 45 lks. E. of NE. cor. of wire fence.
80.70 Intersect the recognized cor. of secs. 10, 11, 14 and 15, an iron pipe 2 ins. in diam., driven firmly in the ground at the intersection of center lines of public roads.
Reestablish the cor. as follows:
Remove the iron pipe, and in the same place, set an iron post 3 ft. long, 2 ins. in diam., 30 ins. in the ground for cor. of secs. 10, 11, 14 and 15, marked on brass cap,



T20S R26E

S10 | S11

S15 | S14

1916

14. Dependent resurvey of Subdivision of T.20 S., R.26 E.

Chains.

Dig pits, 18x18x12 ins., in each sec. 5 1/2 ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor. From this cor.,

The chimney on Georgia A. Holmsley's house
brs. N. 53° 30' E.
Windmill brs. N. 56° 10' E.

Land, level valley, drains to the southwest.
Soil, sandy loam, 12 to 18 ins. deep.
Timber, scattering mesquite and catclaw.
Undergrowth, scattering mesquite.
Good grass.

From the reestablished cor. of secs. 11, 12, 13 and 14, hereinbefore described,

S. 89° 46' W., on a true line, bet. secs. 11 and 14.
Over level land, along center line of public road.

- .45 A point 45 lks. S. of SE. cor. of wire fence.
- 15.00 A point 50 lks. N. of NW. cor. of cultivated field on S. side of road brs. S.
- 16.15 A point 40 lks. S. of end of wire fence, brs. N. in sec. 11. No trace of original 1/4 sec. cor. can be found after diligent search; therefore, at
- 40.22 (Mid point bet. existing cors. E. and W.) Set an iron post 3 ft. long, 1 in. in the diam., 36 ins. in the ground, for reestablished 1/4 sec. cor. of secs. 11 and 14, marked on brass cap,

S 11
S 14
1916

This cor. falls in the road, therefore omit the cor. accessories to the same for the reason that they would interfere with the travel on the road.

From this cor., the chimney on Georgia A. Holmsley's house
brs. N. 77° 40' W.

Windmill brs. N. 77° W.

- 40.25 A point 40 lks. N. of NW. cor. of wire fence.
- 79.99 A point 40 lks. S. of SW. cor. of wire fence.
- 80.44 Intersect the reestablished cor. of secs. 10, 11, 14 and 15, hereinbefore described.
Land, level valley, drains to the SW.
Soil, rich fine dry sandy loam, about 12 ins. deep, 1st rate.
No timber or undergrowth.
Good grass.

N. 0° 21' W., on a true line, bet. secs. 10 and 11.
Over level land, along center line of road.

- .45 A point, 45 lks. W. of SW. cor. of wire fence.
No trace of original 1/4 sec. cor. can be found after diligent search; therefore, at
- 39.91 1/2 (Mid point bet. existing cors. N. and S.), Set an iron post 3 ft. long, 1 in. in diam., 36 ins. in the ground for reestablished 1/4 sec. cor. of secs. 10 and 11, marked on brass cap,

S 10 | S 11
1916

This cor. falls in the road; therefore, omit the cor. accessories for the reason that the same would interfere with the travel on the road.

From this cor., the steeple on the Mormon Church brs. N. 6° 10' W.

A cross in cemetery brs. N. 31° W.


The SW. cor. of Roy B. Seaver's house brs. N. 27° 55' E.

Dependent resurvey of the subdivision of T.20 S. R.26 E. 15

Chains.

40.14
65.00
79.38
79.83


A point 45 lks.W. of NW.cor. of wire fence.
A point 60 lks.E. of SE.cor. of cultivated field brs.N. and W.
A point 45 lks.E. of the NE.cor. of wire fence.
Intersect the recognized cor. of secs. 2,3,10 and 11, a mesquite stake greatly decayed, driven in the ground at the intersection of public roads. Reestablish the cor. as follows:
Remove the stake and in the same place, set an iron post, 3 ft. long, 2 ins. in diam., 36 ins. in the ground, for cor. of secs. 2,3,10 and 11, marked on brass cap,



This cor. falls in the road; therefore, omit the cor. accessories to this cor. for the reason that the same would interfere with the travel on the roads.
From this cor., the steeple on the Mormon church brs.S.5° 30'W.
A cross in cemetery brs.S.29°05'W.
The SW.cor. of Roy Seaver's house brs.S.38°30'E.
Land, level valley, drains to the SW.
Soil, dry, sandy loam, 12 ins. deep, 1st rate.
No timber.
Undergrowth, scattering mesquite.
Good grass.

From the reestablished cor. of secs. 1,2,11 and 12, hereinbefore described,
S.89°44'W., on a true line, bet. secs. 2 and 11.
Over level sandy land, along road.

- .40 A point about 40 lks.S. of SE.cor. of wire fence, and cultivated field brs.N. and W.; extends N. about 8.00 chs. dist.
- .45 A point about 45 lks.N. of NE.cor. of wire fence, and cultivated field brs.S. and W.; extends W. about 20.00 chs. dist.
- 20.00 A point about 40 lks.N. of NW.cor. of cultivated field and wire fence.
- 30.00 A point 45 lks.S. of SW.cor. of cultivated field, extends N. about 10.00 chs. dist.
- 40.44 A point about 30 lks.S. of SW.cor. of wire fence. No trace of original 1/4 sec. cor. can be found after diligent search; therefore, at
- 40.47 (Mid point bet. existing cors. E. and W.) set an iron post 3 ft. long, 1 in. in diam., 30 ins. in the ground, for reestablished 1/4 sec. cor. of secs. 2 and 11, marked on brass cap,



Dig pits 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.
From this cor.,
The N. end gable of Joseph Mortensen's house brs. S.41°W.
The chimney on Joseph Kirby's house brs.N.35° 30'E.
Joseph Kirby's windmill brs.N.34°10'E.
80.94 Intersect the reestablished cor. of secs. 2,3,10 and 11, hereinbefore described.

16. Dependent resurvey of the Subdivision of T. 20 S. R. 26 E.

Chains

Land, level valley, drains to the southwest.
Soil, dry, sandy and gravelly loam, about 10 ins. deep, 1st rate.
No timber.
Undergrowth, scattering mesquite.
Good grass.

From the reestablished cor. of secs. 2, 3, 34 and 35, on N. bdy. of Tp., described in Book "D" of this group, S. 1° 28' W., on a true line, bet. secs. 2 and 3.
Over level land, along center line of road.

.45 A point 45 lks. E. of NE. cor., and 45 lks. W. of NW. cor. of wire fences.
No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at
41.24 $\frac{1}{2}$ (Proportional dist.), Set an iron post 3 ft. long, 1 in. in diam., 36 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 2 and 3, marked on brass cap,

$\frac{1}{4}$ S3 | S2
1916

This cor. falls in road; therefore, omit the cor. accessories for the reason that the same would interfere with the travel on the road.

42.17 House brs. W. about 15.00 chs. dist., C. E. Nielson, owner.
42.77 House brs. W. about 15.00 chs. dist., C. E. Nielson, Jr., owner.
43.17 A point 45 lks. W. of the SW. cor. of wire fence.
82.04 A point 45 lks. E. of SE. cor. of wire fence.
82.49 Intersect the reestablished cor. of secs. 2, 3, 10 and 11.
Land, level valley, drains to the southwest.
Soil, sandy and gravelly clay loam, 8 to 12 ins. deep, 1st rate.
No timber.
Undergrowth, scattering mesquite.
Good grass.

From the reestablished standard cor. of secs. 33 and 34, on S. bdy. of Tp. (4th. Std. Parallel S.), an iron post 3 ins. in diam., 12 ins. above ground, firmly set, marked on brass cap,

T20S R26E
S C
 $\frac{1}{4}$ S33 | S34
1911

and witnessed by pits E., W. and N., and mound of earth N. of cor.,

N. 0° 26' W., on a true line, bet. secs. 33 and 34.
Over level land, along center of Highway from Douglas, to Pearce, Arizona.

.45 A point 45 lks. E. of SE. cor., and 45 lks. W. of SW. cor. of wire fences.
1.75 An earthen reservoir brs. east 200 lks. dist.
2.75 A windmill brs. E. 220 lks. dist.
20.00 A point, 50 lks. E. of SE. cor. of cultivated field, brs. N. about 30.00 chs. and W. about 20.00 chs. dist.
No trace of original $\frac{1}{4}$ sec. cor. can be found; therefore, at
40.03 (Mid point bet. existing cor. N. and S.) Set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. of secs. 33 and 34, marked on brass cap,

$\frac{1}{4}$ S33 | S34
1916

Dependent resurvey of the Subdivision of T2S R. 26 E. 17

Chains.


This cor. falls in the center of graded highway; therefore omit the cor. accessories to this cor. for the reason that the same would interfere with the travel on the highway.

50.00 A point 50 lks. E. of NE. cor. of cultivated field extends west about 20.00 chs. dist.

79.61 A point 25 lks. W. of NW. cor. of wire fence.

80.06 Intersect the recognized cor. of secs. 27, 28, 33 and 34, a mesquite stake driven in the ground at point of intersection of public road, brs. E. with highway from Douglas to Pearce, Arizona.

Reestablish the cor., as follows: Remove stake, and in same place, set an iron post 3 ft. long, 2 ins. in diam., 36 ins. in the ground for cor. of secs. 27, 28, 33 and 34, marked on brass cap,



This cor. falls in center of highway; therefore, omit the cor. accessories for the reason that the same would interfere with the travel on the highway.

Land, level valley, drains to the southwest.
Soil, rich fine, sandy loam, about 16 ins. deep, 1st rate.
No timber.
Undergrowth, scattering mesquite.
Good grass.

From the reestablished cor. of secs. 26, 27, 34 and 35, hereinbefore described,

S. 89° 55' W., on a true line, bet. secs. 27 and 34.
Over level land, along center line of public road.

.10 A point 65 lks. N. of NE. cor. of wire fence.

6.50 A point 80 lks. N. of NW. cor. of cultivated land, brs. E. and S.; extends S. about 30.00 chs. dist.

20.10 A point 10 lks. S. of SE. cor. of wire fence.


20.20 A point 20 lks. S. of SE. cor. of cultivated field brs. N. about 5.00 chs., and W. about 22.00 chs. dist.

25.68 A point in center of EP. & SW. Ry. track brs. N. 21° 30' W., and S. 21° 30' E.

26.45 Western Union Telegraph line, brs. N. 21° 30' W. and S. 21° 30' E.

39.70 A point 65 lks. N. of end of wire fence in sec. 34, brs. S. No trace of original 4 sec. cor. can be found after diligent search; therefore, at

40.10 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in the ground, for reestablished 1/4 sec. cor. of secs. 27 and 34, marked on brass cap,



This cor. falls in the center of public road; therefore, omit the cor. accessories for the reason that the same would interfere with the travel on the road.

79.96 A point 45 lks. N. of NW. cor., and 45 lks. S. of SW. cor. of wire fences.

80.20 Intersect the reestablished cor. of secs. 27, 28, 33 and 34, hereinbefore described.

Land, level valley, drains to the southwest.
Soil, dry, sandy loam about 12 ins. deep, 1st rate.
No timber.
Undergrowth, scattering mesquite.
Good grass.

18. Dependent resurvey of the Subdivision of T.20 S., R.26 E.
Chains.

N.0° 20' W., on a true line, bet. secs.27 and 28.
Over level land, along center line of graded highway from Douglas to Pearce, Arizona.
36.80 Domenic Sala's house brs. W. about 200 lks.dist.
No trace of original 1/4 sec.cor. can be found after diligent search; therefore, at
40.18 1/2 (Mid point bet. existing cors. N. and S.), Set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in the ground for reestablished 1/4 sec.cor. of secs.27 and 28, marked on brass cap,

1/4 S28 | S27
1916

This cor.falls in center of highway; therefore, omit the cor.accessories for the reason that the same would interfere with the travel on the highway.
This cor.is in line with subdivision line fence thru.sec. 27.
47.20 A point 45 lks.W. of end of wire fence, at SW.cor.of cultivated field, brs.E. about 20.00 chs.dist.
47.60 Ida S.Conoli's house brs. E.about 150.00 lks.dist.
58.50 The "Spike S."Ranch, owned by Dominic Sala brs.west about 5.25 chs.dist.
60.00 A reservoir brs.W. about 5.00 chs. dist.
The end of wire fence at NW.cor.of cultivated field brs. E. 45 lks.dist.; cultivated land extends E. about 20.00 chs.dist.
80.37 Intersect the recognized cor.of secs. 21,22,27 and 28, pointed out to me by W.H.Vanmeter, a decayed redwood fence post, buried in center of highway, 8 ins. below the surface of the ground said to have been set at the exact place formerly occupied by the original cor. Reestablish the cor. as follows: Remove the old post, and in the same place, set an iron post 3 ft.long, 2 ins. in diam., 36 ins. in the ground for cor.of secs. 21,22, 27 and 28, marked on brass cap,

T20S | R26E
S21 | S22
S28 | S27
1916

Omit the cor.accessories to this cor.for the reason that the same would interfere with the travel on the highway.
From this cor.,Reuben G.Well's house brs.N.39°45'E.
Land,level valley,drains to the SW.
Soil, rich fine, dry, sandy loam, about 14 ins. deep,1st rate.
No timber or undergrowth.
Good grass.

From the reestablished cor.of secs.22, 23,26 and 27,here-
inbefore described,
N.89°55'W., on a true line, bet. secs.22 and 27.
Over level land, along center of public road.
.45 A point 45 lks.N. of NE.cor. and 45 lks.S.of SE.cor.of wire fences.
16.57 A point 30 lks.S. of end of wire fence in sec.22, brs.N.
18.10 A point 60 lks. N.of NW. cor.of wire fence.
No trace of original 1/4 sec.cor. can be found after diligent search; therefore, at
40.18 (Mid point between existing cors.E. and W.) Set an iron post 3 ft.long, 1 in. in diam., 30 ins. in the ground, for reestablished 1/4 sec.cor.of secs.22 and 27, marked on brass cap,

Dependent resurvey of the subdivision of T. 20 S., R. 26 E., 19

Chains.

1/4 S 22
S 27
1916

- Dig pits 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.
- 40.75 A point 40 lks. S. of SW. cor. of wire fence; leave road, brs. NW.
- 57.20 A point in center of EP. & SW. Ry. track, brs. N. 21° 30' W. and S. 21° 30' E.
- 57.94 The Western Union Telegraph line, brs. N. 21° 30' W. and S. 21° 30' E.
- 58.02 Wire fence, brs. N. 21° 30' W. and S. 21° 30' E.
- 79.89 Wire fence, brs. N. and S.; enter highway.
- 80.36 Intersect the reestablished cor. of secs. 21, 22, 27 and 28. Land, level valley, drains to the SW. Soil, fine, dry sandy loam, about 14 ins. deep, 1st rate. No timber, or undergrowth.

- N. 0° 25' W., on a true line, bet. secs. 21 and 22. Over level land, along center of public highway, from Douglas to Pearce, Arizona. No trace of original 1/4 sec. cor. can be found after diligent search; therefore, at (Mid point bet. existing cors. N. and S.) Set an iron post 3 ft. long, 1 in. in diam., 36 ins. in the ground, for reestablished 1/4 sec. cor. of secs. 21 and 22, marked on brass cap,

1/4 S 21 | S 22
1916

- Omit the cor. accessories to this cor. for the reason that the same would interfere with the travel on the highway.
- From this cor., Reuben G. Wells' house brs. S. 74° 33' E. The SE. cor. of D. B. Reed's house brs. N. 22° 05' W. An oil tank brs. N. 14° 10' W.
- 52.23 A point 45 lks. W. of NW. cor. of wire fence.
- 56.00 End of wire fence, on W. side of road.
- 56.93 The Western Union Telegraph line brs. N. 21° 30' W. and S. 21° 30' E.
- 58.73 Center of EP. & SW. Ry. track brs. N. 21° 30' W. and S. 21° 30' E.
- 60.50 Center of side track of EP. & SW. Ry. bears N. 21° 30' W. and S. 21° 30' E.
- 64.40 The postoffice and store at Elfrida, Arizona, bears E. 50 lks. dist.
- 64.50 A point 45 lks. W. of SW. cor. of wire fence.
- 78.89 A point 45 lks. W. of NW. cor. of wire fence.
- 79.82 Intersect the recognized point for cor. of secs. 15, 16, 21 and 22, at the intersection of public roads. No trace being found of original sec. cor. after diligent search, Set an iron post 3 ft. long, 2 ins. in diam., 36 ins. in the ground, for reestablished cor. of secs. 15, 16, 21 and 22, marked on brass cap.

T 20 S | R 26 E
S 16 | S 15
S 21 | S 22
1916

Omit the cor. accessories to this cor., for the reason that the same would interfere with the travel on the highway.

From this cor.,
The SE. cor. of D. B. Reed's house brs. S. 22° 30' W.

20. Dependent resurvey of the Subdivision of T.20 S., R. 26 E.

Chains.

An oil tank, brs.S.14° 25'W.
Land, level valley, drains to the southwest.
Soil, sandy loam, 12 ins. deep, 1st rate.
No timber, or undergrowth.
Good grass.

From the reestablished cor. of secs.14,15,22 and 23, here-
inbefore described,
S.89°50'W., on a true line, bet. secs.15 and 22.
Over level land, along N.side of road in lane.
No trace of original 1/4 sec.cor. can be found after diligent
search; therefore at,

40.39 1/2 (Mid point bet. existing cors.E.&W.) Set an iron post 3 ft.
long, 1 in. in diam., 30 ins. in the ground, for reestab-
lished 1/4 sec.cor.of secs.15 and 22, marked on brass cap,

1/4 S 15
S 22
1916

Dig pits 18x18x12 ins., E. and W.of post 3 ft. dist., and
raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N.of
cor.

80.33 A point 93 lks.N. of NW. and . 2 lks.S.of SW. wire fence
cors.

80.79 Intersect the reestablished cor. of secs.15,16,21 and 22,
hereinbefore described.

Land, level and rolling. slopes to the SW.
Soil, dry, sandy loam, about 14 ins. deep, 1st rate.
No timber.
Undergrowth, scattering mesquite.
Good grass.

N.0°12' E., on a true line, bet. secs.15 and 16.
Over level land, slopes to the south, along center line
of graded highway from Douglas to Pearce, Arizona.
No trace of original 1/4 sec.cor. can be found after dili-
gent search; therefore, at

40.26 1/2 (Mid point bet. recognized cors. N.and S.), Set an iron
post 3 ft.long, 1 in. in diam., 36 ins. in the ground,
for reestablished 1/4 sec.cor. of secs.15 and 16, marked
on brass cap,

1/4 S16 | S15
1916

This cor.falls in the center of highway; therefore, omit
the cor. accessories to the same; for the reason that
they would interfere with the travel on the road.

80.08 A point 45 lks.E. of NE.cor. and 45 lks.W. of NW.cor.of
wire fences.

80.53 Intersect the recognized point for cor.of secs. 9,10,15
and 16, at the point of intersection of public high-
ways, and since no trace of the original cor. can be
found after diligent search, reestablish the cor. at
this point, as follows:

Set an iron post, 3 ft.long, 2 ins. in diam., 36 ins. in
the ground, for cor.of secs.9,10,15 and 16, marked on
brass cap,

T20S | R26E
S 9 | S10
S16 | S15
1916

Omit the cor. accessories to this cor. for the reason

Dependent resurvey of the Subdivision of T.20 S., R.26 E. 21

Chains.

that the same would interfere with the travel on the roads.

From this cor.,
Chimney on Henry B. Tucker's house brs. N. 51°43' W.
Chimney on Leonard Jewell's house brs. N. 59°55' W.

Land, level, slopes to the south.
Soil, dry, fine sandy loam, about 12 ins. deep, 1st rate.
No timber.
Undergrowth, scattering mesquite.
Good grass.

From the reestablished cor. of secs. 10, 11, 14 and 15, here-
inbefore described,
S. 89°42' W., on a true line, bet. secs. 10 and 15.
Over level land, along center line of road.

- .74 A point 45 lks. S. of SE. cor. of wire fence.
- 10.00 A point about 50 lks. N. of NW. cor. of cultivated field,
brs. E. 9.50 chs. and S. about 20.00 chs. dist.
No trace of original 1/4 sec. cor. can be found after dili-
gent search; therefore at
- 40.19 (Mid point bet. recognized cors. E. and W.) Set an iron
post 3 ft. long, 1 in. in diam., 30 ins. in the ground,
for reestablished 1/4 sec. cor. of secs. 10 and 15, marked
on brass cap,

S 10
S 15
1916

Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.,
and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high,
N. of cor.

- 40.72 A point, 50 lks. N. of end of wire fence in sec. 15, brs. S.
and 40 lks. S. of end of wire fence in sec. 10, brs. N.
- 58.96 A point 30 lks. S. of end of wire fence in sec. 10, brs. N.
- 59.00 A point 40 lks. S. of SE. cor. of cultivated field, brs. N.
about 12 chs. and W. 21.00 chs. dist.
- 61.25 Joseph Berry's house brs. N. about 4.50 chs. dist.
- 79.94 A point 44 lks. S. of SW. cor. of wire fence.
- 80.38 Intersect the reestablished cor. of secs. 9, 10, 15 and 16,
hereinbefore described.

Land, level valley, drains to the southwest.
Soil, rich, fine dry, sandy loam, 1st rate.
No timber.
Undergrowth, scattering mesquite.
Good grass.

N. 0°02' W., on a true line, bet. secs. 9 and 10.
Over level land, along center line of graded highway from
Douglas to Pearce, Arizona.

- .44 A point 45 lks. E. of SE. and 45 lks. W. of SW. cor. of wire
fences.
- .50 The SW. cor. of cultivated field brs. N. and E.
- 10.47 A point 45 lks. W. of end of wire fence at NW. cor. of culti-
vated field brs. E.
- 19.95 A point 45 lks. E. of end of wire fence in sec. 9, brs. W.
- 26.30 Joseph Berry's house brs. E. about 2.00 chs. dist.
- 33.97 A point 45 lks. E. of end of wire fence in sec. 9, brs. W.
No trace of original 1/4 sec. cor. can be found after dili-
gent search; therefore, at
- 40.03 (Mid point bet. recognized cors. N. and S.), Set an iron
post 3 ft. long, 1 in. in diam., 36 ins. in the ground
for reestablished 1/4 sec. cor. of secs. 9 and 10, marked
on brass cap,

S 9 | S 10
1916

22. Dependent resurvey of the Subdivision of T.20 S.R.26 E.

Chains.

Omit the cor.accessories to this cor. for the reason that the same would interfere with the travel on the highway.

44.47
75.95
79.60
80.06

Donald A.Cameron's house brs.W.150 lks.dist.
Wm.P.Cluff's house brs.W. about 3.00 chs.dist.
A point 45 lks.W. of NW. cor.of wire fence.

Intersect the recognized cor. of secs.3,4, 9 and 10, a limestone 6x4x4 ins., buried in the ground at the intersection of public road, bearing E. and W.,with the Douglas-Pearce highway, and testified to by settlers as marking the exact point formerly occupied by the original sec. cor.; therefore, reestablish the cor. as follows:

Remove the mound of stone, and in the same place set an iron post, 3 ft.long, 2 ins. in diam., 36 ins. in the ground for cor.of secs.3,4,9 and 10, marked on brass cap,

T20S | R26E
S4 | S3
S9 | S10
1916

Omit the cor.accessories to this cor. for the reason that the same would interfere with the travel on the roads. From this cor.,

- Windmill No.1 brs.S.32°40'W.
- Windmill No.2 brs.S.31°40'W.
- Windmill No.3 brs.S.37°04'W.
- Windmill No.4 brs.S. 37°W.
- Windmill No.5, brs.S.38°45'W.
- Windmill No.6 brs.S.33°45'W.

Land,level valley, drains to the southwest.
Soil, rich fine, dry, sandy loam, 12 ins. deep,1st rate.
No timber.
Undergrowth, scattering mesquite.
Good grass.

From the reestablished cor. of secs. 2,3,10 and 11, here-
inbefore described,
S.89°15'W., on a true line, bet. secs.3 and 10 (E.½).

.45
.50
24.65
29.45
39.00
39.98

Over level land, along center line of road.
A point 45 lks.N.of NE. and 45 lks.S. of SE.cor. of wire fences.
A point about 50 lks.N. of NE.cor. of cultivated field brs.S. about 20 chs. and W. about 45.00 chs.dist.
Morris Catlin's house brs.S. about 5.00 chs.dist.
A point about 60 lks.S. of SE. cor. of cultivated land, brs.N.20.00 chs., and W. about 10.00 chs.dist.
A house belonging to Morris Catlin brs.S. about 5.00 chs. dist.

Intersect the original ¼ sec.cor., a granite stone 8x6x6 ins. above ground, loosely set, marked ¼ on N.face. No cor.accessories visible. Destroy all trace of this cor.,and reestablish it in the same position as follows:

Set an iron post 3 ft.long, 1 in. in diam., 30 ins. in the ground, for ¼ sec.cor., marked on brass cap,

S 3
S 10
1916

Dig pits 18x18x12 ins., E.and W.of post, 3 ft. dist.,and raise a mound of earth 3½ ft. base, 1½ ft. high,N.of cor.

Note: This cor.is on wire fence line on S.side of road. Thence,
N.89°27'W., on a true line, bet.secs.3 and 10 (W.½).
Over level land, along road.

Dependent resurvey of the Subdivision of T. 20 S., R. 26 E. 23

Chains.
 44.63 A point 2 1/2 lks. N. of end of wire fence in sec. 10, brs. S.
 79.47 A point 45 lks. N. of NW. cor., and 45 lks. S. of SW. cor. of wire fences.
 79.92 Intersect the reestablished cor. of secs. 3, 4, 9 and 10, hereinbefore described.
 Land, level valley, drains to the southwest.
 Soil, dry, sandy loam, about 10 ins. deep, 1st rate.
 No timber.
 Undergrowth, scattering mesquite.
 Poor grass.

 From the reestablished cor. of secs. 3, 4, 33 and 34, on N. bdy. of Tp., described in Book "D," of this Group, S. 0° 54' W. on a true line, bet. secs. 3 and 4. Over level land, along center line of highway, from Douglas to Pearce, Arizona.

.45 A point 45 lks. E. of NE. cor. and 45 lks. W. of NW. cor. of wire fences.
 13.90 Samuel M. Clark's house brs. W. about 10 chs. dist.
 20.00 A point 50 lks. E. of end of wire fence in sec. 4, brs. W.
 41.30 A point 45 lks. E. of end of wire fence in sec. 4, brs. W., and 45 lks. W. of end of wire fence in sec. 3, brs. E.
 No trace of original 1/4 sec. cor. can be found after diligent search; therefore, at
 41.36 (Proportional dist.), Set an iron post 3 ft. long, 1 in. in diam., 36 ins. in the ground, for reestablished 1/4 sec. cor. of secs. 3 and 4, marked on brass cap,

S4 | S3
 1916

Omit the cor. accessories to this cor., for the reason that the same would interfere with the travel on the highway.

51.10 Jas. H. Harris's house brs. W. about 4.50 chs. dist.
 59.20 A point 45 lks. E. of wire fence in sec. 4 brs. W.
 82.16 A point 45 lks. E. of SE. cor., and 45 lks. W. of SW. cor. of wire fences.
 82.61 Intersect the reestablished cor. of secs. 3, 4, 9 and 10, hereinbefore described.
 Land, level valley, drains to the southwest.
 Soil, dry, sandy loam, about 12 ins. deep, 1st rate.
 No timber.
 Undergrowth, scattering mesquite.
 Good grass.

 From the reestablished standard cor. of secs. 32 and 33, on S. bdy. of Tp. (4th. Std. Par. S.), an iron post 3 ins. in diam., 12 ins. above ground, firmly set, marked on brass cap,

T20S R26E
 S C
 S32 | S33
 1911

and witnessed by pits E., W. and N., and mound of earth N. of cor., N. 0° 15' W., on a true line, bet. secs. 32 and 33. Over level land.

.49 Wire fence, brs. E. and W.; enter meadow land.
 36.70 Old fence line, brs. E. and W., 25 lks. E. of SW. cor.
 No trace of original 1/4 sec. cor. can be found after diligent search; therefore, at
 40.16 1/2 (One fourth of dist. bet. existing cors. N. and S.), Set an iron post 3 ft. long, 1 in. in diam., 30 ins. in the ground, for reestablished 1/4 sec. cor. of secs. 32 and 33, marked on brass cap,

24 Dependent resurvey of the Subdivision of T.20 S. R.26 E. Chains

1832 | S33

1916

Dig pits 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

From this cor., The NW.cor. of Charles Koontz's house brs. N.49° 22'E.

Charles Koontz's windmill brs. N.48°40'E.

60.14 Old fence line brs. E. and W., 30 lks, E. of intersection with N. and S. fence line.

79.92 Wire fence brs. E. and W. No trace of original sec. cor. can be found after diligent search; therefore at

80.33 (Mid point between existing cors. N. and S.) Set an iron post 3 ft. long, 2 ins. in diam., 30 ins. in the ground for reestablished cor. of secs. 28, 29, 32 and 33, marked on brass cap,

T20S | R26E
S29 | S28
S32 | S33
1916

Dig pits, 18x18x12 ins. in each sec. 5 1/2 ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor. Land, level valley, drains to the SW. Soil, rich dark, sandy loam, 12 to 18 ins. deep, 1st rate. No timber or undergrowth. Good grass.

From the reestablished cor. of secs. 27, 28, 33 and 34, hereinbefore described,

N. 89°44' W., on a true line, bet secs. 28 and 33. Over level land in public highway.

.45 Wire fence brs. N. and S. 10 lks. N. of intersection with wire fence, brs. N. 88°50' W.

4.20 Wire fence brs. N. 88° 50' W. and S. 88°50' E.

38.27 Wire fence brs. N. and S., 24 lks. N. of NE. cor. of fence, and 75 lks. S. of NW. cor. of wire fence.

No trace of original 1/4 sec. cor. can be found after diligent search; therefore, at

40.01 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam., 30 ins. in the ground, for reestablished 1/4 sec. cor. of secs. 28 and 33, marked on brass cap,

1828
S33
1916

Dig pits 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor. From this cor.,

The SW. cor. of Samuel S. Coleman's house brs. N. 5°15' W.

The SW. cor. of an adobe house belonging to Domenic Sala brs. N. 17°10' E.

The NW. cor. of Charles Koontz's house brs. S. 14° 28' W.

Charles Koontz's windmill brs. S. 25°30' W.


80.02 (Proportional dist.) Intersect the reestablished cor. of secs. 28, 29, 32 and 33, hereinbefore described.

Land, level valley, drains to the southwest. Soil, rich dry, sandy loam, about 14 ins. deep, 1st rate. No timber, or undergrowth. Good grass.

Dependent resurvey of the Subdivision of T.20 S., R.26 E. 25

Chains

N. 0° 47' W., on a true line, bet. secs. 28 and 29.
 Over level land.
 33.68 Wire fence, brs. E. and W., 15 lks. E. of SW. cor. of fence.
 35.88 Enter cultivated land, brs. E. 10.00 chs. and W. 15 lks. dist.
 No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at
 40.16 $\frac{1}{2}$ (One fourth the dist. bet. existing cors. N. and S.) Set an iron post 3 ft. long, 1 in. in diam., 30 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 28 and 29, marked on brass cap,




Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
 From this cor.,

The SW. cor. of Samuel S. Coleman's house brs. S. 63° 20' E.
 The SW. cor. of house belonging to Domenic Sala brs. S. 84° 35' E.

Chimney on Daniel H. Crane's house brs. S. 63° 40' W.
 60.50 Leave cultivated land, brs. E. about 10.00 chs. and W. 20 lks. dist.

60.74 Wire fence, brs. E. and W., 20 lks. E. of NW. cor. of fence.
 80.33 Intersect the recognized cor. of secs. 20, 21, 28 and 29, pointed out to me by W. H. Vanmeter, which is a decayed willow stake driven in the ground alongside of fence post, 8 ins. sq., 5 ft. above ground. No trace of the original cor. being found after diligent search, re-establish the cor. as follows:

Remove the willow stake, and in the same place alongside of the fence post, set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 20, 21, 28 and 29, marked on brass cap,




Dig pits 18x18x12 ins., in each sec. 5 $\frac{1}{2}$ ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor.
 Land, level valley, drains to the SW.
 Soil, rich sandy loam, about 14 ins. deep, 1st rate.
 No timber or undergrowth.
 Good grass.

From the reestablished cor. of secs. 21, 22, 27 and 28, here-
 inbefore described,
 N. 39° 48' W., on a true line, bet. secs. 21 and 28.
 Over level land in highway.

.45 Intersect NE. cor. of wire fence, brs. N. 89° 48' W., and S. 0° 47' E.; thence along fence line, on S. side of fenced lane, 50 lks. wide.

40.17 Wire fence, brs. S. 2 lks. S. of intersection with fence line, brs. E. and W., thence along S. side of fence line.
 No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore,

40.29 (Mid point bet. existing cors. E. and W.) Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 21 and 28, marked on brass cap,



26. Dependent resurvey of the Subdivision of T.20 S., R.26 E.

Chains.

Dig pits 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

- 47.98 A point 50 lks. S. of end of wire fence, on N. side of lane, brs. N. and S.
- 80.17 A point 50 lks. S. of end of wire fence, brs. N. on N. side of lane.
- 80.58 Intersect the reestablished cor. of secs. 20, 21, 28 and 29, hereinbefore described.
Land, level valley, drains to the southwest.
Soil, dark sandy loam, about 16 ins. deep, 1st rate.
No timber, or undergrowth.
Good grass.

N. $0^{\circ}16'30''$ E., on a true line, bet. secs. 20 and 21.
Over level land.

- .01 Wire fence brs. N. $89^{\circ}48'$ W. and S. $89^{\circ}48'$ E.; enter lane.
- .25 Public road, brs. E. and W.
- .52 Wire fence brs. E. and W., 41 lks. W. of intersection with wire fence, brs. N. $0^{\circ}45'$ W.
- 10.00 A point 60 lks. W. of SW. cor. of cultivated field brs. N. 10.00 chs., and E. about 8.00 chs. dist.
- 20.50 An earth reservoir, brs. W. 1.00 chain dist.
- 22.10 W.H. Vanmeter's house brs. west about 3.00 chs. dist.
- 24.20 Wire fence brs. E. and W., 12 lks. W. of intersection with N. & S. fence line.
- 37.50 Wire fence brs. N. 45° W. and S. 45° E.
- 40.00 Wire fence, brs. E. & W. 10 lks. E. of intersection with N. & S. fence line. No trace of original sec. cor. can be found (after diligent search; therefore, at
- 40.27 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in ground, for reestablished sec. cor. of secs. 20 & 21, marked on brass cap,

S20 | S21

1916

Dig pits 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

From this cor.,

- A pump house, brs. S. $88^{\circ}40'$ E.
- Windmills Nos. 1 and 2 bear N. $81^{\circ}10'$ E.
- 60.05 A point 30 lks. E. of SE. cor. of wire fence.
- 79.96 Wire fence brs. E. and W., 58 lks. E. of intersection with N. and S. fence line; enter lane, brs. E. and W.
No trace of original sec. cor. can be found after diligent search; therefore, at
- 80.54 (Proportional dist.) Set an iron post 3 ft. long, 2 ins. in diam., 36 ins. in the ground for reestablished cor. of secs. 16, 17, 20 and 21, marked on brass cap,

T20S | R26E

S17 | S16

S20 | S21

1916

This cor. falls in center of road; therefore, omit the cor. accessories.

Land, level valley, drains to the southwest.
Soil, fine, dry sandy loam, 14 ins. deep, 1st rate.
No timber or undergrowth.
Good grass.

From the reestablished cor. of secs. 15, 16, 21 and 22, hereinbefore described,

N. $89^{\circ}11'$ W., on a true line, bet. secs. 16 and 21.

Over level land, in highway.

- .45 Wire fence, brs. N. and S., 10 lks. N. of SE. cor.; enter

Dependent resurvey of the Subdivision of Township 20 S., R. 26 E. 27

Chains. scattering timber and undergrowth.
 8.00 Wire fence, brs.N.80°W. and S.80°E.; enter public road, brs.E. and W.; leave timber and undergrowth.
 8.19 Center of EP.& SW.Ry.track, brs.N.21°30'W. and S.21°30'E.
 8.96 Western Union Telegraph line brs.N.21°30'W. and S.21°30'E.
 No trace of original $\frac{1}{4}$ sec.cor. can be found after diligent search; therefore, at
 39.88 (Proportional dist.), Set an iron post 3 ft.long, 1 in. in diam., 36 ins. in the ground, for reestablished $\frac{1}{4}$ sec.cor. of secs.16 and 21, marked on brass cap,

$\frac{1}{4}$ S 16
 S 21
 1916

This cor. falls in center of road; therefore omit the cor. accessories for the reason that the same would interfere with the travel on the road.

From this cor.,
 Windmill No.1 brs.S. 8° 25'W.
 Windmill No.2 brs.S.9° 25'W.
 A pump house brs.S.0°35'W.

78.50 A windmill brs. N. about 2.00 chs.dist.
 79.76 (Proportional dist.) Intersect the reestablished cor. of secs. 16,17,20 and 21, hereinbefore described.
 Land, level valley, drains to the southwest.
 Soil, dry, sandy loam, about 12 ins. deep, 1st rate.
 Timber, scattering mesquite.
 Undergrowth, scattering mesquite and greasewood.
 Good grass.

N.0° 30'W., on a true line, bet. secs.16 and 17.
 Over level land,

.38 Wire fence brs.E. and W., 115 lks.E.of SW. cor.
 1.00 Enter scattering timber and undergrowth, brs.E. and W.
 37.05 Wm. J. Loyer's house brs.W. about 11.00 chs.dist.
 39.90 A point about 160 lks.E. of end of wire fence on W.side of lane, brs.W thru.sec.17.
 No trace of original $\frac{1}{4}$ sec.cor. can be found after diligent search; therefore, at
 40.27 (Proportional dist.), Set an iron post, 3 ft.long, 1 in. in diam., 30 ins. in the ground, for reestablished $\frac{1}{4}$ sec.cor. of secs.16 and 17, marked on brass cap,

$\frac{1}{4}$ S17 | S16
 1916

Dig pits 18x18x12 ins., N.and S.of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,W.of cor..

79.50 Leave timber and undergrowth, brs.E. and W.
 79.54 Wire fence brs,E. and W., 100 lks.E. of NW,cor.; enter lane.
 No trace of original sec.cor. can be found after diligent search; therefore, at
 80.54 (Proportional dist.) Set an iron post, 3 ft,long, 2 ins. in diam., 36 ins. in the ground for reestablished cor. of secs. 8,9,16 and 17, marked on brass cap,

T20S | R26E
 S8 | S9
 S17 | S16
 1916

This cor. falls in center of public road; therefore,omit the cor. accessories for the reason that the same would interfere with the travel on the road.

28. Dependent resurvey of the Subdivision of T. 20 S. R. 26 E.

Chains.

From this cor.,
 The SW. cor. of Jas. A. Higgins' house brs. N. 32° 35' E.,
 4.25 chs.
 Jas. A. Higgins' windmill brs. N. 35° 20' E., about 5.50 chs. dist.
 Chimney on E. D. Harris's house brs. S. 37° 55' W., about 6.00
 chs. dist.
 Land, level valley, drains to the SW.
 Soil, medium rich fine sandy loam, 12 to 16 ins. deep, 1st
 rate.
 Timber, scattering mesquite.
 Undergrowth, scattering mesquite and greasewood.
 Good grass.

 From the reestablished cor. of secs. 9, 10, 15 and 16, here-
 inbefore described,
 N. 89° 21' W., on a true line, bet. secs. 9 and 16.
 Over level land, along center of public road.

- .44 A point 44 lks. N. of NE. cor., and 46 lks. S. of SE. cor. of wire
 fences.
- 20.02 A point 45 lks. S. of end of wire fence in sec. 9, brs. N.
- 39.20 A point about 40 lks. S. of end of right of way fence along
 Ry. track.
 No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent
 search, and at
- 40.37 $\frac{1}{2}$ (Proportional dist.) The point for the reestablishment
 of the $\frac{1}{4}$ sec. cor. falls in center of the E.P. & SW. Ry.
 track, brs. N. 21° 30' W. and S. 21° 30' E.; therefore, at a
 point 1.00 chain N. 89° 21' W. establish witness cor. as
 hereinafter described.
- 40.63 A point about 40 lks. S. of end of right of way fence on
 W. side of Ry. track, brs. N. 21° 30' W.
- 41.13 western Union Telegraph line, brs. N. 21° 30' W. and S. 21° 30'
 E.
- 41.37 $\frac{1}{2}$ (1.00 chain N. 89° 21' W. from true point) Set an iron post,
 3 ft. long, 1 in. in diam., 36 ins. in the ground for
 witness cor. to reestablished $\frac{1}{4}$ sec. cor. of secs. 9 and
 16, marked on brass cap,

S 9 WC $\frac{1}{4}$
 S16
 1916

This cor. falls in center of public road; therefore, omit
 the cor. accessories for the reason that the same would
 interfere with the travel on the road.

From this cor.,

- Chimney on Henry B. Tucker's house brs. N. 10° 45' E.
- Chimney on Leonard Jewell's house brs. N. 1° 45' W.
- 60.66 A point about 40 lks. S. of end of wire fence on N. side of
 road brs. N.
- 71.96 A point about 40 lks. S. of end of wire fence on N. side of
 road brs. N.
- 72.00 The SE. cor. of cultivated field brs. N. 50 lks. dist.; culti-
 vated land extends N. about 6.00 chs. dist.
- 80.75 (Proportional dist.) Intersect the reestablished cor. of
 secs. 8, 9, 16 and 17, here inbefore described.
 Land, level valley, drains to the SW.
 Soil, dry, gravelly loam about 12 ins. deep, 1st rate.
 No timber.
 Undergrowth, scattering mesquite and greasewood.
 Good grass.

 N. 0° 09' E., on a true line, bet. secs. 8 and 9.
 Over level land.

- .34 Wire fence brs. E. and W. Enter cultivated land, brs. E.
 about 10.00 chs. dist., and W. 6.00 chs. dist.
- 11.00 Leave cultivated land, brs. E. about 10.00 chs. dist. and
 W. about 5.00 chs. dist. Enter scattering timber and

Dependent resurvey of the Subdivision of T.20 S., R.26 E., 29

Chains.

- 14.62 Wire fence, brs.E. and W.
- 39.45 Wire fence brs.E. and W.
- 40.27 (Proportional dist.) Set an iron post 3 ft.long, 1 in. in diam., 30 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 8 and 9, marked on brass cap,

18		S9
1916		

Dig pits 18x18x12 ins., N.and S. of post, 3 ft. dist.,and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W.of cor.
 From this cor.,
 The E.end gable of S.E.Jewell's house brs.N.16°W.
 S.E.Jewell's windmill brs.N.13°04'W.
 The NE.cor.of Francis King's house brs.N.44°30'W.
 Francis King's windmill brs.N.45°W.

- 47.25 Wash, 10 lks.wide, 3 ft. deep, course S.70°W.
- 50.75 Wash, 15 lks.wide, 2 ft. deep, course S.70°W.
- 66.42 A point about 30 lks.E. of SE.cor.of wire fence.
- 71.57 A point about 40 lks.E. of NE.cor. of wire fence.
- 75.30 Old road brs.N.60°W. and S.60°E.
- 80.54 (Proportional dist.), Set an iron post, 3 ft.long, 2 ins. in diam., 30 ins. in the ground, for reestablished cor. of secs. 4,5,8 and 9, marked on brass cap,

T20S		R26E
S 5		S 4
S 8		S 9
1916		

Dig pits 18x18x12 ins., in each sec. $5\frac{1}{2}$ ft. dist.,and raise a mound of earth 4 ft. base, 2 ft. high, W.of cor.
 From this cor.,
 The E.end gable of S.E.Jewell's house brs.S.24°50'W.
 S.E.Jewell's windmill brs.S.21°30'W.
 The NE.cor.of Francis King's house brs.S.44°20'W.
 Francis King's windmill brs. S.42°26'W.
 Land,level valley, drains to the SW.
 Soil,sandy and adobe clay loam, about 10 ins. deep,1st rate.
 Timber, scattering mesquite.
 Undergrowth, scattering scrub mesquite.
 Good grass.

- From the reestablished cor. of secs. 3,4,9 and 10, hereinbefore described,
 N.88°58'W., on a true line, bet. secs. 4 and 9.
 Over level land, along public road.
- .45 A point 45 lks.S. of SE.cor. of wire fence.
 - 40.23 $\frac{1}{2}$ (Proportional dist.), Set an iron post 3 ft.long, 1 in.in diam., 30 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs.4 and 9, marked on brass cap,

18		S 4
S 9		
1916		

Dig pits 18x18x12 ins., E.and W. of post, 3 ft. dist.,and

30. Dependent resurvey of the Subdivision of T.20 S., R.26 E.

Chains

raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

From this cor.,

Windmill No.1 brs.S. $0^{\circ}43'W.$
 Windmill No.2 brs.S. $0^{\circ}45'W.$
 Windmill No.3 brs.S. $0^{\circ}35'W.$
 Windmill No.4 brs.S. $0^{\circ}55'W.$
 Windmill No.5 brs.S. $5^{\circ}30'W.$
 Windmill No.6 brs.S. $6^{\circ}10'E.$

40.39 A point 10 lks.S. of end of wire fence thru the center of sec.4, brs.N.

71.36 Road brs.N. $10^{\circ}W.$ and S. $10^{\circ}E.$

71.76 Center of EP. & SW. Ry. track brs.N. $21^{\circ}30'W.$ and S. $21^{\circ}30'E.$

72.46 Western Union Telegraph line brs.N. $21^{\circ}30'W.$ and S. $21^{\circ}30'E.$

77.56 Road to Webb, Arizona brs.N. and S.

80.47 (Proportional dist.) Intersect the reestablished cor. of secs.4, 5, 8 and 9, hereinbefore described.
 Land, level valley, drains to the SW.
 Soil, dry, sandy, clay loam, 1st rate.
 No timber,
 Undergrowth, scattering scrub mesquite.
 Poor grass.

From the reestablished cor. of secs.4, 5, 32 and 33, on N. bdy. of Tp., described in Book "D" of this group, S. $0^{\circ}38'W.$, on a true line, bet. secs.4 and 5.
 Over level land, in public road.

.45 A point 45 lks.W. of NW. cor. of wire fence.

10.50 A school house brs.W. about 75 lks. dist.

40.42 No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at

40.48 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs.4 and 5, marked on brass cap,

S5 | S4
 1916

This cor. falls on W. side of wheel tracks in road; therefore, dig pits $18 \times 18 \times 12$ ins., N. and S. of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

From this cor.,

Rufus A. Jean's house brs.S. $72^{\circ}30'W.$ about 12.00 chs. dist.

End of wire fence in sec.4 brs.E. about 60 lks. dist., fence brs.E. and W.

60.60 Center of EP. & SW. Ry. track brs.N. $21^{\circ}30'W.$ and S. $21^{\circ}30'E.$

62.90 Western Union Telegraph line brs.N. $21^{\circ}30'W.$ and S. $21^{\circ}30'E.$

63.00 Road brs.N. $50^{\circ}W.$ and S. $50^{\circ}E.$ about 40 lks. from intersection with road brs.N. and S.

80.75 (Proportional dist.) Intersect the reestablished cor. of secs.4, 5, 8 and 9, hereinbefore described.
 Land, level valley, drains to the southwest.
 Soil, sandy and gravelly loam, about 10 ins. deep, 1st rate.
 No timber.
 Undergrowth, scattering scrub mesquite.
 Good grass.


From the reestablished standard cor. of secs. 31 and 32, on S. bdy. of Tp. (4th. Std. Par. S.), an iron post, 3 ins. in diam., 12 ins. above ground, firmly set, marked on brass cap,

T20S R26E
 S C
S31 S32
 1911


Dependent resurvey of the Subdivision of T.20 S., R.26 E. 31

Chains.

and witnessed by pits E., W. and N., and mound of earth, N. of cor.,
 N. 0° 13' W., on a true line, bet. secs. 31 and 32.
 Over level land.
 16:60 Wire fence, brs. N. 60° W and S. 60° E. At 4.00 chs. NW. intersects fences bearing N. and W., and at 7.00 chs. SE. intersects fence bearing N. 10° E.
 No trace of original $\frac{1}{4}$ sec. cor. can be found, after diligent search; therefore at
 40.11 (One-eighth of dist. bet. existing cors. N. and S.), Set an iron post 3 ft. long, 1 in. in diam., 30 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. of secs. 31 and 32, marked on brass cap,



Dig pits 18x18x12 ins. N. and S^W of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 53.40 Wash, 15 lks. wide, 4 ft. deep, course E.
 58.10 Wash, 10 lks. wide, 3 ft. deep, course S. 40° E.
 66.50 Wash, 15 lks. wide, 5 ft. deep, course S. 45° E.
 74.10 White river 25 ft. lks. wide, banks 8 ft. high, water 6 ins. deep, muddy on quicksand bottom, course S. 30° E. from N.; thence in river bottom.
 75.40 Wire fence brs. N. 30° E. and S. 30° W.
 79.97 Wire fence brs. E and W.
 80.22 (One fourth of dist. bet. existing cors. N. and S.) True point for reestablishment of sec. cor. falls in center of bed of White river, where prevailing conditions would insure the destruction of the cor.; therefore, at the true point, drive a pine stake 2 ins. sq., 4 ft. long, 40 ins. in the ground, and at a point 75 lks. W. of true point, Set an iron post 3 ft. long, 2 ins. in diam., 30 ins. in the ground for witness cor. to re-established cor. of secs. 29, 30, 31 and 32, marked on brass cap,



Dig pits 18x18x12 ins., NE., SE., SW. and NW. of post, 5 ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor.
 Land, level valley, drains to the south.
 Soil, rich sandy loam, about 12 ins. deep, 1st rate.
 No timber, or undergrowth.
 Good grass.

From the reestablished cor. of secs. 28, 29, 32 and 33, here-
 inbefore described,
 N. 89° 47' W., on a true line, bet. secs. 29 and 32.
 Over level land, along road.
 .55 A point 45 lks. N. of end of wire fence brs. S. in sec. 32.
 20.78 A point about 40 lks. S. of end of wire fence, brs. N. thru. sec. 29.
 21.35 A point about 70 lks. N. of NW. cor. of wire fence.
 No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at
 40.07 (Proportional dist.), Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 29 and 32, marked on brass cap,

32. Dependent resurvey of the Subdivision of T.20 S..R.26 E.

Chains.

4S 29
S 32
1916

- Dig pits 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, 3½ ft. base, 1½ ft. high, N. of cor.
 - 42.80 Wash, 20 lks. wide, 3 ft. deep, course S. 30° W.
 - 66.60 A point about 30 lks. N. of end of wire fence in sec. 32, brs. S. 10° W.
 - 68.60 Wash, 30 lks. wide, 3 ft. deep, course S.
 - 80.00 Intersect left bank of White River, 5 ft. high, brs. N. and S. Thence in river bed, course S.
 - 80.14 (Proportional dist.) Intersect the true point for reestablished cor. of secs. 29, 30, 31 and 32, in river bed, witnessed as hereinbefore described.
- Land, level valley, drains to the south and southwest.
Soil, sandy and alkali loam, about 14 ins. deep, 1st rate.
No timber, or undergrowth.
Good grass.

From the reestablished cor. of secs. 25, 30, 31 and 36, on W. bdy. of Tp., an iron post, 3 ins. in diam., 12 ins. above ground, firmly set, marked on brass cap,

T20S
R25E | R26E
S25 | S30
S36 | S31
1911

- and witnessed by pits in each sec., and mound of earth W. of cor., S. 89° 22' E., on a true line, bet. secs. 30 and 31.
- Over level land, slopes to the south.
- No trace of original ¼ sec. cor. can be found after diligent search; therefore, at
- 42.80 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for reestablished ¼ sec. cor. of secs. 30 and 31, marked on brass cap,

4S 30
S 31
1916

- Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth 3½ ft. base, 1½ ft. high, N. of cor.
 - 53.50 Wash, 25 lks. wide, 4 ft. deep, course S.
 - 61.44 A point about 50 lks. N. of NW. cor. of wire fence.
 - 72.50 M. Otto Rundell's house brs. S. about 3.00 chs. dist.
 - 82.13 Witness cor. to reestablished cor. of secs. 29, 30, 31 and 32, hereinbefore described. (75 lks. W. of cor. point)
 - 82.63 Intersect right bank of White river 4 ft. high, brs. N. and S. Thence in river bed, course S.
 - 82.88 (Proportional dist.) Intersect the true point for reestablished cor. of secs. 29, 30, 31 and 32, in river bed.
- Land, level valley, drains to the south.
Soil, dry, sandy and gravelly loam, about 12 ins. deep, 1st rate.
No timber or undergrowth.
Good grass.

From true point for cor. of secs. 29, 30, 31 and 32, N. 0° 24' W., on a true line, bet. secs. 29 and 30. In bed of White River, water 8 ins. deep, muddy, on quick-sand bottom, course S.

22'

Dependent resurvey of the Subdivision of T.20 S., R.26 E. 33.

- Chains.
- 11.00 Leave river bed; ascend left bank, 5 ft. high.
- 11.25 Top of left bank of White River brs. N.10°W. and S.10°E.; thence over level meadow land.
- 39.49 Line of fence posts brs.E. and W., intersecting NW.fence cor. 2.00 chs.E.
No trace of original $\frac{1}{4}$ sec.cor. can be found after diligent search; therefore, at
- 40.11 (One eighth of dist. bet. existing cors.N.and S.), Set an iron post 3 ft.long, 1 in. in diam., 30 ins. in the ground for reestablished $\frac{1}{4}$ sec.cor. of secs.29 and 30, marked on brass cap,

$\frac{1}{4}$ S30 | S29
 1916

- Dig pits 18x18x12 ins., N.and S.of post, 3 ft. dist.,and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,W.of cor.
From this cor.,
Chimney on Daniel H.Crane's house brs.S.52°10'E.
Chimney on Daniel T.Debo's house brs.N.88°05'W.
- 41.20 Road brs.E. and W.
No trace of original sec.cors. can be found after diligent search; therefore, at
- 80.22 (One fourth of dist. bet.existing cors.N. and S.), Set an iron post 3 ft.long, 2 ins. in diam., 30 ins. in the ground, for reestablished cor.of secs. 19,20, 29 and 30, marked on brass cap,

T20S | R26E
 S19 | S20
 S30 | S29
 1916

Dig pits 18x18x12 ins., in each sec. $5\frac{1}{2}$ ft. dist., and raise a mound of earth 4 ft.base, 2 ft. high,W.of cor. Land,level valley,drains to the south. Soil, dark sandy loam, about 14 ins. deep, 1st rate. No timber,or undergrowth. Good grass.

- From the reestablished cor.of secs.20,21,28 and 29,hereinbefore described,
N.89° 58'W., on a true line, bet. secs.20 and 29.
Over level sandy land, along S. side of wire fence, on S. side of lane.
- 19.92 A point 38 lks.S. of end of wire fence on N.side of lane, brs.N.
No trace of original $\frac{1}{4}$ sec.cor. can be found after diligent search; therefore, at
- 39.76 $\frac{1}{2}$ (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground for reestablished $\frac{1}{4}$ sec cor. of secs.20 and 29, marked on brass cap,

$\frac{1}{4}$ S 20
 S 29
 1916

- Dig pits, 18x18x12 ins., E.and W. of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N.of cor.
- 39.80 Wire fence brs.N.and S. 3 lks.S.of intersection with wire fence, brs.E. and W.
- 61.20 A.Whiting's house brs.S. 120 lks.dist.; enter cultivated land, brs.S. about 5.00 chs.dist.
- 64.00 Leave cultivated land, brs.S. about 4.00 chs.dist.
- 79.53 (Proportional dist.) Intersect the reestablished cor.of secs. 19,20, 29 and 30, hereinbefore described. Land,level, sandy valley, drains to the south. Soil, dry, sandy loam, about 14 ins. deep, 1st rate.

34. dependent resurvey of the Subdivision of T. 20 S. R. 26 E.

Chains.

No timber, or undergrowth.
Good grass:

From the reestablished cor. of secs. 19 and 30, on W. bdy. of Tp., an iron post, 3 ins. in diam., 12 ins. above ground, firmly set, marked on brass cap,

T 20 S
R25E S24 | S19
S25 | S30
R26E
1913

and witnessed by pits NE. and SE., and mound of earth, E. of cor.,
S. 39° 24' E., on a true line, bet. secs. 19 and 30.
Over level land, along road.

- .06 A point 90 lks. N. of NW. cor. of wire fence.
- 40.80 Wash, 20 lks. wide, banks 3 ft. high, course S.
- 45.77 No trace of original $\frac{1}{4}$ sec. cor. can be found; after diligent search; therefore, at
- 45.77 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. of secs. 19 and 30, marked on brass cap,

S 19
S 30
1916

Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

From this cor.,

- 46.50 Chimney on Daniel T. Debo's house brs. S. 40° 45' W. A point about 20 lks. S. of SW. cor., and 1.00 chain N. of NE. cor. of wire fences.
- 50.00 A windmill and earth reservoir brs. S. about 3.00 chs. dist.
- 54.00 A point about 90 lks. N. of NW. cor. of wire fence.
- 62.75 White river, 25 lks. wide, banks 5 ft. high, water, muddy, 6 ins. deep, course S. 10° E.
- 77.35 Wash, 30 lks. wide, banks 4 ft. high, course S.
- 80.60 Wash, 20 lks. wide, 3 ft. deep, course S.
- 84.86 Wire fence, 10 lks. S. of NW. cor. and 40 lks. N. of SE. cor.; enter meadow land.
- 85.63 (Proportional dist.) Intersect the reestablished cor. of secs. 19, 20, 29 and 30, hereinbefore described.
Land, level valley, drains to the southeast.
Soil, sandy loam, about 14 ins. deep, 1st rate.
No timber or undergrowth.
Good grass.

N. 0° 02' E., on a true line, bet. secs. 19 and 20.
Over level sandy meadow land.


- .15 Wire fence, brs. E and W.; enter lane.
- 1.25 Road, brs. E and W.
- 2.20 Wire fence, brs. E and W.
- 19.90 Road brs. N. 40° W. and S. 40° E.
- 35.06 Wash, 15 lks. wide, 3 ft. deep, course S, 60° W.
- 40.11 No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at
(One eighth of dist. bet. existing cors. N. and S.) Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 19 and 20, marked on brass cap,

S19 | S20
1916

Dependent resurvey of the Subdivision of T 20 S. R 26 E. 35


Chains.

- Dig pits 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.
- 79.74 Wire fence, brs. E. and W.
- 80.09 Road brs. E. and W.
- No trace of original sec. cor. can be found after diligent search; therefore, at
- 80.22 (One fourth of dist. bet. existing cors. N. and S.), Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for reestablished cor. of secs. 17, 18, 19 and 20, marked on brass cap,



Dig pits 18x18x12 ins., in each sec. 5 1/2 ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor. From this cor.,
 The Soldiers' Hole Spring brs. N. 79°30' W.
 Land, level valley, drains to the south.
 Soil, rich fine, sandy loam, 12 to 18 ins. deep, 1st rate.
 No timber or undergrowth.
 Good grass.

-
- From the reestablished cor. of secs. 16, 17, 20 and 21, hereinbefore described,
 S. 89°55' W., on a true line, bet. secs. 17 and 20.
 Over level land, along N. side of public road in lane.
 - .60 A point 58 lks. N. of end of subdivision line fence in sec. 20 brs. S.
 - 1.25 Road, brs. N. and S., 10 lks. N. of intersection with road, brs. E. and W.
 - 1.40 A point 40 lks. S. of SE. cor. of wire fence W. side of lane brs. N.
 - 21.10 A point about 48 lks. N. of end of wire fence in sec. 20, brs. S.
 - No trace of original 1/4 sec. cor. can be found after diligent search; therefore, at
 - 39.94 (Proportional dist.), Set an iron post 3 ft. long, 1 in. in diam., 30 ins. in the ground for reestablished 1/4 sec. cor. of secs. 17 and 20, marked on brass cap,



- Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.
- 40.90 A point 38 lks. N. of end of wire fence in sec. 20 brs. S. and 52 lks. S. of SW. cor. of wire fence on N. side of line.
- 79.88 (Proportional dist.) Intersect the reestablished cor. of secs. 17, 18, 19 and 20, hereinbefore described.
 Land, level valley, drains to the south.
 Soil, dry, sandy loam, about 14 ins. deep, 1st rate.
 No timber.
 Undergrowth, scattering mesquite along E. 25 chs.
 Good grass.

From the reestablished cor. of secs. 18 and 19, on W. bdy. of Tp., an iron post, 3 ins. in diam., 12 ins. above ground, firmly set, marked on brass cap,

36. Dependent resurvey of the Subdivision of T.20 S. R.26 E.

Chains.

		T20S
R25E	S13	S18
	S24	S19
		R26E
		1911

and witnessed by pits NE. and SE., and mound of earth E. of cor., S.88° 58' E., on a true line, bet. secs.18 and 19. Over level sandy land, thru scattering undergrowth. Old road brs.N.10°E. and S.10°W. Leave undergrowth, brs.N. and S. The SW.cor. of wire fence brs.N. and N.89° E.; enter lahe, brs.E. and W. N.C.Coye's house brs.N. about 6.50 chs.dist. The NW.cor. of wire fence brs.S. about 50 lks.dist. No trace of original $\frac{1}{4}$ sec.cor. can be found after diligent search; therefore, at (Proportional dist.), Set an iron post 3 ft.long, 1 in. in diam., 30 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs.18 and 19, marked on brass cap,

$\frac{1}{4}$ S	18
	S 19
	1916

Dig pits 18x18x12 ins., E.and W. of post, 3 ft.dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N.of cor. From this cor., The Soldier's Hole Spring brs.N.79°E. White River, 15 lks.wide, banks 4 ft.high, water muddy, course S.10°E. Wash, 10 lks.wide, 3 ft. deep, course S.10°W. A point about 35 lks.S. of SE.cor. of wire fence. Wash, 20 lks.wide, 3 ft. deep, course S.20°W. (Proportional dist.) Intersect the reestablished cor. of secs.17,18,19 and 20. Land, level valley, drains to the south. Soil, sandy loam, 8 to 12 ins.deep, 1st rate. Timber, scattering mesquite. No undergrowth. Good grass.

N.0°55' W., on a true line, bet. secs.17 and 18. Over level sandy valley land. Old road brs.N.30°E. and S.30°W. Wash, 10 lks.wide, 3 ft. deep, course S. 60°W. No trace of original $\frac{1}{4}$ sec.cor. can be found after diligent search; therefore, at (One eighth of dist.bet. existing cors. N.and S.), Set an iron post 3 ft.long, 1 in. in diam., 30 ins.in the ground for reestablished $\frac{1}{4}$ sec.cor. of secs.17 and 18, marked on brass cap,

$\frac{1}{4}$ S18	S17
	1916

Dig pits, 18x18x12 ins. N.& S. of post, 3 ft.dist., and raise mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor., and Road brs.N.30°W. and S.30°E. A point 40 lks.W. of SW.cor. of wire fence; enter road brs. N. and S.10°W. and S.30°E. A point 45 lks.W. of NW.corner of wire fence. (One fourth of dist. bet. existing cors. N.and S.) Intersect the recognized cor. of secs. 7,8,17 and 18, an iron pipe, 1 in. in diam., driven firmly in the ground, at the intersection of public roads, and testified to as having been set in the same place originally occupied

Dependent resurvey of the Subdivision of T.20 S. R.26 E. 37

Chains.

by the old government corner, which has been destroyed. Reestablish the cor. as follows: Remove the iron pipe, and in the same place, set an iron post 3 ft. long, 2 ins. in diam., 36 ins. in the ground, for cor. of secs. 7, 8, 17 and 18, marked on brass cap,

T20S	R26E
S 7	S 8
S18	S17
1916	

Omit the cor. accessories to this cor., for the reason that the same would interfere with the travel on the roads.

From this cor.,
The smoke stack on Old Concentrator mill brs. N. 60°45'W.
John McClaskey's house brs. N. 60°45'W.
John McClaskey's windmill brs. N. 59°55'W.
The chimney on E.D. Harris's house brs. S. 62°E.
E.D. Harris's windmill brs. S. 62° 33'E.
The N. end gable of D. Gibson's house brs. S. 73° 55'E.
A windmill brs. S. 23°20'E.

Land, level valley drains to the south.
Soil, dry, sandy. clay loam, 1st rate.
No timber or undergrowth.
Good grass.

From the reestablished cor. of secs. 8, 9, 16 and 17, hereinbefore described,

S. 89°37'W., on a true line, bet. secs. 8 and 17.

Over level land, along center of public road.

- 1.00 A point about 1.00 chain N. of NW. cor. of wire fence.
- 1.60 Road in lane brs. S.
- 2.18 A point, 75 lks. N. of NE. cor. of wire fence.
- 2.25 A point 80 lks. N. of NE. cor. of cultivated field brs. S. about 20.00 chs., and W. 5.00 chs. dist.
- 8.00 A point about 30 lks. S. of SW. cor. of cultivated field brs. N. about 10.00 chs., and E. 16.00 chs. dist.
- 21.40 A point 04 lks. S. of SE. cor. of wire fence.
- No trace of original 1/4 sec. cor. can be found; therefore, at
- 40.16 (Proportional dist.), Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for reestablished 1/4 sec. cor. of secs. 8 and 17, marked on brass cap,

S 8
S 17
1916

Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

From this cor.,
Mary Churchwell's house brs. N. 30°30'W., 10.00 chs. dist.
Mary Churchwell's windmill brs. N. 13°10'E., about 8.00 chs. dist.
Chimney on E.D. Harris' house brs. S. 19°45'E.
E.D. Harris's windmill brs. S. 21°20'E.
The N. end gable of D. Gibson's house brs. S. 10°40'W.
Windmill brs. S. 29° 40'W.


- 40.36 A point 80 lks. N. of end of wire fence in sec. 17, brs. N. and S., and 10 lks. S. of end of wire fence in sec. 8, brs. N.
- 47.40 A point, 80 lks. N. of end of wire fence in sec. 17, brs. S.

38. Dependent resurvey of the Subdivision of T.20 S., R.26 E.

Chains.

80.32 Intersect the reestablished cor. of secs. 7, 8, 17 and 18, hereinbefore described.
 Land, level sandy valley, drains to the south.
 Soil, dry sandy loam, 10 ins. deep, 1st rate.
 No timber.
 Undergrowth, scattering mesquite and greasewood.
 Good grass.


 From the reestablished cor. of secs. 7 and 18, on W. bdy. of Tp. an iron post, 3 ins. in diam., 12 ins. above ground, firmly set, marked on brass cap,



1911

and witnessed by pits NE. and SE., and mound of earth E. of cor.,
 S. 88° 49' E., on a true line, bet. secs. 7 and 18.
 Over level, sandy land, thru scattering undergrowth.
 10.80 Wire fence, brs. N. and S., 130 lks. N. of SW. cor.
 26.00 Wash, 20 lks. wide, 3 ft. deep, course S. 10° E.
 31.65 John Skinner's house brs. S. about 6.50 chs. dist.
 50.50 Wire fence brs. N. and S., about 40 lks. N. of intersection with wire fence brs. E. and W. A fence in sec. 18, brs. S.

No trace of original $\frac{1}{2}$ sec. cor. can be found after diligent search; therefore, at
 50.94 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{2}$ sec. cor. of secs. 7 and 18, marked on brass cap,



Dig pits 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

From this cor.,
 Smoke stack on an old Concentrator mill brs. N. 31° 55' W.

John McClaskey's house brs. N. 8° 45' W.
 John McClaskey's windmill brs. N. 7° 28' W.

55.95 White river 20 lks. wide, 3 ft. deep, dry, course S. 20° W.
 68.66 Wire fence, brs. E. and W.; leave undergrowth, brs. E. and W.; enter public road, brs. E. and W.

90.09 A point 45 lks. S. of SE. cor. of wire fence.

90.54 Intersect the reestablished cor. of secs. 7, 8, 17 and 18, hereinbefore described.
 Land level, sandy valley, drains to the south.
 Soil, dry, sandy loam, about 13 ins. deep, 1st rate.
 No timber.
 Undergrowth, scattering mesquite and greasewood.
 Good grass.

 N. 0° 09' E., on a true line, bet. secs. 7 and 8.
 Over level land, along public road in lane.
 .45 A point 45 lks. E. of SE. cor. and 45 lks. W. of SW. wire fence cors.

40.14 A point 25 lks. W. of end of wire fence in sec. 8 bears E. and 63 lks. E. of end of wire fence in sec. 7, brs. W.
 No trace of original $\frac{1}{2}$ sec. cor. can be found after diligent search; therefore at

40.62 (Mid point bet. recognized cors. N. and S.) Set an iron post 3 ft. long 1 in. in diam., 30 ins. in ground, for reestablished $\frac{1}{2}$

Dependent resurvey of the Subdivision of T.20 S., R.26 E. 39

Chains.

sec.cor. of secs.7 and 18, marked on brass cap,

1/2 S7 | S8
1916

Dig pits. 18x18x12 ins., N.and S. of the post, 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

From this cor.,

The smoke stack on old concentrator mill brs. S.83° 10'W.

J.C.Anderson's house brs.N.55° 15'W.

J.C.Anderson's windmill brs.N.52° 50'W.

57.30 Wash, 15 lks.wide, 3 ft.deep, course S.60°W.

71.90 A point about 40 lks.W. of end of wire fence, brs.E.

72.00 A point 50 lks.W.of SW.cor. of cultivated field, brs.E. about 20.00 chs. and N.5.00 chs.dist.

80.79 A point 45 lks.W. of NW.cor. of wire fence.

81.25 Intersect the recognized cor. of sec.5,6,7 and 8, an iron pipe 1 in. in diam., driven in the ground at point of intersection of public roads, and testified to as being in the same place originally occupied by the old government cor. Reestablish the cor. as follows:

Remove the iron pipe, and in the same place set an iron post, 3 ft.long, 2 ins. in diam., 36 ins.in the ground for cor.of secs. 5,6,7 and 8, marked on brass cap,

T20S | R26E
S6 | S5
S7 | S8
1916

Omit the cor.accessories to this cor. for the reason that the same would interfere with the travel on the roads. Land, level valley, drains to the south. Soil, dry, sandy loam, about 14 ins. deep, 1st rate. Timber, scattering mesquite. No undergrowth. Good grass.

From the reestablished cor. of secs. 4, 5, 8 and 9, hereinbefore described,

N.89° 55'W. on a true line; bet. secs. 5 and 8.

Over level land, thru. scattering undergrowth.

1.88 Road to Webb, Arizona, brs.N.10°E. and S.10°W.

4.70 Road brs.N.40°W. and S.40°E.

20.66 The NE. cor.of wire fence brs.S. about 90 lks.dist.

No trace of original 1/4 sec.cor. can be found after diligent search; therefore, at

40.16 (Proportional dist.) Set an iron post 3 ft.long, 1 in. in diam., 30 ins. in the ground, for reestablished 1/4 sec.cor. of secs.5 and 8, marked on brass cap,

1/2 S 5
S 8
1916

Dig pits, 18x18x12 ins., E.and W. of post, 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N.of cor.

40.30 Wire fence, brs.N. and S. 130 lks.N.of SE.cor., and about 2.00 chs. N. of end of fence line in secs.8, brs.S.

62.00 A point about 125 lks.N. of end of wire fence on S.side of lane, brs. S.

62.50 Frank C.Marshall's house brs.S. about 225 lks.dist.


78.30 Wire fence brs. N.88° W. and S.88°E.; leave undergrowth, brs.E. and W.; enter lane.

164

40. Dependent resurvey of the Subdivision of T. 20 S., R. 26 E.
Chains.

- 79.87 A point 47 lks. N. of NW. cor., and 43 lks. S. of SW. cor. of wire fences.
- 80.32 (Proportional dist.) Intersect the reestablished cor. of secs. 5, 6, 7 and 8, hereinbefore described.
Land, level, valley, drains to the south.
Soil, dry sandy loam, about 14 ins. deep, 1st rate.
Timber, scattering mesquite.
Undergrowth, scattering scrub mesquite.
Good grass.


From the reestablished cor. of secs. 6 and 7, on W. bdy. of Tp., which is an iron post 3 ins. in diam., 12 ins. above ground, firmly set, marked on brass cap,



and witnessed by pits NE. & SE., and mound of earth E. of cor.,

S. 89° 11' E., on a true line, bet. secs. 6 and 7.
Over level, sandy land.

- 33.35 The NW. cor. of wire fence, brs. S. about 130 lks. dist.
- 36.50 Gulch, 5 lks. wide, 2 ft. deep, course S.
- 53.35 Wire fence, brs. N. and S. 60 lks. N. of intersection with wire fence, brs. E. and W.
No trace of original sec. cor. can be found after diligent search; therefore, at
- 53.76 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground for reestablished sec. cor. of secs. 6 and 7, marked on brass cap,



Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

From this cor.,
F.C. Vaughn's house brs. N. 61° 15' W., about 9.00 chs. dist.
J.C. Anderson's house brs. S. 15° 35' E.
J.C. Anderson's windmill brs. S. 20° 45' E.

- 63.00 Dry gulch, 10 lks. wide, 3 ft. deep, course S.
- 93.13 Wire fence brs. N. and S.
- 93.57 Intersect the reestablished cor. of secs. 5, 6, 7 and 8, hereinbefore described.
Land, level valley, drains to the south.
Soil, dry, sandy loam, 12 ins. deep, 1st rate.
No timber.
Undergrowth, scattering scrub mesquite.
Good grass.

From the reestablished cor. of secs. 5, 6, 31 and 32, on W. bdy. of Tp., described in Book "D," of this group,
S. 0° 30' W., on a true line, bet. secs. 5 and 6.
Over level sandy land.

- .15 The Douglas Pearce highway, brs. E. and W.
- .45 Wire fence brs. E. and W. 25 lks. W. of end of wire fence, brs. N. and S.
- 20.16 Wire fence brs. E. and W., about 60 lks. W. of end of wire fence, brs. N.
- 25.30 A point 60 lks. W. of NW. cor. of cultivated field, brs. E. about 12.00 chs. dist. and S. 20° W.

- 28.30 A point about 40 lks.W. of SW.cor. of cultivated field, brs.E. about 10.00 chs.dist.
- 40.11 Wire fence brs. E. and W.; enter public road. No trace of original $\frac{1}{4}$ sec.cor. can be found after diligent search; therefore, at
- 40.86 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for reestablished $\frac{1}{4}$ sec.cor. of secs.5 and 6, marked on brass cap,

186 | 85

1916

Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

- 80.68 A point 45 lks.W. of SW.cor. of wire fence.
- 81.21 Intersect the reestablished cor. of secs. 5,6,7 and 8, hereinbefore described.

Land, level valley, drains to the south. Soil, rich dry, sandy loam, about 12 ins. deep, 1st rate. No timber. Undergrowth, scattering scrub mesquite and greasewood. Good grass.

Boundaries of Township 20 South, Range 26 East.
Latitudes, departures, and closing errors.

Lines designated.	True course.	Dist.	Latitudes.		Departures.	
			N.	S.	E.	W.
South boundary, (4th. Std. Par. S)	S. 89° 50' W.	160.13		.46		160.13
	S. 89° 53' W.	160.16		.33		160.16
	N. 89° 46' W.	160.24	.65			160.24
West boundary,	N. 2° 7' W.	483.54	483.21			17.86
North boundary,	S. 89° 27' E.	97.16		.93	97.16	
	S. 89° 39' E.	40.44		.25	40.44	
	S. 89° 24' E.	40.05		.42	40.05	
	N. 89° 32' E.	40.58	.33		40.58	
	N. 89° 54' E.	40.12	.07		40.12	
	S. 89° 59' E.	80.72		.02	80.72	
	N. 89° 51' E.	80.74	.21		80.74	
East boundary,	S. 89° 54' E.	80.62		.14	80.62	
	S. 0° 19' W.	161.68		161.68		.89
	S. 0° 7' W.	80.92		80.92		.17
	S. 0° 9' W.	80.57		80.57		.21
	S. 0° 20' W.	81.24		81.24		.47
Convergency,	S. 0° 12' E.	40.17		40.17	.14	
	S. 0° 1' W.	39.38		39.38		.01
Totals.			484.47	486.51	501.03	500.14
				484.47	500.14	
Error in latitude,			2.04			
Error in departure,					0.89	

GENERAL DESCRIPTION.

This Tp. situated in the southeastern part of the State of Arizona, about 20 miles N. from Douglas, in the Spring Valley, has a level surface, draining S., and the soil consists mostly of a rich fine sandy loam, 1st rate. The original survey of the subdivision was made in 1885, and most of the original cors. have disappeared, but their original locations are preserved by the improvements of the settlers. There are numerous settlers and many valuable improvements. Much of the land has been cleared, fenced and cultivated. There is a spring in sec. 18, known as "Soldiers' Hole Spring," but no other permanent running water. Most of the settlers have wells operated by engine and windmill power. The principal water course is "White River," course S. in the western part of the Tp., which has an intermittent flow of water.

In all parts of the township which have not been cleared, is scattered mesquite timber and greasewood undergrowth, & a good growth of grass prevails in all secs. The El Paso & Southwestern R. R. (Douglas-Gleason branch), bearing NW. & SE. traverses the central part of the Tp. Numerous roads give access to all parts of the Tp. There is no evidence of the existence of valuable mineral, the land being entirely agricultural in character.

DATE DIAGRAM.

Township 20 South, Range 26 East.

4-3-16	4-3-16	4-3-16	4-3-16	4-3-16	4-3-16
6 4-17-16	5 4-17-16	4 4-17-16	3 4-20-16	2 4-20-16	1 4-19-16
7 4-15-16	8 4-15-16	9 4-14-16	10 4-12-16	11 4-20-16	12 4-19-16
18 4-15-16	17 4-15-16	16 4-14-16	15 4-12-16	14 4-19-16	13 4-10-16
19 4-14-16	20 4-14-16	21 4-13-16	22 4-12-16	23 4-11-16	24 4-10-16
30 4-13-16	29 4-13-16	28 4-13-16	27 4-11-16	26 4-11-16	25 4-10-16
31 4-13-16	32 4-13-16	33 4-11-16	34 4-11-16	35 4-10-16	36 4-10-16
					3-22-16

Resurveys executed on dates shown above by Sidney E. Blout, U. S. S.

STATE OF ARIZONA }
County of Cochise } SS

I E. D. Harris, of lawful age, depose and state; That I have resided in Sec. 17, T. 20 S., R. 26 E., G. & S. R. B. & M., Arizona since 1903 and do solemnly affirm that I have frequently seen the cor. of secs 7, 8, 17, and 18 which consisted of a mesquite stake with marks on it and which by reason of its resemblance to other Government corners which I have seen, I believe was the original Government corner, and that the position pointed out by me to United State Surveyor, Sidney E. Blout, is to the best of my knowledge and belief, the exact position formerly occupied by said corner.

E. D. Harris
Affiant's Signature.

Subscribed and sworn to before me this 17 day of April A.D., 1916.

Sidney E. Blout
U.S. Surveyor.

STATE OF ARIZONA }
County of Cochise } SS

I Dan Cameron, of lawful age, depose and state; That I have resided in Sec. 9, T. 20 S., R. 26 E., G. & S. R. B. & M., Arizona since 1906 and do solemnly affirm that I have frequently seen the cor. of secs 3, 4, 9, and 10 which consisted of a mesquite stake with marks on it and which by reason of its resemblance to other Government corners which I have seen, I believe was the original Government corner, and that the position pointed out by me to United State Surveyor, Sidney E Blout, is to the best of my knowledge and belief, the exact position formerly occupied by said corner.

Dan Cameron
Affiant's Signature.

Subscribed and sworn to before me this 11 day of April A.D., 1916.

Sidney E Blout
U.S. Surveyor.

STATE OF ARIZONA }
 County of Cochise } SS.

I, J. R. Blalock of lawful age, being first duly sworn, depose and state: That I have resided in Sec. 27, T. 20 S., R. 26 E., G & S. R. B. & M. Arizona since 1905, and that in the year 1909 I assisted surveyor Jno A Rockfellow while engaged in re-establishing the old section lines and corners for the settlers in the eastern part of said township, and knew from personal observation that the present corner of sections 10, 11, 14, and 15., 23, 24, 25, and 26., and 22, 23, 26, and 27., each of which consists of an iron pipe driven firmly in the ground, occupies the same position as the corresponding Government corner, found at each place, each of which consisted of a small mesquite or desert willow stake with with some marks on them and which by reason of their age and resemblance to other old Government corners which I have seen, I believe were the original corners.

J. R. Blalock
 Affiant's Signature.

Subscribed and sworn to before me this 20 day of April A.D. 1916.

Sidney E. Blunt
 U. S. Surveyor.

STATE OF ARIZONA }
County of Cochise } SS

I P. A. Dillman, of lawful age, depose and state; That I have resided in Sec. 22, T. 20 S., R. 26 E., G. & S. R. B. & M., Arizona since 1908 and do solemnly affirm that I have frequently seen the cor. of secs 22, 23, 26, and 27 which consisted of a mesquite stake with marks on it and which by reason of its resemblance to other Government corners which I have seen, I believe was the original Government corner, and that the position pointed out by me to United State Surveyor, Sidney E Blout, is to the best of my knowledge and belief, the exact position formerly occupied by said corner.

P. A. Dillman
Affiant's Signature.

Subscribed and sworn to before me this 18 day of April A.D., 1916.

Sidney E. Blout
U.S. Surveyor.

Book "C"

Group 64 - - Arizona.

Township 20 South, Range 26 East.
4-680

FIELD ASSISTANTS to

Sidney E. Blout, U. S. Surveyor.

NAMES.	CAPACITY.
T. Y. White.	1st chainman,
G. A. McEnnis,	2nd chainman,
W. E. Ditmars,	2nd chainman and moundman,
Roy White,	flagman.
Tim Murtaugh,	moundman,
George S. Henry,	axman,
Wm. Workman,	flagman and moundman,
A. L. Lance,	moundman,
Charlie Mathews,	axman.

BOOK 3301

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Sidney E. Blout, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 64, Arizona, bearing date of the 8th day of November, 1915, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the Subdivision Lines of

TOWNSHIP 20 SOUTH, RANGE 26 EAST,

of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes and by diagram on page 42 hereof as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 64, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Sidney E. Blout
U. S. Surveyor.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix, Arizona, JUN 10, 1919

The foregoing field notes of the survey of the Subdivision lines of

TOWNSHIP 20 SOUTH, RANGE 26 EAST,

of the Gila and Salt River Base and Meridian, in the State of Arizona,

executed by Sidney E. Blout, U.S. Surveyor, under his special instructions dated November 8, 1915, for Group 64, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

James P. Smith
U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above described surveys in has been correctly copied from the original notes on file in this office.