

3302

177
0119
1

Book "D."

4-679

BOOK 3302

FIELD NOTES

RE-
OF THE SURVEY OF THE

3302

3302

South boundary, and

Subdivision lines, and

Parts of the East and West boundaries and of

THE RETRACEMENT OF

Part of the East boundary of

all of

TOWNSHIP 19 SOUTH, RANGE 26 EAST

Of the Gila and Salt River Base and Meridian,

In the State of Arizona,

EXECUTED BY

Sidney E. Blout,

In the capacity of U. S. Surveyor, under Special Instructions dated November 8., 1915 issued by the United States Surveyor General to govern surveys included in Group No. 64, which were approved by the Commissioner of the General Land Office, November 23., 1915, and Assignment Instructions dated, 191

Resurvey and
Retracement commenced March 13., 1916.

Resurvey and
Retracement completed May 10., 1916.

Executed under Assignment
Instructions dated Jan. 14, 1916.

INDEX DIAGRAM.

Township _____, *Range* _____

| | | | | | |
|----|----|----|----|----|----|
| 6 | 5 | 4 | 3 | 2 | 1 |
| 7 | 8 | 9 | 10 | 11 | 12 |
| 18 | 17 | 16 | 15 | 14 | 13 |
| 19 | 20 | 21 | 22 | 23 | 24 |
| 30 | 29 | 28 | 27 | 26 | 25 |
| 31 | 32 | 33 | 34 | 35 | 36 |

1A/2F

INDEX DIAGRAM.



3302

Book "D"


Group 64 - - -Arizona.

Township 19 South, Range 26 East.


BOOK 3302

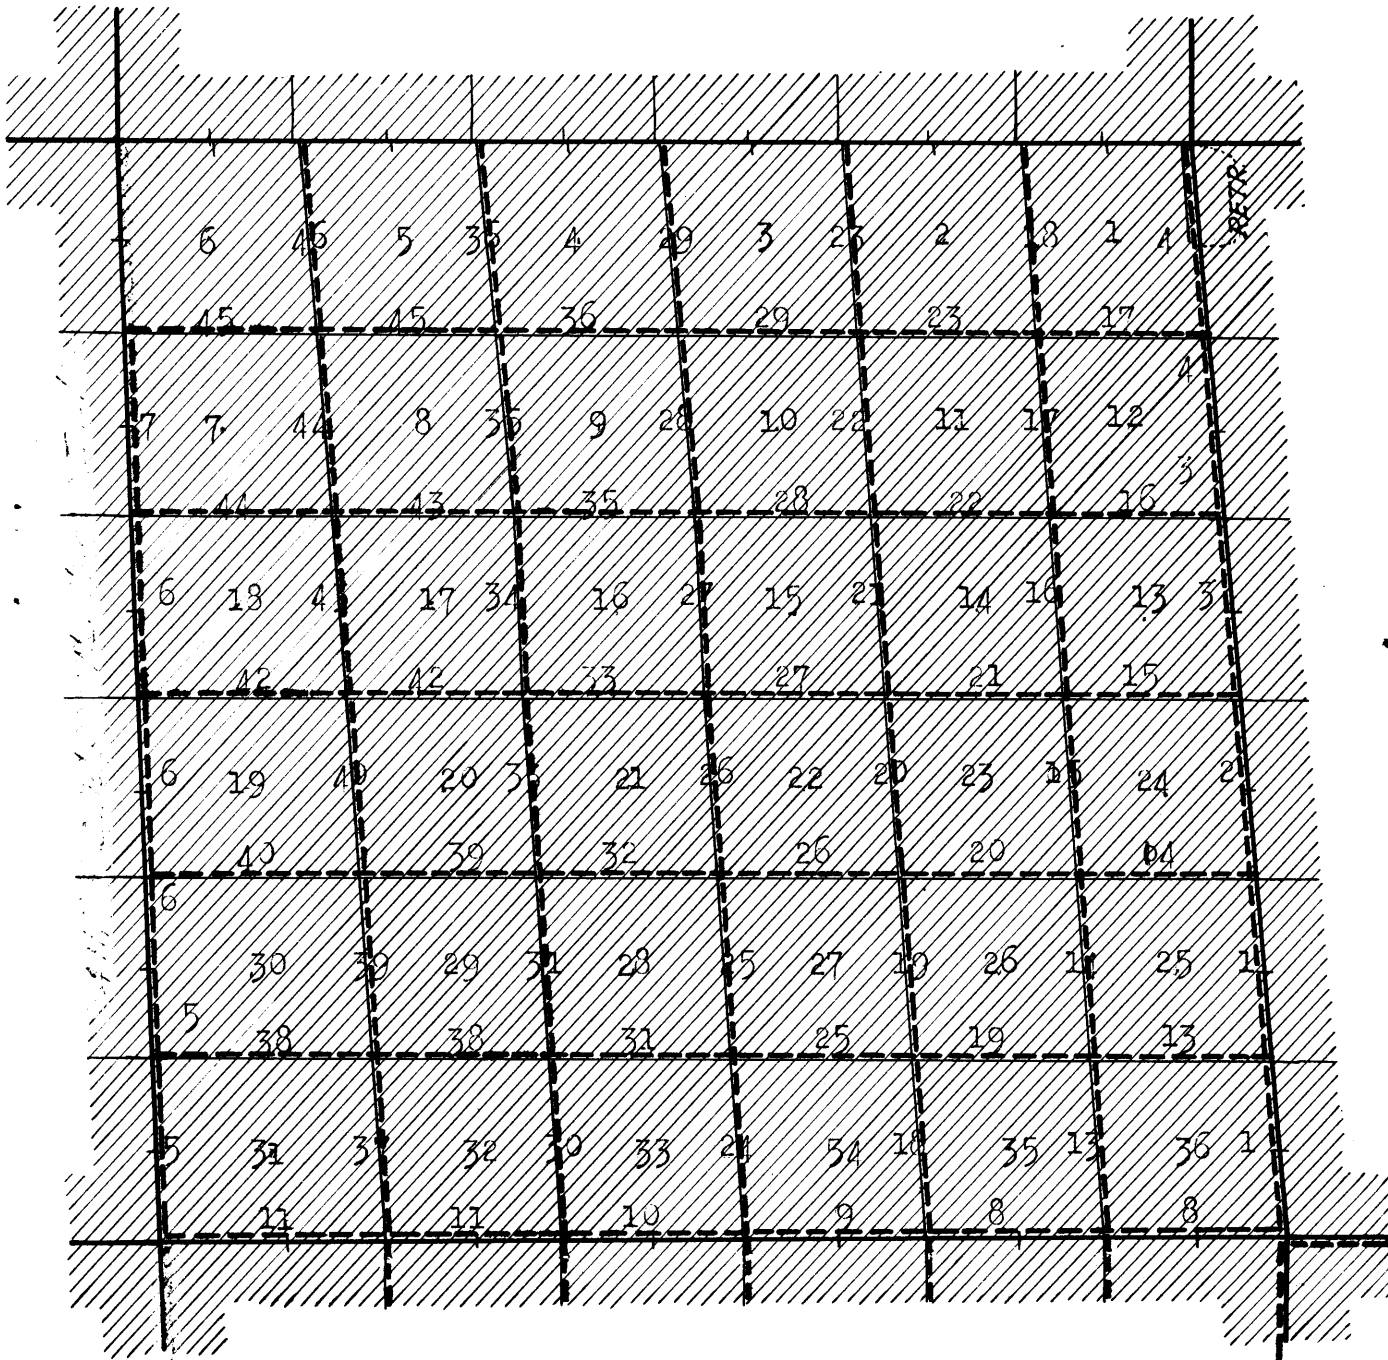

Lines retraced under this group.



Lines resurveyed under this group.



Accepted surveys.



Areas surveyed as per accepted plats on file.

Dependent resurvey of part of E. bdy. of T. 19 S., R. 26 E. 1 B

Chains.

Resurveys and retracements hereinafter described, executed on dates shown on diagram on page 48 hereof, by Sidney E. Blaut, U.S. Surveyor, using a Buff light mountain transit No. 9793, described with record of tests and certificate of approval in Book "A."

A 5.00 chain steel tape and clinometer are the instruments employed to determine all distances hereinafter recorded. Tape tested and properly adjusted.

From the reestablished cor. of Ts. 19 and 20 S., Rs. 26 and 27 E., described in Book "B,"

N. 4° 33' W., on a true line, bet. secs. 31 and 36 (S. 1/2) Magnetic declination, 12° 40' E.

Over level land, thru scattering undergrowth.

16.85 Road brs. N. 50° E. and S. 50° W.

32.00 White river wash, 40 lks. wide, banks 4 ft. high, course S. 70° W.

36.95 Road brs. N. 50° E. and S. 50° W.

38.59 Wire fence 200 lks. E. of SW. fence cor., brs. E. and W.


40.00 Intersect the original 1/4 sec. cor., a granite stone 14x8x8 ins., loosely set, with marks almost obliterated, witnessed by partially filled pits N. and S., and remains of mound of earth, W. of cor.

Reestablish the cor. in same place as follows: Reset the same stone, 10 ins. in the ground, and change marking to read "1/4 S 36" on W., and "S 31" on E. faces; dig out the original pit to 18x18x12 ins., and build up the original mound of earth to 3 1/2 ft. base, 1 1/2 ft. high,

Thence, N. 4° 40' W., on a true line, bet. secs. 31 and 36 (N. 1/2). Over level land, thru scattering undergrowth.

40.30 Intersect the original cor. of secs. 25, 30, 31 and 36, a mound of earth partially filled, pits NE., NW., SE. and SW. of same, and mesquite stake in SE. pit greatly decayed, with marks nearly obliterated. Reestablish cor. in the same place as follows: Remove old stake, scatter the mound of earth.

Set an iron post, 3 ft. long, 3 ins. in diam., 24 ins. in the ground, for cor. of secs. 25, 30, 31 and 36, marked on brass cap,



Dig out the original pits to 18x18x12 ins., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor.

This cor. is situated on line of wire fence, brs. N. 10° E. and S. 10° W.

Land, level valley, slopes to the southwest. Soil, dry sandy loam about 8 ins. deep, 2nd and 3rd rate in S. 1/2; 1st rate in N. 1/2.

No timber. Undergrowth, scattering mesquite and greasewood. Good grass.

N. 4° 43' W., on a true line, bet. secs. 25 and 30 (S. 1/2). Over level land, thru scattering undergrowth, along E. side of road.

.05 Leave fence line.

40.40 Intersect the original 1/4 sec. cor., a mound of earth, with partly filled pits N. and S. of same, and a mesquite stake, 2 ins. square, greatly decayed in N. pit, with marks on same almost obliterated. Reestablish the cor. in the same place as follows: Remove the stake, scatter the mound, and set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor. of secs. 25 and 30, marked on brass cap,

2. Dependent resurvey of part of E. 1/4 of T. 19 S. R. 26 E.

Chains.

1/2 S25 | S30

1916

Dig put original pits to 18x18x12 ins., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

Thence,

N. 4° 16' W., on a true line, bet. secs. 25 and 30, (N. 1/2).

Over level land, thru scattering undergrowth.

40.30 Road, brs. N. 50° E. and S. 50° W.

40.45 Intersect the original cor. of secs. 19, 24, 25 and 30, a soft limestone 12x8x8 ins., loosely set, faintly marked with 2 grooves on S. and 4 grooves on N. face, and witnessed by pits NE., SE., SW. and NW., and mound of earth W. of cor.

Reestablish the cor. in the same place as follows: Remove stone, fill in pits, and set an iron post, 3 ft. long, 3 ins. in diam., 24 ins. in the ground, for cor. of secs. 19, 24, 25 and 30, marked on brass cap,

T19S
R26E | R27E
S24 | S19
S25 | S30
1916

and in place of earth mound W. of cor., raise a mound of stone 2 ft. base, 1 1/2 ft. high. This cor. is situated on the S. side of the road, brs. E. and W.

Land, level valley, slopes to the SW.

Soil, dry sandy and gravelly loam, about 8 ins. deep, 1st and 2nd rate.

No timber.

Undergrowth, scattering mesquite and greasewood.

Good grass.

N. 4° 31' W., on a true line, bet. secs. 19 and 24.

Over level land, thru scattering undergrowth.

.25 Road, brs. E. and W.

40.37 No trace of original 1/4 sec. cor. can be found; therefore, at (Mid point bet. existing cors. N. and S.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished 1/4 sec. cor. of secs. 19 and 24, marked on brass cap,

1/2 S24 | S19

1916

Dig pits 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

76.70 Road brs. N. 50° E. and S. 50° W.

80.74 Intersect the original cor. of secs. 13, 18, 19 and 24, a mound of earth, partly filled pits NE., SE., SW. and NW. of same, and in SE. pit, a mesquite stake greatly decayed with marks on same, nearly obliterated. Destroy all traces of the old cor., and reestablish it in the same place as follows:

Set an iron post, 3 ft. long, 3 ins. in diam., 24 ins. in the ground for cor. of secs. 13, 18, 19 and 24, marked on brass cap,

T19S
R26E | R27E
S13 | S18
S24 | S19
1916


Raise a mound of stone, 2 ft. base, 1 1/2 ft. W. of cor.

Dependent resurvey of part of E. bdy. of T. 19 S. R. 26 E. S. 3.


Chains.

Land, level valley, slopes to the southwest.
Soil, dry gravelly clay loam, 1st and 2nd rate.
No timber.
Undergrowth, scattering mesquite and greasewood.
Good grass.

- 29.58 N. 5° 09' W., on a true line, bet. secs. 13 and 18 (S. 1/2).
Over level land, thru scattering undergrowth.
Telephone line, from Gleason to Rucker post office brs. N. 55° 30' E. and S. 55° 30' W.
- 29.00 Road brs. N. 60° E. and S. 60° W.
- 40.40 Intersect the original 1/4 sec. cor., a mound of earth, with partly filled pits, N. and S. of same and in N. pit, a mesquite stake greatly decayed, with marks on same almost obliterated.
Destroy all trace of the old cor., and reestablish it in the same place as follows:
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor., marked on brass cap,




- 26.85 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor. Thence,
N. 5° 09' W., on a true line, bet. secs. 13 and 18 (N. 1/2).
Over level land, thru scattering undergrowth.
- 35.00 Road, brs. E and W.
Leave level land, brs. NE and SW.
Ascend 13 ft. on SE. slope.
No trace of the original cor. of secs. 7, 12, 13 and 18, can be found after diligent search; therefore, at
- 40.63 (Mid point bet. existing cors. N. and S.) Set an iron post, 3 ft. long, 3 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 7, 12, 13 and 18, marked on brass cap,



Raise a mound of stone 2 ft. base, 1 1/2 ft. high, W. of cor.
Land, south 75 chs. level; north, 6.00 chs. mountainous.
Soil, sandy and gravelly, 2nd rate.
No timber.
Undergrowth, scattering mesquite and soapweed.
Good grass.


- 19.30 N. 5° 09' W., on a true line, bet. secs. 7 and 12 (S. 1/2).
Over mountainous land, thru scattering undergrowth.
Ascend 40 ft. on SE. slope.
- 40.63 Spur, brs. NW. and SE. Descend 57 ft. on NE. slope.
Intersect the original 1/4 sec. cor., a 3 in. mesquite stake greatly decayed, with marks almost obliterated. Destroy the old cor., and reestablish it in the same place as follows:
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,



Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

4. Dependent resurvey of part of E. bdy. of T. 19 S., R. 26 E.

Chains. Thence,
 N. 3° 55' W., on a true line, bet. secs. 7 and 12 (N. $\frac{1}{2}$).
 Over mountainous and level land, thru scattering undergrowth.
 1.00 Foot of descent; leave mountainous land, brs. N. 60° W. and S.
 19.30 20° E.; enter level sandy bottom land.
 3.02 Road brs. N. 40° W. and S. 60° E.
 17.00 Road brs. N. 70° E. and S. 70° W.
 28.35 Wire fence, brs. N. 80° W. and S. 80° E.
 No trace of the cor. of secs. 1, 6, 7 and 12, can be found
 after diligent search; therefore, at
 39.80 (Mid point bet. existing cors. N. and S.), Set an iron post
 3 ft. long, 3 ins. in diam., 24 ins. in the ground for
 reestablished cor. of secs. 1, 6, 7, and 12, marked on
 brass cap,



Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
 Land, south 41 chs., mountainous; north 39 chs., level.
 Soil, sandy and gravelly, 2nd rate on level land; rocky, 4th
 rate on mountainous land.
 No timber.
 Undergrowth, scattering greasewood, ocotillo, soapweed and
 sage brush.
 Good grass.

N. 3° 55' W., on a true line, bet. secs. 1 and 6 (S. $\frac{1}{2}$).
 Over level land, thru scattering undergrowth.
 5.00 Leave level land, brs. N. 10° W. and S. 10° E.; enter mountain-
 ous land. Ascend 261 ft. on SW. slope.
 39.00 Ridge, brs. N. 50° W. and S. 30° E. Descend 47 ft. on NE. slope,
 to
 39.80 Intersect the original $\frac{1}{4}$ sec. cor., a granite stone, 24x18x
 10 ins., firmly set in a mound of stone, marked "1" on
 W. face, and witnessed by mound of stone W. of cor.


Retracement of part of E. bdy. of T. 19 S., R. 26 E.

From original $\frac{1}{4}$ sec. cor. of secs. 1 and 6,
 N. 6° 00' W., on a true line, bet. secs. 1 and 6 (N. $\frac{1}{2}$).
 Over mountainous land, thru scattering undergrowth.
 Descend 246 ft. on NE. slope.
 14.50 Foot of descent; leave mountainous land, brs. N. 10° W. and
 S. 60° E.; enter level bottom land.
 21.00 Wire fence brs. N. 60° W. and S. 60° E.
 47.16 Intersect the reestablished cor. of Ts. 18 and 19 S., Rs. 26
 and 27 E., a granite stone, 10x6x8 ins. above ground,
 marked "18S" on NE., "27E" on SE., "19S" on SW., and "26E"
 on NW. face, and 6 notches on each edge, and witnessed
 by pits N., S.E. and W., and mound of earth S. of cor. (Re-
 established in 1911).
 Land, level and mountainous.
 Soil, sandy, 2nd rate on level land; rocky, 4th rate on
 mountainous land.
 No timber or undergrowth.
 Good grass.

Dependent resurvey of part of W. bdy. of T. 19 S. R. 26 E. 5.

Chains.

From the reestablished cor. of Ts. 19 and 20 S., Rs. 25 and 26 E., an iron post, 3 ins. in diam., 12 ins. above, marked on brass cap,



and witnessed by pits N., E., W. and S., and mound of earth, S. of cor.,

N. 2° 30' W., on a true line, bet. secs. 31 and 36. Over rolling land, thru scattering timber and undergrowth. Road, brs. N. 70° E. and S. 70° W.


5.80
35.57

Wire fence brs. N. 50° W. and S. 50° E., 2.00 chs. E. of SW. fence cor.

No trace of original 1/4 sec. cor. can be found after diligent search; therefore, at

40.06

(Mid point bet. existing cors. N. and S.), Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor., of secs. 31 and 36, marked on brass cap,



Dig pits 18x18x12 ins.; N. and S. of post, 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

From this cor.,

John Burnett's house brs. N. 85° 45' E.
John Burnett's windmill brs. N. 87° E.

47.15

Wire fence, brs. N. 60° W. and S. 60° E. about 2.00 chs. E. of the NW. fence cor.

50.50

Wash, 40 lks. wide, 8 ft. deep, course S. 60° E.

56.00

Road to Kelton, Arizona, brs. N. 20° W. and S. 20° E.

66.20

Road to Kelton, Arizona, brs. N. 40° W. and S. 40° E.

71.20

Road from Sulphur Springs Valley to Kelton and Gleason, Arizona, brs. N. 40° W. and S. 40° E.

80.12

Intersect the original cor. of secs. 25, 30, 31 and 36, a mound of earth and stone witnessed by faint traces of pits. No bearing trees.

Reestablish this cor. in same place by setting a granite stone 24x6x3 ins., 16 ins. in the ground, marked with 5 notches on N., and 1 notch on S. edges. Dig pits 18x18x12 ins., in each sec., 5 1/2 ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

From this cor.,

John Burnett's house brs. S. 32° 10' E.
Burnett's windmill brs. S. 31° 22' E.

Land, rolling, slopes to the east.
Soil, dry, sandy clay loam, about 6 ins. deep, 2nd rate.
Timber, scattering mesquite.
Undergrowth, scattering scrub mesquite, greasewood and buck brush.
Good grass.

N. 2° 43' W., on a true line, bet. secs. 25 and 30 (S. 1/2). Over rolling land, thru scattering undergrowth.

1.30

Road to Kelton, Arizona, brs. N. 20° W. and S. 20° E.

16.50

Wash, 40 lks. wide, 8 ft. deep, course S. 40° E.

17.20

Western Union Telegraph line, brs. N. 57° 30' W. and S. 57° 30' E.

18.01

Center of the EP. & SW. Ry. track, brs. N. 57° 30' W.

19.90

Road to Kelton, Arizona, brs. N. 50° W. and S. 50° E.

21.90

Road to Kelton, Arizona, brs. E. and W.

24.20

Road from ranches in the Sulphur Spring Valley to Kelton, Arizona, brs. N. 30° E. and S. 30° W.

6. Dependent resurvey of part of W. bdy. of T. 19 S., R. 26 E.

| | |
|--------|---|
| Chains | |
| 39.30 | Wire fence brs. E and W. |
| 39.79 | Intersect the original $\frac{1}{4}$ sec. cor., an earth and stone mound, witnessed by faint traces of pits N. and S. Re-establish this cor. in same place, by setting a granite stone 18x6x6 ins., 12 ins. in the ground, marked "1" on W. face for $\frac{1}{4}$ sec. cor. of secs. 25 and 30. Dig pits 18x18x12 ins., N. and S. of stone 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor. |
| | Thence, N. $1^{\circ}09'$ W., on a true line, bet. secs. 25 and 30 (N. $\frac{1}{2}$). Over rolling land, thru scattering timber. |
| .55 | A deserted house brs. E. about 2.00 chs. dist. |
| 25.00 | Telephone line from Rucker Canyon to Gleason, Arizona, brs. N. $69^{\circ}25'$ E. and S. $69^{\circ}25'$ W. |
| 28.75 | A point about 20 lks. W. of NW. fence cor. |
| 39.60 | Wire fence, brs. E. and W., about 40 lks. W. of NE. fence cor. |
| 40.21 | Intersect the original cor. of secs. 19, 24, 25 and 30, an earth and stone mound witnessed by partly filled pits in each sec. No bearing trees. Reestablish cor. in same place, as follows: Destroy all trace of old cor., and set a granite stone 24x6x10 ins., 16 ins. in the ground, marked with 4 notches on N., and 2 notches on S. edges. Dig pits 18x18x12 ins., in each sec. $5\frac{1}{2}$ ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor. Land, rolling valley, slopes gently to the east. Soil, dry, sandy clay loam, about 12 ins. deep, 2nd rate. No timber. Undergrowth, scattering mesquite and greasewood. Good grass. |
| ----- | |
| 29.70 | N. $2^{\circ}15'$ W., on true line, bet. secs. 19 and 24. Over level land, thru scattering undergrowth. Wash, 30 lks. wide, 3 ft. deep, course S. 70° E. No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search. |
| 40.13 | (Mid point bet. existing cors. N. and S.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 19 and 24, marked on brass cap, S24 S19 1916 |
| | Dig pits 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor. |
| 76.20 | Road to Kelton, Arizona, brs. N. 70° W. and S. 70° E. |
| 77.20 | Branch of the same road, brs. E. and W. |
| 80.26 | Intersect the original cor. of secs. 13, 18, 19 and 24, an earth and stone mound witnessed by partly filled pits in each sec. No bearing trees. Reestablish this cor. in same place, as follows: Destroy all trace of old cor., and set a limestone 16x8x6 ins., 12 ins. in the ground, marked with 3 notches on N. and S. edges; dig pits 18x18x12 ins., in each sec. $5\frac{1}{2}$ ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor. Land, level valley, slopes gently to the east. Soil, dry, sandy clay loam, about 12 ins. deep, 2nd rate. No timber. Undergrowth, scattering mesquite and greasewood. Good grass. |
| ----- | |
| 4.50 | N. $2^{\circ}10'$ W., on true line, bet. secs. 13 and 18. Over level land, thru scattering undergrowth. Right of way fence along Arizona Eastern Ry. track, brs. N. $8^{\circ}05'$ E. and S. $8^{\circ}05'$ W. |

Dependent resurvey of part of W bdy of T. 19 S., R. 26 W. 7

Chains.

9.65 Telegraph line brs. N. 8° 05' E. and S. 8° 05' W.

13.10 Center of Arizona Eastern Ry. track, brs. N. 8° 05' E. and S. 8° 05' W.

21.90 Right of way fence, brs. E. and W.

No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at

40.11 (Mid point bet. existing cors. N. and S.) Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 13 and 18, marked on brass cap,

S13 | S18
1916

Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

75.00 Road from Rucker Canyon to Gleason, Arizona, brs. E. and W.

80.22 Intersect the original cor. of secs. 7, 12, 13 and 18, an earth and stone mound, witnessed by faint remains of pits in each sec. No bearing trees.

Reestablish this cor. as follows: Destroy all trace of old cor., and in same place set a limestone 18x6x6 ins., 12 ins. in the ground, marked with 2 notches on N. and 4 notches on S. edges. Dig pits 18x18x12 ins., in each sec. $5\frac{1}{2}$ ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor.

Land, level, sandy valley land.
Soil, dry, sandy clay loam, about 12 ins. deep, 2nd rate.
No timber,
Undergrowth, scattering mesquite and greasewood.
Good grass.

N. 2° 14' W., on true line, bet. secs. 7 and 12.

Over level land.

15.00 Enter wash, course S. 60° E.

18.00 Leave wash.

No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at

40.17 (Mid point bet. existing cors. N. and S.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. of secs. 7 and 12, marked on brass cap,

S12 | S7
1916

Dig pits 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

80.34 Intersect the original cor. of secs. 1, 6, 7 and 12, an earth and stone mound witnessed by faint traces of pits in each sec. No bearing trees.

Reestablish this cor. in same place as follows: Destroy all trace of old cor., and set a limestone 18x4x4 ins. 12 ins. in the ground, marked with 1 notch on N. and 5 notches on S. edges. Dig pits 18x18x12 ins. in each sec. $5\frac{1}{2}$ ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor.

Land, rolling valley, slopes gently to the east.
Soil, dry, sandy clay loam, 2nd and 3rd rate.
No timber or undergrowth.
Good grass.

8. Dependent resurvey of the S. bdy. of T. 19 S., R. 26 E.

Chains.

- From the reestablished cor. of T. 19 and 20 S., R. 26 and 27 E., described in Book "B,"
 N. 89° 54' 7.", on a true line, bet. secs. 1 and 36.
 10.90 Over level land, thru scattering undergrowth, and timber.
 Wire fence, brs. N. and S., 50 lks. S. of NE. fence cor.;
 leave timber and undergrowth, brs. N. and S.; enter
 meadow.
 21.00 White river wash, 40 lks. wide, 4 ft. deep, course south.
 No trace of original $\frac{1}{4}$ sec. cor. can be found after dili-
 gent search; therefore, at
 40.31 (Mid point bet. existing cors. E. and W.) Set an iron
 post, 3 ft. long, 1 in. in diam., 26 ins. in the ground
 for reestablished $\frac{1}{4}$ sec. cor. of secs. 1 and 36, marked
 on brass cap,

T 19 S
 S 36
 S 1
 1916

- Dig pits 1 x 18 x 12 ins. E. and W. of post, 3 ft. dist., and
 raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of
 cor.
 50.35 Wire fence, brs. N. 89° E. and S. 89° W.; enter lane fenced
 on both sides.
 65.00 A point about 30.00 lks. N. of the NE. cor. of cultivated
 field, fenced, extends S. about 20.00 chs. dist.
 75.00 Enter public highway, brs. N. 89° E. and W.
 80.15 A point in center of road, 45 lks. N. of NW. wire fence cor.
 and 45 lks. S. of SW. fence cor.
 80.62 Intersect the recognized cor. of secs. 1, 2, 35 and 36, a
 mesquite stake, 3 ins. sq., driven level with the sur-
 face of the ground, at intersection of N. and S. and E.
 and W. public highways.
 Reestablish cor. as follows: Remove this stake and in
 the same place set an iron post, 3 ft. long, 3 ins. in
 diam., 36 ins. in the ground, marked on brass cap,

T 19 S
 S 35 | S 36
 R 26 E |
 S 2 | S 1
 T 20 S
 1916

Omit the cor. accessories to this cor., for the reason that
 the same would interfere with the travel on the high-
 ways.

Land, level valley, drains to the southwest.
 Soil, dry, sandy clay loam about 8 ins. deep, 2nd rate.
 Timber, scattering mesquite.
 Undergrowth, scattering scrub mesquite, greasewood and
 soapweed.
 Good grass.

- S. 89° 51' W., on a true line, bet. secs. 2 and 35.
 Over level land, along public highway.
 .45 A point 45 lks. N. of NE., and 45 lks. S. of SE. wire fence
 cors.
 15.95 A point 45 lks. N. of NE. cor. of cultivated field, fenced,
 extends S. about 5.00 chs. dist.
 16.95 House belonging to Frank Kirby, Jr., brs. S. about 4.00 chs.
 dist.
 20.45 A point in highway 45 lks. N. of NW. cor. of cultivated
 field extends S. about 5.00 chs. dist.
 No trace of original $\frac{1}{4}$ sec. cor. can be found after dili-
 gent search; therefore, at
 40.37 (Mid point bet. existing cors. E. and W.) Set an iron post
 3 ft. long, 1 in. in diam., 36 ins. in the ground, for
 reestablished $\frac{1}{4}$ sec. cor. of secs. 2 and 35, marked on
 brass cap,

Dependent resurvey of the S. bdy. of T. 19 S., R. 26 E. 9.

Chains.

2S 35
S 2
1916

Omit the cor.accessories to this cor. for the reason that the same would interfere with the travel on the highway. This cor. is on line with property subdivision line fence, thru the center of sec. 2, T. 20 S., R. 26 E.

- 59.15 A point 45 lks.N. of end of wire fence, brs.S.
- 61.25 David Cluff's house brs.S. about 150 lks.dist.
- 70.00 The SE.cor.of cultivated field, fenced, brs.N.45 lks.dist.
- 79.25 Alva Porter's house brs.N. about 3.00 chs.dist.
- 80.29 A point 45 lks.N. of NW., and 45 lks.S. of SW. wire fence cors.
- 80.74 Intersect the recognized cor. of secs. 2, 3, 34 and 35, a mesquite stake, set at the intersection of public highways. Reestablish the cor. as follows: Remove the old stake, and in the same place set an iron post, 3 ft. long, 3 ins. in diam., 36 ins. in the ground, for cor. of secs. 2, 3, 34 and 35, marked on brass cap,

| | |
|----------|-----|
| T19S | |
| R26E S34 | S35 |
| S 3 | S 2 |
| T20S | |
| 1916 | |

Omit the cor.accessories to this cor., for the reason that the same would interfere with the travel on the highways.

Land, level valley, slopes gently to the southwest. Soil, medium rich fine dry, sandy loam, about 8 ins. deep, 1st rate. No timber or undergrowth. Good grass.

-
- .45 N. 89° 59' W., on a true line, bet. secs. 3 and 34. Over level land, along public highway.
 - 40.36 A point 45 lks.N. of NE. and 45 lks.S. of SE. wire fence cors. No trace of original 1/4 sec. cor. can be found after diligent search, therefore at (Mid point bet. existing cors. E. and W.) Set an iron post 3 ft. long, 1 in. in diam., 36 ins. in the ground, for reestablished 1/4 sec. cor. of secs. 3 and 34, marked on brass cap,

1S 34
S 3
1916

Omit the cor.accessories to this cor. for the reason that the same would interfere with the travel on the highway.

- 62.45 This cor. is on line with property subdivision line fence, thro. the center of sec. 3, T. 20 S., R. 26 E. H.P. Carey's house brs.S. about 250 lks. dist.
- 80.25 A point 45 lks.N. of NW. and 45 lks.S. of SW. wire fence cors.
- 80.72 Intersect the recognized cor. of secs. 3, 4, 33 and 34, a mesquite stake 3 ins. sq., 12 ins. long, driven 4 ins. below the surface of the ground at the intersection of E. and W. and N. and S. public highways. Reestablish the cor. as follows: Remove the old stake, and in the same place, set an iron post, 3 ft. long, 3 ins. in diam., 36 ins. in the ground, for cor. of secs. 3, 4, 33 and 34, marked on brass cap.

10: Dependant resurvey of the S. bdy. of T. 19 S., R. 26 E.

Chains.

T19S
R26E S33 | S34
S 4 | S 3
T20S
1916

Omit the cor.accessories to this cor. for the reason that the same would interfere with the travel on the highways.

Land, level valley, slopes gently to the southwest. Soil, medium rich fine dry, sandy loam, about 8 ins. deep, 1st rate.

No timber. Undergrowth, scattering scrub mesquite and greasewood. Good grass.

- .42 S. 89° 54' W., a true line, bet. secs. 4 and 33 (E. 1/2).
Over level land, along center of highway.
- 20.20 A point 45 lks. N. of NE. and 45 lks. S. of SE. wire fence
40.12 cors.
- 20.20 A point 45 lks. N. of end of wire fence, brs. S.
- 40.12 Intersect the recognized 1/4 sec. cor. of secs. 4 and 33,
an iron bar driven level with the surface of the ground
alongside of a granite stone, 14x10x6 ins. Reestablish
the cor. as follows: Remove the stone and iron bar, and
in the same place, set an iron post 3 ft. long, 1 in. in
diam., 36 ins. in the ground for 1/4 sec. cor. of secs. 4
and 33, marked on brass cap,

1/4 S 33
S 4
1916

This cor. falls in the center of the road midway between the wheel tracks; therefore, omit the cor.accessories for the reason that the same would interfere with the travel on the road.

This cor. is in line with N. and S. property line fences in secs. 4 and 33.

- Thence,
S. 89° 32' W. on a true line, bet. secs. 4 and 33 (W. 1/2).
Over level land in road, bearing E. and W.
- 20.36 A point 45 lks. N. of end of wire fence, brs. S.
- 40.13 A point 45 lks. N. of NW. and 45 lks. S. of SW. wire fence
cors.

- 40.58 Intersect the recognized cor. of secs. 4, 5, 32 and 33, a
granite stone 6x6x6 ins. buried in the ground at the
intersection of public highways, marked with 4 notches
on E. and 2 notches on W. edges. Reestablish the cor.
as follows: Remove the stone, and in the same place
Set an iron post, 3 ft. long, 3 ins. in diam., 36 ins. in
the ground, for cor. of secs. 4, 5, 32 and 33, marked on
brass cap,

T19S
R26E S32 | S33
S 5 | S 4
T20S
1916

Omit the cor. accessories to this cor. for the reason that the same would interfere with the travel on the highways. From this cor., the Webb School house brs. S. 11° 30' E., 2.00 chs. dist.

The Webb store and postoffice brs. S. 30° 30' W.
Robert C. Tyler's house brs. S. 44° 30' W.
Windmill brs. S. 46° 37' W.
Emma T. McGraths house brs. N. 80° 20' W.
Windmill brs. N. 73° 28' W.


Land, level valley, drains to the southwest. Soil, fine, dry, sandy clay loam, about 12 ins. deep, 1st

Dependent resurvey of the S. bdy. of T.19 S. R.26 E. 11.

Chains.

rate.
No timber or undergrowth.
Good grass.

- .45 N.89° 24'W., on a true line, bet. secs.5 and 32.
- 18.00 Over level land, along public highway, leading from Gleason to Douglas, Arizona.
- 28.35 A point 50 lks.S. of cultivated field and wire fence.
- 29.30 A point 50 lks.S. of SW. cor.of cultivated field.
- 40.05 Center of the EP.& SW. Ry. track on curve, brs.N.45°W.and S. 45'E.
- Western Union Telegraph line, brs. N.45°W. and S.45°E.
- Intersect the recognized $\frac{1}{4}$ sec.cor., a granite stone, 12x8x8 ins. above ground, loosely set, marked " $\frac{1}{4}$ " on N.face. Reestablish the cor. as follows: Remove the stone, and in the same place, set an iron post 3 ft. long, 1 in. in diam., 30 ins. in the ground for $\frac{1}{4}$ sec.cor. of secs.5 and 32, marked on brass cap,



Dig pits 18x18x12 ins., E.and W. of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

The N.end of wire fence in sec.5, brs.S.45 lks.dist.

The Webb postoffice and store brs.S.49°40'E.


Robt.C.Tyler's house brs.S.39°40'E.

Tyler's windmill brs. S.38° 30'E.

Emma T.McGrath's house brs.N.83°50'E.

Windmill brs.N.76° 45' E.

- 40.00 Thence,
- 40.44 N.89° 39' W., on a true line, bet. secs. 5 and 32 (W. $\frac{1}{2}$).
- Over level land in road, bearing E. and W.
- A point 45 lks. N.of end of wire fence, brs.S.
- Intersect the recognized cor. of secs.5,6,31 and 32 on N. side of road. A mesquite post 3 ins. in diam., 12 ins. above ground, firmly set, marked with 5 notches on E., and 1 notch on W.edges. No accessories. Reestablish the cor. as follows: Remove the old post, and in the same place,
- Set an iron post, 3 ft.long, 3 ins. in diam., 30 ins. in the ground for cor.of secs. 5,6, 31 and 32, marked on brass cap,



Dig pits 18x18x12 ins., in each sec. $5\frac{1}{2}$ ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor.

Land, level valley, drains to the southwest.

Soil, dry, sandy loam, about 12 ins. deep, 1st rate.

No timber.

Undergrowth, scattering mesquite and greasewood.

Good grass.

- 7.85 N.89°27'W., on a true line, bet. secs.6 and 31.
- 15.00 Over rolling land, along N.side of highway.
- 19.50 Wash, 30 lks.wide, 4 ft. deep, course south.
- The SW.cor.of wire fence, brs.N. about 50 lks.
- 19.75 Robert West's house brs.S.4.50 chs.dist.; leave highway, brs.NW.
- A point 50 lks.N. of NW.cor. of wire fence.

12. Dependent resurvey of the S. bdy. of T. 19 S., R. 26 E.

Chains.
 20.00 Enter scattering timber and undergrowth. Ascend over gentle E. slope.
 No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at
 39.95 (Proportional dist.) Set an iron post 3 ft. long; 1 in. in diam., 26 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. of secs. 6 and 31, marked on brass cap,

$$\begin{array}{r} \frac{1}{2} S \ 31 \\ \hline S \ 6 \\ 1916 \end{array}$$

 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
 79.72 Road from McNeil to Gleason, Arizona, brs. N. and S.
 97.16 Intersect the reestablished cor. of Ts. 19 and 20 S., Rs. 25 and 26 E., hereinafore described.
 Land, level and rolling, slopes to the SE.
 Soil, sandy loam, 2nd and 3rd rate.
 Timber, scattering mesquite.
 Undergrowth, scattering scrub mesquite and greasewood.
 Good grass.

Boundaries of Township 19 South, Range 26 East.
 Latitudes, Departures, and Closing Errors.

| Lines designated. | True Co. | Dist. | Latitudes. | | Departures. | |
|-------------------|---------------------|--------|------------|--------|-------------|--------|
| | | | N. | S. | E. | W. |
| South boundary. | N. 89° 54' W. | 80.62 | .14 | | | 80.62 |
| | S. 89° 51' W. | 80.74 | | .21 | | 80.74 |
| | N. 89° 59' W. | 80.72 | .02 | | | 80.72 |
| | S. 89° 54' W. | 40.12 | | .07 | | 40.12 |
| | S. 89° 32' W. | 40.58 | | .33 | | 40.58 |
| | N. 89° 24' W. | 40.05 | .42 | | | 40.05 |
| | N. 89° 39' W. | 40.44 | .25 | | | 40.44 |
| | N. 89° 27' W. | 97.16 | .93 | | | 97.16 |
| West boundary. | N. 2° 30' W. | 80.12 | 80.04 | | | 3.49 |
| | N. 2° 43' W. | 39.79 | 39.74 | | | 1.89 |
| | N. 1° 09' W. | 40.21 | 40.20 | | | .81 |
| | N. 2° 15' W. | 80.26 | 80.20 | | | 3.15 |
| | N. 2° 10' W. | 80.22 | 80.16 | | | 3.03 |
| | N. 2° 14' W. | 80.34 | 80.28 | | | 3.13 |
| | N. 2° 17' W. | 40.05 | 39.99 | | | 1.59 |
| | N. 2° 51' W. | 47.51 | 47.45 | | | 2.36 |
| North boundary. | N. 89° 50' E. | 39.96 | .12 | | 39.96 | |
| | S. 89° 34' E. | 39.95 | | .30 | 39.95 | |
| | N. 89° 57' E. | 40.00 | .03 | | 40.00 | |
| | S. 89° 56' E. | 40.00 | .03 | | 40.00 | |
| | S. 89° 54' E. | 40.08 | | .07 | 40.08 | |
| | S. 89° 52' E. | 79.98 | | .19 | 79.98 | |
| | N. 89° 59' E. | 80.06 | .02 | | 80.06 | |
| | S. 89° 42' E. | 40.00 | | .21 | 40.00 | |
| | S. 89° 56' E. | 80.00 | | .09 | 80.00 | |
| East boundary. | S. 6° 00' E. | 47.16 | | 46.90 | 4.93 | |
| | S. 3° 55' E. | 79.60 | | 79.41 | 5.44 | |
| | S. 5° 09' E. | 121.66 | | 121.17 | 10.92 | |
| | S. 4° 31' E. | 80.74 | | 80.49 | 6.36 | |
| | S. 4° 16' E. | 40.45 | | 40.34 | 3.01 | |
| | S. 4° 43' E. | 40.40 | | 40.26 | 3.32 | |
| | S. 4° 40' E. | 40.30 | | 40.16 | 3.28 | |
| | S. 4° 33' E. | 40.00 | | 39.88 | 3.17 | |
| Convergency, | | | | | .45 | |
| | Totals, | | 490.04 | 490.08 | 520.25 | 519.88 |
| | | | | 490.04 | 519.88 | 519.85 |
| | Error in latitude, | | 0.04 | | | |
| | Error in departure, | | | | 0.27 | 0.05 |

Dependent resurvey of the Subdivision of T.19 S. R. 26 E. 13.

Chains.

From the reestablished cor. of secs. 1, 2, 35 and 36 on S. bdy. of Tp., hereinbefore described,

N. 4° 40' W., on true line, bet. secs. 35 and 36.

Over level land, along center of public highway.

45 Wire fence cor. brs. W about 45 lks. dist.

10.00 Wire fence cor., brs. E. about 45 lks. dist.

36.00 The SE. cor. of cultivated field, brs. W. about 50 lks. dist. No trace of original 1/4 sec. cor. can be found after diligent search; therefore, at

40.24 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam., 30 ins. in the ground for reestablished 1/4 sec. cor. of secs. 35 and 36, marked on brass cap,

1/4 S 35 | S 36

1916

Dig pits 18x18x12 ins. N. and S. of post, 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

40.80 The NE. cor. of cultivated field brs. W. about 50 lks. dist.; field extends W. about 20.00 chs. dist.

40.84 A point 45 lks. E. of end of wire fence in sec. 35, brs. W.

56.80 Lee Code's house brs. W. about 6.00 chs. dist.

79.10 A point 120 lks. W. of the NW. cor. of wire fence.

79.28 A point 110 lks. E. of the NE. cor. of wire fence.

79.60 Public road, brs. E. and W.

80.12 A point 90 lks. W. of the SW. cor. of wire fence.

No trace of original sec. cor. can be found after diligent search; therefore, at

80.49 (Proportional dist.) Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 25, 26, 35 and 36, marked on brass cap,

T19S | R26E

S26 | S25

S35 | S36

1916

Dig pits 18x18x12 ins. in each sec. 5 1/2 ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor.

This cor. is situated on the east side of the road.

Land, level sandy valley, slopes gently to the southwest.

Soil, dry, sandy loam, about 12 ins. deep, 1st rate.

No timber.

Undergrowth, scattering mesquite and soto.

Good grass.

From the reestablished cor. of secs. 25, 30, 31 and 36 on E. bdy. of Tp., hereinbefore described,

N. 89° 50' W., on a true line, bet. secs. 25 and 36.

Over level land, thru. scattering timber, and undergrowth.

.45 Road brs. N. and S.

.83 A point 83 lks. N. of the NE. cor. of wire fence.

No trace of the original 1/4 sec. cor. can be found after diligent search; therefore, at

40.36 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground for reestablished 1/4 sec. cor. of secs. 25 and 36, marked on brass cap,

1/4 S 25

S 36

1916

Dig pits 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

40.70 A point about 10 lks. S. of the SE. cor. of cultivated field extends N. about 5.00 chs. dist.; wire fence brs. N. along end of field.

14. Dependent resurvey of the Subdivision of T.19 S. R.26 E.

Chains.
 54.00 A point about 10 lks.S. of the SW.cor. of cultivated field extends N. about 4.00 chs.dist.
 65.82 Arthur Kirby's house brs.N. about 2.50 chs.dist.
 66.30 A point about 6 lks.S. of the SE. cor. of cultivated field extends N. about 10.00 chs.dist.; a wire fence along end of field brs.N. and S.
 70.00 Wire fence brs.N.85°W. and S.85°E.; enter cultivated field.
 79.82 Wire fence brs.N. and S.; leave cultivated land.
 80.72 (Proportional dist.) Intersect the reestablished cor. of secs. 25,26, 35 and 36, hereinbefore described.
 Land, level valley, slopes to the southwest.
 Soil, dry, sandy loam about 10 ins.deep, 1st rate.
 Timber, scattering mesquite.
 Undergrowth, scattering scrub mesquite and greasewood.
 Good grass.

N.4° 14' W., on a true line, bet. secs. 25 and 26.
 Over level land, along east side of public highway.
 10.00 A point 100 lks.W. of NW. cor. of wire fence and cultivated field.
 26.35 A wash, 10 lks.wide, 3 ft. deep, course S.70°W.
 29.16 Road brs.N. 70°E. and S.70°W.
 31.25 Road brs.N.70°E. and S.70°W.
 No trace of original $\frac{1}{4}$ sec.cor. can be found after diligent search; therefore, at
 40.22 (Proportional dist.) Set an iron post, 3 ft.long, 1 in. in diam., 30 ins. in the ground for reestablished $\frac{1}{4}$ sec.cor. of secs.25 and 26, marked on brass cap,

S26 | S25
 1916

Dig pits 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 73.91 Road brs.E. and W.
 No trace of original sec.cor. can be found after diligent search; therefore, at
 80.44 (Proportional dist.), Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 23,24,25 and 26, marked on brass cap,

T19S | R26E
 S23 | S24
 S26 | S25
 1916

Dig pits, 18x18x12 ins., in each sec., $5\frac{1}{2}$ ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor.
 Land, level, sandy valley, slopes to the southwest.
 Soil, fine, sandy loam, about 10 ins.deep, 2nd rate.
 No timber.
 Undergrowth, scattering scrub mesquite.
 Good grass.

From the reestablished cor. of secs. 19,24, 25 and 30, on E. bdy. of Tp., hereinbefore described,
 S.89° 54' W., on a true line, bet. secs.24 and 25.
 Over level land, thru scattering undergrowth, along the S. side of road.
 No trace of original $\frac{1}{4}$ sec.cor. can be found after diligent search; therefore, at
 40.14 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor., of secs.24 and 25, marked on brass cap,

S 24
 S 25
 1916

Dependent resurvey of the subdivision of T. 19 S. R. 26 E. 15

Chains.

79.50 Dig pits 18x18x12 ins., E. and W. of post, 3 ft. dist., and
80.28 raise a mound of earth 3½ ft. base, 1½ ft. high, N. of cor.
Road, brs. N. and S.
(Proportional dist.) Intersect the reestablished cor. of
secs. 23, 24, 25 and 26, hereinbefore described.
Land, level, valley, slopes to the southwest.
Soil, sandy loam, about 10 ins. deep, 1st rate.
No timber.
Undergrowth, scattering mesquite and greasewood.
Good grass.

35.75 N. 4° 54' W., on a true line, bet. secs. 23 and 24.
Over level land, along east side of road, thru scattering
undergrowth.
Road brs. N. 70° E. and S. 70° W.
No trace of original ¼ sec. cor. can be found after dili-
gent search; therefore, at
40.25½ (Proportional dist.) Set an iron post, 3 ft. long, 1 in.
in diam., 26 ins. in the ground, for reestablished ¼
sec. cor. of secs. 23 and 24, marked on brass cap,

| | |
|--------|------|
| ¼ S 23 | S 24 |
| 1916 | |

62.82 Dig pits 18x18x12 ins., N. and S. of post, 3 ft. dist., and
raise a mound of earth, 3½ ft. base, 1½ ft. high, W. of
cor.
Road brs. E. and W.
No trace of original sec. cor. can be found after diligent
search; therefore at
80.51 (Proportional dist.) Set an iron post 3 ft. long, 2 ins.
in diam., 24 ins. in the ground for reestablished cor.
of secs. 13, 14, 23 and 24, marked on brass cap,

| | |
|------|------|
| T19S | R26E |
| S14 | S13 |
| S23 | S24 |
| 1916 | |

Dig pits 18x18x12 ins., in each sec. 5½ ft. dist., and raise
a mound of earth 4 ft. base, 2 ft. high, W. of cor.
Land, level valley, slopes to the southwest.
Soil, rich fine, dry, sandy loam, about 10 ins. deep, 2nd
rate.
No timber.
Undergrowth, scattering scrub mesquite.
Good grass.

From the reestablished cor. of secs. 13, 18, 19 and 24, on the
E. bdy. of Tp. hereinbefore described,
S. 89° 42' W., on a true line, bet. secs. 13 and 24.
Over level land on S. side of road.
.10 Road, brs. N. and S.
No trace of original ¼ sec. cor. can be found after dili-
gent search; therefore, at
40.44 (Proportional dist.) Set an iron post 3 ft. long, 1 in.
in diam., 26 ins. in the ground for reestablished ¼
sec. cor. of secs. 13 and 24, marked on brass cap,

| | |
|--------|--|
| ¼ S 13 | |
| S 24 | |
| 1916 | |

20.05 Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
(Proportional dist.)

16. Dependent resurvey of the subdivision of T. 19 S., R. 26 E.

- Chains.
80.88 (Proportional dist.) Intersect the reestablished cor. of secs. 13, 14, 23 and 24, hereinbefore described. Land, level, sandy valley, slopes to the southwest. Soil, dry, sandy clay loam, 2nd rate, No timber. Undergrowth, scattering scrub mesquite. Good grass.
-
- .90 N. 4° 35' W. on a true line, bet. secs. 13 and 14. Over level land, along E. side of road, thru scattering undergrowth. Telephone line from Rucker Canyon to Gleason, Arizona, brs. N. 71° 30' E. and S. 71° 30' W.
- 8.43 Road brs. N. 70° E. and S. 70° W.
- 13.50 Leave undergrowth, brs. N. 60° E. and S. 60° W. No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at
- 40.24 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 13 and 14, marked on brass cap,
- S14 | S13
1916
- Dig pits 18x18x12 ins. N. and S. of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
- 54.40 Road brs. N. 70° E. and S. 70° W.
- 72.33 Road brs. E. and W. No trace of original sec. cor. can be found after diligent search; therefore at
- 80.48 (Proportional dist.) Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 11, 12, 13 and 14, marked on brass cap,
- T19S | R26E
S11 | S12
S14 | S13
1916
- Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. Land, level sandy valley, slopes to the southwest. Soil, sandy clay loam, about 8 ins. deep, 2nd rate. No timber. Undergrowth, scattering scrub mesquite and greasewood. Good grass.
-
- From the reestablished cor. of secs. 7, 12, 13 and 18, on the E. bdy. of Tp., hereinbefore described, S. 89° 12' W., on a true line, bet. secs. 12 and 13. Over hilly land, slopes to the south, thru scattering undergrowth.
- .50 Leave hilly land, brs. NE. and SW. Enter mountainous land. Ascend 25 ft. on SE. slope.
- 10.00 Ridge, brs. N. 20° E. and S. 20° W. Descend 29 ft. on NW. slope.
- 22.50 Prospect shaft brs. S. 20 lks. dist.
- 32.70 Foot of descent; leave mountainous land, brs. N. 30° E., and S. 30° W. Enter level sandy valley land. No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at
- 40.04 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 12 and 13, marked on brass cap,

Dependent resurvey of the Subdivision of T.19 S. R.26 E. 17.

Chains.

1/4 S 12
S 13
1916

80.08 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.
(Proportional dist.) Intersect the reestablished cor. of secs. 11, 12, 13 and 14, hereinbefore described.
Land, level, hilly and mountainous.
Soil, sandy and stony, 2nd and 3rd rate.
No timber.
Undergrowth, scattering scrub mesquite, ocotillo, soto, greasewood and rubber plant.
Good grass.

6.00 N. 4° 41' W., on a true line, bet. secs. 11 and 12.
Over level land, thru scattering undergrowth, along east side of road.
Road brs. N. 50° E. and S. 50° W.
No trace of original 1/4 sec. cor. can be found after diligent search; therefore, at
40.24 1/2 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground for reestablished 1/4 sec. cor. of secs. 11 and 12, marked on brass cap,

1/4 S 11 | S 12
1916

68.29 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.
Road brs. N. 40° E. and S. 40° W.
78.84 Road brs. N. 70° W. and S. 70° E.
80.44 Road brs. E. and W.
No trace of original sec. cor. can be found after diligent search; therefore, at
80.49 (Proportional dist.) Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 1, 2, 11 and 12, marked on brass cap,

T19S | R26E
S 2 | S 1
S 11 | S 12
1916

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.
Land, level valley, slopes to the SW.
Soil, medium rich gravelly clay loam, about 10 ins. deep, 2nd rate.
No timber or undergrowth.
Good grass.

From the reestablished cor. of secs. 1, 6, 7 and 12, on the E. bdy. of Tp., hereinbefore described,
S. 89° 37' W., on a true line, bet. secs. 1 and 12.
Over level land, thru scattering undergrowth.
No trace of original 1/4 sec. cor. can be found after diligent search; therefore, at 3 ft. long,
40.18 (Proportional dist.) Set an iron post, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of secs. 1 and 12, marked on brass cap,

1/4 S 1
S 12
1916

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

18. Dependent resurvey of the Subdivision of T.19 S. R. 26 E.

Chains.

78.50 Wire fence, brs. N. 82°W. and S. 82°E.
 80.36 (Proportional Dist.) Intersect the reestablished cor. of
 secs. 1, 2, 11 and 12, hereinbefore described.
 Land, level, sandy valley, slopes to the SW.
 Soil, dry, sandy loam, about 8 ins. deep, 2nd rate.
 No timber.
 Undergrowth, scattering soto, greasewood and brigham
 brush.
 Good grass.

From the reestablished cor. of secs. 1 and 2 on N. bdy. of
 Tp., a granite stone 6x6x6 ins. above ground, firmly
 set, marked with 1 notch on E. and 5 notches on W. edge,
 and witnessed by pits SE. and SW., and mound of earth,
 S. of cor. No bearing trees. (Reestablished in 1911),
 S 4°52'E. on a true line, bet. secs. 1 and 2.
 Over level land, thru. scattering undergrowth.

.05 Road brs. E. and W.
 .50 A point 60 lks. W. of the NW. cor. of wire fence.
 18.85 Road, brs. E. and W.
 21.50 Wire fence brs. N. 3°W. and S. 3° E.
 47.40 Road brs. N. 40°E. and S. 40°W.
 No trace of original 1/4 sec. cor. can be found after dili-
 gent search; therefore, at
 47.56 (Proportional dist.) Set an iron post, 3 ft. long, 1 in.
 in diam., 26 ins. in the ground, for reestablished 1/4
 sec. cor. of secs. 1 and 2, marked on brass cap,

1/4 S2 | S1
 1916

Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and
 raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, W. of
 cor.

87.57 Wire fence brs. N. 82°W. and S. 82°E.
 87.82 (Proportional dist.) Intersect the reestablished cor. of
 secs. 1, 2, 11 and 12, hereinbefore described.
 Land, level, sandy valley, slopes to the SW.
 Soil, dry, sandy loam, about 10 ins. deep, 2nd rate.
 No timber.
 Undergrowth, scattering soto and greasewood.
 Good grass.

From the reestablished cor. of secs. 2, 3, 34 and 35, on
 S. bdy. of Tp., hereinbefore described,
 N. 4°38'W., on a true line, bet. secs. 34 and 35.
 Over level land in lane.

.45 A point 50 lks. E. of SE. and 50 lks. W. of SW. wire fence
 cors.
 2.90 Alva Porter's house brs. E. about 1.50 chs. dist.
 20.00 A point about 50 lks. W. of the NW. cor. of cultivated
 field extends east about 15.00 chs. dist.; field fenced
 with wire fence.
 No trace of original 1/4 sec. cor. can be found after diligent
 search; therefore, at
 40.27 (Proportional dist.) Set an iron post, 3 ft. long, 1 in.
 in diam., 26 ins. in the ground, for reestablished 1/4
 sec. cor. of secs. 34 and 35, marked on brass cap,

1/4 S34 | S35
 1916

Dig pits 18x18x12 ins., N. and S. of post, 3 ft. dist., and
 raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, W. of
 cor.

The SW. cor. of cultivated field, fenced, brs. E. 50 lks.
 dist.; field extends E. about 5.00 chs. dist.

Dependent resurvey of the subdivision of T.19 S., R.26 E., 19

- Chains.
- 49.40 Wash, 10 lks.wide, 2 ft. deep, course S.70°W.
- 50.00 A point about 50 lks.W. of the NW.cor. of cultivated field, extends E. about 5.00 chs.dist.
- 61.77 A point 50 lks.E. of end of wire fence, brs.W.
- 79.64 A point 45 lks.E. of the NE.cor. of wire fence, and 55 lks. W. of the NW. cor.of wire fence.
- 80.50 Road brs.E. and W.
No trace of original sec.cor. can be found after diligent search; therefore, at
- 80.54 (Proportional dist.) Set an iron post, 3 ft.long, 2 ins. in diam., 36 ins. in the ground, for reestablished cor. of secs. 26, 27, 34 and 35, marked on brass cap,

| | |
|------|------|
| T19S | R26E |
| S27 | S26 |
| S34 | S35 |
| 1916 | |

This cor.falls in the edge of the road; therefore, omit the cor.accessories for the reason that the same would interfere with the travel on the road.
Land, level, sandy valley, slopes to the SW.
Soil, sandy loam, about 10 ins. deep, 1st rate.
No timber.
Undergrowth, scattering scrub mesquite.
Good grass.

- From the reestablished cor.of secs. 25, 26, 35 and 36, hereinbefore described,
S.39° 51' W., on a true line, bet. secs. 26 and 35.
Over nearly level land.
- .20 Road brs.N. and S.; thence along N.side of road brs.E. and W.
- 1.10 A point 120 lks.N. of the NE.cor. of wire fence.
- 20.50 Wash, 5 lks.wide, 1½ ft. deep, course S.70° W.
No trace of the original ¼ sec.cor. can be found after diligent search; therefore, at
- 40.37 (Proportional dist.) Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in the ground, for reestablished ¼ sec.cor. of secs.26 and 35, marked on brass cap,

| |
|--------|
| ¼ S 26 |
| S 35 |
| 1916 |

- Dig pits 18x18x12 ins., E.and W.of post, 3 ft. dist., and raise a mound of earth 3½ ft. base, 1½ ft. high.N.of cor.
- 49.80 Wash, 10 lks.wide, 2 ft. deep, course S.40°W.
- 80.74 (Proportional dist.) Intersect the reestablished cor.of secs. 26, 27, 34 and 35, hereinbefore described.
Land, level valley, drains to the southwest.
Soil, rich fine sandy clay loam, 1st rate.
No timber.
Undergrowth, scattering scrub mesquite.
Good grass.

- N.3°55' W., on a true line, bet. secs.26 and 27.
Over nearly level land on E.side of road, thru.scattering undergrowth.
- 6.70 Road brs.N.70°E. and S.70°W.
- 33.12 Road brs.E. and W.
No trace of original ¼ sec.cor. can be found after diligent search; therefore, at
- 40.23½ (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished ¼ sec.cor.of secs.26 and 27, marked on brass cap,

20. Dependent resurvey of the subdivision of T.19 S. R.26 E.

Chains.

1/4 S27 | S26

1916

Dig pits 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

74.92 Road brs. N. 70° E. and S. 70° W.

79.17 Fork of roads, brs. E. and W. and N. 70° E.

No trace of original sec. cor. can be found after diligent search; therefore, at

80.47 (Proportional dist.) Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 22, 23, 26 and 27, marked on brass cap,

T19S | R26E

S22 | S23

S27 | S26

1916

Dig pits 18x18x12 ins., in each sec. 5 1/2 ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor.

Land, rolling valley, slopes to the southwest.

Soil, medium rich, sandy loam, about 8 ins. deep, 2nd rate.

No timber.

Undergrowth, scattering scrub mesquite and greasewood.

Good grass.

From the reestablished cor. of secs. 23, 24, 25 and 26, here-
inbefore described,

S. 89° 53' W. on a true line, bet. secs. 23 and 26.

Over level land, thru scattering undergrowth.

.25 Road brs. N. and S.

40.21 No trace of original 1/4 sec. cor. can be found after dili-
gent search; therefore, at

40.20 1/2 (Proportional dist.) Set an iron post 3 ft. long, 1 in.
in diam., 26 ins. in the ground for reestablished 1/4
sec. cor. of secs. 23 and 26, marked on brass cap,

1/4 S 23

S 26

1916

Dig pits 18x18x12 ins. E. and W. of post, 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

75.72 Road brs. N. 60° E. and S. 60° W.

80.41 Proportional dist.) Intersect the reestablished cor. of
secs. 22, 23, 26 and 27, here inbefore described.

Land, level, sandy valley, slopes to the southwest.

Soil, sandy loam, about 10 ins. deep, 1st rate.

No timber.

Undergrowth, scattering mesquite and greasewood.

Good grass.

N. 4° 47' W., on a true line, bet. secs. 22 and 23.

Over level land, thru scattering timber and undergrowth,
on east side of road.

No trace of original 1/4 sec. cor. can be found after dili-
gent search; therefore, at

40.28 1/2 (Proportional dist.) Set an iron post, 3 ft. long, 1 in.
in diam., 26 ins. in the ground, for reestablished 1/4
sec. cor. of secs. 22 and 23, marked on brass cap,

Dependent resurvey of the Subdivision of T.19 S., R.26 E. 21

Chains.

$\frac{1}{4}$ S22 | S23

1916

Dig pits 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

- 42.00 Leave scattering timber, brs. NE. and SW.
- 52.09 Road brs. E. and W.
- 68.59 Road brs. N. 70° E. and S. 70° W.
- 71.10 Telephone line from Rucker Canyon to Gleason, Arizona, brs. N. 72° E. and S. 72° W.
- 74.57 Road brs. E. and W.
No trace of original sec. cor. can be found after diligent search; therefore, at
- 80.57 (Proportional dist.) Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for reestablished cor. of secs. 14, 15, 22 and 23, marked on brass cap,

T19S | R26E
S15 | S14
S22 | S23

1916

Dig pits 18x18x12 ins., in each sec. $5\frac{1}{2}$ ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor.

Land, level valley, slopes to the southwest.
Soil, sandy loam, about 8 ins. deep, 2nd rate.
Timber, scattering mesquite.
Undergrowth, scattering scrub mesquite and greasewood.
Good grass.

From the reestablished cor. of secs. 13, 14, 23 and 24, hereinbefore described,
S. 89° 59' W. on a true line, bet. secs. 14 and 23.
Over level land, thru. scattering undergrowth.

- 2.04 Road brs. N. and S.
- 3.52 Telephone line, from Rucker Canyon to Gleason, Arizona, brs. N. 71° 30' E. and S. 71° 30' W.
- 30.34 Road brs. N. 70° E. and S. 70° W.
No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at
- 40.13 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. of secs. 14 and 23, marked on brass cap,

$\frac{1}{4}$ S 14
S 23
1916

Dig pits 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

- 80.27 (Proportional dist.) Intersect the reestablished cor. of secs. 14, 15, 22 and 23, hereinbefore described
Land, level valley, slopes to the SW.
Soil, sandy loam, about 10 ins. deep, 2nd rate.
No timber.
Undergrowth, scattering scrub mesquite and greasewood.
Good grass.

N. 4° 00' W. on a true line, bet. secs. 14 and 15.
Over level land, thru. scattering undergrowth, on E. side of road.

- 33.90 Road brs. N. 70° E. and S. 70° W.

22. Dependant resurvey of Subdivision of T.219 S. R.26 E.

Chains.

- 38.93 Road brs. N.60°E. and S.60°W.
No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at
40.24 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. of secs. 14 and 15, marked on brass cap,

| | |
|-------------------|-----|
| $\frac{1}{4}$ S15 | S14 |
| 1916 | |

Dig pits 18x18x12 ins. N. and S. of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

- 66.91 Road, brs. N.40°E. and S.40°W.
No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at
80.48 (Proportional dist.) Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 10, 11, 14 and 15, marked on brass cap,

| | |
|------|------|
| T19S | R26E |
| S10 | S11 |
| S15 | S14 |
| 1916 | |

Dig pits 18x18x12 ins., in each sec. $5\frac{1}{2}$ ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor. Land, level valley, slopes to the SW. Soil, sandy loam, 8 ins. deep, 2nd rate. No timber. Undergrowth, scattering scrub mesquite and greasewood. Good grass.

From the reestablished cor. of secs. 11, 12, 13 and 14, here-
inbefore described,

S.89°52' W. on a true line, bet. secs. 11 and 14.

Over level land.

- 5.66 Road brs. N. and S.
8.06 Road brs. N. 40°E. and S. 40°W.
No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at
39.76 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. of secs. 11 and 14, marked on brass cap,

| |
|--------------------|
| $\frac{1}{4}$ S 11 |
| S 14 |
| 1916 |

Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

- 70.36 Road brs. N.20°E. and S.20°W.
79.52 (Proportional dist.) Intersect the reestablished cor. of secs. 10, 11, 14 and 15, hereinbefore described. Land, level valley, slopes to the southwest. Soil, dry, sandy loam, 8 ins. deep, 2nd rate. No timber or undergrowth. Good grass.

- N.5°13' W., on a true line, bet. secs. 10 and 11.
Over level land, along east side of road.
.33 Road brs. E. and W.
No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at
40.30 $\frac{1}{2}$ (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$

Dependent resurvey of Subdivision of T.19 S., R.26 E. 23.

Chains.

sec.cor. of secs.10 and 11, marked on brass cap,

1/4 S10 | S11
1916

Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

80.61 No trace of original sec.cor. can be found after diligent search; therefore, at (Proportional dist.) Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 2, 3, 10 and 11, marked on brass cap,

T19S | R26E
S 3 | S 2
S10 | S11
1916

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor. Land, level valley, slopes to the SW. Soil, sandy clay loam, about 8 ins. deep, 2nd rate. No timber or undergrowth. Good grass.

From the reestablished cor. of secs. 1, 2, 11 and 12, hereinbefore described,

3.55 N. 89° 57' W., on a true line, bet. secs. 2 and 11.
4.50 Over level land, along N. side of road.
7.25 A point 10 lks. S. of the SW. cor. of wire fence.
Road brs. N. 40° W. and S. 40° E.
Road brs. N. 30° E. and S. 30° W.

40.08 No trace of the original 1/4 sec.cor. can be found after diligent search; therefore, at (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished 1/4 sec.cor. of secs. 2 and 11, marked on brass cap,

1/4 S 2
S 11
1916

Dig pits 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

80.16 (Proportional dist.) Intersect the reestablished cor. of secs. 2, 3, 10 and 11, hereinbefore described. Land, level valley, slopes to the southwest. Soil, dark, dry, sandy and clay loam, about 10 ins. deep, 2nd rate. No timber or undergrowth. Good grass.

From the reestablished cor. of secs. 2 and 3, on N. bdy. of Tp., a granite stone 4x6x6 ins. above ground, firmly set, marked with 2 notches on E. and 4 notches on W. edge, and witnessed by pits SE. and SW., and mound of earth S. of cor. (Reestablished in 1911),

.10 S. 4° 46' E. on a true line, bet. secs. 2 and 3.
34.00 Over level land.
46.12 Road brs. E. and W.
Road brs. N. 60° W. and S. 60° E.
Road brs. N. 40° E. and S. 40° W.
No trace of original 1/4 sec.cor. can be found after diligent search; therefore, at
47.33 (Proportional dist.) Set an iron post 3 ft. long, 1 in.

24. Dependent resurvey of the Subdivision of T.19 S. R.26 E.

Chains.

in diam., 26 ins. in the ground for reestablished $\frac{1}{4}$ sec.cor. of secs.2 and 3, marked on brass cap,

$\frac{1}{4}$ S3 | S2
1916

Dig pits, 18x18x12 ins., N.and S. of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,W.of cor.

87.21 Road brs.E. and W.

87.61 (Proportional dist.) Intersect the reestablished cor. of secs.2,3,10 and 11, hereinbefore described.

Land,level valley, drains to the southwest.

Soil,dry, coarse clay loam, about 10 ins. deep,1st rate. No timber or undergrowth.

From the reestablished cor. of secs. 3,4, 33 and 34, on S.bdy. of Tp., hereinbefore described,

N.4° 27'W. on a true line, bet. secs. 33 and 34.

Over level land in lahe.

.45 A point 45 lks.E. of SE. and 45 lks.W.of SW. wire fence cors.

14.40 Hudson H.Criss's house brs.W. about 150 lks.dist.

18.85 A point 45 lks.W. of end of wire fence, brs.E.

19.00 The SW.cor.of cultivated field brs. E. 50 lks.dist.;field extends E. about 20.00 chs.dist.

31.21 A point 50 lks.W. of end of wire fence, brs.E. about 20.00 chs.dist.

37.20 A point 50 lks.W. of end of wire fence brs.E.about 20.00 chs.dist.

40.05 A point about 50 lks.E. of end of wire fence,brs.W. No trace of original $\frac{1}{4}$ sec.cor. can be found after diligent search; therefore, at

40.33 (Proportional dist.) Set an iron post, 3 ft.long, 1 in. in diam., 30 ins. in the ground, for reestablished $\frac{1}{4}$ sec.cor. of secs.33 and 34, marked on brass cap,

$\frac{1}{4}$ S33 | S34
1916

Dig pits 18x18x12 ins., N.and S.of post, 3 ft. dist.,and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W.of cor. From this cor.,

Chimney on Lyman C.Wood's house brs.S.37°20'E.

Windmill brs.S.40°30'E.

Pumping plant and well brs.S.70°45'E.

Chimney on R.L.Olson's house brs.N.41°25'W.

60.00 A point 45 lks.W. of NW.cor.of cultivated field.

60.05 A point 45 lks.W. of end of wire fence, brs.E.

79.64 A point 45 lks.W. of the NW.cor.of wire fence.

80.07 A point 45 lks.E.of the NE.cor. of wire fence.

80.10 Road brs.E.

80.54 A point 45 lks.W. of the SW.cor.of wire fence.

No trace of the original sec.cor. can be found after diligent search; therefore, at

80.66 (Proportional dist.) Set an iron post, 3 ft.long, 2 ins. in diam., 36 ins. in the ground,for reestablished cor. of secs. 27,28, 33 and 34, marked on brass cap,

T19S | R26E
S28 | S27
S33 | S34
1916

This cor. falls in the road;therefore, omit the cor.accessories for the reason that the same would interfere with the travel on the road.

Chains.

From this cor.,
 Chimney on Lyman C. Wood's house brs. S. 16° 30' E.
 Windmill brs. S. 17° 45' E.
 Pumping plant and well brs. S. 26° 15' E.
 Chimney on R. H. Olson's house brs. S. 25° 50' W.
 Geo. H. Penn's house brs. S. 51° 45' W.
 Pen's windmill brs. S. 52° 30' W.
 Chimney on Wm. Brenning's house brs. N. 20° 45' E.
 Land, level valley, slopes to the SW.
 Soil, rich fine, dry sandy loam, 12 ins. deep, 1st rate.
 No timber. Undergrowth, scattering scrub mesquite.
 Good grass.

 From the reestablished cor. of secs. 26, 27, 34 and 35, here-
 inbefore described,
 N. 89° 51' W. on a true line, bet. secs. 27 and 34.
 Over level land.

- 38.05 Road brs. N. and S.; thence along N. side of road, brs. E. and W.
- 38.38 A point about 90 lks. N. of NE. cor. of wire fence.
- 40.22 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 27 and 34, marked on brass cap,

S 27
 S 34
 1916

- 40.20 Dig pits, 18x18x12 ins. E. and W. of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
- 40.20 Wire fence brs. N. and S., 15 lks. N. of SW. cor. of cultivated field extends north about 10.00 chs. dist.
- 46.84 Leave cultivated field, brs. N. and S., 15 lks. N. of SW. cor. Cultivated land extends N. about 10.00 chs. dist.
- 80.14 Wire fence brs. N. and S., 15 lks. N. of SW. cor. of fence.
- 80.44 (Proportional dist.) Intersect the reestablished cor. of secs. 27, 28, 33 and 34, hereinbefore described.
 Land, level valley, slopes to the southwest.
 Soil, dry, fine sandy loam, about 12 ins. deep, 1st rate.
 No timber.
 Undergrowth, scattering scrub mesquite.
 Good grass.

 N. 3° 46' W., on a true line, bet. secs. 27 and 28.
 Over level land, along east side of road.

- 22.93 Wire fence brs. N. 49° 30' W. and S. 4° 30' E.
- 32.60 Wire fence, brs. E. and W. 20 lks. E. of fence cor.
- 34.20 Road brs. N. 60° E. and S. 60° W.
- 36.24 Road brs. N. 30° W. and S. 30° E.
- 39.50 Wire fence brs. E. and W., 50 lks. E. of fence cor.; enter cultivated field, brs. E. and W.; field extends E. about 20.00 chs. dist.
- No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at
- 40.29 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. of secs. 27 and 28, marked on brass cap,

S 28 | S 27
 1916

Dig pits 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

From this cor.,
 Wm. Brenning's house brs. S. 59° 30' E.

26 Dependent resurvey of Subdivision of T.19 S., R.26 E.

Chains.

- 49.50 Leave cultivated field brs. E. and W., extends E. about 20.00 chs. dist.
- 79.00 Wire fence brs. E and W., 75 lks. E. of NW. cor. of fence.
- 79.71 A point 173 lks. E. of the SE. cor. of wire fence. No trace of original sec. cor. can be found after diligent search; therefore, at
- 80.58 (Proportional dist.) Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 21, 22, 27 and 28, marked on brass cap,

| | |
|------|------|
| T19S | R26E |
| S21 | S22 |
| S28 | S27 |
| 1916 | |

Dig pits, 18x18x12 ins. in each sec. 5½ ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor. Land, level valley, slopes to the southwest. Soil, fine, dry, sandy loam, 8 ins. deep, 2nd rate. No timber. Undergrowth, scattering scrub mesquite and greasewood. Good grass.

From the reestablished cor. of secs. 22, 23, 26 and 27, hereinbefore described, N. 89° 49' W., on a true line, bet. secs. 22 and 27. Over level land, slopes to the SW., thru scattering undergrowth.

- 1.75 Road brs. N. 20° W. and S. 20° E. No trace of original ¼ sec. cor. can be found after diligent search; therefore, at
- 40.17 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished ¼ sec. cor., of secs. 22 and 27, marked on brass cap,

| | |
|------|--|
| S 22 | |
| S 27 | |
| 1916 | |

Dig pits 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth 3½ ft. base, 1½ ft. high, N. of cor.

- 41.53 A point 130 lks. N. of the NE. cor. of wire fence.
- 80.34 (Proportional dist.) Intersect the reestablished cor. of secs. 21, 22, 27 and 28, hereinbefore described. Land, level valley, slopes to the SW. Soil, dry, sandy loam, 8 ins. deep, 1st rate. No timber. Undergrowth, scattering scrub mesquite and greasewood. Good grass.

N. 4° 43' W. on a true line, bet. secs. 21 and 22. Over level land, along E. side of road.


- 38.78 Wire fence brs. E and W., 102 lks. E. of SW. cor. of fence.
- 40.18 Wire fence, brs. E. and W. 105 lks. E. of fence cor.; enter cultivated field, brs. E. and W.; field extends W. 1.00 ch. and east about 20.00 chs. dist. No trace of original ¼ sec. cor. can be found after diligent search; therefore, at
- 40.34½ (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished ¼ sec. cor. of secs. 21 and 22, marked on brass cap,

| | |
|------|-----|
| S21 | S22 |
| 1916 | |

Dependent resurvey of the Subdivision of Township 19 S.R. 26 E. 27

chains.


- Dig pits 18x18x12 ins., N. and S. of post 3 ft. dist., and raise amount of earth 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.
- 45.00 A point from which Dennis Collins' house brs. E. about 17.00 chs. dist.
- 58.90 Wire fence brs. E. and W. about 115 lks. E. of the NW. cor.; leave cultivated field brs. E. and W.; field extends east about 17.00 chs. dist.
- 59.47 Telephone line from Rucker Canyon to Gleason, Arizona, brs. N. 72° E. and S. 72° W.
- 59.68 Road brs. N. 40° E. and S. 40° W.
- 80.23 A point 130 lks. E. of the NE. cor. of wire fence. No trace of original sec. cor. can be found; after diligent search; therefore, at
- 80.69 (Proportional dist.) Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for reestablished cor. of secs. 15, 16, 21 and 22, marked on brass cap,



Dig pits 18x18x12 ins., in each sec. 5 1/2 ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor. Land, level valley, slopes to the SW. Soil, fine, gravelly loam, about 10 ins. deep, 1st rate. No timber or undergrowth. Good grass.

From the reestablished cor. of secs. 14, 15, 22 and 23, hereinafore described, N. 89° 49' W. on a true line, bet. secs. 15 and 22. Over level sandy land.

- 33.90 Enter scattering timber, brs. N. and S. No trace of original 1/4 sec. cor. can be found after diligent search; therefore, at
- 40.13 1/2 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of secs. 15 and 22, marked on brass cap,



- Dig pits 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.
- 45.47 Road brs. N. 20° E. and S. 20° W.
- 53.37 Road brs. N. 50° E. and S. 50° W.
- 59.00 Leave scattering timber, brs. N. and S.
- 64.00 Road brs. N. 40° E. and S. 40° W.
- 80.27 (Intersect the reestablished cor. of secs. 15, 16, 21 and 22, hereinbefore described. Land, level valley, slopes to the southwest. Soil, dry sandy loam, about 10 ins. deep, 1st rate. Timber, scattering mesquite. No undergrowth. Good grass.

N. 3° 22' W. on a true line, bet. secs. 15 and 16. Over level land, that is, undergrowth.

- 14.67 Road brs. N. 80° E. and S. 80° W.
- 44.53 No trace of original 1/4 sec. cor. can be found after diligent search; therefore, at
- 40.27 1/2 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec.

28 Dependent Resurvey of the Subdivision of T.19 S., R.26 E.

Chains

cor. of secs.15 and 16, marked on brass cap,

| | |
|---------|-----|
| 1/4 S16 | S15 |
| 1916 | |

Dig pits 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

66.30 Road brs. N.60°W. and S.60°E.
No trace or original sec. cor. can be found after diligent search; therefore, at

80.55 (Proportional dist.) Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 9, 10, 15 and 16, marked on brass cap,

| | |
|------|------|
| T19S | R26E |
| S 9 | S10 |
| S16 | S15 |
| 1916 | |

Dig pits 18x18x12 ins. in each sec. 5 1/2 ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor. Land, level valley, slopes to the southwest. Soil, sandy clay loam, about 10 ins. deep, 2nd rate. No timber or undergrowth. Good grass.

From the reestablished cor. of secs. 10, 11, 14 and 15. hereinafter described,
N.89°43'W., on a true line, bet. secs. 10 and 15.
Over level land.

12.13 Road brs. N.70°W. and S.70°E.
No trace of original 1/4 sec. cor. can be found after diligent search; therefore, at

39.68 1/2 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of secs. 10 and 15, marked on brass cap,

| | |
|---------|--|
| 1/4 S10 | |
| S 15 | |
| 1916 | |

Dig pits 18x18x12 inw., E. and W. of post, 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

57.24 Road brs. N.10° W. and S.10°E.
79.37 (Proportional dist.) Intersect the reestablished cor. of secs. 9, 10, 15 and 16, hereinbefore described.

Land, level valley, slopes to the southwest.
Soil, dry sandy loam about 12 ins. deep, 1st rate.
No timber or undergrowth.
Good grass.

N.5° 33' W., on a true line, bet. secs. 9 and 10.
Over level land.

7.50 Road from Rucker Canyon to Gleason, Arizona, brs. E. and W.
No trace of original 1/4 sec. cor. can be found after diligent search; therefore, at

40.39 1/2 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished 1/4 sec. cor. of secs. 9 and 10, marked on brass cap,

| | |
|--------|-----|
| 1/4 S9 | S10 |
| 1916 | |

Dependent resurvey of the Subdivision of T. 19 S., R. 26 E. 29

Chains.

Dig pits 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, 3½ ft. base, 1½ ft. high, W. of cor.

45.60 Road to Gleason, brs. N. 50° E. and S. 50° W.

50.00 Road brs. N. 30° E. and S. 30° W., leads to Gleason, Arizona.


61.25 Road brs. N. 40° E. and S. 40° W.

71.00 Road brs. N. 30° E. and S. 30° W.

73.56 Road brs. N. 30° W. and S. 30° E.

74.00 The SE. cor. of Christopher Gates' house brs. W. 5 lks. dist. No trace of original sec. cor. can be found after diligent search; therefore, at

80.79 (Proportional dist.) Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for reestablished cor. of secs. 3, 4, 9 and 10, marked on brass cap,



Dig pits, 18x18x12 ins., in each sec. 5½ ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor.

Land, level valley, slopes to the SW.

Soil, dry, gravelly clay loam, about 12 ins. deep, 1st rate.

No timber, or undergrowth.

Good grass.


From the reestablished cor. of secs. 2, 3, 10 and 11, hereinbefore described,

N. 89° 42' W., on a true line, bet. secs. 3 and 10.

Along S. side of road, brs. E and W.; over level land.

36.90 A point, 45 lks. S. of the SE. cor. of wire fence. No trace of original ¼ sec. cor. can be found after diligent search; therefore, at

40.00 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished ¼ sec. cor. of secs. 3 and 10, marked on brass cap,



Dig pits 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth 3½ ft. base, 1½ ft. high, N. of cor.

55.22 Road brs. N. 50° E. and S. 50° W.

71.40 Road brs. N. 20° W. and S. 20° E.

76.15 A point 45 lks. S. of the SW. cor. of wire fence.

76.45 Road from Douglas, to Wilcox, Arizona, brs. N. 4° 30' W. and S. 4° 30' E.

77.28 A point 50 lks. S. of the SE. cor. of wire fence.

80.00 (Proportional dist.) Intersect the reestablished cor. of secs. 3, 4, 9 and 10, hereinbefore described.

Land, level valley, slopes to the SW.

Soil, fine, dry, sandy loam, about 12 ins. deep, 1st rate.

No timber or undergrowth.

Good grass.

From the reestablished cor. of secs. 3 and 4 on N. bdy. of Tp.; a granite stone, 6x6x3 ins. above ground, firmly set, marked with 3 notches on each of E. and W. faces, and witnessed by mound of earth, S. of cor. No bearing trees. (Reestablished in 1911).

30. ~~Dependant resurvey of the Subdivision of T.19 S. R.26 E.~~

Chains.

- S. $4^{\circ}53'E.$, on a true line, bet. secs. 3 and 4.
Over level land, in lane.
.05 Road brs. E. and W.
.46 A point about 40 lks. E. of the NE. cor. of wire fence.
8.70 A point about 20 lks. E. of end of wire fence, brs. west.
8.75 The NE. cor. of orchard brs. W. 25 lks. dist.
9.90 Howard Dillman's house brs. W. about 3.25 chs. dist.
10.75 The SE. cor. of orchard brs. W. about 15 lks. dist.
11.00 Wire fence on W. side of lane, brs. N. $6^{\circ}30'W.$ and S. $6^{\circ}30'E.$
11.46 Wire fence, brs. E. and W. about 5 lks. W. of east end.
12.05 Howard Dillman's barn brs. W. about 3.75 chs. dist.
13.96 Wire fence, brs. E. and W. 20 lks. W. of E. end; enter cultivated field, brs. E. and W., extends E. 20 lks. and W. about 8.00 chs. dist.
46.95 Wire fence, brs. E. and W., about 350 lks. W. of E. end. Leave cultivated land, brs. E. and W.; extends E. about 3.50 chs. and W. 8.00 chs. dist.
No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at
47.11 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 3 and 4, marked on brass cap,

S4 | S3

1916

- Dig pits 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
50.35 S. A Prater's house brs. W. about 4.60 chs. dist.
86.93 Wire fence brs. E. and W., about 126 lks. W. of the SE. cor.
87.18 Road brs. E. and W.
87.47 (Proportional dist.) Intersect the reestablished cor. of secs. 3, 4, 9 and 10, hereinbefore described.
Land, level sandy valley, slopes to the SW.
Soil, rich, dry, sandy loam, about 12 ins. deep, 1st rate.
No timber or undergrowth.
Good grass.

- From the reestablished cor. of secs. 4, 5, 32 and 33, on S. bdy. of Tp., hereinbefore described,
N. $4^{\circ}23'W.$, on true line, bet. secs. 32 and 33.
Over rolling land, along road.
.45 A point 45 lks. E. of SE. and 45 lks. W. of SW. wire fence cors.
19.47 A point 40 lks. E. of end of wire fence, brs. W.
No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at
40.11 $\frac{1}{2}$ (Mid point bet. existing cors. N. and S.) Set an iron post 3 ft. long, 1 in. in diam., 36 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 32 and 33, marked on brass cap,

S32 | S33


1916

- This cor. falls in the center of the road; therefore, omit the cor. accessories for the reason that the same would interfere with the travel on the road.
40.35 A point about 45 lks. W. of the W. end of wire fence, brs. E.
60.50 A well brs. W. about 1.10 chs. dist.
79.85 A point 45 lks. W. of the NW. cor. of wire fence.
80.23 Intersect the recognized cor. of secs. 28, 29, 32 and 33, a juniper post, 4 ins. sq., 18 ins. above ground, greatly decayed with marks almost obliterated. No cor. accessories visible. Reestablish the cor. as follows:
Remove the post, and in same place set an iron post 3 ft. long, 2 ins. in diam., 30 ins. in the ground for cor.

Dependent resurvey of the Subdivision of T.19 S. R.26 E. 31.

Chains.


for cor. of secs. 28, 29, 32 and 33, marked on brass cap,



Dig pits, 18x18x12 ins., in each sec. 5 1/2 ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor. Land, rolling valley, slopes to the SW. Soil, rich, sandy loam, 1st rate. No timber. Undergrowth, scattering scrub mesquite and greasewood. Good grass.

.70
32.50
40.37

From the reestablished cor. of secs. 27, 28, 33 and 34, hereinbefore described,
S. 89° 30' W., on a true line, bet. secs. 28 and 33. Over rolling land, slopes to the SW., thru scattering undergrowth, along N. side of road, brs. E. and W. A point 60 lks. N. of NE. cor. of wire fence. Jos. M. Caldwell's house brs. S. about 4.00 chs. dist. No trace of original 1/4 sec. cor. can be found after diligent search; therefore, at (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in the ground, for reestablished 1/4 sec. cor. of secs. 28 and 33, marked on brass cap,




This cor. falls in the side of road; therefore, omit the cor. accessories for the reason that the same would interfere with the travel on the road.

80.36
80.74

From this cor., Chimney on Geo. E. Penn's house brs. S. 2° 30' E. Windmill brs. S. 2° 20' E. The SE. cor. of wire fence brs. N. 20 lks. dist. A point 40 lks. S. of the SW. cor. of wire fence. (Proportional dist.) Intersect the reestablished cor. of secs. 28, 29, 32 and 33, hereinbefore described. Land, rolling valley, slopes to the SW. Soil, rich dry, sandy loam, about 10 ins. deep, 1st rate. No timber. Undergrowth, scattering scrub mesquite and greasewood. Good grass.

20.63
39.90
40.10
40.31
40.53

N. 3° 36' W., on a true line, bet. secs. 28 and 29. Over level land, thru scattering undergrowth, along road. Nicholas E. McCormick's house brs. E. about 12.00 chs. dist. A point about 35 lks. E. of the NE. cor. of wire fence. Leave road, turns to the W. Wire fence brs. E. and W., about 60 lks. W. of intersection with N. and S. fence line. No trace of original 1/4 sec. cor. can be found after diligent search; therefore at (One sixth of dist. bet. existing cors. N. and S.) Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished 1/4 sec. cor. of secs. 28 and 29, marked on brass cap,



Dig pits. 18x18x12 ins., N. and S. of post, 3 ft. dist.,

32. Dependent resurvey of the Subdivision of T.19 S. R.26 E.

- Chains
- 63.90 and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
- Wire fence brs. N. 40° W. and S. 40° E., about 4.00 chs. from SW. cor. of field; enter cultivated land.
- 73.00 House brs. E. about 3.00 chs., Philip Wells, owner.
- 79.55 Wire fence, brs. E. and W.; leave cultivated land, brs. E. and W.; extends E. 8.00 chs. and W. about 3.00 chs. dist.
- 79.65 Road in fenced lane, brs. E. and W.
No trace of original sec. cor. can be found after diligent search; therefore at
- 81.06 (One third of dist. between existing cors. N. and S.)
Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for reestablished cor. of secs. 20, 21, 28 and 29, marked on brass cap,

| | |
|------|------|
| T19S | R26E |
| S20 | S21 |
| S29 | S28 |

 1916

Dig pits, $18 \times 18 \times 12$ ins. in each sec. $5\frac{1}{2}$ ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor. Land, level valley, slopes to the SW.
 Soil, dry sandy loam, about 10 ins. deep, 1st rate.
 No timber.
 Undergrowth, scattering scrub mesquite.
 Good grass.

- From the reestablished cor. of secs. 21, 22, 27 and 28, hereinbefore described,
 S. $89^\circ 47'$ W., on a true line, bet. secs. 21 and 28.
 Over level land, slopes to the SW., thru scattering undergrowth, on N. side of road, brs. E. and W.
- 1.35 Road brs. N. and S.
- 1.72 Wire fence, brs. N. $4^\circ 30'$ W. and S. $4^\circ 30'$ E. about 90 lks. N. of SE. fence cor.
- No trace of original $\frac{1}{2}$ sec. cor. can be found after diligent search; therefore at
- 40.24 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished $\frac{1}{2}$ sec. cor. of secs. 21 and 28, marked on brass cap,

| |
|------|
| S 21 |
| S 28 |

 1916

- Dig pits, $18 \times 18 \times 12$ ins., E. and W. of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
- 41.60 Wire fence brs. N. and S. about 1.00 ch. N. of intersection with fence, brs. E. and W. Enter cultivated land, extends N. about 15.00 chs. and south 1.00 ch. dist.
- 43.00 J. Morton Abbott's house brs. N. about 5.00 chs. dist.
- 47.90 Leave cultivated land, brs. N. about 15.00 chs. and S. 1.00 chain dist.
- 47.95 Wire fence, brs. N. $4^\circ 30'$ W. and S. $4^\circ 30'$ E., 1.00 ch. N. of SW. cor. of field.
- 51.35 Road brs. N. 30° W. and S. 30° E.
- 61.15 Road brs. N. and S.
- 61.35 Wire fence, brs. N. and S., about 125 lks. N. of SE. fence cor.
- 77.95 House brs. S. about 12.00 ch. dist., Philip Wells, owner.
- 80.48 (Proportional dist.) Intersect the reestablished cor. of secs. 20, 21, 28 and 29, hereinbefore described.
 Land, level, sandy valley, slopes to the southwest.
 Soil, dry, sandy loam, 8 to 14 ins. deep, 1st rate.
 No timber.
 Undergrowth, scattering scrub mesquite and greasewood.
 Good grass.

Dependent resurvey of the Subdivision of T.19 S..R. 26 E. 33

Chains.


N.4° 37' W., on a true line, bet. secs. 20 and 21.
 Over level land, thru scattering undergrowth.

16.62 Wire fence brs.E. and W., 5.00 chs.E. of the SW.fence cor.
 Leave undergrowth, brs.E. and W.; enter cultivated land,
 extends E. about 10.00 chs. and W. 5.00 chs.dist.

19.75 Enter orchard, brs.E. about 50 lks. and W. 2.00 chs.dist.
 26.00 Leave orchard, brs.E. about 50 lks. and W. 250 lks.dist.
 33.00 A point about 4.00 chs.W.of windmill and reservoir.
 36.00 A point about 18.00 chs.W. of Walter Roper's house.
 38.90 Wire fence, brs.E. and W.; leave cultivated land, brs.E.
 10.00 chs. and W. about 5.00 chs.dist.

39.25 Road brs.E. and W.
 39.60 Wire fence; brs.E. and W., about 120 lks.E. of intersec-
 tion with wire fence, brs.N.4°30'W.
 No trace of original $\frac{1}{4}$ sec.cor. can be found after dili-
 gent search; therefore, at

40.58 (One sixth of dist. bet. existing cors. N.and S.) Set
 an iron post, 3 ft.long, 1 in. in diam., 26 ins. in
 the ground, for reestablished $\frac{1}{4}$ sec.cor. of secs.20
 and 21, marked on brass cap,




Dig pits 18x18x12 ins., N.and S.of post, 3 ft. dist.,and
 raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,W.of
 cor.

47.57 Telephone line from Rucker Canyon to Gleason,Arizona,
 brs.N.71°30'E. and S.71°30'W.

59.05 Wire fence, brs.E. and W., 115 lks.E. of intersection
 with wire fence, brs.N. and S.

61.50 House brs.E. about 16.00 chs.dist.,Winnie Wells, owner.
 78.51 Wire fence, brs.E. and W., 153 lks.E. of intersection
 with wire fence brs.S.4°30'E., and 67 lks.W. of inter-
 section with wire fence, brs.N.4°30'W.
 No trace of original sec.cor. can be found after diligent
 search; therefore, at

81.16 (One third of dist. bet. existing cors. N.and S.) Set an
 iron post 3 ft.long; 2 ins. in diam., 24 ins. in the
 ground for reestablished cor. of secs.16,17,20 and 21,
 marked on brass cap,



Dig pits 18x18x12 ins., in each sec. $5\frac{1}{2}$ ft. dist.,and
 raise a mound of earth 4 ft.base, 2 ft.high,W.of cor.
 Land,level sandy valley, slopes to the SW.
 Soil,rich, fine dry,sandy loam, 8 to 14 ins.deep,1st rate.
 No timber.
 Undergrowth, scattering scrub mesquite and greasewood.
 Good grass.

From the reestablished cor.of secs. 15,16,21 and 22,here-
 inbefore described,
 N.89°56'W., on a true line, bet. secs.16 and 21.
 Over level land.

1.25 Road brs.N. and S.
 2.32 A point 35 lks.N. of the NE.cor. of wire fence.
 No trace of original $\frac{1}{4}$ sec.cor. can be found after dili-
 gent search; therefore, at

40.13 $\frac{1}{2}$ (Proportional dist.) Set an iron post, 3 ft.long, 1 in.
 in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$
 sec.cor.of secs. 16 and 21, marked on brass cap,

34. Dependent resurvey of the Subdivision of T. 19 S., R. 26 E.

Chains.

S 16
S 21
1916

- Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
- 41.19 A point about 45 lks. N. of end of wire fence, brs. S. $4^{\circ}30'$ E.
41.25 A point 50 lks. N. of the NE. cor. of cultivated field, extends S. about 10.00 chs. dist.
55.30 A point about 75 lks. N. of the NW. cor. of cultivated field, extends S. about 10.00 chs. dist.
60.40 Road, brs. N. 30° E. and S. 20° W.
60.74 A point about 70 lks. N. of the NW. cor. of wire fence.
67.90 Road brs. N. 60° W. and S. 60° E.
80.27 (Proportional dist.) Intersect the reestablished cor. of secs. 16, 17, 20 and 21, hereinbefore described.
Land, level valley, slopes to the southwest.
Soil, rich dry, sandy loam, 1st rate.
No timber or undergrowth.
Good grass.

- N. $3^{\circ}08'$ W., on a true line, bet. secs. 16 and 17.
Over level land, thru scattering timber and undergrowth.
No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at
40.51 (One sixth of dist. bet. existing cors. N. and S.) Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. of secs. 16 and 17, marked on brass cap,

S 17 | S 16
1916

- Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
- 72.80 Leave scattering timber and undergrowth, brs. E. and W.
80.64 A point 5 lks. E. of NE. cor. of wire fence.
81.02 (One third of dist. bet. existing cors. N. and S.) Intersect the recognized cor. of secs. 8, 9, 16 and 17, a mesquite post, 3 ins. sq., 8 ins. above ground, greatly decayed, marked with 4 notches on each of E. and S. edges. No cor. accessories visible. Reestablish the cor. as follows: Remove the old post, and in same place, Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 8, 9, 16 and 17, marked on brass cap,

T19S | R26E
S 8 | S 9
S 17 | S 16
1916

- Dig pits 18x18x12 ins., in each sec. $5\frac{1}{2}$ ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor.
Land, level valley, drains to the south.
Soil, rich fine, dry sandy loam, about 12 ins. deep, 1st rate.
Timber, scattering mesquite.
Undergrowth, scattering scrub mesquite and greasewood.
Good grass.

Dependent resurvey of the Subdivision of T.19 S., R.26 E. 35

Chains.

From the reestablished cor. of secs. 9, 10, 15 and 16, hereinbefore described,
 N. 89° 37' W., on a true line, bet. secs. 9 and 16.
 Over level land, slopes to the west.
 1.44 Road from Douglass to Wilcox, Arizona, brs. N. and S.
 28.35 Road, brs. N. 20° E. and S. 20° W.
 36.50 Road, brs. N. 20° W. and S. 20° E.
 No trace of original $\frac{1}{4}$ sec. cor., can be found after diligent search; therefore, at
 39.93 $\frac{1}{2}$ (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 9 and 16, marked on brass cap,

S 9
 S 16
 1916

Dig pits 18x18x12 ins., E. and W. of post 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.
 46.44 Road brs. N. 10° E. and S. 10° W.
 51.04 A point from which a windmill brs. N. about 9.00 chs. dist.
 52.70 Road, brs. N. and S.
 57.25 Road, brs. N. 30° W. and S. 30°.
 63.50 Old reservoir, brs. N. about 11.00 chs. dist.
 79.87 Intersect the reestablished cor. of secs. 8, 9, 16 and 17, hereinbefore described.
 Land, level valley, slopes to the southwest.
 Soil, sandy and gravelly loam, 1st rate.
 No timber or undergrowth.
 Good grass.

N. 5° 50' W., on a true line, bet. secs. 8 and 9.
 Over rolling land, slopes to the SE.
 11.50 Road from Rucker Canyon to Gleason, Arizona, brs. E. and W.
 12.80 Branch of same road, brs. N. 80° E. and S. 80° W.
 20.10 Road brs. N. 40° W. and S. 40° E.
 20.16 A point about 120 lks. W. of the SW. cor. of wire fence.
 40.27 A point about 2,000 chs. W. of end of wire fence, brs. E.
 40.32 No trace of original $\frac{1}{4}$ sec. cor., can be found after diligent search; therefore, at
 40.40 $\frac{1}{2}$ (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 8 and 9, marked on brass cap,

S 8 | S 9
 1916

Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
 47.80 Willis A. Sherwood's house brs. E. about 3.00 chs. dist.
 80.60 A point 50 lks. W. of the NW. cor. of wire fence.
 No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at
 80.81 (Proportional dist.) Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 4, 5, 8 and 9, marked on brass cap,

T19S | R26E
 S 5 | S 4
 S 8 | S 9
 1916

Dig pits 18x18x12 ins., in each sec. 5 $\frac{1}{2}$ ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor.
 Land, rolling valley, slopes to the southeast.
 Soil, dry, sandy clay loam, about 10 ins. deep, 1st rate.

36. Dependent resurvey of the Subdivision of T.19.S., R.26 E.

Chains.

No timber or undergrowth.
Good grass.

From the reestablished cor. of secs. 3, 4, 9 and 10, herein-
before described,

N. 89° 36' W., on a true line, bet. secs. 4 and 9.
Over level land, along south side of road.

20.10 Road brs. N. 40° W. and S. 40° E.

28.26 A point about 30 lks. N. of the NE. cor. of wire fence.

No trace of original $\frac{1}{4}$ sec. cor. can be found after dili-
gent search; therefore, at

40.08 (Proportional dist.) Set an iron post, 3 ft. long, 1 in.
in diam., 26 ins. in the ground for reestablished $\frac{1}{4}$ sec.
cor. of secs. 4 and 9, marked on brass cap,

$\frac{1}{4}$ S 4
S 9
1916

Dig pits 18x18x12 ins., E. and W. of post, 3 ft. dist.,
and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N.
of cor.

44.92 Wm. Schupback's house brs. N. about 4.00 chs. dist.

78.74 A point about 5 lks. N. of the NW. cor. of wire fence, and
36 lks. S. of the SW. cor. of wire fence on N. side of
road.

80.16 Intersect the reestablished cor. of secs. 4, 5, 8 and 9,
hereinbefore described.

Land, level valley, slopes to the south.

Soil, rich, dark sandy loam, 12 ins. deep, 1st rate.

No timber, or undergrowth.

Good grass.

From the reestablished cor. of secs. 4 and 5 on the N. bdy.
of the Tp., a granite stone, 6x6x4 ins. above ground,
firmly set, marked with 4 notches on E. and 2 notches
on W. face, & witnessed by pits SE & SW & mound of earth,
No S. of cor. No bearing trees. (Reestablished in 1911.)

S. 4° 52' E., on a true line, bet. secs. 4 and 5.

Over level land, along road.

.10 Road, brs. E. and W.

.45 A point 25 lks. E. of NE. and 80 lks. W. of NW. wire fence
cors.

.50 The NE. cor. of cultivated field, brs. W. 50 lks. dist., ex-
tends W. about 20.00 chs.

43.37 Robert O. Robinson's house brs. W. about 12.00 chs. dist.

No trace of original $\frac{1}{4}$ sec. cor. can be found after dili-
gent search; therefore, at

46.72 (Proportional dist.) Set an iron post, 3 ft. long, 1 in.
in diam., 26 ins. in the ground for reestablished $\frac{1}{4}$
sec. cor. of said 4 and 5, marked on brass cap,

$\frac{1}{4}$ S 5 | S 4
1916

Dig pits 18x18x12 ins., N. and S. of post, 3 ft. dist., and
raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of
cor.

47.75 A point 27 lks. E. of SE. cor. of cultivated field extends
W. about 20.00 chs. dist.

47.90 A point about 25 lks. E. of end of wire fence, brs. W. and
27 lks. W. of end of wire fence, brs. E., thru. center
of sec. 4.

81.00 A school house brs. W. about 9.00 chs. dist.


86.66 A point about 25 lks. E. of the SE. cor. and 75 lks. W. of the
SW. cor. of wire fences.

Dependent resurvey of the Subdivision of T. 19 S., R. 26 E. 37


Chains.

87.06 (Proportional dist.) Intersect the reestablished cor. of secs. 4, 5, 8 and 9, hereinbefore described.
 Land, level, sandy valley, slopes to the southeast.
 Soil, coarse, gravelly clay loam, about 8 ins. deep, 2nd rate.
 No timber or undergrowth.
 Good grass.

From the reestablished cor. of secs. 5, 6, 31 and 32, on the S bdy. of Tp., hereinbefore described,
 N. 4° 25' W., on a true line, bet. secs. 31 and 32.
 Over level land in lane.
 .45 Wire fence, brs. E. and W. Enter scattering timber and undergrowth, brs. E. and W.
 15.50 Leave scattering timber and undergrowth, brs. N. 30° E. and S. 30° W.; enter cleared land.
 23.20 An earth reservoir, brs. W. about 4.00 chs. dist.
 25.72 Wire fence, brs. N. 50° W. and S. 50° E.; leave cleared land, brs. NW. and SE. Enter scattering timber.
 26.10 Road, brs. N. 70° E. and S. 70° W.
 35.36 Right of way fence along the south side of the EP & SW Ry. brs. N. 57° 30' W. and S. 57° 30' E.; leave scattering timber, brs. NW. and SE.
 35.45 Western Union Telegraph line brs. N. 57° 30' W. and S. 57° 30' E.
 36.32 A point in the center of the EP & SW Ry. track brs. N. 57° 30' W. and S. 57° 30' E.
 37.28 Right of way fence on the N. side of the EP & SW Ry. track, brs. N. 57° 30' W. and S. 57° 30' E.
 No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at
 40.13 $\frac{1}{2}$ (Mid point bet. existing cors. N. and S.) Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 31 and 32, marked on brass cap,



Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth $\frac{3}{8}$ ft. base, $\frac{1}{2}$ ft. high, W. of cor.
 This cor. falls on W. side of road, brs. N. and S.
 40.15 A point 50 lks. W. of the SW. cor. of wire fence.
 80.27 Intersect the recognized cor. of secs. 29, 30, 31 and 32, a decayed end of a cedar post, with a 1 in. iron pipe, driven alongside, and testified to by G. W. Scheerer as occupying the former position of original sec. cor., re-establish this cor. as follows:
 Remove the iron pipe and decayed cedar post, and in the same place, set an iron post, 3 ft. long, 2 ins. in diam. 36 ins. in the ground, for reestablished cor. of secs. 29, 30, 31 and 32, marked on brass cap,



This cor. falls in the center of the road; therefore, omit the cor. accessaries for the reason that the same would interfere with the travel on the road.
 Land, level valley, slopes to the S.
 Soil, rich sandy loam, about 12 ins. deep, 1st rate.
 Timber, scattering mesquite.
 Undergrowth, scattering scrub mesquite and greasewood.
 Good grass.

38. Dependent resurvey of the Subdivision of T.19 S., R.26 E.

| | |
|---------|--|
| Chains. | From the reestablished cor. of secs. 28, 29, 32 and 33, here- inbefore described, N. 89° 31' W., on a true line, bet. secs. 29 and 32. Over level land, along N. side of road. |
| 9.92 | Wire fence, brs. N. and S., 30 lks. S. of intersection with wire fence, brs. E. and W. |
| 20.22 | A point 40 lks. S. of end of wire fence, brs. N. 4° 30' W., thru. the center of sec. 29. No trace of the original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at |
| 40.23 | (Mid point bet. existing cors. E. and W.) Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 29 and 32, marked on brass cap, <div style="text-align: center;"> $\frac{1}{4}$ S 29 $\frac{1}{4}$ S 32 1916 </div> |
| | Dig pits 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor. |
| 60.40 | A point 40 lks. S. of end of wire fence, brs. N. 4° 30' W. in sec. 29. |
| 80.00 | Intersect N. and S. fence line, 40 lks. S. of intersection with wire fence, brs. E. and W. |
| 80.46 | Intersect the reestablished cor. of secs. 29, 30, 31 and 32, hereinbefore described. Land, level valley, slopes to the S. Soil, rich dry sandy loam, 12 to 18 ins. deep, 1st rate. Timber, scattering mesquite. Undergrowth, scattering scrub mesquite and greasewood. Good grass. |
| ----- | |
| | From the reestablished cor. of secs. 25, 30, 31 and 36, on W. bdy. of Tp., hereinbefore described, S. 89° 29' E., on a true line, bet. secs. 30 and 31. Over rolling land, slopes to the southeast, thru. scatter- ing undergrowth. |
| .85 | Road to Kelton, Arizona, brs. N. and S. |
| 25.65 | Wash, 35 lks. wide, 10 ft. deep, course S. 57° 30' E. |
| 26.82 | Western Union Telegraph line brs. N. 57° 30' W. and S. 57° 30' E. |
| 28.05 | Center of the EE & SW. Ry. track brs. N. 57° 30' W. and S. 57° 30' E. No trace of original $\frac{1}{4}$ sec. cor. can be found after dili- gent search; therefore, at |
| 54.30 | (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 30 and 31, marked on brass cap, <div style="text-align: center;"> $\frac{1}{4}$ S 30 S 31 1916 </div> |
| | Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor. |
| 54.51 | A point 40 lks. S. of end of wire fence, brs. N. 4° 30' W., thru. sec. 30; enter road, brs. E. and W. |
| 56.65 | Wash, 10 lks. wide, 2 ft. deep, course S. 60° E. |
| 72.70 | Nile A. Perry's house brs. S. 2.50 chs. dist. |
| 73.16 | Another house on Nile Perry's claim, brs. S. 2.50 chs. dist. |
| 74.48 | A point 50 lks. N. of NE. cor. of wire fence, |
| 87.95 | Wash, 10 lks. wide, 2 ft. deep, course S. |
| 94.45 | Intersect the reestablished cor. of secs. 29, 30, 31 and 32, hereinbefore described. Land, rolling valley, slopes to the SE. Soil, rich, dry, gravelly and sandy loam, 8 to 14 ins. deep, 1st and 2nd rate. No timber. |

Dependent resurvey of the Subdivision of T. 19 S., R. 26 E.

Chains.

Undergrowth, scattering scrub mesquite and greasewood.
Good grass.

- 19.95 N. 3° 28' W., on a true line, between secs. 29 and 30. Over rolling land, slopes to the southeast, along road. A point 78 lks. E. of the NE. cor. of wire fence.
 - 26.40 Wire fence on east side of road, brs. N. 4° 33' W. and S. 4° 33' E.; leave road, enter cultivated land, brs. N. 4° W. and S. 4° E., extends S., about 7.00 chs. dist.
 - 27.00 A point about 10.00 chs. west of Joseph Quante's house.
 - 28.05 Wire fence, brs. E. and W., 3 lks. east of intersection with wire fence, brs. N. 4° 33' W., and S. 4° 33' E.; leave cultivated land, bears E. and W., extends east, about 15.00 chs.
 - 28.35 The NE. corner of wire fence, on west side of road, brs. west about 125 lks. dist.
 - 39.98 Wire fence brs. E. and W., 25 lks. E. of intersection with North and south fence line; enter cultivated land, bears east and west; extends east about 15.00 chs. dist.
- No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at
- 40.41 $\frac{1}{2}$ (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor., of secs. 29 and 30, marked on brass cap,

s30 | s29

1916

- 44.75 Dig pits 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
- 44.75 The NE. corner of wire fence on west side of road, brs. west 135 lks. dist.
- 45.45 Geo. W. Scheerer's house brs. east 4.00 chs. dist.
- 60.03 Wire fence, brs. east and west, 75 lks. E. of intersection with north and south fence line.
- 65.00 Leave cultivated land, brs. east 10.00 chs. and west 80 lks. dist.
- 79.70 Wire fence, brs. east and west, 1.00 chain east of NW. fence cor.
- 80.15 Road brs. east and west.
- 80.65 Wire fence, brs. E. and W., 90 lks. E. of SW. cor. of fence. No trace of original sec. cor. can be found after diligent search; therefore, at
- 80.83 (Proportional dist.) Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 19, 20, 29 and 30, marked on brass cap,

| | |
|------|------|
| T19S | R26E |
| S19 | S20 |
| S30 | S29 |

1916

Dig pits, 18x18x12 ins., in each sec. $5\frac{1}{2}$ ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, rolling, slopes to the southeast.
Soil, dry, sandy loam, 8 to 14 ins. deep, 1st rate.
No timber.
Undergrowth, scrub

40. Dependent resurvey of the Subdivision of T.19 S., R.26 E.

Chains.

Soil, dry, sandy loam, 8 to 14 ins. deep, 1st rate.
 No timber.
 Undergrowth, scrub mesquite.
 Good grass.

From the reestablished cor. of secs. 20, 21, 28 and 29,
 hereinbefore described,
 N. $89^{\circ} 41'$ W., on a true line, between secs. 20 and 29.
 Over rolling land, through scattering timber and under-
 growth.

- 20.75 Wire fence brs. north and south, 20 lks. north of SW. fence
 corner.
 21.60 Wire fence brs. N. and S., 20 lks. north of SE. fence
 corner.
 27.15 Wash, 10 lks. wide, 3 ft. deep, course S. 10° W.
 No trace of original $\frac{1}{4}$ sec. cor. can be found after dil-
 igent search; therefore, at
 40.07 (Proportional dist.) Set an iron post, 3 ft. long, 1
 in. in diam., 26 ins. in the ground, for reestab-
 lished $\frac{1}{4}$ sec. cor. of secs. 20 and 29, marked on brass
 cap,

S 20

S 29

1916

Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.,
 and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
 N. of cor.

- 61.46 Wire fence brs. N. and S., 20 lks. N. of intersection with
 E. and W. fence line; leave scattering timber, brs. N.
 and S.
 61.60 Road brs. N. and S.
 61.75 Wire fence brs. N. and S., 20 lks. N. of intersection with
 E. and W. fence line.
 75.76 Howard W. Nichol's house brs. north about 4.00 chs. dist.
 80.14 (Proportional dist.) Intersect the reestablished cor. of
 secs. 19, 20, 29 and 30, hereinbefore described.
 Land, rolling valley, slopes to the southwest.
 Soil, dry, sandy clay loam, about 12 ins. deep, 1st rate.
 Timber, scattering mesquite.
 Good grass.

From the reestablished cor. of secs. 19, 24, 25 and 30,
 on west bdy. of Tp., hereinbefore described,
 S. $89^{\circ} 47'$ E., on a true line, bet. secs. 19 and 30.
 Over rolling land, slopes gently to the east.

- 38.75 Road from the Sulphur Spring Valley to Kelton, Arizona,
 brs. N. 30° E. and S. 30° W.
 38.85 Telephone line from Rucker Canyon to Gleeson, Arizona,
 brs. N. $69^{\circ} 25'$ E. and S. $69^{\circ} 25'$ W.
 50.52 Wash, 10 lks. wide, 2 ft. deep, course S. 40° E.
 No trace of original $\frac{1}{4}$ sec. cor. can be found after dili-
 gent search; therefore, at
 52.22 (Proportional dist.) Set an iron post, 3 ft. long, 1
 in. in diam., 26 ins. in the ground, for reestablished
 $\frac{1}{4}$ sec. cor., of secs. 19 and 30, marked on brass cap,

Dependent resurvey of the Subdivision of T.19 S. R.26 E. 41.

Chains.

1/2 S 19
S 30
1916

Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high. N. of cor.

- 91.22 Road brs. N. and S.
- 91.67 Wire fence brs. N. 4° 33' W. and S. 4° 33' E., 18 lks. N. of the SW. cor.
- 92.37 (Proportional dist.) Intersect the reestablished cor. of secs. 19, 20, 29 and 30, hereinbefore described. Land, rolling, slopes to the east. Soil, dry, gravelly clay loam, about 12 ins. deep, 1st rate. No timber. Undergrowth, scattering scrub mesquite. Good grass.

N. 4° 36' W., on a true line, bet. secs. 19 and 20. Over level land, slopes to the SE., thru scattering timber and undergrowth.

- 19.15 Telephone line, from Rucker Canyon to Gleeson, Arizona, brs. N. 69° 25' E., and S. 69° 25' W.
 - 33.10 Wash, 30 lks. wide, 3 ft. deep, course S. 60° E.
 - 39.09 Wire fence brs. E. and W. 60 lks. E. of NW. cor. of fence.
 - 39.32 Wire fence, brs. E. and W.; leave undergrowth, brs. E. and W.
- No trace of original 1/4 sec. cor. can be found after diligent search; therefore, at
- 40.41 1/2 (Proportional dist.), Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor., of secs. 19 and 20, marked on brass cap,

1/2 S 19 | S 20
1916

Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

- 43.20 Elisha Barnes's house, brs. W. 4.00 chs. dist.
 - 58.47 A point 180 lks. E, of end of wire fence, on W. side of lane.
 - 77.93 Wire fence, brs. E. and W., 160 lks. E. of intersection with N. and S. fence line on E. side of lane.
 - 78.07 Road brs. E. and W.
- No trace of original 1/4 sec. cor. can be found after diligent search; therefore, at
- 80.83 (Proportional dist.), Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 17, 18, 19 and 20, marked on brass cap,

T19S | R26E
S18 | S17
S19 | S20
1916

Dig pits, 18x18x12 ins., in each sec. 5 1/2 ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, level valley, slopes to the SE. Soil, dry, sandy clay loam, about 12 ins. deep,

42 Dependent resurvey of the Subdivision of T.19 S..R.26 E.

Chains.

Timber, scattering mesquite.
Undergrowth, scattering scrub mesquite and greasewood.
Good grass.

-
- From the reestablished cor. of secs. 16, 17, 20 and 21, hereinbefore described,
S. $89^{\circ}58'W.$, on a true line, bet. secs. 17 and 20.
Over rolling land, thru. scattering undergrowth.
- 3.50 Robert G. McBride's house, brs. N. about 3.00 chs. dist.
19.33 Enter cultivated land, brs. N. about 18.00 chs. and S. 4.00 chs. dist.
21.60 Wire fence, brs. N. and S., about 4.00 chs. N. of intersection with E. and W. fence line; leave cultivated land, brs. N. 18.00 chs. and S. 4.00 chs. dist.; enter greasewood brush undergrowth.
23.40 Leave undergrowth, brs. N. and S.; enter cultivated land, brs. N. 18.00 chs. and S. 4.00 chs. dist.
24.00 Leave cultivated land, brs. N. 18.00 chs. and S. 4.00 chs. dist.
26.00 Lorena P. Lewis's house brs. N. about 10.00 chs. dist.
30.78 Wire fence, brs. N. and S., 4.00 chs. N. of intersection with E. and W. fence line.
37.00 Ellen Grizzle's house brs. S. about 23.00 chs. dist.
38.60 Road, brs. N. and S.
38.80 Wire fence, brs. N. and S., 4.00 chs. N. of intersection with E. and W. fence line.
40.00 A point 5.00 chs. N. of NE. cor. of cultivated field, extends S. 20.00 chs. dist.
No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at
40.09 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor., of secs. 17 and 20, marked on brass cap,

$\frac{1}{4}$ S 17
S 20
1916

- Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
- 44.80 Road to Leon Short's house, brs. NW. and SE.
46.00 A point 4.00 chs. N. of the NW. cor. of cultivated field, extends S. 15 chs. dist.
54.53 Leon Short's house, brs. N. 3.50 chs. dist.
67.38 Road brs. N. $60^{\circ}E.$ and S. $60^{\circ}W.$
80.18 Intersect the reestablished cor. of secs. 17, 18, 19 and 20, hereinbefore described.
Land, rolling valley, slopes to the east.
Soil, rich fine, dry, sandy loam, about 15 ins. deep, 1st rate.
No timber.
Undergrowth, scattering scrub mesquite and greasewood.
Good grass.

-
- From the reestablished cor. of secs. 13, 18, 19 and 24, on W. bdy. of Tp.; hereinbefore described,
S. $89^{\circ}54'E.$, on a true line, bet. secs. 18 and 19.
Over level land, slopes to the east.
- 38.45 Road to Kelton, Arizona, brs. N. $20^{\circ}E.$ and S. $20^{\circ}W.$
48.74 A point 325 lks. N. of NW. cor. of wire fence.
No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at
48.86 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 18 and 19, marked on brass cap,

Dependent resurvey of the Subdivision of T.19 S., R.26 E. 43

Chains

S 18
S 19
1916

Dig pits 18x18x12 ins. E. and W. of cor., 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

- 66.00 Wash, 10 lks. wide, 2 ft. deep, course S. 10° E.
- 87.42 Road brs. N. and S.
- 87.70 Wire fence, brs. N. and S. 2.07 chs. N. of intersection with wire fence, brs. E. and W.
- 88.95 (Proportional dist.) Intersect the reestablished cor. of secs. 17, 18, 19 and 20, hereinbefore described.
Land, level, sandy valley, slopes to the W.
Soil, dry, sandy clay loam, about 12 ins. deep, 2nd rate.
No timber.
Undergrowth, scattering scrub mesquite and greasewood.
Good grass.

N. 3° 41' W. on a true line, bet. secs. 17 and 18.
Over level land, thru scattering undergrowth.
No trace of original 1/4 sec. cor. can be found after diligent search; therefore, at
40.41 1/2 (Proportional dist.); Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of secs. 17 and 18, marked on brass cap,

S 18 | S 17
1916

Dig pits, 18x18x12 ins. N. and S. of post, 3 ft. dist., and raise a mound of earth, 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

- 79.82 The NW. cor. of wire fence, brs. W., 115 lks. dist.
No trace of original sec. cor. can be found after diligent search; therefore, at
- 80.83 (Proportional dist.) Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for reestablished cor. of secs. 7, 8, 17 and 18, marked on brass cap,

T19S | R26E
S 7 | S 8
S 18 | S 17
1916

Dig pits 18x18x12 ins., in each sec. 5 1/2 ft. dist., and raise a mound of earth 4 ft. base, 2 ft. high, W. of cor.
Land, level, slopes to the east.

Soil, dry, sandy and gravelly clay loam, 8 ins. deep, 1st rate.
No timber.
Undergrowth, scattering scrub mesquite and greasewood.
Good grass.

From the reestablished cor. of secs. 8, 9, 16 and 17, hereinbefore described,

S. 89° 47' W., on a true line, bet. secs. 8 and 17.
Over nearly level land, slopes to the east.

- 20.45 A point 53 lks. N. of end of wire fence, brs. S.
No trace of original 1/4 sec. cor. can be found after diligent search; therefore, at
- 40.42 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of secs. 8 and 17, marked on brass cap,

44 Dependent resurvey of the Subdivision of T.19 S. R.26 E.

Chains.

S 8

S 17
1916

- Dig pits, 18x18x12 ins. E. and W. of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
- 40.80 Road brs. N. 50° E. and S. 50° W.
41.40 Road, brs. N. and S.
41.85 A point 100 lks. N. of end of wire fence brs. S.
78.60 Wash, 20 lks. wide, 4 ft. deep, course S. 60° E.
80.84 (Proportional dist.) Intersect the reestablished cor. of secs. 7, 8, 17 and 18; hereinbefore described.
Land, level valley, slopes to the east.
Soil, dry, sandy and clay loam, about 10 ins. deep, 1st rate.
No timber.
Undergrowth, scattering scrub mesquite.
Good grass.

- From the reestablished cor. of secs. 7, 12, 13 and 18, on W. bdy. of Tp., hereinbefore described,
N. $89^{\circ} 33'$ E., on a true line, bet. secs. 7 and 18.
Over rolling land, slopes to the east.
- 3.60 Road, brs. N. and S.
4.10 Right of way fence along A.E. Ry. track, brs. N. $5^{\circ} 10'$ W. and S. $5^{\circ} 10'$ E.
5.60 Center of the A.E. Ry. track, brs. N. $5^{\circ} 10'$ W. and S. $5^{\circ} 10'$ E.
6.40 Telegraph line brs. N. $5^{\circ} 10'$ W. and S. $5^{\circ} 10'$ E.
7.25 Right of way fence E. side of Ry. track, brs. N. $5^{\circ} 10'$ W. and S. $5^{\circ} 10'$ E.
No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at
46.39 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 7 and 18, marked on brass cap,

S 7

S 18
1916

- Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
- 52.60 Road, brs. N. 40° E. and S. 40° W.
53.20 Road brs. N. and S.
77.42 Road brs. N. 60° E. and S. 60° W.
78.90 Wash, 10 lks. wide, 3 ft. deep, course N. 70° E.
86.86 (Proportional dist.) Intersect the reestablished cor. of secs. 7, 8, 17 and 18, hereinbefore described.
Land, rolling valley, slopes to the east.
Soil, sandy clay loam about 10 ins. deep, 1st rate.
No timber or undergrowth.
Good grass.

- N. $5^{\circ} 11'$ W., on a true line, bet. secs. 7 and 8.
Over rolling land, slopes to the east.
- .90 Wash, 10 lks. wide, 2 ft. deep, course E.
1.70 Road to Kelton, Arizona, brs. E. and W.
20.60 Wash, 15 lks. wide, 3 ft. deep, course E.
29.00 Wash, 2.00 chs. wide, 3 ft. deep, course S. 70° E.
38.00 Wash, 25 lks. wide, 3 ft. deep, course S. 60° E.
No trace of original $\frac{1}{4}$ sec. cor. can be found after diligent search; therefore, at
40.41 $\frac{1}{2}$ (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. of secs. 7 and 8, marked on brass cap,

Dependent resurvey of the Subdivision of T.19 S., R.26 E. 45

Chains

S7 | S8

1916

Dig pits 18x18x12 ins., N. and S. of post, 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.

52.75 Road, brs. NW. and SE.

70.50 Road brs. N. 20° E. and S. 20° W.

No trace of original sec. cor. can be found after diligent search; therefore, at

80.83 (Proportional dist.) Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for reestablished cor. of secs. 5, 6, 7 and 8, marked on brass cap,

T19S | R26E

S 6 | S 5

S 7 | S 8

1916

Dig pits 18x18x12 ins., in each sec. 5/8 ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Land, rolling valley, slopes to the east.

Soil, dry, sandy clay loam, 8 ins. deep, 1st rate.

No timber.

Undergrowth, scattering scrub mesquite.

Good grass.

From the reestablished cor. of secs. 4, 5, 8 and 9, hereinbefore described,

N. 89° 59' W., on a true line, bet. secs. 5 and 8.

Over rolling land, slopes to the E., thru scattering undergrowth.

.40 Road brs. N. 40° E. and S. 40° W.

18.50 Wash, 40 lks. wide, 3 ft. deep, course S. 40° E.

37.70 A point about 50 lks. S. of end of wire fence, brs. N. and S.

No trace of original 1/4 sec. cor. can be found after diligent search; therefore, at

40.00 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor., of secs. 5 and 8, marked on brass cap,

S 5

S 8

1916

Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.

65.70 Road brs. N. 40° W. and S. 40° E.

78.00 A point about 1.00 ch. S. of the SW. cor. of wire fence.

80.00 (Prportional dist.) Intersect the reestablished cor. of secs. 5, 6, 7 and 8, hereinbefore described.

Land, rolling valley, slopes to the east.

Soil, dry, sandy clay loam, 8 ins. deep, 1st rate.

No timber or undergrowth,

Good grass.

From the reestablished cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp., hereinbefore described,

N. 89° 26' E., on a true line, bet. secs. 6 and 7.

Over level land, slopes to the east, thru scattering undergrowth.

.40 Right of way fence on west side of the AE. Ry. brs. N. 5° W.

46. Dependent resurvey of Subdivision of T.19 S., R.26 E.

Chains.

- and S.5°E.
 - 2.00 Center of the EA.Ry.track, brs.N.5°W. and S.5°E.
 - 2.60 Telegraph line, brs.N.5°W. and S.5°E.
 - 3.60 Wire fence on E.side of Ry.track, brs.N.5°W. and S.5°E.
 - 5.10 Road brs.N.40°E. and S.40°W.
 - 21.50 Road brs.N.50°E. and S.50°W.
- No trace of original $\frac{1}{2}$ sec.cor. can be found after diligent search; therefore, at
- 42.71 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{2}$ sec.cor. of secs.6 and 7, marked on brass cap,

$\frac{1}{2}$ S 6
 S 7
 1916

- Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N.of cor.
 - 82.81 (Proportional dist.) Intersect the reestablished cor.of secs.5,6, 7 and 8, hereinbefore described.
- Land,level valley, slopes to the east.
 Soil,dry,sandy clay loam, 8 ins. deep, 2nd rate.
 No timber or undergrowth.
 Good grass.

From the reestablished cor.of secs. 5 and 6 on N. bdy.of Tp. a granite stone 10x10x6 ins., above ground,firmly set,marked with 5 notches on E. and 1 notch on W.face, and witnessed by pits SE.and SW., and mound of earth S.of cor. No bearing trees. (Reestablished in 1911), S.4° 28'E., on a true line, bet. secs. 5 and 6.
 Over nearly level land, along road.

- .40 Road brs.N.40°E. and S.40°W.
- 16.15 Road brs.NW. and SE.
- 29.35 Wash, 15 lks.wide, $\frac{3}{4}$ ft. deep, course S.60°E.
- 38.50 Wash, 20 lks.wide, $\frac{3}{4}$ ft. deep, course E.
- 43.50 No trace of original $\frac{1}{2}$ sec.cor. can be found after diligent search; therefore, at
- 46.50 (Proportional dist.) Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{2}$ sec.cor. of secs.5 and 6, marked on brass cap,

$\frac{1}{2}$ S6 | S5
 1916

- Dig pits 18x18x12 ins., N.and S. of post, 3 ft. dist., and raise a mound of earth $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W.of cor.
 - 47.40 Road, brs.E and W.
 - 63.40 Road bra.N.50°E. and S.50°W.
 - 80.60 Wash, 15 lks.wide, course E.
 - 86.80 Road, brs.E. and W.
 - 86.92 (Proportional dist.) Intersect the reestablished cor. of secs. 5,6, 7 and 8, hereinbefore described.
- Land, nearly level valley, slopes to the E. and SE.
 Soil,dry,sandy and gravelly clay loam, about 14 ins. deep, 1st rate.
 No timber, or undergrowth.
 Good grass.

GENERAL DESCRIPTION.

This township is nearly all level valley, and the soil ranges from 1st to 3rd rate. There is no timber in the township, and no water, except that which has been developed by the settlers.

The western part of the township has nearly all been taken up by settlers, who are bona fide residents on the land at the present time.

In the eastern part, where the soil is of poorer quality, and the depth of the water bearing sand strata is greater, very little of the land is settled upon; this part, however, is covered with a good growth of bunch grass, and suitable for grazing purposes.

No evidence of valuable mineral deposits.

DATE DIAGRAM.

Book "D"

Group 64 - - Arizona.

Township 19 South, Range 26 East.

| | | | | | | |
|---------|-------------------------|------------------------|------------------------|------------------------|------------------------|---------------------------------|
| | 6 5-10-16 5-10-16 | 5 5-9-16 5-8-16 | 4 5-8-16 5-6-16 | 3 5-6-16 5-6-16 | 2 5-6-16 5-6-16 | Y 5-6-16 3-13-16 RETR. |
| 5-10-16 | 7 5-10-16 5-9-16 | 8 5-9-16 5-8-16 | 9 5-8-16 5-6-16 | 10 5-6-16 5-6-16 | 11 5-4-16 5-3-16 | 12 5-3-16 3-13-16 |
| 5-10-16 | 18 5-10-16 5-9-16 | 17 5-9-16 5-8-16 | 16 5-8-16 5-5-16 | 15 5-5-16 5-4-16 | 14 5-4-16 5-3-16 | 13 5-3-16 3-13-16 |
| 5-10-16 | 19 5-10-16 5-9-16 | 20 5-9-16 5-8-16 | 21 5-8-16 5-5-16 | 22 5-5-16 5-4-16 | 23 5-4-16 5-3-16 | 24 5-3-16 3-13-16 |
| 5-10-16 | 30 5-9-16 5-9-16 | 29 5-8-16 5-8-16 | 28 5-5-16 5-5-16 | 27 5-5-16 5-4-16 | 26 5-4-16 5-3-16 | 25 5-3-16 3-13-16 |
| 5-10-16 | 31 5-8-16 5-8-16 | 32 5-5-16 5-8-16 | 33 5-5-16 5-5-16 | 34 5-4-16 5-4-16 | 35 5-3-16 5-3-16 | 36 4-3-16 4-3-16 |

Resurveys executed on dates shown above, by Sidney E. Blout, U.S. Surveyor.

STATE OF ARIZONA }
 County of Cochise } SS.

I G.W. Scheerer, of lawful age, depose and
 and state that I have resided in Sec. 29, T. 19 S., R. 26E
 E., G & S.R.B. Arizona since 1908 and do solemnly affirm
 that I have frequently seen the cor. of secs. 29, 30, 31, and
 32 which was a juniper post marked with Roman numerals and
 letters and believed by me to be the original Government
 corner and that the iron pipe pointed out by me to
 United States Surveyor, Sidney E Blout, was driven by me
 along side of the stump of the original post which was
 broken off at the surface of the ground by traffic on the
 road.

G.W. Scheerer
 Affiant's Signature

Subscribed and sworn to before me this 9th day of
 May A.D. 1916.

Sidney E Blout
 U.S. Surveyor

STATE OF ARIZONA }
County of Cochise } SS.

I, Fred A. Stevens of lawful age
depose and state; that I have resided in sec. 33 T. 19 S.,
R. 26 E. of the G & S.R.B. & M., Arizona since 1908 and do
solemnly affirm that on several occasions I ~~XXXX~~ saw the
1/4 sec. cor bet. secs. 4 and 33. on the S. E. of T 19 S.,
R 26 E., which consisted of a mesquite or desert willow stake
marked 1/4 and know from personal observation that the present
1/4 sec. cor which is a granite stone, was set in the year
1908 by ~~Surveyor and A Rockfellow~~ ^{R. M. IVES, App. No. 247} in the same position
as was formally occupied by the original corner

Fred A. Stevens
Affiant's Signature.

Subscribed and sworn to before me this 10, day of May
A.D. 1916.

Sidney C. Blunt
U.S. Surveyor.

CERTIFICATE OF UNITED STATES SURVEYOR.

BOOK 3302

I, Sidney E. Blout, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 64, Arizona, bearing date of the 8th day of November, 1915, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, RESURVEYED all those parts or portions of the East, South and West boundaries, and Subdivision lines, and RETRACED all those parts or portions of the East boundary all of TOWNSHIP 19 SOUTH, RANGE 26 EAST,

of the Gila and Salt River Base & Meridian, in the State of Arizona, which are represented in and by diagram on page 48 hereof the foregoing field notes, as having been executed by me, and under my direction; and that all the corners of said survey and retracement have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 64, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such resurvey and retracement.

Sidney E. Blout
U. S. Surveyor.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix, Arizona, JUN 10, 1919

The foregoing field notes of the re-survey of the South boundary, and Subdivision lines, and parts of the East and West boundaries, and of the RETRACEMENT of part of the East boundary all of TOWNSHIP 19 SOUTH, RANGE 26 EAST

of the Gila and Salt River Base and Meridian, in the State of Arizona,

executed by Sidney E. Blout, U. S. Surveyor, under his special instructions dated November 8, 1915, for Group 64, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the re-surveys and retracements they describe, are hereby approved.

Frank A. Smith
U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above described surveys in has been correctly copied from the original notes on file in this office.