

Book "B"

4-679

BOOK 3314  
FIELD NOTES

OF THE SURVEY OF

Part of the

NORTH BOUNDARY, and

Part of the

SUBDIVISION OF

TOWNSHIP 3 NORTH, RANGE 6 EAST,

Of the Gila and Salt River Base and Meridian,

In the State of Arizona.

EXECUTED BY

Sidney E. Blout,

In the capacity of U. S. Cad. Eng' r, under Special Instructions dated February 26, 1919,  
issued by the United States Surveyor General to govern surveys included in Group  
No. 91, which were approved by the Commissioner of the General Land  
Office, March 18,, 1919, and Assignment Instructions dated March 21,, 1919.

Survey commenced April 19,, 1919.

Survey completed May 9,, 1919.

3314

3314

~~INDEX DIAGRAM.~~

Township \_\_\_\_\_, Range \_\_\_\_\_

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

BOOK 3314


3314

Book "B"

1A

INDEX DIAGRAM

T. 3 N., R. 6 E.

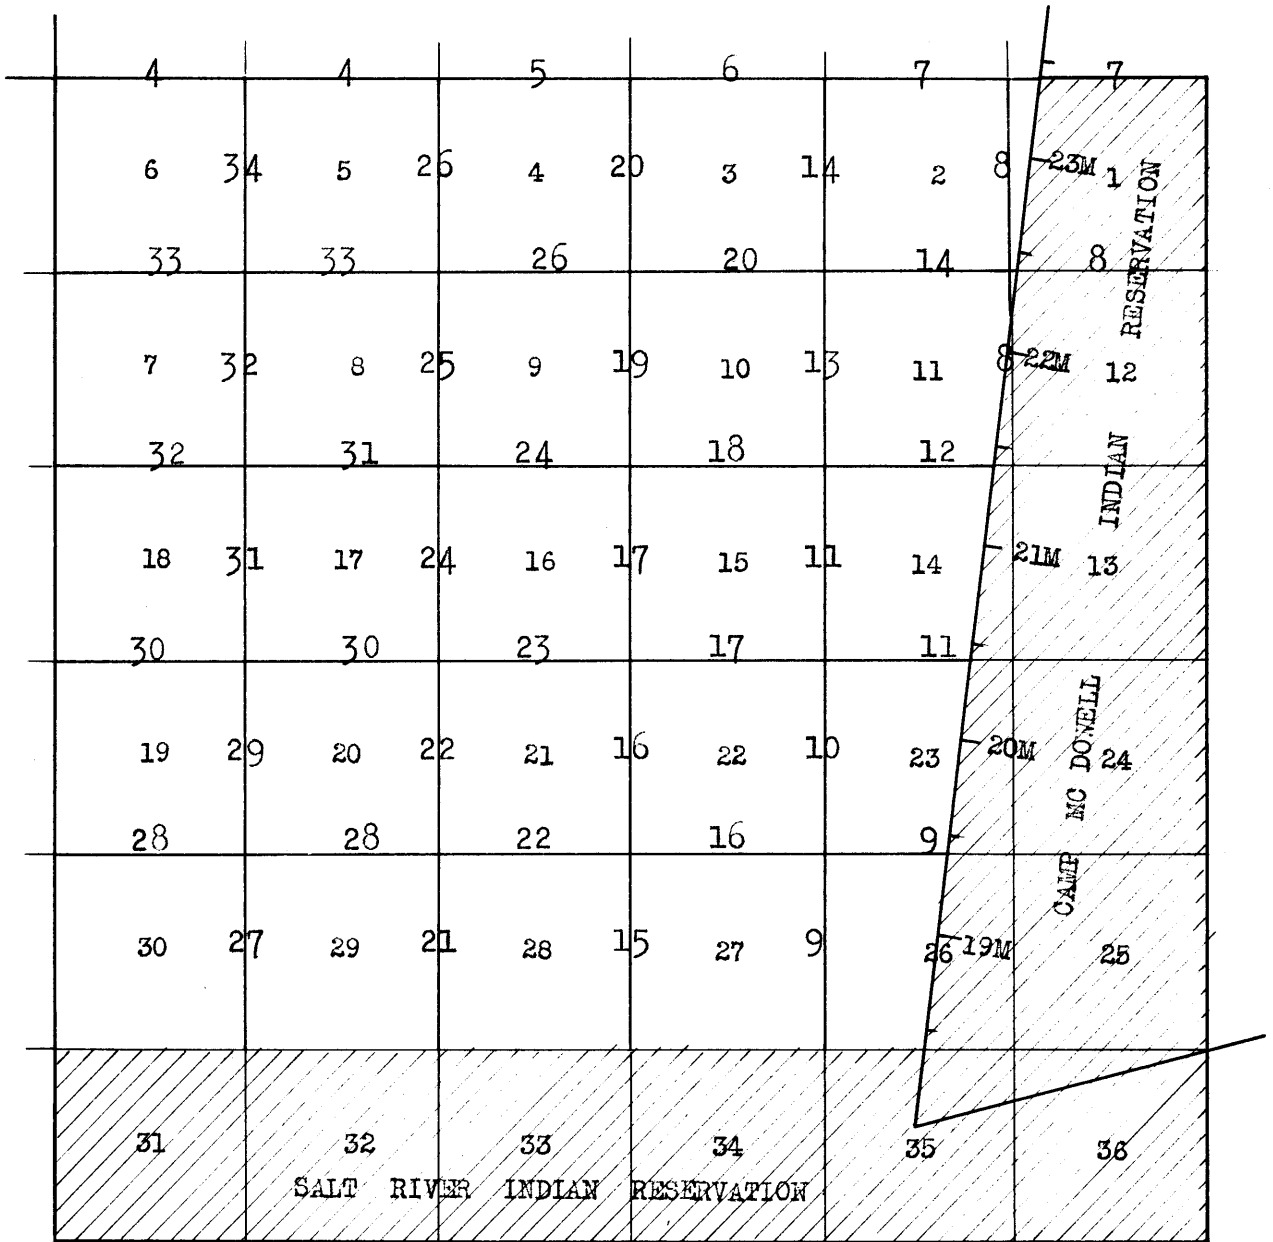

- Lines surveyed under this Group
- Surveyed lines
- //// Areas surveyed as per accepted plats on file

BOOK 3314

Book "B"

DATE DIAGRAM

T. 3 N., R. 6 E.

BOOK 3314

4-26-19	4-26-19	4-26-19	4-25-19	4-25-19	4-25-19
6 5-3-19	5 5-3-19	4 5-2-19	3 4-24-19	2 4-22-19	1 4-22-19
7 5-3-19	8 5-1-19	9 4-29-19	10 4-24-19	11 4-22-19	12
18 5-1-19	17 4-29-19	16 4-29-19	15 4-21-19	14 4-19-19	13
19- 4-28-19	20 4-28-19	21 4-23-19	22 4-21-19	23 4-19-19	24
30 4-28-19	29 4-23-19	28 4-21-19	27 4-19-19	26	25
31	32	33	34	35	36

————— Surveyed on dates shown above by  
 Sidney E. Blout, U. S. Cadastral Engineer

Chains.

Survey commenced April 18, 1919, and executed on dates shown on the diagram on page 2 hereof, by Sidney E. Blout, U.S. Cadastral Engineer, using a Buff light mountain solar transit No. 9984; the horizontal limb being provided with two double verniers placed opposite to each other, reading to single minutes of arc, which is also the least count of the verniers of the latitude and declination arcs. For certificate of approval, see Book "A."

All measurements are made with a Lufkin 5-chain steel tape compared with a Chesterman Standard steel tape, and found correct. All measurements are made on the slope, the vertical angle determined, and the slope measurements properly reduced to true horizontal distances.

Before beginning the subdivision of this township, I examine the adjustments of the transit, and correct the level and collimation errors; then, to test the solar apparatus by comparing its indications, resulting from observations on the sun, made during a.m. and p.m. hours, with a meridian established by observations on Polaris, I proceed as follows:

At camp near Old Fort McDowell in sec. 6, T. 3 N., R. 7 E.; latitude, 33°38' N., longitude, 111°40' W.; at 5h.52.3m. a.m. by my watch, which is correct local mean time, I observe Polaris at eastern elongation, and mark the direction thus determined by a nail in a stake set in the ground 5 chains north of instrument.

At 7 a.m., I lay off the azimuth of Polaris 1°21' to the west, and mark the meridian thus determined by a nail in a stake driven in the ground 5 chs. north of instrument.

At 7h.15m. a.m., April 18, 1919, I set off 33°38' N. on the latitude arc; 10°36' 48.7" N. on the decl. arc; and determine a meridian with the solar, and mark a point thereof by a tally pin in stake already set 5 chs. N. of instrument. This point falls 0.4 ins. E. of the meridian established by the Polaris observation.

At 5h.00m. p.m., I set off 33°38' N. on the lat. arc; 10°45' 37" N. on the decl. arc; and determine a meridian with the solar, and mark a point thereof by a nail driven in the stake already set 5 chs. N. of instrument. This point falls 0.5 ins. W. of the meridian established by the Polaris observation.

The solar apparatus by a.m. and p.m. observations, defines positions for meridians, respectively about 0'21" E., and 0'31" W. of the meridian established by the Polaris observations; therefore, I conclude that the adjustments of the instrument are satisfactory.

Completion of  
North boundary of Township 3 North, Range 6 East.

Chains.

closing

From the cor. of Ts. 3 and 4 N., R. 6 E., on the W. bdy. of the Fort McDowell Indian Reservation, an iron post 3 ins. in diam., 14 ins. above ground, firmly set in a mound of stone and earth, marked and witnessed as described by the surveyor general, which is west 70.04 chs. of the Tp. cor., complete the survey of the Tp. bdy. as follows:

West, on a random line, setting  $\frac{1}{4}$  sec. and sec. cors at intervals of 40.00 chs., continuing from E. bdy. of Tp.; and at 479.40 chs. fall 143 lks. N. of the cor. of Ts. 3 and 4 N., Rs. 5 and 6 E., which is an iron post, 3 ins. in diam., 12 ins. above ground, firmly set, marked and witnessed as described by the surveyor general.

The falling answers to a correction of  $0^{\circ}12'$  or 28 lks. S. per mile, counting from the closing cor. on the W. bdy. of the Indian Reservation.

Thence,

N.  $89^{\circ}48'$  E. bet. secs. 6 and 31, marking the true line.

Descend over SE. slope, 221 ft., over mountainous land, thru dense timber and brush.

16.90 Ravine, 10 lks. wide, course NE.; ascend over NW. slope, 44 ft.

19.60 Spur, brs. NE. and SW. Descend over SE. slope, 87 ft.

25.65 Ravine, 8 lks. wide, course NE. Ascend over NW. slope of spur, 56 ft. to

35.56 Spur, brs. NE. and SW. Descend over SE. slope, 46 ft.

39.00 Wash, 15 lks. wide, course NE. Ascend over NW. slope, 16 ft.

39.40 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap,

$$\begin{array}{r} \frac{1}{4} \text{ S } 31 \\ \text{S } 6 \\ 1919 \end{array}$$

from which,

A mesquite, 6 ins. in diam., brs. N.  $1\frac{1}{4}^{\circ}$  E., 39 lks. dist., marked  $\frac{1}{4}$  S 31 B T.

A mesquite 6 ins. in diam., brs. S.  $12\frac{1}{2}^{\circ}$  E., 65 lks. dist., marked  $\frac{1}{4}$  S 6 B T.

44.40 Spur, brs. N. and S.; descend over E. slope, 56 ft.

47.25 Ravine, 10 lks. wide, course NE.; ascend over NW. slope, 56 ft.

56.00 Spur, brs. NE. and SW.; descend over SE. slope, 54 ft.

79.40 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 5, 6, 31 and 32, marked on brass cap,

$$\begin{array}{r|l} \text{T4N} & \text{R6E} \\ \text{S31} & \text{S32} \\ \text{S } 6 & \text{S } 5 \\ \text{T3N} & \\ 1919 & \end{array}$$

No trees suitable for bearing trees within limits; raise a mound of stone 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

Land, mountainous.

Soil, stony, 3rd and 4th rate.

Timber, palo verde, mesquite and ironwood.

Undergrowth, greasewood, catclaw brush and cacti.

N.  $89^{\circ}48'$  E., bet. secs. 5 and 32.

Descend SE. slope 15 ft., thru scattering timber and brush.

2.70 Ravine, 10 lks. wide, course NE. Ascend over NW. slope, 115 ft.

20.18 Ridge, brs. SE.; descend over NE. slope, 213 ft.

32.06 Ravine, 20 lks. wide, course SE.; ascend over SW. slope, 68 ft.

Completion of  
North boundary of Township 3 North, Range 6 East.

Chains.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap,

$\frac{1}{4}$  S 32  
S 5  
1919

from which,

A palo verde, 5 ins. in diam., brs. N.  $48\frac{1}{2}^\circ$  E., 71 lks. dist., marked  $\frac{1}{4}$  S 32 BT.

An ironwood, 4 ins. in diam., brs. S.  $14\frac{1}{2}^\circ$  W., 65 lks. dist., marked  $\frac{1}{4}$  S 5 BT.

55.00 Ridge, brs. N.  $40^\circ$  W. and S.  $50^\circ$  E. Descend over NE. slope, 66 ft.

79.80 Ravine, 20 lks. wide, course S.  $60^\circ$  E

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 4, 5, 32 and 33, marked on brass cap,

T4N | R6E  
S32 | S33  
S 5 | S 4  
T3N  
1919

from which,

A palo verde, 7 ins. in diam., brs. N.  $52\frac{1}{2}^\circ$  E., 107 lks. dist., marked T4N R6E S33 BT.

A palo verde, 10 ins. in diam., brs. S.  $67\frac{1}{2}^\circ$  E., 120 lks. dist., marked T3N R6E S4 BT.

A palo verde, 4 ins. in diam., brs. S.  $38\frac{1}{2}^\circ$  W., 139 lks. dist., marked T3N R6E S5 BT., and

A mesquite, 12 ins. in diam., brs. N.  $62\frac{1}{2}^\circ$  W., 107 lks. dist., marked T4N, R6E S32 BT.

Land, hilly.

Soil, stony, 3rd and 4th rate.

Timber, palo verde, mesquite, catclaw and ironwood.

Undergrowth, greasewood brush, 5 ft. high.

N.  $89^\circ 48'$  E., bet. secs. 4 and 33.

Over hilly land, thru scattering timber and greasewood brush.

14.60 Road to the Red Mountain Mine, brs. NW. and SE.

15.50 Ascend SW. slope of stony ridge, 80 ft.

27.60 Ridge, brs. NW. and SE.; descend over NE. slope, 156 ft.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap,

$\frac{1}{4}$  S 33  
S 4  
1919

from which,

A palo verde, 12 ins. in diam., brs. N.  $1\frac{1}{4}^\circ$  E., 68 lks. dist., marked  $\frac{1}{4}$  S 33 BT.

A palo verde, 6 ins. in diam., brs. S.  $26\frac{1}{4}^\circ$  E., 84 lks. dist., marked  $\frac{1}{2}$  S 4 BT.

51.72 Ravine, 10 lks. wide, course SE.; ascend over SW. slope, 90 ft.

60.00 Ridge, brs. NE. and SW.; descend over SE. slope, 143 ft.

75.36 Ravine, 15 lks. wide, course SE.; ascend over SW. slope, 73 ft.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 3, 4, 33 and 34, marked on brass cap,

Completion of

6. North boundary of Township 3 North, Range 6 East.

Chains.

T4N	R6E
S33	S34
S 4	S 3
T3N	
1919	

from which,

- A palo verde, 6 ins. in diam., brs. N.48°E., 132 lks. dist., marked T4N R6E S34 BT.
- A palo verde, 6 ins. in diam., brs. S.78°E., 120 lks. dist., marked T3N R6E S3 BT.
- A palo verde 4 ins. in diam., brs. S.11 $\frac{3}{4}$ °W., 16 lks. dist., marked T3N R6E S4 BT.
- A palo verde, 8 ins. in diam., brs. N.13 $\frac{1}{2}$ °W., 182 lks. dist., marked T4N R6E S33 BT.

Land, hilly.

Soil, stony, 3rd and 4th rate.

Timber, palo verde, mesquite and ironwood.

Undergrowth, greasewood brush, 5 ft. high.

N.89°48'E., bet. secs. 3 and 34.

Ascend SW. slope of ridge, 83 ft., thru. scattering timber and greasewood brush.

- 3.25 Stony ridge, brs. N. 70°W. and S.70°E.; descend over NE. slope, 80 ft. to
- 8.67 Ravine, 10 lks. wide, course SE.; ascend over SW. slope, 78 ft.
- 20.00 Summit of stony ridge, brs. NW. and SE.; descend over NE. slope, 118 ft. to
- 33.47 Ravine, 12 lks. wide, course SE.; ascend over SW. slope, 59 ft. to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap,

$\frac{1}{4}$	S 34
S 3	
1919	

from which,

- A palo verde, 4 ins. in diam., brs. N.42°W., 102 lks. dist., marked  $\frac{1}{4}$  S 34 BT.
- An ironwood, 5 ins. in diam., brs. S.8°W., 82 lks. dist., marked  $\frac{1}{4}$  S 3 BT.
- 43.47 Ridge, brs. NW. and SE.; descend over NE. slope, 88 ft.
- 58.30 Ravine, 10 lks. wide, course SE.; asc. over SW. slope, 9 ft.
- 60.04 Ridge, brs. N. and S.; descend over E. slope, 61 ft.
- 67.61 Ravine, 15 lks. wide, course SE; ascend over SW. slope, 47 ft.
- 76.06 Ridge, brs. NW, and SE.; descend over NE slope, 85 ft.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 2, 3, 34 and 35, marked on brass cap,

T4N	R6E
S34	S35
S 3	S 2
T3N	
1919	

from which,

- A palo verde, 4 ins. in diam., brs. N.75 $\frac{1}{2}$ °E., 75 lks. dist., marked T4N R6E, S 35 BT.
- A palo verde, 6 ins. in diam., brs. S.52°E., 47 lks. dist., marked T3N R6E S2 BT.
- A palo verde 6 ins. in diam., brs. S.13 $\frac{1}{2}$ °W., 11 lks. dist., marked T3N R6E S3 BT.
- An ironwood, 6 ins. in diam., brs. N.37°W., 103 lks. dist., marked T4N R6E S34 BT.



Completion of North boundary of Township 3 North Range 6 East. 7

Chains.

Land, hilly.  
Soil, stony, 3rd and 4th rate.  
Timber, palo verde, mesquite and ironwood.  
Undergrowth, greasewood brush, 5 ft. high.

N. 89° 48' E., bet. secs. 2 and 35.  
Descend over NE. slope of ridge, thru scattering timber and brush.

- 6.50 Ravine, 12 lks. wide, course SE.; ascend over SW. slope, 43 ft.
- 22.43 Ridge, brs. NW. and SE.; descend over NE. slope, 61 ft.
- 27.31 Ravine, 10 lks. wide, course SE.; ascend over SW. slope, 40 ft.
- 35.30 Ridge, brs. NW. and SE.; descend over NE. slope, 90 ft.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

1/4 S 35  
S 2  
1919

from which,

- A palo verde, 6 ins. in diam., brs. N. 63 1/2° W., 56 lks. dist., marked 1/4 S 35 BT.
- A palo verde, 6 ins. in diam., brs. S. 64 1/2° W., 64 lks. dist., marked 1/4 S 2 BT.

- 55.94 Wash, 14 lks. wide, course SE.; ascend over SW. slope, 10 ft. to
- 60.69 Ridge, brs. NW. and SE.; descend over NE. slope, 73 ft.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 1, 2, 35 and 36, marked on brass cap,

T4N R6E  
S35 | S36  
S 2 | S 1  
T3N  
1919

from which,

- A palo verde, 5 ins. in diam., brs. N. 33 1/4° E., 175 lks. dist., marked T4N R6E S36 BT.
- A palo verde, 6 ins. in diam., brs. S. 79 1/4° E., 100 lks. dist., marked T3N R6E S1 BT.
- A palo verde, 6 ins. in diam., brs. S. 4 1/2° W., 203 lks. dist., marked T3N R6E S2 BT.
- A palo verde, 6 ins. in diam., brs. N. 49 1/2° W., 124 lks. dist., marked T4N R6E S35 BT.

Land, hilly.  
Soil, stony, 3rd rate.  
Timber, palo verde, mesquite and ironwood.  
Undergrowth, greasewood and catclaw brush, 5 ft. high.

N. 89° 48' E., bet. secs. 1 and 36.  
Ascend SW. slope, 15 ft. high, thru scattering timber and brush.

- 9.96 The closing cor. of Ts. 3 and 4 N., R. 6 E.  
Land, hilly.  
Soil, stony, 2nd and 3rd rate.  
Timber, palo verde, mesquite and ironwood.  
Undergrowth, greasewood brush and cactus.

8. Completion of the Subdivision lines of T. 3 N., R. 6 E.

Chains.

From the closing cor. of secs. 11 and 12, on the West bdy. of Fort McDowell Indian Reservation, which is an iron post, 1 in. in diam., 12 ins. above ground, firmly set, marked and witnessed as described by the surveyor general,

N. 0° 01' W., bet. secs. 11 and 12.

Over hilly land, thru scattering timber and greasewood brush.

5.17 (80.00 chs. northing from the cor. of secs. 11, 12, 13 and 14) Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 1, 2, 11 and 12, marked on brass cap,

T3N | R6E  
S 2 | S 1  
S11 | S12  
1919

from which,

A palo verde, 10 ins. in diam., brs. N. 69 1/4° E., 270 lks. dist., marked T3N R6E S1 BT.

A palo verde, 4 ins. in diam., brs. S. 42° E., 240 lks. dist., marked T3N R6E S12 BT.

A palo verde, 8 ins. in diam., brs. S. 38 3/4° W., 209 lks. dist., marked T3N R6E S11 BT., and

A palo verde, 6 ins. in diam., brs. N. 21 1/2° W., 107 lks. dist., marked T3N R6E S2 BT.

Land, hilly.

Soil, stony, 3rd rate.

Timber, palo verde, mesquite and ironwood.

Undergrowth, greasewood brush.

.59 East, on a random line, bet. secs. 1 and 12. Intersect the closing cor. of secs. 1 and 12 on the W. bdy. of the Fort McDowell Indian Reservation, which is an iron post, 1 in. in diam., 12 ins. above ground, firmly set, marked and witnessed as described by the surveyor general.

Thence,

West, on a true line, bet. secs. 1 and 12.

Over level sandy valley land, thru scattering timber and brush.

.59 The cor. of secs. 1, 2, 11 and 12. Land, level soil, sandy, 2nd and 3rd rate. Timber, palo verde and mesquite. Undergrowth, greasewood brush.

40.00 N. 0° 01' W., on a random line, bet. secs. 1 and 2. Set temp. 1/4 sec. cor.  
79.96 Intersect the N. bdy. of Tp. at the cor. of secs. 1, 2, 35 and 36, hereinbefore described.

Thence,

S. 0° 01' E., on a true line, bet. secs. 1 and 2.

Over rolling land, thru scattering timber and brush.

3.00 Dry sand wash, 30 lks. wide, 3 ft. deep, course S. 70° E.

3.46 Road, brs. E. and W.

39.96 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,


S 2 | S 1  
1919

No trees suitable for bearing trees within limits; raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.


Completion of Subdivision lines of Township 3 North Range 6 East, 9  
chains.

43.26 Gravelly ridge, brs.E. and W.  
 72.96 Road brs.E. and W.  
 76.06 Wash, 8 lks.wide, banks 3 ft.high, course S.80° E.  
 79.96 The cor.of secs.1,2,11 and 12.  
 Land, rolling.  
 Soil,sandy and gravelly, 2nd and 3rd rate.  
 Timber, palo verde,ironwood and mesquite.  
 Undergrowth, greasewood brush, 6 ft. high.

From the cor.of secs. 26,27, 34 and 35, which is an iron post 1 in. in diam., 12 ins. above ground, firmly set, marked and witnessed as described by the surveyor general,  
 N.0° 01'W., bet. secs.26 and 27.  
 Over hilly land, thru. scattering timber and brush.  
 18.80 Wash, 6 lks.wide, 3 ft. deep, course NE.  
 21.10 Wash, 8 lks.wide, 4 ft. deep, course E.  
 25.00 Wash, 10 lks.wide, 3 ft. deep, course SE.  
 32.28 Wash, 100 lks. wide, 20 ft. deep, course SE.  
 38.00 Road brs.NW. and SE.  
 40.00 Set an iron post 3 ft.long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec.cor., marked on brass cap,



from which,  
 A palo verde, 10 ins. in diam., brs.N.86°W., 341 lks.dist., marked  $\frac{1}{4}$  S 27 B T.  
 A palo verde, 8 ins. in diam., brs.S.60°E., 310 lks.dist., marked  $\frac{1}{4}$  S 26 B T.  
 60.82 Ridge, 78 ft. above the  $\frac{1}{4}$  sec.cor., bears N.60°W. and S.60° E.; descend over NE. slope, 70 ft. to  
 70.35 Wash, 25 lks.wide, course SE.; ascend over SW.slope, 58 ft.to  
 74.95 Ridge, brs.E. and W.; descend over N.slope, 58 ft. to.  
 80.00 Set an iron post 3 ft.long, 2 ins. in diam., 24 ins. in the ground, for cor.of secs.22, 23,26 and 27, marked on brass cap,



from which,  
 A palo verde, 8 ins. in diam., brs.N.79 $\frac{3}{4}$ °E., 142 lks.dist., marked T3N R6E S23 BT.  
 A palo verde, 8 ins. in diam., brs.S.33 $\frac{1}{2}$ °E., 39 lks.dist., marked T3N R6E S26 BT.  
 A palo verde, 6 ins. in diam., brs.S.36 $\frac{3}{4}$ °W., 160 lks.dist., marked T3N,R6E S27 BT., and  
 A palo verde, 6 ins.in diam., brs.N.52 $\frac{1}{2}$ °W., 13 lks. dist., marked T3N R6E S22 BT.  
 Land, hilly.  
 Soil, gravelly and stony, 2nd and 3rd rate.  
 Timber, palo verde,mesquite and ironwood.  
 Undergrowth, cacti and greasewood brush, 4 to 6 ft. high.

S. 89° 57'E., on a random line, bet. secs.23 and 26.  
 40.00 Set temp. $\frac{1}{4}$  sec.cor.  
 52.48 Fall 16 lks.N. of the closing cor. of secs. 23 and 26 on the W. bdy. of Fort McDowell Indian Reservation, which

10 Completion of Subdivision lines of Township 3 North, Range 6 East  
Chains.

is an iron post, 1 in. in diam., 14 ins. above ground, firmly set, marked and witnessed as described by the surveyor general.  
Thence,  
N. 89° 47' W. on a true line.  
Over hilly land thru. timber and dense brush.  
8.40 Wash, 14 lks. wide, 2 ft. deep, course SE.; ascend over NE. slope of ridge, 29 ft.  
9.18 Road. brs. NW. and SE.  
12.42 (40.06 chs. from cor. of secs. 23, 24, 25 and 26) Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap,

$\frac{1}{4}$  S 23  
S 26  
1919

from which,  
A palo verde, 6 ins. in diam., brs. N. 35° W., 32 lks. dist., marked  $\frac{1}{4}$  S 23 BT.  
A palo verde, 8 ins. in diam., brs. S. 57 $\frac{1}{2}$ ° E., 131 lks. dist., marked  $\frac{1}{4}$  S 26 BT.  
18.04 Ridge, brs. NW. and SE.; descend over SW. slope, 62 ft. to  
26.36 Wash, 15 lks. wide, course NE.: ascend 69 ft. to  
34.98 Ridge, brs. NE. and SW.; descend 48 ft.  
35.99 Road brs. NE. and SW.  
50.40 Wash, 10 lks. wide, course N.; ascend 18 ft. to  
52.48 (80.12 chs. from cor. of secs. 23, 24, 25 and 26), the cor. of secs. 22, 23, 26 and 27.  
Land, hilly.  
Soil, stony, 2nd and 3rd rate.  
Timber, palo verde, mesquite and ironwood.  
Undergrowth, greasewood brush 4 to 6 ft. high.

N. 0° 01' W., bet. secs. 22 and 23.  
Over hilly land, thru. scattering timber and brush.  
8.20 Ridge, 50 ft. above the sec. cor. brs. E. and W.; descend over N. slope, 58 ft. to  
16.58 Ravine, 20 lks. wide, course E.; ascend S. slope, 18 ft. to  
18.07 Ridge, brs. E. and W.; descend over N. slope, 0 ft.  
19.27 Ravine, 5 lks. wide, course SE.; ascend over SW. slope, 54 ft.  
22.80 Ridge brs. E. and W.; descend over N. slope, 50 ft.  
26.84 Wash, 20 lks. wide, course S. 70° E.; ascend over SW. slope 103 ft.  
34.68 Ridge, brs. E. and W.; descend over N. slope 47 ft.  
40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap,


$\frac{1}{4}$   
S 22 | S 23  
1919

from which,  
A palo verde, 8 ins. in diam., brs. S. 63 $\frac{1}{2}$ ° E., 86 lks. dist., marked  $\frac{1}{4}$  S 23 B T.  
A palo verde, 6 ins. in diam., brs. S. 50 $\frac{3}{4}$ ° W., 27 lks. dist., marked  $\frac{1}{4}$  S 22 BT.  
40.75 Wash, 12 lks. wide, course E.; ascend S. slope 89 ft. to  
52.60 Ridge, brs. E. and W.; descend over N. slope, 38 ft.  
55.15 Wash, 10 lks. wide, course E.; ascend S. slope, 55 ft. to  
61.90 Ridge, brs. E. and W.; descend over N. slope, 53 ft. to  
67.42 Wash, 20 lks. wide, course SE.; ascend over SW. slope, 65 ft. to  
75.70 Ridge, brs. NE. and SW.; descend over NW. slope. 41 ft.  
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins.

Completion of Subdivision lines of Township 3 North, Range 6 East. 11

Chains.

in the ground, for cor. of secs. 14, 15, 22 and 23, marked on brass cap,



1919

from which,

A palo verde 6 ins. in diam., brs. N. 28° E., 172 lks. dist., marked T3N R6E S14 BT.

An ironwood, 6 ins. in diam., brs. S. 38½° E., 98 lks. dist., marked T3N R6E S23 BT.

A palo verde 5 ins. in diam., brs. S. 29° W., 46 lks. dist., marked T3N R6E S22 BT., and

A palo verde, 6 ins. in diam., brs. N. 74° W., 152 lks. dist., marked T3N R6E S15 BT.

Soil, sandy and stony, 2nd and 3rd rate.

Timber, scattering palo verde, mesquite and ironwood.

Undergrowth, greasewood brush, 6 ft. high.

40.00  
61.82

S. 89° 47' E., on a random line; bet. secs. 14 and 23.

Set temp. ¼ sec. cor.

Fall 7 lks. S. of the closing cor. of secs. 14 and 23 on the W. bdy. of Fort McDowell Indian Reservation, which is an iron post 1 in. in diam., 14 ins. above ground, firmly set, marked and witnessed as described by the surveyor general.

Thence,

N. 89° 51' W., on a true line, bet. secs. 14 and 23.

Over hilly land, thru. scattering timber and greasewood and catclaw brush.

2.02  
3.83

Road brs. NW. and SE.


Wash, 12 lks. wide, 3 ft. deep, course SE.; ascend NE. slope of ridge, 16 ft.

21.85  
22.00

Ridge, brs. N. and S.; descend 16 ft.

(39.82 chs. from cor. of secs. 13, 14, 23 and 24),

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap,



from which,

A palo verde, 8 ins. in diam., brs. N. 11½° W., 24 lks. dist., marked ¼ S 14 BT.

A palo verde, 6 ins. in diam., brs. S. 88° W., 46 lks. dist., marked ¼ S 23 BT.

28.38  
42.15  
44.26  
57.13  
61.82

Wash, 10 lks. wide, 3 ft. deep, course NE.; ascend 17 ft.

Ridge, brs. NW. and SE.; descend 14 ft.

Wash, 8 lks. wide, 4 ft. deep, course SW.; ascend 60 ft.

Ridge, brs. NW. and SE.; descend 15 ft.

(79.64 chs. from cor. of secs. 13, 14, 23 and 24), the cor. of secs. 14, 15, 22 and 23.

Land, hilly.

Soil, stony, 3rd rate.

Timber, palo verde, mesquite and ironwood.

Undergrowth, greasewood and catclaw brush, 4 to 6 ft. high.

3.85  
14.67

N. 0° 01' W. bet. secs: 14 and 15.

Over stony land, thru. scattering timber and brush.

Descend NW. slope, 41 ft. to


Wash; 15 lks. wide, course NE.; ascend 35 ft.

Ridge, brs. N. 80° E. and S. 80° W.; descend over NW. slope 30 ft. to

12. Completion of Subdivision of Township 3 North, Range 6 East.

Chains.


- 18:16 Road brs.NW. and SE.
- 20:36 Wash, 20 lks.wide, course SE.; ascend over SW.slope, 38 ft. to
- 32:04 Ridge brs.NW. and SE.; descend over NE.slope 48 ft.
- 39:30 Wash, 15 lks.wide, course E.; ascend S.slope, 30 ft.
- 40:00 Set an iron post 3 ft.long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec.cor., marked on brass cap,



from which,

- A palo verde, 5 ins. in diam., brs.N.4 $\frac{1}{4}$ °W., 56 lks.dist., marked  $\frac{1}{4}$  S 15 BT.
- A palo verde, 6 ins. in diam., brs.S.86 $\frac{1}{4}$ °E., 130 lks.dist., marked  $\frac{1}{4}$  S 14 BT.

- 46:38 Road brs.E. and W.
- 48:28 Ridge, brs.E. and W.; descend N.slope 49 ft.
- 51:30 Wash, 20 lks.wide, course E.; ascend S.slope, 48 ft.
- 56:46 Ridge, brs.E and W.; descend over N.slope, 30 ft.
- 61:54 Wash, 25 lks.wide, course N.90°E.; ascend over SE.slope 30 ft.to
- 75:44 Road brs.NW. and SE.
- 79:21 Road brs.NE. and SW.
- 80:00 Set an iron post 3 ft.long, 2 ins. in diam., 24 ins. in the ground, for cor.of secs.10,11,14 and 15, marked on brass cap,



from which,

- A palo verde, 8 ins. in diam., brs.N.57°E., 248 lks. dist., marked T3N R6E S11 BT.
- A palo verde, 6 ins.in diam., brs.S.47°E., 76 lks.dist., marked T3N R6E S14 BT.
- A palo verde, 4 ins. in diam., brs.S.62 $\frac{1}{2}$ °W., 297 lks.dist., marked T3N R6E S15 BT., and
- A palo verde, 5 ins. in diam., brs.N.12 $\frac{1}{2}$ °W., 158 lks.dist., marked T3N R6E S10 BT.

Land, hilly.

Soil, gravelly and stony, 2nd and 3rd rate.

Timber, palo verde, mesquite and ironwood.

Undergrowth, greasewood and catclaw brush, 6 ft.high.

- 40:00 S.89°51'E., on a random line, bet. secs.11 and 14.
- 71:00 Set temp. $\frac{1}{4}$  sec.cor.
- 71:00 Fall 6 lks.N.of the closing cor. of secs.11 and 14, on the W.bdy. of the Forth McDowell Indian Reservation, which is an iron post, 1 in. in diam., 12 ins. above ground, firmly set, marked and witnessed as described by the surveyor general.
- Thence,
- N.89°48'W., on a true line, bet. secs.11 and 14.
- Ascend NE.slope, 88 ft., over stony, hilly land, thru.scattering timber and brush.
- 26:70 Point of ridge, brs.N.and S.; descend over W.slope, 15 ft. to
- 31:14 (39.86 chs.from cor.of secs.11,12,13 and 14), Set an iron post, 3 ft.long, 1 in. in diam., 26 ins.in the ground, for  $\frac{1}{4}$  sec.cor., marked on brass cap,

Completion of Subdivision lines of Township 3 North, Range 6 East, 13

Chains.

$\frac{1}{4}$  S 11  
S 14  
1919

from which,

A palo verde, 5 ins. in diam., brs.N.77°E., 195 lks.dist., marked  $\frac{1}{4}$  S 11 BT.

A palo verde, 4 ins. in diam., brs.S.23°W., 135 lks.dist., marked  $\frac{1}{4}$  S 14 BT.

- 35.23 Wash, 20 lks.wide, course N.; ascend over NE.slope, 105 ft.
  - 44.18 Ridge, brs.N. and S.; descend over W.slope, 88 ft.
  - 56.01 Foot of descent; enter rolling land, brs.N. and S.; ascend gradually about 6 ft.
  - 61.78 Old road N. and S.
  - 71.00 (79.72 chs. from cor.of secs.11,12;13 and 14), the cor.of secs. 10,11,14 and 15.
- Land, rolling and hilly.  
Soil, stony, 2nd and 3rd rate.  
Timber, palo verde, mesquite and ironwood.  
Undergrowth, greasewood brush.

N.0°1' W., bet. secs. 10 and 11.

Descend NW.slope, 10 ft. over hilly land, thru. scattering timber and dense undergrowth,

- 6.49 Wash, 25 lks.wide, course S.80° E.; ascend over SW.slope, 28 ft. to
- 16.37 Ridge, brs.N.70°W. and S.70°E.; descend over NE.slope, 14 ft. to
- 19.25 Ravine, 15 lks.wide, course S.70°E.; ascend over SW.slope, 13 ft. to
- 35.94 Ridge, brs.NW. and E.; descend over NE.slope, 14 ft. to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec.cor., marked on brass cap,

$\frac{1}{4}$   
S10 | S11  
1919

from which,

An ironwood, 8 ins. in diam., brs.N.4 $\frac{1}{4}$ °W., 160 lks.dist., marked  $\frac{1}{4}$  S 10 BT.

A palo verde, 6 ins. in diam., brs.S.53 $\frac{1}{2}$ °E., 197 lks.dist., marked  $\frac{1}{4}$  S 11 BT.

- 41.35 Dry sand wash, 15 lks.wide, course S.60°E.; ascend over SW.slope, 63 ft.
- 47.12 Stony ridge, brs.N.70°W. and S.70°E.; desc. over NE.slope, 41 ft.
- 51.05 Ravine, 10 lks.wide, course S.70°E.; ascend over SW.slope, 120 ft. to
- 54.83 Ridge, brs.NW. and SE.; descend over NE.slope, 3 ft. to
- 66.53 Road brs.E. and W.
- 68.03 Road to the Red Mountain Mine, brs.NW. and SE.
- 71.43 Branch of the same road to the Red Mountain mine, brs.NW. and SE.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 2, 3, 10 and 11, marked on brass cap,

T3N | R6E  
S 3 | S 2  
S10 | S11  
1919

from which,

A palo verde, 6 ins. in diam., brs.N.41 $\frac{3}{4}$ °E., 310 lks.dist., marked T3N R6E S2 BT.

14 Completion of Subdivision of Township 3 North, Range 6 East.

Chains.

An ironwood, 10 ins. in diam., brs. S.  $76\frac{3}{4}^{\circ}$  E., 203 lks. dist. marked T3N R6E S11 BT.  
 A palo verde, 6 ins. in diam., brs. S.  $56\frac{1}{2}^{\circ}$  W., 188 lks. dist., marked T3N R6E S10 BT., and  
 An ironwood, 8 ins. in diam., brs. N.  $60\frac{3}{4}^{\circ}$  W., 73 lks. dist., marked T3N R6E S3 BT.

Land, hilly.  
 Soil, stony, 2nd and 3rd rate.  
 Timber, palo verde, mesquite and ironwood.  
 Undergrowth, greasewood and catclaw brush, 4 to 6 ft. high.

40.00 S.  $89^{\circ}48'$  E., on a random line, bet. secs. 2 and 11.  
 79.66 Set temp.  $\frac{1}{4}$  sec. cor.  
 Intersect N. and S. line, 8 lks. S. of the cor. of secs. 1, 2, 11 and 12.

Thence,  
 N.  $89^{\circ}51'$  W., on a true line, bet. secs. 2 and 11.  
 Over rolling and hilly land, thru. scattering timber and greasewood brush.

12.57 Road brs. NE. and SW.  
 37.68 Stony ridge, brs. 50 ft. above the sec. cor., brs. N. and S.; descend over W. slope, 18 ft.

39.83 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap,

$$\frac{1}{4} \begin{array}{c} S \ 2 \\ S \ 11 \end{array}$$
 1919

from which,

A palo verde, 8 ins. in diam., brs. N.  $82^{\circ}$  E., 83 lks. dist., marked  $\frac{1}{4}$  S 2 B T.

A palo verde, 10 ins. in diam., brs. S.  $7\frac{3}{4}^{\circ}$  W., 30 lks. dist., marked  $\frac{1}{4}$  S 11 B T.

40.00 Wash, 10 lks. wide, course S.; ascend over E. slope, 52 ft.

79.66 The cor. of secs. 2, 3, 10 and 11.  
 Soil, stony, 2nd and 3rd rate.  
 Timber, palo verde, mesquite and ironwood.  
 Undergrowth, greasewood brush, 5 ft. high.

40.00 N.  $0^{\circ}01'$  W., on a random line, bet. secs. 2 and 3.  
 79.42 Set temp.  $\frac{1}{4}$  sec. cor.  
 Intersect the N. bdy. of Tp., 35 lks. E. of the cor. of secs. 2, 3, 34 and 35, hereinbefore described.

Thence,  
 S.  $0^{\circ}16'$  E., on a true line, bet. secs. 2 and 3.  
 Descend S. slope of stony ridge, over hilly land, thru. scattering timber and greasewood brush.

5.18 Wash, 20 lks. wide, course E. and ascend 78 ft. over NE. slope.

15.89 Ridge, brs. N.  $85^{\circ}$  W. and S.  $85^{\circ}$  E.; desc. over SE. slope, 39 ft. to

29.87 Wash, 20 lks. wide, course E.; asc. over N. slope, 56 ft.

39.42 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap,

$$\frac{1}{4} \begin{array}{c} S \ 3 \\ S \ 2 \end{array}$$
 1919

from which,

An ironwood, 6 ins. in diam., brs. N.  $20^{\circ}$  W., 108 lks. dist., marked  $\frac{1}{4}$  S 3 BT.

A palo verde 8 ins. in diam., brs. S.  $36\frac{1}{2}^{\circ}$  E., 104 lks. dist., marked  $\frac{1}{4}$  S 2 B T.



Completion of Subdivision lines of Township 3 North Range 6 East. 15


Chains.

- 39.81 Ridge, brs. E. and W.; desc. over S. slope, 12 ft.
- 50.10 Wash, 16 lks.wide, course SE.; ascend NE.slope, 52 ft.
- 56.15 Ridge, brs.E. and W.; desc. over S.slope, 50 ft.to
- 72.02 Wash, 15 lks.wide, course SE.; ascend NE.slope, about 5 ft.
- 79.42 The cor.of secs.2,3, 10 and 11.  
Land, hilly.  
Soil, stony,2nd and 3rd rate.  
Timber, palo verde, mesquite and ironwood.  
Undergrowth, greasewood and catclaw brtsh, 5 ft. high.

-----

From the cor. of secs. 27,28, 33 and 34, on N. bdy. of the Salt River Indian Reservaton, which is an iron post, 1 in. in diam., 14 ins. above ground, firmly set, marked and witnessed as described by the surveyor general,


- N.0° 02'W., bet. secs.27 and 28.  
Ascend SW.slope, 115 ft. over hilly land, thru.scattering timber and brush.
- 9.10 Ridge, brs.NW. and E.; descend over N.slope,118 ft.
- 20.78 Ravine, 5 lks.wide, course NE.; ascend over SE.slope, 9ft.
- 27.30 Ridge, brs.NE. and SW.; descend over NW.slope, 13 ft.
- 27.97 Wash, 12 lks.wide, course NE.; ascend over SE.slope, 14 ft.
- 33.60 Spur, slopes E.; descend over NE.slope, 9 ft.
- 35.09 Wash, 8 lks.wide, course SE.; ascend over SE..slope, 74 ft.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins.in the ground, for  $\frac{1}{4}$  sec.cor., marked on brass cap,



from which

- A palo verde, 8 ins. in diam., brs.S.62 $\frac{1}{2}$ °E.,9 lks.dist., marked  $\frac{1}{4}$  S 27 B T.
- An ironwood, 6 ins. in diam., brs.S.21 $\frac{1}{2}$ °W.,110 lks.dist., marked  $\frac{1}{4}$  S 28 BT.

- 46.19 Ridge, brs.NE. and SW.; descend over NW.slope,107 ft.
- 55.61 Wash, 16 lks.wide, course E.; ascend over S.slope, 89 ft.
- 61.98 Ridge, brs.E. and W.; descend over N.slope, 84 ft.
- 67.21 Wash, 15 lks.wide, course E.; ascend over S. slope, 44 ft.
- 72.70 Ridge, brs.E. and W.; descend over N.slope, 38 ft.
- 77.48 Wash, 10 lks.wide, course S.80°E.; ascend over SW.slope, 14 ft.
- 80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 24 ins. in the ground for cor.of secs.21,22, 27 and 28, marked on brass cap,



from which,

- A palo verde, 6 ins. in diam., brs.N.22 $\frac{1}{2}$ °E.,34 lks.dist., marked T3N R6E S22 BT.
- A palo verde. 8 ins. in diam., brs.S.87°E.,36 lks.dist.,marked T3N R6E S27 BT.
- A palo verde, 4 ins. in diam., brs.S.8 $\frac{1}{4}$ °W.,75 lks.dist., marked T3N R6E S28 BT.
- A palo verde, 8 ins, in diam., brs.N.39°W., 175 lks.dist., marked T3N R6E S21 BT.

Land, hilly.  
Soil, stony, 3rd rate.

16 Completion of Subdivision lines of Township 3 North, Range 6 East.

Chains.

Timber, palo verde, mesquite and ironwood.  
Undergrowth, greasewood and cacti, 5 ft. high.

40.00 East, on a random line, bet. secs. 22 and 27.  
Set temp,  $\frac{1}{4}$  sec. cor.  
80.02 Intersect N. and S. line, at the cor. of secs. 22, 23, 26  
and 27.

Thence,  
West, on a true line, bet. secs. 22 and 27.  
Ascend NE. slope, 22 ft. over hilly land, thru. scattering  
timber and greasewood brush.

31.56 Ridge, brs. N. and S.; descend over W. slope, 22 ft.  
33.34 Wash, 15 lks. wide, course N.; ascend over E. slope, 68  
ft. to

38.02 Ridge, brs. N. and S.; descend over W. slope, 29 ft.  
40.01 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap,

$\frac{1}{4}$  S 22  
S 27  
1919

from which,

A palo verde, 5 ins. in diam., brs. N.  $35\frac{1}{2}^{\circ}$  W., 44  
lks. dist., marked  $\frac{1}{4}$  S 22 BT.

A palo verde, 4 ins. in diam., brs. S.  $19\frac{3}{4}^{\circ}$  E., 40  
lks. dist., marked  $\frac{1}{4}$  S 27 BT.

49.16 Wash, 12 lks. wide, course N.; ascend E. slope, 69 ft. to  
65.98 Ridge, brs. N.  $85^{\circ}$  W., and S.  $85^{\circ}$  E.; descend over SW. slope,  
69 ft.

75.58 Road brs. NE. and SW.  
80.02 The cor. of secs. 21, 22, 27 and 28.  
Land, hilly.

Soil, stony, 2nd and 3rd rate.  
Timber, palo verde, mesquite and ironwood.  
Undergrowth, greasewood brush, 5 ft. high.

N.  $0^{\circ}02'$  W., bet. secs. 21 and 22.  
Ascend SW. slope, 82 ft. over hilly land, thru. scattering  
timber, and cacti and greasewood brush.

8.10 Ridge, brs. N.  $85^{\circ}$  W. and S.  $85^{\circ}$  E.; descend over NE. slope,  
29 ft. Old road on top of ridge.

10.56 Wash, 10 lks. wide, course S.  $80^{\circ}$  E.; ascend over SW. slope,  
30 ft.

13.10 Ridge, brs. E. and W.; descend over N. slope, 35 ft.  
17.45 Wash, 10 lks. wide, course E.; ascend S. slope, 66 ft.

28.42 Ridge, brs. E. and W.; descend over N. slope, 109 ft. to  
30.00 Old road E. and W.

36.10 Wash, 8 lks. wide, course E.; ascend over S. slope, 95 ft.  
40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap,

$\frac{1}{4}$   
S 21 | S 22  
1919

from which,

An ironwood, 6 ins. in diam., brs. N.  $87\frac{3}{4}^{\circ}$  W., 92  
lks. dist. marked  $\frac{1}{4}$  S 21 BT.

An ironwood, 4 ins. in diam., brs. N.  $67\frac{3}{4}^{\circ}$  E., 102  
lks. dist., marked  $\frac{1}{4}$  S 22 BT.

54.74 Ridge, brs. N.  $70^{\circ}$  W. and S.  $70^{\circ}$  E.; descend over NE. slope,  
114 ft.

Completion of Subdivision lines of Township 3 North Range 6 East. 17

Chains.

- 61.45 Wash, 18 lks.wide, course NE.; ascend over SE.slope, 24 ft.
- 65.82 Ridge; brs. E. and W.; descend over N.slope 34 ft.
- 69.18 Wash, 12 lks. wide, course SE.; ascend over SW.slope, 81 ft. to
- 80.00 Set an iron post 3 ft.long, 2 ins. in diam.; 24 ins. in the ground, for cor.of secs., 5, 16, 21 and 22, marked on brass cap,

T3N	R6E
S16	S15
S21	S22

1919

from which,

- A palo verde, 6 ins. in diam., brs.N.83°E., 137 lks.dist., marked T3N R6E S15 BT.
- A palo verde, 6 ins. in diam., brs.S.47½°E., 39 lks.dist., marked T3N R6E S22 BT.
- A palo verde, 4 ins. in diam., brs.S.61¼°W., 92 lks. dist., marked T3N R6E S21 B T.
- A palo verde, 6 ins. in diam., brs.N.75¼°W., 97 lks.dist., marked T3N R6E S16 BT.

Land, hilly.

Soil, stony, 2nd and 3rd rate.

Timber; palo verde, mesquite and ironwood.

Undergrowth, cacti and greasewood brush, 5 ft. high.

East, on a random line, bet. secs.15 and 22.

40.00 Set temp, ¼ sec.cor.

80.02 Intersect N. and S. line, 10 lks. N.of the cor. of secs. 14, 15, 22 and 23.

Thence,

N.89° 50'W., on a true line, bet. secs.15 and 22.

Descend 10 ft., over NW. slope, over stony land, thru. scattering timber, and cacti and greasewood brush undergrowth.

21.47 Wash, 20 lks.wide, course NE.; ascend over SE.slope, 72 ft.

33.42 Ridge, brs.N. and S.; descend over W.slope, 43 ft.

40.01 Set an iron post 3 ft.long; 1 in. in diam., 26 ins. in the ground, for ¼ sec.cor., marked on brass cap,

S 13

S 22

1919

from which,

A palo verde, 4 ins. in diam., brs.N.48½°W., 36 lks.dist., marked ¼ S 15 B T.

A palo verde, 6 ins. in diam., brs.S.57¼°E., 98 lks.dist., marked ¼ S 22 B T.

44.10 Wash, 12 lks.wide, course SE.; ascend over NE.slope, 58 ft. to

51.62 Hill, brs.NW. and SE.; descend over SW.slope, 10 ft.

57.97 Wash, 15 lks.wide, course SE.; ascend over NE.slope, 8 ft. to.

80.02 The cor.of secs.15, 16, 21 and 22.

Land, hilly.

Soil, stony, 2nd and 3rd rate.

Timber, palo verde, mesquite and ironwood.


Undergrowth, cacti and greasewood brush, 4 ft.high.

N.0°02'W., bet. secs. 15 and 16.

Ascend over S.slope, 17 ft., over hilly land, thru. scattering greasewood brush, and timber.

18. Completion of Subdivision lines of Township 3 North Range 6 East.

Chains.  
 6.40 Ridge, brs. E. and W.; descend over N.slope, 69 ft. to  
 12.59 Wash, 15 lks.wide, course SW.; ascend over SE.slope, 77 ft.  
 19.21 Ridge, brs.E. and W.; descend over N.slope, 85 ft. to  
 25.78 Wash, 20 lks.wide, course E.; ascend over S.slope, 50 ft.  
 38.60 Ridge, brs.E. and W.; descend over N.slope, 41 ft.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
 the ground, for  $\frac{1}{4}$  sec.cor., marked on brass cap,



from which,  
 A palo verde, 6 ins. in diam., brs.N.13 $\frac{3}{4}$ °E., 94  
 lks.dist., marked  $\frac{1}{4}$  S 15 BT.  
 A palo verde, 6 ins. in diam., brs.S.75 $\frac{3}{4}$ °W., 31  
 lks.dist., marked  $\frac{1}{4}$  S 16 B T.

42.63 Wash, 15 lks.wide, course E.; ascend S.slope 35 ft.  
 49.96 Road brs.NE. and SW.  
 52.76 Ridge, brs.E. and W.; descend over N.slope, 80 ft.  
 58.65 Wash, 14 lks.wide, course E.; ascend S.slope, 35 ft.  
 63.96 Ridge, brs.E. and W.; descend over N.slope, 54 ft.  
 68.48 Wash, 20 lks.wide, course E.; ascend over S.slope, 47 ft.  
 72.23 Ridge, brs.E and W.; descend over N.slope, 23 ft. to  
 77.22 Wash, 10 lks.wide, course E.; ascend over S. slope, 21 ft.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in  
 the ground, for cor. of secs. 9, 10, 15 and 16, marked on  
 brass cap,



from which,  
 A palo verde, 6 ins. in diam., brs.N.63 $\frac{3}{4}$ °E., 86  
 lks.dist., marked T3N R6E S10 BT.  
 A palo verde, 6 ins. in diam., brs.S.10 $\frac{1}{4}$ °E., 204  
 lks.dist., marked T3N R6E S15 BT.  
 A palo verde, 6 ins. in diam., brs.S.9°W., 212  
 lks.dist., marked T3N R6E S16 BT.  
 A palo verde, 4 ins. in diam., brs.S.81°W., 345  
 lks.dist., marked T3N R6E S9 BT.

Land, hilly.  
 Soil, stony, 2nd and 3rd rate.  
 Timber, palo verde, mesquite and ironwood.  
 Undergrowth, greasewood brush.

-----  
 S.89° 56'E., on a random line, bet. secs.10 and 15.  
 40.00 Set temp.  $\frac{1}{4}$  sec.cor.  
 80.00 Intersect N. and S. line, 12 lks.S. of the cor. of secs.10,  
 11, 14 and 15.  
 Thence,  
 S.89°59'W., on a true line, bet. secs.10 and 15.  
 Over hilly land, thru scattering and greasewood brush.  
 1.50 Road brs.NE. and SW.  
 4.60 Road brs.NW. and SE.  
 8.00 Wash, 30 lks.wide, 4 ft. deep, course NE.  
 8.22 Road brs.NW. and SE.  
 10.50 The same road brs.NE. and SW.  
 26.80 Road, brs.NW. and SE.  
 31.60 Wash, 30 lks.wide, 4 ft. deep, course SE.; ascend NE.slope,  
 39 ft.  
 33.72 Ridge, brs.N. and S.; descend over W.slope, 20 ft.

Completion of Subdivision lines of Township 3 North Range 6 East. 19

Chains.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap,

$\frac{1}{4}$  S 10  
 S 15  
 1919

from which,  
 A palo verde, 6 ins. in diam., brs. N.  $82\frac{1}{2}^{\circ}$  E., 51 lks. dist., marked  $\frac{1}{4}$  S 10 BT.  
 A palo verde 5 ins. in diam., brs. S.  $39^{\circ}$  W., 115 lks. dist., marked  $\frac{1}{4}$  S 15 BT.

41.49 Ridge, brs. N and S.; descend over N. slope, 36 ft.  
 46.09 Ravine, 8 lks. wide, course N.  $70^{\circ}$  E.; ascend over SE. slope, 18 ft.  
 52.67 Ridge, brs. NE. and SW.; descend over NW. slope, 37 ft. to  
 56.87 Ravine, 8 lks. wide, course N.  $80^{\circ}$  E.; ascend over SE. slope 104 ft.  
 80.00 The cor. of secs. 9, 10, 15 and 16.  
 Land, hilly.  
 Soil, stony, 2nd and 3rd rate.  
 Timber, palo verde, ironwood and mesquite.  
 Undergrowth, greasewood brush, 6 ft. high.

-----

N.  $0^{\circ} 02'$  W. bet. secs. 9 and 10.  
 Descend N. slope, 47 ft. over hilly land, thru. scattering timber and greasewood brush undergrowth.

5.96 Wash, 10 lks. wide, course N.  $70^{\circ}$  E.; ascend over SE. slope, 54 ft. to  
 10.19 Stony ridge, brs. N.  $70^{\circ}$  E. and S.  $70^{\circ}$  W.; descend over NW. slope, 76 ft.  
 15.60 Wash, 10 lks. wide, course S.  $80^{\circ}$  E.; ascend over SW. slope.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap,

$\frac{1}{4}$   
 S 9 | S 10  
 1919

from which,  
 A palo verde, 5 ins. in diam., brs. N.  $54\frac{1}{2}^{\circ}$  W., 28 lks. dist., marked  $\frac{1}{4}$  S 9 BT.  
 An ironwood, 6 ins. in diam., brs. S.  $43\frac{1}{4}^{\circ}$  E., 22 lks. dist., marked  $\frac{1}{4}$  S 10 BT.

40.48 Road brs. NW. and SE.  
 41.50 Wash, 40 lks. wide, course SE.; ascend bluff 56 ft.  
 42.38 Bluff, brs. E. and W.; continue gradual ascent.  
 43.53 Ridge, brs. E. and W.; descend over N. slope, 29 ft.  
 44.33 Road brs. NW. and SE.  
 46.30 Ravine, 10 lks. wide, course SE.; ascend over SW. slope, 26 ft.  
 55.88 Ridge, brs. NW. and SE.; descend over NE. slope, 47 ft.  
 59.91 Ravine, 15 lks. wide, course SE.; ascend 32 ft. to  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 3, 4, 9 and 10, marked on brass cap,

T3N | R6E  
 S 4 | S 3  
 S 9 | S 10  
 1919

from which,  
 An ironwood, 6 ins. in diam., brs. N.  $70\frac{1}{2}^{\circ}$  E., 86 lks. dist., marked T3N R6E S3 BT.

20 Completion of Subdivision lines of Township 3 North, Range 6 East.

Chains.

An ironwood, 4 ins. in diam., brs. S. 29½° E., 46 lks. dist., marked T3N R6E S10 BT.  
 A palo verde, 8 ins. in diam., brs. S. 62½° W., 68 lks. dist., marked T3N R6E S 9 BT.  
 A palo verde, 5 ins. in diam., brs. N. 85¼° W. 86 lks. dist., marked T3N R6E S 3 BT.

Land, hilly.  
 Soil, stony 2nd and 3rd rate.  
 Timber, palo verde, ironwood and mesquite.  
 Undergrowth, greasewood brush, 5 ft.

40.00 N. 89° 59' E. on a random line; bet. secs. 3 and 10.  
 Set temp. ¼ sec. cor.  
 79.96 Intersect N. and S line, 10 lks. S. of the cor. of secs. 2, 3, 10 and 11.  
 Thence,  
 S. 89° 55' W., on a true line, bet. secs. 3 and 10.  
 Over rolling land, thru. scattering timber and greasewood brush undergrowth.  
 13.20 Road to Red Mountain mine, brs. NW. and SE.; ascend E. slope of ridge, 16 ft.  
 18.00 Ridge, brs. NW. and SE.; descend over SW. slope, 48 ft.  
 29.61 Wash, 10 lks. wide, course SE.; asc. over NE. slope, 48 ft.  
 36.16 Ridge, brs. NW. and SE.; descend over SW. slope, 23 ft.  
 39.98 Set an iron post; 3 ft. long, 1 in. in diam., 26 ins. in the ground for ¼ sec. cor. marked on brass cap,

S 3  
 ¼ S 10  
 1919


from which,

An ironwood, 6 ins. in diam., brs. N. 59½° W. 110 lks. dist., marked ¼ S 3 BT.  
 A palo verde, 12 ins. in diam., brs. S. 21½° W., 181 lks. dist. marked ¼ S 10 BT.  
 41.89 Wash, 10 lks. wide, course SE.; ascend over NE. slope, 59 ft.  
 47.13 Stone ridge, brs. NW. and SE.; descend over SW. slope, 42 ft.  
 57.45 Wash, 8 lks. wide, course SE.; ascend over NE. slope, 76 ft.  
 63.34 Ridge, brs. NW. and SE.; descend over SW. slope, 51 ft.  
 68.62 Wash, 12 lks. wide, course SE.; ascend NE. slope, 107 ft.  
 76.27 Ridge, brs. NW. and SE.; descend over SW. slope, 21 ft.  
 79.96 The cor. of secs. 3, 4, 9 and 10.  
 Land, rolling and hilly.  
 Soil, stony, 2nd and 3rd rate.  
 Timber, palo verde, mesquite and ironwood.  
 Undergrowth, greasewood, brush, 5 ft. high.

40.00 N. 0° 02' W., on a random line, bet. secs. 3 and 4.  
 Set temp. ¼ sec. cor.  
 78.92 Intersect the N. bdy. of Tp., 30 lks. E. of the cor. of secs. 3, 4, 33 and 34, hereinbefore described.  
 Thence,  
 S. 0° 15' E., on a true line, bet. secs. 3 and 4.  
 Descend SW. slope, 45 ft. over hilly land, thru. scattering timber, and greasewood and ocotillo undergrowth.  
 5.34 Wash, 15 lks. wide, course SE.; ascend NE. slope; 50 ft.  
 9.92 Ridge, brs. NW. and SE.; descend over SW. slope, 63 ft.  
 16.82 Wash, 20 lks. wide, course E.; asc. over N. slope, 69 ft.  
 22.32 Ridge, brs. E. and W.; descend over S. slope, 23 ft.  
 31.42 Road to the Red Mountain Mine, brs. NW. and SE.  
 38.92 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for ¼ sec. cor., marked on brass cap,

Completion of Subdivision lines of Township 3 North, Range 6 East, 21

Chains.



from which,

A palo verde, 8 ins. in diam., brs.N.57°W., 43 lks.dist., marked  $\frac{1}{4}$  S 4 BT.

A palo verde, 8 ins. in diam., brs.S.78°E., 121 lks.dist., marked  $\frac{1}{4}$  S 3 BT.

- 48.34 Wash, 20 lks.wide, course E.; ascend N.slope, 131 ft.
- 49.02 Bluff, 100 ft. above sand wash, brs.E. and W.; continue gradual ascent.
- 51.22 Stony ridge brs.N. 80°W. and S.80°E.; descend over SW. slope, 152 ft.
- 66.42 Wash, 10 lks.wide, course SE.; ascend over NE.slope, 113 ft.
- 77.36 Ridge brs.E. and W.; descend over S.slope, 26 ft. to
- 78.92 The cor.of secs.3,4,9 and 10.


Land, hilly.  
 Soil, stony, 2nd and 3rd rate.  
 Timber, palo verde, ironwood and mesquite.  
 Undergrowth, greasewood and ocotillo brush, 5 ft. high.

From the cor. of secd. 28, 29, 32 and 33, on the N. bdy. of the Salt River Indian Reservation, which is an iron post, 1 in. in diam., 12 ins. above ground, firmly set, marked and witnessed as described by the surveyor general,

N.0°02'W., bet. secs. 28 and 29.

Ascend SE. slope, 52 ft., over stony mountainous land, thru. scattering timber and greasewood and cacti brush.

- 17.46 Spur, brs.NE. and SW.; descend over NE.slope, 34 ft.
- 22.43 Ravine, 8 lks.wide, course SW.; ascend over SE.slope, 37 ft.
- 26.59 Spur, brs.E. and W.; descend over N. slope, 42 ft.
- 33.86 Wash, course SW.; ascend 193 ft.
- 40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec.cor., marked on brass cap,




from which,

A palo verde, 6 ins. in diam., brs.N.18 $\frac{1}{2}$ °E., 6 lks. dist., marked  $\frac{1}{4}$  S 28 BT.

A palo verde, 8 ins. in diam., brs.S.18 $\frac{1}{2}$ °W., 86 lks.dist., marked  $\frac{1}{4}$  S 29 BT.

- 51.11 Spur, brs.E. and W.; descend over N.slope, 60 ft.
- 56.23 Ravine, 8 lks.wide, course E.; ascend over S.slope, 41 ft.
- 60.78 Spur, brs. E. and W.; descend over N.slope, 58 ft.
- 65.50 Ravine, course SE.; ascend SW.slope, 130 ft.
- 74.80 Spur, brs.E. and W.; descend over N.slope, 98 ft.
- 80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 24 ins. in the ground, for cor.of secs.20,21,28 and 29, marked on brass cap,



from which,

22 Completion of Subdivision lines of Township 3 North Range 6 East.

Chains.

A palo verde, 8 ins. in diam., brs. S. 8° W., 63 lks. dist., marked T3N R6E S29 BT.

An ironwood, 6 ins. in diam., brs. N. 64° W., 55 lks. dist., marked T3N R6E S20 BT.

No other trees within limits; raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, mountainous.

Soil, stony, 3rd rate.

Timber, palo verde, ironwood and mesquite.

Undergrowth, greasewood and cacti brush.

-----  
East, on a random line, bet. secs. 21 and 28.

40.00 Set temp. ¼ sec. cor.

79.98 Intersect N. and S. line, 8 lks. S. of the cor. of secs. 21, 22, 27 and 28.

Thence,

S. 89° 57' W., on a true line, bet. secs. 21 and 28.

Descend SW. slope of spur, 10 ft., over mountainous land, thru. scattering timber and mesquite brush.

5.26 Ravine, 8 lks. wide, course SE. Ascend over NE. slope, 63 ft.

15.21 Spur, brs. NE. and SW.; descend over NW. slope, 51 ft.

26.83 Ravine, 10 lks. wide, course S.; ascend E. slope, 132 ft.

39.99 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap,

¼ S 21  
S 28  
1919

from which,

A palo verde, 6 ins. in diam., brs. N. 33½° W., 35 lks. dist., marked ¼ S 21 BT.

A palo verde, 6 ins. in diam., brs. S. 65¾° E., 34 lks. dist., marked ¼ S 28 BT.

44.85 Spur, brs. N. and S.; descend over W. slope, 55 ft.

55.24 Ravine, 6 lks. wide, course SE.; ascend over NE. slope, 21 ft.

57.92 Spur, brs. N. and S.; descend over W. slope, 32 ft.

66.20 Ravine, 10 lks. wide, course NE.; ascend over NE. slope, 9 ft. to

68.00 Spur, brs. N. and S.; descend over W. slope, 40 ft. to

76.12 Wash, 10 lks. wide, course N. 80° E.; ascend over E. slope.

77.58 Point of spur, brs. NE. and SW.; descend over NW. slope.

79.98 The cor. of secs. 20, 21, 28 and 29.

Land, mountainous.

Soil, stony, 3rd rate.

Timber, palo verde, ironwood and mesquite.

Undergrowth, greasewood brush, 4 ft. high.

-----  
N. 0° 02' W., bet. secs. 20 and 21.

Descend NE. slope, over mountainous land, thru. scattering timber and cacti and greasewood brush.

.25 Ravine, 15 lks. wide; course N. 80° E.; ascend over SW. slope, 138 ft. to

4.15 Spur, brs. N. 80° W. and S. 80° E.; descend over NE. slope, 44 ft.

12.71 Ravine, 12 lks. wide, course SE.; ascend over SW. slope, 104 ft. to

25.16 Stony spur, brs. N. 70° W. and S. 70° E.; descend over NE. slope, 92 ft. to

33.22 Ravine 10 lks. wide, course SE.; ascend SW. slope, 90 ft.

38.33 Ridge, brs. E. and W.; descend over N. slope, 86 ft.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap,



Completion of Subdivision of Township 3 North Range 6 East. 23

Chains.

$\frac{1}{4}$   
 S20 | S21  
 1919

from which,

A palo verde, 8 ins. in diam., brs.N.85½°E.,134 lks.dist., marked  $\frac{1}{4}$  S 21 BT.

A palo verde, 6 ins. in diam., brs.S.72°W.,44 lks. dist., marked  $\frac{1}{4}$  S 20 BT.

- 46.04 Dry sand wash, 15 lks.wide, course S.80°E.; ascend over SW.slope, 82 ft.
- 50.65 Spur, brs.NW. and SE.; descend over NE.slope,27 ft.
- 54.73 Wash, 10 lks.wide, course SE.;ascend over SW. slope,68 ft.
- 69.00 Road brs.NW. and SE.
- 69.51 Spur, brs.NW. and SE.; descend over NE. slope, 75 ft.
- 76.78 Ravine, 10 lks.wide, course S.70°E.; ascend over SW.slope 125 ft.
- 80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 24 ins. in the ground, for cor.of secs. 16,17,20 and 21, marked on brass cap,

T3N | R6E  
 S17 | S16  
 S20 | S21  
 1919

No trees suitable for bearing trees within limits; Raise a mound of stone, 3 ft. base, 2 ft.high, W.of cor. Land, mountainous. Soil, stony, 2nd and 3rd rate. Timber, palo verde, mesquite and ironwood. Undergrowth, cacti and greasewood.

- 40.00 N.89°57'E., on a random line, bet. secs.16 and 21. Set temp. $\frac{1}{4}$  sec.cor.
- 79.98 Intersect N.and S. line, 5 lks.N.of the cor.of secs.15,16, 21 and 22.
- Thence, S 89°59'W., on a true line, bet. secs.16 and 21. Descend SW.slope, 59 ft.,over mountainous land, thru. scattering cacti and greasewood undergrowth.
- 17.20 Ravine, 8 lks.wide, course S.60°E.; ascend over NE.slope, 127 ft.
- 39.99 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec.cor., marked on brass cap,

$\frac{1}{4}$  S 16  
 S 21  
 1919

from which,


A palo verde, 4 ins. in diam., brs.N.40°W.,142 lks.dist., marked  $\frac{1}{4}$  S 16 BT.

A palo verde, 5 ins. in diam., brs.S.5°W.,33 lks.dist., marked  $\frac{1}{4}$  S 21 BT.

- 46.48 Ridge, brs.NW. and SE.; descend over NE.slope, 29 ft.
- 56.46 Ravine, 10 lks.wide, course S.60°E.; ascend over SW. slope, 52 ft.
- 62.00 Spur, brs.NE. and SW.; descend over SW.slope, 40 ft.
- 66.95 Ravine, 15 lks.wide, course SW.; ascend over NE.slope,48 ft.to
- 79.98 The cor.of secs.16,17,20 and 21. Land, mountainous. Soil, stony,2nd and 3rd rate. Timber, palo verde, mesquite and ironwood. Undergrowth, cacti and greasewood brush, 4 to 6 ft.high.

Chains.


N.0°02'W., bet. secs.16 and 17.  
Ascend SW.slope of spur 125 ft. over mountainous land, thru. scattering timber, and greasewood and catclaw undergrowth.  
10.60 Ridge, brs.E. and W.; descend over N.slope, 157 ft.  
15.80 Ravine, 20 lks.wide, course S.80°E.; ascend over SW.slope 69 ft.  
22.79 Ridge, brs.E. and W.; descend over N.slope, 64 ft.  
25.93 Ravine, 9 lks.wide, course S.80°E.; ascend over SW.slope, 23 ft.  
38.47 Road brs.NE. and SW.  
39.07 Spur, brs. E. and W.; descend over N.slope, 71 ft.  
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec.cor., marked on brass cap,



from which,

An ironwood, 6 ins.in diam., brs.S.41 $\frac{1}{2}$ °W., 170 lks.dist., marked  $\frac{1}{4}$  S 17 BT.  
A palo verde, 4 ins. in diam., brs. S. 47 $\frac{1}{2}$ °E. 80 lks.dist., marked  $\frac{1}{4}$  S 16 B T.

46.03 Ravine, 10 lks.wide, course NE.; ascend over SE.slope of spur, 42 ft.  
48.31 Spur, brs. E. and W.; descend over N.slope, 24 ft.  
50.79 Ravine, 12 lks.wide, course SE.; ascend over SW.slope 23 ft.  
63.09 Ridge, brs.E. and W.; descend over N. slope, 30 ft.to  
80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 24 ins. in the ground, for cor.of sec. 8,9,16 and 17, marked on brass cap,



from which,

An ironwood, 6 ins. in diam., brs.N.35 $\frac{1}{2}$ °E., 75 lks.dist., marked T3N R6E S9 BT.  
An ironwood, 5 ins. in diam., brs. S.19 $\frac{1}{4}$ °E., 86 lks.dist., marked T3N R6E S16 BT.  
An ironwood, 6 ins. in diam., brs.S.65°W., 105 lks.dist., marked T3N R6E S17 BT.  
An ironwood, 6 ins. in diam., brs. N.50 $\frac{1}{4}$ °W., 227 lks.dist., marked T3N R6E S8 BT.


Land, mountainous.  
Soil, stony, 3rd rate.  
Timber, palo verde, mesquite and ironwood.  
Undergrowth, greasewood and catclaw brush, 6 ft. high.

-----  
40.00 N.89°59' E., on a random line, bet. secs.9 and 16.  
79.90 Set temp. $\frac{1}{4}$  sec.cor.  
Intersect N.and S line, 12 lks.S.of the cor. of secs.9, 10, 15 and 16:  
Thence,  
S.89°54'W., on a true line, bet. secs.9 and 16.  
Ascend NE.slope of spur, 46 ft., over mountainous land, thru. scattering timber and greasewood and catclaw undergrowth.  
10.92 Spur, brs.N. and S.; descend over W. slope, 56 ft.  
20.62 Ravine, 15 lks.wide, course NE.; ascend over SE.slope, 91 ft.  
28.35 Ridge, brs.NE. and SW.; descend over NW.slope, 47 ft.

Completion of Subdivision lines of Township 3 North Range 6 East. 25

Chains.

33.35 Road brs.N and S.  
39.95 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec.cor., marked on brass cap,




from which,  
A palo verde, 6 ins. in diam., brs.N.18 $\frac{1}{2}$ °E.,108 lks.dist., marked  $\frac{1}{4}$  S 9 BT.  
A palo verde, 10 ins. in diam., brs.S.21 $\frac{1}{4}$ °E.,155 lks.dist., marked  $\frac{1}{4}$  S 16 BT.

43.63 Road brs.NE. and SW.  
45.03 Ravine, 10 lks.wide, course NE.; ascend over SE. slope, 107 ft.  
55.37 Ridge, brs.NE and SW.; descend over NW.slope, 49 ft.  
63.06 Ravine, 10 lks.wide, course N.; ascend over E. slope, 34 ft.  
67.51 Spur, brs.N. and S.; descend over W.slope, 20 ft.  
70.60 Road brs.N. and S.  
74.90 Road, brs.N. and S.  
79.90 The cor.of secs.8,9,16 and 17.  
Land, mountainous.  
Soil, stony, 3rd rate.  
Timber,palo verde, mesquite and ironwood.  
Undergrowth, greasewood and catclaw brush, 5 ft.high.

N.0°02'W., bet. secs.8 and 9.  
Ascend S.slope of spur, 29 ft. over mountainous land, thru. scattering timber and undergrowth.

19.98 Spur, brs.E and W.; descend over N.slope, 37 ft.  
23.33 Ravine, 15 lks.wide, course E.; ascend over S.slope, 25 ft.  
26.27 Ridge, brs.E. and W.; descend over N.slope, 15 ft.  
33.75 Ravine, 18 lks.wide, course S.60°E.; ascend over SW.slope, 95 ft.  
40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec.cor., marked on brass cap,



from which,  
A palo verde, 5 ins. in diam., brs. N.26 $\frac{1}{2}$ °W.,147 lks.dist., marked  $\frac{1}{4}$  S 8 BT.  
An ironwood, 8 ins. in diam., brs.S.13 $\frac{1}{2}$ °E.,13 lks.dist., marked  $\frac{1}{4}$  S 9 BT.

42.17 Top of stony ridge, brs.NW. and SE.; descend over NE. slope, 135 ft.  
53.55 Ravine, 16 lks.wide, course N.70°E.; ascend over SE.slope 84 ft.  
58.40 Spur, brs.E. and W.; descend over N.slope, 32 ft.  
62.75 Ravine, 10 lks.wide, course E.; ascend S.slope, 15 ft.  
64.20 Spur, brs.E and W.; descend over N.slope, 12 ft.  
69.00 Foot of descent; enter bottom land along ravine, brs.N. 10°W. and S.10°E.; thence over rolling land, along wash.  
70.00 Stony point 21 ft. above ravine, brs.E. and W.  
70.95 Leave rolling land; ascend over SW.slope, 52 ft. to  
80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 24 ins. in the ground, for cor.of secs.4,5,8 and 9, marked on brass cap,

26. Completion of Subdivision lines of Township 3 North, Range 6 East  
Chains.

T3N	R6E
S 5	S 4
S 8	S 9

1919

No trees suitable for bearing trees within limits; raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor. Land, rolling and mountainous. Soil, stony, 2nd and 3rd rate. Timber, palo verde, mesquite and ironwood. Undergrowth, greasewood brush, cacti and ocotillo, 4 to 7 ft. high.

40.00 N. 89°54'E., on a random line, bet. secs. 4 and 9.  
Set temp. ¼ sec. cor.  
80.00 Intersect N. and S. line, 10 lks. S. of the cor. of secs. 3, 4, 9 and 10.  
Thence,  
S. 89°50'W., on a true line, bet. secs. 4 and 9.  
Ascend NE. slope of spur, over hilly land, thru. scattering timber and undergrowth.  
3.39 Ridge, 16 ft. above the sec. cor., brs. NW. and SE.; descend over SW. slope, 75 ft.  
11.30 Ravine, 15 lks. wide, course S. 60°E.; ascend over NE. slope 57 ft.  
16.85 Ridge, brs. NW. and SE.; descend over SW. slope, 47 ft.  
22.51 Ravine, 10 lks. wide, course S. 50°E.; ascend over NE. slope, 77 ft.  
26.18 Ridge, brs. NW and SE.; descend over SW. slope, 29 ft.  
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground, for ¼ sec. cor.; marked on brass cap,

¼	S 4
	S 9

1919

from which,

An ironwood, 16 ins. in diam., brs. N. 72½°W., 41 lks. dist., marked ¼ S 4 BT.  
An ironwood, 3 ins. in diam., brs. S. 68½°E., 28 lks. dist., marked ¼ S 9 B T.  
50.00 Ravine, 15 lks. wide, course SE.; ascend over NE. slope, 57 ft.  
56.30 Ridge, brs. NW. and SE.; descend over SW. slope, 63 ft. to  
61.73 Wash, 20 lks. wide, course S. 50°E.; ascend over SE. slope, 48 ft.  
76.65 Spur, brs. NE. and SW.; descend over NW. slope, 17 ft. to  
80.00 The cor. of secs. 4, 5, 8 and 9.  
Land, hilly.  
Soil, stony, 2nd and 3rd rate.  
Timber, palo verde, ironwood and mesquite.  
Undergrowth, greasewood, ocotillo and catclaw brush.


40.00 N. 0°2'W., on a random line, bet. secs. 4 and 5.  
Set temp. ¼ sec. cor.  
78.68 Intersect the N. bdy. of Tp., 32 lks. E. of the cor. of secs. 4, 5, 32 and 33, hereinbefore described.  
Thence,  
S. 0°16'E., on a true line, bet. secs. 4 and 5.  
Descend SW. slope, over hilly land, thru. scattering timber and dense undergrowth.  
.05 Ravine, 8 lks. wide, course SE.; ascend over NE. slope, 75 ft.  
13.67 Ridge, brs. N. 50°W. and S. 50°E.; descend over SW. slope, 89 ft.

Completion of Subdivision lines of Township 3 North, Range 6 East. 27

Chains.

28.88 Wash, 50 lks.wide, course S.50°E.; ascend over NE.slope, 10 ft.

38.68 Set an iron post 3 ft.long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec.cor., marked on brass cap,



from which,

A palo verde, 12 ins. in diam., brs.S.66 1/2°E.148 lks.dist., marked 1/4 S 4 BT.

A palo verde, 5 ins. in diam., brs.S.7 3/4°W., 95 lks.dist., marked 1/4 S 5 BT.

38.98 Ridge, brs.NW.and SE.; descend over SW.slope, 10 ft.

46.35 Wash, 20 lks.wide, course S.50°E.; ascend over NE.slope, 109 ft.

53.66 Ridge, brs.NW. and E.; descend over SW.slope, 103 ft.

61.15 Ravine, 15 lks.wide; course SE.; ascend over NE.slope, 61 ft.

65.75 Ridge, brs.NW. and SE.; descend over SW.slope, 64 ft.to

78.68 The cor.of secs.4,5,8 and 9.

Land, hilly.

Soil, stony, 3rd rate.

Timber, palo verde, ironwood and mesquite.

Undergrowth, greasewood brush, 4 ft.high.


From the cor.of secs.29,30,31 and 32, on the N. bdy.of the Salt River Indian Reservation, which is an iron post 1 in. in diam., 14 ins. above ground, firmly set, marked and witnessed as described by the surveyor general,

N, 0°03'W., bet. secs.29 and 30.

Ascend S.slope of spur, over mountainous land, thru.scattering timber and greasewood brush.

20.40 Spur, bears E. and W.; descend over N.slope, 93 ft.

40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec.cor., marked on brass cap,



from which,


A palo verde, 5 ins.in diam., brs.N.26°E., 36 lks.dist., marked 1/4 S 29 BT.

A palo verde, 6 ins. in diam., brs.S.32 1/4°W., 98 lks.dist., marked 1/4 S 30 BT.

41.39 Ravine, 10 lks.wide, course SE.; ascend over SW.slope, 303 ft.

73.85 Spur, brs.E. and W.; descend over NE. slope, 120 ft.

80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 24 ins. in the ground, for cor.of secs.19,20, 29 and 30, marked on brass cap,



from which,

A palo verde, 4 ins. in diam., brs.N.34 3/4°E., 146 lks.dist., marked T3N R6E S20 BT.

A palo verde, 6 ins. in diam., brs.S.72 3/4°E., 146 lks.dist., marked T3N R6E S 29 BT.

## BOOK 3314

28 Completion of Subdivision of Township 3 North Range 6 East


Chains.

	<ul style="list-style-type: none"> <li>● A palo verde, 6 ins. in diam., brs. S.54°W., 243 lks.dist., marked T3N R6E S30 BT., and</li> <li>A palo verde, 4 ins. in diam., brs.N.23½°W., 82 lks.dist., marked T3N R6E S19 BT.</li> </ul> <p>Land, mountainous. Soil, stony, 3rd rate. Timber, palo verde, mesquite and ironwood. Undergrowth, greasewood and cacti.</p>
40.00	N.89°57'E., on a random line, bet. secs. 20 and 29.
79.78	Set temp. ¼ sec.cor. Intersect N. and S. line, 14 lks.N.of the cor. of secs. 20, 21, 28 and 29.
5.14	Thence, N.89°57'W., on a true line, bet. secs.20 and 29. Descend NW.slope, 6 ft., over mountainous land, thru.scattering timber and greasewood undergrowth. Ravine, 8 lks.wide, course N.80°E.; ascend over SE.slope 78 ft.
14.36	Spur, brs.N. and S.; descend over W.slope, 50 ft.
19.36	Ravine, 10 lks.wide, course SE.; ascend over NE.slope of spur, 155 ft.
26.60	Road, brs.N. and S.
30.59	Spur, brs.N. and S.; descend over W.slope, 145 ft.
38.20	Ravine, 15 lks.wide, course S.; ascend over E.slope, 70 ft.
39.89	Set an iron post 3 ft.long, 1 in. in diam., 26 ins. in the ground, for ¼ sec.cor., marked on brass cap,
	$\frac{1}{4} \text{ S } 20$ $\text{S}29$ $1919$
	from which,
	<ul style="list-style-type: none"> <li>An ironwood, 4 ins. in diam., brs.N.14°E., 93 lks.dist., marked ¼ S 20 BT.</li> <li>A palo verde, 5 ins. in diam., brs.S.22½°E., 100 lks.dist., marked ¼ S 29 BT.</li> </ul>
44.90	Spur, brs.N. and S.; descend over W.slope, 148 ft. to
52.63	Ravine, 12 lks.wide, course SW.; ascend over SE.slope, 39 ft. to
56.78	Spur, brs.N. and S.; descend over W.slope, 45 ft.
62.47	Ravine, 15 lks.wide, course S.; ascend over E.slope of spur, 204 ft.
72.50	Spur, brs.N. and S.; descend over W. slope, 74 ft.
79.78	The cor.of secs.19, 20, 29 and 30. Land, mountainous. Soil, stony, 3rd rate. Timber, palo verde, mesquite and ironwood. Undergrowth, greasewood, brush, 4 ft.high.
40.00	N.89°50'W., on a random line, bet. secs.19 ad 30.
79.68	Set temp. ¼ sec.cor. Intersect the W. bdy.of Tp., 37 lks.N. of the cor.of secs. 19, 24, 25 and 30, which is an iron post, 3 ins. in diam., 10 ins. above ground, firmly set, marked and witnessed as described by the surveyor general.
7.02	Thence, N.89° 54' E., on a true line, bet. secs.19 and 30. Over hilly land, thru.scattering timber and greasewood and ocotillo brush.
8.84	Road to Phoenix, Arizona, brs.NE. and SW.
8.90	Wash, 20 lks.wide, course S. 30°W.; ascend 21 ft.
12.68	Road brs.N.30°E. and S.30°W.
20.86	Ridge, brs.NE. and SW.; descend over SE.slope, 7 ft. to Ravine, 8 lks.wide, course SW.; ascend over NW.slope, 43 ft.

Completion of Subdivision of Township 3 North, Range 6 East. 29.

Chains.

- 24.68 Ridge, brs.NE. and SW.; descend over SE.slope, 29 ft.
- 29.68 Ravine, 10 lks.wide, course S.70°W.; ascend NW.slope, 167 ft., over stony mountainous land, brs.NE. and SW.
- 32.88 Road brs.NE. and SW.
- 39.68 Set an iron post 3 ft.long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec.cor., marked on brass cap,




from which,

- A palo verde, 4 ins. in diam., brs.N.26 $\frac{1}{4}$ °E., 23 lks.dist., marked  $\frac{1}{4}$  S 19 BT.
- A palo verde, 4 ins. in diam., brs.S.20 $\frac{1}{2}$ °E. 53 lks.dist., marked  $\frac{1}{4}$  S 30 BT.
- 79.68 The cor.of secs.19,20, 29 and 30.  
Land, hilly and mountainous.  
Soil, stony, 2nd and 3rd rate.  
Timber, palo verde, mesquite and ironwood.  
Undergrowth, greasewood and ocotillo brush, 6 ft. high.


N.0°03'W., bet. secs. 19 and 20.

- Descend NW. slope, over mountainous land, thru. scattering timber and brush.
- 4.89 Ravine, 8 lks.wide, 69 ft. below sec.cor., course SW.; ascend over SE.slope of spur, 269 ft.
- 24.56 Spur, brs.E. and W.; descend over N.slope, 265 ft.
- 40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec.cor., marked on brass cap,



from which,

- An ironwood, 7 ins. in diam., brs.N.69 $\frac{3}{4}$ °E., 220 lks.dist., marked  $\frac{1}{4}$  S 20 BT.
- A palo verde, 6 ins. in diam., brs.S.69°W., 217 lks.dist., marked  $\frac{1}{4}$  S 19 B T.
- 40.87 Ravine, 10 lks.wide, course W.; ascend over S.slope, 64 ft.
- 46.56 Spur, brs.E. and W.; descend over N.slope, 82 ft.
- 52.74 Ravine, 15 lks.wide, course W.; ascend over S. slope, 30 ft.
- 53.60 Spur, brs.NE. and SW.; descend over NW.slope, 34 ft.
- 54.22 Wash, 12 lks.wide, course SW.; ascend over SE.slope, 234 ft.
- 61.99 Road brs.NE and SW.
- 64.59 Road brs.NE: and SW.
- 73.60 Spur, brs.E and NW.; descend over N. slope, 105 ft.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor.of secs.17,18,19 and 20, marked on brass cap,



No trees suitable for bearing trees available; raise a mound of stone, 2 ft.base, 1 $\frac{1}{2}$  ft.high, W of cor.  
Land, mountainous.  
Soil, stony, 3rd and 34th rate.  
Timber, palo verde, mesquite and ironwood.  
Undergrowth, greasewood and ocotillo brush, 4 to 7 ft. high.

## Chains.

- S.  $89^{\circ}57'E.$ , on a random line, bet. secs. 17 and 20.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.94 Intersect N. and S. line, 3 lks. S. of the cor. of secs. 16, 17, 20 and 21.  
 Thence,  
 N.  $89^{\circ}58'W.$ , on a true line, bet. secs. 17 and 20.  
 Ascend E. slope of spur, 49 ft., over mountainous land, thru scattering timber and brush.  
 1.80 Spur, brs. N. and S.; descend over W. slope, 14 ft.  
 9.49 Ravine, 10 lks. wide, course SE.; ascend NE. slope, 121 ft.  
 29.29 Spur, brs. NW. and SE.; descend over SW. slope, 34 ft.  
 33.54 Ravine, 16 lks. wide, course SE.; ascend over NE. slope, 20 ft.  
 39.97 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap,

$\frac{1}{4}$  S 17  
 S 20  
 1919

from which,

- A palo verde, 5 ins. in diam., brs. N.  $21^{\circ}E.$ , 119 lks. dist., marked  $\frac{1}{4}$  S 17 B T.  
 A palo verde, 5 ins. in diam., brs. S.  $67\frac{1}{2}^{\circ}E.$ , 36 lks. dist., marked  $\frac{1}{4}$  S 20 BT.  
 48.59 Road brs. NW. and SE.  
 51.99 Road brs. NE. and SW.  
 53.29 Spur, brs. NE. and SW.; descend over NW. slope.  
 59.74 Wash, 20 ft. wide, 100 ft. below top of spur, course SW.; ascend over NE. slope, 63 ft. to  
 61.90 Spur, brs. N. and S.; descend over W. slope, 18 ft. to  
 62.56 Ravine, 10 lks. wide, course SE.; ascend over NE. slope, 71 ft.  
 64.66 Road brs. NE. and SW.  
 66.06 Road brs. NE. and SW.  
 79.94 The cor. of secs. 17, 18, 19 and 20.  
 Land, mountainous.  
 Soil, stony, 3rd and 4th rate.  
 Timber, palo verde, mesquite and ironwood.  
 Undergrowth, greasewood and ocotillo brush, 6 ft. high.

- S.  $89^{\circ}54'W.$ , on a random line, bet. secs. 18 and 19.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.62 Intersect the W. bdy. of Tp., 5 lks. S. of the cor. of secs. 13, 18, 19 and 24, which is an iron post 3 ins. in diam., 12 ins. above ground, firmly set, marked and witnessed as described by the surveyor general.  
 Thence,  
 N.  $89^{\circ}56'E.$ , on a true line, bet. secs. 18 and 19.  
 Descend E. slope, 8 ft. over mountainous land, thru scattering undergrowth.  
 .43 Ravine, 15 lks. wide, course S.; ascend W. slope, 19 ft.  
 .50 Road brs. N. and S.  
 14.60 Ridge, brs. N. and S.; descend over E. slope, 10 ft.  
 17.10 Ravine, 10 lks. wide, course S.; ascend W. slope, 126 ft. to  
 39.62 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap,

$\frac{1}{4}$  S 18  
 S 19  
 1919

- No trees suitable for bearing trees within limits; raise a mound of stone 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.  
 41.41 Spur, brs. NE. and SW.; descend over SE. slope, 7 ft.  
 43.66 Ravine, 8 lks. wide, course SW.; ascend over NW. slope, covered with loose boulders 353 ft.  
 54.10 Spur, brs. N.  $20^{\circ}E.$  and S.  $20^{\circ}W.$ ; descend over SE. slope, 179 ft.



Completion of Subdivision lines of Township 3 North, Range 6 East 31


Chains.

- 64.12 Ravine, 9 lks.wide, course S.; ascend over W.slope, 113 ft.
- 71.41 Spur, brs.N.30°W. and S.30°E.; descend over NE.slope, 188 ft.
- 79.62 The cor.of secs.17,18,19 and 20.  
Land, mountainous.  
Soil, stony, 3rd and 4th rate.  
Timber, palo verde, mesquite, and ironwood.  
Undergrowth, cacti and greasewood brush, 5 ft. high.


-----

N.0°03'W., bet. secs. 17 and 18.  
Descend NE. slope, 35 ft., over mountainous land, thru. scattering undergrowth.

- 10.20 Ravine, 20 lks.wide, course S. 80°E.; ascend over SW. slope, 410 ft. to
- 40.00 Set an iron post 3 ft.long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec.cor., marked on brass cap,




- 48.46 No trees suitable for bearing trees within limits; raise a mound of stone 2ft. base, 1 1/2 ft. high, W. of cor.
- 66.18 Spur, brs.E and W.; descend over N.slope, 192 ft.
- 68.78 Road brs. NW. and SE.
- 71.07 Ravine, 10 lks.wide, course SE.; ascend over SW.slope, 14 ft.
- 74.85 Spur, brs.NE and SW.; descend over NE.slope.
- 80.00 Wash, 15 lks.wide, course SE.; ascend over SW.slope, 12 ft.
- Set an iron post, 3 ft.long, 2 ins. in diam., 24 ins. in the ground, for cor.of secs. 7,8,17 and 18, marked on brass cap,



No trees suitable for bearing trees within limits; raise a mound of stone 2 ft.base, 1 1/2 ft.high, W.of cor.  
Land, mountainous.  
Soil, stony, 3rd and 4th rate.  
Timber, palo verde, mesquite and ironwood.  
Undergrowth, greasewood and ocotillo, 6 ft.high.

- 40.00 S.89° 58'E., on a random line, bet. secs. 8 and 17.
- 80.12 Set temp. 1/4 sec.cor.  
Intersect N. and S. line, 14 lks.N.of the cor. of secs. 8,9,16 and 17.  
Thence,  
N.89°52'W., on a true line, bet. secs.8 and 17.  
Ascend NE.slope, 478 ft.over mountainous land, thru. scattering undergrowth.
- 29.30 Ridge, brs.NE. and SW.; descend over NW.slope, 51 ft.
- 35.54 Ravine, 10 lks.wide, course NE.; ascend over SE.slope, 59 ft.
- 38.77 Same ridge, in saddle, brs.NW. and SE.; descend over SW.slope, 284 ft.
- 40.06 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec.cor., marked on brass cap,



Chains.

58.18 No trees suitable for bearing trees within limits; raise a mound of stone 2 ft. base, 1½ ft. high, N. of cor.  
 Ravine, 12 lks. wide, course SE.; thence SW.; ascend over NE. slope, 123 ft. to  
 74.71 Spur, brs. NW. and SE.; descend over SW. slope, 52 ft.  
 80.12 The cor. of secs. 7, 8, 17 and 18.  
 Land, mountainous.  
 Soil, stony, 3rd and 4th rate.  
 Timber, mesquite, palo verde and ironwood.  
 Undergrowth, greasewood and ocotillo brush, 6 ft. high.

-----  
 S. 89° 56' W., on a random line, bet. secs. 7 and 18.  
 40.00 Set temp. ¼ sec. cor.  
 79.84 Intersect the W. bdy. of Tp. 10 lks. S. of the cor. of secs. 7, 12, 13 and 18, which is an iron post 3 ins. in diam., 12 ins. above ground, firmly set, marked and witnessed as described by the surveyor general.  
 East, on a true line, bet. secs. 7 and 18.  
 Ascend W. slope, of spur, over mountainous land, thru scattering undergrowth.  
 1.28 Spur, brs. NE. and SW.; descend over SE. slope, 30 ft.  
 5.69 Ravine, 10 lks. wide, course SE.; ascend over SW. slope of stony ridge, 477 ft. to  
 20.75 Ridge, brs. N. 60° W. and S. 60° E.; descend over NE. slope, 223 ft.  
 39.36 Ravine, 8 lks. wide, course NE.; ascend over NW. slope, 28 ft.  
 39.84 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground, for ¼ sec. cor., marked on brass cap,

$$\frac{1}{4} \begin{array}{c} S \ 7 \\ S \ 18 \\ 1919 \end{array}$$

No trees suitable for bearing trees available; raise a mound of stone 2 ft. base, 1½ ft. high, N. of cor.  
 42.81 Spur, brs. NE. and SW.; descend over SE. slope, 497 ft.  
 76.46 Descent in dry ravine 12 lks. wide, course S. 50° E.; ascend over SW. slope, 72 ft.  
 79.84 The cor. of secs. 7, 8, 17 and 18.  
 Land, mountainous.  
 Soil, stony, 3rd and 4th rate.  
 Timber, palo verde, mesquite and ironwood.  
 Undergrowth, greasewood and ocotillo brush, 5 ft. high.

-----  
 N. 0° 03' W., bet. secs. 7 and 8.  
 Ascend over SW. slope, 41 ft., over mountainous land, thru scattering undergrowth.  
 9.50 Spur, brs. NW. and SE.; descend over NE. slope, 46 ft.  
 10.00 Ravine, 8 lks. wide, course SE.; ascend over SW. slope of stony ridge, 365 ft. to  
 33.39 Ridge, brs. N. 70° W. and S. 70° E.; descend over NE. slope, 124 ft.  
 38.02 Ravine, 12 lks. wide, course E.; ascend over S. slope, 62 ft.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap,

$$\frac{1}{4} \begin{array}{c} S \ 7 \\ | \\ S \ 8 \\ 1919 \end{array}$$

No trees suitable for bearing trees within limits; raise a mound of stone 2 ft. base, 1½ ft. high, W. of cor.  
 40.72 Spur, brs. NE. and SW.; descend over NW. slope, 102 ft.

Chains.	<p>43.76 Ravine, 15 lks.wide, course E.; ascend over S.slope of spur, 71 ft.</p> <p>47.43 Spur, brs.E and W.; descend over N.slope, 267 ft.</p> <p>62.89 Wash, 12 lks.wide, course E.; ascend over S.slope of stony ridge, 329 ft.to</p> <p>80.00 Set an iron post 3 ft.long, 2 ins. in diam., 24 ins. in the ground, for cor.of secs.5,6,7 and 8, marked on brass cap,</p>						
	<table border="1"> <tr> <td>T3N</td> <td>R6E</td> </tr> <tr> <td>S 6</td> <td>S 5</td> </tr> <tr> <td>S 7</td> <td>S 8</td> </tr> </table> <p>1919</p>	T3N	R6E	S 6	S 5	S 7	S 8
T3N	R6E						
S 6	S 5						
S 7	S 8						
	<p>No trees suitable for bearing trees within limits; raise a mound of stone 2 ft.base, 1½ ft.high,W.of cor. Land, mountainous. Soil, stony, 3rd and 4th rate. Timber, palo verde, mesquite and ironwood. Undergrowth, greasewood brush, 5 ft. high.</p> <hr/> <p>S.89°52'E., on a random line, bet. secs. 5 and 8.</p> <p>40.00 Set temp.¼ sec.cor.</p> <p>80.12 Intersect N. and S. line, 3 lks.N. of the cor.of secs.4, 5, 8 and 9.</p> <p>Thence, N.89°51'W., on a true line, bet. secs.5 and 8. Descend over SW.slope, 24 ft.,over mountainous land, thru. scattering undergrowth.</p> <p>4.67 Ravine, 10 lks.wide, course SE.; ascend over NE.slope, 197 ft.</p> <p>39.10 Spur, brs.NE and SW.; descend over NW slope, 15 ft.</p> <p>39.95 Ravine, 5 lks.wide, course NE.; ascend 4 ft.,over SE. slope, to</p> <p>40.06 Set an iron post 3 ft.long, 1 in. in diam., 26 ins. in the ground, for ¼ sec.cor., marked on brass cap,</p>						
	<table border="1"> <tr> <td>¼</td> <td>S 5</td> </tr> <tr> <td></td> <td>S 8</td> </tr> </table> <p>1919</p>	¼	S 5		S 8		
¼	S 5						
	S 8						
	<p>No trees suitable for bearing trees within limits; raise a mound of stone 2 ft.base, 1½ft. high, N.of cor. Continue ascent from the ¼ sec.cor. 2.90 ft. over NE. slope.</p> <p>67.50 Spur, brs.N. and S.; descend over W.slope, 69 ft.</p> <p>71.77 Ravine, 10 lks.wide, course NE.; ascend over SE.slope, 163 ft.to</p> <p>79.42 Ridge, brs,N.85°W. and S.85'E.; descend over SW.slope, 8 ft.</p> <p>80.12 The cor.of secs.5,6,7 and 8. Land, mountainous. Soil, stony, 3rd and 4th rate. Timber, palo verde, mesquite and ironwood. Undergrowth, greasewood brush, 6 ft.high.</p> <hr/> <p>West, on a random line, bet. secs. 6 and 7.</p> <p>40.00 Set temp.¼ sec.cor.</p> <p>79.88 Intersect the W. bdy. of the Tp.2 lks.N. of the cor. of secs.1,6,7 and 12, which is an iron post, 3 ins. in diam., 12 ins. above ground, firmly set, marked and witnessed, as described by the surveyor general.</p> <p>Thence, N.89°59'E., on a true line, bet. secs.6 and 7.</p>						

34 Completion of Subdivision lines of Township 3 North, Range 6 E.  
Chains.

- Ascend abrupt rocky SW.slope of ridge 268 ft., over mountainous land, thru.scattering timber and brush.  
16.24 Ridge, brs .N.80°W. and S.80°E.; descend over NE.slope, 657 ft.  
39.88 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec.cor., marked on brass cap,

$\frac{1}{4}$  S 6  
 $\frac{1}{4}$  S 7  
 1919

- No trees suitable for bearing trees within limits; raise a mound of stone 2 ft. base,  $1\frac{1}{2}$  ft.high, N.of cor.  
73.85 Descend over SE.slope, 34 ft.  
79.88 The cor.of secs.5,6, 7 and 8.  
Land, mountainous.  
Soil, stony, 2nd, 3rd and 4th rate.  
Timber, scattering palo verde, mesquite and ironwood.  
Undergrowth, greasewood and cacti.

- N.0°03' W., on a random line, bet. secs.5 and 6.  
40.00 Set temp. $\frac{1}{4}$  sec.cor.  
78.32 Intersect the N. bdy.of the Tp., 32 lks.E.of the cor.of secs. 5,6,31 and 32, hereinbefore described.  
Thence,  
S.0°17'E., on a true line, bet. secs.5 and 6.  
Ascend over N.slope of ridge, over mountainous land, thru. scattering timber and dense undergrowth.  
16.67 Ridge, brs.E and W.; descend 49 ft. over S.slope.  
33.37 Ravine, 10 lks.wide, course E.; ascend over N.slope, 63 ft.  
38.32 Set an iron post 3 ft.long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec.cor., marked on brass cap,

$\frac{1}{4}$   
 S 6 | S 5  
 1919

- No trees suitable for bearing trees within limits; raise a mound of stone 2 ft.base,  $1\frac{1}{2}$  ft.high, W.of cor.  
38.41 Ridge, brs.E. and W.; descend over S.slope 52 ft.  
42.98 Ravine, 12 lks.wide, course SE.; ascend over NE.slope, 45 ft.  
47.29 Spur, brs.NW and SE.; descend over SW. slope, 112 ft.  
52.75 Ravine, 15 lks.wide, course S.80°E.; ascend over NE.slope of spur, 182 ft.  
64.69 Spur, brs.E. and W.; descend over S.slope, 28 ft.  
66.64 Ravine, 10 lks.wide, course N.50°E.; ascend over NW.slope 332 ft.to  
77.80 Ridge, brs.N.80°W. and S.80°E.; descend over SW.slope, 20 ft.  
78.32 The cor.of secs. 5,6,7 and 8.  
Land, mountainous.  
Soil, stony, 3rd and 4th rate.  
Timber, scattering palo verde, mesquite and ironwood.  
Undergrowth, greasewood, catclaw and cacti.

The continued satisfactory adjustment of the solar apparatus during the survey of this township is indicated from field tests, as described in Book "C" page 3.

Boundaries of that portion of Township 3 North, Range 6 East, situate outside the Fort McDowell Indian Reservation.

Latitudes, Departures and Closing Errors.

Line designated.	True bearing.	Dist.	Latitudes.		Departures.	
			N.	S.	E.	W.
Subdivisional boundary.	N.89°57'W.	42.94	.04			42.94
	West,	160.12				160.12
	S.89°57'W.	79.96		.07		79.96
	N.89°50'W.	79.72	.23			79.72
West boundary,	North,	398.00	398.00			
North boundary,	N.89°48'E.	409.36	1.43		409.36	
East boundary, (West boundary Ft. McDowell Indian Reservation)	S.6°38'W.	33.46		33.23		3.86
	S.6°36'W.	40.00		39.73		4.60
	S.6°39'W.	40.00		39.73		4.63
	S.6°37'W.	39.88		39.61		4.59
	S.6°35'W.	39.96		39.70		4.58
	S.6°38'W.	39.96		39.69		4.62
	S.6°38'W.	40.06		39.69		4.63
	S.6°45'W.	40.00		39.72		4.70
	S.6°45'W.	40.07		39.79		4.71
	S.6°48'W.	40.14		39.86		4.75
	S.6°35'W.	8.91		8.85		1.02
Convergency,					.33	
Totals,			399.70	399.67	409.69	409.43
			399.67		409.43	
Error in latitude,			0.03			
Error in departure,					0.26	

GENERAL DESCRIPTION.

This township contains every variety of land from level valley to rough mountains, and the soil ranges from a medium rich stony clay loam to bare rock. The soil of the level and rolling lands in the eastern part of the township in the Verde River valley is of a sandy and gravelly loam, and will produce good crops with the aid of irrigation. The soil of the remaining portion of the township, which is rough and mountainous, can nearly all be classed as 3rd and 4th rate, and is covered with a variety of grasses and brush which furnish good pasture for stock, for which the land is at present most valuable.

The township is poorly watered, there being no water in any of the numerous water courses, except for short periods after heavy rains.

The entire portion of the township surveyed under this assignment is covered with a scattering growth of palo verde, mesquite and ironwood timber, none of which, however, being large enough to be of any value except for posts for fencing purposes, and for fuel.

GENERAL DESCRIPTION (continued).

No deposits of mineral, or beds of stone suitable for building purposes were discovered anywhere in the township during the survey.

There are no settlers residing in this township at the present time.

---



170

BOOK 3314  
38

CERTIFICATE OF UNITED STATES CADASTRAL  
ENGINEER.

I, Sidney E. Blout, U.S. Cad'l. Engineer, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General for Group 91, Arizona, bearing date of the 26th day of February, 1919, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the  
NORTH BOUNDARY, and  
SUBDIVISIONS of  
TOWNSHIP 3 NORTH, RANGE 6 EAST,

of the Gila and Salt River  
Base and Meridian, in the State of Arizona, which are represented in on dates shown on diagram the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General for Group 91, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

*Sidney E. Blout*  
U.S. Cadastral Engineer.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix, Arizona, September 4, 1920.

The foregoing field notes of the survey of \_\_\_\_\_  
Part of the \_\_\_\_\_  
NORTH BOUNDARY, and  
Part of the \_\_\_\_\_  
SUBDIVISION OF \_\_\_\_\_  
TOWNSHIP 3 NORTH, RANGE 6 EAST,

of the Gila and Salt River Base and Meridian, in the State of Arizona, executed by Sidney E. Blout, U.S. Cadastral Engineer, under his special instructions dated February 26, 1919, for Group 91, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

*Frank P. Smith*  
U. S. Surveyor General.

\*DMBP\*

I certify that the foregoing transcript of the field notes of the above-described surveys in \_\_\_\_\_, has been correctly copied from the original notes on file in this office.

XXXXXXXXXXXXXXXXXXXXXXXXXXXX

U. S. Surveyor General.