

BOOK 3315
FIELD NOTES

OF THE SURVEY OF

Part of the

SUBDIVISIONS,

AND RESURVEY OF

Part of the

EAST BOUNDARY of

TOWNSHIP 4 NORTH, RANGE 6 EAST,

and

1ST. STANDARD PARALLEL NORTH, THRU. RANGE 6 EAST,

Of the Gila and Salt River Base and Meridian,

In the State of Arizona.

EXECUTED BY

Sidney E. Blout,

*In the capacity of U. S. Cad. Eng'r, under Special Instructions dated February 26, 1919,
issued by the United States Surveyor General to govern surveys included in Group
No. 91, which were approved by the Commissioner of the General Land
Office, March 18, 1919, and Assignment Instructions dated March 21, 1919.*

Survey commenced May 5, 1919

Survey completed June 12, 1919.

3315

3315

3315

~~INDEX DIAGRAM.~~

Township _____, Range _____

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36


3315

Book "C"

1A

BOOK 3315
INDEX DIAGRAM.

T.4 N., R.6 E.

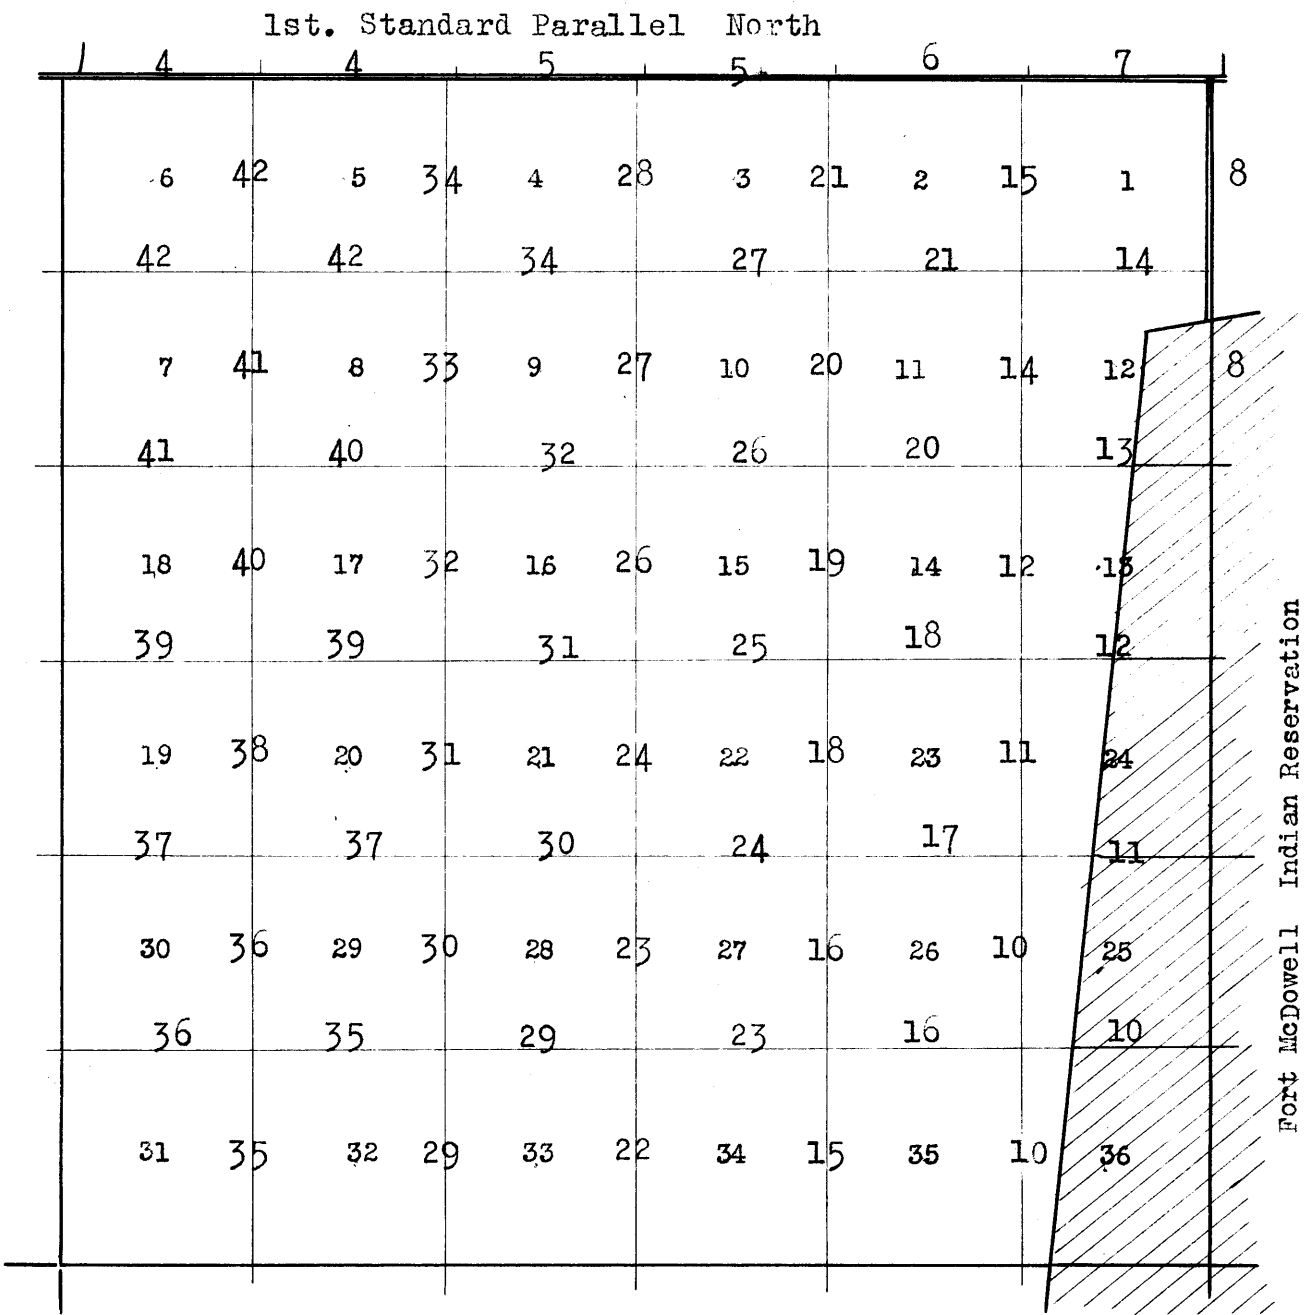

- Lines surveyed under this group.
- == Lines resurveyed under this group.
- Lines surveyed.
- //// Areas surveyed as per accepted plats on file.

BOOK 3315

Book "C"

Group 91, Arizona.

T.4 N.R.6 E.

DATE DIAGRAM.

1st Standard Parallel North

6-11-19	6-11-19	6-12-19	6-12-19	6-12-19	6-12-19
6 5-31-19	5 5-31-19	4 5-17-19	3 5-17-19	2 5-15-19	1 5-12-19
7 5-29-19	8 5-29-19	9 5-16-19	10 5-15-19	11 5-15-19	12 5-11-19
18 5-23-19	17 5-23-19	16 5-14-19	15 5-14-19	14 5-13-19	13 5-10-19
19 5-22-19	20 5-22-19	21 5-8-19	22 5-7-19	23 5-6-19	24 5-9-19
30 5-19-19	29 5-19-19	28 5-8-19	27 5-7-19	26 5-6-19	25 5-8-19
31 5-19-19	32 5-8-19	33 5-7-19	34 5-6-19	35 5-5-19	36 5-5-19

Port McDowell Indian Reservation

Executed on dates shown above by Sidney E. Blout,
U.S. Cadastral Engineer.

Resurveys and surveys commenced May 4, 1919, and executed on dates shown on diagram on page 2 hereof, by Sidney E. Blout, U.S. Cadastral Engineer, using a Buff light mountain transit No. 9984, with improved Smith solar attachment. The horizontal limb is provided with two double verniers placed opposite to each other, reading to single minutes of arc, which is also the least count of the verniers of the latitude and declination arcs. For certificate of approval, see Book "A."

All measurements are made with a Lufkin 5 chain steel tape, compared with a Chesterman Standard steel tape, and found correct. The measurements are all made on the slope, the vertical angle determined, and the slope measurements properly reduced to true horizontal distances.

Before commencing the survey of the subdivision lines in this township, examine the adjustments of the transit and correct the level and collimation errors; then, to test the solar apparatus by comparing the results of observations made on the sun during a.m. and p.m. hours with a meridian established by observations on Polaris, proceed as follows:

Set instrument over the south stake on the meridian established April 18, 1919, at camp near Old Fort McDowell, described in Book "B" of this group, and at 7h. 57m. a.m., l.m.t., May 4, 1919, set off $33^{\circ}38'N.$ on the lat. arc; $15^{\circ}47\frac{1}{2}'N.$ on the decl. arc, and determine a meridian with the solar, and mark a point thereof by a tally pin in stake already set 5 chs. N. of instrument on which the solar meridian falls 0.6 ins. E. of the meridian established by the Polaris observation.

At 2h. 57m. p.m., l.m.t., set off $33^{\circ}38'N.$ on the lat. arc; $15^{\circ}52'20''N.$ on the decl. arc, and determine a meridian with the solar, and mark a point thereof by a tally pin driven in the stake already set 5 chs. N. of instrument. This point falls 0.5 ins. W. of the meridian established by the Polaris observation.

The solar apparatus by p.m. and a.m. observations, defines positions for meridians, respectively, about $0'31'' E.$, and $0'26'' W.$ of the meridian established by the Polaris observation; therefore, conclude that the adjustments of the instrument are satisfactory.

Resurvey of First Std.Parallel North, thru. Range 6 East.

4

Chains.

Begin at the Standard cor. of T.5 N., Rs.5 and 6 E., reestablished by me, as described in Book "D," and resurvey the First Standard Parallel North, thru. Range 6 East, as per instructions.

As subdivisional closings on the Standard Parallel made during the progress of this survey will furnish satisfactory verification of the length of the lines, employ single set of chainmen.

Thence, East, on south boundary of sec.31.

Over rolling mesa land, thru. scattering timber and dense undergrowth.

30.30

Old road, brs. N and S.

40.00

Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished standard 1/4 sec. cor., marked on brass cap,

S C
1/4 S 31

1919

from which,

A mesquite, 10 ins. in diam., brs. N. 9° E., 125 lks. dist., marked S C 1/4 S 31 BT.

A mesquite, 12 ins. in diam., brs. N. 11 1/4° W., 121 lks. dist., marked S C 1/4 S 31 BT.

No trace of the old standard 1/4 sec. cor. can be found after diligent search.

63.30

Wash, 10 lks. wide, 2 ft. deep, course SE.

80.00

Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for reestablished standard cor. of secs. 31 and 32, marked on brass cap

S C
T5N | R6E
S31 | S32

1919

from which,

A palo verde, 6 ins. in diam., brs. N. 29 1/2° E., 166 lks. dist., marked S C T 5 N R6E S32 BT.

A palo verde, 6 ins. in diam., brs. N. 44 1/2° W., 131 lks. dist., marked S C T5N R6E S31 BT.

No trace of the old standard cor. of secs. 31 and 32 can be found after diligent search.

Land, rolling.

Soil, sandy, 2nd and 3rd rate.

Timber, palo verde, mesquite and ironwood.

Undergrowth, greasewood and catclaw, 5 to 7 ft. high.

East, on S. bdy. of sec. 32.

Over rolling land, thru. scattering timber and undergrowth.

40.00

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished standard 1/4 sec. cor., marked on brass cap,

S C
1/4 S 32

1919

from which,

A palo verde, 6 ins. in diam., brs. N. 33 1/2° E., 202 lks. dist., marked S C 1/4 S 32 BT.

A palo verde, 6 ins. in diam., brs. N. 32° W., 242 lks. dist., marked S C 1/4 S 32 B T.

Chains.

No trace of the old standard $\frac{1}{4}$ sec. cor. can be found after diligent search.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for reestablished standard cor. of secs. 32 and 33, marked on brass cap,

S | C
T5N | R6E
S32 | S33

1919

from which,

A palo verde, 8 ins. in diam., brs. N. 13° E., 313 lks. dist., marked SC T5N R6E S33 BT.

A palo verde, 6 ins. in diam., brs. N. 46 $\frac{1}{2}$ ° W., 261 lks. dist. marked S C T5N. R6E S32 BT.

No trace of the old standard cor. of secs. 32 and 33 can be found after diligent search.

Land, rolling.

Soil, sandy and gravelly, 2nd and 3rd rate.

Timber, palo verde and mesquite.

Undergrowth, greasewood and catclaw, 6 ft. high.

East, on S. bdy. of sec. 33.

Over rolling, mesa land, thru. scattering timber and dense undergrowth.

6.00 Dry sand wash, 6 lks. wide, 2 $\frac{1}{2}$ ft. deep, course SE.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished standard $\frac{1}{4}$ sec. cor., marked on brass cap,

S C
 $\frac{1}{4}$ S 33

1919

from which,

A palo verde, 6 ins. in diam., brs. N. 44 $\frac{1}{2}$ ° E., 131 lks. dist., marked SC $\frac{1}{4}$ S 33 BT.

A palo verde, 8 ins. in diam., brs. N. 33 $\frac{1}{2}$ ° W., 154 lks. dist., marked SC $\frac{1}{4}$ S 33 B T.

No trace of the old standard $\frac{1}{4}$ sec. cor. can be found.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for reestablished standard cor. of secs. 33 and 34, marked on brass cap,

S | C
T5N | R6E
S33 | S34

1919

from which,

A palo verde, 5 ins. in diam., brs. N. 62 $\frac{1}{2}$ ° E., 82 lks. dist., marked SC T5N R6E S34 BT.

A palo verde, 6 ins. in diam., brs. N. 71 $\frac{3}{4}$ ° W., 186 lks. dist., marked SC T5N R6E S33 BT.

No trace of the old standard cor. of secs. 33 and 34 can be found after diligent search.

Land, rolling mesa.

Soil, sandy, 2nd and 3rd rate.

Timber, palo verde and mesquite.

Undergrowth, greasewood and catclaw brush, 6 ft. high.

East on S. bdy. of sec. 34.

Over rolling land, thru. scattering timber and undergrowth.

Chains.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished standard $\frac{1}{4}$ sec. cor., marked on brass cap,

S C
 $\frac{1}{4}$ S 34

1919

from which,

An ironwood, 24 ins. in diam., brs. N. $60\frac{1}{2}^{\circ}$ E., 191 lks. dist., marked S C $\frac{1}{4}$ S 34 BT.

A palo verde, 8 ins. in diam., brs. N. $80\frac{1}{2}^{\circ}$ W., 181 lks. dist., marked SC $\frac{1}{4}$ S 34 BT.

61.80 Road from the Verde River valley to E. O. Brown's ranch, brs. NW. and SE.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished standard cor. of secs. 34 and 35, marked on brass cap,

S C
T5N R6E
S34 S35

1919

from which,

An ironwood, 20 ins. in diam., brs. N. $71\frac{1}{2}^{\circ}$ E., 60 lks. dist., marked SC T5N R6E S35 BT.

A palo verde, 8 ins. in diam., brs. N. $49\frac{3}{4}^{\circ}$ W., 30 lks. dist., marked SC T5N R6E S34 BT.

No trace of the old standard cor. of secs. 34 and 35 can be found.

Land, rolling mesa.

Soil, sandy and gravelly, 2nd and 3rd rate.

Timber, palo verde, mesquite and greasewood.

Undergrowth, greasewood brush, 5 ft. high.

East, on south boundary of sec. 35.

25.00 Over rolling land, thru scattering timber and undergrowth. Leave rolling land, brs. N. and S.; enter Asher Hills; ascend W. slope of stony ridge, 29 ft.

28.40 Ridge, brs. NW. and SE.; descend over NE. slope, 29 ft.

34.16 Ravine, 10 lks. wide, course NE.; ascend over SW. slope, 169 ft.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished standard $\frac{1}{4}$ sec. cor., marked on brass cap,

S C
 $\frac{1}{4}$ S 35

1919

No trees suitable for bearing trees within limits; raise a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

No trace of the old standard $\frac{1}{4}$ sec. cor. can be found at this point.

50.74 Ridge, brs. N. and S.; descend over E. slope, 160 ft.

60.85 Ravine, 15 lks. wide, course SE.; ascend over SW. slope, 85 ft.

69.40 Point of ridge, brs. N. and S.; descend over E. slope, 156 ft.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished standard cor. of secs. 35 and 36, marked on brass cap,

Resurvey of First Standard Parallel North thru Range 6 East.

Chains.

S C
T5N R6E
S35 S36

1919

No trees suitable for bearing trees available; raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor. No trace of the old standard cor. of secs. 35 and 36 can be found at this point.
Land, rolling and hilly.
Soil, sandy, gravelly and stony, 2nd, 3rd and 4th rate.
Timber, palo verde, mesquite and ironwood.
Undergrowth, greasewood and catclaw brush, 6 ft. high.

- 14.99 East, on south bdy. of sec. 30. Descend E. slope, 23 ft., thru scattering timber and brush. Wash, 15 lks. wide, course SE.; ascend over SW. slope of ridge, 22 ft.
- 15.50 Ridge, brs. NW. and SE.; descend over NE. slope, 34 ft.
- 20.60 Foot of descent; leave Asher Hills, brs. NW. and SE.; enter rolling land.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished standard ¼ sec. cor., marked on brass cap,

S C
¼ S 36

1919

from which,
A palo verde; 6 ins. in diam., brs. N. 46½° E., 70 lks. dist., marked S C ¼ S 36 BT.
A palo verde, 6 ins. in diam., brs. N. 29½° W., 41 lks. dist., marked S C ¼ S 36 BT.

- 64.20 No trace of the old standard ¼ sec. cor. can be found. Wash, 10 lks. wide, 4 ft. deep, course SE.
- 80.00 Set an iron post, 3 ft. long, 3 ins. in diam., 24 ins. in the ground, for reestablished standard cor. of T. 5 N., Rs. 6 and 7 E., marked on brass cap,

S C
T5N
R6E R7E
S36 S31

1919

from which,
An ironwood, 8 ins. in diam., brs. N. 72½° E., 100 lks. dist., marked SC T5N R7E S31 BT.
A palo verde, 8 ins. in diam., brs. N. 34½° W., 125 lks. dist., marked SC T5N R6E S36 BT.
Find no trace of the original standard cor. of T. 5 N., Rs. 6 and 7 E.
Land, rolling and hilly.
Soil, sandy and stony, 2nd and 3rd rate.
Timber, palo verde, mesquite and ironwood.
Undergrowth, greasewood, and catclaw brush, 4 ft. high.

8. Resurvey of a portion of East bdy. of Township 4 North, Range 6 East

Chains

From the closing cor. of secs. 7 and 12, on the East bdy. of the Tp. (at the intersection with the North bdy. of the Fort McDowell Indian Reservation) which is an iron post 3 ins. in diam., 12 ins. above the ground, firmly set, marked and witnessed as described by the surveyor general, resurvey that portion outside the Indian Reservation, destroying all evidence of former survey of this portion of township line, as per instructions, as follows:

North, bet. secs. 7 and 12.
Over rolling land, thru. timber and heavy brush.
14.90 Wash, 10 lks. wide, 2 1/2 ft. deep, course E.
18.96 (80.00 chs. from the cor. of secs. 7, 12, 13 and 18),
Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 1, 6, 7 and 12, marked on brass cap,




1919

from which,
A palo verde, 8 ins. in diam., brs. N. 43 1/2° E., 110 lks. dist., marked T4N R7E S6 BT.
A palo verde, 8 ins. in diam., brs. S. 69° E., 50 lks. dist., marked T4N R7E S7 BT.
A palo verde, 6 ins. in diam., brs. S. 24 1/2° W., 76 lks. dist., marked T4N R6E S12 BT., and
A palo verde, 8 ins. in diam., brs. N. 81 1/2° W., 134 lks. dist., marked T4N R6E S1 BT.

Land, rolling.
Soil, sandy, 2nd rate.
Timber, palo verde, mesquite and ironwood.
Undergrowth, dense greasewood brush 4 to 5 ft. high.

North, bet. secs. 1 and 6.
Over rolling, sandy land, thru. scattering timber and undergrowth.
5.80 Road from the Verde River valley to Paradise Valley, brs. NW. and SE.
15.00 Wash, 12 lks. wide, 4 ft. deep, course E.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor., marked on brass cap,



from which an
An ironwood, 8 ins. in diam. brs. N. 57 3/4° E., 146 lks. dist., marked 1/4 S 6 B T.
A palo verde, 6 ins. in diam., brs. S. 31 3/4° W., 182 lks. dist., marked 1/4 S. 1 BT.
62.00 Wash, 12 lks. wide, 3 ft. deep, course S. 70° E.
70.00 Old road brs. E. and W.
78.74 Intersect the First Standard Parallel North 331 lks. W. of the reestablished standard cor. of T. 5 N., Rs. 6 and 7, E., hereinbefore described.
At point of intersection,
Set an iron post 3 ft. long, 3 ins. in diam., 24 ins. in

Resurvey of portion of East bdy. of Township 4 North, Range 6 East. 9

Chains.

the ground for reestablished closing cor. of T.4 N., Rs. 6 and 7 E., marked on brass cap,

T5N R6E
S36
S 6 | S 1
R6E | R7E
C | C
T4N
1919.

from which,

A palo verde, 8 ins. in diam., brs. S.72°E., 106 lks. dist., marked CC T4N R7E S1 BT.

A palo verde, 8 ins. in diam., brs. S.67°W., 96 lks. dist., marked CC T4N R6E S6 BT.

Land, rolling.

Soil, sandy, 2nd rate.

Timber, palo verde, mesquite, and ironwood.

Undergrowth, greasewood brush, 6 ft. high.

Boundaries of that portion of T.4 N. R.6 E., lying outside of the Fort McDowell Indian Reservation.

Latitudes, Departures and Closing Errors.

Line designated.	True bearing.	Dist.	Latitudes.		Departures.	
			N.	S.	E.	W.
South boundary,	S.89°48'W.	409.36		1.43		409.36
West boundary,	North,	478.54	478.54			
North boundary, (1st. Std. Par. N.)	East,	478.69			478.69	
East boundary, (Ft. McD. Indian Reservation Boundary),	South,	97.76		97.76		
	S.80°26'W.	26.20		4.35		25.84
	S.6°30'W.	11.78		11.70		1.33
	S.6°38'W.	40.20		39.93		4.64
	S.6°45'W.	40.10		39.82		4.71
	S.6°45'W.	40.15		39.87		4.72
	S.6°39'W.	40.00		39.73		4.63
	S.6°40'W.	40.06		39.79		4.65
	S.6°43'W.	40.10		39.82		4.69
	S.6°42'W.	40.13		39.85		4.68
	S.6°45'W.	40.00		39.72		4.70
	S.6°43'W.	40.02		39.74		4.68
S.6°38'W.	6.54		6.50		.76	
Convergency,					.44	
Totals,		478.54	480.01	479.13	479.39	479.13
			478.54			
Error in latitude,			1.47			
Error in departure,					0.26	

BOOK 3315

10. Completion of Subdivision lines of Township 4 North, Range 6 East.

Chains.

- From the corner of secs. 1, 2, 35 and 36, on the South bdy. of the Tp., described in Book "B,"
 N.0°01' W., bet. secs. 35 and 36.
 Over stony, hilly land, thru. scattering timber and undergrowth. Ascend S slope of ridge, 80 ft.
 10.33 Ridge, brs. E and W.; descend over N. slope, 55 ft.
 18.88 Wash, 200 lks. wide, course E.; ascend over S. slope, 47 ft.
 39.15 Ridge, brs. E. and W.; descend over N. slope, 29 ft.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
 S35 | S36
 1919

from which,

- A palo verde, 6 ins. in diam., brs. N.85 $\frac{1}{2}$ °W., 47 lks. dist., marked $\frac{1}{4}$ S 35 BT.
 An ironwood, 5 ins. in diam., brs. S.82 $\frac{1}{2}$ °E., 225 lks. dist., marked $\frac{1}{4}$ S 36 BT.
 48.38 Old road, brs. E. and W.
 58.68 Wash, 125 lks. wide, course S.50°E.; ascend over SW. slope, 18 ft.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 25, 26, 35 and 36, marked on brass cap,

T4N | R6E
 S26 | S25
 S35 | S36
 1919

No trees suitable for bearing trees available; raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Land, hilly.

Soil, gravelly and stony, 2nd and 3rd rate.

Timber, mesquite, palo verde and ironwood.

- 19.27 N.89°48'E., on a random line line, bet. secs. 25 and 36. Fall 3 lks. N. of the closing cor. of secs. 25 and 36 on the W. bdy. of the Fort McDowell Indian Reservation, which is an iron post, 1 in. in diam., 14 ins. above ground, firmly set, marked and witnessed as described by the surveyor general.
 Thence,
 S.89°53'W., on a true line, bet. secs. 25 and 36, completing the mile.
 Over rolling land, thru. timber and undergrowth. Ascend NE. slope.
 19.27 The cor. of secs. 25, 26, 35 and 36. (80.02 chs. from cor. of secs. 25, 30, 31 and 36, on E. bdy. of Tp.).
 Land, rolling and hilly.
 Soil, sandy and gravelly, some stone, 2nd and 3rd rate.
 Timber, palo verde, mesquite and ironwood.
 Undergrowth, greasewood and catclaw brush, 5 ft. high.


- N.0°01' W., bet. secs. 25 and 26.
 Over rolling land, thru. scattering timber and undergrowth. Ascend SW. slope, 18 ft.
 4.40 Ridge, brs. NW. and SE.; descend over NE. slope, 25 ft.
 6.16 Wash, 12 lks. wide, course SE.; ascend over SW. slope of ridge, 15 ft.
 10.89 Road from Fort McDowell to Paradise Valley, brs. N.70°W. and S.70°E.

Completion of Subdivision lines of Township 4 North, Range 6 East. 11

Chains.

17.09 Center of dry sand wash, 200 lks.wide, course S 80°E.; asc. over SW.slope, 47 ft.

40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec.cor., marked on brass cap,



from which,

A palo verde, 8 ins. in diam., brs.N.65°E., 105 lks.dist., marked 1/4 S 25 BT.


A palo verde, 10 ins. in diam., brs.S.67°W., 112 lks.dist., marked 1/4 S 26 BT.

45.10 Ridge, brs.N. 70°W. and S 70°E.; descend over NE.slope, 48 ft.

50.25 Wash, 30 lks.wide, course S.60° E.; ascend over SW.slope, 29 ft.

61.90 Ridge, brs.NW. and SE.; descend over NE. slope, 9 ft.

80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 24 ins. in the ground, for cor.of secs. 23, 24, 25 and 26, marked on brass cap,



from which,

A palo verde, 7 ins. in diam., brs.N.21°E., 157 lks.dist., marked T4N R6E S24 BT.

A palo verde, 6 ins. in diam., brs.S.57°E., 312 lks.dist., marked T4N R6E S25 BT.

An ironwood, 14 ins. in diam., brs.S.61°W., 110 lks. dist., marked T4N R6E S26 BT., and

A palo verde, 8 ins. in diam., brs.N.22°W., 90 lks.dist., marked T4N R6E S23 BT.

Land, rolling and hilly.
Soil, sandy, gravelly and stony, 2nd and 3rd rate.
Timber, palo verde, mesquite and ironwood.
Undergrowth, greasewood brush and cacti.

28.68 N. 89°53'E., on a random line, bet. secs. 24 and 25. Fall 2 lks.N. of the closing cor. of secs. 24 and 25 on the W. bdy. of Ft. McDowell Indian Reservation, which is an iron post 1 in. in diam., 12 ins. above ground, firmly set, marked and witnessed, as described by the surveyor general.

Thence, S. 89°57'W. on a true line, bet. secs. 24 and 25, completing the mile.

13.88 Over rolling land, thru scattering timber and undergrowth. Wash, 20 lks.wide, course S.50°E.; ascend NE.slope, 10 ft.

28.68 The cor. of secs. 23, 24, 25 and 26 (79.86 chs. from cor. of secs. 19, 24, 25 and 30, on E. bdy. of Tp.)

Land, rolling and hilly.
Soil, gravelly and stony, 2nd and 3rd rate.
Timber, palo verde, mesquite and ironwood.
Undergrowth, greasewood and catclaw brush, 6 ft. high.


N. 0°01'W., bet. secs. 23 and 24.
Over rolling land, thru scattering timber and heavy brush.

11.60 Ravine, 20 lks. wide, banks 20 ft. high, course SE.; ascend over SW. slope, 20 ft.

17.30 Ridge, brs.NW. and SE.; descend over NE.slope, 12 ft.

Chains.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,




from which,

A palo verde, 8 ins. in diam., brs. S. 16° W., 136 lks. dist., marked 1/4 S 23 BT.

A palo verde, 8 ins. in diam., brs. S. 64° E., 145 lks. dist., marked 1/4 S 24 B T.

44.00 Wash, 30 lks. wide, course SE.; ascend over SW. slope, 121 ft., over stony hilly land.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 13, 14, 23 and 24, marked on brass cap,



No trees suitable for bearing trees available; raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling and hilly.

Soil, gravelly and stony, 2nd and 3rd rate.

Timber, palo verde, mesquite, and ironwood.

Undergrowth, greasewood and cacti brush, 5 ft. high.

38.12 N. 89° 57' E. on a random line, bet. secs. 13 and 24. Fall 3 lks. N. of the closing cor. of secs. 13 and 24, on the West bdy. of the Fort McDowell Indian Reservation, which is an iron post, 1 in. in diam., 12 ins. above ground, firmly set, marked and witnessed as described by the surveyor general.

Thence,

West, on a true line, bet. secs. 13 and 24, completing the mile.

Over stony hilly land, thru. scattering timber and undergrowth. Ascend NE. slope of ridge, 78 ft.

26.32 Ridge, brs. NE. and SW.; descend over NW. slope, 131 ft.

30.26 Wash, 20 lks. wide, course NE.; ascend over SE. slope, 201 ft.

37.62 Summit of stony ridge, brs. NW. and SE.; descend over SW. slope, about 4 ft.

38.12 The cor. of secs. 13, 14, 23 and 24 (79.92 chs. from cor. of secs. 13, 18, 19 and 24 on E. bdy. of Tp.)

Land, hilly.

Soil, stony, 2nd and 3rd rate.

Timber, palo verde, mesquite and ironwood.

Undergrowth, greasewood brush and cacti.

N. 0° 1' W., bet. secs. 13 and 14.

Over hilly land, thru. scattering timber and brush. Ascend SW. slope, 121 ft.

1.40 Ridge, brs. NW. and SE.; descend over NE. slope, 46 ft.

6.35 Ravine, 8 lks. wide, course E.; ascend over S. slope, 46 ft.

15.90 Ridge, brs. E. and W.; descend over N. slope, 91 ft. to

24.79 Wash, 15 lks. wide, course SE.; ascend over SW. slope, 98 ft.


29.46 Ridge, brs. NW. and SE.; descend over NE. slope, 228 ft.

39.64 Wash, 20 lks. wide, course N. 70° E.; ascend SE. slope, 44 ft.

Completion of Subdivision of Township 4 North, Range 6 East.


Chains.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,



No trees suitable for bearing trees within limits; raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

- 41.27 Stony ridge, brs. E. and W.; descend over N. slope, 62 ft.
- 56.22 Wash, 12 lks. wide, course E.; ascend over S. slope, 164 ft.
- 65.63 Ridge, brs. NW. and SE.; descend over NE. slope, 170 ft.
- 74.57 Wash, 15 lks. wide, course E.; ascend over S. slope, 57 ft.
- 77.00 Ridge, brs. E. and W.; descend over N. slope, 12 ft.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 11, 12, 13 and 14, marked on brass cap,



No trees suitable for bearing trees within limits; raise a mound of stone 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, hilly.
Soil, stony, 2nd and 3rd rate.
Timber, palo verde, mesquite and ironwood.
Undergrowth, greasewood brush 2 to 5 ft. high, and cacti.


East, on a random line, bet. secs. 12 and 13.

- 40.00 Set temp. 1/4 sec. cor.
- 47.64 Fall 18 lks. N. of the closing cor. of secs. 12 and 13 on the west bdy. of the Fort McDowell Indian Reservation, which is an iron post, 1 in. in diam., 14 ins. above ground, firmly set, marked and witnessed as described by the surveyor general.

Thence, N. 89° 47' W., on a true line, bet. secs. 12 and 13, completing the mile.

Ascend SE. slope of ridge. Over hilly land, thru. scattering timber and brush.

- 2.77 Ridge, brs. N. and S.; descend over W. slope, 74 ft.
- 7.67 (39.97 chs. from cor. of secs. 7, 12, 13 and 18, on E. bdy. of Tp.,) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,




from which,
A palo verde, 6 ins. in diam., brs. N. 38 1/2° W., 36 lks. dist., marked 1/4 S 12 B T.
An ironwood, 8 ins. in diam., brs. S. 43° E., 44 lks. dist., marked 1/4 S 13 BT.

- 13.22 Wash, 20 lks. wide, course S.; ascend over E. slope, 57 ft.
 - 28.26 Ridge, brs. N. and S.; descend over W. slope, 22 ft.
 - 42.75 Wash, 15 lks. wide, course SE.; ascend over NE. slope, 23 ft.
 - 47.67 The cor. of secs. 11, 12, 13 and 14 (79.94 chs. from cor. of secs. 7, 12, 13 and 18 on E. bdy. of Tp.)
- Land, hilly.
Soil, stony, 3rd rate.
Timber, scattering palo verde, ironwood and mesquite.
Undergrowth, greasewood brush and cacti.

14. Completion of Subdivision lines of Township 4 North, Range 6 East

Chains.

N.0°01'W., bet. secs.11 and 12.
 Descend NE.slope, 53 ft. Over hilly land, thru.scattering
 timber, and heavy brush undergrowth.
 4.50 Wash, 15 lks.wide, course SE.; ascend over SW. slope,315
 ft.
 36.65 Ridge (Lousley Hill) brs.NW. and SE.;descend over NE.slope,
 284 ft.
 40.00 Set an iron post 3 ft.long, 1 in. in diam.,26 ins. in
 the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,




from which,

A palo verde, 6 ins. in diam., brs.S.24 $\frac{3}{4}$ °E.,97
 lks.dist.,marked $\frac{1}{4}$ S 12 BT.

A palo verde, 8 ins. in diam., brs.N.30 $\frac{1}{4}$ °W.,116
 lks.dist., marked $\frac{1}{4}$ S 11 BT.

54.60 Wash, 16 lks.wide, course E.; leave hilly land, brs.E. a
 and W.; enter rolling, sandy land.

80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 24 ins. in
 the ground, for cor.of secs. 1,2,11 and 12, marked on
 brass cap,



from which,

A palo verde, 12 ins. in diam., brs.N.78 $\frac{1}{2}$ °E.,226
 lks.dist., marked T4N R6E S1 BT.

A palo verde, 6 ins. in diam., brs.S.48 $\frac{1}{4}$ °E.,38
 lks.dist., marked T4N R6E S12 BT.

A palo verde, 8 ins. in diam., brs.S.55 $\frac{1}{2}$ °W.,102
 lks.dist.,marked T4N R6E S11 BT., and

A palo verde,8 ins.in diam.,brs.N.25°W.,117 lks.
 dist., marked T4N R6E S2 BT.

Land, rolling and hilly.
 Soil,sandy and stony,2nd and 3rd rate.
 Timber, scattering palo verde, mesquite and ironwood.
 Undergrowth, greasewood brush, 4 ft.high, and cactus.

40.00 S.89°47'E., on a random line, bet. secs.1 and 12.
 Set temp. $\frac{1}{4}$ sec.cor.


79.96 Intersect the E. bdy. of Tp.,12 lks. N.of the cor.of
 secs.1,6;7 and 12, hereinbefore described.

Thence,

N.89°42'W., on a true line, bet. secs.1 and 12.

Over rolling land,thru. heavy timber and scattering brush.
 Old road brs.NE. and SW.

8.96
 39.98 Set an iron post, 3 ft.long, 1 in.in diam.,26 ins. in
 the ground for $\frac{1}{4}$ sec.cor., marked on brass cap,



from which,

A palo verde,8 ins. in diam., brs.N.43°W.,71
 lks.dist., marked $\frac{1}{4}$ S 1 BT.

A mesquite,8 ins. in diam., brs.S.44°W.,10 lks.
 dist., marked $\frac{1}{4}$ S 12 BT.

49.96 Wash,14 lks.wide, course SE.

52.70 Same wash, 15 lks.wide, 2 $\frac{1}{2}$ ft. deep, course NE.

79.96 The cor.of secs. 1,2,11 and 12.

Land, rolling.
 Soil,sandy,2nd rate.


Completion of Subdivision lines of Township 4 North, Range 6 East 15

Chains.

Timber, palo verde, mesquite, and ironwood.
Undergrowth, greasewood brush, 6 ft. high.

N.0°01'W., on a true line, bet. secs.1 and 2.
Over rolling, sandy land, thru. heavy timber, and scatter-
ing undergrowth.


- 24.50 Old road, brs.E. and W.
- 25.80 Wash, 18 lks.wide, 2½ ft. deep, course E.
- 40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in
the ground for ¼ sec.cor., marked on brass cap,



from which,

- A palo verde, 10 ins. in diam., brs.N.8½°E., 57
lks.dist., marked ¼ S 1 BT.
- An ironwood, 12 ins. in diam., brs.N.8¾°W., 59
lks.dist., marked ¼ S 2 BT.


- 47.00 Road from Verde River Valley to Paradise Valley, brs.E.
and W.
- 65.00 Wash, 20 lks.wide, 2 ft. deep, course E.
- 70.00 Foot of hills; leave rolling, sandy land, brs.N.70°E. and
S.70°W.; ascend SE.slope, 60 ft., over stony hilly land.
- 78.10 Intersect the First Standard Parallel North 336 lks.W.of
the reestablished standard cor. of secs.35 and 36, T.
5 N., R.6 E., hereinbefore described. At point of inter-
section,
Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
the ground for closing corner of secs.1 and 2, marked
on brass cap



No trees suitable for bearing trees within limits; raise
a mound of stone 2 ft, base, 1½ ft. high, S.of cor.
Land, rolling and hilly.
Soil, sandy and stony, 2nd and 3rd rate.
Timber, palo verde, mesquite and ironwood.
Undergrowth, & greasewood brush, 6 ft. high.

From the cor. of secs. 2, 3, 34 and 35 on S. bdy. of Tp.,
described in Book "B"
N. 0°01'W. bet. secs. 34 and 35.
Over hilly land, thru. scattering timber and undergrowth.
Ascend SW.slope of ridge, 32 ft.

- 2.45 Ridge, brs. NW. and SE.; descend over NE.slope 32 ft.
- 7.05 Wash, 10 lks.wide, course SE.; ascend over SW.slope, 103
ft.
- 14.05 Ridge, brs. NW. and SE.; descend over NE. slope 60 ft.
- 33.27 Ravine, 20 lks.wide, course SE.; ascend over SW.slope,
51 ft.
- 40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in
the ground, for ¼ sec.cor., marked on brass cap,



Chains.

from which,

A palo verde, 6 ins. in diam., brs. S. $77\frac{1}{2}^{\circ}$ E. 255 lks. dist., marked $\frac{1}{4}$ S 35 BT.A palo verde, 10 ins. in diam., brs. S. $14\frac{1}{2}^{\circ}$ W., 125 lks. dist., marked $\frac{1}{4}$ S 34 BT.

60.98 Top of stony ridge, brs. NW. and SE.; descend over NE. slope, 75 ft.

69.79 Wash, 15 lks. wide, course SE.; ascend over SW. slope, 78 ft.

74.17 Ridge, brs. NW. and SE.; descend over NE. slope, 96 ft.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs., 26, 27, 34 and 35, marked on brass cap,

T4N	R6E
S27	S26
S34	S35
1919	

No trees suitable for bearing trees within limits; raise a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, hilly.

Soil, stony, 2nd and 3rd rate,

Timber, palo verde, mesquite and ironwood.

Undergrowth, greasewood and catclaw brush 6 ft. high, and cacti.

40.00 N. $89^{\circ} 48'$ E., on a random line, bet. secs. 26 and 35. Set temp. $\frac{1}{4}$ sec. cor.

79.92 Intersect the corner of secs. 25, 26, 35 and 36.

Thence,

S. $89^{\circ} 48'$ W., on a true line, bet. secs. 26 and 35.

Over rolling land, along top of ridge, thru scattering timber and undergrowth.

5.50 Begin descent over SW. slope of ridge, 47 ft. to

22.37 Wash, 18 lks. wide, course SE.; ascend over NE. slope of ridge, 29 ft.

39.96 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 26	
S 35	
1919	

from which,

A palo verde, 6 ins. in diam., brs. N. $62\frac{1}{4}^{\circ}$ W., 226 lks. dist., marked $\frac{1}{4}$ S 26 BT.A palo verde, 4 ins. in diam., brs. S. 59° W., 188 lks. dist., marked $\frac{1}{4}$ S 35 BT.

43.00 Stony ridge, brs. NW. and SE.; descend over SW. slope, 14 ft. to

53.69 Wash, 10 lks. wide, course SE.; ascend over NE. slope, 49 ft.

63.46 Ridge, brs. NW. and SE.; descend over SW. slope, 21 ft.

74.04 Ravine, 12 lks. wide, course SE.; ascend over NE. slope, 14 ft.

79.92 The cor. of secs. 26, 27, 34 and 35.

Land, hilly and rolling.

Soil, stony, 2nd and 3rd rate.

Timber, palo verde, mesquite and ironwood.

Undergrowth, greasewood and ocotillo brush 6 ft. high.

N. $0^{\circ} 01'$ W., bet. secs. 26 and 27.

Over hilly land, thru scattering timber and undergrowth.


Descend NE. slope.

5.49 Wash, 12 lks. wide, course SE.; ascend over SW. slope, 44 ft.

Completion of Subdivision lines of Township 4 North Range 6 East 17


Chains.

- 31.40 Wash, 10 lks.wide, course SE.; ascend over SW.slope of ridge, 50 ft.
- 38.15 Ridge, brs. NW. and SE.; descend over NE. slope, 31 ft.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,



No trees suitable for bearing trees within limits; raise a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high, W.of cor.

- 40.99 Wash, 15 lks.wide, course SE.; ascend over SW.slope, 62 ft.
- 69.74 Ridge, brs. E. and W.; descend over N.slope, 27 ft.
- 71.18 Wash, 30 lks.wide, course S. 60° E.; ascend over SW.slope, 29 ft.
- 80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 24 ins.in the ground, for cor.of secs.22,23,26 and 27, marked on brass cap,




from which,

- A palo verde .4 ins.in diam., brs.N. $59\frac{3}{4}^\circ$ E., 225 lks. dist., marked T4N, R6E S23 BT.
- A palo verde, 8 ins. in diam., brs.S. $40\frac{1}{2}^\circ$ E., 250 lks.dist., marked T4N, R6E S26 BT.
- A palo verde, 6 ins. in diam., brs.S. 4° W., 144 lks. dist., marked T4N, R6E, S27 BT., and
- A palo verde, 8 ins.in diam., brs.N. $68\frac{1}{4}^\circ$ W., 145 lks.dist., marked T4N R6E, S22 BT.

Land, rolling hills.
 Soil, stony, 2nd and 3rd rate.
 Timber, palo verde, mesquite and ironwood.
 Undergrowth, greasewood brush and cacti, 4 to 6 ft.high.

- 40.00 N. $89^\circ 48'$ E., on a random line, bet. secs. 23 and 26. Set temp. $\frac{1}{4}$ sec.cor.
- 79.86 Intersect N. and S. line, 2 lks.S of the cor.of secs.23, 24, 25 and 26.
- Thence, S. $89^\circ 47'$ W., on a true line, bet. secs.23 and 26. Over hilly land, thru. scattering timber and brush. Ascend NE.slope of stony ridge.
- 33.60 Ridge, 114 ft. above sec.cor., bears NW. and SE.; descend over SW.slope, 108 ft.
- 39.00 Ridge, brs.NW. and SE. Enter narrow bottom along sand wash.
- 39.93 Set an iron post 3 ft.long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec.cor., marked on brass cap,



from which;

- A palo verde, 10 ins. in diam., brs.N. $51\frac{1}{4}^\circ$ W., 22 lks.dist., marked $\frac{1}{4}$ S 23 B T.
- A mesquite, 6 ins. in diam., brs.S. $51\frac{1}{4}^\circ$ W., 180 lka.dist., marked $\frac{1}{4}$ S 26 BT.
- 41.62 Dry sand wash, 35 lks.wide, course SE.; ascend over NE. slope, 50 ft., over hilly land.

18. Completion of Subdivision of Township 4 North, Range 6 East.

Chains.

63.99 Ridge, brs. NW. and SE.; descend over SW. slope, 17 ft.
 70.26 Road from Fort McDowell to Paradise Valley, brs. NW. and SE.
 79.86 The cor. of secs. 22, 23, 26 and 27.
 Land, rolling and hilly.
 Soil, stony, 2nd and 3rd rate.
 Timber, palo verde, ironwood and mesquite.
 Undergrowth, greasewood and ocotillo brush, 4 to 6 ft. high.

 N. 0° 01' W., bet. secs. 22 and 23.
 Over hilly land, thru scattering timber and undergrowth.
 7.00 Road from Fort McDowell to Paradise Valley, brs. NW. and SE.; ascend SW. slope, 35 ft., over hilly land.
 25.88 Ridge, brs. E. and W.; descend over N. slope, 14 ft.
 31.36 Wash, 10 lks. wide, course E.; ascend S. slope of ridge, 14 ft.
 32.00 Ridge, brs. E. and W.; descend over N. slope, 20 ft.
 34.26 Wash, 15 lks. wide, course E.; ascend S. slope, 10 ft.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
 S22 | S23
 1919

from which,

A palo verde, 8 ins. in diam., brs. S. 33 $\frac{1}{2}$ ° E., 30 lks. dist., marked $\frac{1}{4}$ S 23 BT.
 A palo verde, 6 ins. in diam., brs. S. 71° W., 93 lks. dist., marked $\frac{1}{4}$ S 22 BT.
 68.30 Dry sand wash, 8 lks. wide, 2 ft. deep, course E.
 78.30 Dry sand wash, 6 lks. wide, 2 $\frac{1}{2}$ ft. deep, course E.; ascend 3 ft. to
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 14, 15, 22 and 23, marked on brass cap,

T4N | R6E
 S15 | S14
 S22 | S23
 1919


from which,

A palo verde, 5 ins. in diam., brs. N. 21 $\frac{1}{2}$ ° E., 140 lks. dist., marked T4N R6E S14 BT.
 A palo verde, 12 ins. in diam., brs. S. 29° E., 115 lks. dist., marked T4N R6E S23 BT.
 A palo verde, 8 ins. in diam., brs. S. 60° W., 190 lks. dist., marked T4N R6E S22 BT.
 A palo verde, 5 ins. in diam., brs. N. 24 $\frac{1}{2}$ ° W., 80 lks. dist., marked T4N R6E S15 BT.
 Land, rolling and hilly.
 Soil, stony, 3rd rate.
 Timber, palo verde, mesquite and ironwood.
 Undergrowth, greasewood, and ocotillo brush, 4 to 6 ft. high.

 N. 89° 47' E., on a random line, bet. secs. 14 and 23.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.88 Intersect N. and S. line, at the cor. of secs. 13, 14, 23 and 24.
 Thence,
 S. 89° 47' W., on a true line, bet. secs. 14 and 23.
 Over hilly land, thru scattering timber and undergrowth.
 Descend W. slope of ridge, 42 ft.

Completion of Subdivision lines of Township 4 North, Range 6 East. 19

Chains.
 4.98 Wash, 15 lks. wide, course SE.; ascend over NE. slope, 174 ft.
 12.23 Ridge, brs. N.20°W. and S.20°E.; descend over SW. slope, 199 ft.
 27.65 Wash, 16 lks. wide, course SE.; ascend over NE. slope, 211 ft.
 39.94 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,




from which

A palo verde, 5 ins. in diam., brs. N.27°W., 120 lks. dist., marked $\frac{1}{4}$ S 14 BT.
 A palo verde, 6 ins. in diam., brs. S.58 $\frac{3}{4}$ °E., 93 lks. dist., marked $\frac{1}{4}$ S 23 BT.

41.18 Ridge, brs. NW. and SE.; descend over SW. slope, 144 ft.
 59.88 Wash, 15 lks. wide, course S.10°E.; leave hilly land, brs. N. and S.; enter rolling, gravelly land.
 65.38 Wash, 10 lks. wide, 3 ft. deep, course S.30°E.
 79.88 The cor. of secs. 14, 15, 22 and 23.
 Land, rolling, and hilly.
 Soil, gravelly and stony, 2nd and 3rd rate.
 Timber, palo verde, mesquite and ironwood.
 Undergrowth, greasewood and ocotillo brush and cacti.


N.0°01'W.; bet. secs. 14 and 15.
 Over rolling land, thru scattering timber and undergrowth.
 6:00 Wash, 8 lks. wide, 3 ft. deep, course SE.
 28.50 Wash, 10 lks. wide, 3 $\frac{1}{2}$ ft. deep, course SE.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,



from which,

A palo verde, 10 ins. in diam., brs. N.19°E., 167 lks. dist., marked $\frac{1}{4}$ S 14 BT.
 A palo verde, 12 ins. in diam., brs. S.70 $\frac{1}{2}$ °W., 128 lks. dist., marked $\frac{1}{4}$ S 15 BT.

42.00 Wash, 10 lks. wide, course SE.
 55.90 Wash, 14 lks. wide, 3 ft. deep, course S.50°E.
 62.40 Wash, 12 lks. wide, 2 $\frac{1}{2}$ ft. deep, course S.40°E.
 78.70 Wash, 15 lks. wide, 3 $\frac{1}{2}$ ft. deep, course SE.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 10, 11, 14 and 15, marked on brass cap,



from which,

A palo verde, 5 ins. in diam., brs. N.77°E., 50 lks. dist., marked T4N R6E S11 BT.
 A palo verde, 8 ins. in diam., brs. S.73 $\frac{3}{4}$ °E., 140 lks. dist., marked T4N R6E S14 BT.
 A palo verde, 12 ins. in diam., brs. S.58 $\frac{1}{4}$ °W., 75 lks. dist., marked T4N R6E S15 BT., and
 Crucifixion thorn, 8 ins. in diam., brs. N.40 $\frac{1}{4}$ °W., 207 lks. dist., marked T4N R6E S10 BT.

20 Completion of Subdivision lines of Township 4 North, Range 4 East.

Chains.

Land, rolling.
Soil, sandy and gravelly, 2nd and 3rd rate.
Timber, palo verde, mesquite and ironwood.
Undergrowth, greasewood and ocotillo brush, 6 ft. high.

40.00
79.86

N.89°47'E., on a random line, bet. secs.11 and 14.
Set temp. $\frac{1}{4}$ sec.cor.
Intersect the N. and S. line, 3 lks.N.of the cor. of secs.
11,12,13 and 14.

15.71

Thence,
S.89°48'W., on a true line, bet. secs.11 and 14.
Over hilly land, thru. scattering timber and undergrowth.
Ascend along N.slope.
Wash, 16 lks.wide, course N.20°E.; ascend over NE.slope,
211 ft.

39.93

Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in
the ground for $\frac{1}{4}$ sec.cor., marked on brass cap,

$\frac{1}{4}$ S 11
S 14
1919

from which,

A palo verde, 8 ins. in diam., brs.N.68 $\frac{1}{2}$ °E.,
168 lks.dist., marked $\frac{1}{4}$ S 11 BT.

A palo verde, 5 ins. in diam., brs.S.43°W., 32
lks.dist., marked $\frac{1}{4}$ S 14 B T.

44.46

Ridge, brs. NW. and SE.; descend over SW.slope, 160 ft.

58.83

Wash, 20 lks.wide, course S.35°E.; ascend over NE. slope,
105 ft.

73.90

Ridge, brs. N. and S.; descend over W. slope, 86 ft.

76.00

Foot of descent; leave hilly land, brs. N. and S.; enter
rolling land.

79.86

The cor.of Secs.10,11, 14 and 15.

Land, rolling and hilly.

Soil, sandy and stony, 2nd and 3rd rate.

Timber, palo verde, mesquite and scattering ironwood.

Undergrowth, mesquite brush.

N.0° 01'W., bet. secs.10 and 11.

Over rolling land, thru.scattering brush and timber; and
dense undergrowth.

17.20

Wash, 8 lks.wide, 2 ft. deep, course NE.

23.20

Wash, 10 lks.wide, 3 ft. deep, course NE.

26.40

Wash, 10 lks.wide, 2 $\frac{1}{2}$ ft. deep, course NE.

40.00

Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,

$\frac{1}{4}$
S10 | S11
1919

from which,

A palo verde, 6 ins. in diam., brs.S.74 $\frac{1}{2}$ °E., 119
lks.dist., marked $\frac{1}{4}$ S11 B T.

A palo verde, 6 ins. in diam., brs.S.29°W., 15
lks.dist., marked $\frac{1}{4}$ S 10 BT.

47.20

Dry sand wash, 15 lks.wide, 3 ft. deep, course E.

80.00

Set an iron post, 3 ft.long, 2 ins. in diam., 24 ins. in
the ground, for cor.of secs. 2,3,10 and 11, marked on
brass cap,

Completion of Subdivision lines of Township 4 North Range 6 East, 21
Chains.

T4N | R6E
S 3 | S 2
S10 | S11
1919

A palo verde, 6 ins. in diam., brs.N.33°E., 68
lks.dist., marked T4N R6E S2 BT.
A palo verde, 10 ins. in diam., brs.S.70½°E.,
198 lks.dist., marked T4N R6E S11 BT.
A palo verde, 10 ins. in diam., brs.S.65½°W.,
220 lks.dist., marked T4N, R6E S10 BT., and
A palo verde, 5 ins. in diam., brs.N.24½°W., 64
lks.dist., marked T4N, R6E S3 BT.

Land, rolling.
Soil, sandy and gravelly, 2nd and 3rd rate.
Timber, palo verde, mesquite and ironwood.
Undergrowth, greasewood and cacti.

40.00 N.89°48'E., on a random line, bet. secs. 2 and 11.
79.80 Set temp. ¼ sec.cor.
Intersect N. and S. line, 7 lks.N.of the cor.of secs.1,2,
11 and 12.
Thence,
S.89°51'W., on a true line, bet. secs.2 and 11.
19.00 Over rolling land, thru.scattering timber and undergrowth.
Ridge, leave rolling sandy land, brs.N. and S.; ascend
36.00 SE.slope, 121 ft., over stony, hilly land.
39.90 Ridge, brs.E. and W.; thence along top of ridge.
Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in
the ground, for ¼ sec.cor., marked on brass cap,

¼ S 2
S 11
1919

from which,
A palo verde, 8 ins. in diam., brs.N.79½°W., 264
lks.dist., marked ¼ S 2 BT.
A palo verde, 5 ins. in diam., brs.S.53½°E., 68
lks.dist., marked ¼ S 11 BT.

43.30 West end of ridge; descend over W.slope, 61 ft.
49.80 Foot of descent from ridge; leave hilly land, brs.N. and
S.; enter rolling, sandy land.
79.80 The cor.of secs.2,3,10 and 11.
Land, rolling and hilly.
Soil, sandy and stony, 2nd and 3rd rate.
Timber, palo verde, mesquite and ironwood.
Undergrowth, greasewood brush, 6 ft. high.

N.0° 01'W., on a true line, bet. secs. 2 and 3.
Over rolling, sandy land, thru.heavy timber and dense
undergrowth.
3.61 Road from the Verde River to Paradise Valley, brs.NE. and
SW.
10.00 Wash, 8 lks.wide, 2 ft. deep, course SE.
25.50 Wash, 10 lks.wide, 2½ ft. deep, course SE.
40.00 Set an iron post 3 ft.long, 1 in. in diam., 26 ins. in
the ground, for ¼ sec.cor., marked on brass cap,


¼
S 3 | S 2
1919

from which,
An ironwood, 8 ins. in diam., brs.N.21¾°W., 175

22: Completion of Subdivision of Township 4 North, Range 6 East.

Chains.

lks.dist., marked $\frac{1}{4}$ S 3 BT.
 A palo verde, 6 ins. in diam., brs.S.40 $\frac{3}{4}$ °E.,25
 lks.dist., marked $\frac{1}{4}$ S 2 B T.
 70.80 Wash, 15 lks.wide, 3 ft. deep, course SE.
 78.16 Intersect the First Standard Parallel North 295 lks.W.of
 the reestablished standard cor. of secs.34 and 35,T.5
 R.,6 E., as hereinbefore described. At point of in-
 tersection,
 Set an iron post, 3 ft.long, 2 ins. in diam., 24 ins. in
 the ground, for closing cor.of secs.2 and 3, marked on
 brass cap,



from which,


A palo verde, 6 ins. in diam., brs.S.52 $\frac{1}{2}$ °E., 91
 lks.dist., marked CC T4N,R6E S2 BT.
 An ironwood,10 ins. in diam., brs.S.16°W.,293
 lks.dist., marked CC T4N R6E S3 BT.

Land, rolling.
 Soil,sandy,2nd and 3rd rate.
 Timber,palo verde,mesquite and ironwood.
 Undergrowth, greasewood brush, 6 ft. high.

From the cor.of secs.3,4,33 and 34,on S.bdy.of Tp., de-
 scribed in Book "B,"

N.0°02'W., bet. secs. 33 and 34.
 Over hilly land,thru.scattering timber and undergrowth.
 Ascend SW.slope of ridge, 23 ft.

1.97 Ridge, brs.NW. and SE.; descend over NE.slope, 77 ft.
 8.46 Wash,15 lks.wide, course SE.; ascend over SW.slope, 75 ft.
 13.83 Ridge, brs.NW. and SE.; descend over NE.slope,90 ft.
 21.19 Wash, 18 lks.wide, course SE.; ascend over SW. slope,124
 ft.
 40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,




from which,

A palo verde, 5 ins. in diam., brs.N.34 $\frac{1}{4}$ °E.,28
 lks.dist., marked $\frac{1}{4}$ S 34 B T.
 A palo verde, 8 ins. in diam., brs.S.85 $\frac{1}{4}$ °W.,
 140 lks.dist., marked $\frac{1}{4}$ S 33 BT.

This cor.is situated on top of stony ridge, brs.NW. and
 SE.; descend over NE.slope,82 ft.

45.76 Wash,15 lks.wide, course SE.; ascend over SW.slope, 69
 ft.to
 50.09 Ridge, brs.NW. and SE.; descend over NE.slope,87 ft.to
 62.22 Wash,14 lks.wide, course SE.; ascend over SW.slope,16 ft.
 65.13 Ridge, brs.NW. and SE.; descend over NE.slope, about 12 ft.
 80.00 Set an iron post, 3 ft.long, 2 ins. in diam.,24 ins. in
 the ground, for cor.of secs.27,28, 33 and 34, marked
 on brass cap,



from which,

Completion of Subdivision lines of Township 4 North, Range 6 East. 23


Chains.

- A palo verde, 9 ins. in diam., brs. N.16°E., 166 lks. dist., marked T4N R6E S27 BT.
- A palo verde, 10 ins. in diam., brs. S.81°E., 321 lks. dist., marked T4N R6E S34 BT.
- A palo verde, 8 ins. in diam., brs. S.20°W., 98 lks. dist., marked T4N, R6E S33 BT.
- A palo verde, 5 ins. in diam., brs. N.70°W., 159 lks. dist., marked T4N R6E S28 BT.

Land, hilly.
 Soil, stony, 3rd rate.
 Timber, palo verde, mesquite, and ironwood.
 Undergrowth, greasewood and catclaw brush, and cacti.

- 40.00
- 79.98
- 6.08
- 19.34
- 26.72
- 36.01
- 39.99

N.89°48'E., on a random line, bet. secs. 27 and 34.
 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect the corner of secs. 26, 27, 34 and 35.
 Thence,
 S.89°48'W., on a true line, bet. secs. 27 and 34.
 Over hilly land, thru scattering timber and undergrowth.
 Ascend NE. slope of ridge, 16 ft.
 Ridge, brs. NW. and SE.; descend over SW. slope, 20 ft.
 Wash, 10 lks. wide, course SE.; ascend over NE. slope, 86 ft.
 Ridge, brs. NW. and SE.; descend over SW. slope, 16 ft.
 Wash, 12 lks. wide, course SE.; ascend over NE. slope, 59 ft.
 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,




from which,

- 42.40
- 46.28
- 58.70
- 68.69
- 79.98

A palo verde, 5 ins. in diam., brs. N.3 $\frac{3}{4}$ °E., 214 lks. dist., marked $\frac{1}{4}$ S 27 BT.
 A palo verde, 5 ins. in diam., brs. S.3 $\frac{1}{2}$ °W., 129 lks. dist., marked $\frac{1}{4}$ S 34 BT.
 Ridge, brs. NW. and SE.; descend over SW. slope, 81 ft.
 Wash, 15 lks. wide, course SE.; ascend over NE. slope of ridge, 83 ft.
 Ridge, brs. NW. and SE.; descend over SW. slope, 64 ft.
 Wash, 30 lks. wide, course SE.; ascend over NE. slope, 10 ft. to
 The cor. of secs. 27, 28, 33 and 34.
 Land, hilly.
 Soil, stony, 3rd rate.
 Timber, palo verde, mesquite and ironwood.
 Undergrowth, greasewood and ocotillo brush, 4 to 6 ft. high.

- 21.49
- 29.65
- 38.68
- 40.00

N.0°02'W., bet. secs. 27 and 28.
 Over hilly land, thru scattering timber and undergrowth.
 Descend NE. slope of ridge, 7 ft.
 Wash, 30 lks. wide, course SE.; ascend over SW. slope, 90 ft.
 Ridge, brs. NW. and SE.; descend over NE. slope, 63 ft.
 Wash, 20 lks. wide, course SE.; ascend over SW. slope, 70 ft.
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,



from which,

- A palo verde, 6 ins. in diam., brs. N.45°E., 66 lks. dist., marked $\frac{1}{4}$ S 27 BT.
- A palo verde, 4 ins. in diam., brs. S.34°W., 18 lks. dist., marked $\frac{1}{4}$ S 28 BT.

24. Completion of Subdivision lines of Township 4 North Range 6 East.

Chains.
 49.16 Ridge, brs.NE. and SE; descend over NE.slope, 83 ft.
 54.39 Wash, 15 lks.wide, course SE.; ascend over SW.slope, 112 ft.
 62.47 Ridge, brs. NW. and SE.; descend over NE.slope, 83 ft.
 74.28 Wash, 18 lks.wide, course SE.; ascend over SW.slope, 14 ft.
 80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 24 ins. in the ground, for cor.of secs.21,22,27 and 28, marked on brass cap,

T4N	R6E
S21	S22
S28	S27

1919

from which,

A palo verde, 5 ins. in diam., brs.N.74°E., 296 lks.dist., marked T4N.R6E S22 BT.

A palo verde, 6 ins. in diam., brs.S.88½°E., 320 lks.dist., marked T4N,R6E S27 BT.

A palo verde, 6 ins. in diam., brs.S.82½°W., 405 lks.dist., marked T4N R6E S 28 BT.

A palo verde, 5 ins. in diam., brs. N.78°W., 367 lks.dist., marked T4N R6E S21 BT.

Land, hilly.

Soil, stony, 3rd rate.

Timber, palo verde, mesquite and ironwood.

Undergrowth, greasewood and ocotillo brush, 4 to 6 ft. high.

40.00 N.89°48'E., on a random line, bet. secs.22 and 27.
 80.04 Set temp.¼ sec.cor.
 Intersect N. and S. line, 5 lks.S. of the cor. of secs.22, 23, 26 and 27,
 Thence,
 S.89°45'W., on a true line, bet. secs.22 and 27.
 Over rolling land, thru.scattering timber and undergrowth.
 7.84 Wash, 40 lks.wide, 3 ft. deep, course SE.
 40.02 Set an iron post 3 ft.long; 1 in. in diam., 26 ins. in the ground, for ¼ sec.cor., marked on brass cap,

¼	S 22
	S 27
	1919

from which,

A palo verde, 14 ins. in diam., brs.N.73½°E., 60 lks.dist., marked ¼ S 22 BT.

A palo verde, 8 ins. in diam., brs.S.1¼°W., 170 lks.dist., marked ¼ S 27 BT.

40.50 Wash, 40 lks.wide, 3½ ft.deep, course N.70°E.

60.00 Ascend SE.slope of ridge, 29 ft.

64.15 Ridge, brs.NW. and SE.; descend over SW.slope, 8 ft.

70.85 Wash, 25 lks.wide, course SE.; ascend over NE.slope, 14 ft. to

80.04 The cor.of secs.21,22,27 and 28.

Land, rolling, stony hills.

Soil, gravelly and stony, 2nd and 3rd rate.

Timber, palo verde, mesquite and ironwood.


Undergrowth, greasewood and ocotillo brush.

N.0° 02'W., bet. secs.21 and 22.
 Over hilly land, thru.scattering timber and undergrowth.
 Ascend S.slope of ridge, 14 ft.
 1.90 Ridge, brs.E. and W.; descend over N.slope, 9 ft.
 3.90 Wash, 10 lks.wide, course S.60°E.; ascend over SW.slope, 19 ft.
 16.00 Ridge, brs.NW. and SE.; descend over NE.slope, 30 ft.


Completion of Subdivision of Township 4 North Range 6 East. 25

Chains.

- 17.22 Wash, 15 lks.wide, course SE.; ascend SW.slope, 10 ft.
- 22.89 Ridge, brs.E. and W.; descend over N.slope, 71 ft.
- 23.00 The dwelling house on the "Pemberton Ranch" brs.E. about 17.00 chs.dist.
- 25.11 Ravine, 6 lks.wide, course S.70°E.; ascend SW.slope, 71 ft.
- 31.90 Ridge, brs.E. and W.; descend over N.slope, 57 ft.
- 37.30 Wash, 20 lks.wide, course S.80°E.; ascend over SW.slope, 55 ft.
- 40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,



- No trees suitable for bearing trees within limits; raise a mound of stone, 2 ft.base, $1\frac{1}{2}$ ft. high, W.of cor.
- 41.73 Ridge, brs.N. 80°W. and S.80°E.; descend over NE, slope 57 ft.
- 43.60 Wash, 16 lks.wide, course S.85°E.; ascend over SW.slope, 66 ft.
- 51.22 Ridge, brs.E. and W.; descend over N.slope, 18 ft.
- 63.90 Wash, 20 lks.wide, course S.80°E.; ascend over SW. slope, 18 ft.
- 73.42 Ridge, brs.N.85°W. and S.85°E.; descend over NE.slope, 25 ft.
- 79.02 Road from Ft.McDowell to Paradise Valley, brs. NW. and SE.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 15, 16, 21 and 22, marked on brass cap,




from which,

- A paloverde, 9 ins. in diam., brs. N.69°E., 90 lks.dist., marked T4N R6E S 15 BT.
- A palo verde, 11 ins.in diam., brs.S.38 $\frac{1}{2}$ °E., 154 lks. dist., marked T4N R6E, S22 BT.
- A palo verde, 7 ins. in diam., brs.S.26 $\frac{1}{2}$ °W., 74 lks.dist., marked T4N R6E S 21 BT., and
- A palo verde, 8 ins. in diam., brs.N.58°W., 28 lks.dist., marked T4N R6E S16 BT.

Land, hilly.
 Soil, gravelly and stony, 2nd and 3rd rate.
 Timber, palo verde, mesquite and ironwood.
 Undergrowth, greasewood and ocotillo brush.

- 40.00 N.89°46'E., on a random line, bet. secs.15 and 22. Set temp. $\frac{1}{4}$ sec.cor.
- 80.10 Intersect N.and S.line, 10 lks.S.of the cor. of secs.14, 15, 22 and 23. Thence S.89°42'W., on a true line, bet. secs.15 and 22. Over rolling and hilly land, thru. scattering timber and dense undergrowth.
- 40.05 Set an iron post 3 ft.long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,



- No trees suitable for bearing trees within limits; raise a mound of stone 2 ft.base, $1\frac{1}{2}$ ft.high, N.of cor.
- 66.60 Bluffs along said wash, brs.NW. and SE. Descend over


26 Completion of Subdivision lines of Township 4 North, Range 6 East.

Chains.

70.00 SW. slope of bluffs, 28 ft.
 Foot of descent, leave rolling, hilly land, brs. NW. and SE.;
 enter level bottom land, along sand wash.
 78.00 Wash, 40 lks. wide, course S. 50° E.; banks 2½ ft. high.
 80.10 The cor. of secs. 15, 16, 21 and 22.
 Land, level, rolling and hilly.
 Soil, sandy and gravelly, 2nd and 3rd rate.
 Timber, palo verde, mesquite, and ironwood.
 Undergrowth, heavy greasewood and catclaw brush, 4 to 7
 ft. high.

N. 0° 02' W., bet. secs. 15 and 16.
 Over level land, along sand wash, thru. scattering timber
 and undergrowth.


4.50n Wash, 30 lks. wide, banks 2 ft. high, course S. 50° E.
 5.00 Leave level sandy land, brs. NW. and SE.; ascend SW. slope,
 34 ft., over hilly land.
 11.70 Ridge, brs. N. 80° W. and S. 80° E.; thence over low rolling,
 gravelly ridges.
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for ¼ sec. cor., marked on brass cap,



from which,

A palo verde, 6 ins. in diam., brs. N. 41° E., 155
 lks. dist., marked ¼ S 15 BT.
 A palo verde, 6 ins. in diam., brs. S. 35° W., 119
 lks. dist., marked ¼ S 16 BT.

66.00 Wash, 10 lks. wide, 3 ft. deep, course E.
 78.70 Wash, 15 lks. wide, 2½ ft. deep, course E.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins.
 in the ground for cor. of secs. 9, 10, 15 and 16, marked
 on brass cap,



1919

from which,

A palo verde, 5 ins. in diam., brs. N. 22½° E.
 88 lks. dist., marked T4N R6E S10 BT.
 A palo verde, 8 ins. in diam., brs. S. 53½° E.,
 144 lks. dist., marked T4N, R6E S15 BT.
 A palo verde, 6 ins. in diam., brs. S. 67½° W. 93
 lks. dist., marked T4N R6E, S16 BT., and
 A palo verde, 6 ins. in diam., brs. N. 68½° W.,
 37 lks. dist., marked T4N R6E S 9 BT.

Land, level, rolling and hilly.
 Soil, sandy and gravelly, 2nd and 3rd rate.
 Timber, palo verde, mesquite and ironwood.
 Undergrowth, greasewood and catclaw brush, 4 to 6 ft. high.

40.00 N. 89° 42' E., on a random line, bet. secs. 10 and 15.
 Set temp. ¼ sec. cor.
 80.08 Intersect N. and S. line, 3 lks. N. of the cor. of secs. 10,
 11, 14 and 15.
 Thence,
 S. 89° 43' W., on a true line bet. secs. 10 and 15.
 Over nearly level land, thru. scattering timber and under-
 growth.

Completion of Subdivision lines of Township 4 North Range 6 East 27

Chains.

40.04 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

1/4 S 10
S 15
1919

from which,
A palo verde, 10 ins. in diam., brs. N. 68°W., 13 lks. dist., marked 1/4 S 10 BT.
A palo verde, 6 ins. in diam., brs. S. 35 1/2°E., 78 lks. dist., marked 1/4 S 15 BT.

80.08 The cor. of secs. 9, 10, 15 and 16.
Land, rolling, nearly level.
Soil, sandy, 2nd rate.
Timber, palo verde, mesquite and ironwood.
Undergrowth, greasewood and catclaw brush, 6 ft. high.

N. 02° 02' W., bet. secs. 9 and 10.
Over rolling land, thru scattering timber and heavy undergrowth.

9.10 Wash, 12 lks. wide, 3 ft. deep, course E.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

1/4 S 9 S 10
1919

from which,
A palo verde, 8 ins. in diam., brs. S. 3 1/4°E., 218 lks. dist., marked 1/4 S 10 BT.
A palo verde, 6 ins. in diam., brs. S. 62 1/2°W., 80 lks. dist., marked 1/4 S 9 BT.

40.50 Wash, 15 lks. wide, 2 1/2 ft. deep, course SE.
72.50 Road from the Verde River valley to Paradise Valley, brs. E. and W.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 3, 4, 9 and 10, marked on brass cap,

T4N R6E
S 4 S 3
S 9 S 10
1919

from which,
A palo verde, 6 ins. in diam., brs. N. 28 1/4°E., 95 lks. dist., marked T4N R6E S3 BT.
An ironwood, 5 ins. in diam., brs. S. 8°E., 63 lks. dist., marked T4N R6E S10 BT.
A palo verde, 8 ins. in diam., brs. S. 60 1/2°W., 200 lks. dist., marked T4N R6E S9 BT., and
A palo verde, 8 ins. in diam., brs. N. 37°W., 110 lks. dist., marked T4N R6E S4 BT.

Land, rolling.
Soil, sandy and gravelly, 2nd and 3rd rate.
Timber, palo verde, mesquite and ironwood.
Undergrowth, greasewood and catclaw brush, 4 to 6 ft. high.

40.00 N. 89° 43'E., on a random line, bet. secs. 3 and 10.
Set temp. 1/4 sec. cor.


80.08 Intersect N. and S. line, 5 lks. N. of the cor. of secs. 2, 3, 10 and 11.
Thence,

28 Completion of Subdivision lines of Township 4 North, Range 6 East

Chains

S.89°45'W., on a true line, bet. secs.3 and 10.
Over rolling land, thru scattering timber and dense undergrowth.

- 10.00 Wash, 10 lks.wide, 2 ft. deep, course SE.
- 31.54 Road from the Verde River valley to Paradise Valley, brs. NE. and SW.
- 40.04 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,



from which,


A ironwood, 8 ins. in diam., brs.N.78°E., 63 lks.dist., marked $\frac{1}{4}$ S 3 BT.

A palo verde, 6 ins. in diam., brs.S.34 $\frac{1}{4}$ °E., 49 lks.dist., marked $\frac{1}{4}$ S 10 BT.

- 66.38 Wash, 12 lks.wide, 3 ft. deep, course SE.
- 80.08 The cor.of secs.3, 4, 9 and 10.
Land, rolling.
Soil, sandy, 2nd and 3rd rate.
Timber, palo verde, mesquite and ironwood.
Undergrowth, greasewood and catclaw brush, 6 ft.high.

N.0° 02' W., on a true line, bet. secs. 3 and 4.
Over rolling land, thru. scattering timber and undergrowth.

- 22.30 Wash, 10 lks.wide, 3 ft. deep, course S.70° E.
- 40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,




from which,

A palo verde, 8 ins. in diam., brs.N.8°E., 59 lks.dist., marked $\frac{1}{4}$ S 3 BT.

A palo verde, 8 ins in diam., brs.N.20 $\frac{1}{2}$ °W., 75 lks.dist., marked $\frac{1}{4}$ S 4 BT.

- 42.30 Wash, 8 lks.wide, 2 $\frac{1}{2}$ ft. deep, course S.70°E.
- 55.00 Wash, 10 lks.wide, 3 $\frac{1}{2}$ ft. deep, course S.80°E.
- 78.28 Intersect the 1st Standard Parallel North, 311 lks.W. of the standard cor.of secs. 33 and 34, T.5 N., R.6 E. hereinbefore described. At point of intersection, Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for closing cor.of secs.3 and 4, marked on brass cap,



from which,

A palo verde, 6 ins. in diam.; brs.S.77 $\frac{1}{4}$ °E., 93 lks.dist., marked CC T4N R6E S3 BT.

A palo verde, 5 ins.in diam., brs.S.17 $\frac{1}{4}$ °W., 135 lks.dist., marked CC T4N R6E S4 BT.

- Land, rolling.
- Soil, sandy and gravelly clay loam, 2nd and 3rd rate.
- Timber, palo verde, mesquite and ironwood.
- Undergrowth, greasewood brush, 6 ft.high.

Completion of Subdivision lines of Township 4 North, Range 6 East. 29

Chains.

From the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp., reestablished by me, and described in Book "B," N. 0° 02' W., bet. secs. 32 and 33.
 Over hilly land, thru scattering timber and undergrowth. Ascend SW. slope of ridge, 144 ft.
 9.99 Road to the Red Mountain mine, brs. NW and SE.
 34.53 Ridge, brs. N. 70° W. and S. 70° E.; desc. over NE. slope, 78 ft.
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor.; marked on brass cap,

$\frac{1}{4}$
 S32 | S33
 1919

from which,

A palo verde, 6 ins. in diam., brs. S. 33 $\frac{1}{2}$ ° E., 39 lks. dist.; marked $\frac{1}{4}$ S 33 BT.
 A palo verde, 4 ins. in diam., brs. S. 57 $\frac{1}{2}$ ° W., 21 lks. dist.; marked $\frac{1}{4}$ S 32 BT.
 40.76 Wash, 15 lks. wide, course SE.; ascend over SW. slope, 83 ft.
 46.31 Ridge, brs. NW and SE.; descend over NE. slope, 69 ft.
 53.13 Wash, 12 lks. wide, course SE.; ascend over SW. slope, 56 ft.
 58.54 Ridge, brs. E. and W.; descend over N. slope, 106 ft.
 64.73 Wash, 15 lks. wide, course S. 80° E.; asc. over SW. slope, 85 ft.
 70.89 Ridge, brs. N. 80° W. and S. 80° E.; desc. over NE. slope, 82 ft.
 78.37 Wash, 20 lks. wide, course SE.; asc. over SW. slope, 33 ft. to
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 28, 29, 32 and 33, marked on brass cap,

T4N | R6E
 S29 | S28
 S32 | S33
 1919

from which,

An ironwood, 6 ins. in diam., brs. N. 31° E., 127 lks. dist., marked T4N R6E S28 BT.
 A palo verde, 8 ins. in diam., brs. S. 33 $\frac{1}{2}$ ° E., 53 lks. dist., marked T4N R6E S33 BT.
 A palo verde, 12 ins. in diam., brs. S. 81 $\frac{1}{2}$ ° W., 163 lks. dist., marked T4N R6E S32 BT.
 A palo verde, 12 ins. in diam., brs. S. 81 $\frac{1}{2}$ ° W., 163 lks. dist., marked T4N R6E S29 BT.
 Land, hilly. Soil, stony, 3rd. rate.
 Timber, palo verde, mesquite and ironwood.
 Undergrowth, greasewood and catclaw brush, 6 ft. high.

N. 89° 48' E., on a random line, bet. secs. 28 and 33.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.00 Intersect N. and S. line, 5 lks. N. of the cor. of secs. 27, 28, 33 and 34.
 Thence S. 89° 50' W., on a true line, bet. secs. 28 and 33.
 Over hilly land, thru scattering timber and undergrowth. Ascend NE. slope, 144 ft.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 28
 S 33
 1919


from which,

A palo verde, 6 ins. in diam., brs. N. 70 $\frac{1}{2}$ ° W., 115 lks. dist., marked $\frac{1}{4}$ S 28 BT.
 A palo verde, 5 ins. in diam., brs. S. 49 $\frac{1}{2}$ ° E., 196 lks. dist., marked $\frac{1}{4}$ S 33 BT.
 59.03 Ridge, brs. NW and SE.; descend over SW. slope, 79 ft. to
 80.00 The cor. of secs. 28, 29, 32 and 33.
 Land, hilly.
 Soil, stony, 3rd rate. Timber, palo verde, mesquite and ironwood.
 Undergrowth, greasewood, and ocotillo brush, 4 to 7 ft. high.

Completion of Subdivision lines of Township 4 North, Range 6 East.

Chains.


N.0°02'W., bet. secs.28 and 29.
 Over hilly land, thru scattering timber and undergrowth.
 Ascend SW.slope of ridge, 142 ft.
 21.87 Ridge, brs.NW. and SE.; descend over NW.slope, 91 ft.
 34.11 Wash, 15 lks.wide, course NE.; descend over SE.slope, 4 ft.
 35.70 Ridge, brs.E. and W.; descend N.slope, 5 ft.
 38.40 Wash, 8 lks.wide, course E.; ascend S.slope, 94 ft.
 40.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for 1/4 sec.cor., marked on brass cap,



from which,

A palo verde, 6 ins. in diam., brs.N.39°E., 139 lks.dist., marked 1/4 S 28 BT.
 A palo verde, 4 ins. in diam., brs.S.45 1/2°W., 83 lks.dist., marked 1/4 S 29 BT.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs.20, 21, 28 and 29, marked on brass cap,



from which,


A palo verde, 6 ins. in diam., brs.N.69 1/2°E., 156 lks.dist., marked T4N R6E S21 BT.
 A palo verde, 5 ins. in diam., brs.S.71 1/4°E., 31 lks.dist., marked T4N R6E S28 BT.
 A palo verde, 6 ins. in diam., brs.S.28°W., 100 lks.dist., marked T4N R6E S29 BT.
 A palo verde, 6 ins. in diam., brs.N.56°W., 230 lks.dist., marked T4N R6E S 20 BT.

Land, hilly. Soil, stony, 3rd rate.
 Timber, palo verde, mesquite and ironwood.
 Undergrowth, greasewood and ocotillo brush, 6 ft. high.

40.00 N.89°50'E., on a random line, bet. secs.21 and 28.
 80.02 Set temp. 1/4 sec. cor. scattering timber and undergrowth.
 Intersect N. and S. line, 2 lks.S. of the cor. of secs.21, 22, 27 and 28.

Thence,
 S.89°49'W., on a true line, bet. secs.21 and 28.
 Over hilly land, thru scattering timber and undergrowth.
 Descend SW.slope, 12 ft.

12.23 Wash, 50 lks.wide, course SE.; ascend over NE.slope, 14 ft.
 32.22 Ridge, brs.N. and S.; descend over W.slope, 14 ft.
 40.01 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec.cor., marked on brass cap,



from which,

A palo verde, 10 ins. in diam., brs.N.39°E., 134 lks.dist., marked 1/4 S 21 BT.
 A palo verde, 12 ins. in diam., brs.S.65°E., 66 lks.dist., marked 1/4 S 28 BT.

40.05 Wash, 100 lks.wide, course NE.; thence over bottom land, along wash.
 55.70 Same wash, 100 lks.wide, course SE.; ascend over SE.slope 89 ft.
 70.52 Top of ascent on W.side of wash; thence over rolling land.
 80.02 The cor. of secs.20, 21, 28 and 29.
 Land, rolling and hilly.
 Soil, gravelly and stony, 3rd rate.
 Timber, palo verde, mesquite and ironwood.
 Undergrowth, greasewood and ocotillo brush, 5 ft. high.

Completion of Subdivision lines of Township 4 North, Range 6 East 31

Chains.	N.0°02'W., bet. secs.20 and 21. Over hilly land, thru. scattering timber and undergrowth. Descend N.slope,60 ft.
6.54	Wash,25 lks.wide, course S.80°E.; ascend over SW.slope, 39 ft.
9.23	Ridge, brs.E. and W.; descend over N. slope, 49 ft.
12.73	Wash,20 lks.wide, course S.60°E.; ascend over SW.slope,37ft.
24.08	Ridge, brs.N.80°W. and S.80°E.; descend over NE.slope, about 20 ft.
40.00	Set an iron post, 3 ft.long, 1 in. in diam.,26 ins.in the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap, $\begin{array}{c} \frac{1}{4} \\ \hline \text{S20} \text{S21} \\ \hline 1919 \end{array}$
	from which, A palo verde,6 ins.in diam., brs.N.48°E.,73 lks. dist., marked $\frac{1}{4}$ S 21 BT. A palo verde,9 ins.in diam., brs.N.16 $\frac{1}{2}$ °W.,124 lks. dist., marked $\frac{1}{4}$ S 20 BT.
80.00	Set an iron post, 3 ft.long, 2 ins. in diam.,24 ins.in the ground, for cor.of secs.16,17,20 and 21, marked on brass cap, $\begin{array}{c} \text{T4N R6E} \\ \hline \text{S17} \text{S16} \\ \hline \text{S20} \text{S21} \\ \hline 1919 \end{array}$
	from which, A palo verde,6 ins.in diam., brs.N.10 $\frac{1}{2}$ °E.,149 lks.dist., marked T4N R6E S16 BT. A palo verde,5 ins.in diam., brs.S.89 $\frac{1}{2}$ °E.,18 lks.dist., marked T4N R6E S21 BT. A palo verde,12 ins.in diam., brs.S.72 $\frac{1}{2}$ °W.,352 lks.dist., marked T4N R6E S20 BT. A palo verde, 6 ins.in diam., brs.N.74 $\frac{1}{2}$ °W.,233 lks.dist., marked T4N R6E S17 BT. Land, rolling and hilly. Soil, gravelly and stony, 2nd and 3rd rate. Timber, palo verde, mesquite and ironwood. Undergrowth, greasewood and ocotillo brush, 6 ft. high.
40.00	N.89°49' E., on a random line, bet. secs.16 and 21. Set temp. $\frac{1}{4}$ sec.cor.
80.14	Intersect N.and S. line, 5 lks.N.of the cor.of secs.15, 16,21 and 22. Thence, S.89°51'W., on a true line, bet.secs.16 and 21. Over rolling, sandy bottom land, along sand wash, thru.scatter- ing timber and undergrowth.
1.00	Wood road, brs.N.70°W. and S.70°E.
10.00	Leave bottom land, brs.NW. and SE.; ascend NE.slope, over rolling hilly land to
13.90	Top of ascent,23 ft. above sec.cor., brs.N.80°W. and S.80° E.; thence over rolling land.
29.27	Wash,10 lks.wide, course SE.
40.07	Set an iron post,3 ft.long,1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap, $\begin{array}{c} \frac{1}{4} \\ \hline \text{S 16} \\ \hline \text{S 21} \\ \hline 1919 \end{array}$
	from which, An ironwood,20 ins.in diam., brs.N.5°W.,36 lks. dist., marked $\frac{1}{4}$ S 16 BT.

32.

Chains.	<p>A palo verde, 8 ins. in diam., brs. S. 61$\frac{1}{2}$° W., 219 lks. dist., marked $\frac{1}{4}$ S 21 BT.</p>															
42.40	Wash, 15 lks. wide, 4 ft. deep, course S. 80° E.; ascend NE. slope.															
60.00	Top of ascent; thence over rolling land.															
80.14	The cor. of secs. 16, 17, 20 and 21. Land, level and rolling hills. Soil, sandy and gravelly, 2nd and 3rd rate. Timber, palo verde, mesquite and ironwood. Undergrowth, greasewood and catclaw brush, 4 to 6 ft. high.															

	N. 0° 2' W., bet. secs. 16 and 17. Over rolling land, thru. scattering timber and undergrowth.															
2.50	Wash, 10 lks. wide, 4 ft. deep, course S. 60° E.															
5.80	Wash, 10 lks. wide, 3 ft. deep, course S. 70° E.															
37.70	Wash, 12 lks. wide, 4 ft. deep, course S. 60° E.															
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,															
<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 0 5px;">$\frac{1}{4}$</td> <td style="padding: 0 5px;">S17</td> <td style="padding: 0 5px;"> </td> <td style="padding: 0 5px;">S16</td> </tr> <tr> <td colspan="4" style="text-align: center;">1919</td> </tr> </table>		$\frac{1}{4}$	S17		S16	1919										
$\frac{1}{4}$	S17		S16													
1919																
	from which,															
	A mesquite, 8 ins. in diam., brs. N. 34° E., 144 lks. dist., marked $\frac{1}{4}$ S 16 BT.															
	A palo verde, 6 ins. in diam., brs. N. 79 $\frac{1}{2}$ ° W., 109 lks. dist., marked $\frac{1}{4}$ S 17 BT.															
63.90	Wash, 15 lks. wide, 2 $\frac{1}{2}$ ft. deep, course S. 80° E.; ascend SW. slope of stony ridge, 57 ft., over hilly land.															
69.70	Ridge, brs. N. 60° W. and S. 60° E.; descend NE. slope, 57 ft.															
73.72	Foot of descent in dry sand wash, 20 lks. wide, course SE.; thence over level, sandy bottom land.															
76.62	Road from Fort McDowell to Paradise Valley, brs. NW. and SE.															
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 8, 9, 16 and 17, marked on brass cap,															
<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 0 5px;">T4N</td> <td style="padding: 0 5px;"> </td> <td style="padding: 0 5px;">R6E</td> </tr> <tr> <td style="padding: 0 5px;">S 8</td> <td style="padding: 0 5px;"> </td> <td style="padding: 0 5px;">S 9</td> </tr> <tr> <td colspan="3" style="text-align: center;">-----</td> </tr> <tr> <td style="padding: 0 5px;">S17</td> <td style="padding: 0 5px;"> </td> <td style="padding: 0 5px;">S16</td> </tr> <tr> <td colspan="3" style="text-align: center;">1919</td> </tr> </table>		T4N		R6E	S 8		S 9	-----			S17		S16	1919		
T4N		R6E														
S 8		S 9														

S17		S16														
1919																
	from which,															
	A palo verde, 5 ins. in diam., brs. N. 37 $\frac{1}{2}$ ° E., 130 lks. dist., marked T4N R6E S9 BT.															
	A palo verde, 6 ins. in diam., brs. S. 63 $\frac{1}{4}$ ° E., 180 lks. dist., marked T4N R6E S16 BT.															
	A palo verde, 6 ins. in diam., brs. S. 70 $\frac{1}{2}$ ° W., 93 lks. dist., marked T4N R6E S17 BT.															
	A palo verde, 8 ins. in diam., brs. N. 26° W., 194 lks. dist., marked T4N R6E S 8 BT.															
	Land, level, rolling and hilly. Soil, sandy and stony, 2nd and 3rd rate. Timber, palo verde, mesquite and ironwood. Undergrowth, greasewood and ocotillo brush, 6 ft. high.															

40.00	N. 89° 51' E., on a random line, bet. secs. 9 and 16. Set temp. $\frac{1}{4}$ sec. cor.															
80.10	Intersect N. and S. line, 3 lks. N. of the cor. of secs. 9, 10, 15 and 16. Thence, S. 89° 52' W., on a true line, bet. secs. 9 and 16. Over rolling land, thru. scattering timber and undergrowth.															
2.10	Wash, 10 lks. wide, 2 $\frac{1}{2}$ ft. deep, course SE.															
40.05	Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,															

Completion of Subdivision lines of Township 4 North, Range 6 East 33

Chains.

$\frac{1}{4}$ S 9
S 16
1919

from which,

A mesquite, 8 ins. in diam., brs. N. 11° E., 54 lks. dist., marked $\frac{1}{4}$ S 9 B T.

A palo verde, 5 ins. in diam., brs. S. 54 $\frac{1}{2}$ ° E., 37 lks. dist., marked $\frac{1}{4}$ S 16 B T.

- 42.23 Wash, 10 lks. wide, course SE.; ascend 8 ft. over NE. slope of gravelly ridge.
- 59.10 Ridge, brs. NW. and SE.; descend over SW. slope, 10 ft.
- 61.24 Wash, 15 lks. wide, course SE.; ascend over NE. slope of gravelly ridge, 21 ft.
- 71.32 Ridge, brs. NW. and SE.; descend over SW. slope, 29 ft.
- 76.50 Ridge, brs. NW. and SE.; thence over rolling land.
- 80.10 The cor. of secs. 8, 9, 16 and 17.
Land, rolling and hilly.
Soil, gravelly, 2nd and 3rd rate.
Timber, palo verde, mesquite and ironwood.
Undergrowth, greasewood brush, 5 ft. high.

-
- N. 0° 02' W., bet. secs. 8 and 9.
Over rolling land, thru. scattering timber and undergrowth.
 - 4.50 Ascend SW. slope of ridge, 45 ft.
 - 11.82 Ridge brs. NW. and SE.; descend over NE. slope, 15 ft.
 - 28.92 Wash, 12 lks. wide, course SE.
 - 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
S 8 S 9
1919

from which,

A palo verde, 10 ins. in diam., brs. N. 42° E., 128 lks. dist., marked $\frac{1}{4}$ S 9 B T.

A palo verde, 6 ins. in diam., brs. N. 29 $\frac{1}{2}$ ° W., 90 lks. dist., marked $\frac{1}{4}$ S 8 B T.

- 52.98 Wash, 10 lks. wide, 3 ft. deep, course SE.
- 58.90 Road from Verde Valley to Paradise Valley bears E. and W.
- 61.20 Wash, 15 lks. wide, course E.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 4, 5, 8 and 9, marked on brass cap,

T4N | R6E
S 5 | S 4
S 8 | S 9
1919

from which,

A palo verde, 6 ins. in diam., brs. N. 24° E., 385 lks. dist., marked T4N R6E S4 B T.

A palo verde, 8 ins. in diam., brs. S. 78 $\frac{3}{4}$ ° E., 92 lks. dist., marked T4N R6E S9 B T.

A palo verde, 4 ins. in diam., brs. S. 24° W., 145 lks. dist., marked T4N R6E S8 B T., and


A palo verde, 6 ins. in diam., brs. N. 39 $\frac{3}{4}$ ° W., 154 lks. dist., marked T4N R6E S5 B T.

- Land, rolling.
 - Soil, sandy and gravelly, 2nd and 3rd rate.
 - Timber, palo verde, mesquite and ironwood.
 - Undergrowth, greasewood brush, 5 ft. high.
-

34. Completion of Subdivision lines of Township 4 North, Range 6 East.

Chains.


40.00 N.89°52'E., on a random line, bet. secs.4 and 9.
 Set temp. $\frac{1}{4}$ sec.cor.
 80.02 Intersect N. and S. line, 2 lks.N. of the cor.of secs.3,
 4, 9 and 10.
 Thence,
 S.89°53'W., on a true line, bet. secs.4 and 9.
 Over rolling land, thru. scattering timber and undergrowth.
 40.01 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,



from which,


A palo verde, 6 ins. in diam., brs.N.74 $\frac{1}{4}$ °W., 97
 lks.dist., marked $\frac{1}{4}$ S 4 BT.
 An ironwood, 10 ins. in diam., brs.S.41 $\frac{1}{4}$ °W., 89
 lks.dist., marked $\frac{1}{4}$ S 9 BT.
 43.22 Wash, 8 lks.wide, 2 ft.deep, course SE.
 73.32 Wash, 6 lks.wide, 2 $\frac{1}{2}$ ft. deep, course SE.
 80.02 The cor.of secs. 4,5, 8 and 9.
 Land, rolling.
 Soil, sandy and gravelly, 2nd and 3rd rate.
 Timber, palo verde, ironwood and mesquite.
 Undergrowth, greasewood brush and cacti, 3 to 6 ft.high.

N.0° 2'W., on a true line, bet. secs.4 and 5.
 Over rolling land, thru. scattering timber and undergrowth.
 6.00 Wash, 8 lks.wide, 3 ft.deep, course SE.
 40.00 Set an iron post 3 ft.long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,



from which,

A palo verde, 6 ins. in diam., brs.N.75°E., 90
 lks.dist., marked $\frac{1}{4}$ S 4 BT.
 A palo verde, 6 ins. in diam., brs.N.67 $\frac{1}{4}$ °W.,
 101 lks.dist., marked $\frac{1}{4}$ S 5 BT.
 75.00 Wash, 6 lks.wide, 3 ft: deep, course SE.
 78.36 Intersect the 1st Standard Parallel North, 312 lks.W.of
 the standard cor. of secs.32 and 33, T.5 N., R.6 E., re-
 established by me as hereinbefore described. At
 point of intersection,
 Set an iron post, 3 ft.long, 2 ins. in diam., 24 ins. in
 the ground, for closing cor.of secs.4 and 5, marked
 on brass cap,



from which,


A palo verde, 6 ins.in diam., brs.S.51 $\frac{1}{4}$ °E., 147
 lks.dist., marked CC T4N R6E S4 BT.
 A palo verde, 6 ins. in diam., brs.S.36°W., 142
 lks.dist., marked CC T4N R6E S5 BT.
 Land, rolling.
 Soil, sandy and gravelly, 2nd and 3rd rate.
 Timber, palo verde, mesquite and ironwood.
 Undergrowth, greasewood.

Completion of Subdivision Lines of Township 4 North Range 6 East


BOOK 3375

Chains.

- From the cor. of secs. 5, 6, 31 and 32 on the S. bdy. of Tp. established by me and described in Book "B,"
- N. 0° 03' W., bet. secs. 31 and 32.
- Over hilly land, thru. scattering timber and undergrowth.
- 3.20 Ascend S. slope of ridge 17 ft.
- 11.00 Ridge, brs. E. and W.; descend over N. slope, 66 ft.
- 21.03 Wash, 15 lks. wide, course E.; ascend S. slope of ridge, 37 ft.
- 27.27 Ridge, brs. E. and W.; descend over N. slope, 29 ft.
- 31.75 Wash, 12 lks. wide, course E.; ascend S. slope, 55 ft.
- 39.70 Ridge, brs. N. 80° W. and S. 80° E.; descend over NE. slope, 57 ft.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,



- No trees suitable for bearing trees within limits; raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
- 49.72 Road from the Verde River Valley to the Red Mountain Mine, brs. E. and W.
- 50.32 Wash, 18 lks. wide, course S. 60° E.; ascend over SW. slope, of ridge, 151 ft.
- 63.40 Ridge, brs. E. and W.; descend over N. slope, 87 ft.
- 70.88 Wash, 15 lks. wide, course S. 50° E.; ascend over SW. slope, 117 ft.
- 79.00 Ridge, brs. E. and W.; thence over level land on ridge.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 29, 30, 31 and 32, marked on brass cap,.



from which,

- A palo verde, 4 ins. in diam., brs. N. 57 $\frac{1}{2}$ ° E., 72 lks. dist., marked T4N R6E S29 BT.
- A palo verde, 6 ins. in diam., brs. S. 63 $\frac{1}{2}$ ° E., 95 lks. dist., marked T4N R6E S32 BT.
- A palo verde, 4 ins. in diam., brs. S. 73 $\frac{1}{4}$ ° W., 233 lks. dist., marked T4N R6E S31 BT., and
- A palo verde, 5 ins. in diam., brs. N. 73 $\frac{1}{2}$ ° W., 180 lks. dist., marked T4N R6E S30 BT.

Land, hilly.
Soil, stony, 3rd rate.
Timber, palo verde, mesquite and ironwood.
Undergrowth, greasewood brush, 4 to 6 ft. high.

-
- N. 89° 48' E., on a random line, bet. secs. 29 and 32.
 - 40.00 Set temp. sec. cor.
 - 79.86 Intersect N. and S. line, 8 lks. N. of the cor. of secs. 28, 29, 32 and 33.
 - Thence,
 - S. 89° 51' W., on a true line, bet. secs. 29 and 32.
 - Over hilly land, thru. scattering timber and undergrowth.
 - Descend SW. slope, 30 ft.
 - 3.83 Wash, 15 lks. wide, course SE.; ascend over NE. slope, 41 ft.
 - 9.39 Top of ridge, brs. N. and S.; descend over W. slope, 15 ft.
 - 13.57 Wash, 14 lks. wide, course NE.; ascend over SE. slope, 154 ft.
 - 22.36 Top of ascent on E. end of ridge, brs. E. and W.; thence along top of ridge, over rolling land.

36. Completion of Subdivision lines of Township 4 North, Range 6 East.

Chains	
39.93	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap, $\frac{1}{4}$ S 29 S 32 1919
79.86	No trees suitable for bearing trees within limits; raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor. The cor. of secs. 29, 30, 31 and 32. Land, rolling and hilly. Soil, stony, 3rd rate. Timber, palo verde, mesquite and ironwood. Undergrowth, greasewood brush and cacti, 5 ft. high.
40.00	S. $89^{\circ}48'W.$, on a random line, bet. secs. 30 and 31. Set temp. $\frac{1}{4}$ sec. cor.
79.28	Intersect the W. bdy. of Tp., 3 lks. S. of the cor. of secs. 25, 30, 31 and 36, described in Book "D." Thence, N. $89^{\circ}49'E.$, on a true line, bet. secs. 30 and 31. Over mountainous land, thru. scattering timber and undergrowth. Ascend 64 ft. along SW. slope.
10.00	Bunk house brs. S. about 4.00 chs.
28.80	Ridge, brs. N. $60^{\circ}W.$ and S. $60^{\circ}E.$; descend over NE. slope, 54 ft.
39.28	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap, $\frac{1}{4}$ S 30 S 31 1919
	from which, A palo verde, 4 ins. in diam., brs. N. $1\frac{3}{4}^{\circ}W.$, 67 lks. dist., marked $\frac{1}{4}$ S 30 BT. A palo verde, 5 ins. in diam., brs. S. $15\frac{3}{4}^{\circ}W.$, 20 lks. dist., marked $\frac{1}{4}$ S 31 BT.
42.50	Ravine, 4 lks. wide, course NE.; ascend over NW. slope, 15 ft.
45.00	Ridge, brs. E. and S. $70^{\circ}W.$; thence on top of ridge, over rolling, stony land.
79.28	The cor. of secs. 29, 30, 31 and 32. Land, rolling and mountainous. Soil, stony, 3rd and 4th rate. Timber, palo verde, and mesquite. Mountainous land, 45 chs. Undergrowth, greasewood and ocotillo brush, 3 to 6 ft. high.
	N. $0^{\circ}03'W.$, bet. secs. 29 and 30. Over rolling land on top of ridge, thru. scattering timber and undergrowth.
2.00	Leave rolling land, brs. E. and W.; descend over N. slope of ridge, 101 ft., over stony, hilly land.
12.29	Wash, 20 lks. wide, course S. $80^{\circ}E.$; ascend over SW. slope, 119 ft.
31.78	Stony ridge, brs. E. and W.; descend over N. slope, 73 ft.
38.79	Wash, 15 lks. wide, course E.; ascend over S. slope, 23 ft. to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap, $\frac{1}{4}$ S 30 S 29 1919

Completion of Subdivision lines of Township 4 North, Range 6 East, 37

Chains.

from which,
 A palo verde, 6 ins. in diam., brs.N.19 $\frac{1}{2}$ °W.,
 168 lks.dist., marked $\frac{1}{4}$ S 30 BT.
 A palo verde, 6 ins. in diam., brs.S.50 $\frac{1}{4}$ °E.,54
 lks.dist.,marked $\frac{1}{4}$ S 29 BT.

45.93 Ridge, brs.E and W.; descend over N.slope,112 ft.
 66.92 Wash, 10 lks.wide, course N.80°E.
 71.28 Wash, 8 lks.wide, 4 ft. deep, course E.; ascend over S.
 slope, 6 ft.
 80.00 Set an iron post 3 ft.long, 2 ins. in diam., 24 ins. in
 the ground, for cor.of secs.19,20,29 and 30,marked on
 brass cap,




from which,
 A palo verde, 6 ins. in diam., brs.N.54°E.,234
 lks.dist., marked T4N R6E S20 BT.
 A mesquite, 6 ins. in diam., brs.S.1 $\frac{1}{2}$ °E., 84
 lks.dist., marked T4N R6E S29 BT.
 A palo verde, 6 ins. in diam., brs.S.89 $\frac{1}{4}$ °W.,119
 lks.dist., marked T4N R6E S30 BT.
 A palo verde, 8 ins. in diam., brs.N.59°W., 65
 lks.dist., marked T4N R6E S19 BT.

Land, rolling and hilly.
 Soil, stony, 2nd and 3rd rate.
 Timber, palo verde,mesquite and ironwood.
 Undergrowth, greasewood and ocotillo brush, 5 ft.high.

40.00 N.89° 51'E., on a random line, bet.secs.20 and 29.
 Set temp. $\frac{1}{4}$ sec.cor.
 80.00 Intersect N. and S. line, 8 lks.N.of the cor. of secs.20,
 21, 28 and 29.

Thence,
 S.89°54'W.,on a true line, bet. secs.20 and 29.
 Over hilly land, thru. scattering timber and undergrowth.
 Ascend NE.slope of ridge, 10 ft.
 25.00 Ridge, brs.NW. and SE.; descend over SW.slope,31 ft.
 40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,



from which,
 A palo verde, 5 ins. in diam., brs.N.71 $\frac{1}{2}$ °E.,
 28 lks.dist., marked $\frac{1}{4}$ S 20 BT.
 An ironwood, 10 ins. in diam., brs.S.67 $\frac{1}{2}$ °E.,
 65 lks.dist., marked $\frac{1}{4}$ S 29 BT.

48.00 Wash, 15 lks.wide, course SE.; thence over low ridges
 and ravines.
 50.40 Wash,12 lks.wide, 6 ft.deep,course NE.
 66.70 Wash, 8 lks.wide, 4 ft. deep, course SE.; ascend.
 76.00 Ridge, brs.NW. and SE.; descend 9 ft.over SW.slope.
 80.00 The cor.of secs. 19,20,29 and 30.

Land, hilly.
 Soil, stony, 3rd rate.
 Timber, palo verde, mesquite and ironwood.
 Undergrowth, greasewood and ocotillo brush, 4 to 6 ft.
 high.

40.00 S.89° 49'W., on a random line, bet. secs.19 and 30.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.18 Intersect W. bdy.of Tp., 8 lks.S.of the cor. of secs.
 19,24,25 and 30, described in Book "D."

Chains.

Thence,
N.89° 52'E., on a true line, bet. secs.19 and 30.
Over mountainous land, thru. scattering timber and under-
growth.
Ascend W. slope, 16 ft.
.48 Spur, brs.N. and S.; descend over E. slope, 15 ft.
2.88 Ravine, 4 lks.wide, course S.; ascend W. slope of spur,
14 ft.
4.78 Granite spur, brs.N. and S.; descend over E. slope, 52 ft.
9.55 Ravine, 5 lks.wide, course S.; ascend W.slope, 23 ft.
13.98 Spur, brs.N. and S.; descend over SE. slope, 55 ft.
21.55 Ravine, 6 lks.wide, course SW.; ascend over W.slope, of
spur, 249 ft.
31.21 Stony spur, brs.N. and S.; descend over E.slope, 470 ft.
39.18 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,

$\frac{1}{4}$ S 19
S 30
1919

No trees suitable for bearing trees within limits; raise
a mound of stone, 2 ft.base, 1 $\frac{1}{2}$ ft.high, N.of cor.
53.98 Wash, 20 lks.wide, course SE.; ascend over SW.slope, 46
ft.; leave mountainous land, brs.N. and S.
63.90 Gravelly ridge, brs.NW and SE.; descend over NE.slope,
57 ft.
79.18 The cor.of secs.19, 20, 29 and 30.
Land, rolling, and mountainous.
Soil, stony. 3rd and 4th rate.
Timber, palo verde, mesquite and ironwood.
Mountainous land, 54.00 chs.
Undergrowth, greasewood and ocotillo brush.

N.0°03'W., bet. secs.19 and 20.
Over hilly land, thru.scattering timber and undergrowth.
Ascend S.slope, 52 ft.
4.95 Ridge, brs.NW and SE.; descend over NE.slope, 54 ft.
11.29 Wash, 10 lks.wide, course SE.; ascend over SW.slope, 15 ft.
26.34 Ridge, brs.E.and W.; descend over N.slope, 8 ft.
39.24 Wash, 8 lks.wide, course E.; ascend 10 ft.
40.00 Set an iron post 3 ft.long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,

$\frac{1}{4}$
S19 | S20
1919

from which,

A palo verde, 6 ins. in diam., brs.N.71 $\frac{1}{2}$ °E., 18
lks.dist., marked $\frac{1}{4}$ S 20 BT.
A palo verde, 6 ins. in diam., brs.S.41°W., 16
lks.dist., marked $\frac{1}{4}$ S 19 BT.
47.30 Gravelly ridge, brs.E.and W.; descend over N. slope, 10 ft.
50.00 Wash, 12 lks.wide, course SE.; ascend over SW.slope, 8 ft.
55.00 Ridge, brs.NW. and SE.; descend 8 ft.
59.60 Wash, 8 lks.wide, course E.; ascend 10 ft.
62.30 Ridge, brs.E. and W.; descend over N. slope, 9 ft.
70.20 Wash, 10 lks.wide, course E.; thence over rolling land.
80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 24 ins. in
the ground, for cor.of secs.17, 18, 19 and 20, marked
on brass cap,

T4N | R6E
S18 | S17
S19 | S20
1919

Completion of Subdivision lines of Township 4 North, Range 6 East, 39

Chains.

from which,
 A palo verde, 6 ins. in diam., brs. N. 24° E., 199
 lks. dist., marked T4N R6E S17 BT.
 A palo verde, 6 ins. in diam., brs. S. 68° E., 206
 lks. dist., marked T4N R6E S20 BT.
 A palo verde, 8 ins. in diam., brs. S. 75 1/4° W., 83
 lks. dist., marked T4N R6E S19 BT., and
 A palo verde, 6 ins. in diam., brs. N. 14° W., 256
 lks. dist., marked T4N R6E S18 BT.

Land, rolling and hilly.
 Soil, stony and gravelly, 3rd rate.
 Timber, palo verde, mesquite and ironwood.
 Undergrowth, greasewood and ocotillo brush, 4 to 6 ft. high.

40.00 N. 89° 54' E., on a random line, bet. secs. 17 and 20.
 80.06 Set temp. 1/4 sec. cor.
 Intersect N. and S. line, 2 lks. N. of the cor. of secs. 16,
 17, 20 and 21.
 Thence,
 S. 89° 55' W., on a true line, bet. secs. 17 and 20.
 Over rolling land, thru. scattering timber and under-
 growth.

40.03 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
 the ground for 1/4 sec. cor., marked on brass cap,

1/4 S 17
 S 20
 1919

from which,
 A palo verde, 6 ins. in diam., brs. N. 31 1/4° E., 78
 lks. dist., marked 1/4 S 17 BT.
 A palo verde, 6 ins. in diam., brs. S. 33 3/4° E., 51
 lks. dist., marked 1/4 S 20 B T.

62.96 Dry sand wash, 12 lks. wide, 4 ft. deep, course SE.
 80.06 The cor. of secs. 17, 18, 19 and 20.
 Land, rolling.
 Soil, sandy and gravelly, 2nd and 3rd rate.
 Timber, palo verde and mesquite.
 Undergrowth, greasewood and ocotillo brush 4 to 7 ft.
 high.

40.00 S. 89° 52' W., on a random line, bet. secs. 18 and 19.
 78.94 Set temp. 1/4 sec. cor.
 Intersect the W. bdy. of Tp., 8 lks. N. of the cor. of secs.
 13, 18, 19 and 24, described in Book "D."
 Thence,
 N. 89° 49' E., on a true line, bet. secs. 18 and 19.
 Over rolling land, thru. scattering timber and under-
 growth.


38.94 Descend NE. slope.
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for 1/4 sec. cor., marked on brass cap,

1/4 S 18
 S. 19
 1919

78.94 No trees suitable for bearing trees available; raise a
 mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.
 The cor. of secs. 17, 18, 19 and 20.
 Land, rolling,
 Soil, gravelly, 2nd and 3rd rate.
 Timber, palo verde and mesquite.
 Undergrowth, greasewood brush, 4 ft. high.


Chains.

N.0°3'W., bet. secs. 17 and 18.
 Over rolling land, thru. scattering timber, and undergrowth.
 17.00 Wash, 8 lks.wide, 3 ft.deep, course E.
 28.30 Wash, 10 lks.wide, 4 ft. deep, course E.
 40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,




from which,

A palo verde, 4 ins. in diam., brs.N.81 $\frac{1}{4}$ °W., 83
 lks.dist., marked $\frac{1}{4}$ S 18 BT.
 A palo verde, 6 ins.in diam., brs.S.19 $\frac{3}{4}$ °E. 37
 lks.dist., marked $\frac{1}{4}$ S 17 BT.
 57.70 Wash, 12 lks.wide, 3 $\frac{1}{2}$ ft. deep, course E.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
 the ground, for cor.of secs.7,8, 17 and 18, marked on
 brass cap,



No trees suitable for bearing trees within limits; raise
 a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft.high,W.of cor.
 Land, rolling.
 Soil,sandy and gravelly, 2nd and 3rd rate.
 Timber, palo verde and mesquite.
 Undergrowth, greasewood and ocotillo brush, 5 ft. high.

N.89° 55'E., on a random line, bet. secs. 8 and 17.
 40.00 Set temp. $\frac{1}{4}$ sec.cor.
 80.24 Intersect N. and S. line, 4 lks.S. of the cor. of secs.
 8,9,16 and 17.
 Thence,
 S.89° 53'W., on a true line,bet. secs. 8 and 17.
 Over rolling land,thru. scattering timber, and under-
 growth.
 3.69 Old road, brs.NW. and SE.
 8.89 Wash, 10 lks.wide, 4ft.deep, course SE.
 15.90 Wash, 8 lks.wide, course SE.; ascend over NE.slope, 65 ft.
 33.60 Ridge, brs.NW. and SE.; thence over rolling, gravelly
 land.
 40.12 Set an iron post 3 ft.long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,



from which,


A palo verde, 4 ins. in diam., brs.N.16 $\frac{1}{4}$ °E.,56
 lks.dist., marked $\frac{1}{4}$ S 8 BT.
 A palo verde, 6 ins. in diam., brs.S.20 $\frac{1}{2}$ °W.,59
 lks.dist., marked $\frac{1}{4}$ S 17 BT.
 80.24 The cor.of secs. 7,8,17 and 18.
 Land, rolling.
 Soil,sandy and gravelly, 2nd and 3rd rate.
 Timber,palo verde, mesquite and ironwood.
 Undergrowth, greasewood and ocotillo brush,6 ft. high.

Completion of Subdivision of Township 4 North, Range 6 East. 41

Chains.

40.00 S.89°49'W., on a random line, bet. secs. 7 and 18.
 Set temp. $\frac{1}{4}$ sec. cor.
 78.70 Intersect the W. bdy. of Tp. 3 lks. S. of the cor. of secs. 7, 12, 13 and 18, described in Book "D."

Thence,
 N.89°50'E. on true line, bet. secs. 7 and 18.
 Descend NE. slope, 118 ft., over rolling land, thru scattering timber and undergrowth.
 38.70 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,




from which,

A palo verde, 6 ins. in diam., brs. N.34 $\frac{1}{2}$ °W., 82 lks. dist., marked $\frac{1}{4}$ S 7 BT.
 A palo verde, 6 ins. in diam., brs. S.47°W., 31 lks. dist., marked $\frac{1}{4}$ S 18 B T.
 78.70 The cor. of secs. 7, 8, 17 and 18.

Land, rolling.
 Soil, sandy and gravelly, 2nd and 3rd rate.
 Timber, palo verde, mesquite, and ironwood.
 Undergrowth, greasewood and ocotillo, 5 ft. high.

5.40 N.0° 03'W., bet. secs. 7 and 8.
 40.00 Over rolling land, thru scattering timber and undergrowth.
 Wash, 10 lks. wide, 3 ft. deep, m course N. 70°E.
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,




from which,

A palo verde, 5 ins. in diam., brs. N.75 $\frac{3}{4}$ °E., 149 lks. dist., marked $\frac{1}{4}$ S 8 B T.
 A palo verde, 8 ins. in diam., brs. N.22 $\frac{1}{2}$ °W., 71 lks. dist., marked $\frac{1}{4}$ S 7 BT.
 55.00 Wash, 8 lks. wide, 2 $\frac{1}{2}$ ft. deep, course SE.
 58.80 Old road brs. NW and SE.

59.80 Wash, 6 lks. wide, 2 $\frac{1}{2}$ ft. deep, course SE.
 77.30 Wash, 6 lks. wide, 3 ft. deep, course SE.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 5, 6, 7 and 8, marked on brass cap,



from which,

A palo verde, 4 ins. in diam., brs. N.46 $\frac{3}{4}$ °E., 67 lks. dist., marked T4N R6E S5 BT.
 A palo verde, 4 ins. in diam., brs. S.58 $\frac{1}{2}$ °E., 135 lks. dist., marked T4N R6E S 8 BT.
 A palo verde, 4 ins. in diam., brs. S. 64 $\frac{3}{4}$ °W., 61 lks. dist., marked T4N R6E S7 BT.
 A palo verde, 5 ins. in diam., brs. N.16 $\frac{1}{2}$ °W., 53 lks. dist., marked T4N R6E S6 BT.

42. Completion of Subdivision lines of Township 4 North, Range 6 East.

Chains.

Land, rolling.
Soil, sandy and gravelly, 2nd and 3rd rate.
Timber, palo verde and mesquite.
Undergrowth, greasewood and ocotillo, 5 ft. high.

40.00 N. 89° 53' E., on a random line, bet. secs. 5 and 8.
Set temp. $\frac{1}{4}$ sec. cor.
80.28 Intersect N. and S. line, 2 lks. N. of the cor. of secs. 4, 5, 8 and 9.
Thence,
S. 89° 54' W., on a true line, between secs. 5 and 8.
Over rolling land, thru. scattering timber and undergrowth.
27.88 Wash, 10 lks. wide $3\frac{1}{2}$ ft. deep, course SE.
40.14 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$$\frac{1}{4} \frac{S \ 5}{S \ 8}$$

1919

from which,

A palo verde, 8 ins. in diam., brs. N. 55 $\frac{1}{2}$ ° W., 90 lks. dist., marked $\frac{1}{4}$ S 5 B T.
A mesquite, 8 ins. in diam., brs. S. 6 $\frac{3}{4}$ ° E., 170 lks. dist., marked $\frac{1}{4}$ S 8 B T.
71.18 Wash, 12 lks. wide, 3 ft. deep, course S. 80° E.
80.28 The cor. of secs. 5, 6, 7 and 8.
Land, rolling.
Soil, sandy and gravelly, 2nd and 3rd rate.
Timber, palo verde, and mesquite.
Undergrowth, greasewood and ocotillo brush, 5 ft. high.

40.00 S. 89° 50' W., on a random line, bet. secs. 6 and 7.
Set temp. $\frac{1}{4}$ sec. cor.
78.52 Intersect the W. bdy. of Tp., 5 lks. S. of the cor. of secs. 1, 6, 7 and 12, described in Book "D."
Thence,
N. 89° 52' E., on a true line, bet. secs. 6 and 7.
Over hilly land, thru. scattering timber and undergrowth.
Descend SE. slope, 83 ft.
15.00 Foot of descent; leave hilly land, brs. NE. and SW.; enter rolling, sandy, gravelly land.
38.52 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$$\frac{1}{4} \frac{S \ 6}{S \ 7}$$

1919

from which,


A palo verde, 4 ins. in diam., brs. N. 57° E., 112 lks. dist., marked $\frac{1}{4}$ S 6 B T.
A palo verde, 4 ins. in diam., brs. S. 23 $\frac{1}{2}$ ° E., 33 lks. dist., marked $\frac{1}{4}$ S 7 B T.
71.18 Dry sand wash, 12 lks. wide, 3 ft. deep, course SE.
78.52 The cor. of secs. 5, 6, 7 and 8.
Land, rolling, and hilly.
Soil, sandy, gravelly and stony, 2nd, 3rd and 4th rate.
Timber, mesquite and palo verde.
Undergrowth, greasewood and ocotillo brush, 5 ft. high.

N. 0° 03' W., on a true line, bet. secs. 5 and 6.
Over rolling land, thru. scattering timber and undergrowth.

Completion of Subdivision lines of Township 4 North, Range 6 East, 43

Chains.


- 5.00 Wash, 6 lks.wide, 3 ft. deep, course E.
- 17.50 Wash, 10 lks.wide, 2 ft. deep, course E.
- 40.00 Set an iron post, 3ft.long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,



from which,

- A palo verde, 6 ins. in diam., brs.N. 14°W., 86 lks.dist., marked $\frac{1}{4}$ S 6 BT.
- A palo verde, 6 ins. in diam., brs.S. 24°E., 85 lks.dist., marked $\frac{1}{4}$ S 5 BT.

- 43.80 Wash, 15 lks.wide, 2 ft. deep, course E.
 - 68.20 Old road, brs.NW. and SE.
 - 70.90 Wash, 40 lks.wide, course E.
 - 78.44 Intersect the First Standard Parallel North, 352 lks.W. of the reestablished standard cor.of secs. 31 and 32, T.5 N., R.6 E., as hereinbefore described.
- At point of intersection,
Set an iron post, 3 ft.long, 2 ins. in diam., 24 ins. in the ground, for closing cor. of secs. 5 and 6, marked on brass cap,



from which,

- A mesquite, 8 ins. in diam., brs.S. 6°E., 251 lks.dist., marked CC T4N R6E S5 BT.
- A mesquite, 8 ins. in diam., brs.S. 14 $\frac{1}{4}$ °W., 324 lks.dist., marked CC T4N R6E S6 BT.

Land, rolling.
Soil, sandy and gravelly, 2nd and 3rd rate.
Timber, palo verde and mesquite.
Undergrowth, greasewood and catclaw brush, 4 ft. high.

The continued satisfactory adjustment of the solar apparatus during the survey of this township is indicated from field tests, as described in Book "D," page 3.

GENERAL DESCRIPTION.

The land in the southern portion of this township is broken and hilly, while in the central and northern portions, the land is more or less rolling in character, the soil ranging from sandy clay loam to decomposed granite stone.

The soil of the hilly portion of the township is generally a stony clay loam of very little value for agricultural purposes. The soil of the rolling land in the township is either a sandy or gravelly clay loam, and can nearly all be classified as 2nd rate, is covered with a scant growth of grass and heavy greasewood brush.

A well at the "Pemberton Ranch" in sec.22, and spring in sec.30 furnish the only water in this township.

The entire township is covered with mesquite, palo verde and ironwood timber, the trees however, being too small to have any commercial value except for fuel and

fencing purposes.

Copper ore is found in the "Red Mountain Mine" which is located in secs. 30 and 31 of this township.

On account of its brushy character, the land in this township is very valuable for grazing purposes, for which it is being used at the present time.

There is one settler residing at the "Pemberton Ranch" in sec. 22.

There is also a bunk house near the spring in sec. 31, unoccupied at time of survey.
