

101

3326

JAN 19 1920

Book "E".

4-679

BOOK 3326

FIELD NOTES

NOV 25 1919

OF THE
OF THE

SURVEY OF

South, East and North Boundaries, and

Subdivision lines of

TOWNSHIP 7 NORTH, RANGE 3 EAST, and

RESURVEY OF

Part of the East Boundary of

TOWNSHIP 7 NORTH, RANGE 2 EAST,

Of the Gila and Salt River Base and Meridian,

In the State of Arizona.

EXECUTED BY

Geo. F. Rigby, U.S.S.

with correction of survey of part of the Subdivision lines by

H. L. Baldwin, U. S. Surveyor.

~~In the capacity of U. S. Surveyor~~, under Special Instructions dated October 20, 1916,

issued by the United States Surveyor General to govern surveys included in Group

No. 61, which were approved by the Commissioner of the General Land

Office, November 6, 1916, and Assignment Instructions dated November 25, 1916.

Resurvey and Survey commenced December 5, 1916. (Rigby)

Resurvey and Survey completed January 29, 1917. (Rigby)

Corrective survey of Subdivision, May 21-23, 1918 (Baldwin).

3326


33264

(1A) 102

3326

BOOK 3326

INDEX DIAGRAM.

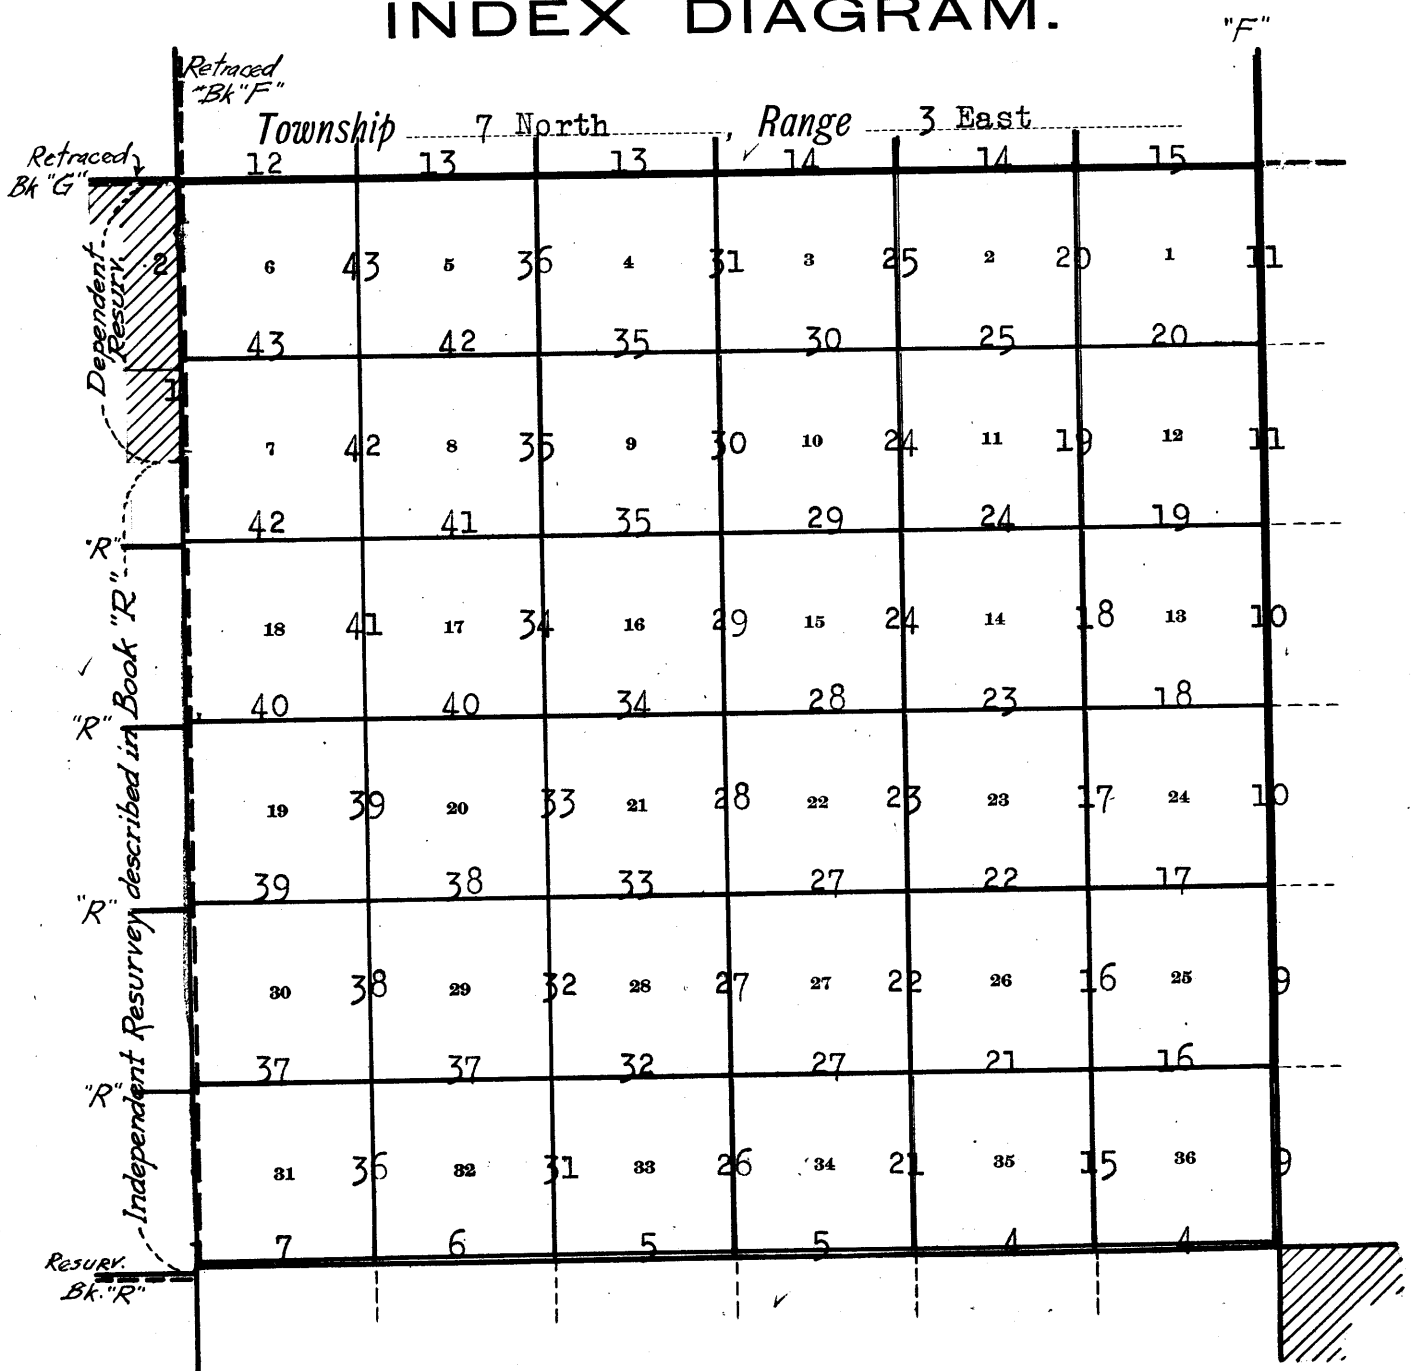

- Lines surveyed under this group.
- Lines retraced or resurveyed under this group.
- Lines of accepted surveys.
- Unsurveyed.
- Areas surveyed as per accepted plats on file.

Chains.

Resurveys and surveys hereinafter described, were executed on dates shown on diagram on page 46 hereof, by Geo. F. Rigby, U.S. Surveyor, using a Buff and Buff transit No. 9209, with Smith solar attachment. The instrument is provided with two double verniers, placed opposite to each other, reading to single minutes of arc, which is also the least count of the latitude and declination arcs.

This instrument was approved November 25, 1916, conditional upon satisfactory field tests, by the Assistant Supervisor of Surveys for Arizona and California.

Subsequent field tests showed the solar attachment to be permanently out of adjustment, which necessitated the prolongation by deflection angles and back sights and foresights, of the true meridian determined by Polaris observation, to initial cors., whence it was transferred in the same manner to all corners of the survey.

All measurements were made with a five chain steel tape, properly adjusted, and slope measurements were computed in horizontal distances by use of clinometer.

Jan. 6, 1917. At camp, near cor. of secs. 2, 3, 34 and 35 on S. bdy. of T. 7 N., R. 3 E., lat. 33° 54' N., long. 112° 2' W. at Oh. 25.3m. a.m., l.m.t., observe Polaris at western elongation in accordance with instructions in the Manual, and mark a point in the line thus determined by a tack in a stake driven in the ground, 5 chs. N. of instrument.

At 7h. 30m. a.m., l.m.t., lay off the azimuth of Polaris 1° 22' to the east, and mark a point on the true meridian, by a stake driven in the ground, 5 chs. N. of instrument. Transfer this meridian as described above.

It appeared upon examination of the field notes of Geo. F. Rigby's resurvey of the W. bdy. of T. 7 N., R. 3 E. in Jan. 1917, that he executed the same as a dependent resurvey in its entirety, whereas, only about one and one half miles of said line were dependent on old corners, and the remainder was subject to rectification; therefore, only Rigby's notes of dependent resurvey are retained in this book, and the independent resurvey of remainder of the line is described in Book "R" of this group. The cors. referring to secs. in T. 7 N., R. 3 E. only, which were set by Rigby, were moved by H. L. Baldwin, U.S. Surveyor, in May, 1918, when independent resurvey was made in order to bring them in alignment with the reestablished cors. of T. 7 N., R. 2 E., subdivided at that time. The movement of Rigby's corners on the township boundary also required a change in the position in the 1/4 sec. cors. on the latitudinal sec. lines of the W. tier of secs., except bet. secs. 5 and 7. The distances that were changed by the movement of cors. are preceded in the following notes of survey of subdivision lines by the initials "H. L. B." indicating that H. L. Baldwin, U.S. Surveyor is responsible for such record distances.

Retracement for Resurvey.

Part of East bdy. of Township 7 North, Range 3 East.

From the original 1/4 sec. cor. of secs. 7 and 12, which is a granite stone, 6x5x4 ins. above ground, firmly set, marked "1/4" on W. face, and witnessed by one bearing tree E. of cor., marked "1/4S7BT." and one bearing tree SW. of cor., marked "1/4S12BT."

North, on random line on E. bdy. of sec. 12 (N. 1/2).

39.84

Fall 2 lks. E. of the original cor. of secs. 1, 6, 7 and 12, which is a porphyry stone, 7x7x6 ins. above ground, firmly set, marked with 1 notch on N. edge, and 5 notches on S. edge, and witnessed by mound of stone, W. of cor. no bearing trees.

2. Retracement of part of E. bdy. of Township 7 North, Range 2 East.

Chains.

The true course and dist. of N. half of E. bdy. of sec. 12, are therefore N. 0° 2' W., 39.84 chs.

39.84

40.31

From the original cor. of secs. 1, 6, 7 and 12, North, on random line, on E. bdy. of sec. 1 (S. 1/2). Fall 2 lks. W. of the original 1/4 sec. cor. of secs. 1 and 6, which is a granite stone, 7x5x5 ins. above ground, firmly set, marked "1/4" on W. face and witnessed by one bearing tree NE. of cor., marked "1/4 S6 BT.", and one tree N. 1/2° W. from cor. marked "1/4 S1 BT."

The true course and dist. of S. 1/2 of E. bdy. of sec. 1 are therefore N. 0° 2' E., 40.31 chs.

Thence, North, on random line on E. bdy. of sec. 1 (N. 1/2).

39.79

Fall 3 lks. E. of the original cor. of Ts. 7 and 8 N., Rs. 2 and 3 E., which is a granite stone 10x8x6 ins. above ground, firmly set, marked with 6 notches on each of N., S. E. and W. edges, "8N" on NE., "3E" on SE., "7N" on SW., and "2E" on NW. face, and witnessed by a mound of stone S. of cor. No bearing trees.

The true course and dist. of N. 1/2 of E. bdy. are therefore N. 0° 3' W., 39.79 chs.

Dependent resurvey of part of E. bdy. of T. 7 N., R. 2 E.


Reestablish the 1/4 sec. cor. of secs. 7 and 12, herebefore described, to refer to sec. 12 only by obliterating the markings on the bearing tree E. of line, and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Thence, N. 0° 2' W., on a true line on E. bdy. of sec. 12 (N. 1/2). Over rolling and mountainous land, through scattering undergrowth.

2.59

(40.00 chs. northerly from the reestablished cor. of secs. 7 and 18, T. 7 N., R. 3 E.)

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 7, T. 7 N., R. 3 E., marked on brass cap,



and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

Descend 205 ft.

27.36

Small gulch, course N. 87° E. Ascend 90 ft.

32.86

Spur, slopes E. Descend 200 ft.

39.84

Intersect the original cor. of secs. 1, 6, 7 and 12, herebefore described. This cor. will hereafter refer to secs. 1 and 12 only. No change in marking or accessories necessary.

Land, rolling and mountainous.

Soil, rocky, 4th rate.

No timber.

Undergrowth, scattering catclaw, palo verde and mesquite.

N. 0° 2' E.. on a true line, along east bdy. of sec. 1 (S. 1/2). Over rolling and mountainous land, thru scattering undergrowth; descend.

1.41

New river, 60 lks. wide, 1 ft. deep, course N. 85° W.

2.75

(80.00 chs. northerly from the reestablished cor. of secs. 7 and 18, T. 7 N., R. 3 E.)

Retracement of part of E. bdy. of Township 7 North, Range 2 East. 3

Chains.

Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 6 and 7, T. 7 N., R. 3 E., marked on brass cap,



and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

Ascend 25 ft.
Descend.

7.75
9.74
13.74
17.04
40.31

Gulch, course SW.

Gulch, course S. 10° E.

Same gulch, course S. 5° W. Ascend 555 ft.

Intersect the original 1/4 sec. cor. of secs. 1 and 6, hereinbefore described. Reestablish this cor. to refer to sec. 1 only, by obliterating the markings on the bearing tree E. of line, and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.


Thence,

N. 0° 3' W., on true line on E. bdy. of sec. 1 (N. 1/2).

2.44

(40.00 chs. northing from the reestablished cor. of secs. 6 and 7, T. 7 N., R. 3 E.)

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 6, marked on brass cap,



and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

31.07
39.79

Ridge, hrs. N. 75° W. and S. 75° E. Descend 200 ft.


Intersect the original cor. of Rs. 7 and 8 N., Rs. 2 and 3 E., hereinbefore described.

Land, rolling and mountainous.

Soil, rocky, 4th rate.

No timber.

Undergrowth, scattering catclaw, palo verde and mesquite.



4. Survey of the South bdy. of Township 7 North, Range 3 East.

Chains.

The original cor. of Ts. 6 and 7 N., Rs. 3 and 4 E. is a porphyry stone, 12x10x8 ins. above ground, firmly set, marked with 6 notches on each of N., S., E. and W. edges, "7N" on NE., "6N" on SW., "4E" on SE. and "3E" on NW. face, and witnessed by mound of stone, S. of cor. No bearing trees.

Thence,

West, on random line, bet. Ts. 6 and 7 N., R. 3 E. setting temp. 1/4 sec. and sec. cors. at intervals of 40 chs., and at 480.48 chs., intersect E. bdy. of Tp. 7 N., R. 2 E., 3.74 chs. N. of original cor. of Ts. 6 and 7 N., Rs. 2 and 3 E., which is a sandstone 6x8x4 ins. above ground, marked with 6 notches on each of N., S. E. and W. edges, and witnessed by mound of stone S. of cor., and bearing trees NE. and SE. of cor.

Change this cor. to refer to Ts. 6 and 7 N., R. 2 E. only, by obliterating notches on E. edge of stone and marks on bearing trees and by moving mound of stone from S. to W. of cor. (See book "R" of this group for later reestablishment of this cor.)

At point of intersection, set temp. cor. of Ts. 6 and 7 N., R. 3 E. Return to original cor. of Ts. 6 and 7 N., Rs. 3 and 4 E. Thence,

West, on a true line, bet. secs. 1 and 36.

Over rolling & mountainous land, thru. scattering undergrowth. Descend 170 ft.

14.75 Gulch, course S. 85° W.

15.05 Same gulch, course N. 80° W. Thence over rolling land.

34.75 Descend 25 ft.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor. marked on brass cap,

1/4 S 36
S 1
1917

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor. Ascend 35 ft.

49.97 South edge of butte; descend 90 ft.

59.86 Wash, course N. 20° W. Ascend 75 ft.

79.81 Spur, slopes N. Descend.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 1, 2, 35 and 36, marked on brass cap,

T7N R3E
S35 | S36
S 2 | S 1
T6N
1917

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling and mountainous.

Soil, sandy loam, 7 ins. deep, gravelly, 3rd rate.

No timber.

Undergrowth, scattering palo verde, mesquite, cactus and amole.

No grass.

West, on a true line, bet. secs. 2 and 35.

Over rolling land, thru. scattering undergrowth.

Descend 50 ft.

4.91 Wash, course N. 30° W. Ascend 15 ft.

19.88 Descend 25 ft.

24.87 Head of small wash, course N. Ascend 40 ft.

29.83 Low spur, slopes N. Descend 25 ft.

34.82 Wash, course N. Ascend 20 ft.

40.00 Point of spur, slopes N.

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

1/4 S 35
S 2
1917

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

Survey of the
South Boundary of T. 7 N., R. 3 E.

Chains.

54.92 Desc. 95 ft.
 64.88 Wash, course N.10°W. Asc. 40 ft.
 67.56 Spur, slopes N. Desc. 70 ft.
 80.00 Hosea Cline's house brs. N.52°30'W.
 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 2, 3, 34 and 35, marked on
 brass cap

T7N R3E
 S34 | S35
 S 3 | S 2
 T6N
 1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, W.
 of cor.
 Land, rolling.
 Soil, rocky, 3rd and 4th rates.
 No timber.
 Undergrowth, cat claw, palo verde, mesquite and cactus.
 No grass.

23.93 West on a true line, bet. secs. 3 and 34.
 40.00 Over rolling land, through scattering undergrowth.
 Desc. 110 ft.
 Dim road, brs. NE. and SW. Thence over gently rolling land.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for ¼ sec. cor., marked on brass cap

1 S34
 4 S 3
 1917

From which
 A palo verde, 7 ins. diam., brs. N.64½°W.,
 139 lks. dist., marked ¼ S34 BT.
 A palo verde, 8 ins. diam., brs. S.61½°E.,
 180 lks. dist., marked ¼ S3 BT.

73.00 From this cor., Hosea Cline's house brs. N.72°17'E.
 80.00 Gulch, course S.80°W.
 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 3, 4, 33 and 34, marked on
 brass cap

T7N R3E
 S33 | S34
 S 4 | S 3
 T6N
 1917

From which
 A palo verde, 8 ins. diam., brs. N.79½°E.,
 347 lks. dist., marked T7N R3E S34 BT.
 A palo verde, 9 ins. diam., brs. S.48°E.,
 179 lks. dist., marked T6N R3E S3 BT.
 A palo verde, 8 ins. diam., brs. S.78°W.,
 122 lks. dist., marked T6N R3E S4 BT.

No other trees within limits. Raise a mound of stone, 2
 ft. base, 1½ ft. high, W. of cor.
 Land, rolling.
 Soil, 4th rate.
 No timber.
 Undergrowth, palo verde, mesquite and cactus.

3.00 West on a true line, bet. secs. 4 and 33.
 9.99 Over rolling bottom land, through dense undergrowth.
 Gulch, course N.65°W. Asc. 20 ft.
 Spur, slopes N. Desc. 50 ft.

Survey of the
South Boundary of T. 7 N., R. 3 E.

Chains.
30.96
40.00

55.00
61.98
70.00
80.00

Creek, course SW. Thence over gently rolling land.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S33
S 4
1917

From which

A palo verde, 7 ins. diam., brs. N.43°E.,
107 lks. dist., marked $\frac{1}{4}$ S33 BT.

A palo verde, 6 ins. diam., brs. S.57°E.,
47 lks. dist., marked $\frac{1}{4}$ S4 BT.

Desc. 30 ft.

Gulch, course SW. Asc. 30 ft.

Thence over gently rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 4, 5, 32 and 33, marked on
brass cap

T7N R3E
S32 | S33
S 5 | S 4
T6N
1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
of cor.

Land, rolling and gently rolling.

Soil, 3rd and 4th rates.

No timber.

Undergrowth, dense palo verde, mesquite and cactus.

No grass.

28.50
33.90
40.00

West on a true line, bet. secs. 5 and 32.
Over rolling land, through dense undergrowth.

Desc. 70 ft.

Gulch, course SW. Asc. 80 ft.

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S32
S 5
1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N.
of cor.

49.94
65.18
69.88
80.00

Spur, slopes S. Desc. 70 ft.

Road, brs. N.10°W. and S.

Gulch, course S.25°E. Asc. 25 ft.

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 5, 6, 31 and 32, marked on
brass cap

T7N R3E
S31 | S32
S 6 | S 5
T6N
1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
of cor.

Land, rolling.

Soil, rocky, 4th rate.

No timber.

Undergrowth, dense palo verde, cactus, amole and mesquite.

No grass.

Survey of the South bdy. of Township 7 North, Range 3 East. 7

Chains.

West, on a true line, bet. secs. 6 and 31.
 Over rolling land, thru. dense undergrowth.
 Ascend 90 ft.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$$\begin{array}{r} \frac{1}{4} \text{ S } 31 \\ \hline \text{S } 6 \\ 1917 \end{array}$$

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 N. of cor.

54.97 Top of ascent.
 75.00 Descend 30 ft.
 79.65 Gulch, course N. Ascend.
 80.48 Intersect temp. township cor., in place of which set an
 iron post 3 ft. long, 3 ins. in diam., 24 ins. in the
 ground for reestablished cor. of 1 S. 6 and 7 N., R. 3
 E., marked on brass cap,

$$\begin{array}{r} \text{T7N} \\ \text{R3E} \\ \text{S31} \\ \hline \text{S } 6 \\ \text{T6N} \end{array}$$


1917

and raise a mound of stone 3 ft. base, 2 ft. high, E.
 of cor.
 Land, rolling.
 Soil, rocky, 3rd and 4th rate.
 No timber.
 Undergrowth, dense palo verde, mesquite, catclaw and
 cactus.
 No grass.

Survey of the
East Boundary of T. 7 N., R. 3 E.

Chains.

From orig. cor. of Ts. 6 and 7 N., Rs. 3 and 4 E., herein-
before described,
North bet. secs. 31 and 36.
Over broken mountainous land, through scattering undergrowth.
Desc. 95 ft.
7.37 Gulch, course N.70°W. Asc. 225 ft.
25.94 Spur, slopes SW. Desc. 35 ft.
30.90 Gulch, course W. Asc. 90 ft.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
of cor.

44.98 Spur, slopes W. Desc. 75 ft.
49.85 Gulch, course W. Asc. 60 ft.
51.62 Spur slopes W. Desc. 80 ft.
56.47 Gulch, course S.80°W. Asc. 215 ft.
75.78 Spur, slopes W. Desc. 50 ft.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 25, 30, 31 and 36, marked on
brass cap




And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
of cor.

Land, broken mountainous.
Soil, rocky clay, 4th rate.
No timber.
Undergrowth, palo verde and mesquite.


North bet. secs. 25 and 30.
Over mountainous land, through scattering undergrowth.
Desc. 55 ft.

18.92 Gulch, course S.75°W. Asc. 256 ft.
34.34 Spur, slopes W. Desc. 140 ft.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
of cor.

40.20 Gulch, course W. Asc. 110 ft.
49.80 Spur, slopes W. Desc. 250 ft.
62.98 Gulch, course W. Asc. 95 ft.
65.56 Spur, slopes W. Desc. 90 ft.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 19, 24, 25 and 30, marked on
brass cap



Survey of the
East Boundary of T. 7 N., R. 3 E.

10
Chains.

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.
Land, rough mountainous.
Soil, rocky, 4th rate.
No timber.
Undergrowth, cat claw, cactus, palo verde and mesquite.

2.98
40.00

North bet. secs. 19 and 24.
Over rough mountainous land, through scattering undergrowth.
Desc. 25 ft.
Gulch, course W. Asc. 1365 ft.
Set an iron post, 3 ft. long, 1 in. diam., 3 ins. in the ground, in a mound of stone, for 1/4 sec. cor., marked on brass cap

1
S24 | S19
1916

62.48
80.00

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.
Edge of mesa, brs. E. and W. Desc. 45 ft.
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 13, 18, 19 and 24, marked on brass cap

T7N
R3E | R4E
S13 | S18
S24 | S19
1916

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.
Land, extremely rough mountainous.
Soil, rocky, 4th rate.
No timber.
Undergrowth, amole and mesquite.

15.00
40.00

North bet. secs. 13 and 18.
Over rolling mesa, through scattering undergrowth.
Desc. gradually, 125 ft.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap

1/4
S13 | S18
1916

70.00
80.00

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.
Thence along W. slope.
Desc. 45 ft.
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 7, 12, 13 and 18, marked on brass cap

T7N
R3E | R4E
S12 | S 7
S13 | S18
1916

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Survey of East ady. of Township 7 North, Range 3 East. 11.

Chains.

Land, rolling mesa.
Soil, rocky, 4th rate.
No timber.
Undergrowth, catclaw, palo verde, mesquite and cactus.

40.00 North, bet. secs. 7 and 12.
Over rolling land, thru. scattering undergrowth.
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

S 12 | S 7
1916

57.00 and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
Descend 210 ft.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 1, 6, 7 and 12, marked on brass cap,

T 7 N
R 3 E | R 4 E
S 1 | S 6
S 12 | S 7
1916

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Land, rolling, and rolling mountainous.
Soil, 4th rate..
No timber.
Undergrowth, catclaw, palo verde and mesquite.
No grass.

11.28 North, bet. secs. 1 and 6.
Over rough, mountainous land, thru. scattering undergrowth.
Descend 380 ft.

32.23 Gulch, course N. 70° W. Ascend 65 ft.
Spur, slopes S. 80° W. Descend 180 ft.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

S 1 | S 6
1916

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

41.90 Gulch, course W. Ascend 30 ft.

42.78 Spur, slopes W. Descend 45 ft.

46.72 Draw, course W. Ascend 45 ft.

51.67 Spur, slopes W. Descend 295 ft.

77.14 Intersect line run east 480 chs. from original cor. of Ts. 7 and 8 N., Rs. 2 and 3 E. at a point 52 lks. W. of temp. Tp. cor. At point of intersection,

Set an iron post, 3 ft. long, 3 ins. in diam., 24 ins. in the ground, for cor. of Ts. 7 and 8 N., Rs. 3 and 4 E., marked on brass cap,

T 8 N
R 3 E | R 4 E
S 36 | S 31
S 1 | S 6
T 7 N
1916

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, S. of cor.

12. Survey of East bdy. of Township 7 North, Range 3 East.

Chains.

A sycamore, 7 ins. in diam., brs. N. 1° E., 157 lks. dist., marked T8N R4E S31 BT.
A sycamore, 12 ins. in diam., brs. N. 6 3/4° W., 134 lks. dist., marked T8N R3E S36 BT.

No other trees within limits.
Land, rough, mountainous.
Soil, rocky, 4th rate.
No timber.
Undergrowth, scattering catclaw, palo verde, mesquite and cactus.

Survey of North bdy. of Township 7 North, Range 3 East.

From original cor. of Ts. 7 and 8 N., Rs. 2 and 3 E., hereinbefore described,
East, 480 chs., and set temp. cor. of Ta. 7 and 8 N., Rs. 3 and 4 E., E. edy. of T. 7 N., R. 3 E. run N., intersects this line at 52 lks. W. of temp. cor., at which point of intersection, the township cor. is established, as hereinbefore described. The true length of N. bdy. of T. 7 N., R. 3 E. is therefore 480 chs. - .52 chs. = 479.48 chs.

Return to original cor. of Ts. 7 and 8 N., Rs. 2 and 3 E. Thence,

East, on a true line, bet. secs. 6 and 31.
Over mountainous land, thru scattering undergrowth.
Descend 65 ft.

- 4.85 Gulch, course N. Ascend 135 ft..
- 12.27 Spur, slopes N. Descend 55 ft.
- 15.67 Gulch, course N. Ascend 40 ft.
- 18.69 Spur, slopes N. Descend 70 ft.
- 23.58 Gulch, course N. 10° E. Ascend 55 ft.
- 27.49 Spur, slopes N. Descend 185 ft.
- 33.90 gulch, course NW. Ascend 255 ft.
- 39.48 Set an iron post 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

+	S 31
	S 6
	1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

- 44.77 Spur, slopes NW. Descend 20 ft.
- 51.75 Wash, course NW. Ascend 25 ft.
- 56.22 Ridge, brs. NE. and S. 70° W. Thence along S. slope of ridge.
- 79.48 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 5, 6, 31 and 32, marked on brass cap,

T8N	R3E
S31	S32
S 6	S 5
T7N	
1916	

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, mountainous.
Soil, rocky, 4th rate.
No timber.
Undergrowth, catclaw, palo verde, mesquite and cactus.

Survey of the
North Boundary of T. 7 N., R. 3 E.

Chains.

East on a true line, bet. secs. 5 and 32.
Over mountainous land, through scattering undergrowth.
Asc. 120 ft.

5.71
8.61
16.98
23.98
31.55
40.00

Spur, slopes S.25°W. Desc. 50 ft.
Gulch, course SW. Asc. 220 ft.
Ridge, brs. NW. and SE. Across top of ridge.
Leave top of ridge, brs. NW. and SE. Desc. 165 ft.
Gulch, course S. Asc. 290 ft.
Set an iron post, 3 ft. long, 1 in. diam., in a mound of
stone, for 1/4 sec. cor., marked on brass cap

1 S32
4 S 5
1916

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N.
of cor.

41.58
54.83
60.35
80.00

Spur, slopes S.15°W. Desc. 295 ft., over cliffs.
Gulch, course S. Asc. 100 ft.
Spur, slopes S. Desc. 245 ft.
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 4, 5, 32 and 33, marked on brass
cap

T8N R3E
S32 S33
S 5 S 4
T7N
1916

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W.
of cor.

Land, rough mountainous.
Soil, rocky, 4th rate.
No timber.
Undergrowth, cat claw, palo verde and mesquite.

East on a true line, bet. secs. 4 and 33.
Over mountainous land, through scattering undergrowth.
Asc. 30 ft.

3.18
17.20
30.74
40.00

Spur, slopes S. Desc. 75 ft.
Gulch, course S.40°W. Asc. 80 ft.
Spur, slopes SW. Desc. 170 ft.
Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the
ground, for 1/4 sec. cor., marked on brass cap

1 S33
4 S 4
1916

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N.
of cor.

46.00
55.00
56.70
59.70
75.60
80.00

North Canyon, course S., containing water in pools. Asc.
170 ft.
Rocky spur, slopes N. Desc. 60 ft.
Head og draw, course NW. Asc. 13 ft.
Thence desc. along N. slope.
Gulch, course N. Asc. 70 ft.
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 3, 4, 33 and 34, marked on
brass cap

T8N R3E
S33 S34
S 4 S 3
T7N
1916

14

Survey of the
North Boundary of T. 7 N., R. 3 E.

Chains.

And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
Land, mountainous.
Soil, rocky, 4th rate.
No timber.
Undergrowth, cat claw, palo verde, mesquite and cactus.

27.88
34.88
40.00

East on a true line, bet. secs. 3 and 34.
Over mountainous land, through scattering undergrowth.
Asc. 740 ft.
Gulch, course N.25°W. Continue ascent.
Spur, slopes NW. Desc. 125 ft.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

1 S34
4 S 3
1916

44.02
79.80

And raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
Gulch, course NW. Asc. 1070 ft.
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for witness cor. to cor. of secs. 2, 3, 34 and 35, marked on brass cap

T8N R3E
S34 | S35 WC
S 3 | S 2
1916

80.00

And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
The true point for cor. of secs. 2, 3, 34 and 35 falls on ledge of rock, 20 ft. square. Mark a cross at the exact corner point, flush with the ground.
Land, mountainous.
Soil, rocky, 4th rate.
No timber.
Undergrowth, cat claw, palo verde, mesquite and cactus.

5.57
28.19
40.00

East on a true line, bet. secs. 2 and 35.
Over mountainous land, through scattering undergrowth.
Asc. 150 ft.
High ridge, brs. NE. and SW. Desc. 790 ft.
Gulch, course S.25°E. Asc. 345 ft.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

1 S35
4 S 2
1916

42.67
71.54
80.00

And raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
Spur, slopes S. Desc. 750 ft.
Gulch, course S.10°E. Asc. 45 ft.
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 1, 2, 35 and 36, marked on brass cap

T8N R3E
S35 | S36
S 2 | S 1
T7N
1916


Survey of the
North Boundary of T. 7 N., R. 3 E.

Chains.

And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
Land, rough mountainous.
Soil, rocky, 4th rate.
No timber.
Undergrowth, cat claw, palo verde, mesquite and cactus.

1.98
17.39
33.19
40.00

East on a true line, bet. secs. 1 and 36.
Over mountainous land, through scattering undergrowth.
Asc. 20 ft.
Spur, slopes S.10°E. Desc. 365 ft.
Gulch, course SE. Asc. 140 ft.
Spur, slopes S. Desc. 150 ft.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap



56.00
80.00

And raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
Creek, 15 lks. wide, 10 ins. deep, course SW. Asc. 100 ft.
Intersect the cor. of T. 7 and 8 N., R. 3 and 4 E., hereinbefore described.
Land, mountainous.
Soil, rocky, 4th rate.
No timber.
Undergrowth, cat claw, palo verde, mesquite and cactus.

Survey of the
Subdivision of T. 7 N., R. 3 E.


15.60
31.64
38.75
40.00

From the cor. of secs. 1, 2, 35 and 36, hereinbefore described, on the S. bdy. of the Tp.,
N.0°1'W., bet. secs. 35 and 36.
Over rolling land, through scattering undergrowth.
Desc. gradual N. slope.
Skunk Creek, course W. Asc. 160 ft.
E. edge of butte; desc. 140 ft.
Gulch, course W. Asc. 15 ft.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap



43.50
62.30
80.00

And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
Gulch, course SW. ~~Rolling~~ over rolling land.
Gulch, course SW.
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 25, 26, 35 and 36, marked on brass cap



From which
A cat claw, 6 ins. diam., brs. N.20½°E.,
69 lks. dist., marked T7N R3E S25 BT.

Survey of the
Subdivision of T. 7 N., R. 3 E.

Chains.

A cat claw, 8 ins diam., brs. N.71½°W.,
98 lks. dist., marked T7N R3E S26 BT.
No other trees within limits. Raise a mound of stone, 2 ft.
base, 1½ ft. high, W. of cor.
Land, rolling.
Soil, rocky, 4th rate.
No timber.
Undergrowth, cat claw, palo verde, mesquite and cactus.
No grass.

40.00 East on a random line, bet. secs. 25 and 36.
Set temp. ¼ sec. cor.
79.96 Intersect E. bdy. of Tp., 5 lks. S. of the cor. of secs.
25, 30, 31 and 36, hereinbefore described.
Thence
S.89°58'W., on a true line, bet. secs. 25 and 36.
Over rolling land, through dense undergrowth.
Desc. 155 ft.
10.05 Ravine, course NW. Asc. 70 ft.
15.40 Spur, slopes NW. Desc. 175 ft.
30.05 Small gulch, course NW. Asc. 55 ft.
35.00 Spur, slopes NW. Desc. 285 ft.
39.98 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for ¼ sec. cor., marked on brass cap

¼ S25
¼ S36
1917.

And raise a mound of stone, 2 ft. base, 1½ ft. high, N.
of cor.
60.00 Small wash, course SW. Continue descent.
79.96 The cor. of secs. 25, 26, 35 and 36.
Land, rolling.
Soil, rocky, 4th rate.
No timber.
Undergrowth, cat claw, palo verde and mesquite.

N.0°1'W., bet. secs. 25 and 26.
Over rolling land, through dense undergrowth.
Asc. 50 ft.
10.00 Desc.
18.97 Gulch, course S.30°W.
25.00 Asc. 40 ft.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for ¼ sec. cor., marked on brass cap

¼
S26 ↑ S25
1917

From which
A sycamore, 7 ins. diam., brs. N.59½°W.,
129 lks. dist., marked ¼S26 BT.
No other trees within limits. Raise a mound of stone, 2
ft. base, 1½ ft. high, W. of cor.
Desc. 25 ft.
51.69 Wash, course W. Asc. 375 ft.
79.03 Ridge, brs. N.70°W. and S.70°E. Desc. 10 ft.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 23, 24, 25 and 26, marked on
brass cap

Survey of the
Subdivision of T. 7 N., R. 3 E.

Chains.

T7N R3E
S23 | S24
S26 | S25
1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
Land, rolling.
Soil, rocky, 4th rate.
No timber.
Undergrowth, cat claw, palo verde, mesquite and cactus.
No grass.

40.00 N.89°58'E., on a random line, bet secs. 24 and 25.
Set temp. ¼ sec. cor.
80.00 Intersect E. bdy. of Tp., 40 lks. S. of the cor. of secs. 19, 24, 25 and 30, hereinbefore described.
Thence
S.89°41'W., on a true line, bet. secs. 24 and 25.
Over mountainous land, through scattering undergrowth.
Desc. 105 ft.
7.40 Gulch, course SW. Asc. 85 ft.
18.30 Spur, slopes SW. Desc. 60 ft.
25.20 Draw, course SW. Asc. 200 ft.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

¼ S24
¼ S25
1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
45.90 Spur, slopes SW. Desc. 290 ft.
56.30 Draw, course SW. Asc. 55 ft.
60.20 Spur, slopes SW. Desc. 40 ft.
65.15 Draw, course SW. Asc. 95 ft.
80.00 The cor. of secs. 23, 24, 25 and 26.
Land, mountainous.
Soil, rocky, 4th rate.
No timber.
Undergrowth, cat claw, paloverde, mesquite and cactus.

N.0°1'W., bet. secs. 23 and 24.
Over mountainous land, through scattering undergrowth.
Desc. 80 ft.
4.85 Gulch, course N.60°W. Asc. 160 ft.
13.20 Spur, slopes W. Desc. 55 ft.
15.35 Gulch, course SW. Asc. 370 ft.
36.12 Spur, slopes S.70°W. Desc. 120 ft.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

¼
S23 | S24
1917

From which
A cedar, 8 ins. diam., brs. S.84°E., 111 lks. dist., marked ¼S24 BT.
No other trees within limits. Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
42.55 Gulch, course S.70°W. Asc. 290 ft.
56.62 Spur, slopes SW. Desc. 30 ft.

18

Survey of the
Subdivision of T. 7 N., R. 3 E.

Chains.

65.50 Head of wash, course SW.
70.00 Foot of cliff, 60 ft. high. Asc. 495 ft.
78.81 Edge of mesa, brs. E. and W. Thence over rolling land.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 13, 14, 23 and 24, marked on brass cap

T7N R3E
S14 | S13

S23 | S24
1917

From which

A cedar, 18 ins. diam., brs. N.78°E.,
125 lks. dist., marked T7N R3E S13 BT.
No other trees within limits. Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
Land, mountainous and rolling.
Soil, rocky, 4th rate.
No timber.
Undergrowth, cat claw, palo verde, mesquite and cactus.

40.00 N.89°41'E., on a random line, bet. secs. 13 and 24.
Set temp. ¼ sec. cor.
79.97 Intersect E. bdy. of Tp., 2 lks. S. of the cor. of secs. 13, 18, 19 and 24, hereinbefore described.
Thence
S.89°40'W., on a true line, bet. secs. 13 and 24.
Over rolling land, through scattering undergrowth.
25.00 Desc. 160 ft.
39.98½ Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

1 S13
4 S24

1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
48.37 Draw, course N. Asc. 40 ft.
53.80 Thence over rolling land.
69.82 Desc. gradual slope, 115 ft.
79.97 The cor. of secs. 13, 14, 23 and 24.
Land, rolling.
Soil, rocky, 4th rate.
No timber.
Undergrowth, mesquite, cat claw, palo verde and cactus.

9.97 N.0°1'W., bet. secs. 13 and 14.
40.00 Over rolling mesa, through dense undergrowth.
Asc. 35 ft.
Spur, slopes W. Desc. gradually, over rolling mesa.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap


1
4
S14 | S13

1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
80.00 Set an iron post, 3 ft. long, 2 ins diam., 24 ins. in the ground, for cor. of secs. 11, 12, 13 and 14, marked on brass cap

Survey of the
Subdivision of T. 7 N., R. 3 E.

Chains.



And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
 Land, rolling mesa.
 Soil, sandy loam, clay subsoil; 3rd rate.
 No timber.
 Undergrowth, dense palo verde, mesquite and cactus.


40.00
79.94

N.89°40'E., on a random line, bet. secs. 12 and 13.
 Set temp. ¼ sec. cor.
 Intersect E. bdy. of Tp., 11 lks. N. of the cor. of secs. 7, 12, 13 and 18, hereinbefore described.

Thence
 S.89°45'W., on a true line, bet. secs. 12 and 13.
 Over rolling mountainous land, through scattering undergrowth.

15.00
19.95
39.97

Desc. 125 ft.
 Gulch, course N. Asc. 40 ft.
 Spur, slopes N. Desc. 200 ft.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap



From which

- A cedar, 7 ins. diam., brs. N.6°E., 257 lks. dist., marked ¼S12 BT.
- A cedar, 7 ins. diam., brs. S.34°W., 191 lks. dist., marked ¼S13 BT.

47.55
51.40
60.20
79.94

Gulch, course N.15°W. Asc. 125 ft.
 Spur, slopes N. Desc. 125 ft.
 Gulch, course N.20°W. Asc. 125 ft.
 The cor. of secs. 11, 12, 13 and 14.
 Land, rolling mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, cat claw, palo verde, mesquite and cactus.

10.00
29.83
35.59
40.00

N.0°1'W., bet. secs. 11 and 12.
 Over rolling mesa, through scattering undergrowth.
 Desc. 160 ft.
 Draw, course E. Asc. 110 ft.
 Thence over rolling mesa.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap



49.00
80.00

And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
 Edge of mesa, brs NE and SW. Desc. 630 ft.
 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 1, 2, 11 and 12, marked on brass cap

Survey of the
Subdivision of T. 7 N., R. 3 E.

20

Chains.

T7N	R3E
S 2	S 1
S11	S12

1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, mountainous.

Soil, rocky, 4th rate.

No timber.

Undergrowth, cat claw, palo verde, mesquite and cactus.

40.00

N.89°45'E., on a random line, bet. secs. 1 and 12.

Set temp. ¼ sec. cor.

79.72

Intersect E. bdy. of Tp., 16 lks. N. of the cor. of secs. 1, 6, 7 and 12, hereinbefore described.

Thence

S.89°52'W., on a true line, bet. secs. 1 and 12.

Over mountainous land, through scattering undergrowth.

Asc. 25 ft.

3.16

Wire fence, brs. NE. and SW. Thence over rolling mesa.

9.96

Leave mesa, brs. N.20°W. and S.10°E. Desc. 515 ft.

28.33

Draw, course N. Asc. 15 ft.

33.32

Spur, slopes N. Desc. 365 ft.

39.86

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

¼	S 1
¼	S12

1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

50.81

Gulch, containing stream of water, 5 lks. wide, 6 ins. deep, course N.25°W. Asc. 460 ft.

72.68

Spur, slopes N.15°W. Desc. 225 ft.

79.72

The cor. of secs. 1, 2, 11 and 12.

Land, mountainous and rolling.

Soil, rocky, 4th rate.

No timber.

Undergrowth, cat claw, palo verde, mesquite and cactus.

40.00

N.0°1'W., on a random line, bet. secs. 1 and 2.

Set temp. ½ sec. cor.

77.31

Intersect N. bdy. of Tp., 4 lks. E. of the cor. of secs. 1, 2, 35 and 36, hereinbefore described.

Thence

S.0°3'E., on a true line, bet. secs. 1 and 2.

Over mountainous land, through scattering undergrowth.

Desc. 540 ft.

37.31

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

S 2	S 1
-----	-----

1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

42.92

New River, 40 lks. wide, 2 ft. deep, course SW. Asc. 425 ft.

77.31

The cor. of secs. 1, 2, 11 and 12.

Land, rough mountainous.

Soil, rocky, 4th rate.

No timber.

Survey of the
Subdivision of T. 7 N., R. 3 E.

Chains.

Undergrowth, palo verde, mesquite, cat claw and cactus.

From the cor. of secs. 2, 3, 34 and 35, S. bdy. of Tp.,
hereinbefore described,
N.0°1'W., bet. secs. 34 and 35.
Over rolling mountainous land, through dense undergrowth.
Desc. 80 ft.

- 7.88 Skunk Creek, containing small stream of water from spring
10 chs. E., course W. Asc. 95 ft.
- 12.00 Cabin of Hosea Cline brs. W. 2.50 chs. dist.
- 31.84 Ridge, brs. N.75°E. and S.75°W. Desc. 50 ft.
- 39.79 Wash, course W. Asc. 280 ft.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
 S34 | S35
 1917

And raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W.
of cor.

- 69.62 Spur, slopes SW. Desc. 300 ft.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., in a mound of
stone, for cor. of secs. 26, 27, 34 and 35, marked on
brass cap

T7N | R3E
 S27 | S26
 S34 | S35
 1917

And raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W.
of cor.

Land, rolling mountainous.
Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde, mesquite, greasewood and cactus.
No grass.

- 40.00 East on a random line, bet. secs. 26 and 35.
- 80.04 Set temp. $\frac{1}{4}$ sec. cor.
Intersect the corner of secs. 25, 26, 35 and 36. 25, 26, 35

Thence
West on a true line, bet. secs. 26 and 35.
Over mountainous land, through dense undergrowth.
Desc.

- 3.20 Ravine, course SW. Asc. 565 ft.
- 22.40 Spur, slopes S. Desc. 165 ft.
- 25.50 Wash, course S. Asc. 20 ft.
- 29.50 Spur, slopes S. Desc. 105 ft.
- 33.50 Draw, course S. Asc. 105 ft.
- 37.20 Spur, slopes S. Desc. 230 ft.
- 40.02 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S26
 S35
 1917

And raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N.
of cor.

- 46.40 Ravine, course S. Asc. 295 ft.
- 62.25 Ridge, brs. N.80°E. and S.70°W. Desc. 320 ft.
- 80.04 The cor. of secs. 26, 27, 34 and 35.

Survey of the
Subdivision of T. 7 N., R. 3 E.

22

Chains.

Land, mountainous.
Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde, mesquite and cactus.

N.0°1'W., bet. secs. 26 and 27.
Over rolling mountainous land, through scattering under-
growth.

Asc.

- 1.00 Spur, slopes W. Desc. 175 ft.
- 14.69 Gulch, course W. Asc. 50 ft.
- 19.60 Spur, slopes W. Desc. 80 ft.
- 24.95 Gulch, course W. Thence along W. slope, over rolling
land.
- 32.15 Gulch, course SW.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
S27 | S26
1917

From which

A cat claw, 6 ins. diam., brs. S.70 $\frac{1}{2}$ °E.,
101 lks. dist., marked $\frac{1}{4}$ S26 BT.

A cat claw, 8 ins. diam., brs. S.54 $\frac{1}{2}$ °W.,
115 lks. dist., marked $\frac{1}{4}$ S27 BT.

Asc. 195 ft.

- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 22, 23, 26 and 27, marked on
brass cap

T7N | R3E
S22 | S23
S27 | S26
1917

And raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W.
of cor.

Land, mountainous and rolling.
Soil, rocky, clay loam, 3rd rate.
No timber.
Undergrowth, palo verde, mesquite, greasewood and cactus.
No grass.

East on a random line, bet. secs. 23 and 26.

- 40.00 Set temp; $\frac{1}{4}$ sec. cor.
- 80.02 Intersect N. and S. line, 7 lks. N. of the cor. of secs.
23, 24, 25 and 26.

Thence

N.89°57'W., on a true line, bet. secs. 23 and 26.
Over rolling mountainous land, through dense undergrowth.
Asc. 30 ft.

- 11.70 Spur, slopes SW. Desc. 510 ft.
- 40.01 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S23
 $\frac{1}{4}$ S26
1917

And raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N.
of cor.

- 57.10 Wash, course SW. Asc. 60 ft.
- 61.50 Thence over rolling land.
- 69.50 Wash, course SW.


Survey of the
Subdivision of T. 7 N., R. 3 E.

Chains.
80.02

The cor. of secs. 22, 23, 26 and 27.
Land, rolling mountainous.
Soil, rocky, 4th rate.
No timber.
Undergrowth, dense palo verde, mesquite, cat claw and cactus.


40.00

N.0°1'W., bet. secs. 22 and 23.
Over mountainous land, through dense undergrowth.
Asc. 1025 ft.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



80.00

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 14, 15, 22 and 23, marked on brass cap



And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
Land, mountainous.
Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde, mesquite, cat claw, amole and cactus.

40.00

S.89°57'E., on a random line, bet. secs. 14 and 23.
Set temp. $\frac{1}{4}$ sec. cor.

80.00

Intersect N. and S. line, 23 lks. S. of the cor. of secs. 13, 14, 23 and 24.

Thence
S.89°53'W., on a true line, bet. secs. 14 and 23.
Over mountainous land, through scattering undergrowth.
Desc. 55 ft.

10.00


Draw, course SE. Asc. 65 ft.

14.84

Low spur, slopes S. Desc. 280 ft.

40.00

Draw, course SE.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
Asc. 150 ft.

44.45

Thence over rolling mesa.

65.00

Leave mesa, brs. NW. and SE. Desc. 455 ft.

80.00

The cor. of secs. 14, 15, 22 and 23.
Land, rolling mesa and mountainous.
Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde, mesquite and cactus.

Survey of the
Subdivision of T. 7 N., R. 3 E.

24

Chains.

N.0°1'W., bet. secs. 14 and 15.
Over rough mountainous land, through scattering undergrowth.
Asc. 335 ft.

9.10 Top of rim rock, edge of mesa, brs. N.25°W. and SE. Thence
over rolling top of mesa.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
S15 | S14
1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
of cor.

Desc. 690 ft.

64.90 Leave mesa, brs. E. and W. Desc. abruptly.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 10, 11, 14 and 15, marked on
brass cap

T7N, R3E
S10 | S11
S15 | S14
1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
of cor.

Land, mountainous and rolling mesa.

Soil, rocky, 4th rate.

No timber.

Undergrowth, cat claw, palo verde, amole and cactus.

40.00 N.89°53'E., on a random line, bet. secs. 11 and 14.

Set temp. $\frac{1}{4}$ sec. cor.

80.00 Intersect N. and S. line, 14 lks. N. of the cor. of secs.
11, 12, 13 and 14.

Thence

S.89°59'W., on a true line, bet. secs. 11 and 14.

Over rolling land, through scattering undergrowth.

21.65 Edge of mesa, brs. NE. and SW. Desc. 740 ft.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S11
S14
1917

From which

A sycamore, 14 ins. diam., brs. N.73°W., 300 lks.
dist., marked $\frac{1}{4}$ S11 BT.

A sycamore, 9 ins. diam., brs. S.71 $\frac{3}{4}$ °W.,
179 lks. dist., marked $\frac{1}{4}$ S14 BT.

42.25 Small creek, 5 lks. wide, 6 ins deep, course N.30°W.
Asc. 325 ft.

61.60 Spur, slopes N. Desc. 185 ft.

70.10 Gulch, course N. Asc. 45 ft.

78.55 Spur, slopes N. Desc. 25 ft.

80.00 The cor. of secs. 10, 11, 14 and 15.

Land, mountainous and rolling.

Soil, rocky, 4th rate.

No timber.

Undergrowth, cat claw, palo verde, mesquite and cactus.

N.0°1'W., bet. secs. 10 and 11.

Over mountainous land, through dense undergrowth.

Desc. 475 ft.

Survey of the
Subdivision of T. 7 N., R. 3 E.


BOOK 3326
25

Chains.

29.04 Gulch, containing stream of water, 4 lks. wide, 6 ins. deep, course NW. Asc. 230 ft.
39.38 Spur, slopes N.70°W. Desc. 445 ft.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
55.38 New River, 30 lks. wide, 2 ft. deep, course N.70°W. Asc. 385 ft.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 2, 3, 10 and 11 marked on brass cap




And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
Land, rough mountainous.
Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde, mesquite, cat claw and cactus.

40.00 N.89°59'E., on a random line, bet. secs. 2 and 11. Set temp. $\frac{1}{4}$ sec. cor.
79.90 Intersect N. and S. line, 5 lks. N. of the cor. of secs. 1, 2, 11 and 12.

Thence
N.89°59'W., on a true line, bet. secs. 2 and 11.
Over mountainous land, through scattering undergrowth.
Desc. 505 ft.

39.95 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



From which

A walnut, 10 ins. diam., brs. N.33°W., 86 lks. dist., marked $\frac{1}{4}$ S2 BT.

A walnut, 9 ins. diam., brs. S.87°W., 121 lks. dist., marked $\frac{1}{4}$ S11 BT.

41.60 New River, 50 lks. wide, $1\frac{1}{2}$ ft. deep, course S.65°W. Thence over rolling land.

48.74 New River, course N.70°W. Asc. 25 ft.

50.71 Spur, slopes N. Desc. 60 ft.

58.45 New River, course SW. Asc. 335 ft.

79.90 The cor. of secs. 2, 3, 10 and 11.

Land, rolling and mountainous.

Soil, rocky, 4th rate.

No timber.

Undergrowth, cat claw, palo verde, mesquite and cactus.

40.00 N.0°1'W., on a random line, bet. secs. 2 and 3.

Set temp. $\frac{1}{4}$ sec. cor.

77.45 Intersect N. bdy. of Tp., 7 lks. E. of the true point for cor. of secs. 2, 3, 34 and 35, witnessed as hereinbefore described.


Survey of the
Subdivision of T. 7 N., R. 3 E.

26

Chains.

Thence
S.0°4'E., on a true line, bet. secs. 2 and 3.
Over extremely rough mountainous land, through scattering
undergrowth.
Asc. 40 ft.
Desc. 805 ft.
Gulch, course S.20°E. Asc. 20 ft.
Spur, slopes E. Desc. 385 ft.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

7.16
23.67
25.34
37.45




And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
of cor.

38.86 Gulch, course SW. Asc. 140 ft.
49.13 Spur, slopes SW. Desc. 70 ft.
53.97 Draw, course SE. Asc. 105 ft.
62.08 Spur, slopes SE. Desc. 390 ft.
77.45 The cor. of secs. 2, 3, 10 and 11.
Land, extremely rough mountainous.
Soil, 4th rate.
No timber.
Undergrowth, cat claw and cactus.

From the cor. of secs. 3, 4, 33 and 34, on S. side of Tp.,
hereinbefore described,
N.0°2'W., bet. secs. 33 and 34.
Over rolling land, through dense undergrowth.
Asc. 20 ft.

10.00
15.99
19.98
26.28
40.00

Desc.
Wash, course S.65°W. Asc. 25 ft.
Spur, slopes W. Desc.
Wash, course S.75°W. Asc. 60 ft.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap




And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
of cor.

Thence over rolling land.

56.99
72.46
80.00

Desc. 25 ft.
Head of wash, course SW. Thence over rolling land.
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 27, 28, 33 and 34, marked on
brass cap



And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
of cor.

Land, rolling.
Soil, rocky, 3rd and 4th rate.
No timber.
Undergrowth, palo verde, mesquite, cat claw and amole.
No grass.

Survey of the
Subdivision of T. 7 N., R. 3 E.

Chains.

40.00 East on a random line, bet. secs. 27 and 34.
 80.00 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect N. and S. line, 4 lks. N. of the cor. of secs.
 26, 27, 34 and 35.
 Thence
 N. $89^{\circ}58'W.$, on a true line, bet. secs. 27 and 34.
 Over rolling mountainous land, through scattering under-
 growth.
 Desc. 200 ft.
 19.62 Asc. 15 ft.
 22.40 Spur, slopes S. Desc. gradually, 75 ft.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S27
 $\frac{1}{4}$ S34
 1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

41.75 Draw, course SW. Asc. 110 ft.
 59.88 Spur, slopes S. Desc. 100 ft.
 80.00 The cor. of secs. 27, 28, 33 and 34.
 Land, rolling mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, palo verde, mesquite and cactus.

22.80 N. $0^{\circ}2'W.$, bet. secs. 27 and 28.
 24.78 Over rolling mountainous land, through scattering under-
 31.21 growth.
 40.00 Asc. 195 ft.
 Spur, slopes W. Desc. 20 ft.
 Head of wash, course SW. Asc. 60 ft.
 Spur, slopes W. Desc. 120 ft.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
 S28 | S27
 1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

43.30 Wash, course S. $75^{\circ}W.$ Asc. 50 ft.
 64.97 Spur, slopes SW. Desc. 55 ft.
 74.93 Gulch, course S. $70^{\circ}W.$ Asc. 55 ft.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 21, 22, 27 and 28, marked on
 brass cap

T7N R3E
 S21 | S22
 S28 | S27
 1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, rolling mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, palo verde, mesquite and cactus.

40.00 S. $89^{\circ}58'E.$, on a random line, bet. secs. 22 and 27.
 80.00 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect N. and S. line, 7 lks. S. of the cor. of secs.

28

Survey of the
Subdivision of T. 7 N., R. 3 E.

Chains.

22, 23, 26 and 27.
Thence
S. 89° 59' W., on a true line, bet. secs. 22 and 27.
Over rolling land, through dense undergrowth.
Desc. 25 ft.
4.99 Draw, course S. Asc. 60 ft.
19.94 Desc. gradually, 65 ft.
24.83 Draw, course SW. Asc. 65 ft.
29.75 Desc. 45 ft.
33.68 Ravine, course SW. Thence over rolling land.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S22
S27
1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N.
of cor.

45.00 Low spur, slopes S. Desc. 70 ft.
58.82 Draw, course SW. Asc. 20 ft.
64.86 Spur, slopes SW. Desc. 25 ft.
69.85 Draw, course S. Asc. 25 ft.
74.85 Thence over rolling land.
80.00 The cor. of secs. 21, 22, 27 and 28.
Land, rolling.
Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde, mesquite, cat claw and cactus.

N. 0° 2' W., bet. secs. 21 and 22.
Over rolling land, through dense undergrowth.
Asc. 65 ft.

9.93 Spur, slopes SW. Desc. 45 ft.
13.87 Gulch course SW. Asc. 105 ft.
22.81 Spur, slopes SW. Desc. 75 ft.
29.68 Gulch, course W. Asc. 55 ft.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
S21 | S22
1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
of cor.

Desc. 30 ft.
65.98 Gulch, course SW. Asc. 90 ft.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 15, 16, 21 and 22, marked on
brass cap

T7N R3E
S16 | S15
S21 | S22
1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
of cor.

Land, rolling.
Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde, mesquite and cactus.

40.00 N. 89° 59' E., on a random line, bet. secs. 15 and 22.
Set temp. $\frac{1}{4}$ sec. cor.

Survey of the
Subdivision of T. 7 N., R. 3 E.

Chains.

79.98 Intersect N. and S. line, 14 lks. N. of the cor. of secs. 14, 15, 22 and 23.

Thence

N.89°55'W., on a true line, bet. secs. 15 and 22.

Over mountainous land, through dense undergrowth.

Desc. 690 ft.

29.03 Ravine, course SW. Asc. 80 ft.

37.97 Spur, slopes SW. Desc. 110 ft.

39.99 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap

1/4 S15
S22
1917

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

44.87 Wash, course SW. Asc. 55 ft.

54.85 Spur, slopes SW. Desc. 235 ft.

70.50 Ravine course SW. Asc.

79.98 The cor. of secs. 15, 16, 21 and 22.

Land, mountainous and rolling.

Soil, rocky, 4th rate.

No timber.

Undergrowth, cat claw, palo verde, mesquite and cactus.

N.0°2'W., bet. secs. 15 and 16.

Over mountainous land, through dense undergrowth.

Asc. 675 ft.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap

1/4 S16 S15
1917

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

67.69 Spur, slopes N.70°W. Desc. 260 ft.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 9, 10, 15 and 16, marked on brass cap

T7N R3E
S 9 S10
S16 S15
1917

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rough mountainous.

Soil, rocky, 4th rate.

No timber.

Undergrowth, palo verde, mesquite and cactus.

S.89°55'E., on a random line, bet. secs. 10 and 15.

40.00 Set temp. 1/4 sec. cor.

79.96 Intersect N. and S. line, 14 lks. S. of the cor. of secs. 10, 11, 14 and 15.

Thence

S.89°59'W., on a true line, bet. secs. 10 and 15.

Over mountainous land, through scattering undergrowth.

Asc. 35 ft.

1.55 Spur, slopes N. Desc. 20 ft.

11.55 Ravine, course N. Asc. 235 ft.

19.65 Spur, slopes NW. Desc. 35 ft.

Survey of the
Subdivision of T. 7 N., R. 3 E.

30
Chains.

25.60 Wash, course N. Asc. 240 ft.
37.45 Edge of mesa, brs. NW. and SE. Thence over rolling land.
39.98 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap.

$\frac{1}{4}$ S10
S15
1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N.
of cor.

58.90 Edge of mesa, brs. NW. and SE. Desc. 425 ft.
72.20 Gulch, course N.10°W. Asc. 70 ft.
79.96 The cor. of secs. 9, 10, 15 and 16.
Land, mountainous.
Soil, rocky, 4th rate.
No timber.
Undergrowth, cat claw, palo verde, mesquite and cactus.

35.08 N.0°2'W., bet. secs. 9 and 10.
40.00 Over mountainous land, through scattering undergrowth.
Desc. 435 ft.
Gulch, course N.75°W. Asc. 605 ft.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

S 9 $\frac{1}{4}$ S10
1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
of cor.

60.60 Spur, slopes W. Desc. 460 ft.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 3, 4, 9 and 10, marked on
brass cap

T7N R3E
S 4 | S 3
S 9 | S10
1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
of cor.
Land, rough mountainous.
Soil, rocky, 4th rate.
No timber.
Undergrowth, cat claw, palo verde, mesquite and cactus.

40.00 N.89°59'E., on a random line, bet. secs. 3 and 10.
79.85 Set temp. $\frac{1}{4}$ sec. cor.
Intersect N. and S. line, 9 lks. S. of the cor. of secs.
2, 3, 10 and 11.

Thence
S.89°55'W., on a true line, bet. secs. 3 and 10.
Over mountainous land, through scattering undergrowth.
Asc. 210 ft.

8.39 Spur, slopes S. Desc. 620 ft.
32.21 Gulch, course S. Asc. 45 ft.
36.43 Spur, slopes S. Thence along S. slope.
39.92 $\frac{1}{2}$ Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap


$\frac{1}{4}$ S 3
S10
1917

Survey of the
Subdivision of T. 7 N. R. 3 E.

Chains.


And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
 48.65 Spur, slopes S. Desc. 140 ft.
 59.66 New River, 50 lks. wide, 2 ft. deep, course N.65°W. Asc. 555 ft.
 79.85 The cor. of secs. 3, 4, 9 and 10.
 Land, mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, palo verde, cat claw, mesquite and cactus.

40.00 N.0°2'W., on a random line, bet. secs. 3 and 4.
 Set temp. $\frac{1}{4}$ sec. cor.
 77.20 Intersect N. bdy. of Tp., 9 lks. E. of the cor. of secs. 3, 4, 33 and 34, hereinbefore described.
 Thence
 S.0°6'E., on a true line, bet. secs. 3 and 4.
 Over mountainous land, through scattering undergrowth.
 Desc.
 5.00 Wash, course NW. Asc. 250 ft.
 15.24 Spur, slopes S.75°W. Desc. 315 ft.
 26.23 Gulch, course SW. Asc. 60 ft.
 30.03 Spur, slopes SW. Desc. 405 ft.
 37.20 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 53.97 New River, 35 lks. wide, $1\frac{1}{2}$ ft. deep, course W. Asc. 580 ft.
 77.20 The cor. of secs. 3, 4, 9 and 10.
 Land, mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, palo verde, mesquite, cat claw and cactus.

From the cor. of secs. 4, 5, 32 and 33, on S. bdy. of Tp., hereinbefore described,
 N.0°2'W., bet. secs. 32 and 33.
 Over rolling land, through dense undergrowth.
 Desc. abruptly, 90 ft.
 33.00 Gulch, course SW. Thence over rolling land.
 38.91 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap
 40.00



And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 Asc. 145 ft.
 68.40 Thence over rolling land.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 28, 29, 32 and 33, marked on brass cap

Survey of the
Subdivision of T. 7 N., R. 3 E.

32

Chains.

T7N	R3E
S29	S28
S32	S33
1917	

And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
Land, rolling.
Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde, mesquite, amole, cat claw and cactus.

40.00 East on a random line, bet. secs. 28 and 33.
Set temp. ¼ sec. cor.
80.00 Intersect the cor. of secs. 27, 28, 33 and 34. 27, 28, 33 and 34.
Thence,
West on a true line, bet. secs. 28 and 33.
Over rolling land, through scattering undergrowth.
Asc. 55 ft.
4.92 Spur, slopes S. Desc. 50 ft.
14.86 Draw, course S. Asc. 65 ft.
20.80 Thence over rolling land.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

S28
S33
1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
52.00 Desc. gradually, 90 ft.
62.37 Draw, course S. Thence over rolling land.
69;85 Asc. 90 ft.
80.00 The cor. of secs. 28, 29, 32 and 33.
Land, rolling.
Soil, rocky, 4th rate.
No timber.
Undergrowth, dense mesquite, palo verde and cactus.

N.0°2'W., bet. secs. 28 and 29.
Over rolling land, through dense undergrowth.
15.00 Asc. 45 ft.
20.00 Thence over rolling land.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

S29	S28
1917	

And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
75.00 Desc. 90 ft.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 20, 21, 28 and 29, marked on brass cap


T7N	R3E
S20	S21
S29	S28
1917	

Survey of the
Subdivision of T. 7 N., R. 3 E.

Chains.


And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
Land, rolling.
Soil, rocky, 4th rate.
No timber.
Undergrowth, dense palo verde, mesquite and cactus.

40.00 East on a random line, bet. secs. 21 and 28.
Set temp. ¼ sec. cor.
80.06 Intersect N. and S. line, 2 lks. S. of the cor. of secs. 21, 22, 27 and 28.
Thence
S.89°59'W., on a true line, bet. secs. 21 and 28.
Over broken mountainous land, through dense undergrowth.
Asc. 40 ft.
5.97 Spur, slopes SW. Desc. 85 ft.
12.33 Draw, course SW. Asc. 195 ft.
26.06 Ridge, brs. NE. and SW. Desc. 315 ft.
40.03 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap




80.06 And raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
The cor. of secs. 20, 21, 28 and 29.
Land, mountainous.
Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde, mesquite and cactus.

N.0°2'W., bet. secs. 20 and 21.
Over mountainous land, through dense undergrowth.
Desc. 65 ft.
6.61 Gulch, course S.75°W. Asc. 110 ft.
24.81 Top of ascent; thence over gently rolling land, through dense undergrowth.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap



71.00 And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
Desc. 115 ft.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 16, 17, 20 and 21, marked on brass cap



From which
A mesquite, 9 ins. diam., brs. N.21°E.,
83 lks. dist., marked T7N R3E S16 BT.
A mesquite, 9 ins. diam., brs. N.49°W.,
26 lks. dist., marked T7N R3E S17 BT.
No other trees within limits. Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Survey of the
Subdivision of T. 7 N., R. 3 E.

.34

Chains.

Land, mountainous and rolling.
Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde, mesquite and cactus.

40.00 N. 89° 59' E., on a random line, bet. secs. 16 and 21.
Set temp. $\frac{1}{4}$ sec. cor.
80.06 Intersect the corner of secs. 15, 16, 21 and 22. 15, 16, 21
Thence
S. 89° 59' W., on a true line, bet. secs. 16 and 21.
Over rolling land, through dense undergrowth.
Asc. 45 ft.
14.95 Desc. gradually, 275 ft.
40.01 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S16
S21
1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N.
of cor.

50.23 Draw, course S. Asc. 80 ft.
64.84 Spur, slopes S. Desc. 130 ft.
80.02 The cor. of secs. 16, 17, 20 and 21.
Land, rolling mountainous and rolling.
Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde, mesquite and cactus.

0.83 N. 0° 2' W., bet. secs. 16 and 17.
15.78 Over mountainous land, through dense undergrowth.
40.00 Desc. 15 ft.
Gulch, course SW. Asc. 295 ft.
Ridge, brs. NE. and SW. Desc. 190 ft.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
S17 | S16
1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, NW.
of cor.

Asc. 40 ft.
45.00 Thence over rolling land.
76.26 Wash, course W.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 8, 9, 16 and 17, marked on
brass cap

T7N R3E
S 8 | S 9
S17 | S16
1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
of cor.

Land, rolling and mountainous.
Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde, mesquite, amole and cactus.

Survey of the
Subdivision of T. 7 N., R. 3 E.

Chains.

40.00 N. 89° 59' E., on a random line, bet. secs. 9 and 16.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.00 Intersect N. and S. line, 5 lks. S. of the cor. of secs.
 9, 10, 15 and 16.
 Thence
 S. 89° 57' W., on a true line, bet. secs. 9 and 16.
 Over mountainous land, through scattering undergrowth.
 Asc. 170 ft.
 6.77 Spur, slopes NW. Desc. 820 ft.
 25.47 Gulch, with small spring on line, course S. 75° W., from
 S. 75° E. Continue descent.
 39.90 Gulch, course NW. Asc. 100 ft.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$$\begin{array}{c} \frac{1}{4} S 9 \\ \hline S 16 \\ 1917 \end{array}$$

And raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

45.50 Spur, slopes NW. Desc. 305 ft.
 78.70 Wash, course SW. Asc.
 80.00 The cor. of secs. 8, 9, 16 and 17:
 Land, mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, palo verde, mesquite, cat claw and cactus.

32.98 N. 0° 2' W., bet. secs. 8 and 9.
 Over mountainous land, through scattering undergrowth.
 Asc. 690 ft.
 Top of cliff, on square butte. Ruins of prehistoric fort
 on top of this butte. Desc. 805 ft.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$$\begin{array}{c} \frac{1}{4} \\ S 8 | S 9 \\ \hline 1917 \end{array}$$

And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 4, 5, 8 and 9, marked on brass cap

$$\begin{array}{c} T7N R3E \\ S 5 | S 4 \\ \hline S 8 | S 9 \\ 1917 \end{array}$$

And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, cactus, mesquite and palo verde.

40.00 N. 89° 57' E., on a random line, bet. secs. 4 and 9.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.84 Intersect N. and S. line, 19 lks. N. of the cor. of secs.
 3, 4, 9 and 10.
 Thence
 N. 89° 55' W., on a true line, bet. secs. 4 and 9.
 Over rolling mountainous land, through scattering under-
 growth.

Chains.

Asc. 20 ft.
 4.96 Spur, slopes N. Desc. 320 ft.
 14.79 Gulch, course NW. Asc. 80 ft.
 22.77 Spur, slopes NW. Desc. 350 ft.
 39.92 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$$\begin{array}{r} \frac{1}{4} S 4 \\ \hline S 9 \\ 1917 \end{array}$$

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N.
 of cor.
 40.15 Creek, 5 lks. wide, 4 ins. deep, course N.20°W. Asc.
 115 ft.
 49.70 Spur, slopes NW. Desc. 95 ft.
 54.48 Over rolling bottom land, through dense undergrowth.
 79.84 The cor. of secs. 4, 5, 8 and 9.
 Land, mountainous and rolling.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, cat alaw, palo verde and mesquite.

40.00 N.0°2'W., on a random line, bet. secs. 4 and 5.
 Set temp. $\frac{1}{4}$ sec. cor;
 77.27 Intersect N. bdy. of Tp., 14 lks. E. of the cor. of secs.
 4, 5, 32 and 33, hereinbefore described.
 Thence
 S.0°8'E., on a true line, bet. secs. 4 and 5.
 Over rolling land, through scattering undergrowth.
 Desc. 15 ft.
 2.65 Draw, course SW. Asc. 45 ft.
 4.95 Low spur, slopes SW. Desc. 135 ft.
 17.36 Gulch, course S.35°W. Asc. 65 ft.
 26.30 Spur, slopes W. Desc. 195 ft.
 37.27 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$$\begin{array}{r} \frac{1}{4} \\ S 5 | S 4 \\ 1917 \end{array}$$

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
 of cor.
 61.28 Enter New River, course S., from NE. Water 60 lks. wide,
 1 ft. deep, course SW.
 69.68 Leave New River, course SW. Asc. 25 ft.
 77.27 The cor. of secs. 4, 5, 8 and 9.
 Land, mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, palo verde, mesquite, cactus and amole.


From the cor. of secs. 5, 6, 31 and 32^{on} S. bdy. of Tp.,
 hereinbefore described,
 N.0°3'W., bet. secs. 31 and 32.
 Over rolling land, through dense undergrowth.
 Wash, course SE.
 2.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 40.00 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

Survey of the
Subdivision of T. 7 N., R. 3 E.

Chains.




80.00 And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 29, 30, 31 and 32, marked on brass cap



And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
Land, rolling.
Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde, mesquite and cat claw.

40.00 East on a random line, bet. secs. 29 and 32.
Set temp. ¼ sec. cor.
79.98 Intersect N. bdy. of Tp. at the cor. of secs. 28, 29, 32 and 33.
Thence
West on a true line, bet. secs. 29 and 32.
Over rolling land, through dense undergrowth.
Asc. 35 ft.
5.00 Thence over rolling land.
15.00 Desc. 25 ft.
20.00 Thence over rolling land.
39.99 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap



40.15 And raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
Desc. 100 ft.
60.00 Head of small draw, course SW. Asc. 25 ft.
65.00 Thence over rolling land.
79.98 The cor. of secs. 29, 30, 31 and 32.
Land, rolling.
Soil, 4th rate.
No timber.
Undergrowth, dense palo verde, mesquite and cactus.

(H.L.B.) 40.00 West on a random line, bet. secs. 30 and 31.
Set temp. ¼ sec. cor.
80.26 Intersect W. bdy. of Tp., at the reestablished cor. of secs. 30 and 31, described in book "R".
Thence
East on a true line, bet. secs. 30 and 31.
Over rolling land, through dense undergrowth.
20.00 Desc. 70 ft.
(H.L.B.) 40.26 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

38

Survey of the
Subdivision of T. 7 N., R. 3 E.

Chains.

$\frac{1}{4}$ S30
 $\frac{1}{4}$ S31
1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

- 41.55 Draw, course NW.
 - 55.30 Road, brs. NW. and SE.
 - 60.30 Desc. 25 ft.
 - 66.27 Draw, course SE. Asc. 15 ft.
 - 70.30 Thence over rolling land.
 - (HIB) 80.26 The cor. of secs. 29, 30, 31 and 32.
- Land, rolling.
Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde, mesquite and cactus.

N.0°3'W., bet. secs. 29 and 30.
Over rolling land, through dense undergrowth.

- 20.00 Wash, course S.75°W.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
S30 | S29
1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

- A palo verde, 10 ins. diam., brs. S.40°E., 209 lks. dist., marked $\frac{1}{4}$ S29 BT.
- A palo verde, 9 ins. diam., brs. S.36°W., 60 lks. dist., marked $\frac{1}{4}$ S30 BT.
- 43.00 Wash, course W.
- 63.50 Wash, course S.25°W.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 19, 20, 29 and 30, marked on brass cap

T7N R3E
S19 | S20
S30 | S29
1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft; high, W. of cor.

Land, rolling.
Soil, sandy loam, 7 ins. deep, gravelly subsoil, 3rd rate.
No timber.
Undergrowth, palo verde, mesquite and cactus.

- 40.00 East on a random line, bet. secs. 20 and 29.
- 80.00 Set temp. $\frac{1}{4}$ sec. cor.
- 80.00 Intersect N. and S. line, 9 lks. N. of the cor. of secs. 20, 21, 28 and 29.
- Thence N.89°56'W., on a true line, bet. secs. 20 and 29.
- Over rolling land, through scattering undergrowth.
- Desc. 100 ft.
- 19.95 Foot of descent; thence over gently rolling land.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

Survey of the
Subdivision of T. 7 N., R. 3 E.

Chains.

$\frac{1}{4}$ S20
 $\frac{1}{4}$ S29
1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
45.00 Desc. 75 ft.
64.46 Ravine, course SW.
74.97 Gulch, course SW. Asc.
80.00 The cor. of secs. 19, 20, 29 and 30.
Land, rolling.
Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde, mesquite and cactus.

(HLB) 40.00 West on a random line, bet. secs. 19 and 30.
Set temp. $\frac{1}{4}$ sec. cor.
(HLB) 80.12 Intersect W. bdy. of Tp., 11 lks. N.0°4'E. of the reestablished cor. of secs. 19 and 30, described in book "R".
Thence
N.89°55'E., on a true line, bet. secs. 19 and 30.
Over rolling land, through scattering undergrowth.
Desc. 30 ft.
7.50 Road, brs. NW. and SE. Asc. 175 ft.
25.23 Desc. 25 ft.
(HLB) 30.24 Asc. 65 ft.
40.12 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S19
 $\frac{1}{4}$ S30
1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
45.45 Desc. 40 ft.
60.45 Thence over rolling land.
65.43 Asc. 25 ft.
75.70 Low spur, slopes S. Desc. 140 ft.
Draw, course SW. Spring brs. North 15 chs. dist. Asc. 25 ft.
(HLB) 80.12 The cor. of secs. 19, 20, 29 and 30.
Land, rolling.
Soil, rocky, 4th rate.
No timber.
Undergrowth, mesquite, palo verde and cactus.

N.0°3'W., bet. secs. 19 and 20.
Over rolling land, through scattering undergrowth.
32.00 Gulch, course S.20°E.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
S19 | S20
1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
61.00 Wash, course SW.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 17, 18, 19 and 20, marked on brass cap

Survey of the
Subdivision of T. 7 N., R. 3 E.

40

Chains.

T7N	R3E
S18	S17
S19	S20
1917	

And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
Land, rolling.
Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde, mesquite and cactus.

40.00 S.89°56'E., on a random line, bet. secs. 17 and 20.
Set temp. ¼ sec. cor.
80.08 Intersect N. and S. line, 14 lks. N. of the cor. of secs. 16, 17, 20 and 21.
Thence
N.89°50'W., on a true line, bet. secs. 17 and 20.
Over rolling land, through scattering undergrowth.
Desc. 25 ft.
4.97 Creek, 2 lks. wide, 2 ins. deep, course S.70°W.
21.97 Head of draw, course S. Asc. 155 ft.
34.66 Spur, slopes S. Desc. 105 ft.
40.04 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

1	S17
4	S20
1917	

And raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
46.89 Draw, course S. Asc. 100 ft.
59.84 Spur, slopes SW. Desc. 205 ft.
74.40 Creek, course SW. Asc. 20 ft.
80.08 The cor. of secs. 17, 18, 19 and 20.
Land, rolling.
Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde, mesquite and cactus.

(HLB) 40.00 S.89°55'W., on a random line, bet. secs. 18 and 19.
Set temp. ¼ sec. cor.
80.06 Intersect W. bdy. of Tp., 5 lks. N.0°4'E. of the reestablished cor. of secs. 18 and 19, described in book "R".
Thence
N.89°53'E., on a true line, bet. secs. 18 and 19.
Over mountainous land, through dense undergrowth.
Desc. 15 ft.
1.70 Draw, course S. Asc. 320 ft.
16.75 Spur, slopes S. Desc. 175 ft.
27.00 Head of draw, course S. Asc. 200 ft.
39.10 Spur, slopes S. Desc. 310 ft.
(HLB) 40.06 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

1	S18
4	S19
1917	

And raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
58.65 Draw, course SE. Asc. 10 ft.
60.13 Desc. 45 ft.
70.10 Thence over rolling land.

Survey of the
Subdivision of T. 7 N., R. 3 E.

Chains.

(H.L.B)


78.10
80.06

40.00

45.00
51.27
72.08
80.00


Road, brs. NE. and SW.
The cor. of secs. 17, 18, 19 and 20.
Land, rolling and mountainous.
Soil, rocky, 4th rate.
No timber.
Undergrowth, dense palo verde, mesquite and cactus.

N.0°3'W., bet. secs. 17 and 18.
Over rolling land, through dense undergrowth.
Asc. 250 ft.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap



And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Desc.
Wash, course S.75°E. Asc. 280 ft.
Spur, slopes E. Desc. 180 ft.
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 7, 8, 17 and 18, marked on brass cap



And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling.
Soil, rocky, 4th rate.
No timber.
Undergrowth, cat claw, palo verde, mesquite and cactus.


40.00
80.04

10.10
40.02

S.89°50'E., on a random line, bet. secs. 8 and 17.
Set temp. 1/4 sec. cor.
Intersect N. and S. line, 5 lks. S. of the cor. of secs. 8, 9, 16 and 17.
Thence

N.89°52'W., on a true line, bet. secs. 8 and 17.
Over rolling land, through scattering undergrowth.
Desc. gradually, 160 ft.

Wash, course SW. Continue descent.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap



And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

45.35
68.95
80.04

Gulch, course S. Thence over rolling land, ascending 280 ft.
Gulch, course SE. Continue ascent.
The cor. of secs. 7, 8, 17 and 18.
Land, rolling.
Soil, rocky, 4th rate.
No timber.
Undergrowth, cat claw, palo verde and cactus.

Survey of the
Subdivision of T. 7 N., R. 3 E.

42

Chains.

(H.L.B.) 40.00 S.89°53'W., on a random line, bet. secs. 7 and 18.
 Set temp. $\frac{1}{4}$ sec. cor.
 (H.L.B.) 79.77 Intersect W. bdy. of Tp., 16 lks. S.0°41'W. of reestablished
 cor. of secs. 7 and 18 described in book "R".
 Thence
 East on a true line, bet. secs. 7 and 18.
 Over mountainous land, through scattering undergrowth.
 Desc.
 1.40 Wash, course S.65°W. Asc. 210 ft.
 22.50 Spur, slopes SW. Desc. 55 ft.
 25.90 Gulch, course SW. Asc. 225 ft.
 34.25 Spur, slopes N.60°W. Desc. 20 ft.
 37.15 Gulch, course N.60°W. Asc. 575 ft.
 (H.L.B.) 39.77 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$$\begin{array}{c} \frac{1}{4} S 7 \\ \hline S 18 \\ 1917 \end{array}$$

And raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N
 of cor.
 (H.L.B.) 54.85 Top of butte, slopes S.10°W. Desc. 615 ft.
 (H.L.B.) 79.77 The cor. of secs. 7, 8, 17 and 18.
 Land, mountainous.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, cat claw, mesquite, palo verde and cactus.

15.75 N.0°3'W., bet. secs. 7 and 8.
 40.00 Over mountainous land, through dense undergrowth.
 Asc. 215 ft.
 Spur, slopes E. Desc. 460 ft.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$$\begin{array}{c} \frac{1}{4} \\ S 7 | S 8 \\ \hline 1917 \end{array}$$

And raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W.
 of cor.
 72.85 Gulch, course NW. Asc. 100 ft.
 79.00 Spur, slopes N.85°W. Desc. 10 ft.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 5, 6, 7 and 8, marked on
 brass cap

$$\begin{array}{c} T7N R3E \\ S 6 | S 5 \\ \hline S 7 | S 8 \\ 1917 \end{array}$$

And raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W.
 of cor.
 Land, rolling mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, palo verde, mesquite, amole and cactus.

40.00 S.89°52'E., on a random line, bet. secs. 5 and 8.
 80.16 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect N. and S. line, at the cor. of secs. 4, 5, 8 and
 9.
 Thence
 N.89°52'W., on a true line, bet. secs. 5 and 8.

Survey of
Subdivision of T. 7 N., R. 3 E.

Chains

Over rolling land, through dense undergrowth.
 Desc.
 5.95 Draw, course N. Asc. 135 ft.
 14.72 Ridge, brs. NW. and SE. Desc. 145 ft.
 37.83 Gulch, course NW. Asc. 135 ft.
 40.08 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}S \quad 5$
 $\frac{1}{4}S \quad 8$
 1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 N. of cor.
 59.94 Spur, slopes N. Desc. 50 ft.
 74.91 Draw, course N. Asc. 35 ft.
 80.16 The cor. of secs. 5, 6, 7 and 8.
 Land, rolling and mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, dense palo verde, mesquite and cactus.

West on a random line, bet. secs. 6 and 7.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.74 Intersect W. bdy. of Tp., 18 lks. S.0°2'W. of the reestab-
 lished cor. of secs. 6 and 7, hereinbefore described".
 Thence
 S.89°52'E., on a true line bet. secs. 6 and 7.
 Over broken mountainous land, through dense undergrowth.
 1.75 New River, 60 lks. wide, 2 ft. deep, course S.80°W. Asc.
 160 ft.
 15.00 Spur slopes N. Desc. 125 ft.
 34.85 Asc. 50 ft.
 37.75 Desc. 40 ft.
 39.74 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}S \quad 6$
 $\frac{1}{4}S \quad 7$
 1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N.
 of cor.
 45.30 Asc. 20 ft.
 47.30 Desc. 15 ft.
 50.30 Asc. 30 ft.
 54.25 Desc. 10 ft.
 55.26 Draw, course N. Asc. 70 ft.
 61.15 Spur, slopes N. Desc. 105 ft.
 69.00 Draw, course N. Asc. 120 ft.
 79.74 The cor. of secs. 5, 6, 7 and 8.
 Land, broken and mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, palo verde, mesquite, cactus and cat claw.

N.0°3'W., on a random line, bet. secs. 5 and 6.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 77.35 Intersect N. bdy. of Tp., 9 lks. E. of the cor. of secs.
 5, 6, 31 and 32, hereinbefore described.
 Thence
 S.0°7'E., on a true line bet. secs. 5 and 6.
 Over rolling mountainous land, through dense undergrowth.
 Desc.
 0.19 Gulch, course N.87°W. Asc. 65 ft.
 3.35 Spur, slopes S. Desc. on spur.

Survey of the
Subdivision of T. 7 N., R. 3 E.

44

Chains
 4.80 Draw; course E. Asc. 25 ft.
 10.78 Desc. 160 ft.
 15.12 Gulch, containing small stream of water, course SW. Asc. 50 ft.
 25.06 Spur, slopes W. Desc. 80 ft.
 29.91 Draw, course W. Asc. 30 ft.
 32.37 Spur, slopes W. Desc. 15 ft.
 34.86 Draw, course SW. Asc. 25 ft.
 37.03 Top of cliff, 20 ft. high.
 37.35 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
 S 6 $\frac{1}{4}$ S 5
 1917

and raise a mound of stone, 2 ft. base; $1\frac{1}{2}$ ft. high, W. of cor.
 Desc. 365 ft.
 56.60 New River, 30 lks. wide, 2 ft. deep, course NW. Asc. 150 ft.
 77.35 The cor. of secs. 5, 6, 7 and 8.
 Land, rolling mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, palo verde, mesquite and cat claw.

Boundaries of T. 7 N., R. 3 E.

Latitudes, Departures and Closing Errors.

Line designated.	True bearing.	Dist. chs.	Latitudes		Departures.	
			N. chs.	S. chs.	E. chs.	W. chs.
South Boundary.	West	480.48				480.48
West Boundary.	N.0°4'E.	357.41	357.41		.41	
	N.0°2'W.	39.84	39.84			.02
	N.0°2'E.	40.31	40.31		.02	
	N.0°3'W.	39.79	39.79			.03
North Boundary.	East.	479.48			479.48	
East Boundary.	South.	477.14		477.14		
Convergency					.49	
Totals			477.35 477.14	477.14	480.40	480.53 480.40
Error in latitude	.26					
Error in departure	.13					

Township 7 N., R. 3 E.

General Description.

This township lies mostly on a very broken strip of country, between Cave Creek and New River, and although not exceedingly high, is very rough. New River runs through a very broken canyon along the north side and there is a high, uneven mesa to the south, which breaks off abruptly to a much lower land, which becomes quite flat toward the south west corner.

The land was quite well watered at the time of survey; and grows a fair crop of forage, the top of the mesa being fenced off for horse pasture by the Cook Ranch. There is no timber, but quite a dense growth of palo verde and mesquite on the lower levels.

There are no settlers on the township, although there is a house and corrals at what is known as Cottonwoods, on Skunk Creek; which belongs to Hosea Cline. The only value of this township is for grazing land.

---(1)---

Book "E".

Group 61 - - - Arizona.

Date Diagram.

T. 7 N., R. 3 E.

	12/5/16	12/5/16	12/5/16	12/7/16	12/7/16	12/7/16
<i>Resurveyed Jan 8, 1917 by Geo. F. Rigby, but not written up. Superseded by Independent Resurvey by H. L. Baldwin, U.S.S. in May 1918. See Book "R".</i>	6 1/29/17	5 1/29/17	4 1/28/17	3 1/28/17	2 1/28/17	1 1/28/17
	7 1/25/17	8 1/12/17	9 1/11/17	10 1/10/17	11 1/26/17	12 1/26/17
	18 1/12/17	17 1/22/17	16 1/22/17	15 1/22/17	14 1/18/17	13 1/18/17
	19 1/23/17	20 1/23/17	21 1/23/17	22 1/23/17	23 1/18/17	24 1/18/17
	30 1/23/17	29 1/23/17	28 1/20/17	27 1/20/17	26 1/17/17	25 1/17/17
	31 1/13/17	32 1/16/17	33 1/16/17	34 1/16/17	35 1/16/17	36 1/16/17

Surveys and resurveys executed by Geo. F. Rigby, U. S. Surveyor, on the dates shown on the above diagram.

Correction of part of W. tier of secs. by H. L. Baldwin, U.S.S. in May 1918.

CERTIFICATE OF UNITED STATES SURVEYOR.

I, H. L. Baldwin, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General for Group 61, Arizona, bearing date of the 20th day of October, 1916 I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, ~~surveyed all those parts or portions of~~ corrected all those parts or portions of the survey of the Subdivision lines of TOWNSHIP 7 NORTH, RANGE 3 EAST, executed in January, 1917, by George F. Rigby, U.S. Surveyor, under same instructions for Group 61, Arizona, of the Gila and Salt River Base & Meridian, in the State of Arizona, which are represented in the foregoing field notes and by diagram on page 46 hereof, as having been executed by me, and under my direction; and that all the corners of corrective survey said ~~survey~~ have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 61, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such corrective survey.

Wichita Falls Texas Nov 22 1919

H. L. Baldwin

U. S. Surveyor.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

....., 191

The foregoing field notes of the survey of

executed by

under his special instructions dated, 191 , having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

.....
U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above-described surveys in, has been correctly copied from the original notes on file in this office.

.....
U. S. Surveyor General.

BOOK 3326

FIELD ASSISTANTS To
GEORGE F. RIGBY, U. S. SURVEYOR.

NAMES.	CAPACITY.
Donald McRae,	Chainman,
D. Haltigan,	Chainman,
W. J. Spence,	Cornerman,
Joe Paull,	Cornerman,
Frank E. Wells,	Flagman, Axman, Chainman.
Edward Baker,	Axman.

CERTIFICATE OF UNITED STATES SURVEYOR.
Applied to notes in this Book, and in Books "F," "G," "H," "I,"
"J," and "K" of this Group.

BOOK 3326

I, George F. Rigby, U.S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U.S. Surveyor General, for Group 61, Arizona, bearing date of the 20th day of October, 1916, I have well, faithfully, and truly, in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, retraced all those parts or portions of the West bdy. of T. 8 N., R. 3 E., South bdy. of T. 8 N., R. 2 E., and Patented Mining Claims in Ts. 8 N., Rs. 2 and 3 E.; RESURVEYED all those parts or portions of the E bdy. of T. 7 N., R. 2 E., South bdy. of T. 8 N., R. 2 E., East bdy. of T. 8 N., R. 1 E., West bdy. of T. 9 N., R. 2 E., West bdy. of fracl. T. 9 $\frac{1}{2}$ N., R. 2 E., South bdy. of T. 10 N., R. 2 E., East, North and South bdrs. of T. 11 N., R. 3 E., East bdy. of T. 13 N., R. 1 E., South bdy. of T. 14 N., R. 2 E., 2nd. Stand. Parallel N. in R. 2 E., and 3rd. Standard Parallel North in Rs. 1 and 2 E., and Subdivision lines of T. 8 N., R. 2 E., and T. 11 N., R. 3 E., SURVEYED all those parts or portions of the South, East and North bdrs. of T. 7 N., R. 3 E., East bdy. of T. 8 N., R. 3 E., North bdy. of T. 9 N., R. 3 E., East and North bdrs. of T. 9 N., R. 2 E., East bdy. of T. 13 N., R. 1 E., South bdy. of T. 14 N., R. 2 E., 2nd. Standard Parallel N., in R. 3 E., and Subdivision lines of T. 7 N., R. 3 E., T. 8 N., R. 3 E., T. 8 N., R. 2 E., Ts. 9 N., Rs. 2 & 3 E., and T. 11 N., R. 3 E. of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes, and in Books F, G, H, I, J and K. of this Group, as having been executed by me, and under my direction, on the dates shown on diagram on page 46 hereof, and on diagrams in Books F, G, H, I, J and K; and that all the corners of said retracement, resurvey and survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U.S. Surveyor General, for Group 61, Arizona, and in the specific manner described in the field notes, and that the foregoing, and notes in Books F, G, H, I, J and K are the original field notes of such retracement, resurvey and survey.

Helena, Montana
Jan. 15, 1920.

Geo. F. Rigby
U. S. Surveyor.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix, Arizona, *May 14* 1920.

The foregoing field notes of the resurvey of part of the E. bdy. of T. 7 N., R. 2 E., and Survey of the South, East and North boundaries, and Subdivision lines of TOWNSHIP 7 NORTH, RANGE 3 EAST, and part

of the Gila and Salt River Base and Meridian, in the State of Arizona, executed by George F. Rigby, U. S. Surveyor, with corrections by H. L. Baldwin, U. S. Surveyor, under special instructions, dated October 20, 1916, for Group 61, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the resurveys and surveys they describe, are hereby approved.

Frank P. Frost
U. S. Surveyor General.