

3382

ORIG 26/1

Book "B."
4-679

12/1920

BOOK 3382

FIELD NOTES

OF THE SURVEY OF THE

U.S. Reclamation Service Levee in Frac'l. T. 8 & 9 S., R. 24 W., and
Frac'l. T. 9 S., R. 25 W.,

Part of the south bdy. of Frac'l. Township 8 South, Range 24 West.

Parts of the west bdy. and subdivision lines of Frac'l. T. 9 S., R. 24 W., and

part of the subdivision lines of Frac'l. T. 9 S., R. 25 W.,

and of the RESURVEY of

Parts of the South, and West boundaries, of Frac'l. T. 9 S., R. 24 W.,

Part of the south bdy. and subdivision lines of Frac'l. T. 8 S., R. 24 W.,

Part of the subdivision lines of frac'l. T. 9 S., R. 24 W., and the

Old Meander Line (1874 survey) of East or Left Bank of the Colorado

River in Frac'l. T. 9 S., R. 25 W., Frac'l. T. 9 S., R. 24 W.,

and Frac'l. T. 8 S., R. 24 W.,

Of the GILA AND SALT RIVER BASE AND Meridian,

In the State of ARIZONA.

EXECUTED BY

ARTHUR W. BROWN, U. S. CADASTRAL ENGINEER,

with corrections by

WILLIAM H. THORN, U. S. CADASTRAL ENGINEER,

under Special Instructions dated June 1, 1918, Supplemental Special
Instructions dated Oct. 2, 1918, & Supp. Special Instructions dated June 27, 1919
issued by the United States Surveyor General to govern surveys included in Group

No. 89, Arizona, which were approved by the Commissioner of the General Land

Office, June 11, 1918, Oct. 1, 1918, and August 14, 1919, and Assignment Instructions dated Sept. 12, 1918
and April 1, 1920.

Survey and ReSurvey commenced October 7, 1918.

Survey and ReSurvey completed November 1, 1918.

Corrections executed April 5, 1920 - April 19, 1920.

3382

3382


INDEX DIAGRAM.

Township _____, Range _____





6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

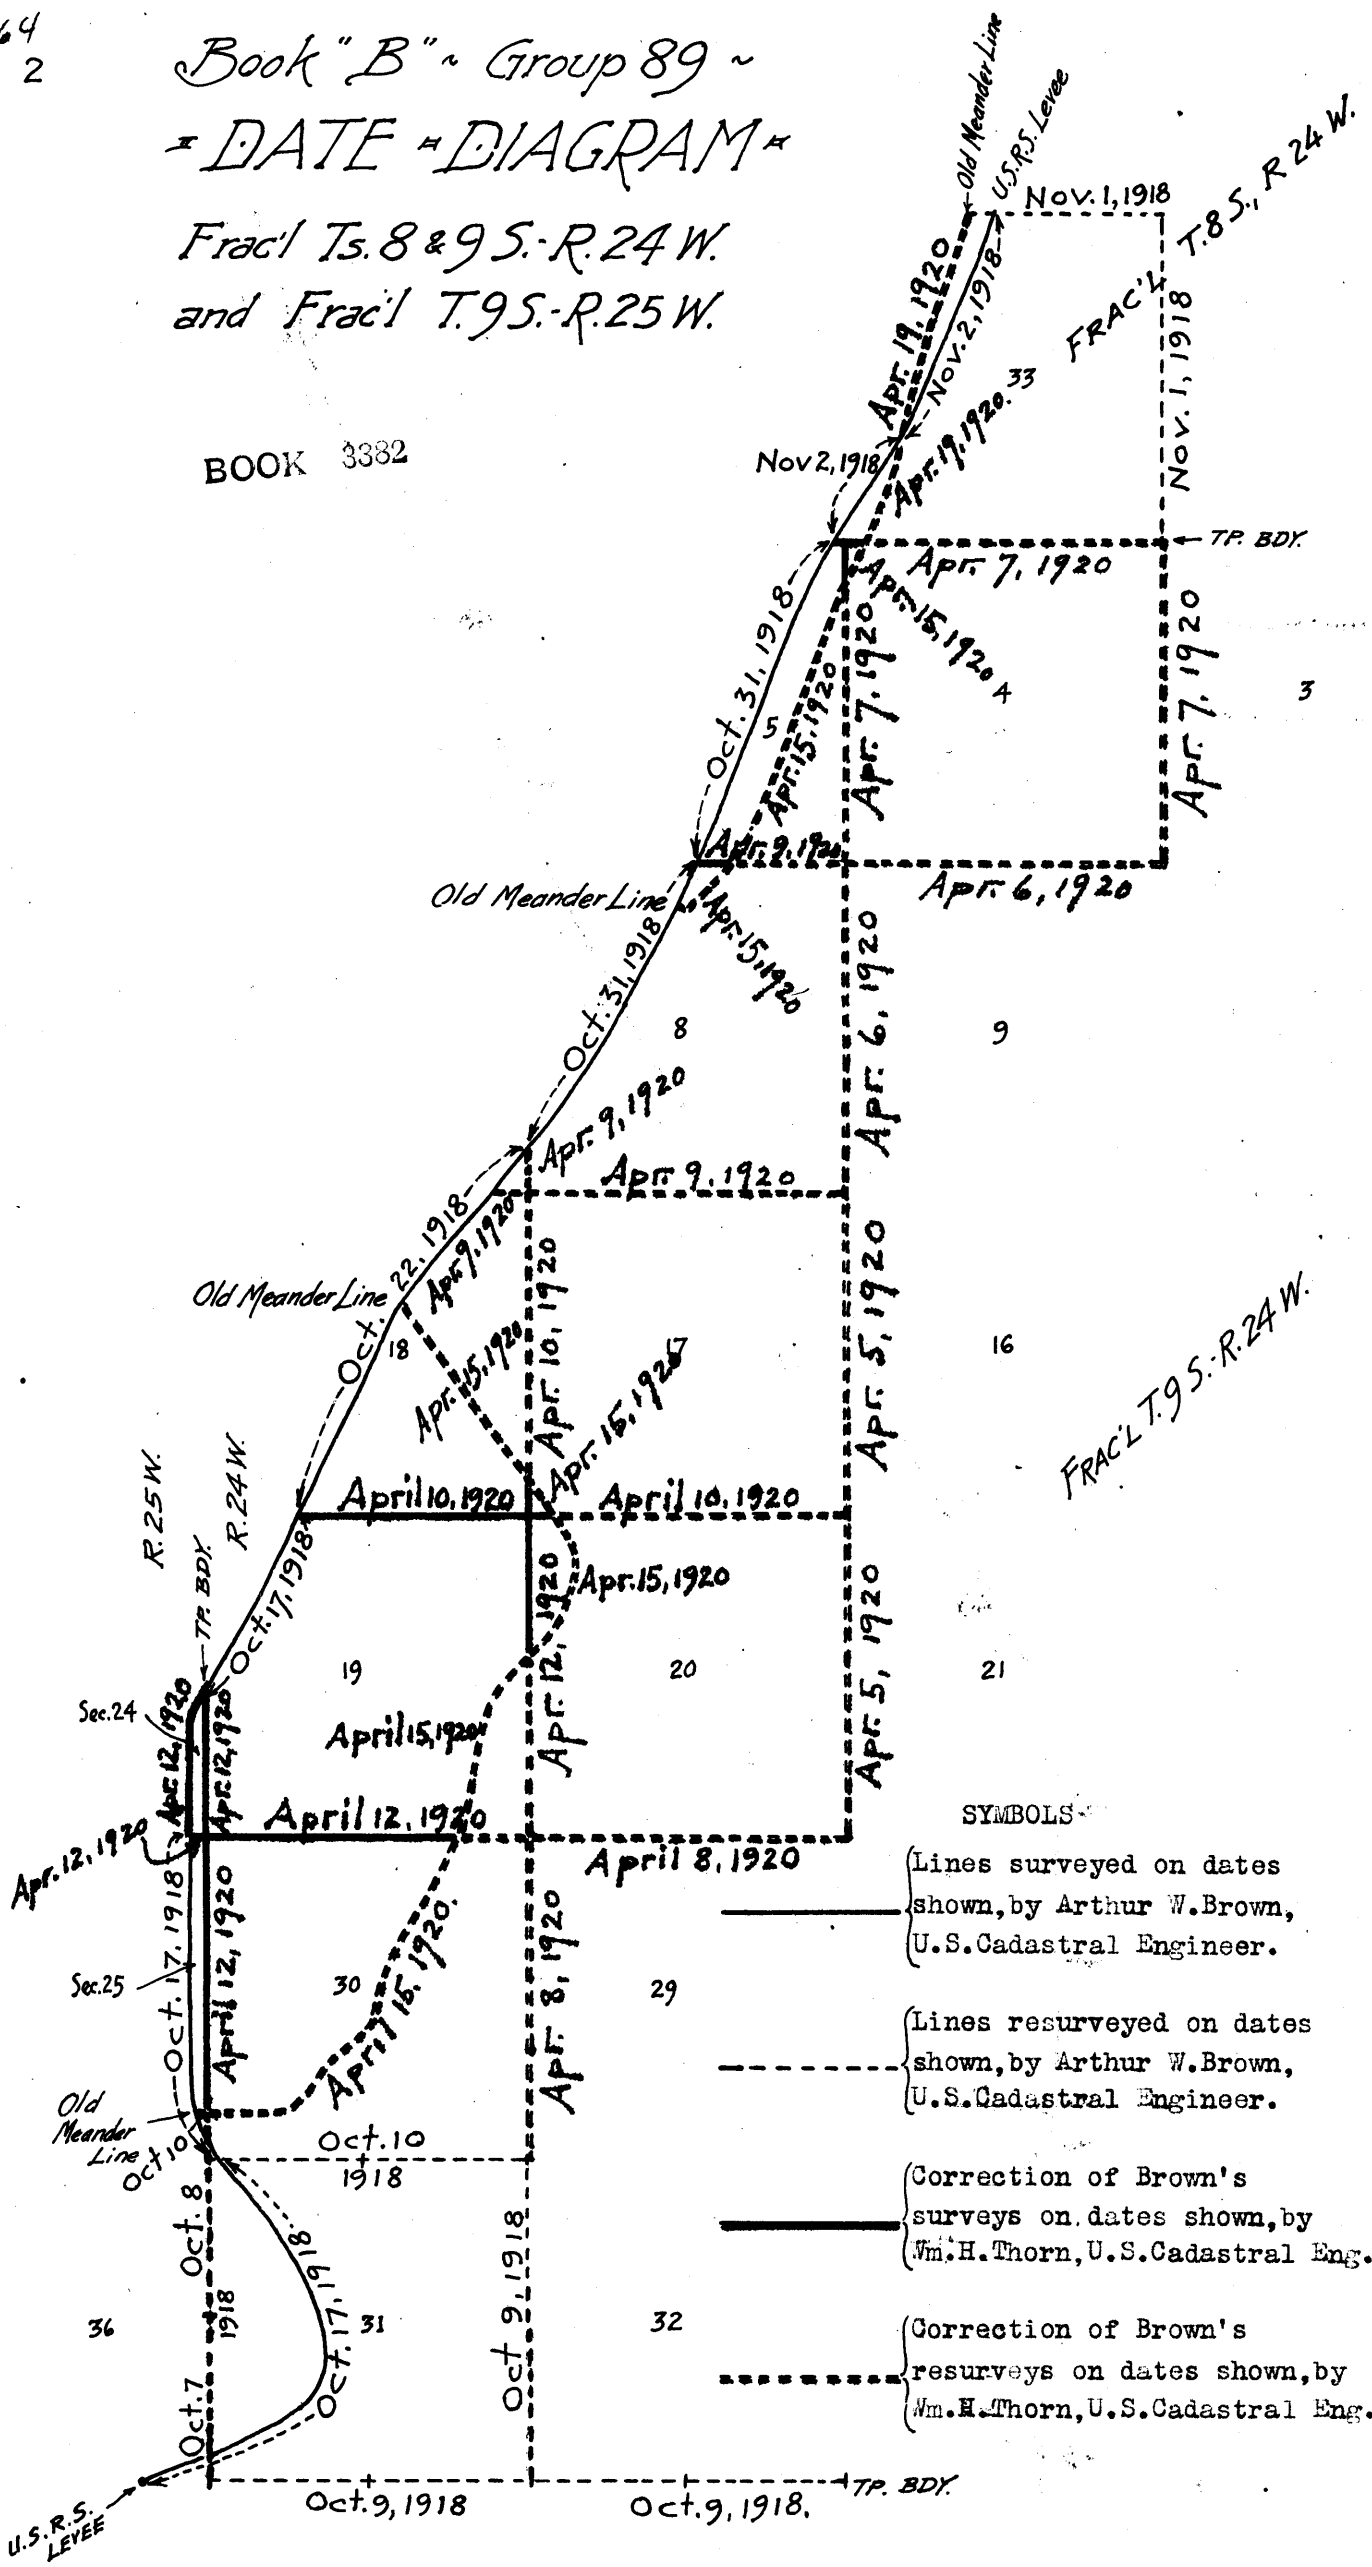Book "B" ~ Group 89 ~
"DATE" "DIAGRAM"
Frac'l T. 8 & 9 S. R. 24 W.
and Frac'l T. 9 S. R. 25 W.

BOOK 3382



SYMBOLS

-  Lines surveyed on dates shown, by Arthur W. Brown, U.S. Cadastral Engineer.
-  Lines resurveyed on dates shown, by Arthur W. Brown, U.S. Cadastral Engineer.
-  Correction of Brown's surveys on dates shown, by Wm. H. Thorn, U.S. Cadastral Eng.
-  Correction of Brown's resurveys on dates shown, by Wm. H. Thorn, U.S. Cadastral Eng.

Chains.

Resurveys and Surveys, hereinafter described, executed by A.W. Brown, U.S. Cadastral Engineer, on dates shown on date diagram on page 2 hereof, using Young and Sons' light mountain transit No. 8486, with solar attachment. For description of instrument and test of solar, see Book "A."

Corrections of said resurveys and surveys executed by W.H. Thorn, U.S. Cadastral Engineer, on dates shown on date diagram on page 2 hereof, using Young and Sons' light mountain transit No. 8592, with solar attachment. The horizontal limb is provided with two double verniers placed opposite to each other, reading to single minutes of arc; which is also the least count of the verniers of the latitude and declination arcs.

The instrument was approved by the Assistant Supervisor of Surveys, on April 1, 1920, conditional upon satisfactory field tests, a record of which follows:

April 5, 1920, at the cor. of secs. 20, 21, 28 and 29, T. 9 S., R. 24 W., Gila and Salt River Meridian, Arizona, in latitude 32° 37' N., and longitude, 114° 50' 30" W. Examine the adjustments of the instrument, and correct all errors; then, test the solar apparatus by comparing its indications with the true meridian established by observation on Polaris.

At the above described station at 8h. 0m., a.m., by watch, which is correct with local mean time, make an hour angle observation on Polaris, east of the meridian, making four observations, two each with the telescope in direct and reversed positions, and mark the mean point in the line thus determined, on a peg driven firmly in the ground, 5 chs. N.

L.m.t. of observation, mean of four readings, 8h. 0m. a.m.

Lay off the azimuth of Polaris, 1° 15' 30" to the west, and mark the meridian thus determined, by a tack in a peg driven firmly in the ground, 5 chs. N.

At 8h. 10m., a.m., l.m.t., set off 32° 37' N. on the lat. arc; 6° 08' N. on the decl. arc, and determine a meridian with the solar, which is found to agree with the true meridian.

At 4h. p.m., l.m.t., with the lat. arc unchanged, set off 6° 09' N., on the decl. arc; and determine a meridian with the solar which is found to agree with the true meridian.

As all of the solar observations during the usual hours of solar work come within 1' 30" of the true meridian, conclude that the adjustments of the instruments are satisfactory.

Resurvey of portion of South bdy. of T. 9 S. R. 24 W.

Retracement for Resurvey:

40.14

From the cor. of Ts. 9 and 10 S., Rs. 24 and 25 W., described in Book "A,"

N. 89° 49' E., on a random line, bet. secs. 6 and 31 (W. 1/2).

Fall 7 lks. S. of the U.S.R.S. reestablished 1/4 sec. cor. of secs. 6 and 31, which is an iron post, 2 ins. in diam., firmly set in ground, properly marked on brass cap. No trace of original 1/4 sec. cor. can be found.

True course and dist. of W. 1/2 of line, bet. secs. 6 and 31 are therefore, S. 89° 43' W., 40.14 chs.

A. Resurvey of portion of S. bdy. of fract. T. 9 S., R. 24 W.

Chains.

Retracement for Resurvey, continued:

Thence,
 39.98 N. $89^{\circ} 49'$ E., on a random line, bet. secs. 6 and 31 (E. $\frac{1}{2}$).
 Fall 7 lks. S. of the U.S.R.S. reestablished cor. of secs. 5, 6, 31 and 32, which is an iron post, 3 ins. in diam., firmly set in ground, top flush with surface, properly marked on brass cap, No trace of original cor. can be found.
 True course and dist. of E. $\frac{1}{2}$ of line, bet. secs. 6 and 31, are therefore S. $89^{\circ} 43'$ W., 39.98 chs.

39.98 From the U.S.R.S. reestablished cor. of secs. 5, 6, 31 and 32, N. $89^{\circ} 49'$ E., on a random line, bet. secs. 5 and 32 (W. $\frac{1}{2}$).
 Fall 7 lks. S. of the U.S.R.S. reestablished $\frac{1}{4}$ sec. cor. of secs. 5 and 32, which is a redwood post, 4 ins. square, properly marked, firmly set in the ground, top of post 6 ins. below surface. No trace of original $\frac{1}{4}$ sec. cor.

True course and dist. of W. $\frac{1}{2}$ of line, bet. secs. 5 and 32, are therefore S. $89^{\circ} 43'$ W., 39.98 chs.

39.98 Thence,
 N. $89^{\circ} 49'$ E., on a random line, bet. secs. 5 and 32 (E. $\frac{1}{2}$).
 Fall 7 lks. S. of the original cor. of secs. 4, 5, 32 and 33, which is a badly decayed wooden stake, 2 ins. square buried 6 ins. below surface of road.

From cor.,

A mesquite, 10 ins. in diam., brs. S. $45\frac{1}{2}^{\circ}$ E., 34 lks. dist., marked "B S 23."

The SE. cor. post of wire fence, brs. N. $48\frac{1}{2}^{\circ}$ W. 72 lks. dist., marked "47 R.P."

No trace of original accessories can be found.

True course and dist. of E. $\frac{1}{2}$ of line bet. secs. 5 and 32 are therefore S. $89^{\circ} 43'$ W., 39.98 chs.

Resurvey:

From original cor. of secs. 4, 5, 32 and 33, hereinbefore described,

S. $89^{\circ} 43'$ W., on a true line, bet. secs. 5 and 32.

Over level land, along fenced road, cultivated land on S. side of line. Telephone line on N. side.

1.88 House brs. S. 2 chs. dist.

2.98 Cultivated land on N. side of line begins.

19.98 Irrigation ditch, course N.

At 70 lks. S. of line, ditch turns W.

20.50 House brs. S. 3 chs. dist.; fence on N. side of line turns N.

32.58 House brs. 2 chs. N.

39.98 Intersect the U.S.R.S. reestablished $\frac{1}{4}$ sec. cor., hereinbefore described. This cor. is in road about midway between NW. and SW. fence cors. Continue in road, cultivated land each side, unfenced. Telephone line E. and W. on N. side of road. Irrigation ditch is on S. side of road.

40.20 Irrigation ditch, course S., leaves E. & W. irrigation ditch at this point.

50.00 House brs. S. 4 chs. dist.

58.00 House brs. N. 4 chs. dist., to which a branch telephone line extends.

60.00 Irrigation ditch, course S., turns E. at 60 lks. S. of line.

79.50 Branch telephone lines, bear N. and S., from the main line on N. side of the road.

79.96 Intersect U.S.R.S. reestablished cor. of secs. 5, 6, 31 and 32, hereinbefore described, which also coincides with the true position of cor. determined by proportional measurement.

Remove U.S.R.S. post and in its place, set an iron post, 3 ft. long, 2 ins. in diam., 36 ins. in the ground for reestablished cor. of secs. 5, 6, 31 and 32, with brass cap, marked

Resurvey of portion of S bdy. of fract T. 9 S. R. 24 W. 5.

Chains.

T9S	
R24W	
S31	S32
S 6	S 5
T10S	
1918	

Cor. stands at intersection of E. and W. road with N. and S. road. No accessories available.
 Land, level, cultivated
 Soil, sandy loam.
 Timber, none.
 Undergrowth, none.

- 20.00 S 89°43' W., on a true line, bet. secs. 6 and 31 (E. 1/4).
 Over level land, along road, cultivated land N. and S. unfenced. Line is paralleled by telephone line on N. side of road.
- 2.28 House brs. S. 2 chs. dist.
- 19.98 Branch irrigation ditch, course N. from W. Thence along N. side of same.
- 21.48 House brs. S. 1.50 chs. dist.
- 39.98 Intersect the U.S.R.S. reestablished 1/4 sec. cor. of secs. 6 and 31, hereinbefore described, which is also coincides with the true position of cor. determined by proportional measurement.
 Remove the U.S.R.S. post, and in its place, set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in the ground for reestablished 1/4 sec. cor., with brass cap, marked

S 31	
S 6	
1918	

and establish accessories as follows:
 On a cottonwood, 30 ins. diam., N. 68 1/4° W., 76 lks. dist. mark 1/4 S 31 BT.
 On a cottonwood, 30 ins. diam., S. 42 1/4° W., 216 lks. dist., mark 1/4 S 6 BT.

- Thence,
 S 89°43' W., on a true line, bet. secs. 6 and 31 (W. 1/2).
 Over level land, along unfenced road, uncleared land, and telephone line on N., cultivated land and irrigation ditch on S. side.
- 0.16 Bridge over irrigation ditch. Ditch turns E. at about 70 lks. S. of line, and turns W. at about 1 ch. North of line, brs. N. and S., under bridge. Telephone line crosses from N. to S. side of road at this point.
 - 1.16 House brs. N. 50 lks. dist.
 - 18.46 House brs. S. 1 chain dist.
 - 20.00 N.E. fence cor. brs. S. about 75 lks. dist. Thence along N. side of fence.
 - 37.00 Telephone line from S. side of road turns S. at this point.
 - 38.00 House brs. S. 5 chs. dist.
 - 40.14 Intersect the reestablished cor. of T. 9 and 10, R. 24 and 25 W., described in Book "A."
 Land, level.
 Soil, sandy loam, 1st rate.
 Undergrowth, willow, arrowweed, cottonwood on W. half of N. side; balance in cultivation.

6. Resurvey of portion of W. bdy. of fracl. T. 9 S. R. 24 W.

chains.	Retracement for Resurvey:
	From reestablished cor. of Ts. 9 and 10 S., Rs. 24 and 25 W., described in Book "A,"
5.98	North, on random line, bet. secs. 31 and 36. Intersect SE. toe of U.S.R.S. Levee, brs. NE. and SW. Set temp. A.P. and C.C. at this point. Continue line and measurement.
40.00	Diligent search in this vicinity fails to reveal any trace of either of the original $\frac{1}{4}$ sec. cor. of secs. 31 and 36 or the U.S.R.S. $\frac{1}{4}$ sec. cor. thereof. Set temp. $\frac{1}{4}$ sec. cor.
80.00	Diligent search in this vicinity fails to reveal any trace of the original cor. of secs. 25, 30, 31 and 36, but at a point 62 lks. N. 89° W. find the U.S.R.S. cor. of said secs., which is a 3 in. iron post, firmly set in the ground, and properly marked on brass cap. Set temp. cor. of secs. 25, 30, 31 and 36 at 80.00 chs. N. from Tp. cor.

11.00	From temp. cor. of secs. 25, 30, 31 and 36, North, on random line, bet. secs. 25 and 30. (Record dist.), Diligent search in this vicinity fails to reveal any trace of the original meander cor. of secs. 25 and 30 set in 1874 on the left bank of the Colorado River. Set temp. meander cor. of secs. 25 and 30.

<u>Resurvey:</u>	
	From the reestablished cor. of Ts. 9 and 10 S., Rs. 24 and 25 W., hereinbefore described, North, on true line, bet. secs. 31 and 36. Over level, cleared land.
.40	Private road brs. E. and W.; turns S. at about 40 lks. E. of line and joins main road, bearing E. from S. at a point just east of Tp. cor.
.70	S. bank of irrigation ditch, brs. E. and W. Thence across said ditch, 70 lks. wide, course E.
1.40	N. bank of same, brs. E. and W. Enter dense undergrowth of willow and arrowweed.
1.82	A U.S.R.S. meander cor. brs. W. $1\frac{1}{2}$ lks. dist., which is a 1 in. iron post with brass cap. This cor. being set, bet. 3 and 4 chs. SE. from the U.S.R.S. levee, is evidence that the present location is erroneous.
5.98	Intersect SE. toe of U.S.R.S. levee, brs. NE. and SW. At point of intersection, Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for closing cor. of secs. 31 and 36, and for Angle Point No. 23 of levee survey, marked on brass cap,
6.40	Thence across levee. Side track of U.S.R.S. railroad, brs. N. 62° 35' E. and S. 62° 35' W., on tangent. End of side track brs. S. 62° 35' W. about 50 lks. dist.
6.60	Main track of U.S.R.S. railroad, brs. N. 62° 35' E. and S. 62° 35' W. on tangent.
7.20	NW. toe of U.S.R.S. levee, brs. NE. and SW. Leave levee; thence over land, subject to the overflow of the Colorado river.
19.63	Pole fence, brs. NE. and SW.
26.30	Enter dry slough, brs. NW. and SE. Thence across slough, course NW.
36.00	NE. edge of slough, brs. NW. and SE. Leave slough, continue

Resurvey of a portion of the W bdy of fract. T. 9 S. R. 24 W. 7

Chains.

over overflow land, thru dense undergrowth and scattering timber.

40.00 Intersect stake set as temp. $\frac{1}{2}$ sec. cor. when retracing the line as hereinbefore described.
 This point being on the river side of the U.S.R.S. levee, and therefore subject to overflow, do not reestablish the $\frac{1}{2}$ sec. cor. of secs. 31 and 36 in the regular manner, but leave the stake to mark the corner point, and establish bearing trees to this cor. as follows:
 On a cottonwood, 6 ins. in diam., N. $71\frac{1}{2}^{\circ}$ E., 74 lks. dist., mark " $\frac{1}{2}$ S 31 BT."
 On a willow, 5 ins. in diam., S. $73\frac{1}{2}^{\circ}$ W., 46 lks. dist., mark " $\frac{1}{2}$ S 36 BT."

70.00 Center of old abandoned levee, brs. NW. and SE.


80.00 Intersect stake set as temp. sec. cor., when retracing the line, as hereinbefore described.
 This point being on the river side of the U.S.R.S. levee, and therefore subject to overflow, do not reestablish the cor. of secs. 25, 30, 31 and 36 in the regular manner but leave the stake to mark the corner point, and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of stake. Leave the U.S.R.S. cor., hereinbefore described, undisturbed.
 Land, level.
 Soil, sandy loam, 1st rate.
 Timber, scattering cottonwood and willow.
 Undergrowth, willow and arrowweed, dense growth.

From reestablished cor. of secs. 25, 30, 31 and 36, described above,
 North, on true line, bet. secs. 25 and 30 (part of S. $\frac{1}{2}$).
 Over level land, subject to overflow, thru scattering timber and dense undergrowth.

1.00 West toe of U.S.R.S. levee, brs. NW. and SE. Thence across levee.


1.70 Center of U.S.R.S. railroad in curve from S. $28\frac{1}{2}^{\circ}$ E. to N. $14\frac{1}{2}^{\circ}$ W.

2.40 East toe of U.S.R.S. levee, brs. NW. and SE.
 At point of intersection
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for closing cor. of secs. 25 and 30, and for Angle point No. 32, of levee survey, marked on brass cap,



Thence thru cotton field.

11.00 Intersect temp. meander cor. of secs. 25 and 30, set at record course and dist. N. from Tp. cor. when retracing the line as hereinbefore described. Remove stake & in same place set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished meander cor. of secs. 25 and 30, marked on brass cap.



and dig a pit, 36x36x12 ins. S. of cor. 6 ft. dist. From this cor. a redwood post, 4 ins. square, marked "PC734+25²" on W. face, brs. N. $72^{\circ}30'$ W. 232 lks. dist. on the U.S.R.S. Levee.
 Land, level. Soil, sandy loam, 1st rate.
 Timber, scattering willow and cottonwood, S. of levee only.
 Undergrowth, dense willows and arrowweed S. of levee only.

8. survey of Portion of W. bdy. of Fracl. T. 9 S. R. 24 W.


Chains.

Retracement for Survey:

The original survey of the Tp. bdy. in 1874 terminated at the meander cor. of secs. 25 and 30, and no later survey or resurvey of the line has heretofore been made under instructions from the G.L.O., but in 1915, the township boundary was extended farther north by the U.S. Reclamation Service. The location of the cors. set on said extension of the Tp. bdy. are to be preserved in the survey of same portion of the Tp. bdy. as per supplemental special instructions for Group No. 89, dated June 27, 1919; therefore, preliminary to the survey, make retracement as follows:


From reestablished meander cor. of secs. 25 and 30, hereinbefore described,

28.90 North, on random line, bet. secs. 25 and 30.
 Fall 92 lks. E. of U.S.R.S. $\frac{1}{4}$ sec. cor. of secs. 25 and 30, which is a 1 in. iron post, 10 ins. above ground, firmly set, marked on brass cap,



and witnessed by 2 pits, one each N. and S. of cor.
 No bearing trees.
 True course and dist. of line from Meander cor. to this cor. are therefore, N. 1° 20' W., 28.91 chs.

39.90 Thence,
 North, on random line, bet. secs. 25 and 30 (N. $\frac{1}{2}$).
 Fall 37 lks. E. of U.S.R.S. cor. of secs. 19, 24, 25 and 30, which is a 2 in. iron post, 10 ins. above ground, firmly set, marked on brass cap,




and witnessed by 4 pits, one in each sec.
 True course and dist. of N. $\frac{1}{2}$ of line, bet. secs. 25 and 30 are therefore N. 0° 32' W., 39.90 chs.

33.59 From cor. of secs. 19, 24, 25 and 30, described above,
 North, on random line, bet. secs. 19 and 24.
 Intersect SE. toe of U.S.R.S. levee, brs. NE. and SW.
 Diligent search in this vicinity fails to reveal any trace of U.S.R.S. closing cor. Set temp. closing cor. of secs. 19 and 24, at point of intersection. Discontinue retracement.

SURVEY:


6.00 From reestablished meander cor. of secs. 25 and 30, hereinbefore described,
 11.00 N. 1° 20' W., on true line, bet. secs. 25 and 30 (part of S. $\frac{1}{2}$).
 21.00 Over cultivated land, the result of accretion since 1874.
 28.91 Leave cultivated land, brs. E. and W.
 Foot of nearly perpendicular bank, 5 ft. high, brs. E. and W.
 Enter cultivated land, brs. E. and W.
 (39.90 chs. northing from cor. of secs. 25, 30, 31 and 36).
 Intersect the U.S.R.S. $\frac{1}{4}$ sec. cor., hereinbefore described.
 Remove the iron post, and in same place,
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 25 and 30, marked on brass cap,



to which the pits, 18x18x12 ins., N. and S. of cor. 3 ft. dist. remain accessory.
 Thence,


Survey of portion of West bdy. of fragl. T. 9 S. R. 24 W. 9.

Chains. N. 0°32' W., on a true line, bet. secs. 25 and 30 (N/2).
 Over cultivated land, near and on the east side of fence,
 bearing N. and S., which fence runs along east side
 of road, bearing N. and S.
 22.10 Leave cultivated land, brs. E. and W. Enter dense under-
 growth.
 35.00 Leave dense undergrowth brs. E. and W. Enter cleared land.
 39.90 Intersect the U.S.R.S. cor. of secs. 19, 24, 25 and 30, herein-
 before described. Remove the iron post, and in the
 same place set an iron post, 3 ft. long, 2 ins. in the
 diam., 26 ins. in the ground, for cor. of secs. 19, 24,
 25 and 30, marked on brass cap,



to which the pits, 18x18x12 ins. one in each sec. 3 ft. dist.
 remain accessory.
 From this cor., a 2 in. test well pipe brs. S. 15°30' E., 3
 lks. dist.
 Land, level, formed by accretion.
 Soil, sandy loam, 1st rate.
 Timber, none.
 Undergrowth, dense willow, cottonwood and arrowweed where
 noted.

From cor. of secs. 19, 24, 25 and 30, described above,
 North, on true line, bet. secs. 19 and 24.
 Over level land, cleared, the result of accretion since
 1874.
 2.00 Leave cleared land, brs. E and W. Enter dense undergrowth.
 4.00 Center of an old abandoned levee, brs. N. 81° W. and S. 81° E.
 5.00 S. edge of dry slough, brs. NW. and SE. Thence across
 slough, course NW., nearly W.
 10.00 N. edge of slough, brs. NW. and SE. Leave slough, and con-
 tinue over level land, thru. dense undergrowth.
 33.59 Intersect temp. closing cor. of secs. 19 and 24 set in
 retracement, as hereinbefore described, at the inter-
 section of Tp. boundary with the SE. toe of the U.S.R.
 S. levee, at a point 5.00 chs. S. 13°07' W. from A P No. 36
 of levee survey hereinafter described.
 Remove the stake, and in same place, set an iron post, 3
 ft. long, 2 ins. in diam., 26 ins. in the ground, for
 closing cor. of secs. 19 and 24, marked on brass cap,




From which,
 A willow, 6 ins. in diam., brs. N. 16° E., 48 lks.
 dist., mark "T9SR24W S19CCBT."
 and raise a mound of stone, 3 ft. base, 2 ft. high, S. of
 cor.
 Land, level, formed by accretion.
 Soil, sandy loam, 1st rate.
 Timber, none.
 Undergrowth, dense willow, arrowweed, and cottonwood
 where noted.

10. Resurvey & Survey of portion of s bdy. of fract. T. 8 S., R. 24 W.

Chains.

Retracement for Resurvey and Survey:

The cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp., was reestablished in its original position by the U.S. R.S. with an iron post 3 ins. in diam., properly marked and set in center of intersection of N. and S. road with E. and W. road. This cor. is reestablished by Arthur W. Brown, U.S. Cadastral Engineer, as follows:
 Remove said post, and in same place, set an iron post 3 ft. long, 2 ins. in diam., 36 ins. in the ground, for reestablished cor. of secs. 3, 4, 33 and 34, fract. Ts. 8 and 9 S., R. 24 W., with brass cap, marked



and establish accessories as follows:

- On a willow, 14 ins. in diam., N. 69°08'E., 168 lks. dist., mark "T8S R24W S34 BT."
- On a cottonwood, 14 ins. in diam., brs. S. 67°35'E., 144 lks. dist., mark "T9S R24W S4 BT."
- On a cottonwood, 14 ins. in diam., brs. S. 60°35'W., 71 lks. dist., mark "T9S R24W S3 BT."
- U.S.G.S. BM. (3-in. iron post) brs. N. 40°E., 78 lks. dist., (Elev. 117.314 ft.)
- A test well pipe, brs. S. 54°07'W., 70 lks. dist., marked "El 118.95 ft."

Thence,

40.31 West, on a random line, bet. secs. 4 and 33 (E. $\frac{1}{2}$).
 Fall 18 lks. N. of the U.S. R.S. $\frac{1}{4}$ sec. cor., which is a redwood post, 4 ins. square, set 6 ins. below the surface of the ground.

True course of E. $\frac{1}{2}$ of line bet. secs. 4 and 33 to this $\frac{1}{4}$ sec. cor. are therefore S. 89°45'W., 40.31 chs.

Thence,

35.29 West, on a random line on s bdy. of sec. 33 (W. $\frac{1}{2}$).
 (Record dist. of 75.60 chs. W. from cor. of secs. 3, 4, 33 and 34) after diligent search, fail to find any evidence of the original meander cor. of fract. secs. 4 and 33, Set temp. M.C.

40.69 Fall 18 lks. N. of the U.S. R.S. cor. of secs. 4, 5, 32 and 33, which is an iron post, 3 ins. in diam., set flush with the surface, properly marked on brass cap, although the cor. of secs. 4, 5, 32 and 33 was not established in the original survey, this U.S. R.S. sec. cor. has been accepted by adjacent settlers, and its position conforms to all adjacent property lines and improvements.

True course of W. half of S. bdy. of sec. 33, will therefore be based upon this cor. location, and is S. 89°45'W.
 Retracement farther west will be unnecessary.

RESURVEY:

From reestablished cor. of secs. 3, 4, 33 and 34, hereinbefore described,

S. 89°45'W., on a true line, bet. secs. 4 and 33 (E. $\frac{1}{2}$).
 Along fenced road, cultivated lands on both sides, with irrigation ditch and telephone line on N. side.

8.80 Irrigation ditch on N. side of line, brs. from E. to N.

19.00 Bridge across West Canal, 80 lks. wide, course NNW.

Fence on both sides of same.

28.50 House brs. S. 4 chs. dist.

30.00 House brs. N. 1.00 chain dist.

33.50 Irrigation ditch on S. side of line, course from W. to SE.

40.31 intersect the U.S. R.S. $\frac{1}{4}$ sec. cor. hereinbefore described.

Alongside the post, set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 4 and 33, with brass cap, marked

Resurvey & Survey of portion of S. bdy. of fracl. T. 8 S., R. 24 W., 11

Chains.

$\frac{1}{4}$ S 33
S 4
1920

from which,

A tack on weir, marked "15 lks. R.P.", brs. E. 15 lks. dist.

No other accessories available.

The position of this $\frac{1}{4}$ sec. cor. agrees with property lines and other improvements.

Thence,

S. 89° 45' W., on a true line, on S. bdy. of fracl. sec. 33 (W. $\frac{1}{2}$) Over level land, along road, fenced both sides. On N. side, road is paralleled by telephone line, and on S. side by irrigation ditch.


12.19 Telephone line brs. S. to house, 1 chain dist.

19.69 Fence on S. side of line, turns S.

Irrigation ditch, brs. N. and S.

Thence along unfenced land.

36.23 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished meander cor. of fracl. secs. 4 and 33, with brass cap, marked



Dig a pit, 18x18x12 ins., E. of cor., 3 ft. dist. Continue line and measurement as

SURVEY


of completion of S. bdy. of sec. 33.

39.79 SE. bank of West Canal, course SW. End of bridge across Canal. (Willits Siding).

40.59 NW. bank of West canal.

40.69 Intersect the U.S.R.S. cor. of secs. 4, 5, 32 and 33, hereinbefore described, alongside of which

Set an iron post, 3 ft. long, 2 ins. in diam., 36 ins. in the ground, for cor. of secs. 4, 5, 32 and 33, with brass cap, marked



from which,

A redwood post, 4 ins. square, marked "S32" on W. face, and "S33" on E. face, brs. N. 0° 08' W., 170 lks. dist.

A nail on N. end of bridge, marked "R P 35.4", brs. N. 36° 47' E., 54 lks. dist.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Surveyor General's note:

The designation of above described cor. should be cor. of secs. 4 and 5 only, and the marking "S 32" on brass cap should be removed, as the line bet. secs. 32 and 33, fracl. T. 8 S., R. 24 W. was not surveyed, and as the area west of the reestablished meander cor. of secs. 4 and 33 is new land farmed by accretion since original survey, and therefore, subject to any method of subdivision consistent with good practice, and with a view toward protecting the interests of the settlers.

Continue line and measurement of W. $\frac{1}{2}$ of sec. 33 (N. of fracl. sec. 5)

12. Resurvey and Survey of portion of S. bdy of frac T 8 S. R. 24 W.

Chains.

41.48 Intersect SE. toe of U.S.R.S. Levee, at a point 48 lks. S. $29^{\circ}58'W.$ from A.P.No. 50 thereof, hereinafter described. At point of intersection, Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for closing cor. of fracl. Ts. 8 and 9 S., R. 24 W., with brass cap, marked

$$\begin{array}{r} \text{USRS} \\ \hline \text{T8S} \\ \text{S32} \\ \hline \text{S 5} \text{ CC} \\ \text{T9S R24W} \end{array}$$

1920

and raise a mound of stone 3 ft. base, 2 ft. high, E. of cor. From cor.,

A redwood post, 4 ins. square, marked T8S R24W S32 on N. face, T9S R24W S5 on S. face, and 450+ .028 on W. face, brs. S. $89^{\circ}45'W.$, 23 lks. dist.

Surveyor General's Note:

The designation of above described cor. should be "closing cor. of fracl. secs. 5 and 33, fracl. Ts. 8 and 9 S., R. 24 W.," and the marking "S32" on brass cap should be removed, for the reason hereinbefore explained in connection with cor. of secs. 4 and 5, fracl. T. 9 S., R. 24 W. on this township boundary.

Land, level.

Soil, sandy, 1st rate.

Undergrowth, willows, arrowweed and cottonwood on uncultivated portion.

Resurvey and Survey of part of subdivision lines of frac1.T9S.R24 W.

Chains.

Retracement for Resurvey:

From the feestablished cor. of secs. 5, 6, 31 and 32, on the S. bdy. of Tp., hereinbefore described, North, on random line, bet. secs. 31 and 32.

40.00 After diligent search, fail to find any evidence of the original or U.S.R.S. $\frac{1}{4}$ sec. cor. Set temp. cor.

79.85 Fall 46 lks. E. of the cor. of secs. 29, 30, 31 and 32, reestablished in its original position by the U.S.R.S., which is an iron post, 2 ins. in diam., firmly set, 6 ins. above ground, properly marked on brass cap, No bearing trees.

True course and dist. of line bet. secs. 31 and 32 are therefore N. 0° 20' W., 79.85 chs.

Resurvey:


From the cor. of secs. 5, 6, 31 and 32, on S. bdy. of Tp., hereinbefore described, N. 0° 20' W., on a true line, bet. secs. 31 and 32. Along road, cultivated land on both sides.

20.00 Enter fenced lane, 70 lks. wide.

24.50 House brs. W. 150 lks. dist.

30.00 Fence on W. turns W. Ditch parallels line, 40 lks. E.

39.92 $\frac{1}{2}$ (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor., with brass cap, marked



and establish accessories as follows:

On a cottonwood, 8 ins. in diam., N. 20 $\frac{1}{4}$ ° E., 174 lks. dist., mark " $\frac{1}{4}$ S32 BT."

On a cottonwood, 8 ins. in diam., S. 34 $\frac{1}{2}$ ° E., 107 lks. dist., mark " $\frac{1}{4}$ S32 BT."

40.50 House brs. W., 2 chs. dist.

59.80 Fence on E. turns E.

76.00 House brs. W. 2.00 chs. dist.

79.50 Ditch, course E.

79.85 Intersect the U.S.R.S. cor. of secs. 29, 30, 31 and 32, hereinbefore described, to which establish accessories as follows:

On a cottonwood, 36 ins. in diam., N. 83° E., 107 lks. dist., mark "T9S R24W S29 BT."

On a willow, 8 ins. in diam., S. 18° W., 159 lks. dist., mark "T9SR24W S31 BT."

On a cottonwood, 24 ins. in diam., brs. N. 42 $\frac{1}{2}$ ° W., 150 lks. dist., mark "T9S R24W S30 BT."

Land, level. In cultivation.

Soil, sandy, 1st rate.

Retracement for Resurvey:

S. 89° 43' W., on a random line, bet. secs. 30 and 31.

40.00 After diligent search, fail to find any evidence of the original or U.S.R.S. $\frac{1}{4}$ sec. cor. Set temp. cor.

78.27 Intersect NE toe of U.S.R.S. Levee, brs. NW. and SE. Set stake for temp. closing cor., and for Angle Point of Levee Survey.

79.57 Intersect W. bdy. of the Tp., 2 lks. N. of the reestablished cor. of secs. 25, 30, 31 and 36, hereinbefore described. True course and dist. of line bet. secs. 30 and 31, are therefore N. 89° 42' E., 79.57 chs.

Resurvey:

From reestablished cor. of secs. 25, 30, 31 and 36, on W. bdy,

14. Resurvey & Survey of part of Subdivision lines of fract. T. 9 S. R. 24 W.

Chains.

- 1.30 of Tp., hereinbefore described,
N. 89° 42' E., on a true line, bet. secs. 30 and 31.
Intersect the eastern toe of the U.S.R.S. Levee, brs. NW. and SE.
At point of intersection,
Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for closing cor. of secs. 30 and 31, and Angle Point No. 31 of Levee Survey, with brass cap, marked
- $$\begin{array}{r} \text{USRS} \quad \text{CS } 30 \quad \text{T9S} \\ \text{A P. No. 31} \quad \text{CS } 31 \\ \hline 1918 \end{array}$$
- and raise a mound of stone 3 ft. base, 2 ft. high, s. of cor.
- 23.63 Graded road, brs. SE. and NW.
39.05 West bank of canal, brs. N. and S.
39.74 (Proportional dist.), set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 30 and 31, with brass cap, marked,
- $$\begin{array}{r} \text{S } 30 \\ \text{S } 31 \\ \hline 1918 \end{array}$$
- and establish accessories as follows:
On a cottonwood, 16 ins. in diam., N. 83° 2' E., 327 lks. dist., mark "S 30 BT."
No other trees within limits; dig pits 18x18x12 ins., E. and W of cor. 3 ft. dist.
- 39.92 East bank of West canal, course S.
Thence along road, with cultivated land on N.
58.27 House brs. N. 3 chs. dist.
59.57 Beginning of cultivated land on S.
59.67 Ditch, course N.
79.57 Intersect reestablished cor. of secs. 29, 30, 31 and 32.
Land, level.
Soil, sandy, 1st rate.
Timber, scattering cottonwood.
Undergrowth, willow, arrowweed and cottonwood.

Retracement for Resurvey:

- 39.98 North, on random line, bet. secs. 29 and 30 (S. $\frac{1}{2}$).
Fall 66 lks. E. of the U.S.R.S. $\frac{1}{4}$ sec. cor., which is an iron post, 1 in. in diam., firmly set, and properly marked on brass cap. No accessories.
True course and dist. of S. $\frac{1}{2}$ of line bet. secs. 29 and 30, are therefore S. 0° 57' E., 39.98 chs.
Thence,
39.98 North, on a random line, bet. secs. 29 and 30 (N. $\frac{1}{2}$).
Fall 66 lks. E. of the point for the cor. of secs. 19, 20, 29 and 30, determined from remains of old stake. This cor. point is at the intersection of E. and W. road with N. and S. road, and agrees with all improvements on the ground.

Reestablish the cor. at this point as follows:
Set an iron post, 3 ft. long, 2 ins. in diam., 36 ins. in the ground, for reestablished cor. of secs. 19, 20, 29 and 30, with brass cap, marked

$$\begin{array}{r} \text{T9S} \quad \text{R24W} \\ \text{S19} \quad \text{S20} \\ \hline \text{S30} \quad \text{S29} \\ 1918 \end{array}$$

and establish accessories as follows:

Resurvey & Survey of part of Subdivision lines of fracl. T. 9 S. R. 21 W. 15

Chains.

On a willow, 8 ins. in diam., S. $82^{\circ}35'E.$, 74 lks. dist., mark T9S R24W S29BT."
A test well pipe, brs. N. $77^{\circ}15'E.$, 8 lks. dist.
True course and dist. of N. $\frac{1}{2}$ of line, bet. secs. 29 and 30 are therefore S. $0^{\circ}57'E.$, 39.98 chs.

RESURVEY:

From reestablished cor. of secs. 19, 20, 29 and 30, S. $0^{\circ}57'E.$, on a true line, bet. secs. 29 and 30 (N. $\frac{1}{2}$).
Over level land.

0.40 Fence brs. N. and S.
10.30 Irrigation ditch, course SE.
11.05 Irrigation ditch, course SE.
13.50 House brs. W., 1 ch. dist.
14.50 Thence across cleared land.
39.98 Intersect the U.S.R.S. $\frac{1}{4}$ sec. cor. hereinbefore described.
Remove the U.S.R.S. post, and in its place,
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
S30 | S29
1920

On a cottonwood, 16 ins. in diam., N. $42^{\circ}50'W.$, 345 lks. dist., mark " $\frac{1}{4}$ S30 BT."
This cor. stands at W. end of fence, and agrees with all improvements on the ground.
Thence,
Continue line and measurement on S. $\frac{1}{2}$ of line, bet. secs. 29 and 30.
78.00 Melvin Crisp's house, brs. W. 1.00 chain dist.
79.96 Intersect reestablished cor. of secs. 29, 30, 31 and 32.
Land, level.
Soil, sandy, 1st rate.
Undergrowth, willow, arrowweed and cottonwood.

Retracement for Resurvey and Survey:

From the cor. of secs. 19, 24, 25 and 30, on W. bdy. of Tp., hereinbefore described,
East, on a random line, bet. secs. 19 and 30.
40.00 Set temp. $\frac{1}{4}$ sec. cor.
79.69 Fall 32 lks. S. of the reestablished cor. of secs. 19, 20, 29 and 30, hereinbefore described.
True course and dist. of line, bet. secs. 19 and 30 are therefore, S. $89^{\circ}46'W.$, 79.69 chs.

Resurvey:

From the reestablished cor. of secs. 19, 20, 29 and 30, S. $89^{\circ}46'W.$, on a true line, bet. secs. 19 and 30.
Over level land, along road, with cultivated land on both sides and telephone line, fence and irrigation ditch on S. side.
4.99 House brs. S. 1 ch. dist.
House brs. North, 2 chs. dist.
9.59 House brs. S. 1 ch. dist.
14.14 NE. bank of irrigation ditch. Thence across said ditch, course SE.
14.39 Road brs. NW. and SE. Leave cultivated land, and enter brush. SW. bank of irrigation ditch.
18.00 (Record dist.) Diligent search in this vicinity fails to reveal any trace of Meander cor. of fracl. secs. 19 and 30; therefore, at this point,
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the the ground, for reestablished meander cor. of fractional secs. 19 and 30, with brass cap, marked

16 Resurvey & Survey of part of Subdivision lines of fracl. T. 9S. R. 24W.

Chains.

MC T9S
S19
S30
R24W
1920

Thence,

SURVEY,

/ brush

20.00 Continue line, & measurement, over accretion land, thru dense
30.00 Leave dense brush, brs. N. and S. Enter cultivated land.
39.00 Leave cultivated land, brs. N. and S.; enter uncleared land.
39.80 Road brs. N. and S.
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for witness cor. to the 1/4 sec. cor., with
brass cap, marked

WC 1/4 S19
S30
1920

39.95 and dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
East or left bank of West Canal, brs. N. and S. Thence across
said canal.
40.00 The point for 1/4 sec. cor. falls in West Canal, course S.
40.74 West, or right bank of West Canal, brs. N. and S. Thence
over level land, cleared for a dist. of 5 chs. each side
of line.
79.69 Intersect the cor. of secs. 19, 24, 25 and 30, on W. bdy. of
Tp., hereinbefore described.
Land, level.
Soil, sandy loam, 1st rate.
Timber, cottonwood.
Undergrowth, willow, arrowweed and cottonwood.

Retracement for Resurvey and Survey:

40.00 From the reestablished cor. of secs. 19, 20, 29 and 30,
North, on a random line, bet. secs. 19 and 20.
After diligent search, fail to find any evidence of the
original 1/4 sec. cor.
Set temp. cor.
42.90 (Record dist.) After diligent search, fail to find any
evidence of the original meander cor. of fracl. secs.
19 and 20. Set temp. cor.
79.99 Fall 46 lks. E. of the U.S.R.S. cor. of secs. 17, 18, 19 and
20, which is an iron post, 2 ins. in diam., firmly
set, properly marked on brass cap. Remove this post and
in its place.
Set an iron post, 3 ft. long, 2 ins. in diam., 36 ins. in
the ground, for cor. of secs. 17, 18, 19 and 20, with
brass cap, marked,

T9S R24W
S18 S17
S19 S20
1920

from which,
U.S.G.S. BM. (3-in. iron post) brs. N. 46° 40' E., 78 lks. dist.
Elev. 107.32 ft.
An iron test well pipe, 2 ins. in diam., brs. N. 39° E., 71 lks.
dist.
This cor. is at the intersection of E. and W. with N. and S.
road, and conforms to adjacent property lines and im-
provements.
True course and dist. of line, bet. secs. 19 and 20 are
therefore, N. 0° 20' W., 79.99 chs.

Resurvey:

From the reestablished cor. of secs. 19, 20, 29 and 30,
N. 0° 20' W., on a true line, bet. secs. 19 and 20.
Along irrigation ditch, thru dense undergrowth, parallel
to fence on E. and road on W., 1 ch. dist.; cultivated

Resurvey and Survey of part of subdivision lines of fracl. T.9 S. R24W 17

Chains.

land on both sides.

- 10.00 Fence cor. Fence on E. turns E. along uncleared land on E.
- 40.00 South edge of irrigation ditch, course E.
The point for reestablished $\frac{1}{4}$ sec. cor. falls in an insecure position; therefore, at a point, 2 lks. W., set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for witness cor. to the reestablished $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
 S19 | S20 WC
 1920

and establish accessories as follows:

- On a willow, 5 ins. in diam., N. 27° W., 133 lks. dist., mark "WC $\frac{1}{4}$ S19 BT."
- On a willow, 5 ins. in diam., S. 49° 30' E., 39 lks. dist., mark "WC $\frac{1}{4}$ S 20 BT."

- 42.90 This position of this cor. conforms to adjacent property lines and improvements. House brs. W. 2 chs. dist. (Record dist.), Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished meander cor. of fracl. secs. 19 and 20, with brass cap, marked,

C
 M /
 T9S | R24W
 S19 | S20
 1920

and establish accessory, as follows:

- On a willow, 10 ins. diam., N. 53° 55' W., 108 lks. dist. mark "MC S. 19 BT."

This cor. falls on W. edge of irrigation ditch. Thence,

SURVEY

Continuing line and measurement.

- Over accretion land.
- 71.50 Branch road, course W.
- 79.50 Leave west edge of cultivated field, across road.
- 79.99 Intersect the cor. of secs. 17, 18, 19 and 20. Land, level. Soil, sandy loam, 1st rate. Undergrowth, arrowweed, willow, and cottonwood on uncleared portion.

SURVEY:

- West, on a true line, bet. fracl. secs. 18 and 19.
- Over level accretion land, along road, uncleared land N. & S.
- 35.00 Leave road brs. N. and S. from this point.
- 36.00 East or left bank of West Canal, brs. N. and S. Thence across said canal, course S.
- 36.80 West, or right bank of West Canal, brs. N. and S. Across sandy flat, thru dense undergrowth.
- 41.69 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ S18
 S19
 1918

- 56.11 Dig pits, 18x18x12 ins., E. and W. of cor., 3 ft. dist. Intersect the eastern toe of U.S.R.S. Levee, bearing NE. and SW, at a point 25 lks. S. 28° 20' W., from A.P. No. 38, herein after described. At point of intersection, Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for closing cor. of fracl. secs. 18 and 19, with brass cap, marked

T9S R24W
 C S 18
 C S 19
 1920

18 Resur. & Survey of part of subdivision lines of fract. T.9 S., R.24 W.

Chains.

raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor. Land, level. Soil, sandy, 1st rate. Undergrowth, arrowweed and willow.

Retracement for Resurvey and Survey:

40.00 From the cor. of secs. 17, 18, 19 and 20, North on a random line, bet. secs. 17 and 18. After diligent search, fail to find any evidence of the original $\frac{1}{4}$ sec. cor.
Set temp. cor.
79.99 Fall 167 lks. E. of the U.S.R.S. reestablished cor. of secs. 7, 8, 17 and 18, which is an iron post, 2 ins. in diam., firmly set with top flush with surface of ground, properly marked on brass cap. Remove this post, and in same place, Set an iron post, 3 ft. long, 2 ins. in diam., 36 ins. in the ground, for reestablished cor. of secs. 7, 8, 17 and 18, with brass cap, marked

T9S	R24W
S 7	S 8
S18	S17
1920	

No accessories available. The position of this cor. agrees with all property lines and improvements in the vicinity. True course and dist. of line bet. secs. 17 and 18 are therefore, S. 1° 12' E., 80.00 chs.

RESURVEY:

From reestablished cor. of secs. 7, 8, 17 and 18, S. 1° 12' E., on true line, bet. secs. 17 and 18. Over cultivated land, parallel to irrigation ditch, 50 lks. W. of line, course S.
0.30 Irrigation ditch, course E.
20.00 Irrigation ditch, course E.
30.00 Branch irrigation ditch, brs. from E. to N., 1 ch. east.
39.95 Fence brs. E. and W. Leave cultivated land.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor., with brass cap, marked

S18	S17
1920	

No accessories available. The position of this cor. agrees with property division lines and improvements in the vicinity.

40.10 Irrigation ditch, course E.
40.30 Enter road, brs. N. from W. Thence in road, E. of cultivated land.
42.20 House of B. Huss, brs. E. 2 chs. dist.
49.00 Fence cor. brs. E.
60.00 Branch road brs. W. from this point. Continue in N. and S. road with fence and cultivated land on E. side and uncleared land on W. side.
SE. fence cor. of field, brs. W. 1 ch. dist.
House brs. E. 20 chs. dist.
74.22 (Record dist.), Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished meander cor. of secs. 17 and 18, with brass cap, marked

T9S	R24W
S18	S17
M	C
1920	

Dig a pit, 18x18x12 ins., N. of cor. 3 ft. dist. Thence,

SURVEY,

Continuing line and measurement, over accretion land.


Resurvey & Survey of part of subdivision lines of fracl. T. 9S. R. 24 W. 19

Chains.

80.00 Intersect reestablished cor. of secs. 17, 18, 19 and 20. Land, level. Soil, sandy loam, 1st rate. Timber, scattered large cottonwood. Undergrowth, arrowweed, willow, and cottonwood on uncultivated portions.

RESURVEY:

From the reestablished cor. of secs. 7, 8, 17 and 18, West, on a true line, bet. fracl. secs. 7 and 18. Over level land, with fence and cultivated land on S., and uncleared land on N. 5.00 Branch road and fence, brs. N. 25° E. and S. 25° W. 5.40 SE. bank of West Canal, brs. NE. and SW. Thence across said canal, course SW. 6.40 NW. bank of Canal, brs. NE. and SW. 7.19 Intersect the Eastern toe of U.S.R.S. Levee, brs. NE. and SW. at a point 44 lks. S. 39° 25' W. from A.P. No. 42 thereof, hereinafter described. At point of intersection, set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for closing cor. of fracl. secs. 7 and 18, with brass cap, marked




1920

Raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor. Land, level. Soil, sandy loam, 1st rate. Undergrowth, arrowweed, willow and cottonwood.

RESURVEY:

From the reestablished cor. of secs. 7, 8, 17 and 18, North, on a true line, bet. fracl. secs. 7 and 8. Over level land, thru. dense undergrowth. 6.60 SE. bank of West Canal, brs. NE. and SW. Thence across said canal, course SW. 7.80 NW. bank of canal, brs. NE. and SW. 9.19 Intersect the eastern toe of U.S.R.S. Levee, bearing NE. and SW., at a point N. 39° 00' E. from A.P. No. 43 thereof, hereinafter described. At point of intersection, set an iron post, 3 ft. long 1 in. in diam., 26 ins. in the ground, for closing cor. of fracl. secs. 7 and 8, with brass cap, marked



1920

Raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor. Land, level. Soil, sandy, 1st rate. Undergrowth, arrowweed, willow and cottonwood.

Retracement for Resurvey:

From the reestablished cor. of secs. 19, 20, 29 and 30, hereinafter described, S. 89° 55' E., on a random line, bet. secs. 20 and 29. 40.00 After diligent search, fail to find any evidence of the original 1/4 sec. cor. Set temp. cor. 79.75 Intersect N. and S. line, 72 lks. S. of the U.S.R.S. reestablished cor. of secs. 20, 21, 28 and 29, which is an iron post, 2 ins. in diam., firmly set, with top flush with the ground, properly marked on brass cap, from which an iron test well pipe, 2 ins. in diam., 4 ft. high, brs. N. 13° E., 30 lks. dist., marked "+ B O." This cor. is undoubtedly reestablished in its original

20. Resurv. & Survey of part of Subdivision lines of fracl. T. 9 S., R. 24 W.

Chains.

position, standing at the intersection of roads which bear N. 7 E. S. and W., and agrees with improvements on the ground.

True course and dist. of line, bet. secs. 20 and 29, are therefore S. 89° 44' W., 79.75 chs.

RESURVEY:

From U.S.R.S. reestablished cor. of secs. 20, 21, 28 and 29, S. 89° 44' W., on a true line, bet. secs. 20 and 29.

Along road with fence and telephone line on N. side and cultivated land on both sides.

39.87½ (Proportional dist.), Set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in the ground, for reestablished ¼ sec. cor., with brass cap, marked

S 20
S 29
1920

from which,

A mesquite fence post, brs. S. 14° 30' W., 20 lks. dist.

A mesquite fence post, brs. N. 22° 40' W., 31 lks. dist.

39.90 Irrigation ditch, brs. from S. to W.

57.00 House of R. Birtle, brs. S. 30 chs. dist.

60.00 Fence cor. on S. Fences bear S. and W.

Irrigation ditch on W., turns N.

61.00 House (B. Conness), brs. S. 3 chs. dist.

House, (J. W. Clymer) brs. N.E. 20 chs. dist.

63.00 House, (G. A. Nelson) brs. S. 3 chs. dist.

Thence along fence on N.

69.00 Fence cor. on N.

Irrigation ditch from N. bears W.

79.50 Irrigation ditch, course N.

79.75 Intersect the reestablished cor. of secs. 19, 20, 29 and 30. Land, level.

Soil, sandy loam, 1st rate.

Undergrowth, arrowweed, willow, and cottonwood on un-cleared portions.

Retracement for Resurvey:

From the U.S.R.S. reestablished cor. of secs. 20, 21, 28 and 29, hereinbefore described,

North, on a random line, bet. secs. 20 and 21 (S. ½).

40.01 Fall 9 lks. E. of the U.S.R.S. reestablished ¼ sec. cor., which is a redwood post, 4 ins. square, set flush with the surface, properly marked. No trace of original ¼ sec. cor. can be found.

True course and dist. of S. ½ of line, bet. secs. 20 and 21, are therefore N. 0° 8' W., 40.01 chs.

Thence,

North on random line, bet. secs. 20 and 21 (N. ½).

39.96 Fall 14 lks. E. of the U.S.R.S. reestablished cor. of secs. 16, 17, 20 and 21, which is a redwood post, 4 ins. sq., set 2 ins. below the surface, properly marked.

True course and dist. of N. ½ of line, bet. secs. 20 and 21 are therefore N. 0° 12' W., 39.96 chs.

RESURVEY:

From the U.S.R.S. reestablished cor. of secs. 20, 21, 28 and 29, hereinbefore described,

N. 0° 03' W., on a true line, bet. secs. 20 and 21 (S. ½).

Along road with telephone line and irrigation ditch on E. and fence and cultivated land on both sides.

9.50 House brs. W., 2 chs. dist.


39.98 Branch irrigating ditch, course E.

ESOW 1880

Resurvey & Survey of part of subdivision lines of fractional sections 9, 20, 21

Chains.
40.01

Intersect the U.S.R.S. reestablished $\frac{1}{4}$ sec.cor. hereinbefore described.
Remove, this post, and in same place,
Set an iron post 3 ft. long, 1 in. in diam., 36 ins. in the ground, for reestablished $\frac{1}{4}$ sec.cor., with brass cap, marked




from which,
A nail on a cottonwood fence post, 12 ins. diam., brs. N.87°49'W., 51 lks. dist., marked "RP 32.7"
A nail on W. end of weir, brs. S.63°35'E., 38 lks. dist., marked "25.6 G L O."

This cor. position agrees with improvements on the ground. A road branches W. to house, 15 chs. dist.

Thence, N.0°12'W., on true line, bet. secs. 20 and 21 (N. 2).
Over level land, along road, fenced both sides, irrigation ditch on E.

17.60
20.00
28.36
39.96

House brs. W., 3 chs. dist.
Branch irrigation ditch, course W.
Fence on left turns W.
Intersect the U.S.R.S. reestablished cor. of secs. 16, 17, 20 and 21, hereinbefore described. Remove this post, and in same place,
Set an iron post, 3 ft. long, 2 ins. in diam., 36 ins. in the ground, for reestablished cor. of secs. 16, 17, 20 and 21, with brass cap, marked,



from which,
A nailhead on W. end of wing of weir, brs. S.74°22'E., 43 lks. dist., marked "R P 23."
A nailhead on W. end of weir, brs. N.53°E., 43 lks. dist., marked "R P 28."
A test well pipe, 2 ins. diam., brs. N.55°36'W., 68½ lks. dist.

This cor. is at the intersection of E. and W. road with N. and S. road, and agrees with all property division lines and improvements on the ground.

Land, level.
Soil, sandy, 1st rate.
Undergrowth, willow and arrowweed.

Retracement for Resurvey and Survey:

40.00

From the cor. of secs. 17, 18, 19 and 20, hereinbefore described,
East, on a random line, bet. secs. 17 and 20.
After diligent search, fail to find any evidence of the original $\frac{1}{4}$ sec. cor.
Set temp. cor.

79.89

Intersect N. and S. line, 46 lks. S. of the reestablished cor. of secs. 16, 17, 20 and 21, hereinbefore described.
True course and dist. of line bet. secs. 17 and 20, are therefore S.89°40'W., 79.89 chs.

RESURVEY:

7.60

From reestablished cor. of secs. 16, 17, 20 and 21, S.89°40'W., on a true line, bet. secs. 17 and 20.
Over level land, along road, not fenced on either side.
House brs. S. 3 chs. dist.

22. Resurvey & Survey of part of subdivision lines of fractional T9S R24W

Chains.
 29.00 House brs. S., 2 chs. dist.
 39.94½ (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in the ground, for reestablished ¼ sec. cor., with brass cap, marked

$\frac{1}{4}$ S 17
 S 20
 1920

from which,
 A post, marked "RP 49 lks." brs. S. 29° 40' W., 49 lks. dist.

40.00 Branch road bears N. 30 lks. dist.
 49.00 House brs. S. 4 chs. dist.
 50.00 SE. cor. of fenced field, brs. N. 30 lks. dist.
 Thence S. of E. and W. fence, and between tracts of cultivated land.

59.60 Branch road brs. N.
 60.50 House brs. S. 1.50 chs. dist.
 76.41 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in the ground, for reestablished meander cor. of frac. secs. 17 and 20, with brass cap, marked

T9S R24W
 M S17
 C S20
 1920

Dig a pit, 18x18x12 ins. E. of cor. 3 ft. dist.
 Diligent search in this vicinity fails to reveal any trace of original meander cor., which is on record as having been set at 76.50 chs. W. from original cor. of secs. 16, 17, 20 and 21.

Thence,
 Continue line and measurement as

SURVEY

Over accretion land, continuing in E. and W. road.
 79.55 SW. cor. of fenced field, brs. N. 40 lks. dist. NW. cor. of cultivated land, unfenced, brs. S. 50 lks. dist.
 79.89 Intersect cor. of secs. 17, 18, 19 and 20, hereinbefore described.
 Land, level.
 Soil, sandy loam, 1st rate.
 Undergrowth, arrowweed, willow and cottonwood.

Retracement for Resurvey:

From reestablished for Resurvey:

From reestablished cor. of secs. 16, 17, 20 and 21, hereinbefore described,
 40.01 North, on a random line, bet. secs. 16 and 17 (S. ½).
 Fall 58 lks. E. of the U.S.R.S. reestablished ¼ sec. cor., which is a redwood stake, 1 in. square, buried 6 ins. below the surface. No trace can be found of the original ¼ sec. cor.
 True course and dist. of S. ½ of line bet. secs. 16 and 17, are therefore N. 0° 50' W., 40.01 chs.
 Thence,
 40.05 North, on a tandem line, bet. secs. 16 and 17 (N. ½).
 Fall 91 lks. E. of the U.S.R.S. reestablished cor. of secs. 8, 9, 16 and 17, which is a redwood stake, 1x3 ins., set 4 ins. below the surface of the ground. No trace can be found of the original cor. of secs. 8, 9, 16 and 17.
 True course and dist. of N. ½ of line bet. secs. 16 and 17 are therefore N. 1° 18' W., 40.06 chs.


Resurvey:

From the reestablished cor. of secs. 16, 17, 20 and 21,

Resurvey and Survey of part of Subdivision lines of fract. T9S. R. 24W. 23

Chains.

N. 0° 50' W., on a true line, bet. secs. 16 and 17 (S. 1/2).
 Over level land.
 Along fenced road, with cultivated land on W., and cleared
 land on E., parallel to irrigation ditch, E. of line.
 10.00 Irrigation ditch on E., turns W.
 15.00 House brs. W. 3.00 chs. dist.
 19.30 Branch irrigation ditch from W., turns S.
 39.35 Road branches WNW. to house, 8 chs. dist.
 39.90 Irrigation ditch, course W.
 40.01 Intersect U.S.R.S. reestablished 1/4 sec. cor., hereinbefore
 described. Remove old post, and in same place
 Set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in
 the ground, for reestablished 1/4 sec. cor., with brass
 cap marked




and established accessory as follows:

On a cottonwood, 8 ins. in diam., N. 2° 30' W., 235
lks. dist., mark "1/4 S17BT."

The position of this cor., agrees with property division
lines and improvements on the ground.

Thence,
N. 1° 18' W., on true line, bet. secs. 16 and 17 (N. 1/2).
Over level land.

Along unfenced road, with cultivated land on both sides.
 7.00 Log cabin, brs. E., 5 chs. dist.
 17.10 House, brs. W., 3 chs. dist.
 33.50 Irrigation ditch on E., turns N.
 38.80 Fence cor. on W., from which fences bear N. and W.
 39.65 Irrigation flume, course E.
 40.06 Intersect the U.S.R.S. reestablished cor. of secs. 8, 9, 16
 and 17, hereinbefore described.
 Alongside of stake, set an iron post, 3 ft. long, 2 ins.
 in diam., 36 ins. the ground, for reestablished cor. of
 secs. 8, 9, 16 and 17, with brass cap, marked,



from which,
 Post on NE. wing of bridge, over lateral, brs. S. 31 1/2° E.,
 37 lks. dist.
 NW. cor. of bridge, brs. S. 14° W., 38 lks. dist.
 Cor. stands at intersection of N. and S road with E. and W.
 road, and agrees in position with property lines in
 the vicinity.

Land, level.
 Soil, sandy loam, 1st rate.
 Timber, some cottonwood.
 Undergrowth, willow, arrowweed, and cottonwood on uncleared
 portion.

Retracement for Resurvey:

From the reestablished cor. of secs. 7, 8, 17 and 18,
 East, on a random line, bet. secs. 8 and 17.
 40.00 After diligent search, fail to find any evidence of the
 original 1/4 sec. cor.
 Set temp. cor.
 79.88 Intersect N. and S line, 44 lks. S. of the reestablished
 cor. of secs. 8, 9, 16 and 17, hereinbefore described.
 True course and dist. of line bet. secs. 8 and 17, are
 therefore S. 89° 41' W., 79.88 chs.

24 Resurvey and surv. of part of subdivision lines of frac T 9S R 24 W.

Chains.	Resurvey:
	From the reestablished cor. of secs. 8, 9, 16 and 17, S. $89^{\circ}41'W.$, on a true line, bet. secs. 8 and 17. Over level land. Along fenced road, with irrigation ditch on S. Cultivated land on both sides.
9.70	Lateral ditch, brs. N. and S.
20.00	Road branches N., thru. fenced lane. House brs. N., 5 chs. dist. House brs. S., 8 chs. dist.
29.90	Fence cor. brs. N., 50 lks. dist.; fences bear N., W. and E.
39.50	NW. cor. of fenced field. SW. cor. of fenced field.
39.94	(Proportional dist.), Set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor., with brass cap, marked
	$\begin{array}{r} \frac{1}{4} S 8 \\ S 17 \\ 1920 \end{array}$
	No accessories available.
40.20	Intersection of N. and S. road with E. and W. road.
60.00	Road branches N. to A. Hebbron's house.
70.00	Road branches to N.
79.88	Intersect the reestablished cor. of secs. 7, 8, 17 and 18. Land, level. Soil, sandy loam, 1st rate. Undergrowth, arrowweed, willow and cottonwood on uncleared portion.

	<u>Retracement for Resurvey:</u>
	From the reestablished cor. of secs. 8, 9, 16 and 17, hereinbefore described, North, on a random line, bet. secs. 8 and 9.
40.00	After diligent search, fail to find any evidence of the original $\frac{1}{4}$ sec. cor. nor U.S.R.S. reestablished $\frac{1}{4}$ sec. cor.
80.10	Set temp. cor. Fall 46 lks. E. of the U.S.R.S. reestablished cor. of secs. 4, 5, 8 and 9, which is an iron post, 2 ins. in diam., firmly set 8 ins. below the surface of the ground and properly marked on brass cap, No trace of original $\frac{1}{4}$ sec. cor. can be found in the vicinity. True course and dist. of line bet. secs. 8 and 9, are therefore, N. $0^{\circ}20'W.$, 80.10 chs.
	<u>Resurvey:</u>
	From the reestablished cor. of secs. 8, 9, 16 and 17, N. $0^{\circ}20'W.$, on a true line, bet. secs. 8 and 9. Over level land. Along fenced road, with cultivated land on both sides.
13.00	Old log house, brs. W., 4 chs. dist.
20.00	South edge of slough, 4 chs. wide, bears NW. and SE. Fence on W., turns W. Fence on E. turns E. Land on W. uncleared.
30.00	Grove of cottonwood and willow on W.
39.00	North end of grave.
40.05	(Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor., with brass cap, marked

Resurvey & Surv. of part of Subdivision lines of fracl. T 9 S. R. 24 W. 25

Chains.

and establish accessories as follows:

On a cottonwood, 14 ins. in diam., N. 6° 15' E., 65 lks. dist., mark "1/4 S 9 BT."

On a willow, 8 ins. in diam., S. 62° 45' W., 40 lks. dist., mark "1/4 S 8 BT."

The position of this cor. agrees with property lines and improvements in the vicinity.


48.00
60.00
80.10

House brs. W. 2 chs. dist.

Fence cor. on E. from which, fences bear N. E. and S.

Intersect the U.S.R.S. reestablished cor. of secs. 4, 5, 8 and 9, hereinbefore described. Remove post, and in same place,

Set an iron post 3 ft. long, 2 ins. in diam., 36 ins. in the ground, for reestablished cor. of secs. 4, 5, 8 and 9, with brass cap, marked



No accessories available.

This cor. stands at the intersection of E. and W. road with N. and S. road, and its position agrees with all property division lines and improvements in the vicinity.

Land, level.

Soil, sandy loam, 1st rate.

Undergrowth, arrowweed, willow and cottonwood.

Retracement for Resurvey and Survey:

27.80

From reestablished cor. of secs. 4, 5, 8 and 9,

West, on random line, bet. fracl. secs. 5 and 8.

(Record dist.) After diligent search, fail to find any evidence of the original meander cor. of fracl. secs. 5 and 8.

There being no governing cor. W. of this point, the true course of the line for Resurvey and survey will be west.

Resurvey:

From the reestablished cor. of secs. 4, 5, 8 and 9.

West, on a true line, bet. fracl. secs. 5 and 8.

Over level land.

Along road, with unfenced cultivated land on both sides.

9.10

Branch field road, brs. N.

12.50


House (D.C. Luzier), bears N., 1 1/2 chs. dist.

15.00

Irrigation ditch and fence from S. turns W.

27.80

(Record dist.), Set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in the ground, for reestablished meander cor. of fracl. secs. 5 and 8, with brass cap, marked



Alongside of post, set a redwood post, 2 1/2 x 4 ins., 3 1/2 ft. long, 12 ins. in the ground, marked "MC" on E., "S 8" on S., "S 5" on N., and "Old M C" on W. faces.

Continue measurement as

SURVEY

33.80

West, on true line, over level accretion land.

SE. bank of West Canal, brs. NE. and SW. Thence across said canal, course SW.

34.90

NW. bank of canal, brs. NE. and SW.

35.53

Intersect the Eastern toe of U.S.R.S. Levee, bearing NE.

26 Resurvey & survey of part of subdivision lines of fracl. T. 9 S. R. 24 W.

Chains

and SW. at a point 24 lks. S. 21° 22' W., from A.P. No. 48 thereof, hereinafter described.

At point of intersection,

Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for closing cor. of fracl. secs. 5 and 8, with brass cap, marked

U.S.R.S. C C	193	R24W
	S 5	
	3 8	
	1920	

from which,

An iron post, 1 in. in diam., 6 ins. above ground, brs. S. 43° 43' E., 11 lks. dist., marked on brass cap,

"U S RECLAMATION 1920" with a cross (x) in center

Land, level.

Soil, sandy loam, 1st rate.

Undergrowth, arrowweed, willow and cottonwood on un-cleared portion.

Retracement for Resurvey and Survey:

From the reestablished cor. of secs. 4, 5, 8 and 9, hereinafter described,

North, on a random line, bet. secs. 4 and 5 (S. 1/2).

40.05 Fall 9 lks. E. of the U.S.R.S. reestablished 1/2 sec. cor., which is an iron post, 1 in. in diam., firmly set 10 ins. above ground, properly marked on brass cap, alongside this post is an old willow stake, 2 ins. in diam.,

True course and dist. of S 1/2 of line, bet. secs. 4 and 5, are therefore N. 0° 8' W., 40.05 chs.

Thence,

North, on a random line, bet. secs. 4 and 5 (N. 1/2).

29.40 (Record dist.) After diligent search, fail to find any evidence of the original meander cor. of fracl. secs. 4 and 5.

Set temp. cor.

39.94 Intersect N. bdy. of the Tp., 9 lks. E. of the cor. of secs. 4, 5, 32 and 33, hereinafter described.

True course and dist. of N. 1/2 of line bet. secs. 4 and 5, are therefore N. 0° 8' W., 39.94 chs.

RESURVEY:

From the cor. of secs. 4, 5, 8 and 9,

N. 0° 8' W., on a true line, bet. secs. 4 and 5.

Over level land, with fence and irrigation ditch on E.

10.25 Irrigation ditch, course W.

29.00 House brs. W. 1.00 ch. dist.

39.90 Irrigation ditch from W., turns S.

Enter thick brush.

40.05 Intersect the U.S.R.S. 1/2 sec. cor., hereinafter described.

Remove post, and in same place,

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/2 sec. cor., with brass cap, marked

S	5	S 4
	1920	


from which,

A nailhead on W end of irrigation weir, brs. S. 33° 40' E., marked "R P 41.5 feet.

Continue line and measurement.

RESURV. & Survey of part of subdivision lines of fracl. T 9 S. R. 24W. 27

Chains.
69.45 (Record dist. of 29.40 chs. from $\frac{1}{4}$ sec. cor.) set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished meander cor. of fracl. secs. 4 and 5, with brass cap, marked



No accessories available.
Continue line and measurement, over accretion land.
79.99 (39.94 chs. N. 0° 8' W., from $\frac{1}{4}$ sec. cor.),
Intersect the cor. of secs. 4, 5, 32 and 33, on the N. bdy. of Tp., hereinbefore described.

Land, level.
Soil, sandy loam, 1st rate.
Undergrowth, willow and arrowweed.

From the reestablished cor. of secs. 4, 5, 8 and 9, hereinbefore described,
S. 89° 51' E., (record course) on a random line, bet. secs. 4 and 9.


40.15 (Record dist.) After diligent search, fail to find any evidence of the original $\frac{1}{4}$ sec. cor.
Set temp. cor.

80.82 Fall 70 lks. S. of the U.S.R.S. reestablished cor. of secs. 3, 4, 9 and 10, which is an iron post, 2 ins. in diam., firmly set, properly marked, on brass cap.
No trace of original sec. cor. can be found.
True course and dist. of line bet. secs. 4 and 9 are therefore, N. 89° 39' E., 80.82 chs.

RESURVEY:

From the reestablished cor. of secs. 4, 5, 8 and 9, hereinbefore described,
N. 89° 39' E., on a true line, bet. secs. 4 and 9.
Over level land, along fenced road, with irrigation ditch on S. side. Cultivated land on both sides.

0.35 Bridge over irrigation ditch.
17.00 House brs. S. 7 chs. dist.
20.00 Fence cor. on N. fences, bear N., E. and W.
40.20 Irrigation ditch, bears N. and S.
40.41 Set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor., with brass cap, marked



and establish accessories as follows:
On a cottonwood, 14 ins. in diam., N. 60° 45' E., 77 lks. dist., mark " $\frac{1}{4}$ S 4 BT."
On a cottonwood, 12 ins. in diam., N. 76° 20' E., 117 lks. dist., mark " $\frac{1}{4}$ S 4 BT."
A fence post, brs. N. 2° W., 49 lks. dist., marked "R P 32.5."

The position of this cor. agrees with all property division lines in the vicinity.

48.00 Shed and corral bear S., 50 lks. dist.
60.00 Road branches to N.
60.80 Irrigation ditch from S. turns E.
71.50 Road branches to S.
73.00 House (Wilson) bears S. 4 chs. dist.
Uncleared and unfenced land on S.
80.82 Intersect the U.S.R.S. reestablished cor. of secs. 3, 4, 9

28. Resurvey and Survey of part of subdivision lines of fract. T9SR24W.

Chains.

and 10, hereinbefore described. Remove post, and in same place

Set an iron post, 3 ft. long, 2 ins. in diam., 36 ins. in the ground, for reestablished cor. of secs. 3, 4, 9 and 10, with brass cap, marked

T9S | R24W.
S 4 | S 3
S 9 | S 10
1918

from which,

An iron test well pipe, 2 ins. in diam., brs. N. 56° 57' E., 96 lks. dist.

A mesquite fence cor. post, bears N. 50° 34' W., 82 lks. dist., marked "53.65"

This cor. stands at the intersection of E. and W. road with N. and S. road and agrees with all property division lines in the vicinity.

Land level.

Soil, sandy loam, 1st rate.

Undergrowth, arrowweed, willow and cottonwood.

Retracement for Resurvey:

From reestablished cor. of secs. 3, 4, 9 and 10, North, on a random line, bet. secs. 3 and 4.

40.00 After diligent search, fail to find any evidence of the original $\frac{1}{4}$ sec. cor.

Set temp. cor.

80.01 Intersect N. bdy. of the Tp., 2 lks. W of the reestablished cor. of secs. 3, 4, 33 and 34, hereinbefore described.

True course and dist. of line, bet. secs. 3 and 4 are therefore N. 0° 1' E., 80.01 chs.

RESURVEY:

From the cor. of secs. 3, 4, 9 and 10,

N. 0° 01' E., on a true line, bet. secs. 3 and 4.

Over level land, along fenced road, with telephone line and irrigation ditch on E. Cultivated land on both sides.

10.00 House brs. W., 4 chs. dist.

19.90 Branch irrigation ditch, crosses line at this point, course W., and turns N. at about 60 lks. W. of line.

29.50 Branch irrigation ditch, course East.

36.20 House brs. W., 2 $\frac{1}{2}$ chs. dist.

39.90 Road, brs. E.

40.03 (Proportional dist.), set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
S 4 | S 3
1920

and establish accessory as follows:

On a cottonwood, 24 ins. in diam., S. 57° 25' E., 66 lks. dist., mark " $\frac{1}{4}$ S 3 BT."

On a cottonwood, 14 ins. in diam., N. 63° 15' W., 62 lks. dist., mark " $\frac{1}{4}$ S 4 BT."


The position of this cor. agrees with all property lines and improvements in the vicinity.

59.50 Road brs. E. and W. along fenced lane, on S. bank of irrigation ditch, brs. E and W. Thence across bridge.

Resurv. & Survey of part of subdivision lines of fract. T. 9S., R. 24 E., 29

Chains.	Course of irrigation ditch is W. to a point about 1 chain west of line, where the course changes to NW.
60.00	Center of bridge bearing N. and S.
60.50	North bank of irrigation ditch, brs. E. and W.
78.40	House brs. W., $1\frac{1}{2}$ chs. dist.
79.00	House brs. E., $1\frac{1}{2}$ chs. dist.
80.01	(39.98 chs. N. $0^{\circ}1'E.$, from $\frac{1}{2}$ sec. cor.) Intersect the reestablished cor. of secs. 3, 4, 33 and 34, on the N. bdy. of the Tp., hereinbefore described.

Land, level.
 Soil, sandy loam, 1st rate, nearly all cultivated.
 Undergrowth, arrowweed, willow and cottonwood on uncleared portion.



30. Resurvey of part of subdivision lines of Fracl. T. 8 S. R. 24W (Sec. 33)


Chains.

Retracement for Resurvey:

- From the reestablished cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp., hereinbefore described,
 North, on a random line, bet. secs. 33 and 34 (S. $\frac{1}{2}$).
 40.14 Fall 9 lks. E. of the $\frac{1}{2}$ sec. cor. of secs. 33 and 34, reestablished in its original position by the U.S.R.S., with an iron post, 1 in. in diam., firmly set, and properly marked on brass cap.
 True course and dist. of S. $\frac{1}{2}$ of line, bet. secs. 33 and 34 are therefore N. 0° 8' W., 40.14 chs.
 Thence,
 North, on a random line, bet. secs. 33 and 34 (N. $\frac{1}{2}$).
 41.91 Fall 26 lks. E. of the cor. of secs. 27, 28, 33 and 34, reestablished in its original position by the U.S.R.S., with an iron post, 2 ins. in diam., firmly set and properly marked on brass cap.
 True course and dist. of N. $\frac{1}{2}$ of line, bet. secs. 33 and 34, are therefore N. 0° 22' W., 41.91 chs.

RESURVEY:


- From reestablished cor. of secs. 3, 4, 33 and 34, on s. bdy. of the Tp., hereinbefore described,
 N. 0° 08' W., on a true line, bet. secs. 33 and 34 (S. $\frac{1}{2}$).
 Over level land, along fenced road, cultivated on E. and W.
 8.60 House brs. W. 3 chs. dist.
 40.14 Intersect the U.S.R.S. reestablished $\frac{1}{4}$ sec. cor. hereinbefore described. Remove post, and in same place, set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor., with brass cap, marked



and establish accessory as follows:

On a willow, 6 ins. in diam., S. 62° E., 24 lks. dist., mark "1/4 S 34 BT."

- Thence,
 N. 0° 22' W., on a true line, bet. secs. 33 and 34 (N. $\frac{1}{2}$).
 21.05 Irrigation ditch, course E. End of fence on E. of road.
 30.55 Irrigation ditch, course E.
 41.91 Intersect the U.S.R.S. reestablished cor. of secs. 27, 28, 33 and 34, hereinbefore described. Remove post, and in same place,
 Set an iron post, 3 ft. long, 2 ins. in diam., 36 ins. in the ground, for reestablished cor. of secs. 27, 28, 33 and 34, with brass cap, marked



and establish accessories as follows:

On a cottonwood, 16 ins. in diam., S. 10° W., 272 lks. dist., mark "T8SR24W S33BT."

On a cottonwood, 18 ins. in diam., S. 77° W., 246 lks. dist., mark "T8S R24W S33 BT."

Cor. stands at intersection of roads, which bear E. S., and W.

Land, level.
 Soils sandy loam, 1st rate.
 Undergrowth, cleared.

Retracement for Resurvey:


From the reestablished cor. of secs. 27, 28, 33 and 34,

Resurvey of part of Subdivision lines of fract. T 8 S. R. 24 W. (sec. 33)

Chains. hereinbefore described,
 West, on a random line, bet. secs. 28 and 33 (E. $\frac{1}{2}$).
 39.47 Fall 54 lks. S. of the $\frac{1}{4}$ sec. cor., of secs. 28 and 33, reestablished in its original position by the U.S.R.S., with an iron post, 1 in. in diam., firmly set, and properly marked on brass cap. True course & dist. of $E. \frac{1}{2}$ of line bet. secs. 28 & 33 are therefore, N. 89° 12' W. 39.47 chs.
 Thence, 39.47 chs. West, on random line, bet. secs. 28 and 33 (part of W. $\frac{1}{2}$).
 2.92 Intersect eastern toe of U.S.R.S. Levee, bearing NE. and SW. Set stake for temp. closing cor.
 8.00 (Record dist.) After diligent search, fail to find any evidence of the original meander cor. of fract. secs. 28 and 33. Therefore, there being no governing cor. W. of this point, the W. $\frac{1}{2}$ of line, bet. secs. 28 and 33 will be resurveyed due west.

Resurvey:


From the reestablished cor. of secs. 27, 28, 33 and 34, N. 89° 12' W., on a true line, bet. secs. 28 and 33 (E. $\frac{1}{2}$).
 Over level land, along fenced road; cultivated land on N. and S. Irrigation ditch on S. side of road; telephone line on N. side.
 17.50 Telephone line on N. side of road, turns S.
 19.30 House brs. S. 20 chs. dist.
 39.47 Intersect the U.S.R.S. reestablished $\frac{1}{4}$ sec. cor., hereinbefore described. Remove post, and in same place, set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor., with brass cap, marked.




and establish accessories as follows:

- On a willow, 12 ins. in diam., brs. N. 87 $\frac{1}{2}$ ° E., 277 lks. dist., marked "S 28 BT."
- On a cottonwood, 12 ins. in diam., brs. S. 81 $\frac{1}{2}$ ° W., 131 lks. dist., marked "S 33 BT."

Thence,
 2.40 West, on true line, on part of W. $\frac{1}{2}$ of line, bet. secs. 28 & 33. Irrigation ditch, course S.
 2.92 Intersect eastern toe of U.S.R.S. Levee, bearing NE. and SW. At point of intersection, set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for closing cor. of fract. secs. 28 and 33, and Angle Point No. 54 of Levee Survey, with brass cap, marked

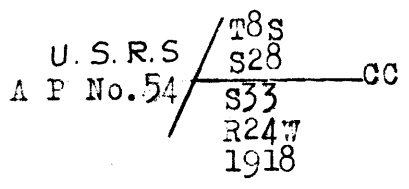

3.22 U.S.R.S. Railroad, brs. NE. and SW.
 8.00 (Record dist.) Intersect theoretical position of Meander line of left bank of Colorado River, as surveyed in 1874. Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished meander cor. of fract. secs. 28 and 33, with brass cap, marked



Dig a pit, 36x36x12 ins., E. of cor. Land, level. Soil, sandy loam, 1st rate. Undergrowth, willow, arrowweed and cottonwood.

294

32. Survey of part of the subdivision lines of fracl. T₉ S., R. 25 W. chains.

1.07

From the cor. of secs. 19, 24, 25 and 30, fracl. T₉ S., R_s. 24 and 25 W., hereinbefore described, West, on a true line, between fracl. secs. 24 and 25. Over level land, formed by accretion since original survey of the township in 1874.

Intersect eastern toe of U.S.R.S. Levee, bearing N. and S. at a point 52 lks. S. 0° 15' E., from A.P. No. 34, thereof, hereinafter described.

At point of intersection

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for closing cor. of fracl. secs. 24 and 25, with brass cap, marked

U		T9S
S	C	S24
R	C	S25
S		R25W
1920		

from which,

A U.S.R.S. redwood post, bears W., 50 lks. dist., marked "CC 24 / 25"

Land, level.

Soil, sandy loam, 1st rate.


Resurvey of part of old meander line of left bank
of Colorado River (1874 survey) in fracl. T.9 S., R.25 W.

Chains.

From the reestablished meander cor. of fracl. secs. 25 and 30, on E bdy. of fracl. T.9 S., R.25 W., hereinbefore described, in notes of resurvey of part of W. bdy. of fracl. T.9 S., R.24 W., S. 80° 45' W. (record course) on a true line in fracl. sec. 25. Over level land formed by accretion since original survey of the Tp. in 1874.

2.14 Intersect the eastern toe of U.S.R.S. Levee, bearing N. 0° 15' W. and S. 14° 15' E.

At point of intersection,
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for closing meander cor., and for Angle Point No. 33, of Levee survey, with brass cap, marked



Land, level.
Soil, sandy loam, 1st rate. 1920

Resurvey of Old Meander Line of Left bank of
34 Colorado River (1874 survey) thru fracl. T. 9 S., R. 24 West
Chains.

In section 30.

Retracement for Resurvey:

From the reestablished meander cor. of fracl. secs. 25 and 30 on W. bdy. of fracl. T. 9 S., R. 24 W., hereinbefore described, retrace the old meander line in sec. 30, as per record, and set a temp. stake at each theoretical angle point.

Random course and distances are as follows:

N. 80° 45' E., 6.00 chs.

N. 88° 00' E., 4.00 chs.

East, 14.50 "

N. 36° 30' E., 18.00 "

N. 36° 45' E., 8.40 "

N. 16° 30' E., 22.00 "

N. 34° 00' E., 12.10 "

N. 36° 45' E., 13.60 "

N. 11° 00' E., 5.00 "

to theoretical position of original meander cor. of fracl. secs. 19 and 30, from which point, the reestablished meander cor. of said secs. hereinbefore described, brs. S. 83° 12' W., 162 lks. dist.


Resurvey:

From the reestablished meander cor. of secs. 25 and 30, resurvey the old meander line in sec. 30, on proportional courses and distances in accordance with closing line as determined above, on true lines.

Over level, cultivated land.


N. 80° 43' E.

5.91 Set an iron post 3 ft. long, 1 in. in diam., 36 ins. in the ground, for reestablished Meander Angle Point No. 1 of sec. 30, with brass cap, marked




Thence,
N. 88° 04' E.

3.94 Set an iron post 3 ft. long, 1 in. in diam., 36 ins. in the ground for reestablished Meander Angle Point No. 2 of sec. 30, with brass cap,



Thence,
S. 89° 53' E.

0.50 Old levee, brs. NW. and SE.
9.50 Irrigation ditch, course S.
14.28 Set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in the ground, for reestablished Meander Angle Point, No. 3, of sec. 30, with brass cap, marked



Thence,
N. 35° 50' E.

7.20 Irrigation ditch, course S.
12.00 Leave cultivated land and enter undergrowth, brs. E. and W.
17.81 Set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in the ground, for reestablished meander Angle Point No. 4 of sec. 30, with brass cap, marked

Resurvey of old Meander line of Left bank of Colorado River thru fract. Township 9 South, Range 24 West. 35.

Chains.

A P
No. 4 / S 30
1920

- Thence, N. 36° 06' E.
- 1.30 Road, brs. E. and W.
- 7.00 West bank of West Canal, brs. N. and S. Thence across said canal, course S.
- 8.31 The point for reestablished Meander Angle Point No. 5 of sec. 30, falls in West Canal; therefore, at a point S. 79° E., 10 lks. dist.,
Set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in the ground, for witness cor. to reestablished meander Angle Point No. 5 of sec. 30, with brass cap, marked

A P
W C No. 5 / S 30
1920

- Thence, from true point for reestablished meander Angle point No. 5 of sec. 30, N. 15° 40' E.
- 0.20 East bank of Canal, brs. N. and S.
- 21.87 Set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in the ground, for reestablished meander Angle Point No. 6 of sec. 30, with brass cap, marked

A P
No. 6 / S 30
1920

- Thence, N. 33° 19' E.
- 11.98 Set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in the ground, for reestablished meander Angle Point No. 7 of sec. 30, with brass cap, marked

A P
No. 7 / S 30
1920

- Thence, N. 36° 05' E.
- 13.45 Set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in the ground for reestablished meander Angle Point No. 8 of sec. 30, with brass cap, marked

A P
No. 8 / S 30
1920

- Thence, N. 10° 09' E.
- 4.98 Intersect the reestablished meander cor. of secs. 19 and 30, hereinbefore described.
Land, level.
Soil, sandy, 1st rate.
No undergrowth or timber.

In fract. sec. 19.

Retracement for Resurvey:

From the reestablished meander cor. of secs. 19 and 30,

36. Resurvey of Old Meander line of Left bank of Colorado River (1874 survey) thru fracl. T. 9 S. R. 24 W

Chains.

hereinbefore described, retrace the old meander line in fracl. sec. 19, as per record, and set a temp. stake at each theoretical angle point.

Random courses and distances are as follows:

N. 11° 00' E., 11.00 chs.

N. 17° 30' E. 11.70 "

N. 15° 00' E. 8.10 "

N. 38° 30' E., 17.50 " to theoretical position of original meander cor. of secs. 19 and 20, from which point the reestablished meander cor. of said secs. hereinbefore described, brs. S. 59° 29' W., 100 lks. dist.

Resurvey:

From the reestablished meander cor. of secs. 19 and 30, resurvey the old meander line in fracl. sec. 19, on proportional courses and distances in accordance with closing line as determined above, on true lines.

Over level cultivated land.

N. 10° 06' E.

1.10 Old levee, brs. NW. and SE.

1.90 Road brs. NW and SE.

2.20 Irrigation ditch, course SE.

2.90 Fence brs. NW. and SE.

5.25 Fence, brs. NW. and SE.

10.85 Set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in the ground, for reestablished Meander Angle Point No. 1 of Sec. 19, with brass cap, marked

A P / S 19
No. 1 /
1920

Thence,
N. 16° 42' E.

11.52 Set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in the ground, for reestablished Meander Angle Point No. 2 of sec. 19, with brass cap, marked

AP / S 19
No. 2 /
1920

Thence,
N. 14° 10' E.

7.98 Set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in the ground, for reestablished meander Angle Point No. 3 of sec. 19, with brass cap, marked

A P / S 19
No. 3 /
1920

Thence,
N. 38° 04' E.

17.16 Intersect the reestablished meander cor. of secs. 19 and 20, hereinbefore described.

Land, level.

Soil, sandy, 1st rate, cultivated.

No undergrowth.

In Section 20.

Retracement for Resurvey:

From the reestablished meander cor. of secs. 19 and 20, hereinbefore described, retrace the old meander line in fracl. sec. 20 as per record, and set a temp. stake at

Resurvey of old Meander line of left bank of Colorado River (1874 survey) thru. fracl. 1. 9 S., R. 24 W.

Chains.

each theoretical angle point.
Random courses and distances are as follows:


- N. 46°30'E., 12.00 chs.
- N. 7°00'E., 12.10 chs.
- N. 21°15'W., 17.50 chs. to theoretical position of original meander cor. of secs. 17 and 20, from which point the reestablished meander cor. of said secs. hereinbefore described, brs. N. 47° 14' W. 78 lks. dist.

RESURVEY:

From the reestablished meander cor. of secs. 19 and 20, resurvey the old meander line in sec. 20, on proportional courses and distances in accordance with closing line, as determined above on true lines.


Over level, cultivated land.
N. 45°26'E.

- 11.99 Set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in the ground, for reestablished Meander Angle Point No. 1 of sec. 20, with brass cap, marked



Thence,
N. 6° 08' E.

- 12.23 Set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in the ground, for reestablished meander Angle Point No. 2 of sec. 20, with brass cap, marked



Thence,
N. 21°43' W.

- 17.80 Intersect the reestablished meander cor. of secs. 17 and 20, hereinbefore described.
Land, level.
Soil, sandy, 1st rate.
No undergrowth.

In section 17

From reestablished meander cor. of secs. 17 and 20, hereinbefore described,
N. 31°57' W., on a true line, in sec. 17 (flag on reestablished meander cor. of secs. 17 and 18, being visible).
Over level cultivated land.

- 6.79 Intersect the reestablished meander cor. of secs. 17 and 18, hereinbefore described.
Land, level.
Soil, sandy, 1st rate.
No undergrowth.

In fracl. Sec. 18.

The original position of meander cor. of fracl. secs. 7 and 18 is now in bed of Colorado River, and cannot be reestablished; therefore, from the reestablished

38 Resurvey of old Meander line of left bank of Colorado river (1874 survey) thru. fracl. T.9 S., R.24 W.

Chains.


meander cor. of fracl. secs. 17 and 18, hereinbefore described, resurvey the old meander line on record courses and distances, on true lines in fracl. sec. 18.

Over level land, thru. dense undergrowth.

N.41°00'W.

10.80

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished Meander Angle Point No. 1 of sec. 18, with brass cap, marked



1

1920

Thence,

N.34°00' W.

7.10

Leave dense undergrowth, brs. E. and W.

7.30

Road, brs. E. and W.

Thence over cultivated land.

14.60

Set an iron post 3 ft. long, 1 in. in diam., 36 ins. in the ground, for reestablished Meander Angle Point No. 2 of sec. 18, with brass cap, marked



2

1920

Thence,


N.40° 00' W.

8.50

Irrigation ditch, course S.

17.80

Set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in the ground, for reestablished Meander Angle Point No. 3, of sec. 18, with brass cap, marked



3

1920

Thence,

N.18°30' W.

0.20

Road, brs. E. and W.

0.40

Fence brs. E. and W.

7.80

Fence brs. N. and S. Leave cultivated land.

8.00

Road, brs. N. and S.

8.30

East bank of West Canal, brs. N. and S. Thence across said Canal, course S.

10.00

West bank of Canal, brs. N. and S.


10/09

Intersect eastern toe of the U.S.R.S. Levee, bearing NE. and SW., at a point 2.12 chs. N.28° 30' E., from Angle point No. 39, thereof, hereinafter described.

At point of intersection,

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for closing Meander Cor. of sec. 18, with brass cap, marked

USRS



1920

Land, level.

Soil, sandy, 1st rate.

Some cultivation.

Undergrowth, arrowweed, willow, and cottonwood.

Resurvey of old Meander Line of Left bank of Colorado River
(1874 survey) thru. fracl. T. 9 S., R. 24 W.


Chains.

In Frac. sec. 8.


A change of the location of the Colorado River channel since the date of the original survey of this township has removed from the township nearly all of the original area of fracl. sec. 7, all of the original area of fracl. sec. 6, the NW. portion of fracl. sec. 8, and all of that part of the original area of sec. 5, which was situated in the SW. cor. thereof, including the original Western meander cor. of fracl. secs. 5 and 8, making retracement of old meander line in fracl. sec. 8 impracticable. Therefore, from the reestablished eastern meander cor. of fracl. secs. 5 and 8, hereinbefore described, resurvey the old Meander line, on a true line in sec. 8, on record courses and distances.

Over level land, thru. undergrowth.
S. 49° 30' W.


- 0.30 Fence brs. E. and W.
- 0.70 Irrigation ditch, course E.
- 0.95 Fence, brs. E and W. Thence over cultivated land.
- 12.00 East bank of West Canal, brs. E. and W. Thence across said canal.
- 13.80 West bank of West canal, brs. E. and W.
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished Meander Angle Point No. 1 of sec. 8, with brass cap, marked



- Thence,
N. 87° 30' W.
- 0.73 Intersect eastern toe of U. S. R. S. Levee, bearing NE. and SW. at a point 24 lks. S. 21° 37½' W. from Angle Point No. 47 thereof, hereinafter described.
At point of intersection,
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for closing meander cor. of sec. 8, with brass cap, marked



Raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor.
Land, level.
Soil, sandy loam, 1st rate.
Undergrowth, arrowweed, willow, and cottonwood on un-
cleared portion.



Resurvey and Survey of old Meander line of Left bank of Colorado River (1874 survey) thru fracl. T. 9 S. R. 24 W.

Chains.

In fracl. Sec. 5.

Retracement for Resurvey:

From the reestablished Eastern Meander cor. of fracl. Secs. 5 and 8, hereinbefore described, run random courses and distances, as per record, thru fracl. sec. 5, as follows:

N. 30° 15' E., 13.70 chs.

N. 21° 00' E., 21.20 "

N. 17° 00' E., 13.00 "

N. 21° 30' E., 17.30 "

N. 22° 00' E., 10.40 " to theoretical position of original meander cor. of sec. 4, and fracl. sec. 5, from which point the reestablished meander cor. of said secs. hereinbefore described, brs. S. 68° 49' W., 96 lks. dist.


Resurvey:

From the reestablished Eastern meander cor. of fracl. secs. 5 and 8, resurvey the meander line, thru fracl. sec. 5, on proportional courses and dists. in accordance with closing line, as determined above, on true lines.

Over level and cultivated land.

N. 29° 47' E.

13.56 Set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in the ground, for reestablished Meander Angle Point No. 1 of sec. 5, with brass cap, marked




1920

Thence,

N. 20° 27' E.

21.02 Set an iron post 3 ft. long, 1 in. in diam., 36 ins. in the ground, for reestablished Meander Angle Point No. 2 of sec. 5, with brass cap, marked




1920

Thence,

N. 16° 25' E.

12.90 Set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in the ground for reestablished Meander Angle Point No. 3 of sec. 5, with brass cap, marked




1920

Thence,

N. 20° 58' E.

17.15 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished Meander Angle Point No. 4 of sec. 5, with brass cap, marked



1920

Thence,

N. 21° 28' E.

10.31 Intersect the reestablished meander cor. of sec. 4, and fracl. sec. 5, hereinbefore described.

Land, level. Soil, sandy, 1st rate.

No undergrowth.

In Section 4.

From reestablished meander cor. of sec. 4 and fracl. sec. 5, hereinbefore described,

N. 22° 42' E., on a true line, in sec. 4 (flag at reestablished meander cor. of secs. 4 and 33, on N. bdy. of Tp., being visible).

Over level, cultivated land.

11.48 Intersect the reestablished meander cor. of secs. 4 and 33, on the N. bdy. of the Tp., hereinbefore described.

Land, level.

Soil, sandy, 1st rate.

No undergrowth.

Resurvey of old Meander line of left Bank of Colorado River (1874 survey) thru. part of fracl. T. 8 S., R. 24 West.

Chains.

In Fracl. Sec. 33.

Retracement for Resurvey:

From the reestablished meander cor. of sec.4, and fracl. sec.33 on S.bdy. of the Tp., hereinbefore described, retrace the old meander line on record courses and distances, and set temp. stake at each theoretical original meander angle point.

Random courses and distances are as follows:

- N.19°00'E. 24.40 chs.
- N.11°30'E., 15.00 chs.
- N.18°00'E., 18.70 "
- N.23°30'E., 19.60 chs.
- N.23°00'E., 7.10 chs. to theoretical position of original meander cor. of fracl. secs. 28 and 33, from which point the reestablished meander cor. of said secs. hereinbefore described, brs. N.26°32'E., 318 lks. dist.

RESURVEY:

From the reestablished meander cor. of sec.4, and fracl. sec.33, resurvey the old meander line thru. fracl. sec. 33, on proportional courses and distances in accordance with closing line as determined above, on true lines.

Over cultivated river bottom land.

- N.19°17'E.
 - 10.70 Irrigation ditch, course E.
 - 15.00 East bank of West Canal, brs. N.33°E., and S.33°W. Thence across said canal, course S. 33°W.
 - 18.00 West bank of canal, brs. NE. and SW.
 - 24.47 Intersect eastern toe of U.S.R.S. Levee, bearing NE. and SW. at a point 2.72 chs. S.29°47'W., from A.P.No.52 thereof, hereinafter described.
- At point of intersection,
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for closing meander cor. of sec. 33, with brass cap, marked

U.S.R.S.
MCCC
S 33
1920


- 25.32 Raise a mound of stone, 2½ ft. base, 1½ ft. high, S. of cor. The true point for reestablished Meander Angle Point No.1 of sec.33 falls on U.S.R.S. Railroad, which bears S.29°45'W., and N.29°45'E.; therefore, at a point N.67°W., 11 lks. dist.
- Set an iron post, 3 ft. long, 1 in. in diam., 36 ins. in the ground, for witness cor. to reestablished meander Angle Point No.1 of sec.33, with brass cap, marked

No 1 / S33
A P / WC
1920


- From the true point for reestablished Meander Angle Point No.1 of sec.33,
N.12°02'E.
- 1.00 Enter dense undergrowth, brs. NE. and SW.
- 15.55 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished meander Angle Point No.2 of sec.33, with brass cap, marked

Resurvey of old Meander line of Left Bank of Colorado
42 River (1874 survey) thru. part of Fracl. T. 8 S., R. 24 W.


Chains.



19.40 Thence
N. 18° 19' E.
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for reestablished meander Angle Point No.
3 of sec. 33, with brass cap, marked



20.34 Thence,
N. 23° 37' E.
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for reestablished meander Angle Point No. 4
of sec. 33, with brass cap, marked



7.37 Thence,
N. 23° 07' E.
Intersect the reestablished meander cor. of fractional
secs. 28 and 33, hereinbefore described.

Land, level.
Soil, sandy, 1st rate.
Undergrowth, dense willow, cottonwood and arrowweed,
where indicated.

Survey of Traverse along U.S.R.S. Levee, thru. fracl. Ts. 9 S., Rs. 24 and 25 W., and part of fracl. T. 8 S., R. 24 W.

Chains.

The survey of the Traverse of the U.S.R.S. Levee, was begun at an initial Monument on line, bet. secs. 14 and 23 of fracl. T. 10 S., R. 25 W., and run NE. to an intersection with north bdy. of said township, as described in Book "A." of this group. The notes that follow describe the continuation of the survey of the Levee Traverse, the angle points thereon being numbered from said Initial Monument.

Thru. fracl. T. 9 S. R. 25 W. (sec. 36).

From A P No. 22 of Levee Survey, and closing cor. of secs. 1 and 36 on N. bdy. of fracl. T. 10 S., R. 25 W., described in Book "A."

17.10 N. 69° 30' E., on SE. toe of U.S.R.S. Levee, in sec. 36, fracl. T. 9 S., R. 25 W. Intersect Angle Point No. 23, and closing cor. of secs. 31 and 36, on W. bdy. of fracl. T. 9 S. R. 24 W., hereinbefore described. Thence,

Thru. Frac. T. 9 S., R. 24 W. (sec. 31)

25.10 N. 62° 30' E. Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for Angle Point No. 24, with brass cap, marked

USRS
AP No. 24
1918

7.45 Thence, N. 46° 22 1/2' E. Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for Angle Point No. 25, with brass cap, marked

USRS
AP No. 25
1918

8.50 Thence, N. 34° 30' E. Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for Angle Point No. 26, with brass cap, marked

USRS
AP No. 26
1918

6.10 Thence, N. 7° 00' W. Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for Angle Point No. 27, with brass cap, marked

USRS
AP No. 27
1918

Thence,
N. 16° 45' W.

Survey of Traverse along U.S.R.S. Levee, thru. Fracl. Ts. 9 S.
Rs. 24 and 25 W., and part of fracl. T. 8 S., R. 24 W.

Chains.

17.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for Angle Point No. 28, with brass cap, marked

USRS
AP No. 28

1918

Thence,
N. 28° 30' W.

8.10 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for Angle Point No. 29, with brass cap, marked

USRS
AP No. 29

1918

Thence,
N. 41° 00' W.

10.40 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for Angle Point No. 30, with brass cap, marked

USRS
AP No. 30

1918

Thence,
N. 48° 52½' W.

19.70 Intersect Angle Point No. 31, and closing cor. of secs. 30 and 31, fracl. T. 9 S., R. 24 W., hereinbefore described.
Thence,

In sec. 30.

N. 28° 30' W.

2.72 Intersect Angle Point No. 32, and closing cor. of secs. 25 and 30, on W. bdy. of fracl. T. 9 S., R. 24 W., hereinbefore described.
Thence,

Thru. fracl. T. 9 S., R. 25 W. (sec. 25)

N. 14° 15' W.

8.51 Intersect Angle Point No. 33, and Meander Closing cor. at intersection of old Meander line of Left Bank of Colorado river with U.S.R.S. Levee, hereinbefore described.
Thence,

N. 0° 15' W.

6.00 South bank of slough brs. E.

11.00 North bank of slough, brs. E.

21.00 Beginning of cultivated land, brs. E.

51.00 Beginning of dense undergrowth brs. E.

69.15 Intersect closing cor. of secs. 24 and 25, T. 9 S., R. 25 W. hereinbefore described.
Thence,

In sec. 24.

N. 0° 15' W.

0.52 (69.67 chs. N. 0° 15' W., from A.P. No. 33) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for Angle Point No. 34, with brass cap, marked

USRS
AP No. 34

1918

Survey of Traverse along U.S.R.S. Levee, thru. fracl. Ts. 9 S. Rs. 24
and 25 W. and part of fracl. T. 8 S., R. 24 W.

Chains.

27.40 Thence,
N. 0° 9' W.
Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for Angle Point No. 35, with brass cap,
marked

USRS
AP No. 35
1918

5.78 Thence,
N. 13° 07' E.
Intersect closing cor. of secs. 19 and 24 on W. bdy. of fracl.
T. 9 S., R. 24 W., hereinbefore described.
Thence,

Thru. Frac. T. 9 S., R. 24 W. (sec. 19).

5.00 N. 13° 07' E.
(10.78 chs. N. 13° 07' E., from A.P. No. 35) set an iron
post, 3 ft. long, 1 in. in diam., 26 ins. in the
ground, for Angle Point No. 36, with brass cap, marked

USRS
AP No. 36
1918

6.45 Thence,
N. 25° 00' E.
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for Angle Point, No. 37, with brass cap,
marked

USRS
AP No. 37
1918

40.80 Thence,
N. 28° 20' E.
Intersect closing cor. of fracl. secs. 18 and 19, here-
inbefore described.
Thence,

In fracl. sec. 18.

0.25 N. 28° 20' E.
(41.05 chs. N. 28° 20' E., from A.P. No. 37^x), Set an iron
post, 3 ft. long, 1 in. in diam., 26 ins. in the
ground, for Angle Point No. 38, with brass cap,
marked

USRS
AP No. 38
1918

53.20 Thence,
N. 28° 00' E.
Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in
the ground for Angle Point No. 39, with brass cap,
marked

USRS
AP No. 39
1918

16. Survey of Traverse along U.S.R.S. Levee thru Frac'l Ts. 9 S.,
 ns. 24 and 25 W. and part of Frac'l T. 8 S., R. 24 W.

Chains.

- Thence,
 N. 28° 30' E.
- 2.12 Intersect Meander Angle Point No. 4 of sec. 18 on old Meander line of left bank of Colorado River, hereinbefore described.
- Continue line and measurement.
- 13.40 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for Angle Point No. 40, with brass cap, marked
- USRS
 AP No. 40
 1918
- Thence,
 N. 34° 45' E.
- 13.40 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for Angle Point No. 41, with brass cap, marked
- USRS
 AP No. 41
 1918
- Thence,
 N. 39° 25' E.
- 12.82 Intersect the closing cor. of frac'l. secs. 7 and 18, hereinbefore described.
- Thence
- In frac'l. sec. 7
- N. 39° 25' E.
 (13.26 chs. N. 39° 25' E. from A P No. 42) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for Angle Point No. 42, with brass cap, marked
- USRS
 AP No. 42
 1918
- Thence,
 N. 38° 00' E.
- 10.90 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for Angle Point No. 43, with brass cap, marked
- USRS
 AP No. 43
 1918
- Thence,
 N. 39° 0' E.
- 0.30 Intersect closing cor. of frac'l. secs. 7 and 8, hereinbefore described.
- Thence
- In frac'l. Sec. 8
- N. 39° 00' E.
 (15.60 chs. N. 39° 0' E. from A. P. No. 43), Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for Angle point No. 44, with brass cap, marked

Survey of Traverses along U.S.R.S. Levee, thru. fracl. Ts. 9 S., Rs. 24 and 25 W., and part of fracl. T. 8 S., R. 24 W.

Chains.

USRS
AP No. 44
1918

- Thence,
N. 35° 30' E.
- 25.25 Spillway from canal, course west.
- 27.65 Spillway tender's house brs. E 1 ch. dist.
- 39.65 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for Angle Point No. 45, with brass cap, marked

USRS
AP No. 45
1918

- Thence,
N. 27° 45' E.
- 5.90 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for Angle Point No. 46, with brass cap marked,

USRS
AP No. 46
1918

- Thence,
N. 21° 37' E.
- 13.91 Intersect the closing meander cor. of sec. 8, hereinbefore described in notes of resurvey of the meanders of Left Bank of Colorado River.
Continue line and measurement.
- 14.15 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for Angle Point No. 47, with brass cap, marked

USRS
AP No. 47
1918

- Thence,
N. 21° 22' E.
- 9.33 Intersect closing cor. of fracl. secs. 5 and 8, hereinbefore described.

Thence,

In Frac. Sec. 5.

- N. 21° 22' E.
- 0.24 (9.57 chs. N. 21° 22' E. from A P No. 47), set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for Angle Point No. 48, with brass cap, marked

USRS
AP No. 48
1918

- Thence,
N. 21° 45' E.
- 69.25 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for Angle Point No. 49, with brass cap, marked

Survey of Traverse along U.S.R.S. Levee, thru. fracl. Ts. 9 S., Rs. 24 and 25 W. and part of fracl. T 8 S., R. 24 W.

Chains

USRS
AP No. 49.
1918

Thence,
N. 29° 58' E.
6.00 South end of Willet's Siding, on the U.S.R.S. Railroad, brs.
west 30 lks. dist.
17.74 Intersect closing cor. of fracl. Ts. 8 and 9 S., R. 24 W.,
hereinbefore described.
Thence,

In fracl. T. 8 S., R. 24 W.
Sec. 33

0.48 N. 29° 58' E.
(18.20 chs. N. 29° 58' E., from A.P. No. 49), Set an iron
post 3 ft. long, 1 in. in diam., 26 ins. in the ground,
for Angle Point No. 50, with brass cap, marked

USRS
AP No. 50
1918

2.50 Thence,
N. 29° 44' E.
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for Angle Point No. 51, with brass cap,
marked

USRS
AP No. 51
1918

from which,

A willow, 6 ins. in diam., brs. N. 89° E., 80 lks.
dist., marked T8S R24W S33 A P B T.

A cottonwood, 6 ins. in diam., brs. S. 62° E., 121
lks. dist., marked T8S R24W S33 AP BT.

Thence,
N. 29° 47' E.
6.00 North end of Willet's Siding on U.S.R.S. railroad.
20.00 West Canal, coming from NE. on curve runs SW., nearly
parallel to Levee.
23.78 Intersect the closing meander cor. of sec. 33, hereinbefore
described.
Continue line and measurement.
26.50 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for Angle Point No. 52, with brass cap,
marked

USRS
AP No. 52
1918

6.60 Thence,
N. 25° 30' E.
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for Angle Point No. 53, with brass cap,
marked

USRS
AP No. 53
1918

Chains.
55.70
Thence,
N.22°45'E.
Intersect the closing cor. of fracl. secs.28 and 33, and
Angle Point No.54, hereinbefore described.
Discontinue the survey at this point, as there are no
accretion lands to the north.

Boundaries of Sec.33, Fracl. Township 8 South, Range 24 West.
Latitudes, Departures, and Closing Errors.

Line designated.	True Bearing.	Dist.	Latitudes.		Departures.	
			N.	S.	E.	W.
South bdy. of Tp.	S.89°45'W.	81.79		.40		81.79
U.S.R.S. LEVEE,	N.29°58'E.	.48	.41		.24	
	N.29°44'E.	2.50	2.17		1.24	
	N.29°47'E.	26.50	23.00		13.16	
	N.25°30'E.	6.60	5.96		2.84	
	N.23°45'E.	55.70	51.37		21.54	
Subdivisional Boundary,	East,	2.92			2.92	
	S.89°12'E.	39.47		.54	39.47	
	S.0°21'E.	41.91		41.91	.26	
	S.0°7'E.	40.14		40.14	.09	
Convergency,					.01	
Totals, -----			82.91	82.99	81.77	81.79
				82.91		81.77
Error in latitude,			0.08			
Error in departure,					0.02	

Boundaries of Accretion land in sec.33, fracl. T8SR24W.
Latitudes, Departures, and Closing Errors.

Line Designated.	True brg.	Dist.	Latitudes.		Departures.	
			N.	S.	E.	W.
South Tp. bdy.	S.89°45'W.	5.25		.02		5.25
U.S.R.S. LEVEE,	N.29°58'E.	.48	.41		.24	
	N.29°44'E.	2.50	2.17		1.24	
	N.29°47'E.	23.78	20.64		11.81	
Old Meander Line,	S.19°15'W.	24.47		23.10		8.07
Totals,			23.22	23.12	13.29	13.32
			23.12			13.29
Error in latitude,			0.10			
Error in departure,					0.03	

Boundaries of the surveyed and resurveyed portions of
Fract. Township 9 South, Range 24 West.

Latitudes, Departures and Closing Errors.

Line designated.	True bearing.	Dist.	Latitudes.		Departures.	
			N.	S.	E.	W.
South Tp. Bdy.	S. 89° 43' W.	80.14		.40		80.14
West Tp. bdy.	North,	91.00	91.00			
	N. 1° 20' W.	28.91	28.90			.92
	N. 0° 32' W.	39.90	39.90			.37
	North,	33.59	33.59			
U. S. R. S. LEVEE.	N. 13° 07' E.	5.00	4.87		1.13	
	N. 25° E.	6.45	5.83		2.73	
	N. 28° 20' E.	41.05	36.13		19.48	
	N. 28° 00' E.	53.20	46.97		24.98	
	N. 28° 20' E.	13.40	11.79		6.36	
	N. 34° 45' E.	13.40	11.01		7.64	
	N. 39° 25' E.	13.26	10.24		8.42	
	N. 38° 00' E.	10.90	8.59		6.71	
	N. 39° 00' E.	15.60	12.12		9.82	
	N. 35° 30' E.	39.65	32.28		23.02	
	N. 27° 45' E.	5.90	5.22		2.75	
	N. 21° 37½' E.	14.15	13.15		5.21	
	N. 21° 22' E.	9.57	8.91		3.49	
	N. 21° 45' E.	69.25	64.32		25.66	
N. 29° 58' E.	17.74	15.37		8.86		
North Tp. bdy.	N. 89° 45' E.	81.79	.40		81.79	
Subdivisional Boundary,	S. 0° 1' W.	80.01		80.01		.02
	S. 89° 39' W.	80.82		.50		80.82
	S. 0° 20' E.	80.10		80.10		.47
	S. 1° 18' E.	40.06		40.05		.91
	S. 0° 50' E.	40.01		40.01		.58
	S. 0° 12' E.	39.96		39.96		.14
	S. 0° 8' E.	40.01		40.01		.09
	S. 89° 44' W.	79.75		.37		79.75
	S. 0° 57' E.	79.96		79.95		1.32
S. 0° 20' E.	79.85		79.85		.46	
Convergency,					.10	
<u>Totals.</u>			480.59	481.21	242.12	242.02
				480.59	242.02	
<u>Error in latitude,</u>			----- 0.62			
<u>Error in departure,</u>			----- 0.10			

Boundaries of Accretion Land in Fracl. T. 9 S. R. 24 W.
Latitudes, Departures, and Closing Errors.
In Secs. 4, 5, 8 and 9.

Line designated.	True Brg.	Dist.	Latitudes.		Departures.	
			N.	S.	E.	W.
U.S.R.S. LEVEE,	N. 21° 37' E.	.24	.22		.09	
	N. 21° 2' E.	9.67	8.91		3.49	
	N. 21° 45' E.	69.25	64.32		25.66	
	N. 29° 58' E.	17.74	15.37		8.86	
North Tp. Bdy.,	N. 89° 45' E.	5.25	.02		5.25	
Old Meander Line,	S. 22° 47' W.	11.45		10.56		4.44
	S. 21° 28' W.	10.31		9.60		3.77
	S. 20° 58' W.	17.15		16.01		6.14
	S. 16° 25' W.	12.90		12.37		3.65
	S. 20° 27' W.	21.02		19.69		7.34
	S. 29° 47' W.	13.56		11.77		6.74
	S. 49° 33' W.	13.78		8.94		10.49
	N. 87° 30' W.	.73	.03			.73
<u>Totals, -----</u>			88.87	88.94	43.35	43.30
<u>Error in latitude, -----</u>				.07		
<u>Error in departure, -----</u>					.05	

In Secs. 18, 19, and 30.

Line designated.	True brg.	Dist.	Latitudes.		Departures.	
			N.	S.	E.	W.
West Tp. Bdy.	N. 1° 20' W.	28.91	28.90			.92
	N. 0° 32' W.	39.90	39.90			.37
	North,	33.59	33.59			
U.S.R.S. LEVEE,	N. 13° 07' E.	5.00	4.87		1.13	
	N. 25° 00' E.	6.45	5.83		2.73	
	N. 28° 20' E.	41.05	36.13		19.48	
	N. 28° 00' E.	53.20	46.97		24.98	
	N. 28° 30' E.	2.12	1.85		1.01	
Old Meander Line	S. 18° 30' E.	10.09		9.56	3.20	
	S. 40° 00' E.	17.80		13.64	11.44	
	S. 34° 00' E.	14.60		12.11	8.17	
	S. 41° 00' E.	10.80		8.15	7.09	
	S. 31° 67' E.	6.79		5.76	3.59	
	S. 21° 43' E.	17.80		16.54	6.59	
	S. 6° 8' W.	12.23		12.16		1.31
	S. 45° 26' W.	11.99		8.41		8.54
	S. 38° 31' W.	17.20		13.46		10.71
	S. 14° 37' W.	7.97		7.71		2.01
	S. 17° 10' W.	11.51		11.00		3.40
	S. 10° 33' W.	10.83		10.65		1.98
	S. 10° 9' W.	4.98		4.90		.88
	S. 36° 5' W.	13.45		10.87		7.92
	S. 33° 19' W.	11.98		10.01		6.58
	S. 15° 40' W.	21.87		21.06		5.91
	S. 36° 6' W.	8.31		6.71		4.90
S. 35° 50' W.	17.81		14.44		10.43	
N. 89° 53' W.	14.28	.03			14.28	
S. 88° 04' W.	3.94			.13	3.94	
S. 80° 43' W.	5.91			.95	5.83	
Convergency,					.02	
<u>Totals, -----</u>			198.07	198.22	89.43	89.91
				198.07		89.43
<u>Error in latitude, -----</u>				.15		
<u>Error in departure, -----</u>					.48	

Boundaries of that portion of Fracl. T.9 S., R.25 W.,
lying inside the U.S.R.S. Levee.
In SEC. 36.
Latitudes, Departures and Closing Errors.

Line designated.	True brg.	Dist.	Latitudes.		Departures.	
			N.	S.	E.	W.
South Tp. Bdy.	West,	3.01				16.01
U.S.R.S. LEVEE.	N. 69°30'E.	17.10	5.98		16.01	
East Tp. Bdy.,	South,	5.98		5.98		
<u>Totals,</u>			5.98	5.98	16.01	16.01
			5.98		16.01	
<u>Error in latitude,</u>			0.00			
<u>Error in departure,</u>					0.00	

IN SECS. 25 AND 24.

Line designated.	True brg.	Dist.	Latitudes.		Departures.	
			N.	S.	E.	W.
U.S.R.S. LEVEE.	N. 14°15'W.	8.51	8.25			2.09
	N. 0°15'W.	69.67	69.67			.30
	N. 0°9'W.	27.40	27.40			.07
	N. 13°7'E.	5.78	5.63		1.31	
East Tp. Bdy.	South,	33.59		33.59		
	S. 0°32'E.	39.90		39.90	.37	
	S. 1°20'E.	28.91		28.90	.92	
	South,	8.60		8.60		
<u>Totals,</u>			110.95	110.99	2.60	2.46
				110.95	2.46	
<u>Error in latitude,</u>			0.04			
<u>Error in departure,</u>					0.14	

Boundaries of Accretion land in fracl. T.9 S., R.25 W.
Latitudes, Departures, and Closing Errors.

Line designated.	True brg.	Dist.	Latitudes.		Departures.	
			N.	S.	E.	W.
Old Meander Line,	S. 80°45'W.	2.14		.34		2.11
U.S.R.S. LEVEE.	N. 0°15'W.	69.67	69.67			.30
	N. 0°09'W.	27.40	27.40			.07
	N. 13°07'E.	5.78	5.63		1.31	
East Tp. Bdy.,	South,	33.59		33.59		
	S. 0°32'E.	39.90		39.90	.37	
	S. 1°20'E.	28.91		28.90	.92	
<u>Totals,</u>			102.70	102.73	2.60	2.48
				102.70	2.48	
<u>Error in latitude,</u>			0.03			
<u>Error in departure,</u>					0.12	

CERTIFICATE OF UNITED STATES CADASTRAL ENGINEER.

I, Arthur W. Brown, U.S. Cadastral Engineer, hereby certify upon honor that, in pursuance of supplemental

special instructions received from the U. S. Surveyor General, for Group No. 89, Arizona,

bearing date of the 2nd day of October, 1918, I have well, faithfully, and truly

in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instruc-

tions, and the laws of the United States, surveyed all those parts or portions of the south bdy. of frac'l. T. 8 S., R. 24 W., the West bdy. of frac'l. T. 9 S., R. 24 W., the Subdivisional lines of frac'l. Ts. 9 S., Rs. 24 and 25 W., and Traverse of the U. S. R. S. Levee in frac'l. T. 9 S., R. 25 W., and frac'l. Ts. 8 and 9 S., R. 24 W., and RESURVEYED all those parts or portions of the S. bdy. of frac'l. T. 8 S., R. 24 W., the south and West bdrs. of frac'l. T. 9 S., R. 24 W., parts of the subdivision lines of frac'l. Ts. 8 and 9 S., R. 24 W., and Meanders of East or Left Bank of the Colorado River in frac'l. Ts. 8 and 9 S., R. 24 W., and frac'l. T. 9 S., R. 25 W.

of the Gila and Salt

River Base and Meridian, in the State of Arizona,

and by diagram on page 2 hereof,

the foregoing field notes as having been executed by me, and under my direction; and that all the corners of

and resurvey

said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instruc-

tions, and the special written instructions of the U. S. Surveyor General, for Group No. 89, Arizona,

and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey. and resurvey.

Denver, Colorado.

July 9, 1920.

Arthur W. Brown

U.S. Cadastral Engineer.

APPROVAL

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

191

The foregoing field notes of the survey of

executed by

under his special instructions dated 191, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above-described surveys in

has been correctly copied from the original notes on file in this office.

U. S. Surveyor General.

CERTIFICATE OF UNITED STATES CADASTRAL
ENGINEER.

I, William H. Thorn, U. S. Cadastral Engineer, hereby certify upon honor that, in pursuance of supplemental special instructions received from the U. S. Surveyor General, for Group No. 89, Arizona,

bearing date of the 27th day of June, 1919, I have well, faithfully, and truly

in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, corrected all those parts or portions of the survey of the U.S.R.S. Levee in Frac'l. Ts. 9 S., Rs. 24 & 25 W., the South bdy. of frac'l. T. 8 N., R. 24 W., the West bdy. and Subdivision lines of Frac'l. Township 9 South, Range 24 West, and Subdivision lines of frac'l. Township 9 South, Range 25 West, and corrected the Resurvey of all those parts or portions of the South bdy. of frac'l. Township 8 South, Range 24 West, and Subdivision lines of Frac'l. Township 9 South, Range 24 West, and the Old Meanders of East or Left bank of the Colorado River in Frac'l. Township 8 South, Range 24 West, and Frac'l. Townships 9 South, Ranges 24 and 25 West,

of the Gila and Salt

River Base and Meridian, in the State of Arizona,

and by diagram on page 2 hereof,

the foregoing field notes, as having been executed by me, and under my direction; and that all the corners of

corrections

said ~~notes~~ have been established and perpetuated in strict accordance with the Manual of Surveying Instruc-

supplemental special

tions, and the ~~written~~ written instructions of the U. S. Surveyor General, for Group No. 89, Arizona,

and in the specific manner described in the field notes, and that the foregoing are the original field notes of such corrections.

William H. Thorn

U. S. Cadastral Engineer.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix, Arizona, August 27, 1920.

The foregoing field notes of the survey of part of the South bdy. of frac'l. T. 8 S., R. 24 W., Part of the West bdy. and part of the Subdivision lines of frac'l. T. 9 S., R. 24 W., part of the Subdivision lines of frac'l. T. 9 S., R. 25 W.; and Traverse of the U.S.R.S. Levee thru frac'l. T. 9 S., Rs. 24, and 25 W., and thru part of frac'l. T. 8 S., R. 24 W.; and of the RESURVEY of part of the South bdy. of frac'l. T. 8 S., R. 24 W., parts of the South & West bdrs., and part of the Subdivision of frac'l. T. 9 S., R. 24 W., part of the Subdivision lines ~~and South boundary of~~ of Frac'l. T. 8 S., R. 24 W. & old Meanders of East or Left bank of the Colorado River in frac'l. Ts. 8 and 9 S., R. 24 W., and frac'l. T. 9 S., R. 25 W. of the Gila and Salt River Base and Meridian in the State of Arizona, executed by Arthur W. Brown, U.S. Cadastral Engineer, and corrected by William H. Thorn, U.S. Cadastral Engineer, under Special Instructions dated June 1, 1918, and Supplemental special Instructions dated October 2, 1918, and June 27, 1919, for Group No. 89, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys, resurveys, and corrections they describe, are hereby approved.

Frank P. Frost
U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above-described surveys in

has been correctly copied from the original notes on file in this office.