

3410

41
ORIG 1

BOOK "B"

4-679

BOOK 3410

FIELD NOTES

OF THE SURVEY OF THE

EAST AND NORTH BOUNDARIES

AND

SUBDIVISION LINES OF

TOWNSHIP 10 NORTH,

RANGE 9 WEST

3410

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

EXECUTED BY

Norman D. Price

U. S. Transitman

3410

In the capacity of U. S. Surveyor, under Special Instructions dated Sept. 26, 1918, issued by the United States Surveyor General to govern surveys included in Group No. 20, which were approved by the Commissioner of the General Land Office, October 21, 1918, and Assignment Instructions dated March 7, 1919.

Survey commenced April 12, 1919

Survey completed May 1, 1919

1A
42


3410

Book "B"

Group 90 - - Arizona.

BOOK 3410

INDEX DIAGRAM.

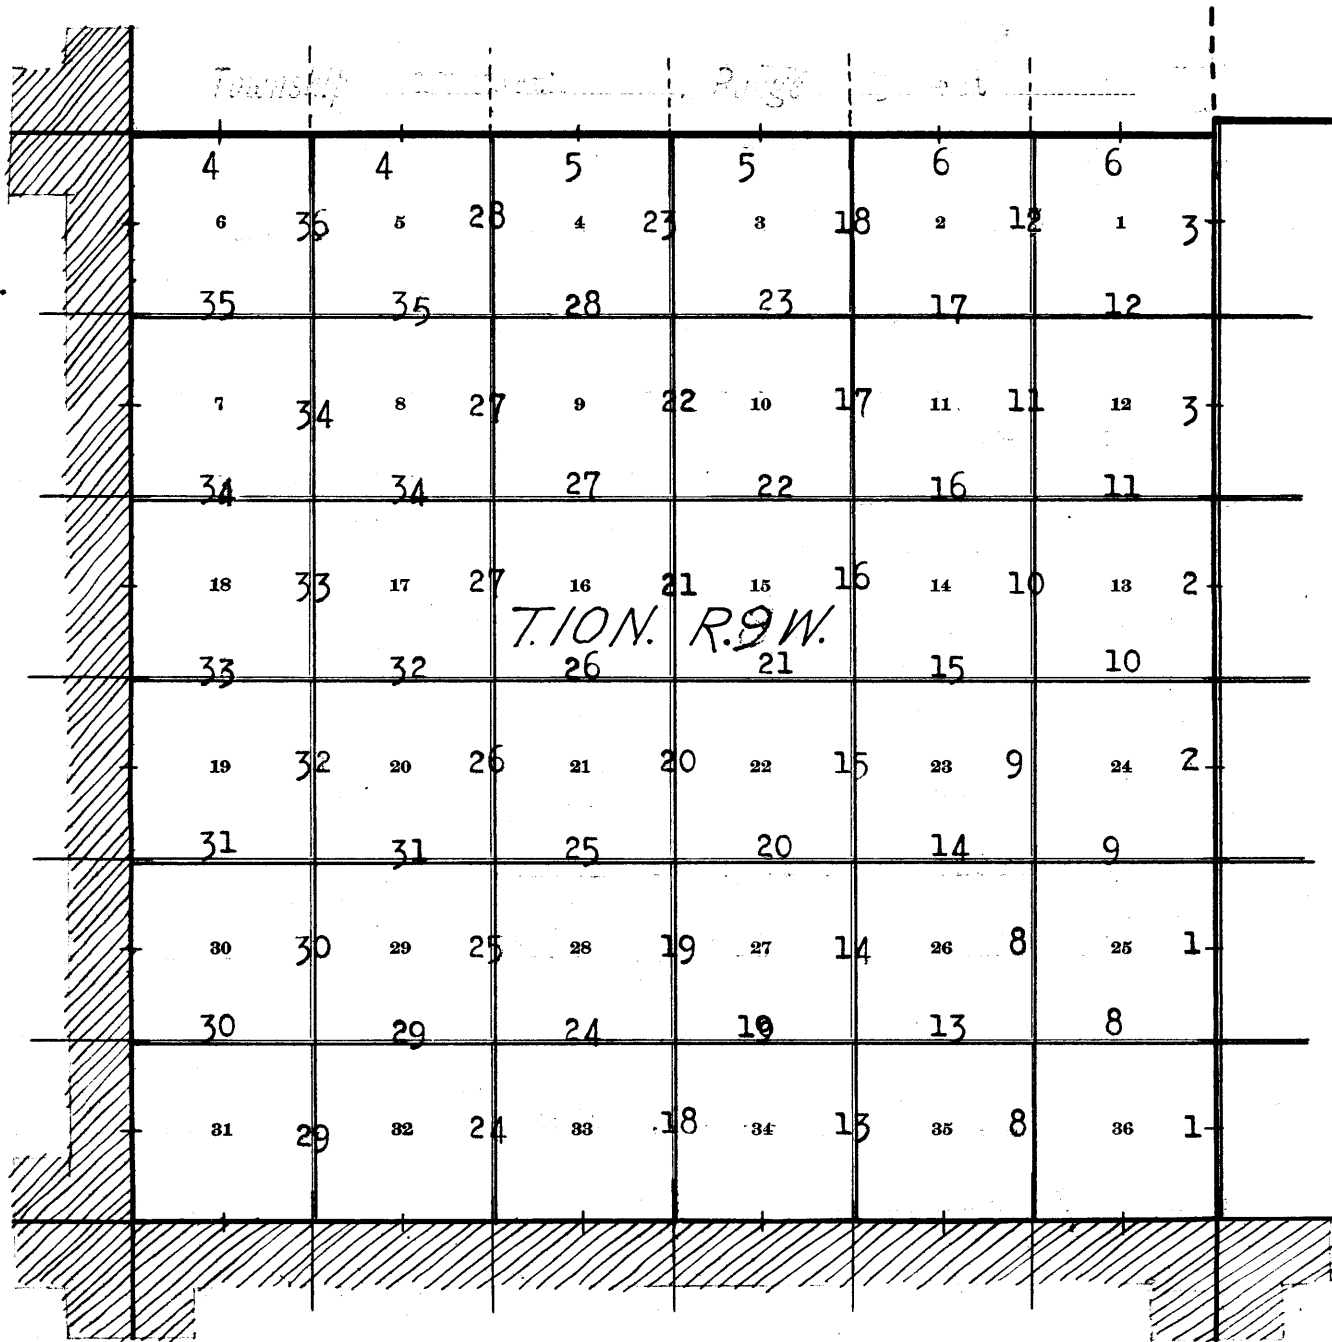


Lines surveyed under this Group.



Accepted surveys.



Unsurveyed.



Areas surveyed as per accepted plats on file.

Chains.

Surveys hereinafter described, executed by Norman D. Price, U.S. Transitman, on dates shown on diagram on page 37 hereof, using a Buff light mountain transit No. 7732, described with record of test and certificate of approval, in Book "A" of this group.

Survey of East bdy. of Township 10 North, Range 9 West.

The original cor. of Ts. 9 and 10 N., Rs. 8 and 9 W., established in November, 1914, is an iron post, 3 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by 4 pits, 24x24x12 ins., one each N., E. and W. of cor. 4 ft. dist., and one S. of cor. 8 ft. dist., and mound of earth 5 ft. base, 2 1/2 ft. high, S. of cor.


No bearing trees.

Thence, North, on a true line, bet. secs. 31 and 36.

Over rolling land, thru. scattering timber and dense underground.

4.40 Wash, 20 lks. wide, course SW.


40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked



48.50 Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.

Wash, 20 lks. wide, course W.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 25, 30, 31 and 36, with brass cap, marked



Dig pits, 18x18x12 ins., in each sec. 5 1/2 ft. dist.

Land, rolling. Soil, loose sandy loam, 1st rate.

Timber, mesquite and palo verde.

Undergrowth, catclaw, yucca, cacti and greasewood.


North, on a true line, bet. secs. 25 and 30.

Over rolling land, thru. scattering timber and dense undergrowth.

26.20 Road, brs. NE. and SW.

33.50 Old road, brs. NE. and SW.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked




Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.

42.10 Wash, 10 lks. wide, course W.

67.30 Wash, 10 lks. wide, course NW.

78.30 Wash, 5 lks. wide, course W.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 19, 24, 25 and 30, with brass cap, marked



2 Survey of East bdy. of Township 10 North, Range 9 West.

Chains.

Dig pits, 18x18x12 ins. in each sec. 5 1/2 ft. dist.
 Land, rolling. Soil, loose, sandy loam, 1st rate.
 Timber, mesquite and palo verde.
 Undergrowth, catclaw, yucca, cacti and greasewood.

 North, on true line, bet. secs. 19 and 24.
 Over rolling land, thru. scattering timber and dense under-
 growth.

- 1.20 Wash, 5 lks. wide, course SW.
- 35.00 Wash, 10 lks. wide, course NW.
- 39.40 Wash, 10 lks. wide, course NW.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for 1/4 sec. cor., with brass cap, marked

S24 | S19

1919

- 46.20 Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.
- 46.20 Old road, brs. NW. and SE.
- 48.70 Wash, 10 lks. wide, course NW.
- 59.40 Road, brs. NE. and SW.
- 64.40 Wash, 10 lks. wide, course NW.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
 the ground, for cor. of secs. 13, 18, 19 and 24, with brass
 cap, marked

T10N
 R9W | R8W
 S13 | S18
 S24 | S19

1919

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of post.
 Land, rolling.
 Soil, sandy and rocky loam; 2nd rate.
 Timber, mesquite and palo verde.
 Undergrowth, catclaw, yucca, greasewood and cacti.

 North, on true line, bet. secs. 13 and 18.
 Over broken, rolling land, thru. scattering timber and dense
 undergrowth.

- 7.10 Wash, 20 lks. wide, course NW.
- 14.00 Low spur, brs. NW.
- 21.00 Left bank of Date Creek, brs. E. and W. Thence across Date
 Creek, course W.
- 23.10 Right bank of Date Creek, brs. E. and W. Leave creek bed.
- 30.00 Low spur, slopes W.
- 34.60 Wash, 10 lks. wide, course W.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the
 ground, for 1/4 sec. cor., with brass cap, marked

S13 | S18

1919

- 41.70 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of post.
- 41.70 Spur, slopes W.
- 50.00 Wash, 10 lks. wide, course SW.
- 76.80 Road, brs. NE. and SW.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
 the ground, for cor. of secs. 7, 12, 13 and 18, with brass
 cap, marked

T10N
 R9W | R8 W
 S12 | S 7
 S13 | S18

1919

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of post.
 Land, rolling. Soil, rocky, 2nd rate.
 Timber, palo verde and mesquite.
 Undergrowth, greasewood, catclaw and cacti.

East boundary of Township 10 North, Range 9 West.

Chains.

North, on a true line, bet. secs. 7 and 12.
Over broken land, thru. scattering timber and dense under-
growth.

- 10.00 Wash, 10 lks. wide, course W.
- 20.00 Spur, slopes W. Head of Bullard's water pipe line in sec. 12, brs. N. 36° W.
- 30.00 Wash, 10 lks. wide, course W.
- 35.00 Spur, slopes W.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked

$\frac{1}{4}$
 S12 | S 7
 1919

- 44.60 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of post. Cliff, 20 ft. high, brs. NW. and SE.
- 50.00 Wash, 50 lks. wide, course NW. Road, brs. NW. and SE.
- 59.60 Wash, 10 lks. wide, course NW.
- 62.50 Wash, 60 lks. wide, course SW.
- 75.50 Cut bank, 15 ft. high, bears E. and W.
- 78.60 Wash, 40 lks. wide, course W.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 1, 6, 7 and 12, with brass cap, marked

TL0N
 R9 W | R8W
 S 1 | S 6
 S12 | S 7
 1919

Dig pits, 18x18x12 ins., in each sec. 5 1/2 ft. dist.
Land, rolling. Soil, rocky, 3rd rate.
Timber, palo verde.
Undergrowth, catclaw, greasewood and cacti.

North, on a true line, bet. secs. 1 and 6.
Over level land, thru. scattering timber and dense under-
growth.

- 3.50 Wash, 30 lks. wide, course SW.
- 6.00 Wash, 30 lks. wide, course SW.
- 12.10 Wash, 40 lks. wide, course SE.
- 37.80 Wash, 10 lks. wide, course W.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked

$\frac{1}{4}$
 S 1 | S 6
 1919

- 50.00 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of post.
- 50.00 Wash, 30 lks. wide, course SW.
- 80.00 Set an iron post, 3 ft. long, 3 ins. in diam., 24 ins. in the ground, for cor. of T. 10 and 11 N., R. 9 W., with brass cap, marked

TL1N |
 R9W |
 S36 |
 S 1 |
 TL0N |
 1919

from which,
 A palo verde, 5 ins. in diam., brs. S. 7 1/2° W., 93 lks. dist., marked "TL0N R9W S1BT."
 A palo verde, 5 ins. in diam., brs. N. 8° W., 20 lks. dist., marked "TL1N R9W S36 BT."

Land, level. Soil, loose, coarse, decomposed granite, 2nd and 3rd rate.
Timber mesquite and palo verde.
Undergrowth, catclaw, greasewood and cacti.

Survey of North bdy. of Township 10 North, Range 9 West.

Chains.

From the cor. of Ts. 10 and 11 N., R. 9 W., hereinbefore described,
 S. 89° 59' W., on a random line, setting temp. $\frac{1}{4}$ sec. and sec. cōrs. alternately at 40.00 ch. intervals; and at
 480.00 Intersect the original cor. of Ts. 10 and 11 N., Rs. 9 and 10 W., established in January, 1915, which is an iron post, 3 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by 4 pits 24x24x12 ins., one each N., E. and W. of cor., 4 ft. dist., and one S. of cor. 8 ft. dist., and mound of earth 5 ft. base, 2 $\frac{1}{2}$ ft. high, S. of cor. No bearing trees.

Thence,
 N. 89° 59' E., on a true line, bet. secs. 6 and 31.
 Over level land, thru. scattering timber and dense undergrowth.

39.80 Wash, 5 lks. wide, course SW.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ S 31
 S 6
 1919

Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of post.
 66.30 Wash, 10 lks. wide, course SW.
 68.50 Road, brs. NW. and SE.
 69.75 Wash, 30 lks. wide, course SW.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 5, 6, 31 and 32, with brass cap, marked

T11N | R9 W
 S31 | S32
 S 6 | S 5
 T10N
 1919

Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
 Land, level.
 Soil, rocky, 3rd rate.
 Timber, catclaw, palo verde.
 Undergrowth, yucca, greasewood and cacti.

N. 89° 59' E., on a true line, bet. secs. 5 and 32.
 Over level land, thru. scattering timber and dense undergrowth.

12.10 Wash, 10 lks. wide, course S.
 14.80 Wash, 10 lks. wide, course SW,
 26.80 Wash, 10 lks. wide, course SW.
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ S 32
 S 5
 1919

Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of post,
 41.00 Wash, 20 lks. wide, course SW.
 67.40 Wash, 15 lks. wide, course SW.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 4, 5, 32 and 33, with brass cap, marked

T11N | R9 W
 S32 | S33
 S 5 | S 4
 T10N
 1919

Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of post.

North boundary of Township 10 North, Range 9 West.

Chains.

Land, level.
Soil, rocky, 3rd rate.
Timber, palo verde.
Undergrowth, greasewood and cacti.

N. 89° 59' E., on a true line, bet. secs. 4 and 33.
Over rolling land, thru. scattering timber and dense undergrowth.

- 12.80 Wash, 10 lks. wide, course SW.
- 17.20 Wash, 10 lks. wide, course NW. Leave rolling and enter mountainous land.
- Ascend 170 ft., over NW. slope.
- 38.30 Spur, slopes SW. Along broken S. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$	S 33
	S 4
	1919

- 45.25 Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of post.
- 45.25 Wash, 10 lks. wide, course S.
- 51.55 Wash, 20 lks. wide, course SW.
- 56.40 Wash, 10 lks. wide, course NW. Ascend 430 ft., over SW. slope.
- 71.15 Spur, slopes SW. Descend 235 ft., over SE. slope.
- 76.80 Ravine, course SW. Ascend 135 ft., over NW. slope, to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 3, 4, 33 and 34, with brass cap, marked

T10N	R 9W
S 33	S 34
S 4	S 3
T10N	
1919	

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of post.
Land, rolling and mountainous.
Soil, rocky, decomposed granite, 3rd rate.
Timber, palo verde.
Undergrowth, catclaw, greasewood and cacti.

N. 89° 59' E., on a true line, bet. secs. 3 and 34.
Over mountainous land, thru. scattering timber and dense undergrowth. Ascend 300 ft. over broken NW. slope.

- 9.80 Spur, slopes SW.; thence along broken S. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$	S 34
	S 3
	1919

- Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of post.
- Ascend 200 ft., over broken SW. slope.
- 54.60 Ridge, brs. N. and S. Descend 700 ft. over NE. slope, to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 2, 3, 34 and 35, with brass cap, marked

T11N	R 9W
S 34	S 35
S 3	S 2
T10N	
1919	

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of post.
Land, mountainous.
Soil, rocky, 3rd rate.

6. North boundary of Township 10 North, Range 9 West.

Chains. Timber, palo verde.
Undergrowth, greasewood and cacti.

N.89° 59' E., on a true line, bet. secs.2 and 35.
Over rolling and mountainous land, thru. scattering timber
and dense undergrowth.
Ascend slightly over NW.slope.
10.40 Spur, slopes NE. Descend 200 ft. over NE.slope.
38.40 Wash, 20 lks.wide, course SE. Ascend 79 ft. over SW.slope.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec.cor., with brass cap, marked

$\frac{1}{4}$ S 35
S 2
1919

40.50 Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft.high, N.of post.
Spur, slopes SE. Thence along broken S. slope.
54.20 Wash, 5 lks.wide, course SE.
71.60 Wash, 10 lks.wide, course SE.
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
the ground for cor.of secs.1,2,35 and 36, with brass
cap, marked

T11N | R9 W
S35 | S36
S 2 | S 1
T10N
1919

Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W.of post,
Land, rolling and mountainous.
Soil, rocky, 3rd rate.
Timber, palo verde.
Undergrowth, catclaw, yucca, greasewood and cacti.

N.89° 59' E., on a true line, bet. secs.1 and 36.
Over rolling land, thru.scattering timber and dense under-
growth.
0.50 Spur, slopes SE.
15.00 Wash, 5 lks.wide, course SE.
25.70 Wash, 10 lks.wide, course S.
33.80 Wash, 5 lks.wide, course NE.
40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec.cor., with brass cap, marked

$\frac{1}{4}$ S 36
S 1
1919

70.70 Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft.high, N.of post.
Wash, 10 lks.wide, course S.
80.00 The cor.of Ts.10 and 11 N., R.9 W., hereinbefore described.
Land, rolling.
Soil, rocky, 3rd rate.
Timber, palo verde.
Undergrowth, greasewood and cacti.

Boundaries of Township 10 North, Range 9 West.
 Latitudes, departures and Closing errors.

Line designated.	True bearing.	Dist.	Latitudes.		Departures.	
			N.	S.	E.	W.
East boundary,	North,	480.00	480.00			
North boundary,	S. 89° 59' W.	480.00		.14		480.00
West boundary,	South,	480.00		480.00	480.00	
South boundary,	N. 89° 59' E.	479.95	.14		479.95	
Convergency,						.49
<u>Totals.</u>			480.14	480.14	479.95	480.49
				480.14		479.95
<u>Error in latitude.</u>				0.00		
<u>Error in departure.</u>						0.54

8. Survey of Subdivision of Township 10 North, Range 9 West.

Chains.

The original cor. of secs. 1, 2, 35 and 36 on S. bdy. of Tp., established in November, 1914, is an iron post, 3 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by pits in each sec. and mound of earth W. of cor. No bearing trees. Thence,

N. 0° 01' W., bet. secs. 35 and 36.

Over level land, through scattering timber and dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
 S35 | S36
 1919

Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.

43.90 Wash, 10 lks. wide, course SW.

45.00 Wash, 5 lks. wide, course SW.

51.70 Wash, 5 lks. wide, course SW.

52.70 Road, brs. NE. and SW.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 25, 26, 35 and 36, with brass cap, marked

T10N | R9W
 S25 | S25
 S35 | S36
 1919

Dig pits, 18x18x12 ins., in each sec. $5\frac{1}{2}$ ft. dist. Land, level.

Soil, sandy loam, 1st rate.

Timber, mesquite and palo verde.

Undergrowth, yucca, greasewood and cacti.

N. 89° 59' E., on a random line, bet. secs. 25 and 36.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.10 Intersect the E. bdy. of the Tp., 12 lks. S. of the cor. of secs. 25, 30, 31 and 36, hereinbefore described.

Thence,

S. 89° 54' W., on a true line, bet. secs. 25 and 36.

Over level land, thru. scattering timber and dense undergrowth.

40.05 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ S 25
 S 36
 1919

Dig pits, 18x18x12 ins. E. and W. of post, 3 ft. dist.

71.80 Road, brs. NE. and SW.

80.10 The cor. of secs. 25, 26, 35 and 36.

Land, level.

Soil, sandy loam, 1st rate.

Timber, palo verde.

Undergrowth, mesquite, catclaw, greasewood, yucca and cacti.

N. 0° 01' W. bet. secs. 25 and 26.

Over level land, thru. scattering timber and dense undergrowth.

35.00 Wash, 10 lks. wide, course SW.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

Survey of Subdivision of Township 10 North, Range 9 West.

Chains.

S26	$\frac{1}{4}$	S25
1919		

- 45.00 Dig pits, 18x18x12 ins. N. and S. of post, 3 ft. dist.
- 45.00 Wash, 5 lks. wide, course SW.
- 57.70 Road, brs. E. and W.
- 65.00 Wash, 10 lks. wide, course NE.
- 75.00 Wash, 30 lks. wide, course NW.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 23, 24, 25 and 26, with brass cap, marked

T10N	R9	W
S23	S24	
S26	S25	
1919		

Dig pits, 18x18x12 ins., in each sec. 5 1/2 ft. dist. From this cor., the mouth of Bullard's water pipe line in sec. 23, brs. N. 77 1/2° W. See notes of line bet. secs. 2 and 3 for other bearing to same.

Land, level.
 Soil, sandy loam, 2nd rate.
 Timber, palo verde and mesquite.
 Undergrowth, yucca, cacti and catclaw.

- 40.00 N. 89° 54' E., on a random line, bet. secs. 24 and 25. Set temp. 1/4 sec. cor.
- 80.10 Intersect the cor. of secs. 19, 24, 25 and 30, on E. bdy. of Tp., hereinbefore described.
- Thence,
 S. 89° 54' W., on a true line, bet. secs. 24 and 25.
 Over level land, thru. scattering timber and dense undergrowth.
- 1.70 Wash, 20 lks. wide, course SW.
- 22.60 Road, brs. N. and S.
- 25.00 Wash, 10 lks. wide, course SW.
- 30.70 Wash, 20 lks. wide, course S.
- 39.00 Wash, 30 lks. wide, course NW.
- 40.05 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked

$\frac{1}{4}$	S 24
	S 25
1919	


- 47.70 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
- 47.70 Wash, 30 lks. wide, course SW.
- 52.00 Wash, 10 lks. wide, course SW.
- 58.40 Wash, 30 lks. wide, course NW.
- 80.10 The cor. of secs. 23, 24, 25 and 26.
- Land, level.
 Soil, sandy loam, 2nd rate.
 Timber, mesquite and palo verde.
 Undergrowth, yucca, greasewood and cacti.

- N. 0° 01' W., bet. secs. 23 and 24.
- Over rolling land, thru. scattering timber and dense undergrowth.
- 5.10 Wash, 50 lks. wide, course W.
- 15.00 Wash, 10 lks. wide, course W.
- 20.00 Wash, 5 lks. wide, course W.
- 38.80 Wash, 10 lks. wide, course W.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked


10 Subdivision of Township 10 North, Range 9 West.

Chains.

on brass cap,



- 41.00 Dig pits, 18x18x12 ins.; N. and S. of post, 3 ft. dist.
- 53.00 Wash, 3.00 chs.wide, course NW.
- 53.80 Wash, 10 lks.wide, course SW.
- 53.80 Bullard's water pipe line, 4 in.pipe, course SW.
- 60.00 Wash, 10 lks.wide, course SW.
- 70.00 Wash, 10 lks.wide, course NE.
- 75.00 Wash, 30 lks.wide, course NW.
- 80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 24 ins. in the ground, for cor.of secs.13,14,23 and 24, with brass cap, marked




Raise a mound of stone, 2 ft. base, 1 1/2 ft.high, W.of post.
 Land, rolling.
 Soil, coarse sandy loam, 2nd rate.
 Timber, mesquite and palo verde.
 Undergrowth, catclaw, greasewood and cacti.

- 40.00 N. 89° 54' E., on a random line, bet. secs. 13 and 24.
- 80.18 Set temp. 1/4 sec.cor.
- 80.18 Intersect the cor. of secs. 13, 18, 19 and 24, on E. bdy. of Tp., hereinbefore described.

Thence,
 S. 89° 54' W., on a true line, bet. secs. 13 and 24.
 Over rolling land, thru. scattering timber and dense undergrowth.

- 5.00 Wash, 10 lks.wide, course NW.
- 17.50 Wash, 15 lks.wide, course NW.
- 18.80 Spur, slopes NW.
- 20.00 Wash, 30 lks.wide, course NW.
- 25.00 Wash, 40 lks.wide, course NW.
- 29.00 Spur, slopes NW.
- 31.60 Road, brs. N. and S.
- 32.50 Wash, 20 lks.wide, course N.
- 40.09 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec.cor., with brass cap, marked




- 42.00 Raise a mound of stone, 2 ft.base, 1 1/2 ft.high, N.of post.
 - 50.15 Old road, brs. N. and S.
 - 50.15 Wash, 20 lks.wide, course NE.
 - 63.30 Bullard's water pipe line, 4 in.pipe, course SW.
 - 75.00 Wash, 10 lks.wide; course N.
 - 80.18 The cor. of secs. 13, 14, 23 and 24.
- Land, rolling.
 Soil, coarse sandy loam, 2nd rate.
 Timber, palo verde and mesquite.
 Undergrowth, greasewood and cacti.

- 12.50 N. 0° 01' W., bet. secs. 13 and 14.
- 12.50 Over rolling and mountainous land, thru. scattering timber and dense undergrowth.
- 12.50 Left bank, of Date Creek, brs. E. and W. Thence across Date Creek, course W.

Subdivision lines of Township 10 North, Range 9 West.


Chains.

- 13.50 Right bank of Date Creek, bears E. and W. Leave creek bed. Ascend 130 ft., over S. slope.
- 32.20 Spur, slopes SE. Descend 30 ft., over N. slope.
- 35.00 Wash, 10 lks. wide, course SE. Ascend 210 ft., over S. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked




Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of post.

- 54.85 Spur, slopes SE. Descend 60 ft. over N. slope.
- 59.74 Wash, 10 lks. wide, course E. Ascend 50 ft., over S. slope.
- 62.00 Natural rock tank, bears E. 31.00 chs. dist.
- 65.00 Spur, slopes SE. Descend 120 ft., over N. slope.
- 80.00 Wash, 5 lks. wide, course NE.
- Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 11, 12, 13 and 14, with brass cap, marked



Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of post.
 Land, rolling and mountainous.
 Soil, rocky, 3rd rate.
 Timber, palo verde.
 Undergrowth, catclaw, yucca, greasewood and cacti.

- 40.00 N. $89^{\circ} 54'$ E., on a random line, bet. secs. 12 and 13. Set temp. $\frac{1}{4}$ sec. cor.
- 80.08 Intersect E. bdy. of Tp. at a point 14 lks. S. of the cor. of secs. 7, 12, 13 and 18, hereinbefore described. Thence, S. $89^{\circ} 48'$ W., on a true line, bet. secs. 12 and 13. Over rolling land, thru. scattering timber and dense undergrowth.
- 22.00 Wash, 10 lks. wide, course SW.
- 40.04 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap, marked




- 43.50 Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of post.
- 50.70 Bullard's water pipe line, 4 in. pipe, course S.
- 71.40 Wash, 50 lks. wide, course S.
- 71.40 Wash, 10 lks. wide, course S.
- 80.08 The cor. of secs. 11, 12, 13 and 14. Land, rolling. Soil, rocky, 3rd rpte. Timber, catclaw. Undergrowth, greasewood, cacti, and yucca.

- N. $0^{\circ} 01'$ W., bet. secs. 11 and 12. Over rolling land, thru. scattering timber and dense undergrowth.
- 5.85 Wash, 20 lks. wide, course SE.
- 15.00 Wash, 10 lks. wide, course SW.
- 21.50 Wash, 5 lks. wide, course SW.


12. Subdivision of Township 10 North, Range 9 West.

Chains.

- 30.00 Cabin, bears S.14 $\frac{1}{4}$ ° E.
- 30.85 Spur, slopes W.100 ft. above sec.cor.
- 40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec.cor., with brass cap, marked




- 43.00 Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft.high,W.of post.
- 43.00 Wash, 5 lks.wide, course W.
- 50.00 Low spur,slopes SE.
- 58.20 Wash,10 lks.wide, course SE.
- 64.00 Wash,10 lks.wide, course E.
- 70.00 Spur, slopes E.
- 78.00 Wash,10 lks.wide, course SE.
- 80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 24 ins. in the ground, for cor.of secs.1,2,11 and 12, with brass cap, marked



Raise a mound of stone, 2 ft.base, 1 $\frac{1}{2}$ ft.high,W. of post.
 Land, rolling.
 Soil,rocky, 3rd rate.
 Timber, palo verde.
 Undergrowth, cacti.

- 40.00 N.89°48' E., on a random line, bet. secs. 1 and 12.
- 40.00 Set temp. $\frac{1}{4}$ sec.cor.
- 80.10 Intersect the E. bdy.of the Tp., 2 lks.S.of the cor.of secs. 1,6,7 and 12,hereinbefore described.
- Thence,
- S.89°47' W.on a true line, bet. secs.1 and 12.
- Over rolling land, thru. scattering timber and dense undergrowth.
- 2.00 Wash, 20 lks.wide, course SE.
- 12.80 Spur,slopes SW.
- 23.00 Wash, 5 lks.wide, course S.
- 32.40 Wash, 10 lks.wide, course S.
- 40.05 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec.cor., with brass cap, marked



- 49.00 Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N.of cor.
- 49.00 Wash, 10 lks.wide, course SE.
- 55.00 Spur,slopes S.
- 65.70 Wash,30 lks.wide, course S.
- 70.00 Spur,slopes S.
- 75.00 Wash, 15 lks.wide, course SE.
- 80.10 The cor.of secs.1,2,11 and 12.
- Land, rolling.
- Soil,rocky,3rd rate.
- Timber, palo verde.
- Undergrowth, greasewood and cacti.

- 40.00 N.0°01' W., on a random line, bet. secs.1 and 2.
- 40.00 Set temp. $\frac{1}{4}$ sec.cor.
- 80.35 Intersect the N. bdy.of the Tp., 5 lks.west of the cor.

Chains.


of secs.1,2,35 and 36, hereinbefore described.

Thence,

S.0° 01' W., on a true line, bet. secs.1 and 2.

Over rolling land, thru. scattering timber and dense undergrowth.

- 6.80 Wash, 10 lks. wide, course SW.
- 17.60 Spur, slopes SE.
- 26.80 Wash, 10 lks. wide, course SE.
- 40.35 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of post.

- 41.40 Wash, 20 lks. wide, course SE.
- 47.50 Spur, slopes SE.
- 73.00 Wash, 10 lks. wide, course SE.
- 80.35 The cor. of secs. 1, 2, 11 and 12.

Land, rolling.
 Soil, coarse decomposed granite, 2nd rate.
 Timber, mesquite and palo verde.
 Undergrowth, catclaw, greasewood and cacti.


The original cor. of secs. 2, 3, 34 and 35 on S. bdy. of Tp. established in November, 1914, is an iron post, 3 ins. in diam., projecting 12 ins. above ground, firmly set properly marked on brass cap, and witnessed by 4 pits, one in each sec. and mound of earth W. of cor. No bearing trees.

Thence,

N.0° 01' W., bet. secs. 34 and 35.


Over level land, thru. scattering timber and dense undergrowth.

- 17.20 Wash, 10 lks. wide, course SW.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.

- 76.10 Wash, 10 lks. wide, course SW.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 26, 27, 34 and 35, with brass cap, marked



Dig pits, 18x18x12 ins., in each sec. 5 $\frac{1}{2}$ ft. dist.

Land, level.

Soil, sandy loam, 1st rate.

Timber, mesquite and palo verde.

Undergrowth, catclaw, greasewood, yucca and cacti.

N.89° 59' E., on a random line, bet. secs. 26 and 35.

- 40.00 Set temp. $\frac{1}{4}$ sec. cor.

- 80.10 Intersect N. and S. line, 7 lks. S. of the cor. of secs. 25,

14 Subdivision of Township 10 North, Range 9 West.

Chains.

26, 35 and 36.

Thence, S. 89° 56' W., on a true line, bet. secs. 26 and 35. Over level land, thru. scattering timber and dense undergrowth.

37.80 Wash, 10 lks. wide, course NW.

40.05 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked

1/4 S 26
S 35
1919

Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.

42.00 Wash, 5 lks. wide, course NW.

53.00 Wash, 10 lks. wide, course NW.

80.10 The cor. of secs. 26, 27, 34 and 35.

Land level.

Soil, sandy loam, 1st rate.

Timber, mesquite.

Undergrowth, catclaw, greasewood, yucca and cacti.

N. 0° 01' W., bet. secs. 26 and 27.

Over level land, thru. scattering timber and dense undergrowth.

2.70 Wash, 10 lks. wide, course W.

13.30 Wash, 10 lks. wide, course W.

15.10 Wash, 5 lks. wide, course W.

19.50 Wash, 10 lks. wide, course W.

35.60 Wash, 10 lks. wide, course W.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked

1/4 S27 | S26
1919

Dig pits, 18x18x12 ins. N. and S. of post, 3 ft. dist.

50.00 Wash, 10 lks. wide, course W.

75.00 Wash, 5 lks. wide, course NE.

79.00 Wash, 20 lks. wide, course NW.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 22, 23, 26 and 27, with brass cap, marked

T10N | R9 W
S22 | S23
S27 | S26
1919

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of post.

Land level.

Soil, sandy loam, 1st rate.

Timber, palo verde and mesquite.

Undergrowth, catclaw, yucca, greasewood and cacti.

N. 89° 56' E., on a random line, bet. secs. 23 and 26.

40.00 Set temp. 1/4 sec. cor.

80.12 Intersect the cor. of secs. 23, 24, 25 and 26.

Thence,

S. 89° 56' W., on a true line, bet. secs. 23 and 26.

Over rolling land, thru. scattering timber and dense undergrowth.

6.20 Wash, 10 lks. wide, course NW.

12.80 Wash, 10 lks. wide, course NW.

16.70 Wash, 10 lks. wide, course NW.

30.00 Wash, 20 lks. wide, course N.

Subdivision lines of Township 10 North, Range 9 West.

Chains.

35.00 Wash, 5 lks.wide, course N.
 40.06 Set an iron post 3 ft.long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec.cor., with brass cap, marked

$\frac{1}{4}$ S 23
 S 26
 1919

40.60 Dig pits, 18x18x12 ins., E. and W.of post, 3 ft. dist.
 Road, brs.N. and S.
 51.00 Wash, 10 lks.wide, course NE.
 58.90 Road, brs.N. and S.
 73.00 Wash, 10 lks.wide, course SW.
 80.12 The cor.of secs.22,23,26 and 27.
 Land, rolling.
 Soil, coarse, sandy loam, 2nd rate.
 Timber, palo verde and mesquite.
 Undergrowth, catclaw, greasewood, cacti and yucca.

N.0° 01' W., bet. secs. 22 and 23.
 Over rolling land, thru. scattering timber, and dense undergrowth.

Ascend 20 ft., over SW.slope.
 3.90 Spur, slopes NE.. Descend 120 ft., over NE.slope.
 5.75 Wash, 5 lks.wide, course NW.
 11.50 Wash, 10 lks.wide, course NW.
 32.40 Wash, 10 lks.wide, course NE.
 39.00 Road, brs.NE. and SW/
 40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec.cor., with brass cap, marked

$\frac{1}{4}$
 S22 | S23
 1919

54.00 Dig pits, 18x18x12 ins.N. and S. of post 3 ft. dist.
 Left bank of Date Creek, course NE. and SW. Thence across Date Creek, course SW.
 54.30 Road, brs.NW. and SE.
 59.30 Right bank of Date Creek, bears NE. and SW. Leave creek bed. Ascend 20 ft., over SW.slope.
 67.50 Spur, slopes W. Thence along W.slope.
 71.20 Spur, slopes NW.
 75.00 Wash, 10 lks.wide, course SW.
 80.00 Set an iron post 3 ft.long, 2 ins. in diam., 24 ins. in the ground, for cor.of secs. 14,15,22 and 23, with brass cap, marked

T10N | R9 W
 S15 | S14
 S22 | S23
 1919

Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft.high, W.of post.
 Land, rolling.
 Soil, sandy loam, 2nd rate.
 Timber, palo verde and mesquite.
 Undergrowth, catclaw, greasewood and cacti.

40.00 N.89° 56' E., on a random line, bet. secs.14 and 23.
 Set temp, $\frac{1}{4}$ sec.cor.
 80.20 Intersect the cor.of secs. 13,14, 23 and 24.
 Thence,
 S.89° 56' W., on a true line, bet. secs. 14 and 23.
 Over rolling land, thru. scattering timber and dense undergrowth.
 0.20 Wash, 5 lks.wide, course N.

16 Subdivision of Township 10 North Range 9 West.

Chains.
 12.30 Spur, slopes NW. Cabin brs. N. $35\frac{1}{4}^\circ$ E.
 24.55 Spur, slopes SW.
 33.70 Left bank of Date Creek, bears NE. and SW. Thence across Date Creek, course SW.
 39.40 Right bank of date Creek, bears NE. and SW. Leave creek bed.
 40.10 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ S 14
 S 23
 1919

from which,
 A willow, 5 ins. in diam., brs. N. $75\frac{3}{4}^\circ$ E., 33 lks. dist. marked " $\frac{1}{4}$ S 14 BT."
 A willow, .16 ins. in diam., brs. S. 36° W., 75 lks. dist., marked " $\frac{1}{4}$ S 23 BT."

48.00 Wash, 20 lks. wide, course S.
 60.00 Wash, 10 lks. wide, course SE.
 70.00 Wash, 10 lks. wide, course S.
 80.20 The cor. of secs. 14, 15, 22 and 23.
 Land, rolling.
 Soil, rocky, 3rd rate.
 Timber, palo verde and mesquite.
 Undergrowth, greasewood and cacti.

N. $0^\circ 01'$ W., bet. secs. 14 and 15.
 Over rolling and mountainous land, thru. scattering timber and dense undergrowth.
 Ascend 40 ft. over SE. slope.

3.00 Spur, slopes SW. Descend 40 ft., over N. slope.
 10.00 Wash, 10 lks. wide, course SW. Asc. 50 ft. over SE. slope.
 13.50 Spur, slopes SW. Descend 30 ft., over N. slope.
 17.30 Wash, 10 lks. wide, course SW. Ascend 70 ft., over SE. slope.
 22.10 Spur, slopes SW. Descend 60 ft. over N. slope.
 27.90 Wash, 10 lks. wide, course SW. Ascend 300 ft., over SE. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S15 | S14
 1919

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of post.

60.00 Spur, slopes S.
 72.40 Spur, slopes SE.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for cor. of secs. 10, 11, 14 and 15, with brass cap, marked

T10N | R9W
 S10 | S11
 S15 | S14
 1919


Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of post.
 Land, rolling and mountainous.
 Soil, rocky, 3rd rate.
 Timber, palo verde.
 Undergrowth, greasewood and cacti.

N. $89^\circ 56'$ E., on a random line, bet. secs. 11 and 14.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.22 Intersect the cor. of secs. 11, 12, 13 and 14.
 Thence,
 S. $89^\circ 56'$ W., on a true line, bet. secs. 11 and 14.

Subdivision of Township 10 North, Range 9 West.

Chains.

- Over rolling and mountainous land, thru. scattering timber and dense undergrowth. Ascend 280 ft., over E. slope.
- 13.00 Head of Bullard's water pipe line in sec. 12, brs. N. 55 1/2° E.
- 14.00 Spur, slopes SE. Descend 240 ft., over W. slope.
- 38.00 Wash, 10 lks. wide, course SE. Ascend 140 ft., over E. slope.
- 40.11 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked




- Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of post.
- 46.50 Spur, slopes SE. Descend 140 ft., over W. slope.
- 55.00 Wash, 10 lks. wide, course SW.
- 57.00 Wash, 10 lks. wide, course S.
- 70.00 Wash, 10 lks. wide, course SE. Ascend 150 ft., over E. slope.
- 80.22 The cor. of secs. 10, 11, 14 and 15.
- Land, rolling and mountainous.
- Soil, rocky, 3rd rate.
- Timber, palo verde and mesquite.
- Undergrowth, catclaw, greasewood and yucca.

- N. 0° 01' W., bet. secs. 10 and 11.
- Over rolling land, thru. scattering timber and dense undergrowth.
- 0.30 Spur, slopes NW.
- 8.90 Wash, 5 lks. wide, course W.
- 13.30 Wash, 10 lks. wide, course W.
- 28.30 Wash, 10 lks. wide, course W.
- 40.00 Spur, slopes SE.
- Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked



- Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of post.
- 59.40 Wash, 10 lks. wide, course SE.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 2, 3, 10 and 11, with brass cap, marked



- Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of post.
- Land, rolling.
- Soil, rocky, 3rd rate.
- Timber, palo verde.
- Undergrowth, greasewood and cacti.

- N. 89° 56' E., on a random line, bet. secs. 2 and 11.
- 40.00 Set temp. sec. cor.
- 80.20 Intersect N. and S. line, 2 lks. S. of the cor. of secs. 1, 2, 11 and 12.
- Thence,
- S. 89° 55' W., on a true line, bet. secs. 2 and 11.
- Over rolling land, through scattering timber and dense undergrowth.
- 1.00 Wash, 10 lks. wide, course SE.
- 21.20 Wash, 10 lks. wide, course S.
- 27.00 Wash, 10 lks. wide, course SE.

18 Subdivision of Township 10 North, Range 9 West.

Chains.

- 38.70 Spur, slopes S.
- 40.10 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ S 2
S 11
1919

- 42.10 Wash, 10 lks. wide, course SE.
- 46.40 Spur, slopes SE.
- 72.70 Wash, 10 lks. wide, course SW.
- 75.00 Spur, slopes S.
- 77.60 Wash, 5 lks. wide, course SE.
- 80.20 The cor. of secs. 2, 3, 10 and 11.
Land, rolling.
Soil, rocky, 3rd rate.
Timber, mesquite and palo verde.
Undergrowth, catclaw, greasewood, yucca and cacti.

- 40.00 N. 0° 01' E., on a random line, bet. secs. 2 and 3.
Set temp. $\frac{1}{4}$ sec. cor.
- 80.40 Intersect the N. bdy. of the Tp., 25 lks. W. of the cor. of secs. 2, 3, 34 and 35, hereinbefore described.
Thence,
S. 0° 12' W., on a true line, bet. secs. 2 and 3.
Over mountainous land, thru. scattering timber and dense undergrowth. Ascend 340 ft., over NE. slope.
- 11.15 Spur, slopes SE. Mouth of Bullard's water pipe line in sec. 23, brs. S. 7 $\frac{3}{4}$ ° E. Descend 900 ft. over SW. slope.
- 40.40 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
S 3 | S 2
1919

- 60.00 Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of post.
Head of wash, course SE. Ascend 130 ft., over NE. slope.
- 72.10 Spur, slopes SE. Descend 140 ft., over SE. slope.
- 80.40 The cor. of secs. 2, 3, 10 and 11.
Land, rolling and mountainous.
Soil, rocky, 3rd rate.
Timber, palo verde.
Undergrowth, greasewood, catclaw and cacti.


- The original cor. of secs. 3, 4, 33 and 34 on S. bdy. of Tp. established in November, 1914, is an iron post 3 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by 4 pits, one in each sec., and mound of earth W. of cor.
No bearing trees.
Thence,
N. 0° 02' W., bet. secs. 33 and 34.
Over level land, thru. scattering timber and dense undergrowth.
- 0.50 Road, brs. E. and W.
- 10.30 Wash, 10 lks. wide, course SW.
- 18.00 Wash, 10 lks. wide, course SW.
- 34.00 Wash, 10 lks. wide, course SW.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
S 33 | S 34
1919

Subdivision of township 10 North, Range 9 West.

Chains.

48.90 Raise a mound of stone 2 ft. base, 1½ ft. high, W. of post,
 Wash, 10 lks. wide, course SW.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in
 the ground, for cor. of secs. 27, 28, 33 and 34, with
 brass cap, marked




Dig pits, 18x18x12 ins. in each sec. 5½ ft. dist.
 Land, level.
 Soil, sandy loam, 1st rate.
 Timber, mesquite, and palo verde.
 Undergrowth, catclaw, greasewood, cacti and yucca.

40.00 N. 89° 59' E., on a random line, bet. secs. 27 and 34.
 Set temp. ¼ sec. cor.
 80.08 Intersect N. and S. line, 2 lks. N. of cor. of secs. 26, 27,
 34 and 35.


Thence,
 West, on true line, bet. secs. 27 and 34.
 Over level land, thru. scattering timber and dense under-
 growth.

3.80 Wash, 10 lks. wide, course NW.
 13.60 Wash, 10 lks. wide, course NW.
 15.30 Wash, 10 lks. wide, course NW.
 17.90 Wash, 10 lks. wide, course N.
 24.00 Wash, 10 lks. wide, course N.
 35.00 Wash, 10 lks. wide, course NE.
 40.04 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the
 the ground, for ¼ sec. cor., with brass cap, marked



42.50 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
 Wash, 10 lks. wide, course N.
 47.70 Wash, 10 lks. wide, course N.
 80.08 The cor. of secs. 27, 28, 33 and 34.
 Land, level.
 Soil, sandy loam, 1st rate.
 Timber, palo verde.
 Undergrowth, catclaw, mesquite and yucca.

19:10 N. 0° 02' W., bet. secs. 27 and 28.
 Wash, 10 lks. wide, course NW.
 33.30 Over rolling land, through scattering timber and dense
 Wash, 20 lks. wide, course W. undergrowth.
 38.50 Wash, 10 lks. wide, course SW.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for ¼ sec. cor., with brass cap, marked



55.90 Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.
 Wash, 10 lks. wide, course SW.
 73.60 Wash, 10 lks. wide, course SW.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in
 the ground, for cor. of secs. 21, 22, 27 and 28, with
 brass cap, marked

20 Subdivision of Township 10 North, Range 9 West.

Chains.

TION	R9 W
S21	S22
S28	S29
1919	

Dig pits, 18x18x12 ins., in each sec. 5½ ft. dist.
 Land, rolling.
 Soil, sandy loam, 2nd rate.
 Timber, mesquite and palo verde.
 Undergrowth, greasewood, cacti and yucca.

- East, on a random line, bet. secs. 22 and 27.
 40.00 Set temp. ¼ sec. cor.
 80.08 Intersect N. and S. line, 7 lks. S. of the cor. of secs. 22, 23, 26 and 27.
 Thence,
 S. 89° 57' W., on a true line, bet. secs. 22 and 27.
 Over rolling land, thru. scattering timber and dense undergrowth.
- 1.60 Wash, 10 lks. wide, course NW.
 - 6.20 Wash, 10 lks. wide, course NE.
 - 8.40 Sawyer's house, bears N. 43½° W.
 - 20.30 Wash, 10 lks. wide, course NW,
 - 25.00 Wash, 10 lks. wide, course N.
 - 29.00 Wash, 10 lks. wide, course NE.
 - 40.04 Set an iron post, 1 in. in diam., 3 ft. long, 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

¼	S 22
	S 27
1919	

- 80.08 Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of post. The cor. of secs. 21, 22, 27 and 28.
 Land, rolling.
 Soil, sandy loam, 2nd rate.
 Timber, palo verde and mesquite.
 Undergrowth, catclaw, yucca and cacti.

- N. 0° 02' W., bet. secs. 21 and 22.
 Over rolling land, thru. scattering timber and dense undergrowth.
- 2.80 Sawyer's house, brs. N. 12¾° E.
 - 10.00 Wash, 10 lks. wide, course NW.
 - 12.80 Wash, 10 lks. wide, course NW.
 - 15.00 Wash, 10 lks. wide, course W.
 - 29.50 Three strand barbed wire fence, brs. E. and W.
 - 39.70 Left bank of Date Creek, brs. E. and W. Thence across dry bed of Date Creek, course W.
 - 39.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for witness cor. to ¼ sec. cor., with brass cap, marked


	W C	
	¼	
S21		S22
1919		

from which,
 A catclaw, 12 ins. in diam., brs. S. 7½° E., 20 lks. dist., marked "¼ S 22 WC BT."
 A catclaw, 6 ins. in diam., brs. N. 7¼° W., 106 lks. dist., marked "¼ S 21 WC BT."

Subdivision of Township 10 North, Range 9 West.


Chains.

- 40.00 True point for 1/4 sec.cor. falls in Date Creek; therefore establish witness cor. at a point 1.00 ch. S. 0°2'E.
- 56.50 Right bank of Date Creek, bears E. and W. Leave bed of creek.
- 80.00 Set an iron post 3 ft.long, 2 ins. in diam., 24 ins. in the ground, for cor.of secs.15, 16, 21 and 22, with brass cap, marked




Raise a mound of stone, 2 ft. base, 1 1/2 ft.high, W.of post. Land, rolling.
 Soil, sandy loam, 1st and 2nd rate.
 Timber, mesquite, catclaw, palo verde and desert willow.
 Undergrowth, greasewood and cacti.

- N.89°57'E., on a random line, bet. secs.15 and 22.
- 40.00 Set temp. 1/4 sec.cor.
- 80.08 Intersect the cor. of secs. 14,15,22 and 23.
 Thence,
 S.89° 57'W., on a true line, bet. secs.15 and 22.
 Over rolling land, thru. scattering timber and dense undergrowth.
- 8.40 Wash, 20 lks.wide, course S.
- 15.20 Spur, slopes S.
- 19.94 Wash, 10 lks.wide, course S.
- 21.69 Spur, slopes S.
- 31.17 Wash, 10 lks.wide, course S.
- 34.17 Spur, slopes S.
- 40.04 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec.cor., with brass cap, marked



- Raise a mound of stone, 2 ft. base, 1 1/2 ft.high, N.of post.
- 42.00 Three strand barbed wire fence, brs.NW. and SE.
- 45.20 Three strand barbed wire fance, bears N. and S.
- 76.40 Three strand barbed wire fence, bears N.and S.
- 78.07 Spur, slopes S.
- 79.50 Road brs.NW. and SE.
- 79.68 Wash.10 lks.wide, course SE.
- 80.08 The cor.of secs.15,16,21 and 22.
 Land, rolling.
 Soil, rocky, 3rd rate.
 Timber, mesquite and palo verde.
 Undergrowth, greasewood and cacti.

- N.0° 02' W., bet. secs.15 and 16.
 Over rolling land, thru. scattering timber and dense undergrowth. Ascend 190 ft., over gradual S.slope.
- 2.00 Wash; 10 lks.wide, course SE.
- 2.30 Fence brs.N.60°E. and S.60°W.
- 4.00 Road, brs.NW. and SE.
- 30.00 Spur, slopes SE. Descend 80 ft., over N.slope.
- 33.90 Wash, 40 lks.wide, course W.
- 40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec.cor., with brass cap, marked



22 Subdivision of Township 10 North, Range 9 West.

Chains.

- 42.70 Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of post. Wash, 10 lks. wide, course SW.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 9, 10, 15 and 16, with brass cap, marked

T10N	R9 W
S 9	S10
S16	S15
1919	

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor. Land, rolling.
Soil, rocky, 2nd and 3rd rate.
Timber, palo verde, mesquite and catclaw.
Undergrowth, yucca, greasewood and cacti.

- 40.00 N. 89°57'E., on a random line, bet. secs. 10 and 15. Set temp. ¼ sec. cor.
- 80.18 Intersect N. and S. line, 16 lks. S. of the cor. of secs. 10, 11, 14 and 15.
Thence,
S. 89°50'W., on a true line, bet. secs. 10 and 15.
Over rolling land, thru. scattering timber and dense undergrowth.
- 6.30 Spur, slopes S.
- 38.70 Wash, 30 lks. wide, course SW.
- 40.09 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

¼ S 10
S 15
1919

- 45.20 Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of post. Wash, 10 lks. wide, course SW.
- 53.10 Spur, slopes SW.
- 60.00 Wash, 10 lks. wide, course S.
- 65.00 Spur, slopes S.
- 71.90 Wash, 5 lks. wide, course NW.
- 75.00 Spur, slopes NW.
- 80.18 The cor. of secs. 9, 10, 15 and 16.
Land, rolling.
Soil, rocky, 3rd rate.
Timber, palo verde.
Undergrowth, greasewood and cacti.

- N. 0°02'W., bet. secs. 9 and 10.
Over rolling land, thru. scattering timber and dense undergrowth.
- 4.00 Wash, 10 lks. wide, course W. Ascend 110 ft., over S. slope.
- 17.70 Top of knoll; descend 110 ft., over N. slope.
- 23.10 Wash, 10 lks. wide, course W.
- 27.20 Wash, 10 lks. wide, course SW.
- 33.50 Wash, 10 lks. wide, course SW.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

¼
S 9 S10
1919

- 42.00 Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of post. Wash, 10 lks. wide, course SW.

Subdivision of Township 10 North, Range 9 West.

Chains.

69.70 Wash, 10 lks. wide, course SW.
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 3, 4, 9 and 10, with brass cap, marked

T10N R9W
S 4 | S 3
S 9 | S 10
1919

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of post.
Land rolling.
Soil, rocky, 3rd rate.
Timber, palo verde.
Undergrowth, greasewood and cacti.

40.00 N. 89° 50' E., on a random line, bet. secs. 3 and 10.
Set temp. 1/4 sec. cor.
80.12 Intersect N. and S. line, 5 lks. S. of the cor. of secs. 2, 3, 10 and 11.

Thence,
S. 89° 48' W., on a true line, bet. secs. 3 and 10.
Over rolling land, thru. scattering timber and dense undergrowth.

Ascend 160 ft., over SE. slope.
5.00 Spur, slopes S. Descend 350 ft., over W. slope.
40.06 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked

S 3
S 10
1919

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of post.
60.00 Wash, 30 lks. wide, course SW.
65.00 Wash, 20 lks. wide, course SW.
67.50 Wash, 10 lks. wide, course S.
72.00 Wash, 10 lks. wide, course S.
80.12 The cor. of secs. 3, 4, 9 and 10.
Land, rolling.
Soil, rocky, 3rd rate.
Timber, palo verde and mesquite.
Undergrowth, greasewood, catclaw and cacti.

40.00 N. 0° 12' E., on a random line, bet. secs. 3 and 4.
Set temp. 1/4 sec. cor.
80.32 Intersect the N. bdy. of the Tp., 5 lks. W. of the cor. of secs. 3, 4, 33 and 34, hereinbefore described. Thence, S. 0° 14' W., on a true line, bet. secs. 3 and 4.
Over rolling land, thru. scattering timber and dense undergrowth.

Descend 140 ft., over broken SW. slope, over cliffs and slide rock.
28.80 Spur, slopes SW. Along broken W. slope.
40.32 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked

1/4
S 4 | S 3
1919

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of post.
55.00 Wash, 10 lks. wide, course SW.
67.30 Wash, 5 lks. wide, course SW.
80.32 The cor. of secs. 3, 4, 9 and 10.
Land, rolling.

24 Subdivision of Township 10 North, Range 9 West.

Chains.

Soil, rocky, 3rd rate.
Timber, palo verde and mesquite.
Undergrowth, greasewood, catclaw and cacti.

The original cor. of secs. 4, 5, 32 and 33 on S. bdy. of Tp., established in November, 1914, is an iron post, 3 ins. in diam., projecting 12 ins. above ground, firmly set properly marked on brass cap, and witnessed by 4 pits, one in each sec., and mound of earth W. of cor. No bearing trees.

Thence,
N. 0° 02' W., bet. secs. 32 and 33.
Over rolling land, thru. scattering timber and dense undergrowth.

- .65 Wash, 10 lks. wide, course W.
- 8.50 Wash, 5 lks. wide, course SW.
- 10.40 Wash, 5 lks. wide, course W.
- 13.90 Wash, 10 lks. wide, course W.
- 30.70 Wash, 10 lks. wide, course W.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked with brass cap,

S32 | S33
1919

Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of post.

- 52.50 Wash, 10 lks. wide, course SW.
- 58.00 Wash, 5 lks. wide, course SW.
- 63.00 Wash, 5 lks. wide, course SW.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 28, 29, 32 and 33, with brass cap, marked.

T10N | R 9W
S29 | S28
S32 | S33
1919

Dig pits, 18x18x12 ins., in each sec. 5 $\frac{1}{2}$ ft. dist.
Land, rolling.
Soil, sandy loam, 2nd rate.
Timber, mesquite and palo verde.
Undergrowth, yucca, greasewood and cacti.

- 40.00 N. 89° 59' E., on a random line, bet. secs. 28 and 33. Set temp. $\frac{1}{4}$ sec. cor.
- 79.98 Intersect N. and S. line, 2 lks. N. of the cor. of secs. 27, 28, 33 and 34.

Thence,
West, on a true line, bet. secs. 28 and 33.
Over rolling land, thru. scattering timber and dense undergrowth.

- 24.80 Wash, 10 lks. wide, course S.
- 39.99 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S 28
 $\frac{1}{4}$
S 33
1919


- 42.80 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist. Wash, 10 lks. wide, course SW.
- 79.40 Wash, 10 lks. wide, course SW.
- 79.98 The cor. of secs. 28, 29, 32 and 33.

Chains.

Land, rolling.
Soil, sandy loam, 2nd rate.
Timber, mesquite and palo verde.
Undergrowth, greasewood and cacti.


N.0°02'W., bet. secs. 28 and 29.
Over rolling land, thru. scattering timber and dense undergrowth.

- 7.00 Wash, 10 lks. wide, course SW.
- 28.10 Wash, 10 lks. wide, course SW.
- 35.00 Wash, 5 lks. wide, course SW.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of post.

- 52.40 Wash, 50 lks. wide, course SW.
- 53.70 Cut bank, 15 ft. high, bears NE. and SW.
- 57.40 Spur, slopes SW.
- 59.40 Wash, 5 lks. wide, course NW.
- 62.40 Wash, 10 lks. wide, course SW.
- 65.20 Wash, 5 lks. wide, course SW.
- 72.00 Spur, slopes W. Descend 180 ft., over N. slope, to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 20, 21, 28 and 29, with brass cap, marked



from which,
 A willow, 7 ins. in diam., brs. N. $2\frac{3}{4}$ ° E., 131 lks. dist., mark "TLON R9W S21 BT."
 A willow, 5 ins. in diam., brs. N. $9\frac{3}{4}$ ° W., 134 lks. dist., mark TLON R9W S20 BT."

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of post.
Land, rolling.


Soil, sandy loam, 2nd rate.
Timber, palo verde and desert willow.
Undergrowth, catclaw, yucca, greasewood and cacti.

East, on a random line, bet. secs. 21 and 28.

- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 79.86 Intersect N. and S. line, 9 lks. N. of the cor. of secs. 21, 22, 27 and 28.

Thence,
N. $89^{\circ}56'$ W., on a true line, bet. secs. 21 and 28.
Over rolling land, thru. scattering timber and dense undergrowth.

- 5.90 Spur, slopes N. Descend 270 ft., over gradual NW. slope.
- 39.93 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked




26 Subdivision of Township 10 North, Range 9 West.

Chains.


60.00 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
 Cut bank, 10 ft. high, bears NE. and SW.
 79.86 The cor. of secs. 20, 21, 28 and 29.
 Land, rolling.
 Soil, sandy loam, 2nd rate.
 Timber, palo verde and catclaw.
 Undergrowth, yucca, greasewood and cacti.

N. 0° 02' W., bet. secs. 20 and 21.
 Over rolling land, thru. scattering timber and dense undergrowth.

0.10 Left bank of Date Creek, bears E. and W. Thence across dry bed of Date Creek; course W.
 2.00 Right bank of Date Creek, bears E. and W. Leave creek bed. Ascend 210 ft. over S. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked




60.00 Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.
 Spur, slopes E.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 16, 17, 20 and 21, with brass cap, marked



Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of post.
 Land, rolling.
 Soil, rocky, 3rd rate.
 Timber, palo verde and catclaw.
 Undergrowth, mesquite, yucca and greasewood.

40.00 S. 89° 56' E., on a random line, bet. secs. 16 and 21.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.90 Intersect the cor. of secs. 15, 16, 21 and 22.
 Thence,
 N. 89° 56' W., on a true line, bet. secs. 16 and 21.
 Over rolling land, thru. scattering timber and dense undergrowth.

7.40 Three strand barbed wire fence, bears NE. and SW.
 9.00 Wash, 10 lks. wide, course S.
 16.00 Wash, 30 lks. wide, course S.
 19.25 Spur, slopes S.
 22.00 Wash, 20 lks. wide, course S.
 25.00 Wash, 10 lks. wide, course S.
 28.50 Spur, slopes S.
 30.00 Wash, 10 lks. wide, course S.
 37.00 Spur, slopes SW.
 39.95 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked




Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of post.
 51.50 Wash, 20 lks. wide, course SE.
 70.90 Wash, 10 lks. wide, course SW.
 74.00 Wash, 5 lks. wide, course SE.


Chains.

79.90 The cor. of secs. 16, 17, 20 and 21.
 Land, rolling.
 Soil, sandy loam, 2nd rate.
 Timber, mesquite and palo verde.
 Undergrowth, catclaw, yucca, greasewood and cacti.

N.0° 02' W., bet. secs. 16 and 17.
 Over rolling land, thru. scattering timber and dense undergrowth.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked,




80.00 Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.
 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 8, 9, 16 and 17, with brass cap, marked



Dig pits, 18x18x12 ins., in each sec. $5\frac{1}{2}$ ft. dist.
 Land, rolling.
 Soil, sandy loam, 2nd rate.
 Timber, yucca.
 Undergrowth, greasewood and cacti.

S.89°56'E., on a random line, bet. secs. 9 and 16.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.84 Intersect N. and S. line; 5 lks. N. of the cor. of secs. 9, 10, 15 and 16.
 Thence,
 N.89°54' W., on a true line, bet. secs. 9 and 16.
 Over rolling land, thru. scattering timber and undergrowth.
 16.20 wash, 5 lks. wide, course SW.
 39.92 Set an iron post, 3 ft. long, 1 in. in diam., 25 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap,



45.30 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
 Road, brs. NW. and SE.
 79.84 The cor. of secs. 8, 9, 16 and 17.
 Land, rolling.
 Soil, sandy loam, 1st rate.
 Timber, mesquite.
 Undergrowth, catclaw, yucca, greasewood and cacti.

N.0° 02' W., bet. secs. 8 and 9.
 Over rolling land, thru. scattering timber and undergrowth.
 24.10 Wash, 30 lks. wide, course NW.
 28.30 Wash, 10 lks. wide, course NW.
 32.60 Wash, 10 lks. wide, course W.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

28 Subdivision of Township 10 North, Range 9 West.

Chains.

$$\begin{array}{c} \frac{1}{4} \\ \text{S } 8 \frac{1}{4} \text{ S } 9 \\ \hline 1919 \end{array}$$

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of post.

- 48.80 Road, brs. NW. and SE.
- 49.60 Wash, 10 lks. wide, course W.
- 61.20 Wash, 5 lks. wide, course SW.
- 71.90 Wash, 5 lks. wide, course W.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 4, 5, 8 and 9, with brass cap, marked

$$\begin{array}{c} \text{T10N} | \text{R } 9\text{W} \\ \text{S } 5 | \text{S } 4 \\ \hline \text{S } 8 \frac{1}{4} | \text{S } 9 \\ \hline 1919 \end{array}$$

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of post.
 Land, rolling.
 Soil, sandy loam, 2nd rate.
 Timber, yucca.
 Undergrowth, greasewood and cacti.

- 40.00 S. $89^{\circ}54'$ E., on a random line, bet. secs. 4 and 9. Set temp. $\frac{1}{4}$ sec. cor.
- 79.84 Intersect N. and S. line, 14 lks. N. of the cor. of secs. 3, 4, 9 and 10.
 Thence,
 N. $89^{\circ}48'$ W., on a true line, bet. secs. 4 and 9.
 Over rolling land, thru. scattering timber and dense undergrowth.
- 11.10 Wash, 10 lks. wide, course S.
- 15.00 Wash, 5 lks. wide, course S.
- 39.92 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$$\begin{array}{c} \frac{1}{4} \text{ S } 4 \\ \hline \text{S } 9 \\ \hline 1919 \end{array}$$

- 69.00 Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
- 79.84 Wash, 5 lks. wide, course SW.
 The cor. of secs. 4, 5, 8 and 9.
 Land, rolling.
 Soil, sandy and rocky loam, 2nd rate.
 Timber mesquite and palo verde.
 Undergrowth, catclaw, greasewood, cacti and yucca.

- 40.00 N. $0^{\circ}14'$ E., on a random line, bet. secs. 4 and 5. Set temp. $\frac{1}{4}$ sec. cor.
- 80.25 Intersect the N. bdy. of the Tp., 18 lks. E. of the cor. of secs. 4, 5, 32 and 33, hereinbefore described.
 Thence,
 S. $0^{\circ}06'$ W., on a true line, bet. secs. 4 and 5.
 Over rolling land, thru. scattering timber and dense undergrowth.
- 15.30 Wash, 10 lks. wide, course W.
- 31.40 Wash, 20 lks. wide, course W.
- 40.25 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$$\begin{array}{c} \frac{1}{4} \\ \text{S } 5 | \text{S } 4 \\ \hline 1919 \end{array}$$

Chains.

- Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of post.
 45.50 Wash, 10 lks. wide, course SW.
 51.40 Wash, 10 lks. wide, course SW.
 55.70 Wash, 15 lks. wide, course SW.
 72.60 Wash, 10 lks. wide, course W.
 80.25 The cor. of secs. 4, 5, 8 and 9.

Land, rolling.

Soil, rocky, decomposed granite, 2nd rate.

Timber, mesquite and palo verde.

Undergrowth, catclaw, greasewood and cacti.

The original cor. of secs. 5, 6, 31 and 32, on S. bdy. of Tp., established in November, 1914, is an iron post, 3 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by 4 pits, one in each sec., and mound of stone W. of cor.

No bearing trees.

Thence,

N. $0^{\circ}03'$ W., bet. secs. 31 and 32.

Over rolling land, thru. scattering timber and dense undergrowth.

- 20.00 Wash, 20 lks. wide, course W.
 24.00 Cut bank, 10 ft. high, bears E. and W.
 25.20 Wash, 20 lks. wide, course W.
 27.00 Cut bank, 10 ft. high, bears E. and W.
 38.50 Wash, 10 lks. wide, course SW.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$$\begin{array}{c} \frac{1}{4} \\ S31 | S32 \end{array}$$

1919

- Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of post.
 45.20 Wash, 10 lks. wide, course W.
 48.20 Wash, 10 lks. wide, course W.
 58.20 Wash, 30 lks. wide, course W.
 62.10 Wash, 10 lks. wide, course W.
 71.80 Wash, 10 lks. wide, course NW.
 77.20 Wash, 10 lks. wide, course W.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 29, 30, 31 and 32, with brass cap, marked

$$\begin{array}{c} T10N | R9W \\ S30 | S29 \\ \hline S31 | S32 \\ 1919 \end{array}$$

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of post.

Land, rolling.

Soil, sandy loam, 2nd rate.

Timber, mesquite and palo verde.

Undergrowth, catclaw, greasewood, cacti and yucca.

-
- N. $89^{\circ}59'$ E., on a random line, bet. secs. 29 and 32.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.06 Intersect N. and S. line, 7 lks. N. of the cor. of secs. 28, 29, 32 and 33.

Thence,

N. $89^{\circ}58'$ W., on a true line, bet. secs. 29 and 32.

Over rolling land, thru. scattering timber and dense undergrowth.

- 2.20 Wash, 10 lks. wide, course NW.
 9.60 Wash, 10 lks. wide, course N.
 15.00 Wash, 10 lks. wide, course N.
 33.30 Wash, 10 lks. wide, course N.

30 Subdivision of Township 10 North, Range 9 West.

Chains.

38.60 Wash, 12 lks. wide, course N.
 40.03 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap,

$\frac{1}{4}$ S 29
 S 32
 1919

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of post.
 45.00 Wash, 10 lks. wide, course NW.
 51.00 Wash, 10 lks. wide, course N.
 62.90 Wash, 20 lks. wide, course NW.
 80.06 The cor. of secs. 29, 30, 31 and 32.
 Land, rolling.
 Soil, sandy loam, 2nd rate.
 Timber, mesquite and palo verde.
 Undergrowth, catclaw, cacti and greasewood.

S. $89^{\circ} 59'$ W., on a random line, bet. secs. 30 and 31.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.02 Intersect W. bdy. of Tp., at original cor. of secs. 25, 30, 31 and 36, established in December, 1914, which is an iron post, 3 ins. in diam., projecting 12 ins. above ground firmly set, properly marked on brass cap, and witnessed by mound of stone, W. of cor. No bearing trees.

Thence,
 N. $89^{\circ} 59'$ E., on a true line, bet. secs. 30 and 31.
 Over rolling land, thru. scattering timber and dense undergrowth.
 36.50 Right bank of Date Creek, brs. NE. and SW. Thence across bed of Date Creek, course SW.
 35.02 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for witness cor. to $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ S 30 W
 S 31 C
 1919

Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
 40.02 True point for $\frac{1}{4}$ sec. cor. falls in Date Creek; therefore, establish witness cor. at 5.00 chs. S. $89^{\circ} 59'$ W., as described above.
 51.60 Left bank of Date Creek, bears NE. and SW. Leave creek bed.
 70.90 Wash, 5 lks. wide, course NE.
 80.02 The cor. of secs. 29, 30, 31 and 32.
 Land, rolling.
 Soil, sandy loam, 2nd rate.
 Undergrowth, greasewood, cacti and yucca.
 Timber, palo verde and mesquite.


N. $0^{\circ} 03'$ W., bet. secs. 29 and 30.
 Over rolling land, through scattering timber and dense undergrowth.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
 S30 | S29
 1919

Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.
 70.00 Left Bank of Date Creek, bears NE. and SW. Thence across bed of Date Creek, course SW.
 75.00 Right bank of Date Creek, bears NE. and SW. Leave creek bed.

Chains.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 19, 20, 29 and 30, with brass cap, marked



- from which,
- A catclaw, 5 ins. in diam., bears N.47° E., 20 lks. dist., marked "T10N R9W S20 BT."
- A catclaw, 5 ins. in diam., bears S.27½° E., 42 lks. dist., marked "T10N R9W S29 BT."
- A catclaw, 6 ins. in diam., bears S.13° W., 141 lks. dist., marked "T10N R9W S30 BT."
- A palo verde, 5 ins. in diam., bears N.39½° W., 238 lks. dist., marked "T10N R9W S19 BT."


Land, rolling.
 Soil, sandy loam, 2nd rate.
 Timber, catclaw and palo verde.
 Undergrowth, mesquite, greasewood, yucca and cacti.

S.89°58'E., on a random line, bet. secs. 20 and 29.
 40.00 Set temp. ¼ sec. cor.
 80.26 Intersect N. and S. line, 5 lks. S. of the cor. of secs. 20, 21, 28 and 29.

Thence,
 West, on a true line, bet. secs. 20 and 29.
 Over rolling land, thru. scattering timber and dense undergrowth.

- 3.80 Low spur, slopes N.
- 5.00 Wash, 5 lks. wide, course N.
- 7.00 Wash, 10 lks. wide, course N.
- 10.00 Wash, 10 lks. wide, course N.
- 15.00 Wash, 30 lks. wide, course N.
- 18.00 Wash, 20 lks. wide, course N.

40.13 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked



50.00 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist. Left bank of Date Creek, bears NE. and SW. Thence across bed of Date Creek, course SW.

75.00 Right bank of Date Creek, bears NE. and SW. Leave Creek bed.

80.26 The cor. of secs. 19, 20, 29 and 30.
 Land, rolling.
 Soil, sandy loam, 2nd rate.
 Timber, palo verde and mesquite.
 Undergrowth, catclaw, greasewood and cacti.

S.89°59'W., on a random line, bet. secs. 19 and 30.
 40.00 Set temp. ¼ sec. cor.

79.84 Intersect W. bdy. of Tp., 7 lks. S. of original cor. of secs. 19, 24, 25 and 30, established in January, 1915, which is an iron post, 3 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by 4 pits, one in each sec., and mound of earth, W. of cor. No bearing trees.

Thence,
 S.89° 58'E., on a true line, bet. secs. 19 and 30.
 Over rolling land, thru. scattering timber and dense undergrowth.

32 Subdivision of Township 10 North, Range 9 West.

Chains.

39.84 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ S 19
S 30
1919

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of post.

43.50 Wash, 20 lks. wide, course S.
47.20 Wash, 20 lks. wide, course S.
51.20 Spur, slopes SW. Descend 160 ft., over broken SE. slope.
75.40 Wash, 20 lks. wide, course S.
77.20 Cut bank, 10 ft. high, bears NW. and SE.
79.84 The cor. of secs. 19, 20, 29 and 30.

Land, rolling.
Soil, sandy and rocky, 3rd rate.
Timber, palo verde and mesquite.
Undergrowth, catclaw, greasewood, yucca and cacti.

N. $0^{\circ} 03'$ W., bet. secs. 19 and 20.
Over rolling land, thru. scattering timber and dense undergrowth,

Ascend 190 ft., over S. slope, 190 ft.

20.70 Spur, slopes SE. Along broken E. slope.
25.10 Wash, 10 lks. wide, course SE.
31.50 Spur, slopes SE.
37.30 Wash, 10 lks. wide, course E.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
S19 | S20
1919

80.00 Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.
Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 17, 18, 19 and 20, with brass cap, marked.

T10N | R9 W
S18 | S17
S19 | S20
1919

Dig pits, 18x18x12 ins., in each sec. $5\frac{1}{2}$ ft. dist.
Land, rolling.
Soil, N. 40.00 chs. sandy loam, 1st rate; S. 40.00 chs., gravelly loam, 3rd rate.
Timber, palo verde.
Undergrowth, yucca, greasewood and cacti.

East, on a random line, bet. secs. 17 and 20.

40.00 Set temp. $\frac{1}{4}$ sec. cor.
80.10 Intersect N. and S. line, 7 lks. S. of the cor. of secs. 16, 17, 20 and 21.

Thence,
S. $89^{\circ} 57'$ W., on a true line, bet. secs. 17 and 20.
Over rolling land, thru. scattering timber and dense undergrowth.

10.00 Wash, 10 lks. wide, course S.
13.70 Wash, 10 lks. wide, course S.
16.00 Wash, 10 lks. wide, course S.
35.00 Wash, 10 lks. wide, course S.
40.05 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

Subdivision of Township 10 North, Range 9 West.

Chains.

$\frac{1}{4}$ S 17
S 20
1919

80.10 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
The cor. of secs. 17,18, 19 and 20.
Land, rolling.
Soil, sandy loam, 2nd rate.
Timber, palo verde.
Undergrowth, catclaw, yucca, greasewood and cacti.

40.00 N.89°58'W., on a random line, bet. secs. 18 and 19.
Set temp. $\frac{1}{4}$ sec. cor.
79.90 Intersect W. bdy. of Tp., 16 lks. S. of original cor. of
secs: 13,18,19 and 24, established in January, 1915,
which is an iron post, 3 ins. in diam., projecting 12
ins. above ground, firmly set, properly marked on brass
cap, and witnessed by 4 pits, one in each sec. and
mound of earth, W. of cor. No bearing trees.

Thence,
S.89°51'E., on a true line, bet. secs. 18 and 19.
Over rolling land, thru. scattering timber and dense
undergrowth.
39.90 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ S 18
S 19
1919

51.20 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist./
Wash, 5 lks. wide, course NE.
79.90 The cor. of secs. 17,18,19 and 20.
Land, rolling.
Soil, sandy loam, 1st rate.
Timber, palo verde.
Undergrowth, yucca, catclaw, greasewood and cacti.

28.80 N.0°03'W., bet. secs. 17 and 18.
Over rolling land, thru. scattering timber and dense
undergrowth.
40.00 Wash, 5 lks. wide, course NE.
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
S18 | S17
1919

55.00 Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.
Wash, 10 lks. wide, course W.
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
the ground, for cor. of secs. 7,8,17 and 18, with brass
cap, marked

TLON | R9 W
S 7 | S 8
S18 | S17
1919

Dig pits, 18x18x12 ins., in each sec. $5\frac{1}{2}$ ft. dist.
Land, rolling.
Soil, sandy loam, 1st rate.
Timber, palo verde.
Undergrowth, yucca, greasewood and cacti.

Survey of Subdivision of Township 10 North, Range 9 West.

34.

Chains.

N. 89° 57' E., on a random line, bet. secs. 8 and 17.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.00 Intersect N. and S. line, 2 lks. N. of the cor. of secs. 8, 9, 16 and 17.
 Over rolling land, thru. scattering timber and dense undergrowth.
 19.60 Wash, 5 lks. wide, course NW.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ S 8
 S 17
 1919

72.20 Dig pits 18x18x12 ins., E. and W. of post, 3 ft. dist.
 Wash, 5 lks. wide, course NW.
 80.00 The cor. of secs. 7, 8, 17 and 18.
 Land, rolling.
 Soil, sandy loam, 1st rate.
 Timber, mesquite.
 Undergrowth, yucca, greasewood and cacti.

N. 89° 51' W., on a random line, bet. secs. 7 and 18.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.83 Intersect W. bdy. of Tp., 7 lks. N. of original cor. of secs. 7, 12, 13 and 18, established in January, 1915, which is an iron post, 3 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by 4 pits, one in each sec., and mound of earth W. of cor. No bearing trees.
 Thence,
 S. 89° 54' E., on a true line, bet. secs. 7 and 18.
 22.20 Wash, 20 lks. wide, course S.
 39.83 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ S 7
 S 18
 1919

79.83 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
 The cor. of secs. 7, 8, 17 and 18.
 Land, rolling.
 Soil, sandy loam, 1st rate.
 Timber, mesquite.
 Undergrowth, greasewood, cacti, and ocotilla.

N. 0° 03' W., bet. secs. 7 and 8.
 Over rolling land, thru. scattering timber and dense undergrowth.
 3.10 Wash, 10 lks. wide, course W.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
 S 7 | S 8
 1919

44.60 Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.
 Wash, 10 lks. wide, course W.
 57.60 Wash, 20 lks. wide, course W.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 5, 6, 7 and 8, with brass cap, marked

Chains.

T10N	R 9W
S 6	S 5
S 7	S 8
1919	

Dig pits, 18x18x12 ins., in each sec. 5 $\frac{1}{2}$ -ft. dist.
 Land, rolling.
 Soil, sandy loam, 2nd rate.
 Timber, mesquite.
 Undergrowth, catclaw, yucca, greasewood and cacti.

40.00 N. 89° 58' E., on a random line, bet. secs. 5 and 8.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.00 Intersect N. and S. line, 2 lks. N. of the cor. of secs. 4, 5, 8 and 9.
 Thence,
 S. 89° 59' W., on a true line, bet. secs. 5 and 8.
 Over rolling land, thru. scattering timber and dense undergrowth.
 18.30 Wash, 10 lks. wide, course SW.
 20.75 Road, brs. NW. and SE.
 22.00 Wash, 10 lks. wide, course NW.
 35.00 Wash, 5 lks. wide, course N.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ S	5
S	8
1919	

80.00 Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of post,
 The cor. of secs. 5, 6, 7 and 8.
 Land, rolling.
 Soil, sandy loam, 2nd rate.
 Timber, mesquite.
 Undergrowth, catclaw, greasewood and cacti.

40.00 N. 89° 54' W., on a random line, bet. secs. 6 and 7.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.86 Intersect W. bdy. of Tp., 12 lks. S. of original cor. of secs. 1, 6, 7 and 12, established in January, 1915, which is an iron post, 3 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by 4 pits, one in each sec., and mound of earth, W. of cor. No bearing trees.
 Thence,
 S. 89° 49' E., on a true line, bet. secs. 6 and 7.
 Over rolling land, thru. scattering timber and dense undergrowth.
 38.20 Wash, 10 lks. wide, course N.
 39.86 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ S	6
S	7
1919	

60.70 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
 79.86 Wash, 20 lks. wide, course NW.
 The cor. of secs. 5, 6, 7 and 8.
 Land, rolling.
 Soil, sandy loam, 2nd rate.
 Timber, mesquite.
 Undergrowth, yucca, catclaw, greasewood and cacti.

36 Subdivision of Township 10 North, Range 9 West.

Chains.

40.00 N.0°06'E., on a random line, bet. secs.5 and 6.
 Set temp. $\frac{1}{4}$ sec.cor.
 80.28 Intersect the N. bdy.of the Tp., 2 lks.E.of the cor.of
 secs.5,6, 31 and 32, hereinbefore described.
 Thence,
 S.0° 05' W., on a true line, bet. secs.5 and 6.
 Over rolling land, thru. scattering timber and dense
 undergrowth.
 7.10 Road, brs.NW. and SE.
 35.00 Wash,10 lks.wide, course W.
 40.28 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec.cor., with brass cap, marked

$\frac{1}{4}$
 S 6 | S 5
 1919

41.80 Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W.of post.
 42.80 Wash,10 lks.wide, course SW.
 48.80 Wash,10 lks.wide, course SW.
 61.20 Wash,10 lks.wide, course W.
 80.28 Wash, 5 lks.wide, course W.
 The cor.of secs.5,6, 7 and 8.
 Land, rolling.
 Soil,sandy loam, 2nd rate.
 Timber, mesquite.
 Undergrowth, greasewood, yucca and cacti.

GENERAL DESCRIPTION.

This township consists of level bottom,level plain,roll-
 ing and mountainous land. The soil of the bottom land
 along Date Creek is a deep,loose,fine sandy loam, capable
 of producing abundant crops with irrigation. The soil
 of the level plain in the Northwestern portion of the
 Township is a deep,loose, coarse,sandy loam, capable of
 producing abundant crops with irrigation, and may be
 classed as second rate. The soil of the rolling land in
 the southern portion of the township is a loose,coarse,
 decomposed granite,and may be classed from second to
 third rate. The soil of the remaining portion of the
 township is a loose, coarse, decomposed granite and may
 nearly all be classed as third rate.

Except along Date Creek, the township is covered with
 a growth of cacti, greasewood,ocotilla and yucca.

Mesquite,palo verde,and catclaw are found throughout
 the township. Cottonwood,willow, and desert willow are
 found along Date Creek.

No indications of mineral were noted in the township.

The source of Bullard's pipe line is located in sec.12,
 and the mouth in sec.23. The source of this pipe line
 is located in a wash where the water is forced to the sur-
 face by bed rock. A concrete dam has been built,which
 raises the water enough to flow thru. the pipe line. The
 pipe line consists of an iron pipe about $\frac{3}{4}$ inches in
 diameter. A pipe one inch in diameter would have carried
 the flow of water at the time of this survey. There is
 a natural rock tank in sec.13, which is locally known as
 "Los Tres Alamos." This tank is about fifty feet in diam-
 eter and about ten feet deep, and is almost surrounded
 by perpendicular cliffs. The source of water supply for
 this tank is flood water and underground seepage from a
 wash emptying into same. There is a well in sec.22.

W.F.Sawyer has a claim in sec.22, and has done some
 preliminary work on a reservoir site in sec.13.

Book "B"

Group 90 - - - Arizona.

BOOK 3410

DATE DIAGRAM.

4-23-19	4-23-19	4-28-19	4-28-19	4-29-19	4-29-19	
6	5	4	3	2	1	
4-23-19	4-24-19	4-25-19	5-1-19	4-30-19	4-30-19	4-26-19
7	8	9	10	11	12	
4-23-19	4-24-19	4-25-19	4-30-19	4-26-19	4-22-19	4-22-19
18	17	16	15	14	13	
4-19-19	4-19-19	4-24-19	4-25-19	4-22-19	4-21-19	4-21-19
19	20	21	22	23	24	
4-19-19	4-18-19	4-18-19	4-16-19	4-21-19	4-14-19	4-12-19
30	29	28	27	26	25	
4-17-19	4-17-19	4-16-19	4-15-19	4-14-19	4-14-19	4-12-19
31	32	33	34	35	36	
4-17-19	4-16-19	4-15-19	4-14-19	4-14-19		4-12-19

TION. R. 9W.

4-17-19 Executed on dates shown, by Norman D. Price, U.S. Transitman.

4-680

BOOK 3410

FIELD ASSISTANTS. to
Norman D. Price, U.S. Transitman.

NAMES.	CAPACITY.
Charles Woodington,	1st chainman,
Kirill Williams,	2nd chainman,
Thomas Gladstone,	flagman,
Arley L. Goleman,	cornerman,
Joseph F. Ellerick,	axman.

CERTIFICATE OF UNITED STATES SURVEYOR. TRANSITMAN

I, Norman D. Price, U. S. ^{Transitman} ~~Surveyor~~, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group N° 90, Arizona bearing date of the 26th day of September, 1918, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the East and North boundaries and Subdivision lines of Township 10 North, Range 9 West of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes ^{and by diagram on page 37 hereof} as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group N° 90 Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Place, Boise, Idaho.
Date, March 27, 1920.

Norman D. Price
U. S. Surveyor.
Transitman

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix, Arizona, May 12, 1921.

The foregoing field notes of the survey of the East and North boundaries and Subdivision lines of Township 10 North, Range 9 West of the Gila and Salt River Base and Meridian in the State of Arizona

executed by Norman D. Price, U.S. Transitman under ~~his~~ special instructions dated Sept. 26, 1918 for Group N° 90 Arizona, ~~191~~, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Frank C. Stott
U. S. Surveyor General.

~~I certify that the foregoing transcript of the field notes of the above described surveys in~~
~~has been correctly copied from the original notes on file in this office.~~

~~U. S. Surveyor General.~~