

3413

Book "E".

4-679

179
①

BOOK 3413

FIELD NOTES

OF THE RESURVEY OF

Part of the North Boundary

and

Part of the Subdivision lines of

Township 10 North, Range 6 West

Completion of and subdivisions,

OF THE SURVEY OF

Part of the North Boundary

and

Part of the Subdivision lines of

Township 10 North, Range 6 West

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

EXECUTED BY

Norman D. Price

U.S. Transitman

In the capacity of U.S. Surveyor, under Special Instructions dated Sept. 26, 1918, issued by the United States Surveyor General to govern surveys included in Group No. 90, which were approved by the Commissioner of the General Land Office, October 21, 1918, and Assignment Instructions dated March 7, 1919

Resurvey and Survey commenced May 21, 1919.

Resurvey and Survey completed June 4, 1919.

3413

3413


180
1A

3413

Book "E"

BOOK 3413 Group 90 - Arizona.

INDEX DIAGRAM.

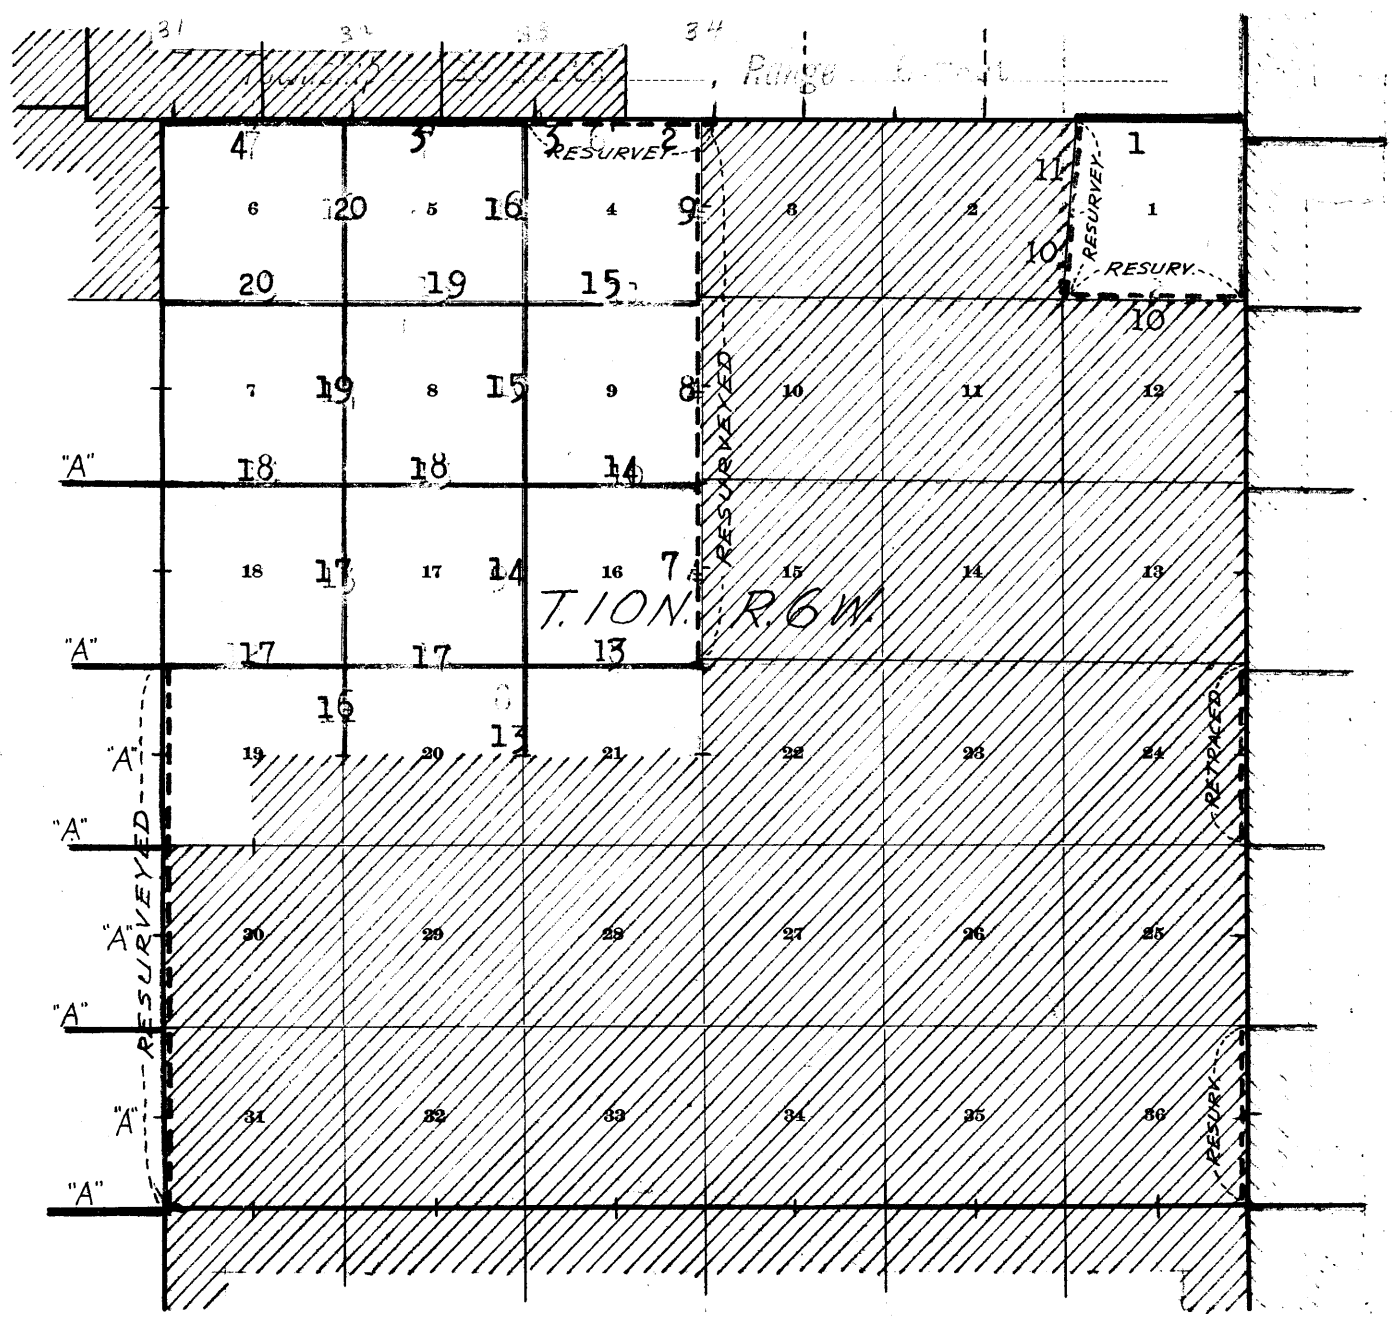

- Lines surveyed under this group.
- Lines resurveyed under this group N° 60.
- Lines surveyed under current group N° 60
- Lines retraced or resurveyed under current group N° 60.
- Accepted surveys.
- Unsurveyed.
- Areas surveyed as per accepted plats on file.
- Areas surveyed under Current Group N° 60.

Chains.

Surveys and Resurveys hereinafter described, executed by Norman D. Price, U.S. Transitman, on dates shown on diagram on page 23 hereof, using a Buff light mountain transit No. 7732, described, with record of test and certificate of approval in Book "A" of this group.

Survey of part of N. bdy. of Township 10 North, Range 6 West.

The original cor. of secs. 1, 2, 35 and 36, Ts. 10 and 11 N., R. 6 W. is a granite stone, 18x14x12 ins., firmly set in a mound of stone, said mound being raised upon a granite boulder, which is marked with a cross (x), and with 1 groove E. of cross, and 5 grooves W. of cross. Cor. is witnessed by a mound of stone on the W. No bearing trees.

Thence, East, on a random line, on N. bdy. of sec. 1.

40.00 Set temp. 1/4 sec. cor.

74.23 Intersect W. bdy. of Tp. 11 N., R. 5 W., 7.24 chs. N. of cor. of Ts. 10 and 11 N., Rs. 5 and 6 W., established under current group No. 60, which is an iron post, 3 ins. in diam., firmly set in the ground and mound of stone, properly marked on brass cap, and witnessed by a mound of stone, 2 ft. base, 1 1/2 ft. high, S. of cor.

Reestablish this cor. to refer to Ts. 10 and 11 N., R. 5 W. only by changing marking on brass cap, to read:

T11N
R5W
S31
S 6
T10N
1916

and move mound of stone from S. to E. of cor.

At point of intersection, reestablish cor. of Ts. 10 and 11 N., R. 6 W., as follows:

Set an iron post, 3 ft. long, 3 ins. in diam., 24 ins. in the ground, for reestablished cor. of Ts. 10 and 11 N., R. 6 W., marked on brass cap,

T11N
S36
S 1
R6W
T10N
1919

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor. Thence,

West, on true line, on N. bdy. of sec. 1, T. 10 N., R. 6 W.

Over rolling land, thru dense undergrowth.

Descend W. slope, 425 ft.

13.20 Dry wash, 20 lks. wide, course SW.

21.00 Spur, slopes S.

23.00 Dry wash, 15 lks. wide, course S.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground, for 1/4 sec. cor. of sec. 1, T. 10 N., R. 6 W. only, with brass cap, marked

S 1
1919

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, S. of post.

48.50 Dry wash, 20 lks. wide, course SW.

56.30 Spur, slopes SW.

69.30 Dry wash, 10 lks. wide, course SW.


74.23 Intersect original cor. of secs. 1, 2, 35 and 36, Ts. 10 and 11 N., R. 6 W., hereinbefore described.

2. Survey of part of N. bdy. of Township 10 North, Range 6 West.

Chains.

Secs. 35 and 36 being unsurveyed at the present time, re-establish this cor. to refer to secs. 1 and 2 only, as follows:

Alongside the original stone, and in the mound of stone set an iron post 3 ft. long, 2 ins. in diam., for reestablished cor. of secs. 1 and 2, T. 10 N., R. 6 W., marked on brass cap,



and move the mound of stone from W. to S. of cor. Land, rolling. Soil, rocky, 3rd rate. Undergrowth, dense cacti. No timber.

RESURVEY-Part of N. bdy. of Township 10 North, Range 6 West.

The resurvey described as follows: was made for the purpose of reestablishing the 1/2 sec. cor. of sec. 4, and the cor. of secs. 4 and 5 at 40.00 and 80.00 chs. respectively, west from closing cor. of secs. 3 and 4, and the topographical features were not measured; therefore, reference is made to previous records for same.

The reestablished cors. referring to T. 10 N., R. 6 W. were set at computed distances west from the existing cors. on the line, accepting the courses and distances recorded in the retracement and resurvey by Chas. M. Pidgeon, U.S. Surveyor in January, 1913; such courses and distances being copied from record, merely to present the resurvey in proper form, only the computed distances W. from existing cors. to reestablished cors. being the direct result of chaining at this time. The existing cors. have no reference to the secs. in T. 10 N., R. 6 W.; therefore, no change in same is required and their record description is verified when chaining computed distance from each.

Begin at Angle Point, which was originally established in 1871 as cor. of secs. 3, 4, 33 and 34, reestablished in 1906 as cor. of secs. 33 and 34, T. 11 N., R. 6 W. only, and in 1913 changed to its present designation as angle point, said A.P. being a granite stone, firmly set in ground, marked "AP" on N. face, and witnessed by mound of stone, W. of cor.

No bearing trees.

Thence, West, (record course) on S. bdy. of sec. 34 (W. 1/2) Topography as per notes of original survey in 1871.

6.26 Intersect the original closing cor. of secs. 3, and 4, T. 10 N., R. 6 W., reestablished as hereinafter described. This measurement was rechained. The record dist. is 6.20 chs.

Thence, West (record course) on N. bdy. of sec. 4, T. 10 N., R. 6 W. Topography described in notes of original survey executed in 1871.

33.58 (39.84 chs. W. from A.P. as per 1913 record) The reestablished cor. of secs. 33 and 34, an iron post, description agreeing with record. Topography west from this cor. described in notes of resurvey executed in 1913.

40.00 Chain measurement of 6.42 chs. (computed dist.) west to Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished 1/2 sec. cor. of sec. 4 only, marked on brass cap.

RESURVEY-Part of N. bdy. of Township 10 North, Range 6 West. 3.

Chains.

S 4
1919

- 73.58 (40.00 chs. W. from reestablished cor. of secs. 33 and 34, as per 1913 record), Intersect true point for reestablished sec. cor. of sec. 33, T. 11 N., R. 6 W., which is marked by a cross (x) on a large granite boulder.
- 73.72 (40.14 chs. W. from reestablished cor. of secs. 33 and 34 as per 1913 record)
Intersect the witness cor. to reestablished sec. cor. of sec. 33, T. 11 N., R. 6 W., which is an iron post, description agreeing with record.
- 80.00 Chain measurement of 6.28 chs. (computed dist.) west from this W.C., or 6.42 chs. west from true sec. cor. point, to Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 4 and 5, T. 10 N., R. 6 W., marked on brass cap.

S 5 | S 4
T 10 N R 6 W
1916

Raise a mound of stone 2 ft. base, 1 1/2 ft. high, S. of cor. Land, rolling and mountainous.
Soil, rocky, 3rd and 4th rate.
Timber, scattering palo verde.
Undergrowth, dense scrub oak, cacti and greasewood.
No cors. ever having been established west of this cor. to refer to secs. 5 and 6, T. 10 N., R. 6 W., such portion of the line having been resurveyed and surveyed as S. bdy. of T. 11 N., R. 6 W. only, the setting of new cors. thereon referring to secs. 5 and 6, constitutes an original survey of the line as hereinafter described.

SURVEY--Part of N. bdy. of Township 10 North, Range 6 West.

The following described survey was made for the purpose of establishing 1/4 sec. and sec. cors. pertaining to secs. 5 and 6 only, at intervals of 40.00 chs. west from reestablished cor. of secs. 4 and 5, hereinbefore described, and the topographical features were not measured; therefore, for such data, refer to notes of record of resurvey and survey of part of S. bdy. of T. 11 N., R. 6 W., as executed in 1913 by Chas. M. Pidgeon, U.S. Surveyor.
The cors. referring to secs. 5 and 6 were set at computed dists. W. from each existing cor., accepting the record courses and dists. as a basis of computation, said record courses and dists. being copied herein, merely to present the survey in proper form, only the computed dists. from the existing cors. west to the nearest new cor. is the result of chaining at this time, and under the instructions for this group of surveys.
The record description of each existing cor. is verified when chaining the computed dist. therefrom.

- 31.58 Begin at reestablished cor. of secs. 4 and 5, T. 10 N., R. 6 W. on S. bdy. of sec. 33 (W. 1/2) hereinbefore described.
Thence,
West, (record course) on N. bdy. of sec. 5 (S. of sec. 33).
Topography as per record of resurvey in 1913.
(38.00 chs. W. from true point for 1/4 sec. cor. of sec. 33, as per record of resurvey executed in 1913)
Intersect the witness cor. to reestablished cor. of secs.

4. SURVEY-Part of N. bdy. of Township 10 North, Range 6 West.

Chains.

32 and 33, an iron post, description agreeing with record.
 33.58 (40.00 chs.W. from true point for $\frac{1}{4}$ sec.cor.of sec.33),
 Intersect true point for reestablished cor.of secs.32 and
 33, on a large granite boulder, as per record.
 West of this point, topography as per record of survey in
 1913.
 Chain measurement of 6.42 chs. (computed dist., west from
 cor.point, or 8.42 chs.west from W.C.to
 40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec.cor.of sec.5 only, marked on brass
 cap,

$\frac{1}{4}$ S 5
1919

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, S. of cor.
 Continue line and measurement of N.bdy.of sec.5.
 73.58 (40.00 chs.west from true point for cor.of secs.32 and 33
 as per record),
 Intersect true point for $\frac{1}{4}$ sec.cor. of sec.32 on a granite
 boulder as per record.
 73.64 (40.06 chs.west from true point for cor.of secs.32 and 33
 as per record),
 Intersect witness cor. to $\frac{1}{4}$ sec.cor.of sec.32, which is
 an iron post agreeing with record description.
 Chain measurement of 6.36 chs. (computed dist.) west from
 the W.C. or 6.42 chs. west from true $\frac{1}{4}$ sec.cor.point, to
 80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 24 ins. in
 the ground for cor.of secs. 5 and 6, T.10 N.,R.6 W.,
 marked on brass cap,

S6 | S5
T10N | R6 W
1919

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, S. of cor.
 Land, rolling and mountainous.
 Soil, rocky, 3rd and 4th rate.
 Timber, scattering palo verde.
 Undergrowth, dense cacti and greasewood.

From cor.of secs. 5 and 6, T.10 N.,R.6 W., described above,
 West (record course) on N. bdy.of sec.6 (S.of sec.32).
 Topography as per record of survey in 1913.
 33.58 (40.00 chs.west from true point for $\frac{1}{4}$ sec.cor. of sec.32, as
 per record).
 Intersect cor.of secs. 31 and 32, T.11 N.,R.6 W., which
 is an iron post, agreeing with record description.
 Chain measurement of 6.42 chs. west to
 40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in
 the ground for $\frac{1}{4}$ sec.cor.of sec.6, T.10 N.,R.6 W.,
 marked on brass cap,

$\frac{1}{4}$ S 6
1919

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, S. of cor.
 Continue line and measurement of N.bdy.of sec.6.
 73.58 (40.00 chs.W. from cor.of secs. 31 and 32, as per record),
 Intersect the $\frac{1}{4}$ sec.cor. of sec.31, T.11 N., R.6 W., which
 is an iron post, agreeing with record description.
 Continue line and measurement of N.bdy.of sec.6.
 79.23 (5.65 chs.W. from $\frac{1}{4}$ sec.cor.of sec.31, as per record) Inter-
 sect the closing cor. of Ts.10 N.,Rs.6 and 7 W., which
 is an iron post, agreeing with record description.
 Land, mountainous.
 Soil, rocky, 4th rate.

Chains.

No timber.
Undergrowth, dense cacti and greasewood.

Retracement (for Resurvey) of part of the Subdivision lines
of Township 10 North, Range 6 West.

From original cor. of secs. 1,2,35 and 36, Ts.10 and 11
N., R.6 W., hereinbefore described,
S.4°35'W. (record course as per resurvey of line in 1906)
on random line on E. bdy. of sec.2, T.10 N., R. 6 W..
36.57 (Record dist.) Diligent search in this vicinity fails to
reveal any trace of the 1/4 sec. cor. of secs.1 and 2, re-
established in 1906.

Set temp. 1/4 sec. cor.
76.89 Fall 31 lks. W. of the original cor. of secs.1,2,11 and 12,
which is a granite stone, 10x8x6 ins. above ground,
firmly set, marked with 5 notches on S. edge, and one
notch on E. edge, and witnessed by a mound of stone, 2
ft. base, 1 1/2 ft. high, W. of cor.
True course and dist. of E. bdy. of sec.2 are therefore N.4°
21'E., 76.89 chs.

From original cor. of secs. 1,2, 11 and 12, described
above,
East (record course as per resurvey of line in 1906) on
random line on N. bdy. of sec.12 (W. 1/2).
39.95 Fall 3 lks. S. of 1/4 sec. cor. of secs.1 and 12, reestablished
in 1906, which is a granite stone, 12x8x6 ins. above
ground, firmly set, marked "1" on N. face, and witnessed
by mound of stone 2 ft. base, 1 1/2 ft. high, N. of cor.
No bearing trees.
True course and dist. of W. 1/2 of N. bdy. of sec.12 are there-
fore S.89° 57'W., 39.95 chs.

Thence,
East (record course of resurvey in 1906) on random line,
on N. bdy. of sec.12 (E. 1/2).
40.07 Fall 30 lks. N. of reestablished cor. of secs. 1 and 12 on
E. bdy. of Tp., originally cor. of secs. 1,6,7 and 12, but
changed to refer to secs.1 and 12 only, when closing
cor. of secs. 6 and 7, T.10 N., R.5 W. was set at a point
96 lks. S., as described in notes of current group No.
60.
This cor. was reestablished in 1904, and is a granite
stone 10x8x8 ins. above ground, firmly set, marked with
one notch on N. edge and 5 notches on S. edge, and wit-
nessed by a mound of stone, 2 ft. base, 1 1/2 ft. high, W.
of cor.
No bearing trees.
True course and dist. of E. 1/2 of N. bdy. of sec.12 are there-
fore N.89° 34'W., 40.07 chs.

The original cor. of secs. 15,16,21 and 22 is a granite
stone, 9x9x6 ins. above ground, firmly set, marked with
3 notches on each of S. and E. edges, and witnessed by a
mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.
No bearing trees.
Thence,
N. 9° 2' W. (record course), on random line, on W. bdy. of
sec.15 (S. 1/2).
38.76 Fall 14 lks. E. of the original witness cor. to 1/4 sec. cor.
of secs.15 and 16 on record as being set at 2.00 chs.
S. 0° 2' E. from true point. This W C. is a cross (x) on
a granite boulder 5x5x3 ft. above ground, with marking
"WC 1/4" W. of cross, and a mound of stones 2 ft. base, 1 1/2 ft.
high, W. of boulder. No bearing trees.

Retracement (for Resurvey) of part of the Subdivision lines
of Township 10 North, Range 6 West.6
Chains.

- True course and dist. of S. $\frac{1}{2}$ of W. bdy. of sec. 15 are therefore N. $0^{\circ} 14' W.$, 40.76 chs.
Therefore, from witness cor.,
N. $0^{\circ} 14' W.$, 2.00 chs. to
- 40.76 Original true point for $\frac{1}{4}$ sec. cor. of secs. 15 and 16.
Thence,
N. $0^{\circ} 2' W.$ (record course) on random line, on W. bdy. of sec. 15 (N. $\frac{1}{2}$).
- 39.97 Fall 1 link E. of original cor. of secs. 9, 10, 15 and 16, which is a large granite boulder, 8x4x4 ft. above ground, marked with a cross (x) on top, and 4 grooves S. of cross, and 3 grooves E. of cross, and witnessed by a mound of stones 2 ft. base, $1\frac{1}{2}$ ft. high, W. of boulder.
No bearing trees.
True course and dist. of N. $\frac{1}{2}$ of W. bdy. of sec. 15 are therefore N. $0^{\circ} 3' W.$, 39.97 chs.
-
- From original cor. of secs. 9, 10, 15 and 16, described above,
N. $0^{\circ} 2' W.$ (record course) on random line, on W. bdy. of sec. 10 (S. $\frac{1}{2}$).
- 37.09 Fall 1 lk. E. of the original witness cor. to $\frac{1}{4}$ sec. cor. of secs. 9 and 10, on record as being set at 3.00 chs. S. $0^{\circ} 2' E.$ from true point. This W.C. is a granite boulder 6x4x2 ft. above ground, on top of which is marked a cross (x) and "WC $\frac{1}{4}$ " W. of cross, and a mound of stones 2 ft. base, $1\frac{1}{2}$ ft. high, W. of boulder. No bearing trees.
True course and dist. of S. $\frac{1}{2}$ of W. bdy. of sec. 10 are therefore N. $0^{\circ} 3' W.$, 40.09 chs.
Thence,
N. $0^{\circ} 3' W.$, 3.00 chs. to
- 40.09 True point for $\frac{1}{4}$ sec. cor. of sec. 10.
Thence,
N. $0^{\circ} 2' W.$ (record course) on random line, on W. bdy. of sec. 10 (N. $\frac{1}{2}$).
- 40.44 Fall 14 lks. E. of original cor. of secs. 3, 4, 9 and 10, which is a granite stone, 9x8x8 ins. above ground, firmly set, marked with 5 notches on S. edge, and 3 notches on E. edge, and witnessed by mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. No bearing trees.
True course and dist. of N. $\frac{1}{2}$ of W. bdy. of sec. 10 are therefore N. $0^{\circ} 14' W.$, 40.44 chs.
-
- From original cor. of secs. 3, 4, 9 and 10, described above,
N. $0^{\circ} 2' W.$ (record course) on random line, on W. bdy. of sec. 3 (S. $\frac{1}{2}$).
- 39.89 Fall 13 lks. E. of original $\frac{1}{4}$ sec. cor. of secs. 3 and 4, which is a granite stone, 9x5x12 ins. above ground, firmly set, marked " $\frac{1}{4}$ " on W. face, and witnessed by mound of stones, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
No bearing trees.
True course and dist. of S. half of W. bdy. of sec. 3 are, therefore N. $0^{\circ} 13' W.$, 39.89 chs.
Thence,
N. $0^{\circ} 2' W.$, (record course) on random line on W. bdy. of sec. 3. (N. $\frac{1}{2}$).

Retracement (for Resurvey) of part of Subdivisions of T.10N., R.6 W. 7

Chains.

36.95 Fall 15 lks. E. of original closing cor. of secs. 3 and 4, which is a granite stone, 10x10x12 ins. above ground, firmly set, marked "CC" on S. face, and 3 grooves on each of E. and W. faces, and witnessed by mound of stones 2 ft. base, 1 1/2 ft. high, S. of cor. No bearing trees. True course and dist. of N. 1/2 of W. bdy. of sec. 3 are therefore N. 0° 14' W., 36.95 chs.

RESURVEY-Part of Subdivision lines, T.10 N., R. 6 W.

Survey of line bet. secs. 16 and 21 due east as hereinafter described locates the reestablished cor. of said secs. at 42 lks. S. 0° 2' E. from original cor. of secs. 15, 16, 21 and 22; therefore, after said cor. of secs. 16 and 21 is set, resurvey the east boundaries of secs. 16, 9 and 4 on the courses obtained by the retracement hereinbefore described, changing the original sec. and 1/4 sec. cors. to refer to secs. E. of the line, and at intervals of 40.00 chs., reestablish 1/4 sec. and sec. cors. to refer to secs. W. of the line, all described as follows:

From reestablished cor. of secs. 16 and 21, hereinafter described, N. 0° 2' W. (record course) on true line, on E. bdy. of sec. 16 (W. of sec. 22).

Over rolling land, thru scattering timber and dense undergrowth.

Ascend.

0.42 Intersect original cor. of secs. 15, 16, 21 and 22, hereinbefore described.

Reestablish this cor. to refer to secs. 15 and 22, hereinbefore described, only by moving the mound of stone from W. to E. of cor. Thence N. 0° 14' W., on true line.

Continuing measurement of E. bdy. of sec. 16 (W. of sec. 15). Ascend SE. slope.

2.36 Spur, slopes SW. Descend NW. slope.

11.28 Gulch, course W. Ascend.

17.18 Spur, slopes SW.

21.30 Ridge, brs. E. and W. Descend.

29.30 Wash, 10 lks. wide, course NW. Ascend.

37.70 Spur, slopes SW. Descend.

39.18 Intersect original witness cor. to 1/4 sec. cor. of secs. 15 and 16.

Reestablish this W.C. to refer to point for 1/4 sec. cor. of sec. 15 only by moving mound of stone from W. to E. of cor.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 16 only, marked on brass cap,

1/4 s16 |

1919

41.18 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor. (40.76 chs. N. 0° 14' W. from cor. of secs. 15 and 22) True point for reestablished 1/4 sec. cor. of sec. 15 only, falls on N. side of granite ledge, where post could not be set.

Thence,

N. 0° 3' W., on true line.

Continuing measurement of E. bdy. of sec. 16 (W. of sec. 15).

63.15 Pipe line 2 1/2 ins. diam., brs. NE.

65.20 Wash, 20 lks. wide, course NE. Ascend.

73.05 Spur, slopes E. Descend.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 9 and 16, marked on brass cap,

8. Reestablishment of Resurvey of part of the subdivision lines of Township 10 North, Range 6 West.

Chains.

T10N
S 9
S16
R6W
1919

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor. Land, rolling. Soil, rocky, 3rd rate. Timber, scattering mountain mahogany. Undergrowth, scattering scrub oak, cacti, greasewood and catclaw.

From reestablished cor. of secs. 9 and 16, described above, N. 0° 3' W., on true line, on E. bdy. of sec. 9 (W. of sec. 15). Over rolling land, thru scattering timber and dense undergrowth.

1.15 (39.97 chs. N. 0° 3' W. from true point for ¼ sec. cor. of sec. 15).

Intersect the original cor. of secs. 9, 10, 15 and 16, hereinbefore described. Reestablish this cor. to refer to secs. 10 and 15 only by moving mound of stone from W. to E. of cor.

Continue same course and measurement of E. bdy. of sec. 9 (W. of sec. 10).

Over rolling land; descend.

10.99 Wash, 20 lks. wide, course SW. Ascend.

28.24 Spur, slopes SE. Descend.

31.49 Wash, 10 lks. wide, course SE. Ascend.

37.64 Spur, slopes E. Descend N. slope.

38.24 Intersect original witness cor. to ¼ sec. cor. of secs. 9 and 10, hereinbefore described.

Reestablish this W.C. to refer to ¼ sec. cor. point of sec. 10 only, by moving mound of stone from W. to E. of cor.

Continue line and measurement,

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished ¼ sec. cor. of sec. 9 only, marked on brass cap,

189
1919

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor. Continue line and measurement.

41.24 (40.09 chs. N. 0° 3' W. from cor. of secs. 10 and 15) True point for ¼ sec. cor. of sec. 10 falls on S. side of sloping rock, where post could not be set.

Thence,

N. 0° 14' W., on true line,

Continuing measurement of E. bdy. of sec. 9 (W. of sec. 10).

Over rolling land. Descend N. slope.

75.68 Wash, 10 lks. wide, course NW., 736 ft. below spur at 37,64 ch. station. Ascend.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for reestablished cor. of secs. 4 and 9, marked on brass cap,

T10N
S 4
S 9
R6W
1919

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor. Land, rolling. Soil, rocky, 3rd rate. Timber, scattering mountain mahogany. Undergrowth, dense catclaw, cacti, greasewood and scrub oak.

Resurvey of part of the Subdivision lines of Township 10 North, Range 6 West,

Chains.

From reestablished cor. of secs. 4 and 9, described above, N. 0° 14' W., on a true line, on E. bdy. of sec. 4 (W. bdy. of sec. 10).
 Over rolling land, thru scattering timber and dense undergrowth.
 1.68 (40.44 chs. N. 0° 14' W. from true point for 1/4 sec. cor. of sec. 10) Intersect original cor. of secs. 3, 4, 9 and 10, hereinbefore described.
 Reestablish this cor. to refer to secs. 3 and 10 only, by moving mound of stone from W. to E. of cor.
 Thence,
 N. 0° 13' W., on true line, continuing measurement of E. bdy. of sec. 4 (W. of sec. 3).
 3.97 Wash, 10 lks. wide, course NE.
 5.07 Wash, 10 lks. wide, course W.
 6.77 Wash, 10 lks. wide, course W.
 8.47 Wash, 10 lks. wide, course W. Ascend.
 13.77 Spur, slopes W. Descend.
 14.97 Head of wash, course W. Ascend.
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 4 only, marked on brass cap,

1/4 S4
 1919

Raise a mound of stone 2 ft. base, 1 1/2 ft. high, W. of cor. Continue line and measurement.
 41.57 (39.89 chs. N. 0° 13' W., from cor. of secs. 3 and 10) Intersect original 1/4 sec. cor. of secs. 3 and 4, hereinbefore described.
 Reestablish this cor. to refer to sec. 3 only, by moving mound of stone from W. to E. of cor.
 Thence,
 N. 0° 14' W., on true line,
 Continuing measurement of E. bdy. of sec. 4 (W. of sec. 3).
 Over rolling land. Ascend S. slope.
 51.42 Spur, slopes NE. 50 ft. above head of wash at 14.97 ch. station. Descend. 130 ft.
 71.77 Road brs. NW. and SE.
 72.40 Four strand barbed wire fence, brs. NW. and SE. (R.R. face).
 72.75 Telegraph line brs. NW. and SE., parallel to R.R.
 73.00 Wash, 10 lks. wide, course NW.
 73.50 Center of track of Santa Fe, Prescott and Phoenix Railroad, brs. N. 60° 38' W., and S. 60° 38' E.
 74.10 Four strand barbed wire fence, brs. NW. and SE. (R.R. fence) in wash, 10 lks. wide, course NW. Ascend 50 ft. on S. slope to
 78.52 (36.95 chs. N. 0° 14' W. from 1/4 sec. cor. of sec. 3) Intersect original closing cor. of secs. 3 and 4 on N. bdy. of Tp., hereinbefore described.
 Reestablish this C.C. as follows:
 Alongside of old stone, Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished closing cor. of secs. 3 and 4, marked on brass cap,

T11N R6W
 S34
 S 4 | S 3
 T10N | R6W
 CE
 1919

to which original accessory applies.
 Land, rolling.
 Soil, rocky, 3rd rate.
 Timber, scattering mountain mahogany.
 Undergrowth, dense catclaw cacti, greasewood and scrub oak.

10. Reestablished for Resurvey of part of the Subdivision lines of Township 10 North, Range 6 West.

Chains. From reestablished cor. of secs. 1 and 12, hereinbefore described,
 N. 89°34' W., on true line, bet. secs. 1 and 12.
 Over rolling land, thru. dense undergrowth. Ascend 30 ft. on E. slope.
 3.30 Spur, slopes SW. Descend 30 ft. on W. slope.
 4.20 Four strand barbed wire fence, brs. NW. and SE.
 11.50 Wash, course SW. Ascend 40 ft. on E. slope.
 16.50 Spur, slopes S. Descend 90 ft. on W. slope.
 25.00 Wash, 5 lks. wide, course S. Ascend.
 30.00 Spur, slopes S. Descend 80 ft. on W. slope.
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 1 only, marked on brass cap,

1/4 S 1

1919

40.07 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor. Intersect the $\frac{1}{4}$ sec. cor. of secs. 1 and 12, hereinbefore described.
 Reestablish this cor. to refer to sec. 12 only, as follows:
 Alongside original stone, set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 12, marked on brass cap,

1/4 S 12

1919

and move original mound of stone from N. to S. of cor. Thence,

S. 89°57' W., on true line,
 Continuing measurement.
 56.30 Wash, 10 lks. wide, course NW.
 58.00 Wash, 10 lks. wide, course SW.
 60.50 Wash, 10 lks. wide, course SW.
 64.00 Wash, 10 lks. wide, course NW.
 67.80 Wash, 20 lks. wide, course SW.
 80.02 Intersect the original cor. of secs. 1, 2, 11 and 12, hereinbefore described.
 Reestablish this cor. as follows:
 Alongside original stone, set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for reestablished cor. of secs. 1, 2, 11 and 12, marked on brass cap,

T10N R6W

S 2 | S 1

S11 | S12

1919

to which original accessory applies.
 Land, rolling.
 Soil, rocky, 3rd rate.
 No timber.
 Undergrowth, dense cacti.

 From reestablished cor. of secs. 1, 2, 11 and 12, described above,
 N. 4°21' E., on true line, bet. secs. 1 and 2.
 Over rolling land, thru. dense undergrowth.
 10.80 Four strand barbed wire fence, brs. NW. and SE.
 13.80 Wash, 5 lks. wide, course SW.
 40.11 (40.00 chs. northing from cor. of secs. 1, 2, 11 and 12) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 1 only, marked on brass cap,

Resurvey of part of the Subdivision lines of Township 10 North, Range 6 West.

Chains.

1/4 S1
1919

40.22 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor. (Proportional dist.), Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished sec. cor. of sec. 2 only, marked on brass cap,

1/4 S2
1919

44.40 Wash, 20 lks. wide, course SW.
47.40 Wash, 20 lks. wide, course SE.
76.89 Intersect reestablished cor. of secs. 1 and 2, hereinbefore described.
Land, rolling.
Soil, rocky, 3rd rate.
No timber.
Undergrowth, dense cacti.

Boundaries of Sec. 1, Township 10 North, Range 6 West.
Latitudes, Departures, and Closing Errors,

Line designated	True bearing.	Dist.	Latitudes.		Départures.	
			N.	S.	E.	W.
Subdivisional Boundary.	N. 89° 34' W.	40.07	.30			40.07
	S. 89° 57' W.	39.95		.03		39.95
	N. 4° 21' E.	76.89	76.67		5.83	
North Tp. Bdy.,	East,	74.23			74.23	
East Tp. bdy.,	South,	76.95		76.95		
Convergency,					.01	
Totals,			76.97	76.98	80.07	80.02
				76.97	80.02	
Error in latitude,			0.01			
Error in departure,					0.05	

12.

Boundaries of part of Township 10 North, Range 6 west, 12
secs. (4-9 and 16-21).

Latitudes, Departures and Closing Errors.

Line designated.	True bearing.	Dist.	Latitudes.		Departures.	
			N.	S.	E.	W.
Subdivisional S. boundary.	West,	80.04				80.04
	S. 89° 53' W.	79.95		.16		79.95
	N. 89° 50' W.	79.30	23			79.30
West bdy. of Tp.,	North,	318.02	318.02			
North bdy. of Tp.	East,	239.23			239.23	
Subdivisional E. bdy.	S. 0° 14' E.	36.95		36.95	.15	
	S. 0° 13' E.	39.89		39.89	.15	
	S. 0° 14' E.	40.44		40.44	.16	
	S. 0° 3' E.	80.06		80.06	.07	
	S. 0° 14' E.	40.76		40.76	.16	
	S. 0° 2' E.	80.00		80.00	.05	
Convergency,					.16	
Totals,			318.25	318.26	240.13	239.29
				318.25	239.29	
Error in latitude,				0.01		
Error in departure,						0.84

Survey of part of Subdivision lines- T. 10 N., R. 6 W. 13.

Chains..

The original 1/4 sec. cor. of secs. 20 and 21 is a granite stone, 14x5x5 ins. above ground, firmly set, marked "1/4" on W. face, and witnessed by pits N. and S., and mound of earth W. of cor. No bearing trees.

Thence, N. 0° 02' W., on a true line, bet. secs. 20 and 21 (N. 1/2). Over rolling land, thru. scattering timber and dense undergrowth.

- 23.45 Ascend S. slope, 180 ft.
- Spur, slopes E.
- 33.48 Spur, slopes E. Descend N. slope, 110 ft.
- 39.45 Dry wash, 20 lks. wide, course E.
- 40.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 16, 17, 20 and 21, with brass cap, marked

T10N	R6W
S17	S16
S20	S21
1919	

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of post. Land, rolling. Soil, rocky, 3rd rate. Timber, mountain mahogany. Undergrowth, scrub oak, greasewood and cacti.

- 40.00 East, on random line, bet. secs. 16 and 21.
- Set temp. 1/4 sec. cor.
- 80.38 Intersect W. bdy. of sec. 22, at a point 42 lks. S. of the original cor. of secs. 15, 16, 21 and 22, and reestablished same as cor. of secs. 15 and 22 only, as hereinbefore described.
- At point of intersection,
- Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 16 and 21, marked on brass cap,

T10N	
S16	
S21	
R6 W	
1919	

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor. Thence, West, on true line, bet. secs. 16 and 21. Over rolling land, thru. scattering timber and dense undergrowth.

- 2.49 Along broken S. slope; ascend.
- Spur, slopes SW. Descend 450 ft. on W. slope.
- 26.15 Wash, course SE. Ascend 80 ft. on E. slope.
- 29.28 Spur, slopes S.. Descend 170 ft. on SW. slope.
- 40.38 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for witness cor. to 1/4 sec. cor. of secs. 16 and 21, marked on brass cap,

WC 1/4	S 16
	S 21
1919	

- 40.19 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.
- Point for 1/4 sec. cor. falls in wash, 20 lks. wide, course SE.
- 78.14 Wash, 20 lks. wide, course SE. Ascend along broken S. slope.
- 80.38 Intersect cor. of secs. 16, 17, 20 and 21. Land, rolling. Soil, rocky, 3rd rate. Timber, scattering mountain mahogany. Undergrowth, dense scrub oak, catclaw and cacti.


14. Survey of part of Subdivision lines-T.10 N., R.6 W

Chains

Mean bearing of E. bdrs. of secs.16, 9 and 4 is N.0°10'W., therefore run, N.0°11'W. on a true line, bet. secs.16 and 17. Over rolling land, thru scattering timber and dense undergrowth.

7.44 Dry wash, 20 lks.wide, course SE. Ascend broken SW.slope, 570 ft.

40.00 Rocky spur, slopes NW. Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec.cor., with brass cap. marked



Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor. Descend NE.slope, 190 ft.


40.07 U.S.M.M.No.2, which is a cross on a granite boulder, 6x5x8 ft. above ground, marked U.S.M.M. No.2 N. of cross, and U.S.M.M.No.2, 1250 C.E. on E.face, witnessed by a mound of stone, 4 ft. base. 4 ft. high, NE. of cross, brs. S.6°59'E., 156 lks. dist.

64.61 Dry wash, 5 lks.wide, course NW. Ascend SW. slope, 130 ft.

71.33 Spur, slopes NW. Descend N.slope, 90 ft.

76.80 Gulch, course SW. Ascend SW. slope, 50 ft.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 8, 9, 16 and 17, with brass cap, marked



Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor. Land, rolling. Soil, rocky, 3rd rate. Timber, palo verde. Undergrowth, scrub oak, cacti and greasewood.

40.00 East, on a random line, bet. secs.9 and 16. Set temp. 1/4 sec.cor.

80.48 Intersect W. bdy. of sec.15; 16 lks. N. of the reestablished cor. of secs. 9 and 16, hereinbefore described.

Thence,

N.89°53'W., on a true line, bet. secs. 9 and 16.

Over rolling land, thru scattering timber and dense undergrowth.


Ascend E.slope, 210 ft.

6.70 Spur, slopes N. Descend W.slope, 30 ft.

9.20 Ravine, course N. Ascend E.slope, 330 ft.

20.00 Spur, slopes NE.

40.24 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec.cor., with brass cap, marked



Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of post.

39.00 Spur, slopes NW. Descend W.slope, 170 ft.

57.50 Dry wash, 10 lks.wide, course NW.

Ascend E.slope, 250 ft.

75.50 Spur, slopes NW.


Survey of part of Subdivision lines- T.10 N., R 6 W. 15.

Chains.


80.48 The cor. of secs. 8, 9, 16 and 17.
Land, rolling.
Soil, rocky, 3rd rate.
Timber, palo verde.
Undergrowth, scrub oak, cacti and greasewood.

N. 0° 11' W., on a true line, bet. secs. 8 and 9.
Over rolling land, thru scattering timber and dense undergrowth.

3.50 Ascend S. slope, 110 ft.
Spur, slopes W. Descend N. slope, 200 ft.
16.40 Dry wash, course NW. Ascend S. slope, 150 ft.
25.30 Spur, slopes W. Descend N. slope, 260 ft.
39.50 Ridge, brs. NW. and SE. Descend N. slope, 220 ft.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked



55.24 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of post.
Dry wash, 15 lks. wide, course SE.
Ascend S. slope, 390 ft.
75.75 Saddle in ridge, brs. E. and W.
Descend N. slope, 170 ft.
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 4, 5, 8 and 9, with brass cap, marked




Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of post.
Land, rolling.
Soil, rocky, 3rd rate.
Timber, palo verde.
Undergrowth, scrub oak, cacti, and greasewood.

40.00 S. 89° 53' E., on a random line, bet. secs. 4 and 9.
Set temp. 1/4 sec. cor.
80.46 Intersect W. bdy. of sec. 10, 16 lks. N. of reestablished cor. of secs. 4 and 9 hereinbefore described.

Thence,
N. 89° 46' W., on a true line, bet. secs. 4 and 9.
Over rolling land, thru scattering timber and dense undergrowth.

0.50 Dry wash, 10 lks. wide, course N.
Ascend NE. slope, 450 ft.
9.40 Spur, slopes N. Descend W. slope, 280 ft.
40.23 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor., with brass cap, marked



45.45 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of post.
48.30 Gulch, course NW. Ascend E. slope, 20 ft.
54.70 Spur, slopes NW. Descend W. slope, 50 ft.
Dry wash, 20 lks. wide, course N.
Ascend E. slope, 330 ft.
71.05 Spur, slopes NE. Descend W. slope, 60 ft.
80.46 The cor. of secs. 4, 5, 8 and 9.

16 survey of part of Subdivision lines T.10 N., R. 6 W.

Chains.

Land, rolling.
Soil, rocky, 3rd rate.
Timber, palo verde.
Undergrowth, scrub oak, cacti and greasewood.

40.00 N.0° 11' W., on a random line, bet. secs.4 and 5.
Set temp. 1/4 sec. cor.
77.94 Intersect the N. bdy. of the T. 10 N., R. 6 W. 48 lks. W. of the reestablished cor. of secs.4 and 5, hereinbefore described.

Thence,
S.0° 10' W., on a true line, bet. secs.4 and 5.
Over rolling land, thru scattering timber and dense undergrowth.

21.00 Spur, slopes NE.
37.94 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor., with brass cap, marked

1/4
S5 | S4
1919

38.30 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of post.
Spur, slopes SE.
42.00 Dry wash, 10 lks. wide, course NE.
56.50 Spur, slopes N.
66.50 Dry wash, 10 lks. wide, course NW.
77.94 The cor. of secs. 4, 5, 8 and 9.

Land, rolling.
Soil, rocky, 3rd rate.
Timber, palo verde.
Undergrowth, scrub oak, cacti and greasewood.

The original 1/4 sec. cor. of secs. 19 and 20 is a granite stone, 8x5x10 ins. above ground, firmly set, marked "1/4" on W. face, witnessed by a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Alongside of cor., set
An iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished 1/4 sec. cor. of secs. 19 and 20, with brass cap, marked

1/4
S19 | S20
1919

Thence,
N.0° 03' W., on a true line, bet. secs. 19 and 20 (N. 1/2).
Over rolling land, thru scattering timber and dense undergrowth.

19.90 Dry wash, 40 lks. wide, course SW.
Ascend broken S. slope, 440 ft.
40.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 17, 18, 19 and 20, with brass cap marked,

T10N R6W
S18 | S17
S19 | S20
1919

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.
Land, rolling.
Soil, rocky, 3rd rate.
Timber, palo verde.
Undergrowth, scrub oak, cacti and greasewood.

Survey of part of the Subdivision lines - T. 10 N., R. 6 W., S. 17.

Chains.

East, on a random line, bet. secs. 17 and 20.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.88 Intersect N. and S. line 26 lks. N. of the cor. of secs. 16, 17, 20 and 21.
 Thence,
 N. $89^{\circ} 49' W.$, on a true line, bet. secs. 17 and 20.
 Over rolling land, thru scattering timber and dense undergrowth.
 Ascend NE. slope, 940 ft.
 30.27 Spur, slopes NE. Descend W. slope, 80 ft.
 34.49 Saddle of spur, slopes S.
 37.33 Spur, slopes SE. Descend SW. slope, 680 ft.
 39.94 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ S 17
 $\frac{1}{4}$ S 20
 1919

70.14 Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
 Gulch, course SE. Ascend E. slope, 140 ft.
 77.57 Spur, slopes S.
 79.88 The cor. of secs. 17, 18, 19 and 20.
 Land, rolling.
 Soil, rocky, 3rd rate.
 Timber, palo verde.
 Undergrowth, cacti, scrub oak and greasewood.

West, on a random line, bet. secs. 18 and 19.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.27 Intersect the W. bdy. of the Tp. Sec. 18, 7 lks. N. of the reestablished cor. of secs. 13, 18, 19 and 24, which is an iron post, 3 ins. in diam., firmly set in ground, and mound of stone, properly marked on brass cap, and witnessed by mound of stone W. of cor.
 Thence,
 N. $89^{\circ} 57' E.$, on a true line, bet. secs. 18 and 19.
 Over rolling land, thru scattering timber and dense undergrowth.
 5.00 Dry wash, 5 lks. wide, course SE.
 16.50 Dry wash, 10 lks. wide, course SE.
 20.00 Cabin ^{and well} bears N. 6.00 chs. dist.
 25.00 Dry wash, 10 lks. wide, course SE.
 36.00 Dry wash, 10 lks. wide, course S.
 39.27 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ S 18
 $\frac{1}{4}$ S 19
 1919


46.80 Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of post.
 Spur, slopes SW.
 54.00 Dry wash, 10 lks. wide, course S.
 Ascend SW. slope, 300 ft.
 61.00 Dry wash, 10 lks. wide, course SE.
 79.27 The cor. of secs. 17, 18, 19 and 20.
 Land, rolling.
 Soil, rocky, 3rd rate.
 Timber, palo verde.
 Undergrowth, scrub oak, cacti and greasewood.

N. $0^{\circ} 11' W.$ on a true line, bet. secs. 17 and 18.
 Over rolling land, thru scattering timber and dense undergrowth.
 Ascend S. slope, 790 ft.
 27.44 Spur, slopes SE. Descend N. slope, 160 ft.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in


18. Survey of part of subdivision lines- T 10 N. R. 6 W.

Chains.

the ground for $\frac{1}{4}$ sec. cor., with brass cap, marked,




- 46.00 Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of post.
- Spur, slopes E. Descend N. slope, 190 ft.
- 61.00 Dry wash, 10 lks. wide, course E.
- Ascend S. slope, 200 ft.
- 76.40 Spur, slopes E.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 7, 8, 17 and 18, with brass cap, marked



Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of post.
 Land, rolling.
 Soil, rocky, 3rd rate.
 Timber, palo verde.
 Undergrowth, cacti and greasewood.

- 40.00 S. $89^{\circ} 49'$ E., on a random line, bet. secs. 8 and 17.
- Set temp. $\frac{1}{4}$ sec. cor.
- 79.92 Intersect N. and S. line 12 lks. N. of the cor. of secs. 8, 9, 16 and 17.
- Thence,
- N. $89^{\circ} 44'$ W., on a true line, bet. secs. 8 and 17.
- Over rolling land, thru. scattering timber and dense undergrowth.
- Ascend E. slope, 60 ft.
- 2.25 Spur, slopes SW. Descend W. slope, 190 ft.
- 20.40 Dry wash, 10 lks. wide, course NW.
- Ascend E. slope, 50 ft.
- 25.40 Spur, slopes NW. Descend W. slope, 120 ft.
- 35.00 Dry wash, 10 lks. wide, course N.
- 38.50 Dry wash, 20 lks. wide, course N.
- Ascend E. slope, 120 ft.
- 39.96 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



- 49.00 Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of post.
- Spur, slopes S.
- 50.00 Dry wash, course S. Ascend E. slope, 610 ft.
- 79.92 The cor. of secs. 7, 8, 17 and 18!
- Land, rolling.
- Soil, rocky, 3rd rate.
- Timber, palo verde.
- Undergrowth, scrub oak, cacti and greasewood.


- 40.00 S. $89^{\circ} 57'$ W., on a random line, bet. secs. 7 and 18.
- Set temp. $\frac{1}{4}$ sec. cor.
- 79.12 Intersect the W. bdy. of the Tp., 16 lks. N. of the cor. of secs. 7, 12, 13 and 18, an iron post, 3 ins. in diam., firmly set in ground, and mound of stone properly marked on brass cap, and witnessed by mound of stone W. of cor..

Survey of part of the Subdivision lines - T.10 N..R.6 W. 19

Chains.

Thence N. 89° 50' E., on a true line, bet. secs. 7 and 18.
Over rolling land, thru scattering timber, and dense undergrowth.

39.12 Ascend broken SW slope 890 ft.
Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor., with brass cap marked



64.20 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.
Ridge, brs. NW. and SE. Descend NE slope, 410 ft.


79.12 The cor. of secs. 7, 8, 17 and 18.
Land, rolling.
Soil, rocky, 3rd rate.
Timber, palo verde.
Undergrowth, oak brush, cacti and greasewood.

N. 0° 11' W., on a true line, bet. secs. 7 and 8.
Over rolling land, thru scattering timber and dense undergrowth.

8.00 Along broken E. slope.
Dry wash, 20 lks. wide, course E.
20.50 Gulch, course E.
33.70 Dry wash, 20 lks. wide, course NE.
38.70 Dry wash, 10 lks. wide, course NW.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked




51.00 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of post.
Spur, slopes NW.
56.50 Spur, slopes NW.
60.00 Dry wash, 10 lks. wide, course W.
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 5, 6, 7 and 8, with brass cap, marked



Raise a mound of stone 2 ft. base, 1 1/2 ft. high, W of post.
Land, rolling.
Soil, rocky, 3rd rate.
Timber, palo verde.
Undergrowth, oak brush, cacti and greasewood.

40.00 S. 89° 44' E., on a random line, bet. secs. 5 and 8.
Set temp. 1/4 sec. cor.
79.96 Intersect N. and S. line at a point, 12 lks. S. of the cor. of secs. 4, 5, 8 and 9.

Thence,
N. 89° 49' W., on a true line, bet. secs. 5 and 8.
Over rolling land, thru scattering timber and dense undergrowth.
39.98 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor., with brass cap, marked



20. Survey of part of Subdivision lines--T.10 N. R.6 W.

Chains.

47.50 Raise a mound of stone 2 ft. base, 1½ ft. high, W. of cor.
 Dry wash, 10 lks. wide, course NE.
 65.00 Spur, slopes SE.
 67.00 Dry wash, 10 lks. wide, course SE.
 79.96 The cor. of secs. 5, 6, 7 and 8.
 Land, rolling.
 Soil, rocky, 3rd rate.
 Timber, palo verde.
 Undergrowth, oak brush, cacti and greasewood.

 S. 89° 50' W., on a random line, bet. secs. 6 and 7.
 40.00 Set temp. ¼ sec. cor.
 78.90 Intersect the W. bdy. of Tp. 10 N. R. 6 W. 9 lks. N. of the cor. of secs. 1, 6, 7 and 12, an iron post 3 ins. in diam., firmly set in ground and mound of stone, properly marked on brass cap, and witnessed by mound of stone W. of cor.

Thence,
 N. 89° 46' E., on a true line, bet. secs. 6 and 7.
 Over rolling land, thru scattering timber and dense undergrowth.
 5.20 Dry wash, 10 lks. wide, course N.
 19.30 Spur, slopes NW.
 38.90 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

 S 6
 ¼ S 7
 1919

Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of post.
 45.00 Dry wash, 10 lks. wide, course NW.
 53.50 Dry wash, 10 lks wide, course NW.
 70.00 Spur, slopes NW.
 75.00 Spur, slopes NW.
 78.90 The cor. of secs. 5, 6, 7 and 8.
 Land, rolling.
 Soil, rocky, 3rd rate.
 Timber, palo verde.
 Undergrowth, oak brush, cacti and greasewood.

 N. 0° 10' E., on a random line, bet. secs. 5 and 6.
 40.00 Set temp. ¼ sec. cor.
 77.65 Intersect the N. bdy. of the Tp. 10 N. R. 6 W. 7 lks. E. of the cor. of secs. 5 and 6, hereinbefore described.
 Thence,
 S. 0° 07' W., on a true line, bet. secs. 5 and 6.
 Over rolling land, thru scattering timber and dense undergrowth.

4.20 Dry wash, 20 lks. wide, course NE.
 6.40 Spur, slopes W.
 12.00 Dry wash, course NW.
 15.00 Spur, slopes NW.
 32.00 Dry wash, 10 lks. wide, course W.
 37.65 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

 S 6 | S 5
 1919

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
 45.00 Dry wash, course NW.
 50.00 Dry wash, course NE.
 52.00 Dry wash, course NW.
 65.00 Spur, slopes NE.
 77.65 The cor. of secs. 5, 6, 7 and 8.

Chains.

Land, rolling.
Soil, rocky, 3rd rate.
Timber, palo verde.
Undergrowth, cacti and greasewood.

GENERAL DESCRIPTION

This portion of the township consists of mountainous land. The soil is a loose, coarse, decomposed granite and can be classed from third to fourth rate. There is a scattering growth of cacti, greasewood, ocotilla, mountaino mahogany and scrub oak. There is very little grass.

Mesquite, catclaw and palo verde are found throughout this portion of the township. A few dwarfed mulberry trees were found.

Gold has been found in this portion of the township. No mining was being done at the time of the survey.

There is a well in sec. 18, which furnishes a limited amount of stock water.

There are no settlers.

Congress Junction, situated about five miles distant in a southeasterly direction on the Santa Fe, Pfcott and Phoenix Railroad, is the most available outfitting point.

Book "E"
Group 90 - - -Arizona.

DATE DIAGRAM.

BOOK 3413

6-2-19 6 6-3-19	6-2-19 5 6-3-19	6-1-19 RESURVEY 4 5-29-19	3	2	6-1-19 1 5-31-19
6-2-19	6-4-19	5-28-19	RESURVEY	RESURVEY	RESURVEY
6-3-19	6-2-19	5-28-19	RESURVEY	RESURVEY	RESURVEY
7 5-24-19	8 5-25-19	9 5-26-19	10	11	12 RESURVEY
6-2-19	5-27-19	5-28-19	RESURVEY	RESURVEY	RESURVEY
18 5-22-19	17 5-22-19	16 T.ION. 5-21-19	15 R.G.W.	14	13
5-24-19	5-21-19	5-26-19	RESURVEY	RESURVEY	RESURVEY
19 5-22-19	20 5-21-19	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

5-25-19 Executed on dates shown by Norman D. Price, U.S. Transitman

26
BOOK 3418

CERTIFICATE OF UNITED STATES ~~SURVEYOR~~ ^{TRANSITMAN}

I, Norman D. Price, U. S. ~~Surveyor~~ ^{Transitman}, hereby certify upon honor that, in pursuance

of special instructions received from the U. S. Surveyor General, for Group N^o 90, Arizona

bearing date of the 26th day of September, 1918, I have well, faithfully, and truly

in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instruc-

tions, and the laws of the United States, ~~surveyed~~ ^{resurveyed} all those parts or portions of the North bdy.

and Subdivision lines of Township 10 North, Range 6 West

and Surveyed all those parts or portions of the North bdy. and

Subdivision lines of Township 10 North, Range 6 West

of the Gila and Salt

River Base and Meridian, in the State of Arizona, which are represented in

the foregoing field notes ~~as~~ ^{and by diagram on page 23 hereof} having been executed by me, and under my direction; and that all the corners of

~~said survey~~ ^{said resurvey and survey} have been established and perpetuated in strict accordance with the Manual of Surveying Instruc-

tions, and the special written instructions of the U. S. Surveyor General, for Group N^o 90, Arizona

and in the specific manner described in the field notes, and that the foregoing are the original field notes of

such ~~survey~~ ^{resurvey and survey}.

Place... Boise, Idaho.
Date... March 27, 1920.

Norman D. Price
U. S. Surveyor
Transitman.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix, Arizona, May 12, 1921.

The foregoing field notes of the ~~survey of~~ ^{resurvey of}

Part of the North boundary and Part of the Subdivision lines of
Township 10 North, Range 6 West

and of the Survey of

Part of the North boundary and Part of the Subdivision lines of
Township 10 North, Range 6 West

of the Gila and Salt River Base and Meridian, in the State of Arizona

executed by

under ~~his~~ special instructions dated Sept. 26, 1918 for Group 90 Arizona, ~~191~~, having been

critically examined, and the necessary corrections and explanations made, the said field notes, and the ~~surveys~~ ^{resurveys and surveys} they describe, are hereby approved.

Frank R. Smith
U. S. Surveyor General.

~~I certify that the foregoing transcript of the field notes of the above described surveys in~~

~~has been correctly copied from the original notes on file in this office.~~