

337

ONE

3417

BOOK "I"

4-679

BOOK 3417

FIELD NOTES

OF THE SURVEY OF

Parts (completion) of

EAST Boundary

NORTH Boundary and

SUBDIVISION lines

and of the RESURVEY of the

WEST half of the NORTH Boundary

of

Township 14 North, Range 6 West

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

EXECUTED BY

Dupree R. Averill

In the capacity of U.S. Surveyor, under Special Instructions dated September 26, 1918, issued by the United States Surveyor General to govern surveys included in Group No. 90, which were approved by the Commissioner of the General Land Office, October 21, 1918, and Assignment Instructions dated November 1, 1919

Survey and Re-Survey commenced March 9, 1920

Survey and Re-Survey completed March 23, 1920

3417

3417


3417

Book "I"

Group 90 Arizona.

BOOK 3417

INDEX DIAGRAM.

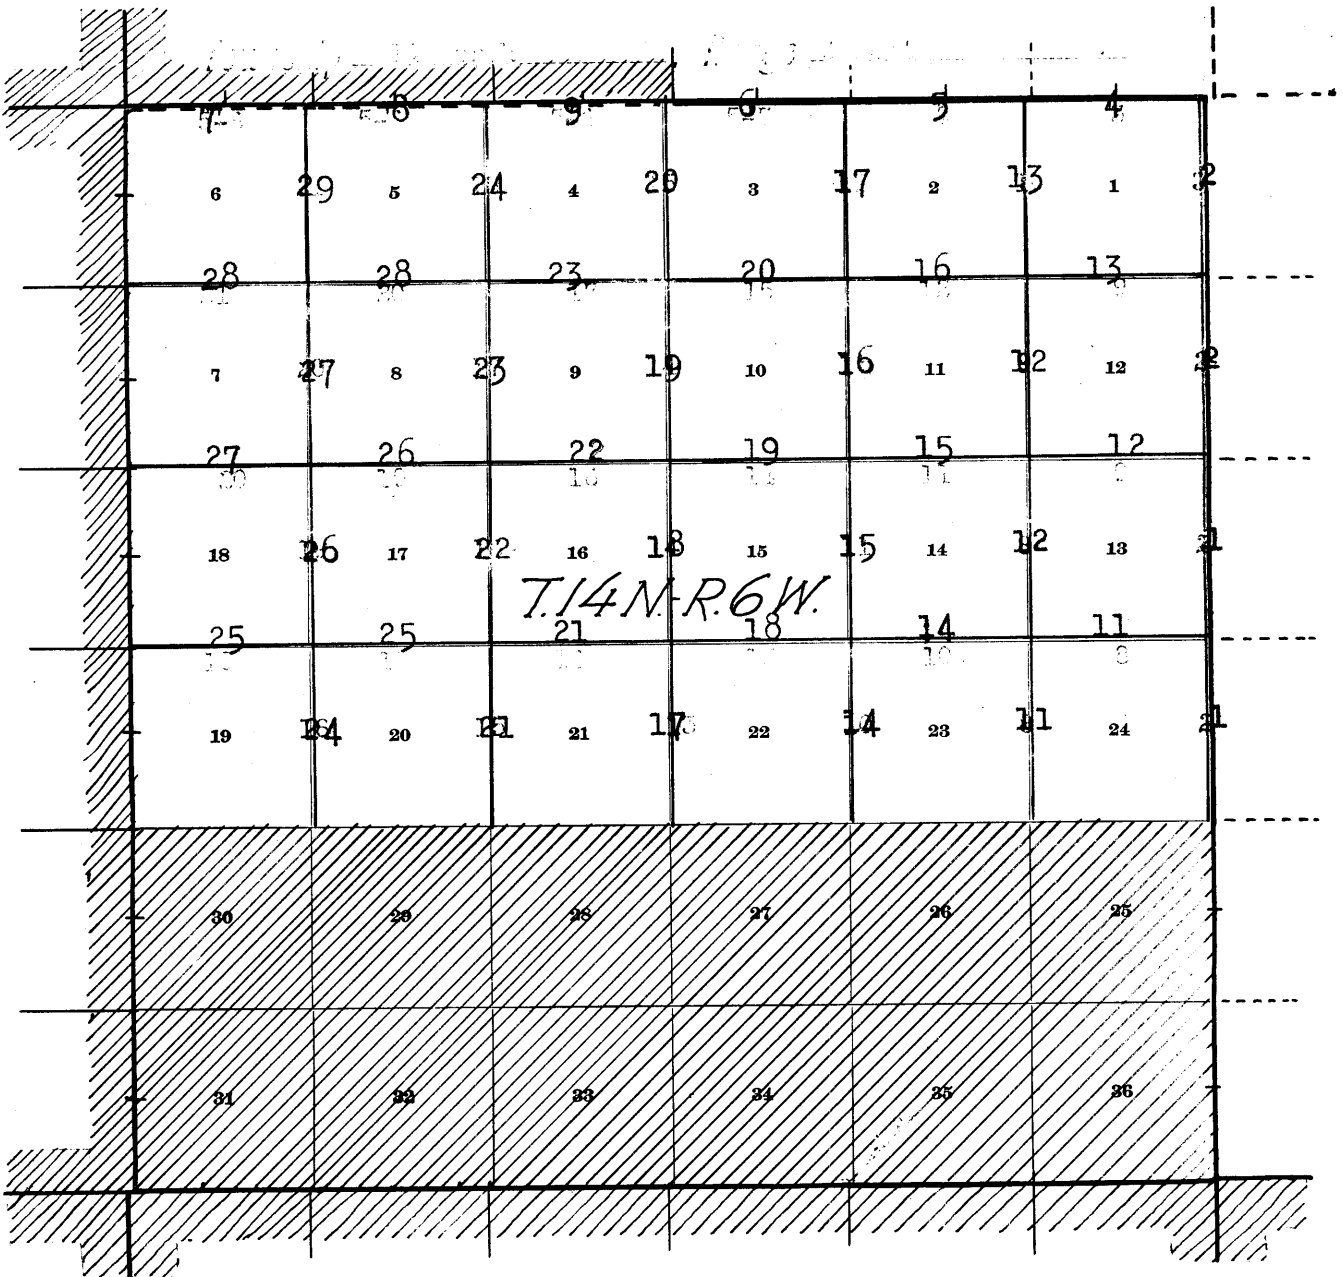

- ==== Lines surveyed under this group.
- Lines resurveyed under this group.
- _____ Accepted surveys.
- Unsurveyed.
- Areas surveyed as per accepted plats on file.

Chains.


Surveys and
ReSurveys hereinafter described, executed by Dupree R. Averill, U.S. Surveyor, on dates shown on diagram on page 30 hereof, using Young & Son's light mountain transit No. 8541, described with record of tests and certificate of approval, in Book "F" of this group.

Survey of Completion of E. bdy. of Township 14 N., R. 6 W.

The original cor. of secs. 19, 24, 25 and 30, Ts. 14 N., Rs. 5 and 6 W., established in February, 1915, by John F. Hesse, U.S. Surveyor, is an iron post, 3 ins. in diam., 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by one bearing tree, a cedar, 24 ins. in diam., N. 16 1/2° W., 104 lks. dist., marked "T14 N R 6 WS 24 BT.", and a mound of stone 2 ft. base, 1 1/2 ft. high, W. of cor.


Thence,
North, on true line, bet. secs. 19 and 24.
Over rolling land, thru. very scattering undergrowth.
Ascend 121 ft., over SW. slope.

20.00 Thence, over level land.
40.00 Rim of mesa brs. NW. and SE.; thence over level mesa.
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor., with brass cap, marked



and raise a mound of stone, 3 ft. base, 2 ft. high, W. of post.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 13, 18, 19 and 24, with brass cap, marked




and raise a mound of stone, 3 ft. base, 2 ft. high, W. of post.

Land, rolling and level.
Soil, rocky, 3rd and 4th rate.
Timber, none.
Undergrowth, very scattering scrub oak and catclaw.
Fair grass.

North, on true line, bet. secs. 13 and 18.
Over level mesa, thru. scattering undergrowth.
30.00 Leave level surface of mesa, and begin descending over very gradual NW. slope.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked



and raise a mound of stone, 3 ft. base, 2 ft. high, W. of post.

80.00 Continue over mesa, descending 50 ft., over NW. slope, to Set an iron post, 3 ft. long, 2 ins. in diam., over cross on surface rock, 34 ins. in a mound of stone, for cor. of secs. 7, 12, 13 and 18, with brass cap, marked

2 Survey of Completion of East bdy. of Township 14 North, Range 6 W.

Chains.

T14N	
R6W	R5W
S12	S 7
S13	S18

1920

and raise a mound of stone, 3 ft. base, 2 ft. high, W. of post. From this cor., houses at Schultz and Mullen Ranch bear N.15°W.

Land, level and gently rolling.

Soil, rocky, 3rd and 4th rate.

Timber, none.

Undergrowth, scattering scrub oak, catclaw and cactus.

Fair grass.

North, on true line, bet. secs. 7 and 12.

Over mesa, thru. scattering undergrowth; descend 120 ft. over gradual NW. slope.

26.00 Dry channel of Tank Creek, 30 lks. wide, course N.70°W.

Ascend 25 ft., over gently rolling W. slope, to

40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked

1/4

S12	S 7
-----	-----

1920

and raise a mound of stone, 3 ft. base, 2 ft. high, W. of post.

Continue over gently rolling W. slope on mesa, thru. scattering undergrowth.

51.15 Road brs. NE. and SW.

52.48 Wire fence brs. NE. and SW.

65.70 Ravine, course W.

Ascend 40 ft., over gradual S. slope, to sec. cor.

76.74 Wire fence brs. N. 58 1/4° W. and S. 58 1/4° E.; enter scattering timber, brs. W. and NE.

79.10 Road brs. NW. and SE.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs., 1, 6, 7 and 12, with brass cap, marked

T14N	
R 6W	R5 W
S 1	S 6
S12	S 7

1920

And raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, gently rolling.

Soil, rocky, 4th rate.

Timber, scattering cedar in north 5 chains.

Undergrowth, scattering scrub oak, catclaw, cactus.

Fair grass.

North, on true line, bet. secs. 1 and 6.

Over gently rolling surface of mesa, thru. dense undergrowth and scattering timber; ascend 25 ft., over S. slope.

7.00 Leave dense undergrowth; descend 35 ft., over NW. slope, thru. scattering undergrowth and timber.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked

1/4

S 1	S 6
-----	-----

1920

341
8917

Survey of Completion of East bdy. of T. 14 N., R. 6 W.

Chains.

and raise a mound of stone, 3 ft. base, 2 ft. high, W. of post.
50.00 Descend 30 ft., over NE. slope, to
55.50 Road hrs. E. and S. 60° W. Leave gently rolling, and enter level land.
80.00 Set temporary cor. of T. 14 N., R. 6 E. only (NE. cor.)
80.54 **The intersection** with the N. bdy. of T. 14 N., R. 6 W. surveyed due east, as hereinafter described in the notes describing the survey of completion of the North bdy. of T. 14 N., R. 6 W., which also describes the establishment of the township cor. at this point.
Land, gently rolling and level.
Soil, rocky, 2nd and 3rd rate.
Timber, scattering small cedar.
Undergrowth, scrub oak, cedar and catclaw, dense and scattering as noted.
Fair grass.

Survey of completion of N. bdy. of Township 14 North, Range 6 West.

Chains.

From the original cor. of secs. 3, 4, 35 and 36, T. 14 N. and R. 6 W., hereinafter described, East, on random line, setting temp. $\frac{1}{4}$ sec. & sec. cers. alternately, at intervals of 40 chs., and at 239.50 chs., fall 54 lks. N. of the temp. cor. of T. 14 N., R. 6 W. only (NE. cor.) set at 480 chs. N. from cor. of T. 13 and 14 N., Rs. 5 and 6 W., as hereinbefore described. Therefore, at a point 54 lks. N. from said temp. Tp. cor., set an iron post 3 ft. long, 3 ins. in diam., 24 ins. in the ground, for cor. of T. 14 N., R. 6 W. only (NE. cor.), with brass cap, marked

T14 $\frac{1}{2}$ N R 6W
S 36
 S 1
 T14N
 Row
 1920

and raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 2 ft. high, SW. of post.

Thence,

West, on true line, on N. bdy. of sec. 1.

Over level mesa, thru. scattering timber and undergrowth.

39.50 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 36, frac. T. 14 $\frac{1}{2}$ N., R. 6 W., with brass cap, marked

$\frac{1}{4}$ S 36
 1920

and raise a mound of stone, 3 ft. base, 2 ft. high, N. of post.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 1 only, with brass cap, marked

$\frac{1}{4}$ S 1
 1920

and raise a mound of stone, 3 ft. base, 2 ft. high, S. of post.

Enter dense undergrowth, brs. N. and SE.

79.50 (40.00 chs. W. from $\frac{1}{4}$ sec. cor. of sec. 36), Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 35 and 36, frac. T. 14 $\frac{1}{2}$ N., R. 6 W., with brass cap, marked

T14 $\frac{1}{2}$ N | R 6W
S35 | S36
 S 1
 T14N
 1920

and raise a mound of stone, 3 ft. base, 2 ft. high, N. of post.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 1 and 2 only, with brass cap, marked

T14N
S 35
 S 2 | S 1
 T14N | R 6W
 1920

and raise a mound of stone, 3 ft. base, 2 ft. high, S. of post.

Survey of completion of N.bdy.of Township 14 North, Range 6 West. 5

Chains.

Land, level mesa.
Soil, rocky, 2nd and 3rd rate.
Timber, scattering small cedar.
Undergrowth, scrub cedar and oak, scattering in E. half;
dense in W. half.
Fair grass.

West, on true line, on N. bdy. of sec. 2.
Over level mesa, thru. dense undergrowth and scattering
timber.

29.50 Leave dense undergrowth, brs. N. and S.; thence thru.
scattering undergrowth and timber.

34.72 Rim of mesa, brs. N. 20° E. and SW.; leave top of mesa.

39.50 Descend 90 ft., over broken NW. slope, to
(40.00 chs. W. from cor. of secs. 35 and 36), Set an iron
post, 3 ft. long, 1 in. in diam., 28 ins. in the ground,
for 1/4 sec. cor. of sec. 35, frac. T. 14 1/2 N., R. 6 W., with
brass cap, marked

1/4 S 35
1920

and raise a mound of stone 3 ft. base, 2 ft. high, N. of
post.

40.00 Descend 11 ft., over NW. slope, to
Set an iron post, 3 ft. long, 1 in. in diam., over cross on
surface rock, in a mound of stone, 4 ft. base, 30 ins.
high, for 1/4 sec. cor. of sec. 2 only, with brass cap,
marked

1/4 S 2
1920

No accessory erected.
57.47 Descend 80 ft., over broken NW. slope, to
Foot of NW. slope; descend 55 ft., over gently rolling N.
slope, to

79.50 (80.00 chs. W. from cor. of secs. 35 and 36), Set an iron
post, 3 ft. long, 2 ins. in diam., over cross on sur-
face rock, in a mound of stone, 3 1/2 ft. base, 30 ins.
high, for cor. of secs. 34 and 35, frac. T. 14 1/2 N., R. 6
W., with brass cap, marked

T14 1/2 N | R6 W
S 34 | S 35
S 2
T14 N
1920

No accessory erected.
80.00 Descend slightly, over N. slope, to
Set an iron post 3 ft. long, 2 ins. in diam., over cross on
granite outcrop, 6x2x1 ft., in a mound of stone, 3 ft.
base, 30 ins. high, for cor. of secs. 2 and 3 only, with
brass cap, marked

T14 1/2 N
S 34
S 3 | S 2
T14 N | R6 W
1920

No accessory erected.
Land, level, rolling and broken.
Soil, rocky, 3rd rate.
Timber, scattering small cedar.
Undergrowth, scrub cedar, catclaw and cactus, dense and
scattering as noted.
Fair grass.

6. Survey of completion of N.bdy. of Township 14 North, Range 6 West.

Chains.

- West, on true line, on N.bdy. of sec. 3.
Over mountainous land, thru. scattering undergrowth; descend 40 ft., over NW. slope.
- 3.50 Drain, course S. 20° W.
Ascend 123 ft., over rocky E. slope.
- 28.00 Low ridge, brs. N. and S.
Descend 423 ft., over W. slope, to
- 39.50 (40.00 chs. W. from cor. of secs. 34 and 35), Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 34, frac. T. 14 $\frac{1}{2}$ N., R. 6 W., with brass cap, marked

 $\frac{1}{4}$ S 34

1920

and raise a mound of stone, 3 ft. base, 2 ft. high, N. of post.

- 40.00 Descend 10 ft., over W. slope, to
Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in a mound of stone, for $\frac{1}{4}$ sec. cor. of sec. 3 only, with brass cap, marked

 $\frac{1}{4}$ S 3

1920

- No accessory erected.
Descend 105 ft., over steep W. slope, to
- 44.50 Foot of steep descent, brs. N. and S.; descend 280 ft., over gradual W. slope, to
- 79.50 (80.00 chs. W. from cor. of secs. 34 and 35), Intersect the original cor. of secs. 3, 4, 33 and 34, established by John F. Hesse, U.S. Surveyor, in June 1915, which is an iron post, 3 ins. in diam., firmly set in mound of stone, properly marked on brass cap, and witnessed by mound of stone, W. of cor.

No bearing trees.

Change this cor. to refer to secs. 33 and 34, frac. T. 14 $\frac{1}{2}$ N., R. 6 W. only; by altering the marking on brass cap, to read,

T14 $\frac{1}{2}$ N
R6W S33 | S34

S 3

T14N

1915

- Destroy original mound of stone, W. of cor., and raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
In the retracement for resurvey of the W. $\frac{1}{2}$ of this Tp. bdy., hereinafter described, the true course of the E. half of S. bdy. of sec. 33, frac. T. 14 $\frac{1}{2}$ N., R. 6 W. is found to be west; therefore, continue line and measurement.
- 80.00 Descend slightly over W. slope, to
Set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in a mound of stone, for reestablished cor. of secs. 3 and 4 only, marked on brass cap,

T14 $\frac{1}{2}$ N.S 33

S 4 | S 3

T14N | R6 W

1920

No accessory erected.

Land, mountainous.

Soil, rocky, 4th rate.

No timber.

Undergrowth, scattering scrub cedar, oak, satclaw and palo cristo.

Chains.

Retracement for Resurvey.

From the original cor. of secs. 3, 4, 33 and 34, hereinbefore described,
 40.00 West, on random line, on S. bdy. of sec. 33 (E. $\frac{1}{2}$).
 Intersect the original $\frac{1}{4}$ sec. cor. of secs. 4 and 33, hereinafter described.
 The true course and dist. of E. half of S. bdy. of sec. 33, fracl. T. 14 $\frac{1}{2}$ N., R. 6 W. are therefore East, 40.00 chs.

Thence,
 39.90 West, on random line on S. bdy. of sec. 33 (W. $\frac{1}{2}$).
 Intersect the original cor. of secs. 4, 5, 32 and 33, hereinafter described.
 The true course and dist. of W. $\frac{1}{2}$ of S. bdy. of sec. 33, fracl. T. 14 $\frac{1}{2}$ N., R. 6 W. are therefore East, 39.90 chs.

 40.00 West, on a random line, on S. bdy. of sec. 32 (E. $\frac{1}{2}$).
 Fall 3 lks. S. of the original $\frac{1}{4}$ sec. cor. of secs. 5 and 32, hereinafter described.
 The true course and dist. of E. $\frac{1}{2}$ of S. bdy. of sec. 32, fracl. T. 14 $\frac{1}{2}$ N., R. 6 W. are therefore S. 89° 57' E., 40.00 chs.

Thence,
 40.04 West, on a random line, on S. bdy. of sec. 32 (W. $\frac{1}{2}$).
 Fall 4 lks. S. of the original cor. of secs. 5, 6, 31 and 32, hereinafter described.
 The true course and dist. of W. half of S. bdy. of sec. 32, fracl. T. 14 $\frac{1}{2}$ N., R. 6 W. are therefore S. 89° 57' E., 40.04 chs.

 40.06 West, on random line, on S. bdy. of sec. 31 (E. $\frac{1}{2}$).
 Fall 2 lks. N. of the original $\frac{1}{4}$ sec. cor. of secs. 6 and 31, hereinafter described.
 The true course and distance of E. $\frac{1}{2}$ of S. bdy. of sec. 31 fracl. T. 14 $\frac{1}{2}$ N., R. 6 W. are therefore N. 89° 58' E., 40.06 chs.

Thence,
 39.90 West, on random line, on S. bdy. of sec. 31 (W. $\frac{1}{2}$).
 Intersect the original cor. of T. 14 N., Rs. 6 and 7 W., and fracl. Ts. 14 $\frac{1}{2}$ N., Rs. 6 and 7 W., which is an iron post, 3 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, S. of cor.
 No bearing trees.
 The true course and dist. of W. $\frac{1}{2}$ of S. bdy. of sec. 31, fracl. T. 14 $\frac{1}{2}$ N., R. 6 W., are therefore East, 39.90 chs.

RESURVEY.

From the original cor. of Ts. 14 N., Rs. 6 and 7 W., and fracl. Ts. 14 $\frac{1}{2}$ N., Rs. 6 and 7 W., hereinbefore described,
 39.40 East, on true line, on N. bdy. of sec. 6.
 Over rolling land, thru. scattering undergrowth; ascend gradually, over rolling N. slope, to (440.00 chs. westing from NE. cor. of T. 14 N., R. 6 W.) Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 6 only; with brass cap, marked

$\frac{1}{4}$ S 6

1920.

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, S. of post.

8 Resurvey of W. 1/4 of N. bdy. of Township 14 North, Range 6 West.

Chains.

39.90

Intersect the original 1/4 sec. cor. of secs. 6 and 31, which is an iron post, 1 in. in diam., projecting 10 ins. above ground, firmly set, properly marked on brass cap, and witnessed by mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor. No bearing trees.

Change this cor. to refer to sec. 31 only by altering marking on brass cap, to read

1/4 S 31

1915

leaving accessory undisturbed.

Thence,

N. 89° 58' E., on true line, continuing measurement of N. bdy. of sec. 6.

Over rolling land, thru. scattering undergrowth; ascend 185 ft., over N. slope.

77.50

Leave N. slope; ascend 30 ft., over S. slope, to

79.40

Set an iron post, 3 ft. long, 2 ins. in diam., 8 ins. in the ground, to bedrock, 20 ins. in a mound of stone, for reestablished cor. of secs. 5 and 6 only, with brass cap, marked

T 14 1/2 N.

S 31

S 6 | S 5
T14N | R 6W

1920

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, S. of post.

Land, rolling.

Soil, rocky, 3rd rate.

Timber, none.

Undergrowth, scattering palo christi and catclaw.

Poor grass.

.56

N. 89° 58' E., on true line, on N. bdy. of sec. 5.

Over rolling and mountainous land, thru. scattering undergrowth; ascend slightly over S. slope, to

(40.06 chs. N. 89° 58' E. from 1/4 sec. cor. of sec. 31), Intersect the original cor. of secs. 5, 6, 31 and 32, which is an iron post, 3 ins. in diam., firmly set in mound of stone, properly marked on brass cap, and witnessed by mound of stone 2 ft. base, 1 1/2 ft. high, W. of cor. No bearing trees. Change this cor. to refer to secs. 31 and 32 only by altering marking on brass cap, to read

T14 1/2 N

R6W S31 | S32

S 5

T14N

1915

Destroy original mound of stone W. of cor. and raise a new mound of stone, 3 ft. base, 2 ft. high, N. of cor. Thence,

S. 89° 57' E. on true line, continuing measurement of N. bdy. of sec. 5. Ascend 25 ft. over S. slope to

4.70

Thence over rolling S. slope; not much change in elevation.

8.00

W. end of pond 15 chs. long, 5 chs. wide, brs. S. 7 chs. dist.

20.20

Descend 86 ft. over SE. slope.

30.10

Ascend 86 ft., over NW. slope, to 1/4 sec. cor. of sec. 5.

Thence,

N. 89° 58' E., on true line, continuing measurement of N. bdy. of sec. 5.

40.00

Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 5 only, with brass cap, marked

Resurvey of W. 1/2 of N. bdy, of Township 14 North, Range 6 West, 9

Chains.

1/4 S 5

1920

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, S. of post.

40.60 Ascend 15 ft., over steep NW. slope, to (40.04 chs. S. 89° 57' E. from cor. of secs. 31 and 32), Intersect the original 1/4 sec. cor. of secs. 5 and 32, which is an Iron Post, 1 in. in diam., projecting 10 ins. above the ground, firmly set, properly marked on brass cap, and witnessed by mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor. No bearing trees. Change this cor. to refer to sec. 32 only by altering marking on brass cap to read

1/4 S 32

1915

Leaving accessory undisturbed.

Thence, S. 89° 57' E., on true line, continuing measurement of N. bdy. of sec. 5.

Ascend 525 ft. over steep NW. slope, broken by a series of cliffs.

51.65 Top of ascent. Rim of mesa, brs. NE. and SW. Thence over level top of mesa to

78.00 Rim of mesa, brs. N. and SE.

Leave level top of mesa; descend 95 ft. over steep NE. slope, to

80.00 Set an iron post, 3 ft. long 2 ins. in diam., 26 ins. in a mound of stone, for reestablished cor. of secs. 4 and 5 only, with brass cap, marked

T14 1/2 N

S 32

S 5 | S 4

T14 N | R 6 W

1920

And raise a mound of stone, 2 ft. base, 2 ft. high, S. of post.

Land, rolling, mountainous and level.

Soil, rocky, 4th rate.

Timber, very scattering cedar.

Undergrowth, scattering scrub oak, catclaw and cactus.

Poor grass.

S. 89° 57' E., on true line, on N. bdy. of sec. 4.

Over mountainous land, thru. scattering undergrowth; descend 20 ft., over steep NE. slope, to

.60 (40.00 chs. S. 89° 57' E. from 1/4 sec. cor. of sec. 32), Intersect the original cor. of secs. 4, 5, 32 and 33, which is an iron post, 3 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by a mound of stone; W. of cor. No bearing trees. Change this cor. to refer to secs. 32 and 33, only by altering the marking on brass cap to read

T14 1/2 N

R6W S 32 | S 33

S 4

T14 N

1915

Destroy original mound of stone, and raise a new mound of stone 3 ft. base, 2 ft. high, N. of post.

Thence,

East, on a true line, continuing measurement of N. bdy. of sec. 4.

40.00 Descend 650 ft., over steep NE. slope, to set an iron post, 3 ft. long, 1 in. in diam., 15 ins. in ground,

10 Resurvey of West 1/2 of North bdy. of T. 14 N., R. 6 W.

Chains. 10 ins. in mound of stone, for reestablished 1/4 sec. cor. of sec. 4 only, with brass cap, marked

1/4 S 4
1920

40.50 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, S. of post. Descend 8 ft., over NE. slope, to (39.90 chs. E. from cor. of secs. 32 and 33) Intersect the original 1/4 sec. cor. of secs. 4 and 33, which is an iron post, 1 in. in diam., projecting 10 ins. above ground firmly set, properly marked on brass cap, and witnessed by mound of stone 2 ft. base, 1 1/2 ft. high, N. of cor. No bearing trees. Change this cor. to refer to sec. 33 only by altering marking on brass cap to read

1/4 S 33
1915

leaving accessory undisturbed.

Thence,
East on true line, continuing measurement of N. bdy. of sec. 4.

64.00 Descend 400 ft., over steep broken NE. slope, to Dry channel of S. Tank Creek, 40 lks. wide, course NW.

80.00 Ascend 170 ft., over SW. slope, to Intersect the reestablished cor. of secs. 3 and 4, hereinbefore described in notes of survey of Completion of N. bdy. of T. 14 N., R. 6 W.

Land, broken and mountainous.
Soil, rocky, 4th rate.
Timber, none.
Undergrowth, scattering scrub oak, catclaw and palo christo.
Poor grass.

Boundaries of that part of T. 14 N., R. 6 W. Subdivided under Group 90.

Latitudes, departures, and closing errors.

Line designated.	True course.	Dist.	Latitudes.		Departures.	
			N.	S.	E.	W.
Subdivisional boundary,	S. 89° 57' W.	79.92		.07		79.92
	S. 89° 49' W.	160.38		.51		160.38
	N. 89° 59' W.	80.16	.02			80.16
	S. 89° 55' W.	79.80		.12		79.80
	S. 89° 59' W.	79.16		.02		79.16
West boundary,	North,	320.00	320.00			
North bdy.	East,	39.90			39.90	
	N. 89° 58' E.	40.06	.02		40.06	
	S. 89° 57' E.	80.04		.07	80.04	
	East,	319.40			319.40	
East boundary,	South,	320.54		320.54		
Convergency,					.33	
Totals,			320.04	321.33	479.73	479.42
				320.04	479.42	
Error in latitude,			1.29			
Error in departure,					0.31	

Survey of part (completion of) Subdivision lines of T.14 N. R.6 W.11

Chains.

The original cor. of secs. 23, 24, 25 and 26, established in February, 1915, is an iron post, 2 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by mound of stone W. of cor. No bearing trees.

Thence,

N.0°1'W., on true line, bet. secs. 23 and 24.


Over rolling top of lower mesa. No timber or undergrowth. Descend slightly over NW. slope, to

4.00 Wash, 10 lks. wide, course NW.; ascend 75 ft., over SW. slope to

16.00 Wash, 10 lks. wide, course SW. Leave top of lower mesa; ascend 400 ft. over S. slope, to

39.20 Rim of upper mesa, brs. E. and W.; thence over gently rolling surface of top of upper mesa; ascend slightly over S. slope, to


40.00 Set an iron post 3 ft. long, 1 in. in diam., 16 ins. in the ground, to bed rock, 10 ins. in a mound of stone, for 1/4 sec. cor., with brass cap, marked



Raise a mound of stone, 3 ft. base, 3 ft. high, W. of post. Ascend 15 ft. over gradual S. slope, to

43.00 Leave rolling and enter level land on top of upper mesa, thru. very scattering undergrowth.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 13, 14, 23 and 24, with brass cap, marked



Raise a mound of stone, 3 ft. base, 2 ft. high, W. of post. Land, rolling and level.

Soil, rocky, 4th rate.

Timber, none.

Undergrowth, very scattering scrub oak, catclaw and cactus in north half only.

Fair grass.

40.00 N.89°57'E., on a random line, bet. secs. 13 and 24.

80.07 Set temp, 1/4 sec. cor.

Intersect the E. bdy. of Tp., 24 lks. N. of the cor. of secs. 13, 18, 19 and 24, hereinbefore described.


Thence,

N.89°53'W., on true line, bet. secs. 13 and 24.

Over level land on top of upper mesa, thru. very scattering undergrowth.

27.00 Leave scattering undergrowth, and enter dense undergrowth, brs. N. and SW.

40.03 1/2 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked



48.00 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of post. Leave dense undergrowth, and enter scattering undergrowth, brs. N. and S.

80.07 The cor. of secs. 13, 14, 23 and 24.

Land, level.

Soil, rocky, 3rd and 4th rate.

Timber, none.

Undergrowth, scrub oak and catclaw, scattering and dense as noted. Fair grass.

12 Part (completion of) Subdivision lines of T.14 N. R.6 W.

Chains.


N.0°1'W., on true line, bet. secs.13 and 14.
Over level land on top of upper mesa, thru. very scattering undergrowth.

15.00 Leave level and enter gently rolling land; descend 40 ft. to


23.00 Wash, course NW.; ascend 11 ft. to

30.00 Leave rolling and enter level land, continuing over top of upper mesa.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



80.00 Raise a mound of stone, 3 ft. base, 2 ft. high, W. of post.
Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 11, 12, 13 and 14, with brass cap, marked



Raise a mound of stone, 3 ft. base, 3 ft. high, W. of post.
Land, level and gently rolling.
Soil, rocky, 3rd and 4th rate.
Timber, none.
Undergrowth, very scattering scrub oak and catclaw.
Fair grass.

40.00 S.89°53'E., on a random line, bet. secs. 12 and 13.
Set temp. $\frac{1}{4}$ sec. cor.

80.04 Intersect the E. bdy. of the Tp., 4 lks. N. of the cor. of secs. 7, 12, 13 and 18, hereinbefore described.

Thence,


N.89° 51'W., on true line, bet. secs. 12 and 13.

Over gently rolling top of upper mesa; sloping NW., thru. very scattering undergrowth.

16.20 Old road brs. N. and S.

27.00 Wash, course NW.; thence over gentle N. slope, to

40.02 Set an iron post 3 ft. long, 1 in. in diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



Raise a mound of stone, 3 ft. base, 2 ft. high, N. of post.
Thence over level top of upper mesa, thru. scattering undergrowth.

49.90 Houses at Schultz and Mullen ranch, bear N.38°E. and N.40°E.

80.04 The cor. of secs. 11, 12, 13 and 14.

Land, rolling and level.

Soil, rocky, 3rd and 4th rate.

Timber, none.

Undergrowth, very scattering scrub oak and catclaw.

Fair grass.

N.0°1'W., on true line, bet. secs. 11 and 12.

Over level land on top of upper mesa. No timber or undergrowth. Level top of upper mesa.

30.00 Leave top of upper mesa; descend 46 ft. over N. slope to

40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

Part (completion of) Subdivision lines of T.14 N. R.6 W.

Chains.

S11 | S12
1920

53.50 Raise a mound of stone, 3 ft. base, 2 ft. high, W. of post; descend 70 ft., over N. slope, to
 58.50 Wash, course NW.; ascend 25 ft., over SW. slope, to
 60.70 Top of ascent; thence across top of low spur sloping NW.
 67.00 Wire fence brs. N. 50 1/4° W. and S. 50 1/4° E.
 Leave top of spur; descend 63 ft., over N. slope, to
 Dry channel of Tank Creek, course W. about 7 chs.; thence NW.
 Ascend 82 ft., over SW. slope, thru. very scattering undergrowth.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 4 ins. in the ground, to bed rock, 22 ins. in a mound of stone for cor. of secs. 1, 2, 11 and 12, with brass cap, marked

T14N | Row.
S 2 | S 1
S11 | S12
1920

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of post. Land, level and rolling.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, very scattering scrub oak and catclaw in north half.
 Fair grass.

40.00 N. 89° 51' E., on random line, bet. secs. 1 and 12.
 80.04 Set temp. 1/4 sec. cor.
 Intersect the E. bdy. of the Tp., 9 lks. S. of the cor. of secs. 1, 6, 7 and 12, hereinbefore described.
 Thence,
 N. 89° 55' W., on true line, bet. secs. 1 and 12.
 Over gently rolling N. slope on top of upper mesa, thru. scattering timber and undergrowth.
 5.22 Wire fence brs. S. 58° 10' E. and N. 58° 10' W., for a dist. of 100 lks.; thence N. 71° W.
 30.00 Leave top of mesa, N. slope. Leave scattering timber, brs. NW and SE.; thence thru. scattering undergrowth. Descend 46 ft., over SW. slope, to
 40.02 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground, to bed rock, 8 ins. in a mound of stone, for 1/4 sec. cor., with brass cap, marked

1/4 S 1
S 12
1920

41.95 Raise a mound of stone, 3 ft. base, 2 ft. high, N. of post. Descend 100 ft., over SW. slope to sec. cor.
 80.04 Old road brs. NW. and SE.
 The cor. of secs. 1, 2, 11 and 12.
 Land rolling.
 Soil, rocky, 4th rate.
 Timber, scattering cedar.
 Undergrowth, scattering catclaw and scrub oak.
 Fair grass.

40.00 N. 0° 1' W., on random line, bet. secs. 1 and 2.
 80.50 Set temp. 1/4 sec. cor.
 Intersect the N. bdy. of the Tp., 5 lks. W. of the cor. of secs. 1 and 2, hereinbefore described.
 Thence,
 S. 0° 1' W., on true line, bet. secs. 1 and 2.

14 Part(completion of)Subdivision lines of T.14 N., R. 6 W.

Chains.

Over level land, on top of mesa, thru. dense timber and scattering undergrowth.

21.50 Dim road, brs.NW. and SE.

30.00 Leave dense and enter scattering timber and undergrowth; continue over level top of mesa.

40.50 Set an iron post 3 ft.long, 1 in. in diam., 28 ins.in the ground, for $\frac{1}{4}$ sec.cor., with brass cap, marked

$\frac{1}{4}$
S 2 | S 1
1920

54.70 Raise a mound of stone, 3 ft. base, 2 ft.high, W.of post. Wire fence brs. S.71°E. and N.71°W., about 4.00 chs.dist. Thence S. 32°W. and N.52 $\frac{1}{2}$ °W.

65.00 Rim of mesa, brs.NW. and SE. Leave level top of mesa, and enter rolling land; descend 80 ft., over SW.slope, to

80.50 The cor.of secs.1,2,11 and 12.
Land, level and rolling.
Soil, rocky, 3rd and 4th rate.
Timber, small cedar, dense and scattering, as noted.
Undergrowth, scattering scrub cedar, catclaw and scrub oak.
Fair grass.

The original cor.of secs.22,23, 26 and 27, established in February, 1915, is an iron post, 2 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by mound of stone, W.of cor. No bearing trees.

• Thence,
N.0°1' W., on true line, bet. secs. 22 and 23.
Over gently rolling land, on top of lower mesa; no timber or undergrowth.
Descend 149 ft. over N.slope.
1.60 Old road brs. S.70°E. and N.70°W.

36.15 Wash, course S, 70°W. Leave top of lower mesa and begin ascent to upper mesa, over SW.slope, thru. scattering undergrowth; ascend 23 ft. to

40.00 Set an iron post, 3 ft. long, 1 in.in diam., 10 ins.in the ground, to bed rock, 16 ins.in a mound of stone, for $\frac{1}{4}$ sec.cor., with brass cap, marked

$\frac{1}{4}$
S22 | S23
1920

41.07 Raise a mound of stone, 3 ft. base, 2 ft. high, W.of post. Ascend 235 ft., over rolling SW.slope to sec.cor.

80.00 Wire fence brs.N.48°E. and S.48°W.
Set an iron post, 3 ft.long, 2 ins. in diam., 24 ins. in the ground, for cor.of secs.14,15,22 and 23, with brass cap, marked

T14N | R6W
S15 | S14
S22 | S23
1920

Raise a mound of stone, 3 ft.base, 2 ft.high,W.of post. From this cor., Ed Sims' cabin and corral brs.S.29° 45'W. Land, rolling.
Soil, rocky, 4th rate.
Timber, none.
Undergrowth, scattering catclaw and scrub oak.
Fair grass.

N.89°49'E., on random line, bet. secs. 14 and 23.

Part(completion of)Subdivision lines of T.14 N.R.6 W.

Chains.	
40.00	Set temp. $\frac{1}{4}$ sec.cor.
80.36	Intersect N. and S. line, 21 lks.N. of the cor.of secs.13, 14, 23 and 24. Thence, S.89°58'W., on true line, bet. secs.14 and 23. Over level land on top of upper mesa; no timber or undergrowth.
40.18	Set an iron post, 3 ft.long, 1 in. in diam., 20 ins. in the ground, to bed rock, 8 ins. in a mound of stone, for $\frac{1}{4}$ sec.cor., with brass cap, marked $\frac{1}{4}$ S 14 S 23 1920
62.00	Raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 2 ft. high,N.of post. Rim of upper mesa, brs.NW. and SE.; leave level mesa top and descend 307 ft.over rolling SW.slope, thru.scatter- ing undergrowth;to
80.36	The cor.of secs.14,15, 22 and 23. Land, level and rolling. Soil,rocky,3rd and 4th rate. Timber, none. Undergrowth, scattering scrub oak and catclaw where noted. Fair grass.

	N.0°1'W., on true line, bet. secs.14 and 15. Over rolling SW.slope, thru. scattering undergrowth;as- cend 316 ft.to.
18.50	Rim of upper mesa, brs.NW. and SE. Leave rolling land, and enter level top of upper mesa. No timber or undergrowth.
40.00	Set an iron post 3 ft.long, 1 in. in diam.,6 ins. in the ground to bed rock, 20 ins. in a mound of stone, for $\frac{1}{4}$ sec.cor., with brass cap, marked $\frac{1}{4}$ S15 S14 1920
	Raise a mound of stone, 3 ft.base, 2 ft. high,W.of cor. Continue across level top of upper mesa.
65.00	Rim of upper mesa, brs.E.and W.; leave level top of mesa; enter rolling land. Descend 70 ft.over N.slope, thru. scattering undergrowth.
79.60	Gulch, course NW.; ascend 15 ft.,over SW.slope,to
80.00	Set an iron post 3 ft.long, 2 ins. in diam., 10 ins. in the ground, to bed rock, 16 ins. in a mound of stone, for cor.of secs.10,11,14 and 15,with brass cap, marked T14N R6 W S10 S11 S15 S14 1920
	Raise a mound of stone, 3 ft. base, 2 ft.high,W.of post. Land,level and rolling. Soil,rocky, 4th rate. Timber, none. Undergrowth, scattering scrub oak and catclaw where noted. Fair grass.

	N.89°58'E., on random line; bet. secs.11 and 14.
40.00	Set temp. $\frac{1}{4}$ sec.cor.
80.34	Intersect N. and S. line, 5 lks.S. of the cor.of secs.11, 12,13 and 14. Thence, S.89°58'E., on true line, bet. secs.11 and 14.

16 Part(completion of) Subdivision lines of T.14 North, Range 6 W.

Chains.

Thence,
S.89°56'W., on a true line, bet. secs. 11 and 14.
Over level land, on top of upper mesa. No timber or undergrowth.

40.17 Set an iron post, 3 ft. long, 1 in. in diam., 21 ins. in the ground, 5 ins. in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ S 11

S 14

1920

70.00 Raise a mound of stone, 3 ft. base, 2 ft. high, N. of post. Continue across level top of upper mesa.

Rim of upper mesa, brs. NW. and SE. Leave level mesa top. Enter rolling land; descend 81 ft. over SW. slope, thru. scattering undergrowth, to

80.34 The cor. of secs. 10, 11, 14 and 15.

Land, level and rolling.

Soil, rocky, 4th rate.

Timber, none.

Undergrowth, scattering scrub oak, and catclaw where noted. Fair grass.

N.0°1'W., bet. secs. 10 and 11.

Over rolling land, thru. scattering undergrowth; ascend 30 ft.; over SW. slope, to

5.00 Rim of upper mesa, brs. NW. and E.; thence over gently rolling top of upper mesa, thru. scattering undergrowth.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
S10 | S11

1920

Raise a mound of stone 3 ft. base, 2 ft. high, W. of post. Continue over gently rolling top of mesa, thru. scattering undergrowth.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 2, 3, 10 and 11, with brass cap, marked

T14N | R6 W
S 3 | S 2
S10 | S11

1920

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of post. Land, rolling.

Soil, rocky, 4th rate.

Timber, none.

Undergrowth, scattering scrub oak and catclaw.

Fair grass.

40.00 N.89°56'E., on random line, bet. secs. 2 and 11.

Set temp. $\frac{1}{4}$ sec. cor.

80.32 Intersect N. and S. line, 4 lks. N. of the cor. of secs. 1, 2, 11 and 12.

Thence,

S.89°58'W., on true line, bet. secs. 2 and 11.

Over rolling land, thru. scattering undergrowth; descend 100 ft., over SW. slope.

21.27 Wire fence brs. N.32°E. and S.32° W. about 2.00 chs. dist.; thence SE. and SW.

28.00 Dry channel of Tank Creek, course NW.; ascend 50 ft., over NE. slope to $\frac{1}{4}$ sec. cor.

36.90 Wire fence brs. N.35½°W. and S.35½°E.

Survey of part(completion of)Subdivision lines of T.14N.R.6W. 17

- Chains.
- 40.16 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
- $\frac{1}{4}$ S 2
S 11
1920
- 45.00 Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N, of post. Ascend 25 ft., over NE. slope, to Rim of upper mesa, brs. NW. and SE.; thence across gently rolling top of mesa, to
- 80.32 The cor. of secs. 2, 3, 10 and 11. Land, rolling. Soil, rocky, 4th rate. Timber, none. Undergrowth, scattering scrub oak and catclaw. Fair grass.
-
- 40.00 N. 0° 1' E., on random line, bet. secs. 2 and 3. Set temp. $\frac{1}{4}$ sec. cor.
- 80.42 Intersect the N. bdy. of Tp., 37 lks. W. of the cor. of secs. 2 and 3, hereinbefore described. Thence, S. 0° 17' W., on true line, bet. secs. 2 and 3. Over rolling and broken land, thru. scattering timber and undergrowth; ascend 182 ft., over N. slope, to
- 12.50 Rim of upper mesa, brs. E. and W. Thence across rolling W. slope, on top of upper mesa. Descend 75 ft. to
- 40.42 Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the ground, to bed rock, 20 ins. in a mound of stone, 4 ft. base, for $\frac{1}{4}$ sec. cor., with brass cap, marked
- $\frac{1}{4}$ S 2
S 3 | S 2
1920
- No accessory erected. Continue over gently rolling top of mesa, to
- 50.80 Rim of upper mesa, brs. E. and W. Leave top of mesa; descend 125 ft., over S. slope, to
- 60.85 Dry channel of Tank Creek, course N. 70° W.; ascend 110 ft., over N. slope, to
- 64.25 Rim of upper mesa, brs. E. and W.; thence across rolling top of mesa; ascend 25 ft. to
- 80.42 The cor. of secs. 2, 3, 10 and 11. Land, rolling and broken. Soil, rocky, 3rd rate. Timber, very scattering cedar. Undergrowth, scattering catclaw and scrub oak. Fair grass.
-
- The true point for the cor. of secs. 21, 22, 27 and 28, is marked by a cross (x) on a granite boulder, 18x8x6 ft., wedged between large granite outcrops. The original witness cor. to this cor. is an iron post 2 ins. in diam., firmly set in a mound of stone at 28 lks. S. 0° 2' E. from cor. point, properly marked on brass cap, and witnessed by mound of stone, W. of cor. No bearing trees.
- From true cor. point,
N. 0° 2' W., on true line, bet. secs. 21 and 22. Over mountainous land, thru. scattering undergrowth. Descend 46 ft., over W. slope, to
- 5.50 Wash, course SW. Ascend slightly over SW. slope, to
- 10.00 Wash, course S. 20° W. Ascend 265 ft., over S. slope, to $\frac{1}{4}$ sec. cor.
- 34.83 Ed Sims' cabin and corral bear S. 67 $\frac{1}{2}$ ° E.

18 Part (completion of) Subdivision lines of T.14 N. R.6 W.

Chains.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 10 ins. in the ground, to bed rock, 20 ins. in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
S21 | S22
1920

57.00 Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. Ascend 580 ft., over S. slope, to Ridge, brs. E. and W. Descend 388 ft., over steep N. slope, to Foot of steep descent, brs. E. and W.; descend 70 ft., over gradual N. slope, to

70.00 Set an iron post, 3 ft. long, 2 ins. in diam., 4 ins. in the ground to bed rock, 20 ins. in a mound of stone, for cor. of secs. 15, 16, 21 and 22, with brass cap, marked

T14N | R6 W
S16 | S15

S21 | S22
1920

No accessory erected.
Land, mountainous.
Soil, rocky, 4th rate.
Timber, none.
Undergrowth, scattering scrub oak, catclaw, palo christi and mahogany.
Poor grass.

40.00 N. $89^{\circ}49'E.$, on a random line, bet. secs. 15 and 22. Set stemp. $\frac{1}{4}$ sec. cor.
80.18 Intersect N. and S. line, 36 lks. N. of the cor. of secs. 14, 15, 22 and 23.

Thence, N. $89^{\circ}56'W.$, on true line, bet. secs. 15 and 22. Over mountainous land, thru. scattering timber and undergrowth. Descend 222 ft., over SW. slope.

14.00 Wash, course S.; ascend 25 ft., over E. slope, to
16.50 Point of spur, sloping S. from NW. \downarrow descend 34 ft., over W. slope, to

18.00 Foot of slope from spur, brs. NW. and SE. Leave mountainous land, and enter level land, and dense undergrowth.

40.09 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ S 15
S 22
1920

40.30 Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of post. Wash, course SE. Leave level, and enter mountainous land, scattering timber and dense undergrowth; ascend 75 ft. over NE. slope, to

52.00 Ascend 83 ft., over E. slope, to
60.00 Saddle in ridge, brs. N. and S.; descend 17 ft., over W. slope, to

65.30 Ascend 103 ft., over NE. slope, to
80.18 The cor. of secs. 15, 16, 21 and 22.

Land, mountainous and level.
Soil, rocky, 3rd and 4th rate.
Timber, scattering small cedar.
Undergrowth, scrub oak, catclaw, palo verde and mahogany, scattering and dense as noted.
Poor grass.

N. $0^{\circ}2' W.$, on true line, bet. secs. 15 and 16. Over mountainous land, thru. scattering timber and dense

Part (completion of) Subdivision lines of T.14 N., R.6 W. 19.

Chains.

10.70 undergrowth; descend 190 ft., over N. slope.
 Gulch, course W., with small stream of running water; ascend 434 ft., over S. slope, strewn with large boulders.
 33.30 Ridge, brs. E. and NW.; descend 186 ft., over N. slope, to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 22 ins. in the ground, 8 ins. in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
 S16 | S15
 1920

45.00 Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of post.
 Descend 35 ft., over N. slope, to
 67.00 Ascend 130 ft., over broken E. slope, to
 80.00 Descend 50 ft., over NE. slope, to
 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 9, 10, 15 and 16, with brass cap, marked

T14N | R6 W
 S 9 | S10
 S16 | S15
 1920

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of post.
 Land, mountainous.
 Soil, rocky, 4th rate.
 Timber, scattering small cedar.
 Undergrowth, dense scrub oak, catclaw and mahogany.
 Poor grass.

40.00 S. $89^{\circ}56'$ E., on random line, bet. secs. 10 and 15.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.97 Intersect N. and S. line, 2 lks. N. of the cor. of secs. 10, 11, 14 and 15.
 Thence,
 N. $89^{\circ}55'$ W., on true line, bet. secs. 10 and 15.
 Over mountainous land, thru. dense undergrowth and scattering timber; descend 15 ft., over SW. slope, to
 .30 Wash, course NW.; ascend 80 ft., over NE. slope.
 29.00 Spur, from upper mesa, slopes N.
 Descend 165 ft., over W. slope, to
 39.98 $\frac{1}{2}$ Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ S 10
 S 15
 1920

50.00 Raise a mound of stone, 3 ft. base, 2 ft. high, N. of post.
 Descend 60 ft., over W. slope, to
 Wash, course S., heads about 10 chs. N.
 68.00 Ascend 70 ft., over E. slope, to
 79.97 Ascend 30 ft., over NE. slope, to
 The cor. of secs. 9, 10, 15 and 16.
 Land, mountainous.
 Soil, rocky, 3rd and 4th rate.
 Timber, scattering small cedar.
 Undergrowth, dense scrub oak and catclaw.

40.00 N. $0^{\circ}2'$ W., on true line, bet. secs. 9 and 10.
 Over broken, mountainous land, thru. scattering timber and dense undergrowth; descend 105 ft., over NE. slope, to
 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground, 10 ins. in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked

20 Part (completion of) Subdivision lines of T. 14 N., R. 6 W.

Chains.

$$\begin{array}{c} \frac{1}{4} \\ \text{S } 9 \text{ } | \text{ } \text{S } 10 \\ \hline 1920 \end{array}$$

- Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of post.
Leave mountainous, and enter rolling land. Descend slightly to
- 42.00 Wash, course NE. Thence over E. slope; descend 13 ft. to
57.70 Wash, 20 lks. wide, course W. Thence over rolling W. slope;
ascend 40 ft. to
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in
the ground, for the cor. of secs. 3, 4, 9 and 10, with
brass cap, marked.

$$\begin{array}{c} \text{T14N} | \text{R6 W} \\ \text{S } 4 | \text{S } 3 \\ \hline \text{S } 9 | \text{S } 10 \\ 1920 \end{array}$$

Raise a mound of stone 3 ft. base, 2 ft. high, W. of post.
Land, mountainous and rolling.
Soil, rocky, 3rd rate.
Timber, scattering small cedar and pinon.
Undergrowth, dense scrub oak, catclaw and mahogany.
Poor grass.


- 40.00 S. $89^{\circ}55'$ E. on random line, bet. secs. 3 and 10.
Set temp. $\frac{1}{4}$ sec. cor.
80.00 Intersect N. and S. line, 5 lks. N. of the cor. of secs. 2,
3, 10 and 11.
Thence,
N. $89^{\circ}53'$ W. on a true line, bet. secs. 3 and 10.
Over level land, across top of upper mesa, thru. scattering
timber and undergrowth.
30.00 Rim of upper mesa, brs. N. and S.; leave top of mesa, and
enter rolling land.
Descend 90 ft., over W. slope, to
40.00 Set an iron post 3 ft. long, 1 in. in diam., 28 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
- $$\begin{array}{c} \frac{1}{4} \text{ S } 3 \\ \hline \text{S } 10 \\ 1920 \end{array}$$

- 55.00 Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of
post.
75.00 Descend 70 ft., over NW. slope, to
Ascend 50 ft. over gradual NE. slope, to
80.00 Enter level land.
The cor. of secs. 3, 4, 9 and 10.
Land, level and rolling.
Soil, rocky, 4th rate.
Timber, scattering small cedar and pinyon.
Undergrowth, scattering oak and catclaw.
Fair grass.

- 40.00 N. $0^{\circ}17'$ E., on random line, bet. secs. 3 and 4.
Set temp. $\frac{1}{4}$ sec. cor.
80.20 Intersect the N. bdy. of the Tp., 12 lks. E. of the reestab-
lished cor. of secs. 3 and 4, hereinbefore described.
Thence,
S. $0^{\circ}12'$ W., on true line, bet. secs. 3 and 4.
Over mountainous land, thru. scattering undergrowth.
Descend 92 ft., over SW. slope.
7.50 Tank Creek, course NW., water in pools.
Ascend 750 ft. over N. slope, thru. dense undergrowth.
32.00 Rim of mesa, brs. E. and W.; thence over gently rolling top
of mesa.
40.20 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

Part of (completion) Subdivision lines of T.14 N., R.6 W. 21


Chains.




48.70 Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of post.
 Rim of mesa, brs. NE. and SW. Leave top of mesa.
 70.00 Descend 80 ft., over SE. slope, to
 Leave rolling, and enter level land.
 80.20 The cor. of secs. 3, 4, 9 and 10.
 Land, mountainous, rolling and level.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, scrub oak, mahogany and catclaw, scattering
 and dense as noted.
 Fair grass.

 The original cor. of secs. 20, 21, 28 and 29, established in
 February, 1915, is an iron post, 2 ins. in diam.,
 firmly set in mound of stone, properly marked on brass
 cap, and witnessed by mound of stone, W. of cor. No
 bearing trees.

40.00 Thence,
 N. 0° 2' W., on true line, bet. secs. 20 and 21.
 Over mountainous land, along rocky broken E. slope, thru.
 scattering timber and undergrowth; ascend 60 ft. to
 Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in the
 ground, 18 ins. in a mound of stone, for ¼ sec. cor.,
 with brass cap, marked



60.50 Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of post.
 Ascend 135 ft., over SE. slope.
 Ridge, brs. E. and W.
 80.00 Descend 154 ft., over broken NE. slope, to
 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in
 the ground, 10 ins. in a mound of stone, for cor. of secs.
 16, 17, 20 and 21, with brass cap, marked



Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of post.
 Land, mountainous and broken.
 Soil, rocky, 4th rate.
 Timber, scattering small cedar.
 Undergrowth, scattering scrub oak, mahogany, catclaw and
 palo christi.
 Fair grass.

40.00 S. 89° 59' E., on random line, bet. secs. 16 and 21.
 80.36 Set temp. ¼ sec. cor.
 Intersect N. and S. line, 5 lks. N. of the cor. of secs. 15,
 16, 21 and 22.

Thence,
 N. 89° 57' W., on true line, bet. secs. 16 and 21.
 Over mountainous land, strewn with large granite out-
 crops and boulders.
 Along N. slope, thru. dense undergrowth; ascend 55 ft. to
 12.25 Descend 90 ft. to
 22.00 Gully, course N.; ascend 190 ft., over NE. slope, to
 39.20 Descend 24 ft. to

22 Part (completion) of the Subdivision lines of T.14 N. R.6 W.

Chains.									
40.18	Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in a mound of stone, 3 ft. base, for $\frac{1}{4}$ sec. cor., with brass cap, marked $\frac{1}{4}$ S 16 S 21 1920								
58.00	No accessory erected. Ascend 203 ft., over NE. slope. Short steep, rocky spur, slopes N. 20° W. Descend 574 ft., over W. slope, to sec. cor.								
79.80	Wash, 5 lks. wide, course NW.								
80.36	The cor. of secs. 16, 17, 20 and 21. Land, mountainous and broken. Soil, rocky, 4th rate. Timber, scattering small cedar. Undergrowth, dense scrub oak, mahogany, catclaw and laurel. Poor grass.								

.20	N. 0° 2' W., on true line, bet. secs. 16 and 17. Over mountainous land, thru. scattering timber and undergrowth.								
14.00	Drain, course NW.; descend 63 ft., over NW. slope, to								
36.70	Descend 250 ft., over N. slope, to Gulch, with stream of running water, 15 lks. wide, 1 in. deep, course W. Leave scattering timber and undergrowth.								
40.00	Ascend 120 ft., over S. slope, to Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap, $\frac{1}{4}$ S17 S16 1920								
53.00	Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Ascend 387 ft., over S. slope. Spur, slopes SE.; enter dense undergrowth; descend 122 ft. over NE. slope, to								
59.00	Ascend 20 ft., over SE. slope, to								
65.00	Spur, slopes NE.; descend 133 ft., over NW. slope to sec. cor.								
76.50	Wash, course NW.								
80.00	Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 8, 9, 10 and 17, with brass cap, marked <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>T14N</td> <td>R6W</td> </tr> <tr> <td>S 8</td> <td>S 9</td> </tr> <tr> <td>S17</td> <td>S16</td> </tr> <tr> <td colspan="2" style="text-align: center;">1920</td> </tr> </table>	T14N	R6W	S 8	S 9	S17	S16	1920	
T14N	R6W								
S 8	S 9								
S17	S16								
1920									
	Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of post. Land, mountainous. Soil, rocky, 4th rate. Timber, scattering small cedar. Undergrowth, scrub oak, mahogany, catclaw and palo christi, scattering and dense as noted. Poor grass.								

40.00	S. 89° 57' E., on a random line, bet. secs. 9 and 16. Set temp. $\frac{1}{4}$ sec. cor.								
80.31	Intersect N. and S. line, 27 lks. S. of the cor. of secs. 9, 10, 15 and 16. Thence, S. 89° 51' W., on true line, bet. secs. 9 and 16. Over broken, mountainous land, thru. scattering timber and undergrowth.								

Part (completion) of the Subdivision lines of T.14 N., R.6 W. 23

Chains.

- 4.00 Large outcrop of granite boulders, 86 ft. high. Enter level bench, and dense undergrowth.
- 14.00 Leave bench and dense undergrowth; thence over mountainous land, thru. scattering timber and undergrowth; ascend 220 ft., over E. slope.
- 24.00 Ridge, brs. N. and S. Enter dense undergrowth and scattering timber.
- 40.15 $\frac{1}{2}$ Descend 350 ft., over rocky W. slope, to Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 9
 S 15
 1920

- 80.31 No accessories erected. Descend 488 ft., over W. slope, to The cor. of secs. 8, 9, 16 and 17. Land, broken and mountainous. Soil, rocky, 4th rate. Timber, scattering small cedar. Undergrowth, scrub oak, mahogany and catclaw, scattering and dense as noted. Poor grass.

 N. 0° 2' W., on true line, bet. secs. 8 and 9. Over mountainous land, thru. scattering undergrowth; descend 25 ft., over W. slope, to

- 5.00 Wash, course N. 70° W.; ascend 104 ft., over SW. slope, to
- 25.00 Descend 62 ft., over NW. slope.
- 39.25 Gulch, with stream of running water, 25 lks. wide, 1 in. deep, course SW.; ascend slightly over SE. slope, to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ S 9
 S 8 | S 9
 1920

- 66.00 Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of post. Ascend 324 ft., over SE. slope. Rim of mesa, brs. NE. and S. 70° W. Leave mountainous land; thence across level top of mesa.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 4, 5, 8 and 9, with brass cap, marked

T14N	R6W
S 5	S 4
S 8	S 9

 1920

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Land, mountainous and level. Soil, rocky, 3rd and 4th rate. Timber, none. Undergrowth, scattering scrub oak, mahogany and catclaw. Poor grass.

- 40.00 N. 89° 51' E., on a random line, bet. secs. 4 and 9. Set temp. $\frac{1}{4}$ sec. cor.
- 80.32 Intersect N. and S. line, 12 lks. N. of the cor. of secs. 3, 4, 9 and 10. Thence, S. 89° 56' W., on true line, bet. secs. 4 and 9. Over rolling and broken land, strewn with large granite boulders, along S. slope.

24 Part (completion) of Subdivision lines of Township 14 N., R. 6 W.

Chains.

20.00 Leave boulders; enter scattering timber and undergrowth; ascend 115 ft., over SE. slope, to
 40.16 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ S 4
 S 9
 1920

Raise a mound of stone 3 ft. base, 2 ft. high, N. of post. Ascend 42 ft., over SE. slope, thru. scattering timber and undergrowth.
 47.20 Rim of mesa, brs. NE. and SW. Leave rolling and broken land. Thence over level top of mesa.
 80.32 The cor. of secs. 4, 5, 8 and 9. Land, rolling and broken. Soil, rocky, 3rd rate. Timber, scattering scrub cedar and pinon. Undergrowth, scattering catclaw and scrub oak. Poor grass.

N. 0° 12' E., on random line, bet. secs. 4 and 5.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.40 Intersect the N. bdy. of Tp., 19 lks. W. of the reestablished cor. of secs. 4 and 5, hereinbefore described.

Thence, S. 0° 20' W., on true line, bet. secs. 4 and 5. Over mountainous land. No timber or undergrowth. Ascend 59 ft., over NE. slope.
 2.00 Rim of mesa brs. E. and NW.; leave mountainous and enter level land.
 Thence across level top of mesa. No timber or undergrowth.
 40.40 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked.

S 5 | S 4
 1920

80.40 Raise a mound of stone, 3 ft. base, 2 ft. high, W. of post. The cor. of secs. 4, 5, 8 and 9. Land, mountainous and level. Soil, rocky, 3rd rate. Timber, none. Undergrowth, none. Good grass.

The original cor. of secs. 19, 20, 29 and 30, established in February, 1915, is an iron post, 2 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by a mound of stone, W. of cor. No bearing trees.

Thence, N. 0° 3' W., on true line, bet. secs. 19 and 20. Over mountainous land, strewn with large boulders, thru. scattering timber and undergrowth. Descend 140 ft., over N. slope.
 6.70 Gulch, with stream of running water, 5 lks. wide, course W. Ascend 126 ft., over S. slope.

13.50 Spur, slopes W. descend 40 ft., over N. slope, to
 15.00 Asc. 81 ft. over SW. slope.
 27.36 Descend 75 ft., over NW. slope.

39.65 Wash, course W. Leave mountainous and enter rolling land; ascend slightly to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in a mound of stone, 3 ft. base, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S 19 | S 20
 1920

Chains.

No accessory erected.
 Ascend 20 ft. over rolling SW. slope.
 55.00 Descend 76 ft., over rolling NW. slope.
 67.00 Drain, course SW. Thence over level land.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in
 the ground, 8 ins. in a mound of stone, for cor. of secs.
 17, 18, 19 and 20, with brass cap, marked

T14N	R6W
S18	S17
S19	S20
1920	

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of post.
 Land, mountainous, rolling and level.
 Soil, rocky, 4th rate.
 Timber, scattering small cedar.
 Undergrowth, scattering catclaw, scrub oak and mahogany.
 Poor grass.

40.00 N. 89° 55' E., on random line, bet. secs. 17 and 20.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.90 Intersect N. and S. line; 10 lks. N. of the cor. of secs. 16,
 17, 20 and 21.

Thence,
 S. 89° 59' W., on true line, bet. secs. 17 and 20.
 Over mountainous land, strewn with large granite outcrops
 and boulders; thru. dense undergrowth.
 39.95 Ascend 130 ft., over broken NE. slope, to
 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ S 17
S 20
1920

45.50 Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of post.
 Ascend 20 ft., over NE. slope.
 60.44 Point of spur, sloping N. Descend 284 ft., over broken
 79.90 rocky NW. slope, to
 Leave mountainous land, and enter rocky flat, draining S.
 The cor. of secs. 17, 18, 19 and 20.
 Land, mountainous, broken and level.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, dense scrub oak, mahogany, catclaw and
 mountain laurel.
 Poor grass.

40.00 S. 89° 59' W., on random line, bet. secs. 18 and 19.
 79.46 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect the W. bdy. of Tp., 40 lks. S. of the original cor.
 of secs. 13, 18, 19 and 24, established in March, 1910,
 which is a malpais stone, 12x12x6 ins. above ground,
 firmly set, marked with 3 notches on each of N. and S.
 edges, and witnessed by a mound of stone W. of cor. No
 bearing trees.

Thence,
 S. 89° 44' E., on true line, bet. secs. 18 and 19.
 28.50 Over mountainous land, thru. scattering timber and under-
 growth. Descend 137 ft., over rolling S. slope, to
 Wash, course SW.
 39.46 Ascend 28 ft., over broken W. slope, to
 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in
 the ground, 10 ins. in a mound of stone, for $\frac{1}{4}$ sec. cor.,
 with brass cap, marked

26 Part (completion) of Subdivision lines of T.14 N., R. 6 W.

Chains.

$\frac{1}{4}$ S 18
S 19
1920

66.00 Raise a mound of stone, 3 ft. base, 2 ft. high, N. of post.
Ascend 440 ft., over W. slope.
Spur, from point of mesa, slopes S.
79.46 Descend 143 ft., over SE. slope, to
The cor. of secs. 17, 18, 19 and 20.
Land, broken and mountainous.
Soil, rocky, 4th rate.
Timber, scattering small cedars.
Undergrowth, scattering scrub oak, catclaw and laurel.
Poor grass.

34.70 N.0° 3' W., on true line, bet. secs. 17 and 18.
Over mountainous land, thru. scattering undergrowth; ascend 154 ft., over SE. slope.
40.00 Spur, from point of mesa, slopes E. Desc. 170 ft. over N. slope, to
Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground, 6 ins. in mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S18 | $\frac{1}{4}$ S17

1920

69.40 Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of post. Desc. 130 ft. over N. slope,
Gulch, with stream of running water, 20 lks. wide, 4 ins. deep, course W.
80.00 Ascend 211 ft., over rocky S. slope, to
Set an iron post, 3 ft. long, 2 ins. in diam., over cross (x) on surface rock, 30 ins. in a mound of stone, 3 ft. base, for cor. of secs. 7, 8, 17 and 18, with brass cap, marked

T14N | R6W
S 7 | S 8
S18 | S17
1920

No accessory erected.
Land, mountainous.
Soil, rocky, 4th rate.
Timber, none.
Undergrowth, scattering scrub oak and mahogany.
Poor grass.

40.00 N.89°59'E., on random line, bet. secs. 8 and 17.
Set temp. $\frac{1}{4}$ sec. cor.
80.00 Intersect N. and S. line, 6 lks. N. of the cor. of secs. 8, 9, 16 and 17.
Thence,
N.89°58' W., on true line, bet. secs. 8 and 17.
Over mountainous land, thru. scattering timber and undergrowth; descend 25 ft., over W. slope.
7.00 Wash, course NW.
Ascend 80 ft., over rocky NE. slope, to
27.70 Descend 140 ft., over NW. slope, to
36.70 Gulch, with stream of running water, 30 lks. wide, 2 ins. deep, course S.70°W.; ascend slightly over S. slope, to
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ S 8
S 17
1920

Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of post.

Part (completion of) Subdivision lines of T. 14 N., R. 6 W. 27

Chains.	Ascend 190 ft., over SE. slope. Spur, from point of mesa, slopes S. Descend 375 ft., over broken SW. slope, to The cor. of secs. 7, 8, 17 and 18. Land, mountainous. Soil, rocky, 4th rate. Timber, scattering small cedar. Undergrowth, scattering scrub oak, mahogany, catclaw and cactus. Poor grass.
55.00	
80.00	

40.00	N. 89° 44' W., on random line, bet. secs. 7 and 18. Set temp. $\frac{1}{4}$ sec. cor.
79.39	Intersect the W. bdy. of the Tp., 7 lks. S. of the original cor. of secs. 7, 12, 13 and 18, established in April, 1915, is an iron post, 3 ins. in diam., firmly set in mound of stone, properly marked on brass cap, and witnessed by a mound of stone, W. of cor. No bearing trees. Thence, S. 89° 41' E., on true line, bet. secs. 7 and 18. Over broken and mountainous land, thru. scattering undergrowth. Ascend 76 ft., over N. slope, to Descend 50 ft., over NE. slope, to Wash, with stream of running water, 30 lks. wide, 2 ins. deep, course NW. Thence over broken S. slope; ascend 50 ft. to Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
6.50	
14.60	
39.39	
$\begin{array}{c} \frac{1}{4} S 7 \\ S 18 \\ 1920 \end{array}$	
48.50	Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of post. Descend 20 ft., over broken S. slope, to Bend in same wash, with stream of water, 30 lks. wide, course SW. from S. Ascend 338 ft., over broken SW. slope, to The cor. of secs. 7, 8, 17 and 18. Land, broken and mountainous. Soil, rocky, 4th rate. Timber, scattering cottonwood along the wash. Undergrowth, scattering catclaw and mesquite. Poor grass.
79.39	

40.00	N. 0° 3' W., on true line, bet. secs. 7 and 8 Over mountainous land, thru. scattering undergrowth. Ascend 800 ft., over broken SW. slope, to Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
$\begin{array}{c} \frac{1}{4} \\ S 7 S 8 \\ 1920 \end{array}$	
64.00	Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of post. Ascend 174 ft., over rocky W. slope, to Rim of mesa, brs. N. and SE. Thence along mesa rim; descend 32 ft. to Leave rim of mesa, brs. S. and SE. at point of mesa; descend 276 ft., over N. slope, to Set an iron post, 3 ft. long, 2 ins. in diam., 8 ins. in the ground, 20 ins. in a mound of stone, 3 ft. base, for cor. of secs. 5, 6, 7 and 8, with brass cap, marked
70.00	
80.00	
$\begin{array}{c} T14N R6W \\ S 6 S 5 \\ S 7 S 8 \\ 1920 \end{array}$	

28 Part (completion) of the Subdivision lines of T.14 N. R.6 W.

Chains.

No accessory erected.
 Land, mountainous.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, scattering catclaw, mahogany and palo christi.
 Poor grass.

40.00 S. 89°58'E., on random line, bet. secs. 5 and 8.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.98 Intersect N. and S. line, 25 lks. N. of the cor. of secs. 4,
 5, 8 and 9.

Thence,
 N. 89°47'W., on true line, bet. secs. 5 and 8.
 Over level land, across top of mesa, thru. scattering
 undergrowth.
 39.99 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ S 5
 S 8
 1920

58.00 Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of post.
 Rim of mesa, brs. NW. and SE. Leave level mesa top, and
 enter mountainous land.

Descend 318 ft., over SW. slope, to
 77.00 Wash, course NW.; descend 20 ft., over N. slope, to
 79.98 The cor. of secs. 5, 6, 7 and 8.

Land, level and mountainous.
 Soil, rocky, 3rd and 4th rate.
 Timber, none.
 Undergrowth, scattering scrub oak and catclaw.
 Fair grass.

40.00 N. 89°41'W., on random line, bet. secs. 6 and 7.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.26 Intersect the W. bdy. of the Tp., 30 lks. N. of the original
 cor. of secs. 1, 6, 7 and 12, established in April, 1915,
 which is an iron post 3 ins. in diam., projecting 12 ins.
 above ground, firmly set, properly marked on brass cap,
 and witnessed by mound of stone, W. of cor. No bearing trees

Thence,
 S. 89°54'E., on true line, bet. secs. 6 and 7.
 Over mountainous land, thru. scattering undergrowth. Along
 broken S. slope, ascending gradually to
 39.26 Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the
 ground to rock, 20 ins. in a mound of stone, 3 ft. base
 for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ S 6
 S 7
 1920

42.00 Raise a mound of stone, 3 ft. base, 2 ft. high, N. of post.
 Descend slightly over broken S. slope, to
 Wash, course SW.

Ascend 615 ft., over SW. slope.
 65.00 Point of spur from mesa, slopes S.
 Descend 90 ft., over SE. slope.

71.75 Draw, course SW. Ascend 50 ft., over NW. slope, strewn with
 large boulders.

79.26 The cor. of secs. 5, 6, 7, and 8.
 Land, mountainous.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, scattering catclaw, mahogany and cactus.
 Poor grass.

Part (completion) of Subdivision lines of T.14 N., R.6 W. 29

Chains.

40.00 N.0°20'E., on random line, bet. secs. 5 and 6.
Set temp. $\frac{1}{4}$ sec. cor.

80.03 Intersect the reestablished cor. of secs. 5 and 6, on N. bdy. of Tp., hereinbefore described.

Thence,
S.0°20'W., on true line, bet. secs. 5 and 6.
Over mountainous land, thru. scattering undergrowth.
Descend 60 ft., over S. slope, to

5.00 Ascend 620 ft., over N. slope.

7.00 W. end of pond, hrs. E. 8.00 chs. dist. This pond is 15 chs. long, E. and W., and 5 chs. wide, N. and S.

25.00 Rim of mesa, hrs. E. and W. Leave mountainous and enter level land on top of mesa.

40.03 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S 6 $\frac{1}{4}$ S 5
1920

45.00 Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of post. Continue over level mesa top, to Rim of mesa, hrs. NE. and SW. Descend 345 ft., over SE. slope, to

74.30 Gulch, course SW.; descend 80 ft., over W. slope, to

78.95 Gulch, course W. Ascend 15 ft., over N. slope, to

80.03 The cor. of secs. 5, 6, 7 and 8.
Land, mountainous and level.
Soil, rocky, 4th rate.
Timber, none.
Undergrowth, scattering scrub oak, mahogany and cactus.
Poor grass.

GENERAL DESCRIPTION.

The lands embraced within this township are valuable only for grazing purposes. The eastern and northern portions being a high bench, of an elevation approximating four thousand feet. The soil here is a rocky clay or gumbo, producing a quantity of grasses.

Schultz and Mullen, cattlemen, own the improvements located in sec. 12.

The central and southwestern portions are mountainous and rough. Large granite dykes and huge boulders cover the major portion.

The soil is a decomposed granite, unfit for cultivation. During the winter months, the country is well watered, but is subject to drought throughout the summer and fall.

Mr. Ed. Sims is located in sec. 22, and is engaged in trapping.

DATE DIAGRAM
T. 14 N., R. 6 W.

RESURVEY					
3-23-20 6	3-23-20 5	3-23-20 4	3-21-20 3	3-21-20 2	3-13-20 1
3-23-20 7	3-22-20 8	3-22-20 9	3-21-20 10	3-13-20 11	3-12-20 12
3-22-20 18	3-22-20 17	3-16-20 16	3-17-20 15	3-12-20 14	3-11-20 13
3-18-20 19	3-15-20 20	3-15-20 21	3-9-20 22	3-11-20 23	3-11-20 24
30	29	28	27	26	25
31	32	33	34	35	36

Surveys executed by Dupree R. Averill, U.S. Surveyor, on dates shown on diagram above.

4-680

FIELD ASSISTANTS.

to Dupree R. Averill, U.S. Surveyor.

NAMES.	CAPACITY.
Ben Mollette	<i>1st</i> Chainman.
Clark L. Boulware.	<i>2nd</i> Chainman.
Milton Hymas	Flagman.
John H. McDonald	Cornerman.
Rudolf Elston	Axman.

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Dupree R. Averill, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 90 Arizona bearing date of the 26th day of September, 1918, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, ^{RESURVEYED} ~~surveyed~~ all those parts or portions of the North boundary of Frac'l Township 14 N. R. 6 W. and SURVEYED all those parts or portions of the East and North boundaries and Subdivision lines of Township 14 North, Range 6 West of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes ^{and by diagram on page 30 hereof} ~~as~~ having been executed by me, and under my direction; and that all the corners of ~~said survey~~ ^{said resurvey and survey} have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 90, Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such ~~survey~~ ^{resurvey and survey}.

Place. Phoenix, Arizona.Date. April 14, 1920.

Dupree R. Averill
U. S. Surveyor.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix, Arizona, May 12, 1921.

The foregoing field notes of the ~~survey of~~ RESURVEY of the West half of North bdy. of Township 14 North, Range 6 West, and of the SURVEY of the East half of North bdy, the north four miles of East bdy., and the Completion of the Subdivision lines of Township 14 North, Range 6 West of the Gila and Salt River Base and Meridian, in the State of Arizona

executed by Dupree R. Averill, U.S. Surveyor

under ~~his~~ special instructions dated Sept. 26, 1918 for Group 90 Arizona, 101, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the ~~surveys~~ ^{RESURVEYS AND SURVEYS} they describe, are hereby approved.

Frank R. Frost
U. S. Surveyor General.

~~I certify that the foregoing transcript of the field notes of the above described surveys in~~
~~has been correctly copied from the original notes on file in this office.~~

U. S. Surveyor General.