

3445

MA 21, 192  
51

BOOK "S"  
4-679

BOOK 3445

# FIELD NOTES

OF THE RESURVEY OF THE

First Standard Parallel South, thru Range 15 East

and the

West boundary of Township 6 South, Range 16 East

AND OF THE SURVEY OF THE

Subdivision lines of

Township 6 South, Range 15 East

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

## EXECUTED BY

William H. Thorn, U. S. Cadastral Engineer.

Herbert N. Raymond, U. S. Cadastral Engineer, and

Dupree R. Averill, U. S. Transitman.

~~In the capacity of U. S. Surveyor~~, under Special Instructions dated February 6, 1918,

issued by the United States Surveyor General to govern surveys included in Group

No. 81, which were approved by the Commissioner of the General Land

Office, February 27, 1918, and Assignment Instructions dated Dec. 18, 1918  
and Feb. 7, 1919

Resurvey and Survey commenced April 22, 1919.

Resurvey and Survey completed November 21, 1919.

3445


1A





Book "S"

Group 81 - - - Arizona.

BOOK 3445
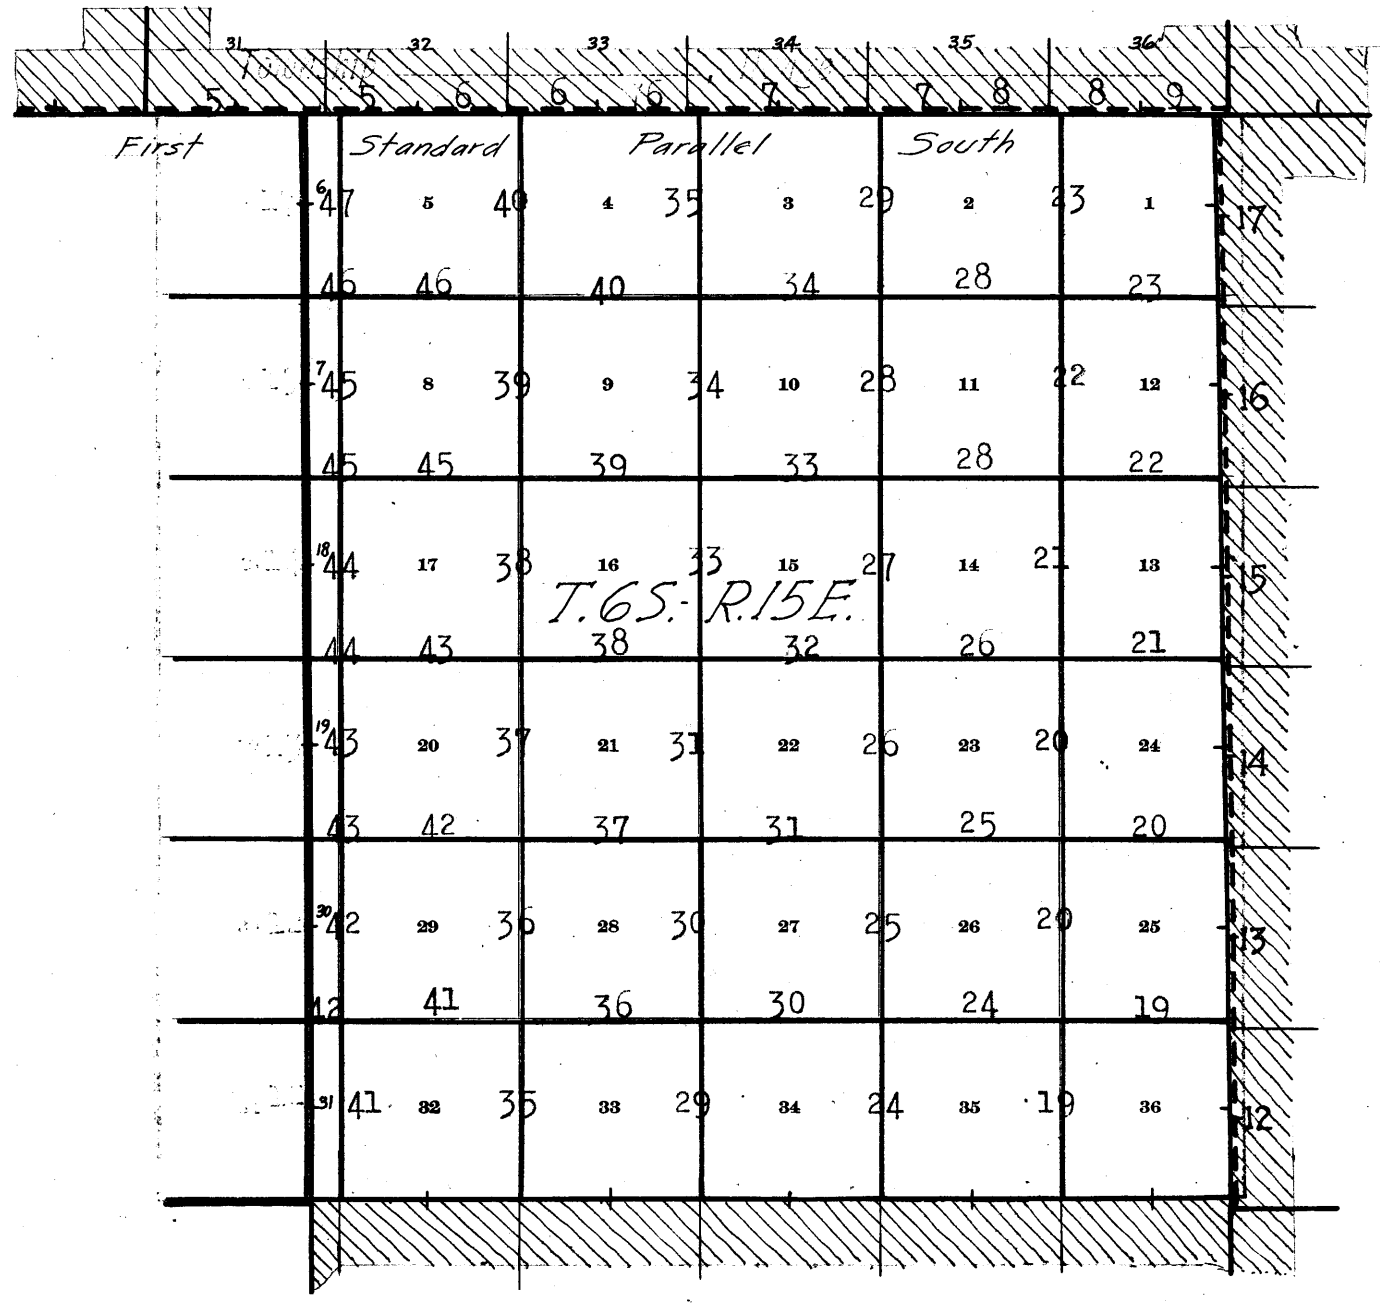
# INDEX DIAGRAM.




-  Lines surveyed under this group.
-  Lines resurveyed under this group.
-  Accepted surveys.
-  Areas surveyed as per accepted plats on file.

Book "S"

BOOK 3445

DATE DIAGRAM.

Township 6 South - Range 15 East

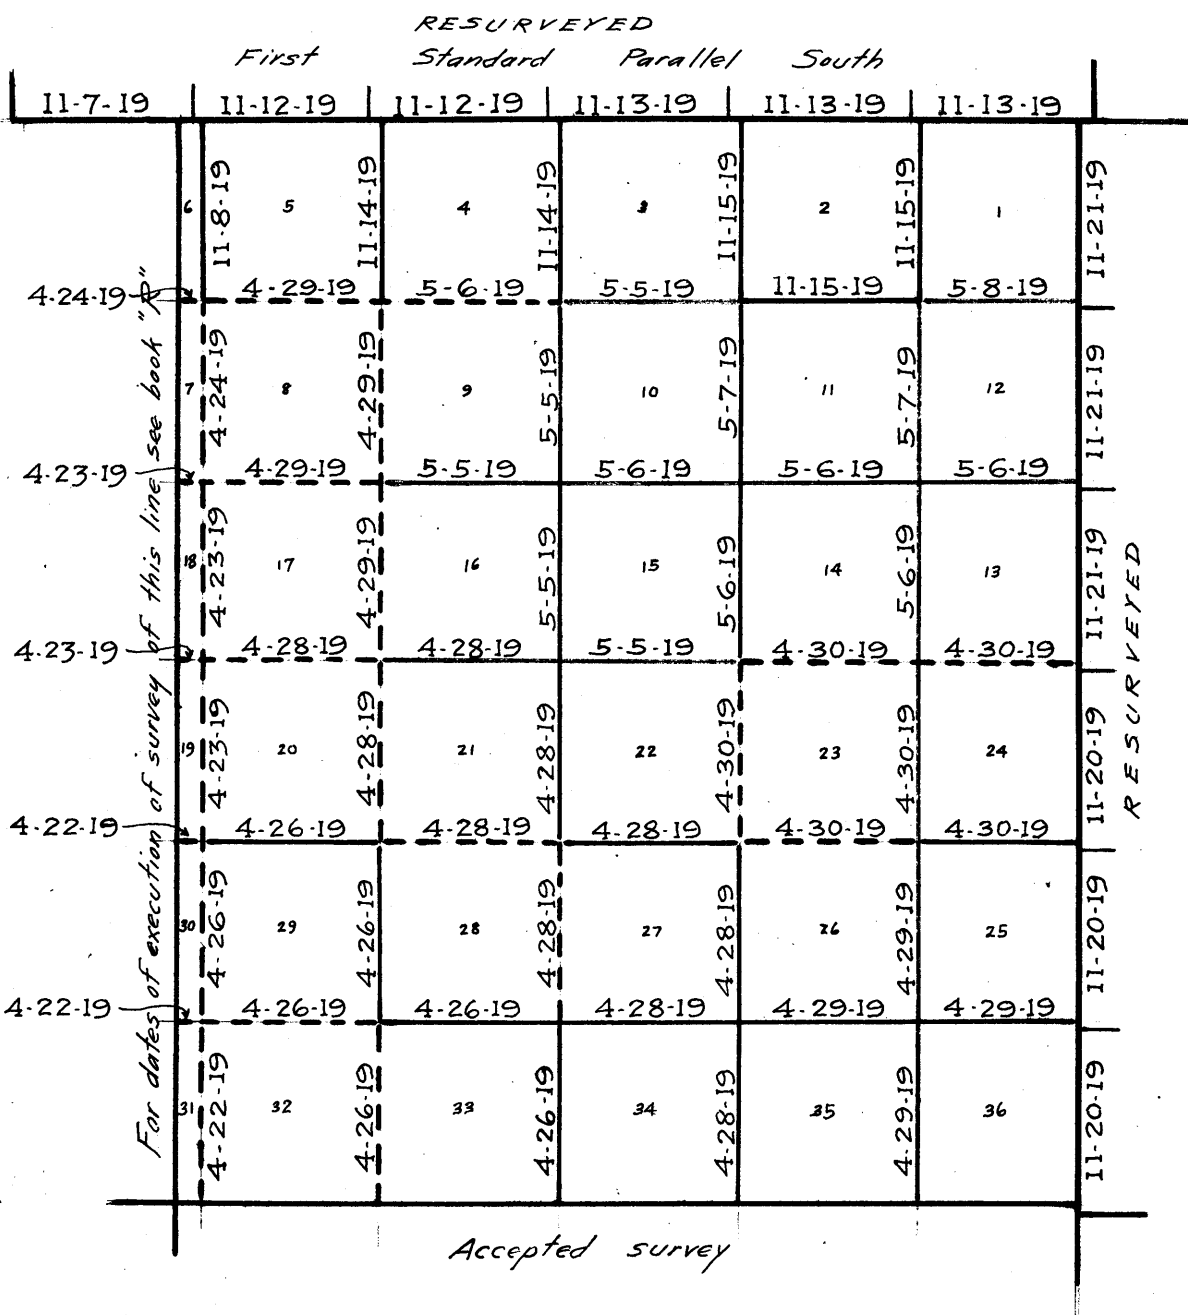

Black lines on above diagram indicate surveys executed by William H. Thorn, U. S. Cadastral Engineer, on dates shown thereon.

Dotted red lines on above diagram indicate surveys executed by Herbert N. Raymond, U. S. Cadastral Engineer, on dates shown thereon.

Blue lines on above diagram indicate surveys executed by Dupree R. Averill, U. S. Transitman, on dates shown thereon.

Resurvey and survey hereinafter described executed by William H. Thorn and Herbert N. Raymond, U. S. Cadastral Engineers and Dupree R. Averill, U. S. Transitman, on dates shown on diagram on page 1 hereof, using respectively Young and Sons' light mountain transit No. 8592, W. and L. E. Gurley Transit "Memo G" and Young and Sons' light mountain transit No. 8541. Instrument No. 8592 is described, with certificate of approval by the Assistant Supervisor of Surveys, in Book "A"; the other two instruments are described, with certificate of approval, in Book "U".

Test of Instrument No. 8592.

Oct. 19, 1919: At our camp near the center of sec. 15, T. 7 S., R. 13 E., G. and S. R. B. and M., in lat.  $32^{\circ}49\frac{1}{2}'N.$ , long.  $110^{\circ}59'W.$ , using the meridian determined as described in Book "P", at 9 hrs. 0 m., a.m., l.m.t. I set off  $32^{\circ}49\frac{1}{2}'N.$  on the lat. arc;  $9^{\circ}44\frac{1}{2}'S.$  on the decl. arc; and determine a meridian with the solar, which I find to agree with the true meridian.

At apparent noon, with the lat. arc unchanged, I observe the sun on the meridian; the resulting reading of the decl. arc with the solar is  $9^{\circ}47\frac{1}{2}'S.$ , which is the computed decl. of the sun.

At 3 hrs. 0 m., p.m., l.m.t., with the lat. arc unchanged, I set off  $9^{\circ}50'S.$  on the decl. arc, and determine a meridian with the solar, which I find to agree with the true meridian.

As all of the solar observations during the usual hours of solar work come within  $1'30''$  of the true meridian, I conclude that the adjustments of the instrument are satisfactory.

Test of Instrument Gurley "Memo G" and Young and Sons' 8541.

We examine the adjustments of the transits and correct all errors; then, to test the solar apparatus, by comparing their indications, resulting from solar observations made during a.m. and p.m. hours, with a meridian determined by observations on Polaris at elongation, we proceed as follows:

Apr. 21, 1919: At our camp in sec. 24, T. 6 S., R. 14 E., G. and S. R. B. and M., in lat.  $32^{\circ}53\frac{1}{2}'N.$ , long.  $110^{\circ}51'W.$ , at 5 hrs. 41 m., a.m., l.m.t., we observe Polaris at eastern elongation, in accordance with the Manual of Instructions, and lay off the azimuth of Polaris,  $1^{\circ}20\frac{1}{2}'$  to the west, and mark the meridian thus determined by a tack in a stake, firmly driven in the ground, 5 chs. N. of our station.

At 9 hrs. 0 m., a.m., l.m.t., we set off  $32^{\circ}53\frac{1}{2}'N.$  on the lat. arcs;  $11^{\circ}40'N.$  on the decl. arcs; and determine a meridian with each solar, which in each case agrees with the true meridian.

At apparent noon, with the lat. arcs unchanged, we observe the sun on the meridian; the resulting reading of the decl. arc is  $11^{\circ}42'N.$ , which is the computed decl. of the sun.

At 3 hrs. 0 m., p.m., l.m.t., with the lat. arcs unchanged, we set off  $11^{\circ}45'N.$  on the decl. arcs and determine a meridian with each solar, which in each case agrees with the true meridian.

As all of the solar observations during the usual hours of solar work come within  $1'30''$  of the true meridian, we conclude that the adjustments of the instrument are satisfactory.

Dependent Resurvey of the  
1st Standard Parallel South, through Range 15 East.

Chains.

The First Standard Parallel South, thru. Range 15 East, was originally surveyed in December, 1877, by John L. Harris, U.S.D.S., and as no subsequent resurvey of the line is of record, the cors. described in the following notes are the original std. cors.

Retracement for Resurvey:

From the standard cor. of Ts. 5, S., Rs. 14 and 15 E., described in Book "R,"  
 East, on random line, on S. bdy. of sec. 31.  
 40.00 Diligent search in this vicinity fails to reveal any evidence of the original standard  $\frac{1}{4}$  sec. cor. of sec. 31. Set temp. cor.  
 76.22 Fall 4.30 chs. S. of the original standard cor. of secs. 31 and 32, which is a granite stone, 14x14x10 ins. above ground, firmly set, marked with one notch on W. edge, and 5 notches on E. edge, and witnessed by almost obliterated remains of original pits, N., E. and W. of cor., and mound of earth N. of cor.  
 No bearing trees.  
 True course and dist. of S. bdy. of sec. 31 are therefore N. 86°45'E., 76.34 chs.

East, on random line, on S. bdy. of sec. 32 (W.  $\frac{1}{2}$ ).  
 40.40 Fall 44 lks. S. of the original standard  $\frac{1}{4}$  sec. cor. of sec. 32, which is a granite stone, 18x8x8 ins. above ground, firmly set, marked " $\frac{1}{4}$ " on N. face, and witnessed by almost obliterated remains of original pits E. and W. of cor., and mound of earth N. of cor. No bearing trees.  
 True course and dist. of W.  $\frac{1}{2}$  of S. bdy. of sec. 32 are therefore N. 89°22'E., 40.40 chs.

East, on random line, on S. bdy. of sec. 32 (E.  $\frac{1}{2}$ ).  
 39.97 Fall 44 lks. S. of the original point of location of the standard cor. of secs. 32 and 33, determined by reference to the almost obliterated remains of the original pits, N., E. and W., and mound of earth N. of cor. point, The original wood post is lying on the ground alongside the mound. This post is of catclaw, 3 ft. long, 3 ins. sq., and marked with 2 notches on one edge, and 4 notches on the opposite edge. No bearing trees.

East, on a random line, on S. bdy. of sec. 33 (W.  $\frac{1}{2}$ ).  
 39.60 Fall 35 lks. S. of the original point of location of the standard  $\frac{1}{4}$  sec. cor. of sec. 33, determined by reference to the original bearing tree, a palo verde, 12 ins. in diam., N. 65°E., 132 lks. dist., marked "SC  $\frac{1}{4}$  S33 BT." Faint traces of the original pits E. and W., and mound of earth N. of cor. remain, but the original post has disappeared.  
 True course and dist. of W.  $\frac{1}{2}$  of S. bdy. of secs. 33 are therefore N. 89°30'E., 39.60 chs.

East, on a random line, on S. bdy. of sec. 33 (E.  $\frac{1}{2}$ ).  
 39.35 Fall 61 lks. S. of the point of original location of the standard cor. of secs. 33 and 34, determined by reference to the original bearing tree, a palo verde, 7 ins. diam., marked "SC S34 BT." fallen on the ground, but leaving sufficient evidence of its original position, N. 70°E. 190 lks. dist. Faint traces remain of the original pits N., E. and W., and mound of earth N. of cor., but the original cor. post has disappeared.  
 True course and dist. of E.  $\frac{1}{2}$  of S. bdy. of sec. 33 are therefore N. 89°07'E., 39.35 chs.

Dependent Resurvey of the  
1st Standard Parallel South, thru. Range 15 East.

4 Chains.

**Retracement for Resurvey (continued)**

- East, on random line, on S. bdy. of sec. 34.
- 40.00 Diligent search in this vicinity fails to reveal any evidence of the original standard  $\frac{1}{4}$  sec. cor. of sec. 34.  
Set temp. cor.
- 80.00 Diligent search in this vicinity fails to reveal any evidence of the original standard cor. of secs. 34 and 35.  
Set temp. cor.  
Continue measurement.
- East, on random line, on S. bdy. of sec. 35 (W.  $\frac{1}{2}$ ).
- 120.90 Fall 4 lks. N. of the point of original location of the standard  $\frac{1}{4}$  sec. cor. of sec. 35 determined by referring to the two original bearing trees, as follows:  
A palo verde, 14 ins. in diam., N. 7° W., 107 lks. dist., marked " $\frac{1}{4}$ S 35 SC BT.", and  
A palo verde, 12 ins. in diam., N. 32° E., 120 lks. dist., marked " $\frac{1}{4}$ S 35 SC BT."  
Faint traces remain of the original pits E. and W., and mound of earth N. of cor. point, but the original cor. post has disappeared.  
True course and dist. of line from original std. cor. of secs. 33 and 34 to this cor. are therefore S. 89° 59' E., 120.90 chs., which to maintain original proportion gives 40.30 chs. as the proper interval for reestablishment of the missing standard cors.
- 
- From point of original location of std.  $\frac{1}{4}$  sec. cor. of sec. 35, described above,
- 40.00 East, on random line on S. bdy. of sec. 35, (E.  $\frac{1}{2}$ ).  
Diligent search in this vicinity fails to reveal any evidence of the original std. cor. of secs. 35 and 36.  
Set temp. cor.  
Continue measurement.
- East, on random line on S. bdy. of sec. 36 (W.  $\frac{1}{2}$ ).
- 79.64 Fall 92 lks. S. of the original point of location of the standard  $\frac{1}{4}$  sec. cor. of sec. 36, determined by reference to the stump of the original bearing tree, a mesquite, 6 ins. in diam., N. 70° E., 142 lks. dist., marked "SC  $\frac{1}{4}$ S 36 BT." Faint traces of the original pits E. and W., and mound of earth N. of cor. point, and the original mesquite cor. post, 2 ft. long, 4 ins. square, marked " $\frac{1}{4}$ S" on one face, is lying on the ground alongside the mound.  
True course and dist. of line from original std.  $\frac{1}{4}$  sec. cor. of sec. 35 to this cor. are therefore, S. 89° 20' E., 79.64 chs., which, to maintain original proportion, gives 39.82 chs. as the proper interval for reestablishment of the missing std. sec. cor.
- 
- East, on random line, on S. bdy. of sec. 36 (E.  $\frac{1}{2}$ ).
- 39.27 Fall 41 lks. N. of the std. cor. of Rs. 5 S., Rs. 15 and 16 E., reestablished in June, 1904, by Philip Contzen, U.S. D.S., which is a granite stone 6x6x4 ins. above ground, firmly set, marked "SC" on N. face, and 6 grooves on each of N., E. and W. faces, and witnessed by two bearing trees:  
A mesquite, 14 ins. in diam., N. 6° E., 68 lks. dist., marked "SCT5S R16ES31BT.", and  
A mesquite, 15 ins. in diam., N. 37° W., 76 lks. dist., marked "SCT5SR15ES36 BT."  
True course and dist. of E.  $\frac{1}{2}$  of S. bdy. of sec. 36 are therefore S. 89° 24' E., 39.27 chs.

Chains.

From the reestablished standard cor. of Ts. 5 S., Rs. 14 and 15 E., described in Book "R,"  
 N. 86°45'E. on a true line, on S. bdy. of sec. 31.  
 Over mountainous land, thru. scattering timber and dense undergrowth.  
 Descend 15 ft., over NE. slope.  
 3.48 Dry wash, 20 lks. wide, course N.; ascend 45 ft., over NW. slope.  
 7.20 Spur, slopes N.; descend 90 ft., over SE. slope.  
 16.26 Dry wash, 20 lks. wide, course NE.; ascend 75 ft., over NW. slope.  
 21.70 Spur, slopes NW.; descend 130 ft., over SE. slope.  
 26.55 Wash, 50 lks. wide, course N.  
 38.17 (Midpoint), Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished standard  $\frac{1}{4}$  sec. cor. of of sec. 31, with brass cap, marked

S C  
 $\frac{1}{4}$ S 31

1919

from which,

A mesquite, 12 ins. in diam., brs. N. 63°W., 165 lks. dist., marked " $\frac{1}{4}$ S 31 S C BT."  
 A mesquite, 36 ins. in diam., brs. N. 2°E., 88 lks. dist., marked " $\frac{1}{4}$ S 31 S C BT."

48.12 Dry wash, 25 lks. wide, course NE.; ascend 120 ft., over N. slope.  
 53.41 Spur, slopes NE; descend 200 ft., over SE. slope.  
 68.71 Rocky gulch, 10 lks. wide, 30 ft. deep, course SE.  
 76.34 Intersect the original standard cor. of secs. 31 and 32, hereinbefore described. Reestablish as follows:  
 Alongside old stone, set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for reestablished standard cor. of secs. 31 and 32, with brass cap, marked

S	C
T5S	R15E
S31	S32

1919

Destroy remains of original accessories, and raise mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.  
 Land, mountainous.  
 Soil, decomposed granite, rocky, 4th rate.  
 Timber, scattering mesquite and cedar.  
 Undergrowth, dense catclaw, mesquite, soto, and ocotilla.

N. 89°22'E., on true line, on S. bdy. of sec. 32 (W.  $\frac{1}{2}$ ).  
 Over mountainous land, thru. dense undergrowth.  
 1.90 Gulch, 10 lks. wide, 2 ft. deep, course NE.  
 3.20 Same gulch, course SE.  
 6.20 Same gulch, course NE.; thence across washed bottom land.  
 18.50 Leave bottom land.  
 19.10 Spur, slopes N. about 3.00 chs.  
 19.50 Romero Wash, course NE.; thence across wash.  
 21.75 Old road, brs. NE. and SW.  
 26.00 Leave wash, course NE.  
 29.02 Spur, slopes NE.  
 37.79 Dry wash, 10 lks. wide, course NE.  
 39.05 Spur, slopes NE.  
 40.40 Intersect the original standard  $\frac{1}{4}$  sec. cor. of sec. 32, hereinbefore described. Reestablish as follows:  
 Alongside old stone,  
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished standard  $\frac{1}{4}$  sec. cor. of sec. 32, with brass cap, marked

Dependent Resurvey of the  
1st Standard Parallel South, thru. Range 15 East.

6.

Chains.

S C  
1/4 S 32

1919

Destroy remains of original accessories, and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

Thence,

N. 89° 22' E., on true line, on S. bdy. of sec. 32 (E. 1/2).

Over mountainous land, thru. dense undergrowth.

1.38 Wash, 10 lks. wide, course NE.; ascend 40 ft., over W. slope.

4.40 Spur, slopes NE.

9.40 Wash, 10 lks. wide, course NE.

10.60 Spur, slopes NE.; descend 130 ft., over SE. slope.

26.61 Wash, 100 lks. wide, course NE.

39.97 Intersect the original point of location of the standard cor. of secs. 32 and 33, hereinbefore described. Reestablish this cor. as follows:

Reset the original wood post in its original position, 24 ins. in the ground, and alongside same set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished standard cor. of secs. 32 and 33, with brass cap, marked

S C  
T5S R15E  
S32 S33

1919

Destroy remains of original accessories, and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

Land, mountainous.

Soil, decomposed granite, rocky, 4th rate.

No timber.

Undergrowth, dense cholla, catclaw, scrub palo verde, cactus, buck thorn, scrub oak and mesquite.

N. 89° 30' E., on a true line, on S. bdy. of sec. 33 (W. 1/2).

Over rolling land, thru. dense undergrowth, and very scattering timber.

1.50 Wash, 30 lks. wide, 1 ft. deep, course NE.

7.90 Old Florence-Winkelman road, brs. NE. and SW.

26.60 Old road, brs. NE. and SW.

32.40 Wash, 20 lks. wide, 3 ft. deep, course NE.

39.60 Intersect the point of original location of the Standard 1/4 sec. cor., hereinbefore described. Reestablish as follows:

Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground, for reestablished standard 1/4 sec. cor. of sec. 33, with brass cap, marked

S C  
1/4 S 33

1919

from which the original bearing tree,

A palo verde, 12 ins. diam., brs. N. 65° E., 132 lks. dist., marked "1/4 S 33 SC BT."

Destroy remains of the other original accessories, and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

Thence,

N. 89° 07' E., on a true line, on S. bdy. of sec. 33 (E. 1/2).

Over rolling land, thru. dense undergrowth, and very scattering timber.

24.50 Dry wash, 2.00 chs. wide, course NE.

39.00 Dry wash, 2.00 chs. wide, course NE.

39.35 Intersect the point of original location of the standard cor. of secs. 33 and 34, hereinbefore described. Reestablish this cor. as follows:



Dependent Resurvey of the  
First Standard Parallel South, thru. Range 15 East.

7.

Chain.

Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished standard cor. of secs. 33 and 34, with brass cap, marked

S | C  
T5 S | R15E  
S33 | S34  
1919

In addition to the original bearing tree, a palo verde, 7 ins. in diam., marked "SC S34BT," N. 70° E., 190 lks. dist. fallen on the ground, establish a new bearing tree as follows:

On a mesquite, 6 ins. in diam., N. 8° W., 130 lks. dist., marked "T5S R15E S33 SC BT."

Destroy remains of the other original accessories, and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor. Land, rolling.

Soil, decomposed granite, rocky, 4th rate.

Timber, very scattering mesquite.

Undergrowth, dense cactus, scrub oak and catclaw.

S. 89° 59' E., on a true line, on S. bdy. of sec. 34. Over rolling land, thru, dense undergrowth, and very scattering timber.

21.50 Shallow wash, 2.00 chs. wide, course NE.

39.00 Wash, 1.00 ch. wide, course NE.

40.30 (Proportional dist.), Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished standard ¼ sec. cor. of sec. 34, with brass cap, marked

S | C  
¼ S 34  
1919

from which,

A catclaw, 6 ins. in diam., brs. S. 76½° E., 140 lks. dist., marked "WBT."

Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

64.20 Wash, 30 lks. wide, 2 ft. deep, course NE.

69.00 Shallow wash, 2.00 chs. wide, course NE.

80.60 (Proportional dist.), Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished standard cor. of secs. 34 and 35, with brass cap, marked

S | C  
T5S | R15E  
S34 | S35  
1919

from which,

A palo verde, 8 ins. in diam., brs. N. 46½° E., 218 lks. dist., marked "T5S R15E S35 SCBT."

A mesquite, 6 ins. in diam., brs. S. 81½° E., 59 lks. dist., marked "WBT."

Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor. Land, rolling.

Soil, decomposed granite, rocky, 4th rate.

Timber, very scattering small mesquite, palo verde and catclaw.

Undergrowth, dense greasewood, scrub palo verde, cactus, buck thorn, scrub oak and mesquite.

S. 89° 59' E., on a true line, on S. bdy. of sec. 35 (W. ½). Over rolling land, thru dense undergrowth, and very scattering timber.

Dependent Resurvey of  
 First Standard Parallel South, through Range 15 East.

8

Chains.

34.50 Wash 1.00 ch. wide, course NE.  
 40.00 Dim road, brs.NE. and SW.  
 40:30 (Proportional dist.), Intersect the point of original lo-  
 cation of the standard  $\frac{1}{4}$  sec.cor. of sec.35, hereinbe-  
 fore described, at which point reestablish the cor.as  
 follows:  
 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in  
 the ground, for reestablished  $\frac{1}{4}$  sec.cor. of sec.35, with  
 brass cap, marked

S C  
 $\frac{1}{4}$ S 35

1919

witnessed by the original bearing trees as follows:

- A palo verde, 12 ins. in diam., N.32°E., 120 lks.  
 dist., marked " $\frac{1}{4}$ S 35 SC BT.", and
- A palo verde, 14 ins. in diam., N.7°W., 107 lks.  
 dist., marked " $\frac{1}{4}$ S 35 SC BT."

Destroy the remains of the other original accessories.  
 Thence,

N.89° 20'E., on a true line on S bdy.of sec.35 (E. $\frac{1}{2}$ ).  
 Over rolling land, thru. dense undergrowth, and very  
 scattering timber.

1.80 Old road, brs.NE. and W.  
 22.00 Dry wash, 20 lks.wide, course NE.  
 33.68 Dry wash, 20 lks.wide, course NE.  
 39.82 (Proportional dist.), Set an iron post, 3 ft.long, 2 ins.  
 in diam., 24 ins. in the ground, for reestablished  
 standard cor. of secs. 35 and 36, with brass cap, marked

S	C.
T5S	R15E
S35	S36

1919

Raise a mound of stone, 2 ft.base, 1 $\frac{1}{2}$  ft.high, N.of cor.  
 Land, rolling.

Soil, disintegrated granite, rocky, 4th rate.  
 Timber, very scattering small mesquite and palo verde.  
 Undergrowth, dense greasewood, scrub palo verde, catclaw,  
 and mesquite, cholla, buck thorn, scrub oak, sahuaro and  
 ocotilla.

N.89°20'E., on a true line, on S. bdy.of sec.36 (W. $\frac{1}{2}$ ).  
 Over rolling land, thru. dense undergrowth, and very scat-  
 tering timber.

1.00 Spur, slopes NE.; descend 55 ft., over NE.slope.  
 6.14 Wash, 30 lks.wide, course NE.  
 13.50 Spur, slopes NE.; descend 35 ft., over SE.slope.  
 19.59 Dry wash, 30 lks.wide, course NE.  
 28.80 Spur, slopes NE.  
 34.00 Wash, 4.00 chs. wide, course NE.  
 39.82 (Proportional dist.), Intersect the original point of  
 location of the standard  $\frac{1}{4}$  sec.cor.of sec.36, hereinbe-  
 fore described, at which point reestablish the cor.as  
 follows:  
 Reset the original mesquite wood cor.post, 16 ins. in the  
 ground, with marking on N.face, and alongside same,  
 set an iron post 3 ft.long, 1 in. in diam., 26 ins. in  
 the ground, for reestablished standard  $\frac{1}{4}$  sec.cor.of  
 sec.36, with brass cap, marked

S C  
 $\frac{1}{4}$ S 36

1919

Dependent Resurvey of  
First Standard Parallel South, thru. Range 15 East.

Chains.

witnessed by the original bearing tree:

A mesquite, 4 ins. in diam., N. 70° E., 142 lks. dist.,  
marked "1/2 S 36 SCBT."

Destroy remains of other original accessories, and raise  
a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

Thence,

S. 89° 24' E., on a true line on S. bdy. of sec. 36 (E. 1/2).

Over rolling land, thru. dense undergrowth, and very scat-  
tering timber.

- 6.00 Spur, slopes NE.
- 13.00 End of spur, from SW.
- 20.00 Across bottom land of the San Pedro Valley.
- 23.25 Wash, 20 lks. wide, course N.
- 31.10 Wash, 10 lks. wide, 2 ft. deep, course N.
- 32.20 The reestablished closing cor. of Ts. 6 S., Rs. 15 and 16  
E., hereinafter described.
- 39.27 Intersect the standard cor. of Ts. 5 S., Rs. 15 and 16 E.,  
hereinbefore described, Reestablish this cor. as fol-  
lows:  
Alongside old stone, set an iron post, 3 ft. long, 3 ins.  
in diam., 24 ins. in the ground, for reestablished  
standard cor. of Ts. 5 S., Rs. 15 and 16 E., with brass  
cap, marked

S	C
T5S	
R15E	R16E
S36	S31

1919

witnessed by the existing bearing trees:

A mesquite, 14 ins. diam., N. 6° E., 68 lks. dist.,  
marked "SC T5S R16ES31 BT.", and


A mesquite, 15 ins. in diam., N. 37° W., 76 lks. dist.  
marked "SCT5S R15ES36BT."

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.  
Land, rolling.

Soil, decomposed granite, rocky, 4th rate.

Timber, very scattering small mesquite and palo verde.

Undergrowth, dense greasewood, scrub palo verde and mes-  
quite, cactus.



Dependent Resurvey of the  
10 West boundary of Township 6 South, Range 16 East.

Chains.

This line was originally surveyed by John L. Harris, U.S. D.S. in December 1877, and as no subsequent resurvey of the line is of record, the cors. found in the retracement described below are therefore the original cors.

RETRACEMENT FOR RESURVEY:

The original closing cor. of T<sub>s</sub>. 6 S., R<sub>s</sub>. 15 and 16 E., on the First Standard Parallel South, is a wood post, 4 ins. square, 4 ft. above ground, firmly set in a mound of earth, marked with 6 notches on E., W., and S. faces, and witnessed by faint traces of original pits, E., W. and S., and mound of earth S. of cor., and the original bearing trees:

A mesquite, 24 ins. in diam., S. 40° E., 32 lks. dist., marked "T<sub>6</sub>S R<sub>16</sub>E S<sub>6</sub> CC BT.", and

A mesquite, 15 ins. in diam., S. 19° W., 22 lks. dist., marked "T<sub>6</sub>S R<sub>15</sub>E S<sub>1</sub> CC BT."

Thence,

40.08

South, on random line, on W. bdy. of sec. 6 (N.  $\frac{1}{2}$ ), Fall 6 lks. W. of the original  $\frac{1}{4}$  sec. cor. of secs. 1 and 6, which is a palo verde post, 3 ins. square, marked " $\frac{1}{4}$ S" on W. face, firmly set in a mound of stone, and witnessed by the original bearing tree:

A palo verde, 10 ins. diam., S. 40° E., 50 lks. dist., marked " $\frac{1}{4}$ S BT."

True course and dist. of N.  $\frac{1}{2}$  of W. bdy. of sec. 6 are therefore N. 0° 05' W., 40.08 chs.

Thence,

40.00

South, on random line, on W. bdy. of sec. 6 (S.  $\frac{1}{2}$ ). Intersect the point of original location of the cor. of secs. 1, 6, 7 and 12, determined by reference to the faint remains of the original pits, and mound of earth. The original cor. monument, a sandstone, 14x10x4 ins., marked with one notch on one face, and 5 notches on opposite face is lying on the ground alongside the cor. point.

There are no bearing trees.

True course and dist. of S.  $\frac{1}{2}$  of W. bdy. of sec. 6 are therefore, North, 40.00 chs.

39.63

South, on random line, on W. bdy. of sec. 7 (N.  $\frac{1}{2}$ ). Fall 35 lks. W. of the original  $\frac{1}{4}$  sec. cor. of secs. 7 and 12, which is a decayed palo verde post, 3 ins. square, marked " $\frac{1}{4}$ S" on W. face, firmly set in a mound of stone. No bearing trees.

True course and dist. of N.  $\frac{1}{2}$  of W. bdy. of sec. 7 are therefore N. 0° 30' W., 39.63 chs.

Thence,

39.88

South, on random line, on W. bdy. of sec. 7 (S.  $\frac{1}{2}$ ). Intersect the original location of the cor. of secs. 7, 12, 13 and 18, determined by reference to the faint traces of the original pits and mound of earth. The original cor. monument, a decayed palo verde post, 2 ft. long, 4 ins. square, faintly marked with 2 notches on one edge, and 4 notches on opposite edge is lying on the ground alongside the cor. point. There are no bearing trees.

True course and dist. of S.  $\frac{1}{2}$  of W. bdy. of sec. 7 are therefore, North, 39.88 chs.

40.02

South, on random line, on W. bdy. of sec. 18 (N.  $\frac{1}{2}$ ). Fall 15 lks. E. of the original  $\frac{1}{4}$  sec. cor. of secs. 13 and 18, which is a mesquite post, 4 ins. square, 14 ins. above ground, marked " $\frac{1}{4}$ S" on W. face, firmly set, and witnessed by faint traces of original pits N. and S., and mound of earth, W. of cor. No bearing trees.

True course and dist. of N.  $\frac{1}{2}$  of W. bdy. of sec. 18 are

Dependent Resurvey of the West boundary of Township 6 South, Range 16 East. 11

Chains. therefore N.0° 13'E., 40.02 chs.

Thence,  
 40.00 South, on random line, on W. bdy. of sec. 18 (S.  $\frac{1}{4}$ ). Diligent search in this vicinity fails to reveal any evidence of the original cor. of secs. 13, 18, 19 and 24. Set temp. sec. cor.  
 Continue measurement.

80.00 South, on a random line, on W bdy. of sec. 19, Diligent search in this vicinity fails to reveal any evidence of the original  $\frac{1}{4}$  sec. cor. of secs. 19 and 24. Set temp.  $\frac{1}{4}$  sec. cor.

120.00 Diligent search in this vicinity fails to reveal any evidence of the original cor. of secs. 19, 24, 25 and 30. Set temp. sec. cor.  
 Continue measurement.

160.00 South, on random line, on W. bdy. of sec. 30. Diligent search in this vicinity fails to reveal any evidence of the original  $\frac{1}{4}$  sec. cor. of secs. 25 and 30. Set temp.  $\frac{1}{4}$  sec. cor.

200.00 Diligent search in this vicinity fails to reveal any evidence of the original cor. of secs. 25, 30, 31 and 36. Set temp. sec. cor.  
 Continue measurement.

240.00 South, on a random line on W. bdy. of sec. 31. Diligent search in this vicinity fails to reveal any evidence of the original  $\frac{1}{4}$  sec. cor. of secs. 31 and 36. Set temp.  $\frac{1}{4}$  sec. cor.

277.19 The original cor. of Ts. 6 and 7 S., R. 15 E., hereinafter described, brs. E. 6.22 chs.  
 280.63 Fall 6.30 chs. W. of reestablished cor. of Ts. 6 and 7 S., R. 16 E., which is a granite stone, 12x10x4 ins. above ground, firmly set, marked with 6 notches on each of N., S. and E. edges. No accessories can be found. This cor. was originally established as cor. of Ts. 6 and 7 S., Rs. 15 and 16 E., but changed to the present designation by Jesse B. Wright, U.S.S. in 1913, when he reestablished the cor. of Ts. 6 and 7 S., R. 15 E. only.

The true course and dist. of line from this Tp. cor. back to original  $\frac{1}{4}$  sec. cor. of secs. 13 and 18, are therefore N.1°17'W., 280.70 chs., which, to maintain original proportion gives 40.10 chs. for the proper intervals for the reestablishment of the missing cors. T. 6 S., R. 16 E. being entirely subdivided and an accepted surveyed area, the original cors. found in the above described retracement must be reestablished in their original positions but changed to refer to areas in T. 6 S., R. 16 E. only, and the proportional measurement used for reestablishment of missing cors. to refer to areas in same township only. In connection with the resurvey of this line, as hereinafter described, the cors referring to areas in T. 6 S., R. 15 E. only are reestablished at such points on the line as to produce intervals of 40.00 chs. between E. and W. lines thru. such cors., counting from the closing cor. of Ts. 6 and 7 S., R. 15 E. only.

Resurvey:

Reestablish the cor. of Ts. 6 and 7 S., R. 16 E., above described, as follows:  
 Alongside old stone, set an iron post, 3' ft. long, 3 ins. in diam., 24 ins. in the ground, for reestablished cor. of Ts. 6 and 7 S., R. 16 E. only, with brass cap, marked

T6S
R16E
S31
S 6
T7S


12 Dependent Resurvey of the West boundary of Township 6 South, Range 16 East.

Chains.

Raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor. Thence, N. 1° 17' W., on true line, on W. bdy. of sec. 31. Over rolling land, thru. scattering undergrowth. Wash, 10 lks. wide, course NE.

1.93  
3.44

Intersect the reestablished cor. of Ts. 6 and 7 S., R. 15 E. established by Jesse B. Wright, U.S.S. in 1913, which is an iron post, 3 ins. in diam., 12 ins. above ground, firmly set, marked on brass cap,

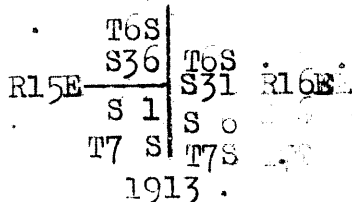


witnessed by


- A palo verde, 12. ins. in diam., S. 36 1/2° W. 12 lks. dist., marked "T7SR15ES1 BT.", and
- A palo verde, 10 ins. in diam., N. 58° W., 38 lks. dist. marked "T6S R15E S36 BT."

Continue line and measurement.


- 5.60 Spur, slopes NE.
- 17.00 Spur, slopes E.; descend 70 ft., over N. slope.
- 25.00 Wash, 3.00 chs. wide, course E.; ascend 75 ft., over S. slope.
- 30.00 Spur, slopes E.
- 40.00 Wash, 50 lks. wide, course E.
- 40.10 (Proportional dist.), Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 31 only, with brass cap, marked



- 43.45 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor. (40.00 chs. northing from cor. of Ts. 6 and 7 S., R. 16 E.), Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 36 only, with brass cap, marked



- 48.00 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor. Spur, slopes E.
- 78.50 Wash, 2.00 chs. wide, course E.
- 80.20 (Proportional dist.), Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 30 and 31 only, with brass cap, marked




Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor. Land, rolling. Soil, disintegrated granite, rocky, 4th rate. Subsoil, sandy, 3rd rate; average depth, 3 ft. No timber. Undergrowth, scattering scrub palo verde, cholla, greasewood, catclaw scrub mesquite, huck thorn, scrub oak, ocotilla and sahuaro.

N. 1° 17' W., on true line, on W. bdy. of sec. 30; Over rolling land, thru. scattering undergrowth, and very scattering timber.

Dependent Resurvey of the  
West boundary of Township 6 South, Range 16 East.

Chains.


3.26 (80.00 chs.northing from cor.of Ts.6 and 7 S.,R.15 E.),  
Set an iron post, 3 ft.long, 2 ins. in diam., 4 ins.in the  
ground, in a mound of stone, for reestablished cor.of  
secs. 25 and 36 only, with brass cap,marked



1919


27.14 Raise a mound of stone, 2 ft.base, 1 1/2 ft.high,W.of cor.  
Wash,50 lks.wide, course E.  
39.80 Wash,20 lks.wide, course NE.

40.10 (Proportional dist.) Set an iron post, 3 ft.long, 1 in.in  
diam., 26 ins. in the ground, for reestablished 1/4 sec.  
cor. of sec.30 only, with brass cap, marked



1919


43.27 Raise a mound of stone, 2 ft.base, 1 1/2 ft.high,E.of cor.  
(40.00 chs.northing from cor.of secs.25 and 36),  
Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in  
the ground, for reestablished 1/4 sec.cor.of sec.25  
only, with brass cap, marked



1919

44.00 Raise a mound of stone, 2 ft.base, 1 1/2 ft.high,W.of cor.  
Spur,slopes NE.; descend 80 ft.,over N.slope.  
54.00 North end of knoll.

55.00 Wash,30 lks.wide, course E.  
60.00 Descend 60 ft.,over N.slope.  
70.00 Center of wash, 2.00 chs.wide, course E.  
80.20 True point for reestablishment of cor.of secs.19 and 30  
only falls in wash,course E.; therefore, at  
80.42 Set an iron post, 3 ft.long, 2 ins. in diam., 24 ins. in  
the ground, for witness cor. to the reestablished cor.  
of secs.19 and 30 only, with brass cap, marked



W/C  
1919

Raise a mound of stone,2 ft.base, 1 1/2 ft.high,E.of cor.  
Land, rolling.  
Soil,decomposed granite,rocky, 4th rate.  
Subsoil,sandy, 3rd rate.  
Timber,very scattering small mesquite and ironwood.  
Undergrowth,scattering scrub palo verde,cholla,greasewood,  
catclaw,scrub mesquite, buckthorn,oak brush,ocotilla  
and sahuaro.

From the true point for reestablished cor.of secs.19 and  
30,  
N.1° 17'W.,on true line,on W.bdy.of sec.19.  
Over rolling land, thru. scattering timber and undergrowth.  
0.22 The witness cor.to reestablished cor.of secs.19 and 30,  
hereinbefore described.  
3.08 (80.00chs.northing from cor.of secs.25 and 36),  
Set an iron post, 3 ft.long, 2 ins. in diam.,24 ins. in

14 The West boundary of Township 6 South, Range 16 East. Dependent Resurvey of

Chains.

the ground for reestablished cor. of secs. 24 and 25 only, with brass cap, marked

T6S  
S24  
S25  
R15E  
1919

14.80 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor. Wash, 30 lks. wide, course E.

27.40 Ridge, brs. E and W.  
40:10 (Proportional dist.); Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 19 only, with brass cap, marked

1/4 S 19  
1919

43.09 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor. (40.00 chs. northing from cor. of secs. 24 and 25), Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 24 only, with brass cap, marked

1/4 S 24  
1919

50.40 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor. Road brs. NE. and SW.  
58.00 Spur, slopes NE.  
72.50 Wash, 30 lks. wide, course NE.  
80.20 (Proportional dist.), Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 18 and 19 only, with brass cap, marked

T6S  
S18  
S19  
R16E

1919

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor. Land, rolling. Soil, decomposed granite, rocky, 4th rate. Subsoil, sandy, 3rd rate. Timber, scattering mesquite and ironwood. Undergrowth, scattering scrub palo verde, cholla, greasewood, scrub mesquite, buck thorn, scrub oak, ocotilla, cat-claw and sahuaro.

N. 1° 17' W., on true line, on W. bdy. of sec. 18. Over rolling land, thru. scattering timber and undergrowth.

9.80 Wash, course NE.  
2.90 (80.00 chs. northing from cor. of secs. 24 and 25), Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 13 and 24 only, with brass cap, marked

T6S  
S13  
~~S24~~  
R15E


1919




Dependent Resurvey of  
the West boundary of Township 6 South, Range 16 East.

Chains.


4.00 Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.  
 Wash, course NE.  
 20.10 Wash, 20 lks. wide, course NE.  
 26.50 Rim of wide wash; descend 135 ft., over N. slope.  
 35.00 Bottom of descent; over level land.  
 40.10 (Proportional dist.), Intersect the original ¼ sec. cor.  
 of secs. 13 and 18, hereinbefore described. Reestablish  
 this cor. to refer to sec. 18 only, as follows:  
 Alongside old wood post, set an iron post, 3 ft. long, 1  
 in. in diam., 26 ins. in the ground, for reestablished  
 ¼ sec. cor. of sec. 18 only, with brass cap, marked



42.91 Destroy remains of original accessories, and raise a  
 mound of stone, 2 ft. base, 1½ ft. high, E. of cor.  
 Thence,  
 N. 0° 13' E., on true line, continuing measurement of W.  
 bdy. of sec. 18.  
 (40.00 chs. northing from cor. of secs. 13 and 24),  
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
 the ground, for reestablished ¼ sec. cor. of sec. 13  
 only, with brass cap, marked



48.30 Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.  
 Center of wash, 1.00 ch. wide, course NE.  
 55.00 Ascend 60 ft., over S. slope.  
 58.40 Spur, slopes NE.  
 64.70 Wash, 3.00 chs. wide, course E.; ascend 30 ft., over SE.  
 slope.  
 80.12 (40.02 chs. N. 0° 13' E. from ¼ sec. cor. of sec. 18),  
 Intersect the original location of the cor. of secs. 7, 12,  
 13 and 18, hereinbefore described, at which point re-  
 establish the cor. to refer to secs. 7 and 18 only, as  
 follows: Reset the original wood post, 14 ins. in  
 the ground, and alongside same, set an iron post, 3  
 ft. long, 2 ins. in diam., 24 ins. in the ground, for  
 reestablished cor. of secs. 7 and 18 only, with brass  
 cap, marked



Destroy the remains of the original accessories, and  
 raise a mound of stone, 2 ft. base, 1½ ft. high, E. of  
 cor.  
 Land, rolling.  
 Soil, decomposed granite, rocky, 4th rate.  
 Subsoil, sandy, 3rd rate.  
 Timber, scattering mesquite and ironwood.  
 Undergrowth, scattering cholla, catclaw, greasewood, scrub  
 palo verde and mesquite, and sahuaro.

2.79 North, on true line, on W. bdy. of sec. 7.  
 Over rolling land, thru. scattering undergrowth.  
 (80.00 chs. northing from cor. of secs. 13 and 24),  
 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in  
 the ground, for reestablished cor. of secs. 12 and 13  
 only, with brass cap, marked

Dependent Resurvey of  
16 West boundary of Township 6 South, Range 16 East.

Chains.

T6S
S12
S13
R15E

1919

15.90 Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.  
Shallow wash, 20 lks. wide, course NE.  
24.50 Wash, 1.00 ch. wide, 10 ft. deep, course NE.  
27.40 Wash, 50 lks. wide, 10 ft. deep, course NE.  
33.50 Wash, 1.00 ch. wide, 8 ft. deep, course NE.  
39.20 Wash, 60 lks. wide, 10 ft. deep, course NE.  
39.88 Intersect the original  $\frac{1}{4}$  sec. cor. of secs. 7 and 12, herein-  
before described. Reestablish to refer to sec. 7 only,  
as follows: Remove mound of stone from around old  
wood post, and alongside same, set an iron post, 3 ft.  
long, 1 in. in diam., 26 ins. in the ground, for re-  
established  $\frac{1}{4}$  sec. cor. of sec. 7 only, with brass cap,  
marked

$\frac{1}{4}$ S 7
-------------------

1919

42.79 Destroy the remains of the original accessories, and  
raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, E. of  
cor.  
Thence,  
N.  $0^{\circ} 30' W.$ , on true line, continuing measurement of W.  
bdy. of sec. 7.  
(40.00 chs. northing from cor. of secs. 12 and 13),  
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
the ground, for reestablished  $\frac{1}{4}$  sec. cor. of sec. 12  
only, with brass cap, marked

$\frac{1}{4}$ S12
-------------------

1919

64.38 Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.  
66.38 Enter large wash, course SE.  
79.10 Leave wash, course SE.  
79.51 Spur, slopes E.  
(39.63 chs. N.  $0^{\circ} 30' W.$  from  $\frac{1}{4}$  sec. cor. of sec. 7), Intersect  
the original point of location of the cor. of secs. 1,  
6, 7 and 12, hereinbefore described, at which point  
reestablish the cor. to refer to secs. 6 and 7 only,  
as follows: Reset the original stone cor. monument 9  
ins. in the ground, with one notch on N. edge, and 5  
notches on S. edge, and alongside stone, set an iron  
post 3 ft. long, 2 ins. in diam., 24 ins. in the ground  
for reestablished cor. of secs. 6 and 7 only, with  
brass cap, marked

T6S
S 6
S 7
R16E

1919

Destroy remains of original accessories, and raise a  
mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, E. of cor.  
Land, rolling.  
Soil, sandy and rocky, 3rd and 4th rate.  
No timber.  
Undergrowth, scattering cholla, catclaw, greasewood, scrub  
palo verde and mesquite and sahuaro.

Dependent Resurvey of the West boundary of Township 6 South, Range 16 East.

Chains.

North, on true line, on W. bdy. of sec. 6.  
 Over rolling land, thru. scattering undergrowth.  
 0.50 Top of cliff, 40 ft. high, brs. E. and W.; descend to  
 1.00 Foot of cliff, brs. E. and W.  
 3.28 (80.00 chs. northing from cor. of secs. 12 and 13),  
 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in  
 the ground, for reestablished cor. of secs. 1 and 12,  
 only, with brass cap, marked

T6S |  
 S 1 |  
 S12 |  
 R15E |  
 1919

4.20 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.  
 Dry wash, 10 lks. wide, course NE.  
 9.00 Wash, 50 lks. wide, course NE.  
 18.30 Wash, 2.00 chs. wide, course NE.  
 35.15 Spur, slopes E.; descend 80 ft., over NW. slope.  
 40.00 Intersect the original 1/4 sec. cor. of secs. 1 and 6, hereinbe-  
 fore described. Reestablish this cor. to refer to sec.  
 6 only, as follows: Remove mound of stone from around  
 wood cor. post, and alongside same,  
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
 the ground, for reestablished 1/4 sec. cor. of sec. 6 only,  
 with brass cap, marked

1/4 S 6 |  
 1919

40.38 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor. Thence,  
 N. 0° 5' W. on true line, continuing measurement of W. bdy. of sec. 6  
 43.28 Dry wash, 10 lks. wide, course NE.  
 (40.00 chs. northing from cor. of secs. 1 and 12),  
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
 the ground, for reestablished 1/4 sec. cor. of sec. 1 only,  
 with brass cap, marked

1/4 S 1 |  
 1919

45.18 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.  
 53.50 Spur, slopes E.; descend 120 ft., over N. slope.  
 61.00 Road brs. NE. and SW.  
 78.50 End of spur, from SW.  
 80.08 Dry wash, 20 lks. wide, 2 ft. deep, course NE.  
 (40.08 chs. N. 0° 5' W. from 1/4 sec. cor. of sec. 6),  
 Intersect the original closing cor. of Ts. 6 S., Rs. 15 and  
 16 E. on 1st Std. Parallel S., hereinbefore described,  
 reestablish this cor. as follows: Remove mound of  
 earth from around original wood cor. post, and alongside  
 same, set an iron post, 3 ft. long, 3 ins. in diam., 24  
 ins. in the ground, for reestablished closing cor. of  
 Ts. 6 S., Rs. 15 and 16 E., with brass cap, marked

T5S R15E |  
 S36 |  
 S 1 | S 6 |  
 R15 E | R16E |  
 T6S |  
 C C |  
 1919

witnessed by the original bearing trees:  
 A mesquite, 24 ins. in diam., S. 40° E., 32 lks.  
 dist., marked "T6S R16E S6 CCBT."  
 A mesquite, 15 ins. in diam., S. 19° W., 22 lks.  
 dist., marked "T6S R15E S1 CC BT."

18 Dependent Resurvey of the West boundary of Township 6 South, Range 16 East.

Chains.

Destroy the remains of the other original accessories.  
 Land, rolling.  
 Soil, rocky, 4th rate.  
 Timber, very scattering mesquite.  
 Undergrowth, scattering cholla, catclaw, scrub palo verde,  
 and mesquite.

-----

Boundaries of Township 6 South, Range 15 East.  
 Latitudes, Departures, and Closing Errors.

Line designated.	True course.	Dist.	Latitudes.		Departures.	
			N.	S.	E.	W.
South boundary,	N.89°57'W.	405.58	.35			405.58
West boundary,	North;	474.15	474.15			
North boundary, (1st Std.Par.S.)	N.86°45'E.	7.18	.41		7.17	
	N.89°22'E.	80.37	.88		80.37	
	N.89°30'E.	39.60	.35		39.60	
	N.89°07'E.	39.35	.61		39.35	
	S.89°59'E.	120.90		.04	120.90	
	N.89°20'E.	79.64	.92		79.64	
	S.89°24'E.	32.20		.34	32.20	
East boundary,	S.0°05'E.	40.08		40.08	.06	
	South,	40.00		40.00		
	S.0°30'E.	39.63		39.63	.35	
	South;	39.88		39.88		
	S.0°13'W.	40.02		40.02		.15
	S.1°17'E.	277.26		277.19	6.22	
Convergency,					.47	
Totals,			477.67	477.18	406.33	405.73
			477.18		405.73	
Error in latitude,			0.49			
Error in departure,					0.60	


Survey of Subdivision lines of Township 6 South, Range 15 East. 19

Chains.

The original cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp. is an iron post, 3 ins. in diam., 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by a mesquite bearing tree 14 ins. in diam., S. 30° W., 23 lks. dist., marked "T7SR15ES2BT," and a mound of stone W. of cor.

Thence, North, on the Sectional Guide Meridian, between secs. 35 and 36.

- 0.03 Over rolling land, thru. scattering undergrowth.
- 5.00 Water falls 5 ft. high, brs. E. 60 lks. dist.
- 13.50 Ridge, brs. E. and W.
- 16.50 Wash, 2.00 chs. wide, course E.
- 31.50 Spur, slopes E.
- 39.00 Wash, 50 lks. wide, course NE.
- 40.00 Wash, 10 lks. wide, course NE.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked



- 42.30 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.
- 45.60 Wash, 10 lks. wide, course E.
- 53.20 Low spur, slopes SE.
- 76.50 Wash, 90 lks. wide, course E.
- 80.00 Spur, slopes NE.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 25, 26, 35 and 36, with brass cap, marked




Raise a mound of stone 2 ft. base, 1 1/2 ft. high, W. of cor. Land, rolling. Soil, sandy and rocky, 2nd and 3rd rate. No timber. Undergrowth, scattering mesquite, greasewood, palo verde, blackbrush, cactus and yucca.

- 40.00 S. 89° 57' E., on a random line, bet. secs. 25 and 36.
- 72.42 Set temp. 1/4 sec. cor. Intersect the E. bdy. of the Tp., 2 lks. S. of the reestablished cor. of secs. 25 and 36, hereinbefore described.

Thence, N. 89° 58' W., on a true line, bet. secs. 25 and 36. Over rolling land, thru. dense undergrowth.

- 13.40 Spur, slopes NE.
- 32.42 Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground, in a mound of stone, for 1/4 sec. cor., with brass cap, marked,



- 33.40 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.
- 38.40 Spur, slopes NE.
- 67.40 Wash, 70 lks. wide, course NE.
- 69.40 Wash, 10 lks. wide, course N.
- 72.42 Spur, slopes NE.
- 72.42 The cor. of secs. 25, 26, 35 and 36. Land, rolling. Soil, sandy and rocky, 2nd and 3rd rate. No timber. Undergrowth, dense mesquite, greasewood, palo verde, black brush, cactus and yucca.

20 Subdivision lines of Township 6 South, Range 15 East.

Chains.

North, on the Sectional Guide Meridian, bet. secs. 25 and 26.  
 Over rolling land, thru. dense undergrowth.  
 14.50 Draw, course NE.  
 38.70 South edge of wash, 6.30 chs. wide, course E.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in  
 the ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked

$\frac{1}{4}$   
 S26 | S25  
 1919

52.10 Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.  
 Draw, course E.  
 53.00 Over mesa, sloping E.  
 64.00 Wash, 15 lks. wide, course E.  
 70.00 Road, brs. E. and W.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the  
 ground, for cor. of secs. 23, 24, 25 and 26, with brass cap,  
 marked

T6S | R15E  
 S23 | S24  
 S26 | S25  
 1919

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.  
 Land, rolling.  
 Soil, sandy and rocky, 2nd and 3rd rate.  
 No timber.  
 Undergrowth, dense mesquite, greasewood, palo verde, black  
 brush, cactus and yucca.

40.00 S.  $89^{\circ}58'E.$ , on a random line, bet. secs. 24 and 25.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 70.54 Intersect the E. bdy. of the Tp., 12 lks. S. of the reestab-  
 lished cor. of secs. 24 and 25, hereinbefore described.  
 Thence,  
 S.  $89^{\circ}57'W.$ , on a true line, bet. secs. 24 and 25.  
 Over rolling land, thru. scattering undergrowth.  
 30.54 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
 the ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked

$\frac{1}{4}$  S 24  
 S 25  
 1919

34.80 Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.  
 Wash, 60 lks. wide, course NE.  
 56.00 Road brs. NE and SW.  
 59.60 Wash, 40 lks. wide, course NE.  
 70.54 The cor. of secs. 23, 24, 25 and 26.  
 Land, rolling.  
 Soil, sandy and rocky, 2nd and 3rd rate.  
 No timber.  
 Undergrowth, scattering mesquite, palo verde, chaparral,  
 cactus and yucca.

North, on Sectional Guide Meridian, bet. secs. 23 and 24.  
 Over rolling land, thru. scattering undergrowth.  
 3.50 Wash, 20 lks. wide, course E.  
 13.00 Small draw, course E.  
 24.50 Wash, 1.00 ch. wide, course E.  
 31.70 Spur, slopes E.  
 39.10 Spur, slopes E.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in

Survey of the Subdivision lines in Township 6 South, Range 15 E. 21

Chains.

the ground, for  $\frac{1}{4}$  sec. cor., with brass cap, with

S23 | S24

1919

41.06  
45.00  
50.50  
53.25  
60.00  
80.00

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.  
Wash, 20 lks. wide, course E.  
Spur, slopes E.  
Draw, course E.  
Wash, 150 lks. wide, course E.  
Spur, slopes E.  
Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in  
the ground, for cor. of secs. 13, 14, 23 and 24, with  
brass cap, marked

T6S | R15E  
S14 | S13  
S23 | S24  
1919

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.  
Land, rolling.  
Soil, sandy and rocky, 2nd and 3rd rate.  
No timber.  
Undergrowth, scattering mesquite, palo verde, chaparral,  
cactus and yucca.

40.00  
68.97

N.  $89^{\circ}57'E.$ , on a random line, bet. secs. 13 and 24.  
Set temp.  $\frac{1}{4}$  sec. cor.  
Intersect the E. bdy. of the Tp., 16 lks. S. of the reestab-  
lished cor. of secs. 13 and 24, hereinbefore described.

2.36  
28.97

Thence,  
S.  $89^{\circ}50'W.$ , on a true line, bet. secs. 13 and 24.  
Over rolling land, thru, dense undergrowth.  
Wash, 1.00 ch. wide, course NE.  
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked

S 13  
S 24  
1919

31.50  
33.40  
40.50  
45.40  
60.70  
68.97

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.  
Wash, 20 lks. wide, course NE.  
Draw, course SE.  
Wash, 40 lks. wide, course NE.  
Wash, 1.00 ch. wide, course NE.  
Wash, 20 lks. wide, course NE.  
The cor. of secs. 13, 14, 23 and 24.  
Land, rolling.  
Soil, rocky, 3rd rate.  
No timber.  
Undergrowth, dense cactus and palo verde.

5.00  
6.00  
15.85  
30.00  
40.00


North, on the Sectional Guide Meridian, bet. secs. 13 and 14.  
Over rolling land, thru, dense undergrowth.  
Wash, 80. lks. wide, course W.  
Wash, 60 lks. wide, course E.  
Spur, slopes NE.  
Wash, 60 lks. wide, course E.  
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked

S14 | S13  
1919

22 Subdivision lines of Township 6 South, Range 15 East.

Chains.

51.00 Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.  
 Wash, 60 lks. wide, course E.  
 58.00 Wash, 2.00 chs. wide, course NE.  
 76.00 Wash, 1.00 ch. wide, course NE.  
 80.00 Wash, 1.00 ch. wide, course NE.  
 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in  
 the ground, for cor. of secs. 11, 12, 13 and 14, with brass  
 cap, marked




1919

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.  
 Land, rolling.  
 Soil, rocky, 3rd rate.  
 No timber.  
 Undergrowth, dense palo verde, mesquite, chaparral, cactus,  
 and greasewood.

40.00 N.  $89^{\circ}50'E.$ , on a random line, bet. secs. 12 and 13.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 68.45 Intersect the E. bdy. of the Tp., 21 lks. N. of the reestab-  
 lished cor. of secs. 12 and 13, hereinbefore described.


Thence,  
 S.  $89^{\circ}59'W.$ , on a true line, bet. secs. 12 and 13.  
 Over rolling land, thru. scattering undergrowth.

23.45 Wash, 40 lks. wide, course NE.  
 28.45 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
 the ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked



41.45 Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.  
 Wash, 4.00 chs. wide, course NE.  
 48.45 Wash, 40 lks. wide, course NE.  
 54.45 Wash, 50 lks. wide, course NE.  
 63.45 Wash, 1.00 ch. wide, course NE.  
 68.45 The cor. of secs. 11, 12, 13 and 14.  
 Land, rolling.  
 Soil, rocky, 3rd rate.  
 No timber.  
 Undergrowth, scattering palo verde, mesquite, chaparral,  
 cactus and greasewood.

North, on the Sectional Guide Meridian, bet. secs. 11 and 12.  
 Over rolling land; thru. dense undergrowth.  
 31.30 South edge of draw, course NE.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
 the ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked



1919

44.00 Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.  
 Wash, 6.00 chs. wide, course NE.  
 49.47 North edge of draw, course NE.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in  
 the ground, for cor. of secs. 1, 2, 11 and 12, with brass  
 cap, marked



Subdivision lines of Township 6 South, Range 15 East.

Chains.

T6S	R15E.
S 2	S 1
S11	S12
1919	

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor. Land, rolling.  
Soil, rocky, 2nd and 3rd rate.  
No timber.  
Undergrowth, dense palo verde, mesquite, chaparral and cactus.

40.00 N. 89° 59' E., on a random line, bet. secs. 1 and 12.  
Set temp. ¼ sec. cor.  
68.15 Intersect the E. bdy. of the Tp., 18 lks. S. of the reestablished cor. of secs. 1 and 12, hereinbefore described.  
Thence,  
S. 89° 51' W.; on a true line, bet. secs. 1 and 12.  
Over rolling land, thru. dense undergrowth.  
0.75 Draw, course NE.  
9.75 East edge of draw, course NE.  
15.25 Wash, 30 lks. wide, course NE.  
17.05 West edge of draw, course NE.  
28.15 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

S 1
¼
S 12
1919

68.15 Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor. The cor. of secs. 1, 2, 11 and 12.  
Land, rolling.  
Soil, rocky, 2nd and 3rd rate.  
No timber.  
Undergrowth, dense palo verde, mesquite, chaparral and cactus.

7.00 North, on true line, on Sectional Guide Meridian, bet. secs. 1 and 2.  
Over rolling land, thru. scattering undergrowth:  
10.00 Road brs. NE. and SW.  
20.00 Wash, 20 lks. wide, course NE.  
20.00 Head of draw, course E.  
21.50 Spur, slopes E.  
23.60 Wash, 40 lks. wide, course NE.  
26.50 Wash, 50 lks. wide, course NE.  
36.50 Wash, 150 lks. wide, course NE.  
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap,

S 2	S 1
¼	
1919	

42.20 Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.  
Wash, 2.00 chs. wide, course E.  
45.25 Ridge, brs. E. and W.  
55.00 Wash, 50 lks. wide, course NE.  
58.00 Ridge, brs. NE. and SW.  
66.00 Wash, 1.00 ch. wide, course NE.  
68.30 Ridge, brs. NE. and SW.  
72.50 Wash, 2.00 chs. wide, course NE.  
76.76 Intersect the 1st Standard Parallel South, 3.67 chs. N. 89° 20' E. from the reestablished standard cor. of secs. 35 and 36, hereinbefore described.  
At point of intersection, set an iron post, 3 ft. long,

24 Subdivision lines of Township 6 South, Range 15 East.

Chains.

2 ins. in diam., 24 ins. in the ground, for closing cor. of secs.1 and 2, with brass cap, marked




Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, S. of cor. Land, rolling. Soil, rocky, 3rd and 4th rate. No timber. Undergrowth, scattering cholla, palo verde, mesquite, cat-claw and sahuarro.

The original cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp. is an iron post, 3 ins. diam., 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by a mound of stone, W. of cor. No bearing trees.

Thence, N. 0° 01' W., bet. secs. 34 and 35. Over rolling land, thru. dense undergrowth.


7.00  
17.65  
20.00  
32.40  
40.00

Draw, course NE.  
Draw, course E.  
Low ridge, brs. E. and W.  
Low ridge, brs. E. and W.  
Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground, in a mound of stone, for 1/4 sec. cor., with brass cap, marked



42.10  
62.20  
68.00  
72.90  
77.00  
77.80  
80.00

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor. Small draw, course NW. Shallow draw, 7.80 chs. wide, course E. Wash, 3.00 chs. wide, course E. Road, brs. NE. and SW. Road, brs. E and W. S. bank of wash, 5.00 chs. wide, course E. Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for cor. of secs. 26, 27, 34 and 35, with brass cap, marked



from which, A willow, 30 ins. in diam., brs. N. 62 1/4° W., 52 lks. dist., marked T6S R15E S27 BT.

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor. Land, rolling. Soil, rocky, 2nd and 3rd rate. No timber. Undergrowth, dense mesquite, greasewood, cactus, yucca, black brush, and palo verde.

40.00  
79.96

S. 89° 57' E., on a random line, bet. secs. 26 and 35. Set temp. 1/4 sec. cor. Intersect N. and S. line, 9 lks. S. of the cor. of secs. 25, 26, 35 and 36. Thence, S. 89° 59' W., on a true line, bet. secs. 26 and 35. Over rolling land, thru. dense undergrowth.

Subdivision lines of Township 6 South, Range 15 East.

Chains.

- 2.90 Low spur, slopes NE.
- 16.50 Wash, 60 lks. wide, course NE.
- 21.30 Low ridge, brs. NE. and SW.
- 27.50 Draw, course NE.
- 33.00 Low ridge, brs. NE. and SW.
- 39.98 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked

$\frac{1}{4}$  S 26  


---

S 35  
1919

- 42.50 Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.
- 49.00 Draw, course N.
- 70.00 Wash, 15 lks. wide, course NE.
- 70.00 Wash, 20 lks. wide, course N.
- 70.70 Wash, 30 lks. wide, course NE.
- 73.30 Road brs. NE. and SW.
- 79.96 The cor. of secs. 26, 27, 34 and 35.  
Land, rolling.  
Soil, rocky, 2nd and 3rd rate.  
No timber.  
Undergrowth, dense mesquite, greasewood, palo verde, black brush, cactus and yucca.

- 
- N.  $0^{\circ}01'W.$ , bet. secs. 26 and 27.  
Over rolling land, thru. dense undergrowth.
  - 3.00 North bank of wash, 5.00 chs. wide, course E.
  - 8.50 Wash, 1.00 ch. wide, course E.
  - 13.50 Wash, 1.00 ch. wide, course E.
  - 28.00 Wash, 10 lks. wide, course E.
  - 36.00 Wash, 50 lks. wide, course E.
  - 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked

$\frac{1}{4}$   
S27 | S26  


---

1919

- 41.00 Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.
- 46.00 Wash, 30 lks. wide, course SE.
- 46.00 Wash, 20 lks. wide, course E.
- 51.00 Wash, 50 lks. wide, course E.
- 63.20 Low spur, slopes E.
- 70.80 Wash, 20 lks. wide, course E.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 22, 23, 26 and 27, with brass cap, marked

T6S | R15E  
S22 | S23  


---

S27 | S26  
1919

- Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.
- Land, rolling.
- Soil, rocky, 2nd rate.
- No timber.
- Undergrowth, dense palo verde, mesquite, black brush, cactus and yucca.

- 
- N.  $89^{\circ}59'E.$ , on a random line, bet. secs. 23 and 26.
  - 40.00 Set temp.  $\frac{1}{4}$  sec. cor.
  - 79.94 Intersect N. and S. line, 2 lks. N. of the cor. of secs. 23, 24, 25 and 26.  
Thence,  
West, on true line, bet. secs. 23 and 26.
  - 35.00 Over rolling land, thru. dense undergrowth.  
Wash, 30 lks. wide, course NE.

26 Subdivision lines of Township 6 South, Range 15 East.

Chains.

39.97 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked

$\frac{1}{4}$  S 23  
S 26  
1919

62.00 Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.  
Wash, 75 lks. wide, course NE.

77.00 Spur, slopes S.

79.94 The cor. of secs. 22, 23, 26 and 27.

Land, rolling.

Soil, sandy and adobe, 2nd and 3rd rate.

No timber.

Undergrowth, dense cactus, palo verde, buck thorn and mesquite.

N.  $0^{\circ}01'$  W., bet. secs. 22 and 23.

Over rolling land, thru, dense undergrowth.

0.50 Ridge, brs. E. and W.

5.30 Wash, 30 lks. wide, course E.

6.30 Spur, slopes SE.

9.00 Wash, 75 lks. wide, course SE.

12.20 Spur, slopes SE.

17.25 Wash, 180 lks. wide, course E.

20.30 Spur, slopes SE.

23.00 Wash, 30 lks. wide, course E.

26.34 Spur, slopes E.

30.00 Head of draw, course SE.

33.22 Ridge, brs. NW. and SE.

38.00 Draw, course SE.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked

$\frac{1}{4}$   
S22 | S23  
1919

47.75 Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.  
Ridge, brs. NE. and SW.

50.20 Wash, 50 lks. wide, course NE.

69.00 Center of wash, 7.00 chs. wide, course NE.

78.17 Spur, slopes E.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 14, 15, 22 and 23, with brass cap, marked

T6S | R15E  
S15 | S14  
S22 | S23  
1919

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

Land, rolling.

Soil, gravelly, 3rd rate.

No timber.

Undergrowth, cactus, catclaw, mesquite and palo verde.

East, on a random line, bet. secs. 14 and 23.


40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.90 Intersect N. and S. line, 18 lks. S. of the cor. of secs.

SURVEY OF THE SUBDIVISION LINES IN T. 6 S., R. 15 E.


Chains

13, 14, 23 and 24.  
 Thence  
 S. 89° 52' W., on a true line, bet. secs. 14 and 23.  
 Over rolling land, through dense undergrowth.  
 4.50 Wash, 20 lks. wide, course NE.  
 5.00 Draw, course NE.  
 9.50 Wash, 50 lks. wide, course NE.  
 16.60 Wash, 30 lks. wide, course NE.  
 30.30 Wash, 50 lks. wide, course NE.  
 39.95 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in  
 the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.




Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of  
 cor.  
 41.00 Wash, 1.00 ch. wide, course NE.  
 50.00 Wash, 1.00 ch. wide, course NE.  
 62.84 Ridge, bears NE. and SW.  
 70.00 Centre of wash, 7.00 chs. wide, course NE.  
 79.90 The cor. of secs. 14, 15, 22 and 23.  
 Land, rolling.  
 Soil, rocky; 3rd rate.  
 No timber.  
 Undergrowth, dense acactus, palo verde and cocotilla.

N. 0° 01' W., bet. secs. 14 and 15.  
 Over rolling land, through dense undergrowth.  
 5.00 Wash, 50 lks. wide, course NE.  
 10.50 Spur, slopes E.  
 26.50 Spur, slopes E.  
 32.00 Wash, 50 lks. wide, course E.  
 37.75 Spur, slopes NE.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in  
 the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.



Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of  
 cor.  
 42.45 Wash, 90 lks. wide, course NE.  
 45.00 Spur, slopes E.  
 48.00 Draw, course E.  
 54.10 Spur, slopes NE.  
 60.00 Draw, course NE.  
 64.00 Wash, 80 lks. wide, course E.  
 66.70 Spur, slopes E.  
 70.20 Spur, slopes E.  
 74.00 Spur, slopes NE.  
 78.00 Spur, slopes NE.  
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in  
 the ground, for cor. of secs. 10, 11, 14 and 15, with  
 brass cap mkd.




Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of  
 cor.  
 Land, rolling.  
 Soil, rocky; 3rd rate.  
 No timber.  
 Undergrowth, dense palo verde, mesquite, greasewood, cactus  
 and chapperal.

28. SURVEY OF THE SUBDIVISION LINES IN T. 6 S., R. 15 E.


Chains

N. 89° 52' E., on a random line, bet. secs. 11 and 14.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.76 Intersect N. and S. line, 20 lks. N. of the cor. of secs. 11, 12, 13 and 14.  
 Thence  
 N. 89° 59' W., on a true line, bet. secs. 11 and 14.  
 Over rolling land, through dense undergrowth.  
 2.00 Wash, 60 lks. wide, course NW.  
 27.50 Wash, 80 lks. wide, course NE.  
 39.88 Set an iron post,  $\frac{3}{4}$  ft. long, 1 in. diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.




Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.  
 46.40 Draw, course NE.  
 46.50 Wash, 40 lks. wide, course NE.  
 51.00 Wash, 50 lks. wide, course NE.  
 54.25 Spur, slopes NE.  
 57.85 Spur, slopes NE.  
 74.00 Spur, slopes NE.  
 79.76 The cor. of secs. 10, 11, 14 and 15.  
 Land, rolling.  
 Soil, rocky: 3rd rate.  
 No timber.  
 Undergrowth, dense palo verde, mesquite, greasewood & cactus.

N. 0° 01' W., bet. secs. 10 and 11.  
 Over rolling land, through dense undergrowth.  
 2.00 Draw, course NE.  
 6.00 Wash, 150 lks. wide, course NE.  
 13.50 Wash, 5.00 chs. wide, course NE.  
 17.00 Draw, course NE.  
 36.00 Wash, 15 lks. wide, course NE.  
 40.00 Set an iron post,  $\frac{3}{4}$  ft. long, 1 in. diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.



Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.  
 45.00 Road, bears NE. and SW.  
 56.50 Wash, 40 lks. wide, course NE.  
 58.75 Wash, 50 lks. wide, course NE.  
 62.80 Low spur, slopes NE.  
 75.00 Wash, 7.00 chs. wide, course NE.  
 78.43 Asc. 30 ft. over SE. slope.  
 80.00 Set an iron post,  $\frac{3}{4}$  ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 2, 3, 10 and 11, with brass cap mkd.



Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.  
 Land, rolling.  
 Soil, rocky; 3rd rate.  
 No timber.  
 Undergrowth, dense palo verde, mesquite, greasewood & cactus.

S. 89° 59' E., on a random line, bet. secs. 2 and 11.

Subdivision lines of Township 6 South, range 15 East. 29

Chains.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.60 Intersect the corner of secs. 1, 2, 11 and 12.  
 Thence,  
 N.  $89^{\circ}59'W.$ , on a true line, bet. secs. 2 and 11.  
 Over rolling land, thru. dense undergrowth.  
 12.70 Road brs. NE and SW.  
 39.80 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
 the ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked

S 2  
 $\frac{1}{4}$   
 S 11  
 1919

43.50 Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.  
 56.50 Wash, 30 lks. wide, course NE.  
 60.00 Wash, 80 lks. wide, course N.  
 66.00 Wash, 30 lks. wide, course NE.  
 66.00 Draw, 100 lks. wide, course NE.  
 71.50 Wash, 50 lks. wide, course NE.  
 79.60 The cor. of secs. 2, 3, 10 and 11.  
 Land, rolling.  
 Soil, rocky, 2nd and 3rd rate.  
 No timber.  
 Undergrowth, dense palo verde, mesquite, chaparral and  
 cactus.

N.  $0^{\circ}01'W.$ , on true line, bet. secs. 2 and 3.  
 Over rolling land, thru. dense undergrowth.  
 1.30 Ridge, brs. NE and SW.; descend 65 ft., over NW. slope.  
 4.64 Wash, 70 lks. wide, course NE.  
 18.30 Wash, 20 lks. wide, course NE.  
 21.80 Wash, 20 lks. wide, course NE.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
 the ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked

$\frac{1}{4}$   
 S 3 | S 2  
 1919

66.30 Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.  
 76.14 Wash, 20 lks. wide, course NE.  
 Intersect the 1st Standard Parallel South, 4.19 chs. S.  $89^{\circ}$   
 $59'E.$ , from reestablished standard cor. of secs. 34 and  
 35, hereinbefore described.  
 At point of intersection,  
 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in  
 the ground, for closing cor. of secs. 2 and 3, with brass  
 cap, marked

T5S R15E  
 S35  
 S 3 | S 2  
 To S R15E  
 C.C.  
 1919

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, S. of cor.  
 Land, rolling.  
 Soil, rocky, 3rd and 4th rate.  
 No timber.  
 Undergrowth, dense palo verde, scrub oak, mesquite, cactus,  
 greasewood and catclaw.

The original cor. of secs. 3, 4, 33 and 34, on the S.  
 body, of the Tp. is an iron post, 3 ins. in diam., 12 ins.

## 30 Subdivision lines of Township 6 South, Range 15 East.

Chains.

above ground, firmly set, properly marked on brass cap, and witnessed by a mound of stone, W. of cor. No bearing trees.

Thence,

N.0°01'W., bet. secs. 33 and 34.

Over rolling land, thru. dense undergrowth.

Descend 170 ft., over N. slope.

16.68 Wash, 6.00 chs. wide, course E,

20.00 Road, brs. E. and W.

35.50 Draw, course E.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked

$\frac{1}{4}$   
 S33 | S34  
 1919

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

45.50 Draw, course E.

49.00 Road, brs. E and W.

58.50 Wash, 14.00 chs. wide, course E.

70.30 Draw, course E.

74.50 Wash, 2.00 chs. wide, course E.

79.00 Wash, 4.00 chs. wide, course E.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 27, 28, 33 and 34, with brass cap, marked

T6S | R15E  
 S28 | S27  
 S33 | S34  
 1919

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor. Land, rolling.

Soil, sandy, 1st and 2nd rate.

No timber.

Undergrowth, dense mesquite, catclaw, cactus, yucca, palo verde, chaparral, and greasewood.

40.00 S.89° 57'E., on a random line, bet. secs. 27 and 34.

80.22 Set temp.  $\frac{1}{4}$  sec. cor.

Intersect N. and S. line, 2 lks. S. of the cor. of secs. 26, 27, 34 and 35.

Thence,

N.89°58'W., on a true line, bet. secs. 27 and 34.

Over rolling land, thru. dense undergrowth.

2.60 Along N. bank of wash, course E.

40.11 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked

$\frac{1}{4}$  S 27  
 S 34  
 1919

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.

42.50 Leave wash from N.

50.00 Wash, 2.00 chs. wide, course S.

80.22 The cor. of secs. 27, 28, 33 and 34.

Land, rolling.

Soil, rocky, 2nd rate.

No timber.

Undergrowth, dense mesquite, catclaw, black brush, palo verde, cactus and yucca.


N.0° 01' W., bet. secs. 27 and 28.




SURVEY OF THE SUBDIVISION LINES IN T. 6 S., R. 15 E. 31 27.

Chains

- Over rolling land, through dense undergrowth.
- 2.00 Wash, course NE.
- 7.43 Ridge, bears E. and W.
- 16.00 Wash, 50 lks. wide, course E.
- 26.36 Low ridge, bears E. and W.
- 32.76 Wash, 125 lks. wide, course SE.
- 37.50 Wash, course SE.
- 40.00 Set an iron post,  $\frac{3}{4}$  ft. long, 1 in. diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.




- Raise a mound of stoen, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.
- 49.30 Ridge, bears NW. and SE.
- 51.00 Spur, slopes E.
- 57.80 Wash, 1.00 ch. wide, course E.
- 61.50 Spur, slopes E.
- 64.50 Wash, 50 lks. wide, course SE.
- 71.50 Ridge, bears NW. and SE.
- 78.22 Draw, course NE.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 21, 22, 27 and 28, with brass cap mkd.



Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.  
 Land, rolling.  
 Soil, gravelly; 3rd rate.  
 No timber.  
 Undergrowth, dense cactus, palo verde, and catclaw.

- 40.00 S.  $89^{\circ} 58'$  E., on a random line, bet. secs. 22 and 27. Set temp.  $\frac{1}{4}$  sec. cor.
- 80.38 Intersect N. and S. line, 5 lks. N. of the cor. of secs. 22, 23, 26 and 27.  
 Thence  
 N.  $89^{\circ} 56'$  W., on a true line, bet. secs. 22 and 27.
- 20.00 Over rolling land, through dense undergrowth.
- 30.00 Along low ridge, bears E. and W.
- 32.50 Leave ridge, bears SW. and E.
- 40.19 Draw, course NW.
- Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.




- Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.
- 50.00 Ridge, bears NE. and SW.
- 80.38 The cor. of secs. 21, 22, 27 and 28.  
 Land, rolling.  
 Soil, rocky; 2nd rate.  
 No timber.  
 Undergrowth, dense palo verde, catclaw, mesquite, acacias, chapporal, blackbrush, and yucca.

- N.  $0^{\circ} 01'$  W., bet. secs. 21 and 22.
- Over rolling land, through dense undergrowth.
- 1.00 Short spur, slopes NE.
- 8.70 Wash, 1.00 ch. wide, course E.

SURVEY OF THE SUBDIVISION LINES IN T. 6 S., R. 15 E.

Chains



- 15.55 S. edge of draw, 7.00 chs. wide, course E.
- 16.00 Ridge, bears E. and W.
- 24.60 Wash, 80 lks. wide, course E.
- 34.00 S. edge of draw, 10.00 chs. wide, course E.
- 38.46 Spur, slopes E.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.



1919

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

- 42.25 Draw, course NE.
- 47.00 Spur, slopes SE.
- 51.00 Draw, course E.
- 56.55 Spur, slopes E.
- 65.00 Draw, course E.
- 66.00 Wash, 15 lks. wide course E.
- 75.00 Ridge, bears E. and W.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 14 ins. in the ground, in a mound of stone, for cor. of secs. 15, 16, 21 and 22, with brass cap mkd.



1919

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

Land, rolling.  
Soil, rocky; 2nd and 3rd rate.  
No timber.  
Undergrowth, Achapporal, mesquite, palo verde, cactus and yucca. dense


- 40.00 S.  $89^{\circ} 56'$  E., on a random line, bet. secs. 15 and 22.
- 80.38 Set temp.  $\frac{1}{4}$  sec. cor. Intersect N. and S. line, 9 lks. S. of the cor. of secs. 14, 15, 22 and 23.

Thence

WEST, on a true line, bet. secs. 15 and 22.  
Over rolling land, through dense undergrowth.

- 2;70 Draw, course NE.
- 8.70 Spur, slopes NE.
- 11.40 Wash, 1.00 ch. wide, course NE.
- 22.80 Draw, course SE.
- 30.40 Spur, slopes SE.
- 40.19 Set an iron post, 3 ft. long, 1 in., diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

S15



1919


Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.

- 40.38 Ridge, bears N. and S.
  - 41.10 Ridge, bears NE. and SW.
  - 51.20 Wash, 1.00 ch. wide, course NE.
  - 66.70 Ridge, bears NE. and SW.
  - 80.38 The cor. of secs. 15, 16, 21 and 22.
- Land, rolling.  
Soil, rocky; 3rd rate.  
No timber. dense  
Undergrowth, palo verde, mesquite, greasewood, chapporal, cactus and yucca.

SURVEY OF THE SUBDIVISION LINES IN T. 6 S., R. 15 E.

Chains

- N. 0° 01' W., bet. secs. 15 and 16. . .
- Over rolling land, through dense undergrowth.
- Desc, 80 ft. over N. slope.
- 7.00 Wash, 50 lks. wide, course NE.
- 11.20 Spur, slopes E.
- 18.10 Wash, 40 lks. wide, course E.
- 22.30 Spur, slopes E.
- 27.00 Ridge, bears NE. and SW.
- 32.74 Draw, course NE.
- 39.30 Spur, slopes NE. 5.00 chs.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.




- Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.
- 45.00 Wash, course E. 11.50 chs. wide.
- 66.50 Road, bears E. and W.
- 67.00 Wash, 30 lks. wide, course E.
- 74.35 Wash, 30 lks. wide, course E.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 9, 10, 15 and 16, with brass cap mkd.



Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.  
 Land, rolling.  
 Soil, rocky; 3rd rate.  
 No timber. dense  
 Undergrowth, mesquite, chapporal, palo verde, greasewood and cactus.

- EAST, on a random line, bet. secs. 10 and 15.
- 40.00 Set temp. 1/4 sec. cor.
- 80.32 Intersect N. and S. line, 4 lks. N. of the cor. of secs. 10, 11, 14 and 15.
- Thence
- N. 89° 58' W., on a true line, bet. secs. 10 and 15.
- Over rolling land, through dense undergrowth.
- 7.00 Short spur, slopes N.
- 10.00 E. edge of wash, course NE.
- 30.00 W. edge of same wash, course NE.
- 40.16 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, in a mound of stone, for 1/4 sec. cor., with brass cap mkd.




- Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.
- 40.70 Edge of mesa, bears N. and S.
- 50.90 Road, bears NE. and SW.
- 55.30 Wash, 60 lks. wide, course NE.
- 66.80 Wash, 30 lks. wide, course NE.
- 80.32 The cor. of secs. 9, 10, 15 and 16.
- Land, rolling.
- Soil, rocky; 3rd rate.
- No timber. dense  
 Undergrowth, palo verde, mesquite, greasewood, cactus and chapporal.

30. SURVEY OF THE SUBDIVISION LINES IN T. 6 S., R. 15 E.


Chains

N. 0° 01' W., bet. secs. 9 and 10.  
 Over rolling land, through dense undergrowth,  
 Spur, slopes NE.  
 6.60  
 14.90 Wash, 30 lks. wide, course NE.  
 23.50 Wash, 1.00 ch. wide, course NE.  
 26.50 Wash, 60 lks. wide, course NE.  
 35.00 Spur, slopes NE.  
 38.70 Wash, 10 lks. wide, course NE.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in  
 the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.



1919

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of  
 cor.  
 42.00 Spur, slopes NE.  
 45.50 Wash, 80 lks. wide, course NE.  
 56.00 Spur, slopes NE.  
 60.00 Wash, 30 lks. wide, course NE.  
 71.90 Spur, slopes NE.  
 78.60 Wash, 2.00 chs. wide, course NE.  
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in  
 the ground, for cor. of secs. 3, 4, 9 and 10, with  
 brass cap mkd.




1919

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of  
 cor.  
 Land, rolling.  
 Soil, rocky; 3rd rate.  
 No timber.  
 Undergrowth, dense mesquite, palo verde, chapporal, greasewood,  
 and cactus.

40.00 S. 89° 58' E., on a random line, bet. secs. 3 and 10.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.24 Intersect N. and S. line, 11 lks. N. of the cor. of secs.  
 2, 3, 10 and 11.

Thence  
 N. 89° 54' W., on a true line, bet. secs. 3 and 10.  
 Over rolling land, through dense undergrowth.  
 2.90 Spur, slopes NE. 5.00 chs.  
 9.20 Wash, 30 lks. wide, course NE.  
 14.20 Wash, 60 lks. wide, course NE.  
 25.70 Wash, 120 lks. wide, course NE.  
 31.70 Wash, 40 lks. wide, course NE.  
 39.20 Wash, 20 lks. wide, course NE.  
 40.12 Set an iron post, 3 ft. long, 1 in. diam., 22 ins. in  
 the ground, in a mound of stone, for  $\frac{1}{4}$  sec. cor., with  
 brass cap mkd.




1919


Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of  
 cor.  
 41.20 Low spur, slopes N.  
 48.70 Wash, 1.00 ch. wide, course NE.  
 55.20 Wash, 20 lks. wide, course NE.  
 57.95 Spur, slopes NE.  
 60.00 Wash, 50 lks. wide, course NE.  
 67.00 Wash, 40 lks. wide, course NE.  
 80.24 The cor. of secs. 3, 4, 9 and 10.  
 Land, rolling.  
 Soil, rocky; 3rd rate. No timber.  
 Undergrowth, mesquite, palo verde, greasewood and cactus.

Subdivision lines of Township 6 South, Range 15 East. 35

Chains.  
 N.0°01'W., on true line, bet. secs. 3 and 4.  
 Over rolling land, thru. dense undergrowth.  
 1.10 Spur, slopes E.  
 2.33 Wash, 10 lks. wide, course NE.  
 6.20 Ridge, brs. NE. and SW.; descend 70 ft., over NW. slope.  
 11.07 Wash, 10 lks. wide, course NE.  
 12.90 Spur, slopes NE.  
 33.00 Wash, 1.00 ch. wide, course NE.  
 39.40 Spur, slopes NE.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked




43.30 Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, W. of cor.  
 Wash, 40 lks. wide, course NE.  
 45.40 Spur, slopes NE.  
 66.50 Wash, 1.00 ch. wide, course NE.  
 76.27 Intersect the 1st Standard Parallel South, 4.73 chs. S. 89° 59' E. from the reestablished standard cor. of secs. 33 and 34, hereinbefore described.  
 At point of intersection,  
 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for closing cor. of secs. 3 and 4, with brass cap, marked



Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, S. of cor..  
 Land, rolling.  
 Soil, rocky, 3rd and 4th rate.  
 No timber.  
 Undergrowth, dense greasewood, palo verde, mesquite, cat-claw, oak brush, ocotilla, sahuaro, and white sage,

-----  
 The original cor. of secs. 4, 5, 32 and 33, on S. bdy. of the Tp., is an iron post, 2 ins. in diam., 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by a mound of stone, W. of cor. No bearing trees.

Thence,  
 N.0°02'W., bet. secs. 32 and 33.  
 Over rolling land, thru. dense undergrowth.  
 4.00 Ridge, brs. NW and SE.  
 9.00 Draw, course SE.  
 12.30 Ridge, brs. NW and SE.  
 26.00 Wash, 1.00 ch. wide, course SE.  
 30.00 Spur, slopes SE..  
 31.75 Windmill, brs. E 18.00 chs. dist.  
 38.34 Fence brs. NW. and SE.  
 39.80 Wash, 150 lks. wide, course SE.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked



43.50 Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, W. of cor.  
 Spur. slopes SE.  
 44.15 Road brs. NW. and SE.  
 49.00 Wash, 2.00 chs. wide, course SE.

36 Subdivision lines of Township 6 South, range 15 East.

Chains.

56.80 Wash, 50 lks. wide, course SE.  
 70.00 Ridge, brs. NW. and SE.  
 76.90 Draw, course E.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 28, 29, 32 and 33, with brass cap, marked

T6S	R15E
S29	S28
S32	S33
1919	

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor. Land, rolling.  
 Soil, gravelly, 3rd rate.  
 No timber.  
 Undergrowth, dense cactus, and catclaw.

40.00 S. 89°57' E., on a random line, bet. secs. 28 and 33.  
 Set temp. ¼ sec. cor.  
 79.90 Intersect the cor. of secs. 27, 28, 33 and 34:  
 Thence,  
 N. 89°57' W., on a true line, bet. secs. 28 and 33.  
 Over rolling land, thru. dense undergrowth.  
 39.95 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground, in a mound of stone, for ¼ sec. cor., with brass cap, marked

S 28
¼ — S 33
1919

40.00 Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor. West bank of small ravine, course NE.  
 Ascend 230 ft., over E. slope.  
 61.33 Ridge, brs. N. and S.; descend 135 ft., over W. slope.  
 65.00 Draw, course NE.  
 73.70 Small ravine, course S.  
 79.90 The cor. of secs. 28, 29, 32 and 33.  
 Land, rolling.  
 Soil, rocky, 2nd and 3rd rate.  
 No timber.  
 Undergrowth, dense chaparral, mesquite, palo verde, cactus and yucca,

N. 0°02' W., bet. secs. 28 and 29,  
 Over rolling land, thru. dense undergrowth.  
 Ascend 150 ft., over SE. slope.  
 9.74 Spur, slopes E.; descend 210 ft., over N. slope.  
 19.00 Ravine, course NE.  
 23.50 Draw, course E.  
 31.00 Spur, slopes E.  
 35.00 Ravine, course SE.  
 40.00 Spur, slopes SE.  
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked.

¼
S29   S28
1919

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.  
 46.00 Wash, 10 lks. wide, course E.  
 50.00 Along W. slope.  
 76.00 Descend 65 ft., over NW. slope.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in

SURVEY OF THE SUBDIVISION LINES IN T. 6 S., R. 15 E.

Chains

the ground, for cor. of secs. 20, 21, 28 and 29, with brass cap mkd.

T6S R15E	
S20	S21
-----	
S29	S28
1919	

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling.

Soil, rocky; 2nd and 3rd rate.

No timber.

Undergrowth, dense chaparral, mesquite, palo verde, cactus and yucca.

40.00 S. 89° 57' E., on a random line, bet. secs. 21 and 28. Set temp. 1/4 sec. cor.

79.80 Intersect the corner of sections 21, 22, 27 and 28.

Thence

N. 89° 57' W., on a true line, bet. secs. 21 and 28.

Over rolling land, through dense undergrowth.

1.67 Spur, slopes NE.

39.90 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.

S21	
1/4	S28
-----	
1919	

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

41.50 Wash, 2.00 chs. wide, course SE.

49.00 Spur, slopes NE.

61.70 Spur, slopes SE.

72.20 Spur, slopes NE.

79.80 The cor. of secs. 20, 21, 28 and 29.

Land, rolling.

Soil, rocky; 3rd rate.

No timber.

Undergrowth, dense cactus and catclaw.

N. 0° 02' W., bet. secs. 20 and 21.

Over rolling mountainous land, through dense undergrowth.

2.60 Wash, course E.

10.86 Spur, slopes SE.

20.67 Top of hill.

38.50 Wash, course NE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.

1/4	
S20	S21
-----	
1919	

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

41.30 Draw, course SE.

44.68 Ridge, bears E. and W.

63.90 Road, bears NE. and SW.

65.00 Wash, 6.00 chs. wide, course NE.

71.35 Ridge, bears NE. and SW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 16, 17, 20 and 21, with brass cap mkd.

T6S R15E	
S17	S16
-----	
S20	S21
1919	

38. SURVEY OF THE SUBDIVISION LINES IN T. 6 S., R. 15 E.

Chains

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.  
 Land, rolling mountainous.  
 Soil, rocky; 3rd rate.  
 No timber.  
 Undergrowth, dense catclaw and cactus.

40.00 S.  $89^{\circ} 57'$  E., on a random line, bet. secs. 16 and 21.  
 79.96 Set temp.  $\frac{1}{4}$  sec. cor.  
 Intersect N. and S. line, 19 lks. N. of the cor. of secs. 15, 16, 21 and 22.

Thence  
 N.  $89^{\circ} 49'$  W., on a true line, bet. secs. 16 and 21.  
 Over rolling land, through dense undergrowth.  
 2.00 Draw, course N.  
 10:00 Draw, course NE.  
 12.80 Wash, 20 lks. wide, course NE.  
 37:70 Ridge, bears NE. and SW.  
 39.98 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

S16  
 $\frac{1}{4}$  S21  
 1919

47.43 Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.  
 55.60 E. edge. of wash, 5.00 chs. wide, course NE.  
 69.25 Road, bears NE. and SW.  
 79.96 Small draw, course NE.  
 The cor. of secs. 16; 17, 20 and 21.  
 Land, rolling.  
 Soil, rocky; 2nd and 3rd rate.  
 No timber.  
 Undergrowth, dense palo verde, mesquite, cactus, chaparral, black brush and yucca.

5.20 N.  $0^{\circ} 02'$  W., bet. secs. 16 and 17.  
 16.60 Over rolling land, through dense undergrowth.  
 23.50 Wash, 2.00 chs. wide, course NE.  
 34.00 Low ridge, bears NE. and SW.  
 37.00 Wash, course NE.  
 39.60 Wash, course NE.  
 40.00 Spur, slopes E.  
 Wash, 2.00 chs. wide, course E.  
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$   
 S17 | S16  
 1919

45.50 Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.  
 50.00 Low ridge, bears SE. and W.  
 52.30 Draw, course NE.  
 70.40 Spur, slopes NE.  
 78.35 Low spur, slopes NE.  
 80.00 Low ridge, bears NW. and SE.  
 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 8; 9, 16 and 17, with brass cap mkd.

T6S R15E  
 S 8 | S 9  
 S17 | S16  
 1919

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.




SURVEY OF THE SUBDIVISION LINES IN T. 6 S., R. 15 E.

Chains

Land, rolling.  
Soil, gravelly; 3rd rate.  
No timber.  
Undergrowth, dense cactus, catclaw, palo verde and mesquite.

S. 89° 49' E., on a random line, bet. secs. 9 and 16.  
40.00 Set temp. 1/4 sec. cor.  
80.08 Intersect N. and S. line, 18 lks. S. of the cor. of secs. 9, 10, 15 and 16.


Thence  
N. 89° 57' W., on a true line, bet. secs. 9 and 16.  
Over rolling land, through dense undergrowth.  
3.50 Spur, slopes NE.  
8.00 Wash, 20 lks. wide, course NE.  
12.50 Low spur, slopes NE.  
26.00 Wash, 40 lks. wide, course NE.  
39.00 Spur, slopes NE.  
40.04 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.



Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.  
43.30 Wash, 1:00 ch. wide, course NE.  
80.08 The cor. of secs. 8, 9, 16 and 17.


Land, rolling.  
Soil, rocky; 3rd rate.  
No timber.  
Undergrowth, dense mesquite, palo verde, chaparral, greasewood and cactus.

N. 0° 02' W., bet. secs. 8 and 9.  
Over rolling land, through dense undergrowth.  
11.00 Wash, 2.00 chs. wide, course NE.  
22.00 Ridge, bears NE. and SW.  
25.20 Wash, 1.00 ch. wide, course NE.  
29.90 Ridge, bears NE. and SW.  
35.87 Spur, slopes NE.  
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.



Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

41.50 Wash, 50 lks. wide, course NE.  
48.00 Wash, 75 lks. wide, course NE.  
52.00 Ridge, bears NE. and W.  
58.00 Spur, slopes NE.  
59.80 Wash, course E.  
64.00 Ridge, bears NE. and SW.  
69.34 Wash, 20 lks. wide, course NE.  
70.61 Spur, slopes NE.  
73.00 Wash, 50 lks. wide, course NE.  
77.70 Ridge, bears NE. and SW.  
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 4, 5, 8 and 9, with brass cap mkd.



Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

40.

SURVEY OF THE SUBDIVISION LINES IN T. 6 S., R. 15 E.

Chains

Land, rolling.  
Soil, rocky; 3rd rate.  
No timber. dense  
Undergrowth, ~~cactus~~, catclaw, palo verde and mesquite.

40.00 S. 89° 57' E., on a random line, bet. secs. 4 and 9.  
Set temp.  $\frac{1}{4}$  sec. cor.  
80.16 Intersect N. and S. line, at the cor. of secs. 3, 4, 9,  
and 10.  
Thence  
N. 89° 57' W., on a true line, bet. secs. 4 and 9.  
Over rolling land, through dense undergrowth.  
8.00 Draw, course NE.  
10.00 Spur, slopes NE.  
15.10 Draw, course NE.  
18.50 Spur, slopes NE.  
27.50 Wash, course NE.  
35.00 Spur, slopes NE.  
37.50 Draw, course N.  
40.08 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

S 4  
 $\frac{1}{4}$  S 9  
1919

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of  
cor.  
45.50 Draw, course NE.  
56.00 Wash, 50 lks. wide, course NE.  
62.50 Wash, 75 lks. wide, course NE.  
72.00 Spur, slopes NE.  
77.80 Draw, course NE.  
80.16 The cor. of secs. 4, 5, 8 and 9.

Land, rolling.  
Soil, rocky; 3rd rate.  
No timber. dense  
Undergrowth, ~~yucca~~, catclaw and cactus.

N. 0° 02' W., on true line, bet. secs. 4 and 5.  
Over rolling land, through dense undergrowth.  
5.00 Ridge, bears NE. and SW. Desc. 80 ft. over NW. slope.  
10.00 Wash, 50 lks. wide, course NE. Asc. 60 ft. over S. slope.  
15.30 Ridge, bears NE. and SW. Desc. 100 ft. over NW. slope.  
22.37 Wash, 30 lks. wide, course NE. Asc. 30 ft. over SE. slope.  
27.50 Spur, slopes NE. Desc. 30 ft. over N. slope.  
29.03 Enter wash, course NE.  
37.30 Wash, 2.00 chs. wide, course NE.  
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.


$\frac{1}{4}$   
S 5 | S 4  
1919

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of  
cor.  
42.00 Spur, slopes NE.  
50.80 Wash, 30 lks. wide, course NE.  
60.80 Spur, slopes NE.  
70.70 Wash, 10 lks. wide, course NE.  
72.50 Low spur, slopes NE.  
74;22 Road, bears NE. and SW.  
75.27 Intersect the 1st Standard Parallel South, 3.68 chs., N. 89°  
30' E. from reestablished Standard Cor. of secs. 32 and 33,  
hereinbefore described,  
At point of intersection, set an iron post, 3 ft. long,  
2 ins. diam., 24 ins. in the ground, for closing cor.

Subdivision lines of Township 6 South, Range 15 East. 41

Chains.

of secs. 4 and 5, with brass cap, marked



Raise a mound of stone, 2 ft. base, 1½ ft. high, S. of cor. Land, rolling,  
 Soil, rocky, 3rd and 4th rate.  
 No timber.  
 Undergrowth, dense cholla, palo verde, greasewood, cactus, catclaw, buckthorn, white sage, and oakbrush.

The original cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp. is an iron post, 2 ins. in diam., 12 ins. above ground, firmly set, properly marked and witnessed by one bearing tree,

A mesquite, 8 ins. in diam., S. 22½° W., 165 lks. dist., marked "T7S R15E S6BT."  
 and a mound of stone W. of cor.

Thence,  
 N. 0° 02' W., bet. secs. 31 and 32.  
 Over rolling land, thru. scattering undergrowth.  
 Low ridge, brs. E. and W.


4.00  
40.00

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked



79.50  
80.00

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor. Wash, 1.00 chs. wide, course SE.  
 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 29, 30, 31 and 32, with brass cap, marked




Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor. Land, rolling.  
 Soil, rocky, 3rd rate.  
 No timber.  
 Undergrowth, scattering mesquite, and sage.

40.00  
79.96

S. 89° 57' E., on a random line, bet. secs. 29 and 32.  
 Set temp. ¼ sec. cor.  
 Intersect N. and S. line, 7 lks. S. of the cor. of secs. 28, 29, 32 and 33.

7.00  
20.20  
39.98

Thence,  
 West, on a true line, bet. secs. 29 and 32.  
 Over mountainous land, thru. dense undergrowth.  
 Draw, course SE.  
 Wash, course W.  
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked



Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.




SURVEY OF THE SUBDIVISION LINES IN T. 6 S., R. 15 E.

Chains


Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.  
 Asc. 195 ft. over SE. slope.  
 57.70 Ridge, bears NE. and SW.  
 64.00 Draw, course NE.  
 67.40 Spur, slopes N.  
 76.00 Wash, 5 lks. wide, course NE.  
 79.98 The cor. of secs. 19, 20, 29 and 30.  
 Land, rolling.  
 Soil, rocky; 2nd and 3rd rate.  
 No timber.  
 Undergrowth, scattering, chaparral, mesquite, palo verde, cactus and yucca.

WEST, on a random line, bet. secs. 19 and 30.  
 11.44 Intersect the W. bdy. of the Tp., at the cor. of secs. 19, 24, 25 and 30, described in Book "R".  
 Thence  
 EAST, on a true line, bet. secs. 19 and 30.  
 Over rolling land, through scattering undergrowth.  
 8.20 Ravine, course N.  
 11.44 The cor. of secs. 19, 20, 29 and 30.  
 Land, rolling.  
 Soil, rocky; 3rd rate.  
 No timber.  
 Undergrowth, scattering greasewood and cactus.

N. 0° 02' W., bet. secs. 19 and 20.  
 Over rolling land, through scattering undergrowth.  
 19.10 Desc. 100 ft. over N. slope.  
 33.00 Wash, 1.00 ch. wide, course NE.  
 Asc. 150 ft. over SE. slope.  
 39.50 Spur, slopes E.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap mkd.



Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.  
 45.00 Wash, 1.00 ch. wide, course NE. Road brs. NE. and SW.  
 46.00 Spur, slopes SE.  
 58.00 Ridge, bears NW. and SE.  
 64.00 Spur, slopes NE.  
 69.00 Draw, course E.  
 73.00 Ridge, bears E. and W.  
 79.17 Wash, course NE. Road, bears NE. and SW.  
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 17, 18, 19 and 20, with brass cap mkd.



Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.  
 Land, rolling.  
 Soil, rocky; 3rd rate.  
 No timber.  
 Undergrowth, scattering greasewood and cactus.

EAST, on a random line, bet. secs. 17 and 20.  
 40.00 Set temp. ¼ sec. cor.  
 80.04 Intersect N. and S. line, 10 lks. N. of the cor. of secs.

40.

SURVEY OF THE SUBDIVISION LINES IN T. 6 S., R. 15 E.

Chains

16, 17, 20 and 21.  
 Thence  
 N. 89° 56' W., on a true line, bet. secs. 17 and 20.  
 Over mountainous land, through scattering undergrowth.  
 4.20 Wash, 50 lks. wide, course NE. Asc. 35 ft. over E. slope.  
 7.50 Spur, slopes NE.  
 12.10 Wash, 20 lks. wide, course NE. Asc. 120 ft. over E. slope.  
 22.40 Spur, slopes NE. Desc. 25 ft. over W. slope.  
 24.00 Draw, course N. Asc. 35 ft. over E. slope.  
 26.44 Spur, slopes NE. Desc. 40 ft. over W. slope.  
 31.00 Wash, 1.00 ch. wide, course NE.  
 Asc. 310 ft. over E. slope.  
 39.33 Draw, course S. Continue ascent.  
 40.02 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in  
 the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

S17

$\frac{1}{4}$  S20

1919

Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, N. of  
 cor.  
 46.00 Draw, course SE.  
 47.81 Spur, slopes S. Continue ascent.  
 54.50 Ridge, bears NE. and SW.  
 60.00 Spur, slopes NW.  
 63.30 Spur, slopes N.  
 79.10 Wash, course NE. Road, bears NE. and SW.  
 80.04 The cor. of secs. 17, 18, 19 and 20.  
 Land, rolling mountainous.  
 Soil, rocky; 3rd rate.  
 No timber.  
 Undergrowth, scattering cacti, cactus and yucca.

WEST, on a random line, bet. secs. 18 and 19:  
 11.40 Intersect the W. bdy. of the Tp.; at the cor. of secs.  
 13, 18, 19 and 24, described in Book "R."  
 Thence  
 EAST, on a true line, bet. secs. 18 and 19.  
 Over mountainous land, through scattering undergrowth.  
 5.00 Wash, course E.  
 11.40 The cor. of secs. 17, 18, 19 and 20.  
 Land, mountainous.  
 Soil, rocky; and sandy; 3rd rate.  
 No timber.  
 Undergrowth, scattering mesquite and sage.

N. 0° 02' W., bet. secs. 17 and 18.  
 Over mountainous land, through scattering undergrowth.  
 5.50 Spur, slopes SE.  
 10.60 Draw, course SE.  
 21.00 Ridge, bears E. and W.  
 32.50 Draw, course E.  
 37.00 Draw, course SE.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in  
 the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$

S18 | S17


1919

Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, W. of  
 cor.  
 41.50 Spur, slopes NE.  
 47.00 Spur, slopes E.  
 58.00 Wash, 150 lks. wide, course NE.  
 75.00 Draw, course SE.  
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in

SURVEY OF THE SUBDIVISION LINES IN T. 6 S., R. 15 E.

Chains

the ground, for cor. of secs. 7, 8, 17 and 18, with brass cap mkd.




Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling mountainousl.  
Soil, rocky; 3rd rate.  
No timber.  
Undergrowth, scattering catclaw and cactus.

40.00 S. 89° 56' E., on a random line, bet. secs. 8 and 17.  
Set temp. 1/4 sec. cor.  
79.92 Intersect N. and S. line, 21 lks. N. of the cor. of secs. 8, 9, 16 and 17.

Thence  
N. 89° 47' W., on a true line, bet. secs. 8 and 17.  
Over mountainous land, through scattering undergrowth.  
5.00 Spur, slopes N.  
10.00 Draw, course N.  
13.62 Spur, slopes N.  
31.00 Wash, 1.00 ch. wide, course NE.  
38.60 Spur, slopes N.  
39.96 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.



Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

44.00 Wash, 30 lks. wide, course NE.  
47.50 Asc. 215 ft. over E. slope.  
54.40 Ridge, bears N. and S.  
69.00 Wash, 5.00 chs. wide, course NE.  
76.80 Draw, course SE.  
79.92 The cor. of secs. 7, 8, 17 and 18.

Land, mountainous.  
Soil, rocky; 3rd rate.  
No timber.  
Undergrowth, scattering cactus and catclaw.

11.36 WEST, on a random line, bet. secs. 7 and 18.  
Intersect the W. bdy. of the Tp., at the cor. of secs. 7, 12, 13 and 18. described in Book "R."


Thence  
EAST, on a true line, bet. secs. 7 and 18.  
Over mountainous land, through scattering undergrowth.  
11.36 The cor. of secs. 7, 8, 17 and 18.

Land, mountainous.  
Soil, rocky; 3rd rate.  
No timber.  
Undergrowth, scattering greasewood, sage and cactus.


N. 0° 02' W., bet. secs. 7 and 8.  
Over mountainous land, through scattering undergrowth.  
1.00 Spur, slopes SE.  
7.60 Spur, slopes NE.  
12.70 Wash, 1.00 ch. wide, course E.  
18.50 Ridge, bears NE. and NW.  
31.00 Wash, 1.00 ch. wide, course SE.  
38.00 Draw, course SE.  
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.

SURVEY OF THE SUBDIVISION LINES IN T. 6 S., R. 15 E.

Chains




- 45.50 Ridge, bears NW. and SE.
- 50.00 Wash, 5 lks. wide, course E. Asc. 50 ft. over S. slope.
- 55.00 Top of small peak.
- 68.00 Wash, 10 lks. wide, course NE. Asc. 25 ft. over S. slope.
- 72.00 Spur, slopes E.
- 76.40 Wash, 15 lks. wide, course E.
- Asc. 50 ft. over S. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 5, 6, 7. and 8, with brass cap mkd.



Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.  
 Land, mountainous.  
 Soil, rocky; 4th rate.  
 No timber.  
 Undergrowth, scattering greasewood, palo verde, and cactus.

- 40.00 S. 89° 47' E., on a random line, bet. secs. 5 and 8.
- 79.90 Set temp. ¼ sec. cor.
- Intersect the W. bdy. of the Tp., at the cor. of secs. 4, 5, 8 and 9.
- Thence
- N. 89° 47' W., on a true line, bet. secs. 5 and 8.
- Over mountainous land, through scattering undergrowth.
- 3.50 Ridge, bears NE. and SW.
- 10.00 Head of wash, course NE.
- 15.00 Spur, slopes NE.
- 16.00 Wash, 5.00 chs. wide, course NE.
- 39.60 Wash, 10 lks. wide, course NE.
- 39.95 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap mkd.



- 79.90 Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
- The cor. of secs. 5, 6, 7 and 8.
- Land, mountainous.
- Soil, rocky; 3rd rate.
- No timber.
- Undergrowth, scattering cactus and catclaw.

- 11.32 WEST, on a random line, bet. secs. 6 and 7.
- Intersect the W. bdy. of the Tp., at the cor. of secs. 1, 6, 7 and 12. described in Book "R."
- Thence
- EAST, on a true line, bet. secs. 6 and 7.
- Over mountainous land, through scattering undergrowth.
- 4.00 Ravine, course SE.
- 11.32 The cor. of secs. 5, 6, 7 and 8.
- Land, mountainous.
- Soil, rocky; 4th rate.
- No timber.
- Undergrowth, scattering sage, palo verde, and cactus.




Subdivision lines of Township 6 South, Range 15 East. 47

Chains.

N.0°02'W., on true line, bet. secs. 5 and 6.  
 Over mountainous land, thru scattering timber and dense undergrowth.  
 4.00 Top of knoll, 3 chs. wide; descend 160 ft., over NE. slope.  
 14.20 Dry wash, course E.  
 26.00 Road brs. NE. and SW.  
 37.00 Descend 80 ft., over N. slope.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked



44.00 Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor. Romero wash, course NE.; road brs. NE. and SW.  
 47.00 Leave wash, course NE.  
 57.00 Along E. side of hill.  
 69.05 Gulch, 30 lks. wide, 4 ft. deep, course NE.  
 74.43 Intersect the 1st Standard Parallel South, 4.33 chs. N.  $89^{\circ}22'$  E. from the reestablished standard cor. of secs. 32 and 33, hereinbefore described.  
 At point of intersection, set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground, in a mound of stone, for closing cor. of secs. 5 and 6, with brass cap, marked



Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, S. of cor. Land, mountainous.  
 Soil, rocky, 4th rate.  
 Timber, scattering cedar and mesquite.  
 Undergrowth, dense catclaw, cactus, palo verde, ocotilla, mesquite, soto and buckthorn.

The continued satisfactory adjustment of the solar apparatus during the survey of this township is indicated from field tests, as described in Book "P." page .

GENERAL DESCRIPTION.

SURFACE: Mountainous in the northwest corner, and between secs. 29 and 32; balance, rolling.  
SOIL: Sandy, 1st and 2nd rate between secs. 33 and 34; sandy and adobe, 2nd and 3rd rate between secs. 23 and 26; balance rocky and gravelly, 2nd to 4th rate.  
UNDERGROWTH: Cactus, soto, cholla, sahuaro, ocotilla, catclaw, mesquite, oaks, palo verde, yucca, chaparral, sage, white sage, greasewood, buckthorn and black brush, scattering on the E. bdy., and in the W. portion; balance, dense.  
TIMBER: Scattering mesquite, ironwood and cedar east of secs. 13, 24, and 25, north of sec. 4, and between secs. 5 and 6.  
EVIDENCE OF MINERAL: Antelope Mine in sec. 19.  
WATERING PLACES: Windmill in sec. 33.  
SETTLEMENT: Houses in sec. 19.  
INDUSTRY: The township can be used for grazing purposes.



BOOK 3445

CERTIFICATE OF UNITED STATES TRANSITMAN

102

Dupree R. Averill, U. S. Transitman, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 81, Arizona bearing date of the 6th day of February, 1918, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the Subdivision lines of Township 6 South, Range 15 East

of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes *and by diagram on page 1 hereof* as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 81, Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Date February 28, 1921 --  
 Place Siam, California --

*Dupree R. Averill*  
 U. S. Transitman

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

\_\_\_\_\_, 191

The foregoing field notes of the survey of \_\_\_\_\_

---

executed by \_\_\_\_\_

under his special instructions dated \_\_\_\_\_, 191 , having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

\_\_\_\_\_  
 U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above-described surveys in \_\_\_\_\_, has been correctly copied from the original notes on file in this office.

\_\_\_\_\_  
 U. S. Surveyor General.



FR 21.1921

CERTIFICATE OF UNITED STATES CADASTRAL ENGINEER

BOOK 3445

I, Herbert N. Raymond, U.S. Cadastral Engineer hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General for Group 81, Arizona bearing date of the 6th day of February, 1918, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the Subdivision lines of Township 6 South, Range 15 East

of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in and by diagram on page 1 hereof the foregoing field notes, as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 81, Arizona

and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey Date February 17, 1921 Place Olympia Wash. Herbert N. Raymond U. S. Cadastral Engineer

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

191

The foregoing field notes of the survey of

executed by under his special instructions dated 191, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above-described surveys in, has been correctly copied from the original notes on file in this office.

U. S. Surveyor General.



54  
BOOK 3445

## CERTIFICATE OF UNITED STATES CADASTRAL ENGINEER

I, William H. Thorn, U. S. Cadastral Engineer, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 81, Arizona bearing date of the 6th day of February, 1921, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, <sup>re-</sup> surveyed all those parts or portions of the 1st Standard Parallel South through Range 15 East, and the West boundary of Township 6 South, Range 16 East, and surveyed all those parts or portions of the Subdivision lines of

Township 6 South, Range 15 East

of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in and by diagram on page 1 hereof the foregoing field notes, as having been executed by me, and under my direction; and that all the corners of resurvey and said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 81, Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such resurvey and survey.

Date May 16 1921

Place Blifton Arizona

*William H. Thorn*  
U. S. Cadastral Engineer

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix, Arizona. May 23, 1921

The foregoing field notes of the resurvey of the 1st Standard Parallel South through 15 East, and the West boundary of Township 6 South, Range 16 East, and of the survey of the Subdivision lines of Township 6 South, Range 15 East,

of the Gila and Salt River Base and Meridian,

in the State of Arizona

executed by William H. Thorn, and Herbert N. Raymond, U. S. Cadastral Engineers, and Dupree R. Averill, U. S. Transitman

under the special instructions dated Feb. 6, 1918, for Group 81, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

*Frank C. Smith*  
U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above described surveys in \_\_\_\_\_, has been correctly copied from the original notes on file in this office.