

FIELD NOTES

OF THE SURVEY OF ~~XXXX~~

part of the North boundary,

and part of the Subdivision lines of

Township 30 North, Range 6 West,

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

EXECUTED BY

Dupree R. Averill, U. S. Surveyor,

and

James C. O'Brien, U. S. Transitman,

In the capacity of U. S. Surveyors, under Special Instructions dated February 24, 1920, issued by the United States Surveyor General to govern surveys included in Group No. 105, Arizona, which were approved by the Commissioner of the General Land Office, March 8, 1920, and Assignment Instructions dated March 27, 1920 April 15, 1920

Survey commenced May 23, 1920

Survey completed June 7, 1920

3506


3506

(1A)

3506


BOOK 3506

INDEX DIAGRAM.

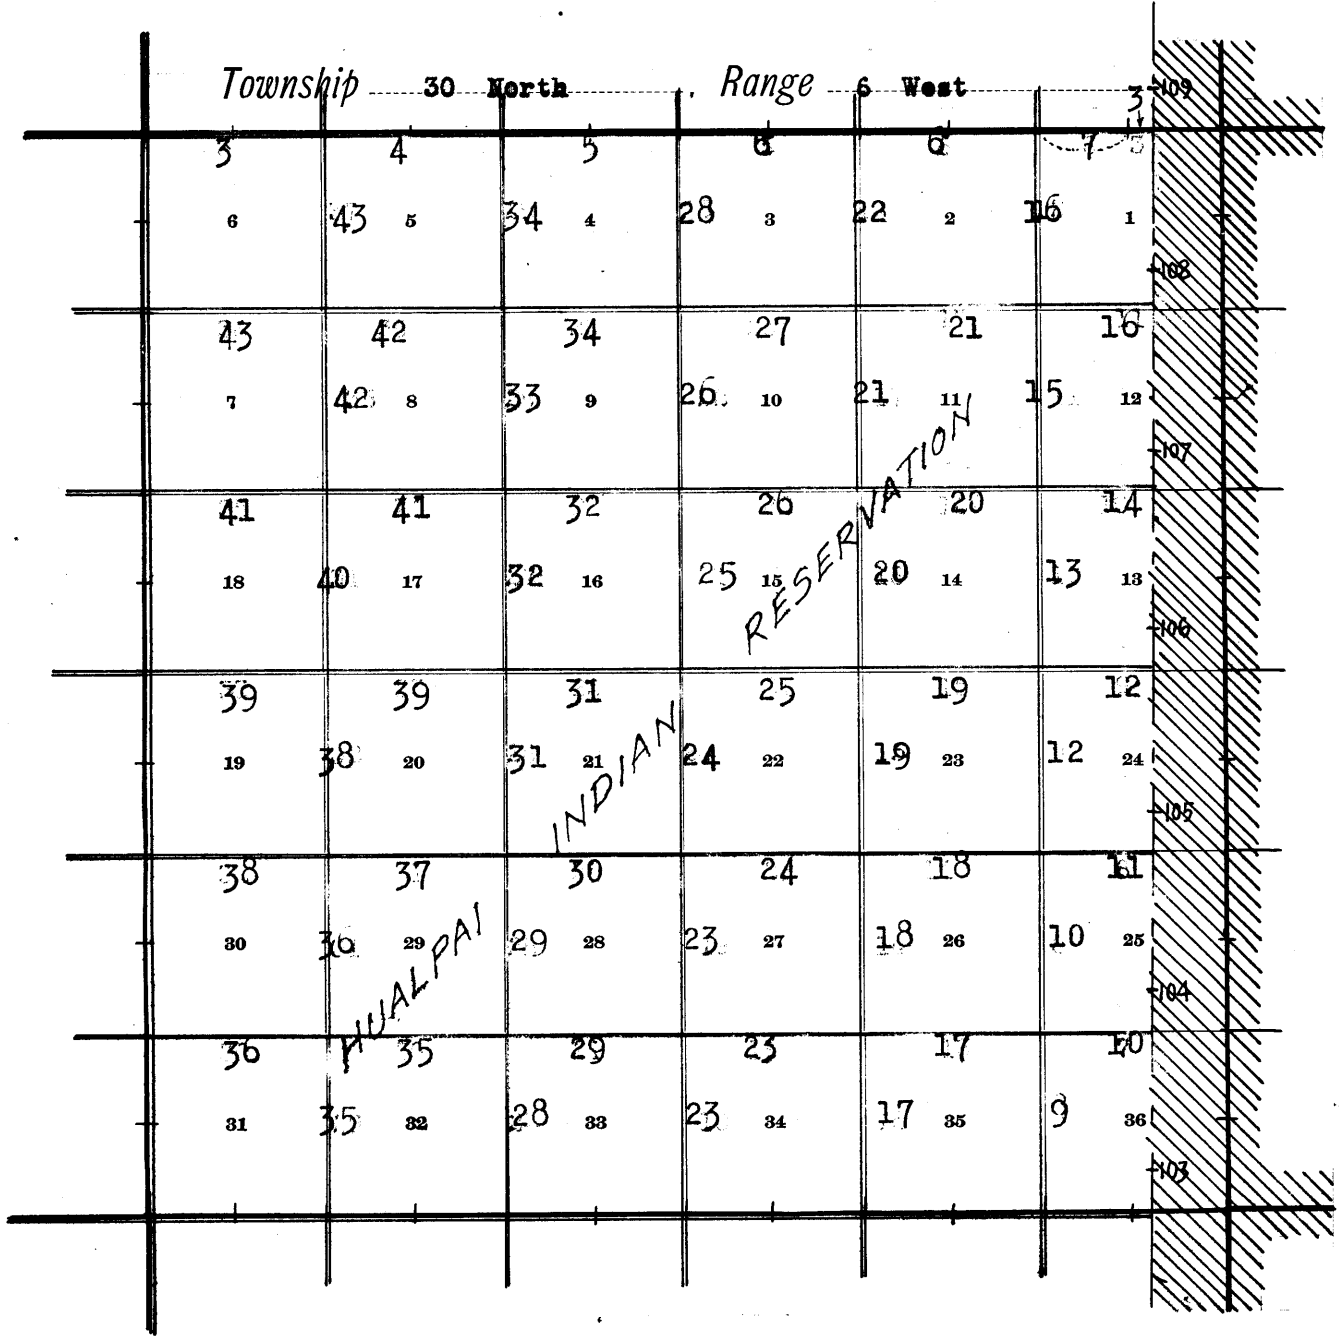

==== Lines surveyed under this Group.

----- Accepted surveys.

 Areas surveyed as per accepted plats on file.

3506

Book "D"

DATE DIAGRAM.

TOWNSHIP 30 NORTH, RANGE 6 WEST.

See book "C" for dates of survey of this line

6-5-20 6	6-5-20 6-7-20 5	6-5-20 6-5-20 4	6-4-20 6-5-20 3	6-4-20 6-7-20 2	6-4-20 6-4-20 1
6-7-20 7	6-5-20 6-2-20 8	6-1-20 6-1-20 9	6-7-20 6-1-20 10	6-4-20 6-7-20 11	6-4-20 6-4-20 12
6-2-20 18	6-2-20 6-1-20 17	6-1-20 6-1-20 16	5-31-20 5-31-20 15	5-31-20 5-31-20 14	5-31-20 5-31-20 13
5-31-20 19	6-1-20 5-31-20 20	6-1-20 6-1-20 21	5-31-20 5-31-20 22	5-29-20 5-29-20 23	5-29-20 5-29-20 24
5-29-20 30	5-29-20 5-29-20 29	6-1-20 5-31-20 28	5-29-20 5-31-20 27	5-29-20 5-29-20 26	5-29-20 5-29-20 25
5-28-20 31	5-28-20 5-28-20 32	5-23-20 5-28-20 33	5-23-20 5-24-20 34	5-23-20 5-29-20 35	5-23-20 5-23-20 36

E. line of the boy of Hualpai Indian Res.

See book "A" for dates of survey of this line

Red lines on above diagram indicate surveys executed by Dupree R. Averill, U.S. Surveyor, on dates shown thereon.

Blue lines on above diagram indicate surveys executed by James C. O'Brien, U.S. Transitman, on dates shown thereon.

Surveys hereinafter described, executed on dates shown on diagram on page 1 hereof, by Dupree R. Averill, U.S. Surveyor, and James C. O'Brien, U.S. Transitman, using respectively, Buff solar transit No. 9223, and Young and Sons mountain transit No. 8541. Each instrument is equipped with full vertical circle and the Smith solar attachment; unless otherwise specified, all azimuth determinations are accomplished with the solar attachments.

May 22, 1920: We examine the adjustment of each instrument and correct all errors; then, to test the solar apparatus by comparing its indications from observations made during a.m. and p.m. hours with a meridian established by Polaris observation, proceed with each instrument as follows:

At camp near the center of sec. 33, T. 30 N., R. 6 W., Gila and Salt River Base and Meridian, Arizona, in latitude $35^{\circ} 56\frac{1}{2}'$ N.; and longitude, $112^{\circ} 56'$ W., at 9h. 30m. p.m., l.m.t., observe Polaris at lower culmination, making four observations, two each with the telescope in direct and reversed positions, and mark the mean point in the meridian thus determined, on a peg driven firmly in the ground, 10 chs. N.

May 23, 1920.

At 9h. 00m. a.m., l.m.t., set off $35^{\circ} 56\frac{1}{2}'$ N. on the lat. arc; $20^{\circ} 37'$ N. on the decl. arc, and determine a meridian with the solar, which agrees with the true meridian.

At app. noon, with the lat. arc unchanged, observe the sun on the meridian; the resulting reading of the decl. arc is $20^{\circ} 38\frac{1}{2}'$ N., which agrees with the computed declination of the sun.

At 3h. 00m. p.m.; l.m.t., with the lat. arc unchanged, set off $20^{\circ} 40\frac{1}{2}'$ N. on the decl. arc; and determine a meridian with the solar, which agrees with the true meridian.

As all the solar observations made with both instruments during the usual hours of the solar work come within $1' 30''$ of the true meridian, we conclude that the adjustments of the instruments are satisfactory.


Unless otherwise specified, all measurements are made with Lufkin steel tapes, 5 chs. in length, compared with a Chesterman standard steel tape, and found correct. The measurements are made on the slope, the vertical angle determined, and the slope measurements properly reduced to the true horizontal distances.

Survey of part (completion) of North bdy. of T. 30 N., R. 6 W. 3

Chains.

The portion of the North bdy. of T. 30 N., R. 6 W., situated outside the Hualpai Indian Reservation was surveyed March 10, 1917 by William H. Thorn, U.S.S. who surveyed said line west, 34.68 chs. from cor. of Ts. 30 and 31 N., Rs. 5 and 6 W. to intersection with the boundary of the Reservation, and established closing cor. for those portions of Ts. 30 and 31 N., R. 6 W., situated outside the Reservation.


This closing cor. is an iron post, 3 ins. in diam., firmly set in ground and in mound of stone, properly marked on brass cap, and witnessed by 3 pits, one each N., S. and E. of post, and one bearing tree, a cedar, N. 9 1/2° E. 302 lks. dist., properly marked.
Change the marking on the brass cap to read



This closing cor. now refers to areas on both sides of the Reservation boundary.

Thence, West, on true line, completing survey of that portion of the E. 1/4 of line, bet. secs. 1 and 36, which lies inside the Hualpai Indian Reservation.

5.32 Over gently rolling land, thru. scattering timber and undergrowth. Ascend very gradually over NE. slope. (40.00 chs. W. from Tp. cor.). Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in the ground, to bed rock, supported in a mound of stone, for 1/4 sec. cor., marked on brass cap,



from which,
A pine, 8 ins. in diam., brs. S. 17 1/2° W., 132 lks. dist., mkd. 1/4 S 1 BT.
A pine, 8 ins. in diam., brs. N. 32 1/2° W., 220 lks. dist., mkd. 1/4 S 36 BT.

Land, gently rolling.
Soil, gravelly clay, 2nd rate.
Timber, scattering cedar and pine.
Undergrowth, scattering scrub cedar, sage brush and algerita. Fair grass.

From 1/4 sec. cor. of secs. 1 and 36, described above, N. 89° 54' W. (parallel to S. bdy. of Tp.) on a random line, setting temp. 1/4 sec. and sec. cors., alternately at intervals of 40.00 chs., until at 439.04 chs. (479.04 chs. W. from Tp. cor.) fall 43 lks. S. of the cor. of Ts. 30 and 31 N., Rs. 6 and 7 W., described in Book "C." True course of Tp. line back to 1/4 sec. cor. of secs. 31 and 36 is therefore S. 89° 51' E.

5.56 From cor. of Ts. 30 and 31 N., Rs. 6 and 7 W., S. 89° 51' E., on a true line, bet. secs. 6 and 31.
16.50 Over rolling, broken land, thru. scattering timber and undergrowth.
Ascend 30 ft., over NW. slope.
Spur, slopes N. from SW. Desc. 80 ft., over E. slope.
25.50 Center of draw, 5 chs. wide, course N. Asc. 125 ft., over W. slope.
Top of ascent, brs. N. and S.. Thence over broken N. slope, with slight change in elevation.
39.64 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the

4 Part (completion) of North bdy. of T. 30 N., R. 6 W.

Chains.

ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec.cor., marked on brass cap,

$\frac{1}{4}$ S 31
S 6
1920

from which,

A pine, 12 ins. in diam., brs. N. $23\frac{1}{4}^\circ$ E., 100 lks.

dist., mkd. $\frac{1}{4}$ S 31 BT.

A pine, 8 ins. in diam., brs. S. $20\frac{1}{4}^\circ$ E., 80 lks.

dist., mkd. $\frac{1}{4}$ S 6 BT.

Continue over rolling and broken land, thru. scattering timber and undergrowth, along N. slope, descending slightly, to

44.50 Descend 180 ft., over SE. slope.

50.16 Drain, course NE. Leave scattering, and enter dense timber. Asc. 85 ft., over NW. slope.

64.50 Descend 75 ft., over NE. slope, to

75.00 S. edge of draw, brs. E and N. 70° W. Desc. gradually in draw, course S. 70° E. Leave dense, and enter scattering timber.

77.36 Mouth of short draw from S. Continue gradual descent along S. edge of draw.

79.04 Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bed rock, supported in a mound of stone for cor. of secs. 5, 6, 31 and 32, marked on brass cap,

T31N | R 6W
S31 | S32
S 0 | S 5
T30N
1920

from which,

A pine, 18 ins. in diam., brs. N. $31\frac{1}{4}^\circ$ E., 372 lks.

dist., mkd. T31N Row S32 BT.

A pine, 9 ins. in diam., brs. S. $40\frac{1}{4}^\circ$ E., 110 lks.

dist., mkd. T30N Row S5 BT.

A pine, 6 ins. in diam., brs. S. $8\frac{1}{4}^\circ$ W., 62 lks.

dist., mkd. T30N Row S6 BT.

A pine, 12 ins. in diam., brs. N. $31\frac{1}{4}^\circ$ W., 204 lks.

dist., mkd. T31N Row S31 BT.

Land, rolling and broken.

Soil, gravelly and rocky, 2nd and 3rd rate.

Timber, cedar and pine, scattering and dense as noted.

Undergrowth, scattering scrub cedar and sage brush.

Fair grass.

S. $89^\circ 51'$ E., on a true line, bet. secs. 5 and 32.

Over rolling and broken land, thru. scattering timber and undergrowth, across draw, course S. 70° E.

5.00 N. edge of draw, brs. N. 70° W. and S. 70° E. Leave draw; asc. 30 ft., over SW. slope.

8.00 Descend 70 ft., over SE. slope.

25.00 Same draw, course N. 60° E. Asc. 70 ft., over NW. slope.

31.00 Point of spur, slopes NE. Desc. 60 ft. over E. slope.

35.00 Draw, course NE. Asc. 70 ft., over W. slope, to

40.00 Point of spur, slopes N. Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 32
S 5
1920

from which,

A pine, 8 ins. in diam., brs. S. $26\frac{1}{4}^\circ$ E., 70 lks.

dist., mkd. $\frac{1}{4}$ S 5 BT.

A pine, 8 ins. in diam., brs. N. $20\frac{1}{4}^\circ$ W., 110 lks.

dist., mkd. $\frac{1}{4}$ S 32 BT.

Continue over rolling and broken land.

Chains.

51.00 Descend 190 ft., over E. slope, to
 National Wash, course N. Asc. 170 ft., over NW. slope.
 58.00 Point of spur, slopes N. Desc. 70 ft., over E. slope.
 62.00 Draw, course NW. Ascend 110 ft., over SW. slope, to
 75.00 Thence over N. slope, with slight change in elevation.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in
 the ground, for cor. of secs. 4, 5, 32 and 33, marked on
 brass cap,

T31N	R 6W
S32	S33
S 5	S 4
T30N	1920

from which,

A pine, 10 ins. in diam., brs. N. 44° E., 140 lks.
 dist., mkd. T31N R6W S33 BT.
 A pine, 12 ins. in diam., brs. S. 83½° E., 220 lks.
 dist., mkd. T30N R6W S4 BT.
 A pine, 11 ins. in diam., brs. S. 54° W., 189 lks.
 dist., mkd. T30N R6W S5 BT.
 A pine, 8 ins. in diam., brs. N. 76½° W., 319 lks.
 dist., mkd. T31N R6W S32 BT.

Land, rolling and broken.

Soil, gravelly and rocky, 3rd and 4th rate.

Timber, scattering cedar and pine.

Undergrowth, scattering scrub cedar and sage brush.

Poor grass.

S. 89° 51' E. on a true line, bet. secs. 4 and 33.

Over gently rolling land, thru. scattering timber and
 undergrowth. Desc. slightly over NE. slope.

2.00 Drain, course N. Asc. slightly over N. slope, to

13.00 Draw, course N. Continue over N. slope, ascending very
 gradually over N. slope, to ¼ sec. cor.

26.70 Drain, course N.

39.00 Draw, course N.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the
 ground, for ¼ sec. cor., marked on brass cap,

¼	S 33
	S 4
	1920

from which,

A pine, 30 ins. in diam., brs. N. 69¼° E., 104 lks.

dist., mkd. ¼ S 33 BT.

A pine, 8 ins. in diam., brs. S. 39° E., 199 lks.

dist., mkd. ¼ S 4 BT.

Continue over gently rolling land; thru. scattering tim-
 ber and undergrowth, ascending very gradually over N.
 slope.

64.40 Draw, course NW. Leave timber. Ascend very gradually over
 NW. slope, to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
 the ground, for cor. of secs. 3, 4, 33 and 34, marked on
 brass cap,

T31N	R 6W
S33	S34
S 4	S 3
T30N	1920

and dig pits, 18x18x12 ins., NE., SE., SW. and NW. of
 cor. 3 ft. dist.

Land, gently rolling.

Soil, gravelly clay, 2nd rate.

Timber, scattering cedar and pine in W. 64 chs. None
 elsewhere.

6 Part (completion) of North bdy. of Township 30 N., R. 6 West.

Chains.

Undergrowth, scattering scrub cedar and sagebrush.
Fair grass.

40.00

S. 89° 51' E., on a true line, bet. secs. 3 and 34.
Over level land, thru. scattering undergrowth.
Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in
the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 34
S 3
1920

from which,

A cedar, 12 ins. in diam., brs. N. 31 $\frac{1}{4}$ ° E., 392 lks.

dist., mkd. $\frac{1}{4}$ S 34 BT.

A cedar, 8 ins. in diam., brs. S. 65 $\frac{1}{2}$ ° W., 87 lks.

dist., mkd. $\frac{1}{4}$ S 3 BT.

Leave level and enter gently rolling land, and scatter-
ing timber. Ascend very gradually, over W. slope.

60.00

Ascend 80 ft., over SW. slope.

75.00

Thence over S. slope, ascending slightly to

80.00

Set an iron post, 3 ft. long, 2 ins. in diam., on surface
rock, in a mound of stone, for cor. of secs. 2, 3, 34 and
35, marked on brass cap,

T31N | R6W
S34 | S35
S 3 | S 2
T30N
1920

from which,

A pine, 6 ins. in diam., brs. N. 33 $\frac{1}{4}$ ° E., 108 lks.

dist., mkd. T31N R6W S35 BT.

A pine, 12 ins. in diam., brs. S. 49° E., 450 lks.

dist., mkd. T30N R6W S2 BT.

A pine, 16 ins. in diam., brs. S. 46 $\frac{1}{2}$ ° W., 125 lks.

dist., mkd. T30N R6W S3 BT.

A pine, 10 ins. in diam., brs. N. 19° W., 245 lks.

dist., mkd. T31N R6W S34 BT.

Land, level and gently rolling.

Soil, gravelly clay, 2nd rate.

Timber, scattering cedar and pine in E. $\frac{1}{2}$. None in W. $\frac{1}{2}$.

Undergrowth, scattering scrub cedar and sage brush.

Fair grass.

5.00

S. 89° 51' E., on a true line, bet. secs. 2 and 35.

Over gently rolling land, thru. scattering timber and
undergrowth. Asc. slightly over SW. slope, to

Spur, slopes SW. Desc. 30 ft., over SE. slope.

11.00

Head of draw, course SW. Ascend slightly over W. slope.

15.00

Leave scattering, and enter dense timber, brs. N. and S.

22.00

Descend very gradually over S. slope.

34.00

Head of draw, course SE. Continue over S. slope, descending
slightly to

40.00

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 35
S 2
1920

from which,

A pine, 8 ins. in diam., brs. N. 10 $\frac{1}{2}$ ° E., 100 lks.

dist., mkd. $\frac{1}{4}$ S 35 BT.

A pine, 12 ins. in diam., brs. S. 16° E., 8 lks.

dist., mkd. $\frac{1}{4}$ S 2 BT.

Continue over gently rolling land, thru. dense timber and
scattering undergrowth, descending very gradually
over SE. slope.

Doc: 8862

Part (completion) of North bdy. of Township 30 North, Range 6 West. 7

Chains.
50.00
80.00

Leave dense, and enter scattering timber, brs. N. and SW.
Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in
the ground, for cor. of secs. 1, 2, 35 and 36, marked on
brass cap,

T31N | R6 W
S35 | S36
S 2 | S 1
T30N
1920

from which,

- A cedar, 20 ins. in diam., brs. N. $60\frac{1}{2}^{\circ}$ E., 320 lks.
dist., mkd: T31N Row S36 BT.
- A cedar, 12 ins. in diam., brs. S. $61\frac{3}{4}^{\circ}$ E., 640 lks.
dist., mkd: T30N Row S1 BT.
- A cedar, 14 ins. in diam., brs. S. $44\frac{3}{4}^{\circ}$ W., 49 lks.
dist., mkd: T30N Row S2 BT.
- A pine, 14 ins. in diam., brs. N. $16\frac{3}{4}^{\circ}$ W., 603 lks.
dist., mkd: T31N Row S35 BT.

Land, gently rolling.
Soil, gravelly clay, 2nd rate.
Timber, cedar and pine, scattering and dense as noted.
Undergrowth, scattering scrub cedar and sage brush.
Fair grass.

- 5.00 S. $89^{\circ}51'$ E., on a true line, bet. secs. 1 and 36 (W. $\frac{1}{2}$).
Over gently rolling land, thru. scattering timber and
undergrowth. Desc. slightly over SE. slope.
- 32.50 Center of draw, 5 chs. wide, course NE. Thence over N.
slope, descending slightly to
- 40.00 Shallow draw, course NE. Continue very gradual descent,
over NE. slope, to
Intersect the $\frac{1}{4}$ sec. cor. of secs. 1 and 36, hereinbefore
described.

Land, gently rolling.
Soil, gravelly clay, 2nd rate.
Timber, scattering cedar and pine.
Undergrowth, scattering scrub cedar and sage brush.
Fair grass.

8 Township 30 North, Range 6 West.

Boundaries of that part of Township 30 North, Range 6 West, subdivided under this Group (within Hualpai Indian Reservation.)

Latitudes, departures, and closing errors.

Line designated.	True course.	Dist.	Latitudes.		Departures.	
			N.	S.	E.	W.
South boundary,	West, N. 89° 54' W.	4.57 439.33		.77		4.57 439.33
West boundary,	North,	480.00	480.00			
North boundary,	S. 89° 51' E. East,	439.64 5.32		1.15	439.64 5.32	
East Bdy. of Hualpai Indian Reserve.	S. 0° 3' W.	59.88		59.88		.05
	S. 0° 5' W.	40.17		40.17		.06
	S. 0° 2' W.	40.17		40.17		.02
	S. 0° 5' W.	40.14		40.14		.06
	S. 0° 10' W.	40.19		40.19		.12
	S. 0° 9' W.	40.15		40.15		.10
	S. 0° 5' W.	40.19		40.19		.06
	S. 0° 9' W.	40.16		40.16		.10
	S. 0° 10' W.	40.14		40.14		.12
	S. 0° 17' W.	40.17		40.17		.20
	S. 0° 3' W. South,	40.16 18.52		40.16 18.52		.03
Convergency,					.48	
<u>Totals.</u>			480.77	481.19	445.44	444.82
				480.77	444.82	
<u>Error in latitude,</u>			0.42			
<u>Error in departure,</u>					0.62	

Survey of
Part (completion) of Subdivision lines of Township 30 N., R. 6 W. 9

Chains.

From the cor. of secs. 1, 2, 35 and 36, on S. bdy. of Tp., described in Book "A,"
N.0°01'W., bet. secs. 35 and 36.


15.00

Over gently rolling land, devoid of timber and undergrowth. Descend very gradually over NE. slope.

40.00

Thence over E. slope, descending very gradually. Enter very scattering timber and undergrowth.

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,




and dig pits, 18x18x12 ins., one each N. and S. of cor., 3 ft. dist.

Continue over gently rolling land, thru. very scattering timber and undergrowth. Desc. very gradually over E. slope.

80.00

Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 25, 26, 35 and 36, marked on brass cap,



from which,

A cedar, 8 ins. in diam., brs. S. 55° W., 470 lks. dist., mkd. T30N ROW S35 BT.

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, gently rolling, nearly level.

Soil, gravelly clay, 2nd rate.

Timber, very scattering cedar in N. 65 chs. None in S. 15 chs.

Undergrowth, very scattering wild rosewood, and sage brush, in N. 65 chs. only.

Fair grass.


The subdivision lines of that portion of T. 30 N., R. 6 W., situated outside the Hualpai Indian Reservation were surveyed in March, 1917, by William H. Thorn, U.S.S., who surveyed the line W. from the sec. cors. on the E. bdy. of the Tp., and established closing cors. at the points of intersection on the boundary of the Reservation.

The following notes describe the survey of the completion of the latitudinal section lines of the East range of sections beginning at the closing corners on the H.I.R. boundary.

The closing corner of that portion of the E. half of secs. 25 and 36, situated outside the H.I.R. is an iron post, 2 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by three pits, one each N., S. and E. of cor. No bearing trees.

This cor. is of record as being established on the H.I.R. bdy. at 35.34 chs. W. from cor. of secs. 25, 30, 31 and 36, on the E. bdy. of Tp.

Change the marking on the brass cap to read



10 Part(completion)of Subdivision lines of T. 30 N.,R.0 W.

Chains.

This closing cor. now refers to areas on both sides of the Reservation bdy.

Thence,

West, on a random line, between those portions of secs. 25 and 36, situated inside the Hualpai Indian Reservation.

4.66 (40.00 chs. W. from cor. of secs. 25, 30, 31 and 36 on E. bdy. of Tp.) Set temp. 1/4 sec. cor.

44.70 (80.04 chs. W. from cor. of secs. 25, 30, 31 and 36 on E. bdy. of Tp.) Fall 17 lks. S. of the cor. of secs. 25, 26, 35 and 36.

True course and length of sec. line back to point for 1/4 sec. cor. are therefore S. 89° 45' E., 40.02 chs.

From cor. of secs. 25, 26, 35 and 36, S. 89° 45' E., on a true line, bet. secs. 25 and 36 (W. 1/2). Over gently rolling land, thru. scattering timber and undergrowth.

Descend very gradually over E. slope.

10.00 Thence, over N. slope, ascending slightly to (Midpoint of line, bet. secs. 25 and 36, due West of C.C.)

40.02 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

1/4 S 25
S 36
1920

and dig pits, 18x18x12 ins., one each E. and W. of cor. 3 ft. dist.

Thence,

East, on true line, bet. those parts of E. half of secs. 25 and 36, situated inside the Hualpai Indian Reservation.

Over gently rolling land, thru. very scattering timber and undergrowth. Desc. very gradually over E. slope.

4.68 Intersect the closing cor. of secs. 25 and 36 on the bdy. of the Hualpai Indian Reservation, hereinbefore described.

Land, gently rolling, nearly level.

Soil, sandy and gravelly, 1st and 2nd rate.

Timber, very scattering cedar.

Undergrowth, very scattering sage brush.

Good grass.

N. 0° 01' W., bet. secs. 25 and 26,

Over gently rolling land, thru. very scattering timber, ascending very gradually over E. slope.

5.00 Change to SE. slope, and continue very gradual ascent.

20.00 Top of low divide, brs. NE. and NW. Desc. very gradually over NE. slope, to

40.00 set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

S 26 | S 25
1920

from which,

A cedar, 3 ins. in diam., brs. N. 34 1/2° E., 218 lks. dist., mkd. 1/4 S 25 BT.

A cedar, 3 ins. in diam., brs. S. 30 1/2° W., 529 lks. dist., mkd. 1/4 S 26 BT.

Continue over gently rolling land, thru. very scattering timber, descending very gradually over N. slope.

60.00 Leave timber.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in the ground, for cor. of secs. 23, 24, 25 and 26, marked

Part (completion) of Subdivision lines of T30 N. R. 6 W. 11

Chains.

on brass cap,

T30N	R6 W
S23	S24
S26	S25
1920	

and dig pits, 18x18x12 ins., one each NE., SE., SW. and NW. of cor. 3 ft. dist.

Land, gently rolling, nearly level.
Soil, sandy and gravelly clay, 2nd rate.
Timber, very scattering cedar, in S. 60 chs. only
Undergrowth, none.
Fair grass.

The closing cor. of those portions of secs. 24 and 25, situated outside the Hualpai Indian Reservation is an iron post, 2 ins. in diam., firmly set in the ground in mound of stone, properly marked on brass cap, and witnessed by 2 properly marked bearing trees, one N. 10° E., 42 lks. dist., and one S. 12½° E., 158 lks. dist. This cor. is of record as being established on the H.I.R. Bdy. at 35.20 chs. West from cor. of secs. 19, 24, 25 and 30, on E. bdy. of Tp. Change the marking on the brass cap, to read.

T30N	
S24	S24 CC
S25	S25
R6W	
1917	

This closing cor. now refers to areas on both sides of the reservation bdy.

Thence,

- 4.74 West, on random line, between those portions of secs. 24 and 25, situated inside the Hualpai Indian Reservation. (40.00 chs. W. from the cor. of secs. 19, 24, 25 and 30 on the E. bdy. of Tp.) Set temp. ¼ sec. cor.
- 44.87 (80.13 chs. W. from cor. of secs. 19, 24, 25 and 30, on E. bdy. of Tp.) Fall 13 lks. S. of the cor. of secs. 23, 24, 25 and 26.

True course and length of sec. line back to point for ¼ sec. cor. are therefore S. 89° 49' E., 40.07 chs.

From cor. of secs. 23, 24, 25 and 26, S. 89° 49' E., on true line, bet. secs. 24 and 25 (W. ½).

Over gently rolling land, thru. very scattering small timber. Descend very gradually over N. slope.

- 20.00 Shallow draw, course N. 20° W. Asc. 30 ft., over W. slope, to
- 40.07 (Midpoint of line bet. secs. 24 and 25, due West of C.C.), Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground, for ¼ sec. cor., marked on brass cap,

¼ S 24
S 25
1920

from which,

- A cedar, 3 ins. in diam., brs. S. 42° E., 39 lks. dist., mkd. ¼ S 25 BT.
- A cedar, 3 ins. in diam., brs. N. 17° W., 150 lks. dist., mkd. ¼ S 24 BT.

Thence,

East, on a true line, bet. those parts of E. ½ of secs. 24 and 25, situated inside the Hualpai Indian Reservation.

Over gently rolling land, thru. very scattering small timber, ascending very gradually, over SW. slope, to intersect the closing cor. of secs. 24 and 25, on the Bdy. of the Hualpai Indian Reservation, hereinbefore described.

4.80

Land, gently rolling.
Soil, sandy and gravelly clay, 2nd rate.

12 Part(completion) of Subdivision lines of T.30 N. R.6 W.

Chains.

Timber, very scattering small cedar.
Undergrowth, none.
Fair grass.

N.0°01'W., bet.secs. 23 and 24.

Over gently rolling land, devoid of timber and undergrowth, descending very gradually over N.slope.

20.00 Draw, course NW. Thence along W. slope, ascending slightly, to

40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec.cor., marked on brass cap,

S23 | S24
1920

and dig pits, 18x18x12 ins., one each N.and S.of cor., 3 ft.dist.

Continue over gently rolling land, devoid of timber and undergrowth, ascending very gradually over W.slope,

52.70 Old road, brs.NE. and SW.

60:00 Enter scattering timber.

78.30 Drain, course W. Ascend slightly over SW.slope, to

80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 26 ins.in the ground, for cor.of secs. 13,14,23 and 24, marked on brass cap,

T30N | R6 W
S14 | S13
S23 | S24
1920

from which,

A cedar, 12 ins. in diam., brs.N.49 1/2°E., 165 lks. dist., marked T30N R6W S13 BT.

A cedar, 6 ins.in diam., brs.S.24°E., 106 lks. dist., marked T30N R6W S24 BT.

A pine, 8 ins. in diam., brs.N.29 1/2°W., 460 lks. dist., marked T30N R6W S14 BT.

and dig a pit, 18x18x12 ins. SW. of cor. 3 ft.dist.

Land, gently rolling.

Soil, sandy and gravelly clay, 2nd rate.

Timber, scattering cedar and pine in N.20 chs.only.

Undergrowth, none.

Fair grass.

The closing cor.of those portions of secs.13 and 24 situated outside the Hualpai Indian Reservation is an iron post, 2 ins. in diam., firmly set in ground, and in mound of stone, properly marked on brass cap, and witnessed by one properly marked bearing tree N.84°E. 338 lks.dist., and 3 pits, one each N., S. and E.of cor.

This cor.is of record as being established on the H.I.R. bdy. at 35.03 chs. west from cor.of secs.13,18,19 and 24 on the E. bdy.of Tp.

Change the marking on brass cap to read

T30N
S13 | S13 CC
S24 | S24
R6W
1917

This closing cor. now refers to areas on both sides of the Reservation bdy. thence,

Part (completion) of Subdivision lines of T. 30 N., R. 6 W. 13

Chains.

West, on random line, bet. those portions of secs. 13 and 24, situated inside the Hualpai Indian Reservation.

4.97 (40.00 chs. W. from cor. of secs. 13, 18, 19 and 24 on E. bdy. of Tp.) Set temp. $\frac{1}{4}$ sec. cor.

45.22 (80.25 chs. W. from cor. of secs. 13, 18, 19 and 24 on E. bdy. of Tp.) Fall 20 lks. S. of the cor. of secs. 13, 14, 23 and 24.

True course and length of sec. line back to point for $\frac{1}{4}$ sec. cor. are therefore S. $89^{\circ}43'E.$, 40.13 chs.

From cor. of secs. 13, 14, 23 and 24, S. $89^{\circ}43'E.$, on true line, bet. secs. 13 and 24 (W. $\frac{1}{2}$).


Over gently rolling land, thru. scattering timber, ascending very gradually over SW. slope, to

9.00 Drain, course S. $80^{\circ}W.$ Thence over NW. slope, ascending very gradually to $\frac{1}{4}$ sec. cor.

31.50 Old road, brs. NE. and SW. Leave scattering and enter dense timber.

40.00 Leave gently rolling, and enter level land, leave dense, and enter scattering timber and undergrowth.

40.13 (Midpoint of line bet. secs. 13 and 24, due West of C.C.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,



from which,

- A pine, 10 ins. in diam., brs. S. $70^{\circ}4'W.$, 400 lks. dist., mkd. $\frac{1}{4}$ S 24 BT.
- A pine, 6 ins. in diam., brs. N. $38^{\circ}W.$, 20 lks. dist., mkd. $\frac{1}{4}$ S 13 BT.

Thence,

East, on a true line, bet. those parts of E. $\frac{1}{2}$ of secs. 13 and 24, situated inside the Hualpai Indian Reservation.

Over level land, thru. scattering timber and undergrowth.

5.09 Intersect the closing cor. of secs. 13 and 24 on the Bdy. of the Hualpai Indian Reservation, hereinbefore described.

Land, gently rolling and level.

Soil, sandy and gravelly, 2nd rate.

Timber, scattering cedar and pine.

Undergrowth, scattering scrub cedar and sage brush E. of $\frac{1}{4}$ sec. cor.

Fair grass.


N. $0^{\circ}01'W.$, bet. secs. 13 and 14.

Over gently rolling land, thru. scattering timber, ascending gradually over SW. slope.

28.00 Spur, slopes MW. Desc. gradually over NE. slope, to

38.00 Drain, course NW. Ascend slightly over SW. slope, to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground, to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap,



from which,

- A cedar, 8 ins. in diam., brs. S. $73^{\circ}E.$, 166 lks. dist., mkd. $\frac{1}{4}$ S 13 BT.
- A cedar, 4 ins. in diam., brs. N. $62^{\circ}4'W.$, 101 lks. dist., mkd. $\frac{1}{4}$ S 14 BT.

Continue over gently rolling land, thru. scattering timber, along W. slope, with slight change in elevation.

52.00 Drain, course SW. Continue over W. slope.

70.00 Descend gradually over NW. slope, to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in the

14 Part (completion) of Subdivision lines of T.30 N., R.6 W.

Chains.

ground, for cor. of secs. 11, 12, 13 and 14, marked on brass cap,

T30N	R6 W
S11	S12
S14	S13
1920	

from which,

- A pine, 8 ins. in diam., brs. N. $16\frac{1}{2}^{\circ}$ E., 572 lks.
dist. marked T30N R6W S12 BT.
- A pine, 12 ins. in diam., brs. S. $47\frac{1}{2}^{\circ}$ E., 318 lks.
dist. marked T30N R6W S13 BT.
- A cedar, 10 ins. in diam., brs. S. $57\frac{3}{4}^{\circ}$ W., 27 lks.
dist. marked T30N R6W S14 BT.
- A cedar, 8 ins. in diam., brs. N. $25\frac{1}{4}^{\circ}$ W., 429 lks.
dist. marked T30N R6W S11 BT.

Land, gently rolling.
Soil, sandy and gravelly, 2nd rate.
Timber, scattering cedar and pine.
Undergrowth, none.
Fair grass.

The closing cor. of those portions of secs. 12 and 13, situated outside the Hualpai Indian Reservation is an iron post, 2 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by three pits, one each N., S. and E. of cor. No bearing trees.

This cor. is of record as being established on the H.I.R. Bdy. at 34.89 chs. W. from cor. of secs. 7, 12, 13 and 18, on the E. bdy. of Tp.

Change the marking on the brass cap, to read,

S12	T30N
S13	S12
	S13
	R6W
	CC
1917	

This closing cor. now refers to areas on both sides of the Reservation Bdy.

Thence,

- West, on random line, between those portions of secs. 12 and 13, situated inside the Hualpai Indian Reservation.
- 5.11 (40.00 chs. West from cor. of secs. 7, 12, 13 and 18 on E. bdy. of Tp.) Set temp. $\frac{1}{4}$ sec. cor.
- 45.40 (80.29 chs. West from cor. of secs. 7, 12, 13 and 18 on E. bdy. of Tp.) Fall 25 lks. S. of the cor. of secs. 11, 12, 13 and 14.
True course and length of sec. line back to point for $\frac{1}{4}$ sec. cor. are therefore S. $89^{\circ}39'$ E., 40.15 chs.
From the cor. of secs. 11, 12, 13 and 14, S. $89^{\circ}39'$ E., on a true line, bet. secs. 12 and 13 (W. $\frac{1}{4}$).
Over gently rolling land, thru. very scattering timber. Ascend slightly over NW. slope.
- 7.00 Low ridge, brs. N. and S. Descend very gradually over E. slope, to
- 40.15 Midpoint of line, bet. secs. 12 and 13, due west of C.C.) Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

S 12
$\frac{1}{4}$
S 13
1920

and dig pits, 18x18x12 ins., one each E. and W. of cor., 3 ft. dist.

Part (completion) of Subdivision lines of T. 30 N. R. 6 W. 15


Chains.

Thence, East, on a true line, bet. those parts of E. 1/2 of secs. 12 and 13, situated inside the Hualpai Indian Reservation.

5.25 Over gently rolling land, thru. very scattering timber, descending slightly over E. slope. Intersect the closing cor. of secs. 12 and 13 on the bdy. of the H. I. R., hereinbefore described. Land, gently rolling, nearly level. Soil, sandy and gravelly, 2nd rate. Timber, very scattering cedar and pine. Undergrowth, none. Fair grass.

N. 0° 01' W., bet. secs. 11 and 12. Over gently rolling land, thru. scattering timber, ascending very gradually over W. slope.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,




from which,

- A cedar, 6 ins. in diam., brs. N. 60° E., 424 lks. dist., mkd. 1/4 S 12 BT.
- A cedar, 4 ins. in diam., brs. S. 87° W., 263 lks. dist., mkd. 1/4 S 11 BT.

Continue over gently rolling land, thru. scattering timber. Ascend very gradually over W. slope, to

54.00 Drain, course SW. Ascend very gradually over SE. slope, to
70.00 Change to E. slope, with slight change in elevation.
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 1, 2, 11 and 12, marked on brass cap,



from which,

- A pine, 8 ins. in diam., brs. N. 43 3/4° E., 128 lks. dist., mkd. T 30 N R 6 W S 1 BT.
- A pine, 6 ins. in diam., brs. S. 41 3/4° E., 153 lks. dist., mkd. T 30 N R 6 W S 12 BT.
- A pine, 8 ins. in diam., brs. S. 50° W., 131 lks. dist., mkd. T 30 N R 6 W S 11 BT.
- A pine, 8 ins. in diam., brs. N. 47 1/4° W., 195 lks. dist., mkd. T 30 N R 6 W S 2 BT.

Land, gently rolling, nearly level. Soil, sandy and gravelly clay, 2nd rate. Timber, scattering cedar and pine. Undergrowth, none. Fair grass.

The closing cor. of those portions of secs. 1 and 12 situated outside the Hualpai Indian Reservation is an iron post, 2 ins. in diam., firmly set in the ground, and in mound of stone, properly marked on brass cap, and witnessed by 3 pits, one each, N., S. and E. of cor. No bearing trees.

This cor. is of record as being established on the H. I. R. bdy. at 34.84 chs. West from cor. of secs. 1, 6, 7 and 12, on the E. bdy. of Tp.

Change the marking on the brass cap to read

16 Part (completion) of Subdivision lines of T. 30 N., R. 6 W.

Chains.

		T30N
S1 ^H		S1
		CC
S12 ^H		S12
		R6W
1917		

This closing cor. now refers to areas on both sides of the reservation bdy. etc.

Thence,

West, on random line, between those portions of secs. 1 and 12, situated inside the Hualpai Indian Reservation.

- 5.16 (40.00 chs. West from cor. of secs. 1, 6, 7 and 12 on E. bdy. of Tp. Set temp. 1/4 sec. cor.
- 45.56 (80.40 chs. West from cor. of secs. 1, 6, 7 and 12, on E. bdy. of Tp.) Fall 23 lks. S. of the cor. of secs. 1, 2, 11 and 12. True course and length of sec. line back to point for 1/4 sec. cor. are therefore S. 89° 40' E., 40.20 chs. From cor. of secs. 1, 2, 11 and 12, S. 89° 40' E., on true line, bet. secs. 1 and 12 (W. 1/2). Over gently rolling land, thru. scattering timber, descending very gradually over E. slope.
- 20.00 Leave timber, change to SW. slope, and ascend slightly to
- 40.20 (Midpoint of line bet. secs. 1 and 12, due West of C.C.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

1/4	S	1
		S 12
1920		

and dig pits, 18x18x12 ins. one each, E. and W. of cor. 3 ft. dist.

Thence,

East, on true line, between those parts of E. 1/2 of secs. 1 and 12, situated inside the Hualpai Indian Reservation.

- 5.36 Over gently rolling land, devoid of timber and undergrowth, descending very gradually over NE. slope, to intersect the closing cor. of secs. 1 and 12, on the Bdy. of the Hualpai Indian Reservation, hereinbefore described.
- Land, gently rolling, nearly level.
- Soil, sandy and gravelly clay, 2nd rate.
- Timber, scattering cedar and pine in W. 20 chs. only.
- Undergrowth, none.
- Fair grass.

- 40.00 N. 0° 01' W., on a random line, bet. secs. 1 and 2. Set temp. 1/4 sec. cor.
- 79.77 Fall 37 lks. W. of the cor. of secs. 1, 2, 35 and 36, on N. bdy. of Tp., hereinbefore described.
- Thence,
- S. 0° 15' W.; on a true line, bet. secs. 1 and 2.
- Over gently rolling land, thru. scattering timber and undergrowth. Desc. slightly over SE. slope.
- 4.00 Draw, course NE. Asc. gradually, over NW. slope, to
- 39.77 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

1/4	S	2	S	1
1920				

from which,

- A pine, 12 ins. in diam., brs. N. 71 1/4° E., 291 lks. dist., mkd. 1/4 S 1 BT.
- A pine, 10 ins. in diam., brs. N. 6 1/2° W., 202 lks. dist., mkd. 1/4 S 2 BT.

Part (completion) of Subdivision lines of T.30 N., R.6 W.

17

Chains.

Leave timber.
Continue over gently rolling land, ascending very gradually, over N. slope.
60.00 Change to NE. slope and continue gradual ascent to sec. cor.
Enter scattering timber.
79.77 The cor. of secs. 1, 2, 11 and 12.
Land, gently rolling.
Soil, sandy and gravelly clay, 2nd rate.
Timber, scattering cedar and pine, where noted.
Undergrowth, scattering scrub cedar and sage brush,
Fair grass.

From the cor. of secs. 2, 3, 34 and 35, on S. bdy. of Tp.,
described in Book "A,"
N.0°01'W., bet. secs. 34 and 35.
Over gently rolling land, thru. very scattering timber and
undergrowth.
Descend very gradually over NW. slope.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
 S34 | S35
 1920

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
of cor.
Continue over gently rolling land, thru. very scattering
timber, and undergrowth. Descend very gradually over
N. slope, to
60.00 Shallow draw, course N.60°E. Leave timber; thence over E.
slope, with slight change in elevation.
70.00 Ascend slightly over SE. slope, to
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in
the ground, for cor. of secs. 26, 27, 34 and 35, marked
on brass cap,

T30N | R6 W
 S27 | S26
 S34 | S35
 1920

from which,
A cedar, 5 ins. in diam., brs. N.32 $\frac{1}{4}$ °E., 360 lks.
dist., mrd. T30N R6W S26 BT.
A cedar, 8 ins. in diam., brs. N.28 $\frac{1}{2}$ °W., 450 lks.
dist., mrd. T30N R6W S27 BT.
and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
of cor.
Land, gently rolling, nearly level.
Soil, sandy and gravelly clay loam, 2nd rate.
Timber, very scattering cedar in S. 60 chs. only.
Undergrowth, very scattering wild rosewood, scrub cedar
and sage brush.
Good grass.

S. 89° 54' E., on a random line, bet. secs. 26 and 35.
40.00 Set temp. $\frac{1}{4}$ sec. cor.
80.02 Fall 29 lks. S. of the cor. of secs. 25, 26, 35 and 36.
Thence,
S. 89° 54' W., on a true line, bet. secs. 26 and 35.
Over gently rolling land, devoid of timber or undergrowth.
Ascend slightly, over E. slope.
5.00 change to S. slope, with slight change in elevation.
20.00 Descend slightly over SW. slope, to
40.01 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

18 Part (completion) of Subdivision lines of T. 30 N., R. 6 W.

Chains.

$$\frac{1}{4} \text{ S } 26$$

$$\text{S } 35$$

$$1920$$

and dig pits, 18x18x12 ins., one each E. and W. of cor.
3 ft. dist.

- Continue over gently rolling land, devoid of timber or undergrowth, along N. slope; descending slightly to
- 69.00 Ascend very gradually over E. slope, to
- 80.02 The cor. of secs. 26, 27, 34 and 35.
Land, gently rolling, nearly level.
Soil, gravelly clay loam, 2nd rate.
Timber, none.
Undergrowth, none.
Good grass.

- N.0°01'W., bet. secs. 26 and 27.
Over gently rolling land, thru. very scattering timber. Ascend very gradually, over SE. slope, to
- 25.00 Thence over E. slope; with slight change in elevation.
- 30.00 Descend gradually, over N. slope, to
- 40.00 South edge of shallow draw, brs. E. and W. Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$$\frac{1}{4}$$

$$\text{S } 27 \text{ | } \text{S } 26$$

$$1920$$

from which,

- A cedar, 3 ins. in diam., brs. S. 34° E., 393 lks.
dist., mkd. $\frac{1}{4}$ S 26 BT.
- A cedar, 6 ins. in diam., brs. N. 78° W., 170 lks.
dist., mkd. $\frac{1}{4}$ S 27 BT.
- Continue over gently rolling land, across shallow draw, course E.
- 50.00 N. edge of draw, brs. E. and W. Asc. gradually over SW. slope, to
- 65.00 Thence over E. slope, with slight change in elevation.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., on surface rock, in a mound of stone, for cor. of secs. 22, 23, 26 and 27, marked on brass cap,

$$\text{T } 30 \text{ N } \text{ | } \text{R } 6 \text{ W}$$

$$\text{S } 22 \text{ | } \text{S } 23$$

$$\text{S } 27 \text{ | } \text{S } 26$$

$$1920$$

from which,

- A cedar, 8 ins. in diam., brs. N. 71° E., 533 lks.
dist., mkd. T 30 N R 6 W S 23 BT.
- A cedar, 14 ins. in diam., brs. S. 51 $\frac{1}{2}$ ° E., 444 lks.
dist., mkd. T 30 N R 6 W S 26 BT.
- and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
- Land, gently rolling, nearly level.
Soil, gravelly clay loam, 2nd rate.
Timber, very scattering cedar.
Undergrowth, none. Good grass.

- 40.00 N. 89° 54' E., on a random line, bet. secs. 23 and 26.
Set temp. $\frac{1}{4}$ sec. cor.
- 80.00 Fall 8 lks. N. of the cor. of secs. 23, 24, 25 and 26.
Thence,
S. 89° 57' W., on a true line, bet. secs. 23 and 26.
Over gently rolling land, devoid of timber or undergrowth,
descending very gradually over N. slope.

Part (completion) of Subdivision lines of T.30 N. R. 6 W. 19

Chains.

20.00 E. edge of bottom of nearly level valley or draw, brs. NE. and SW. Thence across valley or draw, draining NE.
 40.00 W. edge of valley or draw, brs. NE. and SW. Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

1 S 23
 4 S 26
 1920

and dig pits, 18x18x12 ins., one each E. and W. of cor., 3 ft. dist.

Continue over gently rolling land, devoid of timber or undergrowth, ascending very gradually over NE. slope.

70.16 Road, brs. NE. and SW. Thence over E. slope, ascending very gradually.

Enter very scattering timber.

80.00 The cor. of secs. 22, 23, 26 and 27.
 Land, gently rolling, nearly level.
 Soil, gravelly clay loam, 2nd rate.
 Timber, scattering cedar in W. 10 chs. only.
 Undergrowth, none.
 Good grass.

N. 0° 01' W., bet. secs. 22 and 23.

Over gently rolling land, thru. very scattering timber, descending gradually over E. slope, to

20.00 Thence over NE. slope, descending gradually, Leave timber.

40.00 Low spur, slopes NE. Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

1/4
 S22 | S23
 1920

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Continue over gently rolling land, devoid of timber or undergrowth, descending very gradually over NE. slope to sec. cor.

50.00 Shallow drain, course NE.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 14, 15, 22 and 23, marked on brass cap,

T30N | R6 W
 S15 | S14
 S22 | S23
 1920

from which,

A cedar, 6 ins. in diam., brs. S. 72 1/4° W., 480 lks. dist., mkd. T30N R6W S22 BT.

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, gently rolling, nearly level.

Soil, gravelly clay loam, 2nd rate.

Timber, very scattering cedar in S. 20 chs. only.

Undergrowth, none.

Good grass.

N. 89° 57' E., on random line, bet. secs. 14 and 23.


40.00 Set temp. 1/4 sec. cor.

80.00 Fall 16 lks. N. of the cor. of secs. 13, 14, 23 and 24. Thence,

20 Part (completion) of Subdivision lines of T.30 N., R. 6 W.


Chains.

N. 89°56'W., on a true line, bet. secs. 14 and 23.
 Over gently rolling land, devoid of timber or undergrowth.
 Descend slightly over SW. slope.
 10.00 Center of draw, 10 chs. wide, course NW. Desc. slightly
 over N. slope, to
 30.00 Ascend very gradually over NE. slope, to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,




and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N.
 of cor.
 Continue over gently rolling land, devoid of timber or
 undergrowth, ascending very gradually over NE. slope.
 80.00 The cor. of secs. 14, 15, 22 and 23.
 Land, gently rolling, nearly level.
 Soil, gravelly and clay loam, 2nd rate.
 Timber, none.
 Undergrowth, none.
 Good grass.

N. 0°01'W., bet. secs. 14 and 15.
 Over gently rolling land, thru. very scattering timber,
 descending very gradually over NE. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,



from which,
 A cedar, 10 ins. in diam., brs. S. 34 $\frac{1}{2}$ °E., 130
 lks. dist., mkd. $\frac{1}{4}$ S 14 BT.
 A cedar, 10 ins. in diam., brs. S. 77 $\frac{1}{2}$ °W., 268 lks.
 dist., mkd. $\frac{1}{4}$ S 15 BT.
 Continue over gently rolling land, devoid of timber or
 undergrowth.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in
 the ground, for cor. of secs. 10, 11, 14 and 15, marked
 on brass cap,



and dig pits, 18x18x12 ins., one each NE., SE., SW. and NW.
 of cor. 3 ft. dist.
 Land, gently rolling, nearly level.
 Soil, gravelly clay loam, 2nd rate.
 Timber, very scattering cedar in S. $\frac{1}{2}$ only.
 Undergrowth, none.
 Good grass.

S. 89°56'E., on a random line, bet. secs. 11 and 14.
 40.00 Set temp. $\frac{1}{4}$ sec. for.
 80.00 Intersect the cor. of secs. 11, 12, 13 and 14.
 Thence,
 N. 89°56'W., on a true line, bet. secs. 11 and 14.
 Over gently rolling land, thru. very scattering timber,
 along N. slope, descending slightly to

Part (completion) of Subdivision lines of T.30 N. R. 6 W. 21

Chains.

20.00 Descend gradually over NW.slope,
40.00 Set an iron post, 3 ft.long, 1 in. in diam., 28 ins.in
the ground, for 1/4 sec.cor., marked on brass cap,

1/4 S 11
S 14
1920

from which,
A cedar, 10 ins. in diam., brs.N. 82°E., 492 lks.
dist., mkd. 1/4 S 11 BT.
A cedar, 12 ins. in diam., brs.S. 15 1/2°E., 130 lks.
dist., mkd. 1/4 S 14 BT.

Leave timber. Continue over gently rolling land, devoid
of timber or undergrowth, descending very gradually
over W.slope.

60.00 Center of shallow draw, 10 chs.wide, course NW. Ascend very
gradually, over NE.slope, to

80.00 The cor.of secs.10, 11, 14 and 15.
Land, gently rolling, nearly level.
Soil, gravelly clay loam, 2nd rate.
Timber, scattering cedar and pine in E.half only.
Undergrowth, none.
Good grass.

N.0°01' W., bet. secs.10 and 11.
Over nearly level land, devoid of timber or undergrowth,
descending slightly over NW.slope, to

40.00 Set an iron post, 3 ft.long, 1 in. in diam., 24 ins. in
the ground, for 1/4 sec.cor., marked on brass cap,

1/4 S10 | S11
1920

and dig pits, 18x18x12 ins., one each N. and S. of cor.
3 ft. dist.

Continue over nearly level land, devoid of timber or under-
growth. Ascend slightly over SW.slope, to

60.00 Thence over W.slope, with slight change in elevation.

70.00 Enter very scattering timber.

80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 26 ins.in
the ground, for cor.of secs.2, 3, 10 and 11, marked on
brass cap,

T30N | R 6W
S 3 | S 2
S10 | S11
1920

from which,
A cedar, 14 ins. in diam., brs.S. 41 1/2°E., 588 lks.
dist., mkd. T30N Row S11 BT.
A cedar, 8 ins. in diam., brs.S. 20°W., 331 lks.
dist., mkd. T30N Row S10 BT.
A cedar, 10 ins. in diam., brs.N. 61 1/4°W., 574 lks.
dist., mark T30N Row S3 BT.

and raise a mound of stone, 2 ft.base, 1 1/2 ft. high, NE.
of cor. 3 ft. dist.

Land, nearly level.
Soil, gravelly clay loam, 2nd rate.
Timber, very scattering cedar in N.10 chs.only.
Undergrowth, none.
Good grass.

40.00 S. 89° 56' E., on a random line, bet. secs. 2 and 11.
Set temp. 1/4 sec. cor.

22 Part (completion) of subdivision lines of T. 30 N., R. 6 W.

Chains.

80.00 Intersect the cor. of secs. 1, 2, 11 and 12.
 Thence,
 N. 89° 50' W., on a true line, bet. secs. 2 and 11.
 Over gently rolling land, thru. scattering timber, along
 N. slope, with slight change in elevation.
 20.00 Drain, course NE. Ascend slightly over NE. slope, to
 27.00 Descend gradually over SW. slope, to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., on surface
 rock, in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on
 brass cap,

$\frac{1}{4}$ S 2
 S 11
 1920

from which,

A pine, 8 ins. in diam., brs. S. 56 $\frac{3}{4}$ ° W., 106 lks.
 dist., mkd. $\frac{1}{4}$ S 11 BT.

A pine, 8 ins. in diam., brs. N. 41° W., 148 lks.
 dist., mkd. $\frac{1}{4}$ S 2 BT.

Continue over gently rolling land, thru. scattering timber,
 descending gradually over SW. slope.

45.00 Draw, course SW.
 65.00 Change to nearly level W. slope. Timber becomes scattering.

Descend slightly to
 80.00 The cor. of secs. 2, 3, 10 and 11.
 Land, gently rolling and nearly level.
 Soil, gravelly clay loam, 2nd rate.
 Timber, scattering cedar and pine.
 Undergrowth, none.
 Good grass.

 N. 0° 15' E., on a random line, bet. secs. 2 and 3.

40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.56 Fall 4 lks. W. of the cor. of secs. 2, 3, 34 and 35, on N.
 bdy. of Tp., hereinbefore described.

Thence,
 S. 0° 17' W., on a true line, bet. secs. 2 and 3.
 Over gently rolling land, thru. scattering timber. Desc.
 gradually over S. slope.

10.00 Center of draw, 5 chs. wide, course W. Ascend over W.
 slope, to

17.00 Thence, over SW. slope, descending gradually to
 39.56 Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
 S 3 | S 2
 1920

from which,

A cedar, 8 ins. in diam., brs. S. 84° E., 89 lks.
 dist., mkd. $\frac{1}{4}$ S 2 BT.

A cedar, 6 ins. in diam., brs. S. 44° W., 303 lks.
 dist., mkd. $\frac{1}{4}$ S 3 BT.

Continue over nearly level land, thru. very scattering
 timber, descending very gradually over W. slope.

79.56 The cor. of secs. 2, 3, 10 and 11.
 Land, gently rolling, and nearly level.
 Soil, gravelly clay loam, 2nd rate.
 Timber, scattering cedar.
 Undergrowth, none.
 Good grass.

 From the cor. of secs. 3, 4, 33 and 34, on S. bdy. of Tp., de-
 scribed in Book "A,"

5002 200

Part (completion) of Subdivision lines of T. 30 N., R. 6 W. 23

Chains.	N. 0° 02' W., bet. secs. 33 and 34. Over nearly level land, thru. very scattering timber, along W. slope, with slight change in elevation.
20.00	Ascend slightly over SW. slope, to
25.00	Thence over NW. slope, descending gradually to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap, $\begin{array}{c} \frac{1}{4} \\ S33 S34 \\ 1920 \end{array}$
	from which, A cedar, 6 ins. in diam., brs. S. 68 $\frac{1}{2}$ ° E., 317 lks. dist., marked S 34 BT. A cedar, 20 ins. in diam., brs. S. 32 $\frac{3}{4}$ ° W., 399 lks. dist., marked S 33 BT.
	Continue over nearly level land, thru. scattering timber, descending slightly over NW. slope, to
50.00	Thence over W. slope, descending very gradually.
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 27, 28, 33 and 34, marked on brass cap, $\begin{array}{c} T30N, R6W \\ S28 S27 \\ S33 S34 \\ 1920 \end{array}$
	from which, A cedar, 12 ins. in diam., brs. N. 72° E., 231 lks. dist., marked T30N R6W S27 BT. A cedar, 4 ins. in diam., brs. S. 41 $\frac{1}{2}$ ° E., 129 lks. dist., marked T30N R6W S34 BT. and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor. Land, nearly level. Soil, gravelly clay loam, 2nd rate. Undergrowth, none. Good grass. Timber, scattering cedar.
	----- S. 89° 54' E., on a random line, bet. secs. 27 and 34.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.06	Fall 12 lks. S. of the cor. of secs. 26, 27, 34 and 35. Thence, N. 89° 59' W., on a true line, bet. secs. 27 and 34. Over gently rolling land, devoid of timber or undergrowth. Ascend gradually over E. slope:
15.00	Enter scattering timber, brs. N. and S.
40.03	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap, $\begin{array}{c} \frac{1}{4} S 27 \\ S 34 \\ 1920 \end{array}$
	and dig pits, 18x18x12 ins., one each E. and W. of cor. 3 ft. dist. Continue over gently rolling land, thru. scattering timber, Asc. gradually over E. slope.
52.00	Ridge, brs. N. and S. Leave scattering, and enter dense timber, brs. N. and S. Desc. gradually over W. slope.
70.00	Leave dense, and enter scattering timber.
80.06	The cor. of secs. 27, 28, 33 and 34. Land, gently rolling. Soil, gravelly clay loam, 2nd rate. Timber, cedar and pine, dense and scattering as noted. Undergrowth, none; good grass.
	----- N. 0° 02' W., bet. secs. 27 and 28.
	Over gently rolling land, thru. scattering timber, along W. slope, descending slightly.
7.40	Old road, brs. NE. and SW.
10.00	Leave timber, and begin very gradual ascent, over W. slope.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground, to bed rock, supported in a mound of stone and earth for $\frac{1}{4}$ sec. cor., marked on brass cap, $\begin{array}{c} \frac{1}{4} \\ S28 S27 \\ 1920 \end{array}$
	and dig pits, 18x18x12 ins., one each N. and S. of cor., 3 ft. dist.
	Continue over gently rolling land, devoid of timber or undergrowth, ascending very gradually over W. slope.
60.00	Enter scattering timber, brs. SE. and NW.

24 Part (completion) of Subdivision lines of T. 30 N., R. 6 W.

Chains.	Descend very gradually over NW. slope, to
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the ground, to bed rock, supported in a mound of stone, for cor. of secs. 21, 22, 27 and 28, marked on brass cap, T30N ROW S21 S22 S28 S27. 1920 from which, A cedar, 4 ins. in diam., brs. N. 72½° E., 57 lks. dist., mkd. T30N ROW S22 BT. Descend gradually over NW. slope, to And raise mound of stone, 2 ft. base, 1½ ft. high, W. of cor. Land, gently rolling. Soil, gravelly clay loam, 2nd rate. Timber, scattering cedar and pine in S. 10 chs. and N. 20 chs. Undergrowth, none. Good grass.
40.00	S. 89° 59' E., on a random line, bet. secs. 22 and 27.
80.04	Set temp. ¼ sec. cor. Fall 8 lks. N. of cor. of secs. 22, 23, 26 and 27. Thence, N. 89° 56' W., on true line, bet. secs. 22 and 27. Over gently rolling land, thru. very scattering timber. Ascend very gradually over E. slope.
40.02	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap, ¼ S 22 S 27 1920 from which, A cedar, 10 ins. in diam., brs. S. 35° E., 287 lks. dist., mkd. ¼ S 27 BT. A cedar, 14 ins. in diam., brs. N. 60¾° W., 492 lks. dist., mkd. ¼ S 22 BT. Continue over gently rolling land, thru. very scattering timber. Asc. gradually over NE. slope.
52.00	Leave scattering, and enter dense timber, brs. N. and S.
58.00	Leave dense, and enter scattering timber. Desc. gradually over NW. slope.
62.80	A cedar, 48 ins. in diam.; on line.
69.50	Drain, course NW. Continue gradual descent over NW. slope, to
80.04	The cor. of secs. 21, 22, 27 and 28, Land, gently rolling. Soil, gravelly clay loam, 2nd rate, Timber, cedar and pine, scattering and dense as noted. Undergrowth, none.
25.00	N. 0° 02' W., bet. secs. 21 and 22. Over gently rolling land, devoid of timber or undergrowth. Descend slightly over NW. slope.
30:29	Ascend very gradually over SW. slope. Fence, brs. N. 80¼° W. and S. 80¼° E.
32.50	Enter scattering timber, brs. E. and W.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground, to bed rock, supported in a mound of stone, for ¼ sec. cor., marked on brass cap, S21 S22 1920 from which, A cedar, 6 ins. in diam., brs. S. 78¼° E., 106 lks. dist., mkd. ¼ S 22 BT. A pine, 12 ins. in diam., brs. N. 11° W., 369 lks. dist., mkd. ¼ S 21 BT. Continue over gently rolling land, thru. scattering timber. Ascend gradually over SW. slope.
55.00	Change to SE. slope, and continue gradual ascent.
62.00	Leave scattering, and enter dense timber, brs. SE. and NW.
66.00	Thence over W. slope, with slight change in elevation. Leave dense, and enter scattering timber.
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 15, 16, 21 and 22, marked on brass cap, T30N ROW S16 S15 S21 S22 1920 from which, A cedar, 12 ins. in diam., brs. N. 21¼° E., 191 lks.

Part (completion) of Subdivision of Township 30 N., R. 6 W.

Chains. dist., mkd. T30N ROW S15 BT.
 A pine, 12 ins. in diam., brs. S. 07 $\frac{3}{4}$ ° E., 337 lks.
 dist., mkd. T30N ROW S22 BT.
 A pine, 12 ins. in diam., brs. S. 22 $\frac{3}{4}$ ° W., 121 lks.
 dist., mkd. T30N ROW S21 BT.
 A cedar, 20 ins. in diam., brs. N. 38 $\frac{1}{2}$ ° W., 360 lks.
 dist., mkd. T30N ROW S16 BT.

Land, gently rolling.
 Soil, gravelly clay loam, 2nd rate.
 Timber, cedar and pine, scattering and dense as noted.
 Undergrowth, none.
 Good grass.

40.00 S. 89° 56' E., on a random line, bet. secs. 15 and 22.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.10 Fall 2 lks. N. of the cor. of secs. 14, 15, 22 and 23.
 Thence,
 N. 89° 55' W., on a true line, bet. secs. 15 and 22.
 Over gently rolling land, thru. very scattering timber.
 Ascend very gradually over NE. slope.
 40.05 Low spur, slopes N. Set an iron post, 3 ft. long, 1 in.
 in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor.,
 marked on brass cap,

$\frac{1}{4}$ S 15
 S 22
 1920

from which,
 A cedar, 10 ins. in diam., brs. N. 43° E., 335 lks.
 dist., mkd. T S 15 BT.
 A cedar, 4 ins. in diam., brs. S. 39° E., 338 lks.
 dist., mkd. T S 22 BT.

Continue over gently rolling land, thru. very scattering
 timber, along N. slope, with slight change in elevation.
 50.00 Change to NE. slope, and ascend very gradually.
 69.60 Fence, brs. N. 6° E. and S. 6° W.
 80.10 The cor. of secs. 15, 16, 21 and 22.
 Land, gently rolling.
 Soil, gravelly clay loam, 2nd rate.
 Timber, very scattering cedar and pine.
 Undergrowth, none.
 Good grass.

N. 0° 02' W., bet. secs. 15 and 16.
 Over gently rolling land, thru. scattering timber, along
 E. slope, with slight change in elevation.
 10.00 Thence over W. slope, descending very gradually. Leave
 scattering, and enter dense timber.
 31.59 Fence brs. N. 82 $\frac{1}{4}$ ° W. and S. 82 $\frac{1}{4}$ ° E.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
 S16 | S15
 1920

from which,
 A pine, 10 ins. in diam., brs. S. 88 $\frac{3}{4}$ ° E., 93 lks.
 dist., mkd. T S 15 BT.
 A pine, 12 ins. in diam., brs. S. 88 $\frac{1}{4}$ ° W., 86 lks.
 dist., mkd. T S 16 BT.

Continue over gently rolling land, thru. dense timber,
 along W. slope, with slight change in elevation.
 60.00 Change to E. slope, and descend very gradually. Leave
 dense, and enter scattering timber.
 70.00 Descend gradually over N. slope, to
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins.

26 Part (completion) of Subdivision lines of T.30 N. R.6 W.

Chains.

in the ground, for cor. of secs. 9, 10, 15 and 16, marked on brass cap,

T30N | Rd. W.
S 9 | S10
S16 | S15
1920

from which,

A pine, 6 ins. in diam., brs. S. 24 1/2° E., 79 lks.

dist., mkd. T30N ROW S15 BT.

A pine, 14 ins. in diam., brs. S. 68 1/2° W., 186 lks.

dist., mkd. T30N ROW S16 BT.

A cedar, 8 ins. in diam., brs. N. 53° W., 20 lks.

dist., mkd. T30N ROW S9 BT.

Land dig a pit 10x10x12 ins., NE. of cor. 3 ft. dist.

Land, gently rolling. Soil, gravelly clay loam, 2nd rate.

Timber, cedar and pine, dense and scattering as noted.

Undergrowth, none.

Good grass.

S. 89° 55' E., on a random line, bet. secs. 10 and 15.

40.00 Set temp. 1/4 sec. cor.

80.00 Fall 2 lks. S. of the cor. of secs. 10, 11, 14 and 15,

N. 89° 50' W., on a true line, bet. secs. 10 and 15.

Over gently rolling land, thru. very scattering timber.

Ascend very gradually over NE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in

the ground, for 1/4 sec. cor., marked on brass cap,

1/4 S 10
S 15
1920

from which,

A cedar, 6 ins. in diam., brs. N. 59 1/4° E., 253 lks.

dist., mkd. S 10 BT.

A cedar, 6 ins. in diam., brs. S. 53 1/4° E., 121 lks.

dist., mkd. S 15 BT.

Continue over gently rolling land, thru. very scattering timber. Asc. slightly over NE. slope, to

48.00 Drain, course NE. Ascend over E. slope, to

60.00 Thence over NE. slope, ascending very gradually to

80.00 The cor. of secs. 9, 10, 15 and 16.

Land, gently rolling.

Soil, gravelly clay loam, 2nd rate.

Timber, very scattering cedar and pine.

Undergrowth, none.

Good grass.

N. 0° 02' W., bet. secs. 9 and 10.

Over gently rolling land, thru. scattering timber.

Descend slightly over N. slope.

11.00 Center of head of draw, 6 chs. wide, course NW. Asc. gradu-

ally over S. slope.

15.00 Leave scattering, and enter dense timber.

35.00 Descend gradually over NW. slope, to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in

the ground, for 1/4 sec. cor., marked on brass cap,

S 9 | S10
1920

from which,

Chains.

A pine, 8 ins. in diam., brs. N. 80° E., 60 lks.
 dist., mkd. $\frac{1}{4}$ S 10 BT.
 A pine, 12 ins. in diam., brs. S. 37° W., 84 lks.
 dist., mkd. $\frac{1}{4}$ S 9 BT.
 Continue over gently rolling land, thru. dense timber.
 Descend slightly over NW. slope, to
 Head of draw, course SW. Ascend 30 ft., over S. slope, to
 Thence over W. slope, descending very gradually.
 Leave dense, and enter scattering timber.
 Drain, course W. Ascend slightly over SW. slope, to
 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in
 the ground, for cor. of secs. 3, 4, 9 and 10, marked on
 brass cap,

42.20
 45.00
 55.00
 67.50
 80.00

T30N	R6 W
S 4	S 3
S 9	S 10
1920	

from which,
 A pine, 8 ins. in diam., brs. N. 44° E., 89 lks.
 dist., mkd. T30N R6W S3 BT.
 A pine, 8 ins. in diam., brs. S. 47½° E., 29 lks.
 dist., mkd. T30N R6W S10 BT.
 A pine, 8 ins. in diam., brs. S. 12½° W., 129 lks.
 dist., mkd. T30N R6W S9 BT.
 A pine, 8 ins. in diam., brs. N. 43° W., 177 lks.
 dist., mkd. T30N R6W S4 BT.

Land, gently rolling.
 Soil, gravelly clay loam, 2nd rate.
 Timber, cedar and pine, scattering and dense as noted.
 Undergrowth, none.
 Good grass.

S. 89° 56' E., on a random line, bet. secs. 3 and 10.
 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect the cor. of secs. 2, 3, 10 and 11.
 Thence,
 N. 89° 56' W., on a true line, bet. secs. 3 and 10.
 Over gently rolling land, devoid of timber or undergrowth.
 Descend very gradually, over NW. slope.
 Ascend very gradually over NE. slope.
 Enter very scattering timber.
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

40.00
 80.12
 20.00
 25.00
 40.06


$\frac{1}{4}$	S 3
	S 10
1920	

from which,
 A cedar, 6 ins. in diam., brs. S. 2½° E., 208 lks.
 dist., mkd. $\frac{1}{4}$ S 10 BT.
 A cedar, 6 ins. in diam., brs. N. 6° W., 223 lks.
 dist., mkd. $\frac{1}{4}$ S 3 BT.
 Continue over gently rolling land, thru. very scattering
 timber, along N. slope, ascending slightly to
 Descend gradually over SE. slope, to
 Thence over S. slope, descending slightly.
 The cor. of secs. 3, 4, 9 and 10.
 Land, gently rolling, nearly level.
 Soil, gravelly clay loam, 2nd rate.
 Timber, very scattering cedar in W. 55 chs. only.
 Undergrowth, none.
 Good grass.

70.00
 75.00
 80.12

28 Part (completion) of Subdivision lines of T. 30 N., R. 6 W.

Chains.
 . N. 0° 16' E. on a random line, bet. secs. 3 and 4.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.77 Fall 9 lks. W. of the cor. of secs. 3, 4, 33 and 34, on N. bdy. of Tp., hereinbefore described.
 Thence,
 S. 0° 20' W., on a true line, bet. secs. 3 and 4.
 Over level land, devoid of timber or undergrowth.
 5.00 Leave level, and enter gently rolling land. Descend slightly over W. slope; enter scattering timber.
 20.00 Ascend gradually over N. slope, to.
 30.00 Thence over W. slope, descending very gradually.
 39.77 Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,



from which,

A pine, 8 ins. in diam., brs. S. 84 $\frac{1}{2}$ ° E., 223 lks. dist., mkd. $\frac{1}{4}$ S 3 BT.


A cedar, 17 ins. in diam., brs. S. 39 $\frac{1}{4}$ ° W., 171 lks. dist., mkd. $\frac{1}{4}$ S 4 BT.

Continue over gently rolling land, thru. scattering timber, along W. slope, with slight change in elevation.

75.00 Ascend gradually over N. slope.
 79.77 The cor. of secs. 3, 4, 9 and 10.
 Land, N. 5 chs. level; remainder, gently rolling.
 Soil, gravelly clay loam, 2nd rate.
 Timber, scattering cedar and pine in S. 75 chs. only.
 Undergrowth, none.
 Good grass.

From the cor. of secs. 4, 5, 32 and 33, on S. bdy. of Tp., described in Book "A,"
 N. 0° 3' W., bet. secs. 32 and 33.
 Over gently rolling land, devoid of timber or undergrowth.
 Descend in draw, course N.

5.00 Leave draw, course NE. from S. Descend gradually over NE. slope.
 35.40 Draw, 20 lks. wide, 6 ft. deep, course E. Asc. 50 ft. over S. slope, to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,



from which,

A pine, 12 ins. in diam., brs. N. 17 $\frac{1}{2}$ ° E., 113 lks. dist., mkd. $\frac{1}{4}$ S 33 BT.

A pine, 6 ins. in diam., brs. N. 76 $\frac{3}{4}$ ° W., 134 lks. dist., mkd. $\frac{1}{4}$ S 32 BT.

Continue over gently rolling land. Asc. 50 ft., over S. slope.

44.87 Enter scattering timber and undergrowth.
 52.73 Spur, slopes E. Desc. 50 ft., over N. slope.
 Center of draw, 2 chs. wide, course E. Asc. 50 ft., over S. slope.
 64.18 Spur, slopes SE. Desc. 25 ft., over NE. slope.
 67.56 Draw, course E. Asc. 30 ft., over SE. slope, to
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 14 ins. in the ground to bed rock, supported in a mound of stone, for cor. of secs. 28, 29, 32 and 33, marked on brass cap,

Part (completion) of Subdivision lines of T.30 N., R.6 W. 29

Chains.

T30N	Ro W
S29	S28
S32	S33
1920	

from which,
 A pine, 10 ins. in diam., brs. N. 54³/₄° E., 298 lks.
 dist., mkd. T30N RoW S28 BT.
 A pine, 8 ins. in diam., brs. S. 8° E., 217 lks.
 dist., mkd. T30N RoW S33 BT.
 A cedar, 12 ins. in diam., brs. S. 58° W., 64 lks.
 dist., mkd. T30N RoW S32 BT.
 A cedar, 28 ins. in diam., brs. N. 35° W., 293 lks.
 dist., mkd. T30N RoW S29 BT.

Land, gently rolling.
 Soil, sandy and gravelly loam, 1st and 2nd rate.
 Timber, scattering cedar and pine in N. half only.
 Undergrowth, scattering scrub cedar and sage brush in
 N. half only.
 Good grass.

- 40.00 S. 89° 54' E., on a random line, bet. secs. 28 and 33.
- Set temp. ¹/₄ sec. cor.
- 80.02 Fall 5 lks. S. of the cor. of secs. 27, 28, 33 and 34.
- Thence,
- N. 89° 56' W., on a true line, bet. secs. 28 and 33.
- Over gently rolling land, thru. scattering undergrowth.
- Desc. slightly over W. slope, to
- 10.46 Old road, brs. NE. and SW. Enter very scattering timber.
- Thence over N. slope, descending very gradually.
- 25.00 Leave timber.
- 31.90 East edge of draw, brs. N. and S. Road brs. N. and S. Ex-
- tends northerly to National Tank, and Southerly to
- Seligman; thence across draw, course N. Leave timber.
- 32.30 Drain, 10 lks. wide, 4 ft. deep, course N. Continue across
- draw.
- 40.01 W. edge of draw, brs. N. and S. Set an iron post, 3 ft. long,
- 1 in. in diam., 28 ins. in the ground, for ¹/₄ sec. cor.,
- marked on brass cap,


¹ / ₄	S 28
	S 33
	1920

- and dig pits, 18x18x12 ins., one each N. and W. of cor.,
- 3 ft. dist.
- Continue over gently rolling land, thru. scattering un-
- dergrowth. Asc. 130 ft., over SE. slope, to sec. cor.
- 42.40 Road brs. N. and S. 20° W.
- 49.97 Enter scattering timber, brs. NE. and SW.
- 80.02 The cor. of secs. 28, 29, 32 and 33.
- Land, gently rolling.
- Soil, gravelly loam, 2nd and 3rd rate.
- Timber, scattering cedar and pine.
- Undergrowth, scattering scrub cedar and sagebrush.
- Fair grass.

- N. 0° 03' W., bet. secs. 28 and 29.
- Over rolling land, thru. scattering timber and undergrowth.
- Ascend gradually over SE. slope.
- 10.00 Descend 45 ft., over N. slope.
- 16.07 Draw, course NE. Ascend 25 ft., over SE. slope.
- 23.86 Spur, slopes E. Desc. 4¹/₂ ft., over N. slope.
- 33.32 Draw, course E. Asc. gradually over SE. slope, to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 15 ins. in
- the ground, to bed rock, supported in a mound of stone
- for ¹/₄ sec. cor., marked on brass cap,

30 Part(completion) of Subdivision lines of T130 N. R. 6 W.

Chains.



from which,

A pine, 17 ins. in diam., brs. N. $48\frac{1}{2}^\circ$ E., 498 lks.
dist., mkd. $\frac{1}{4}$ S. 28 BT.

A cedar, 16 ins. in diam., brs. S. $62\frac{1}{2}^\circ$ W., 540 lks.
dist., mkd. $\frac{1}{4}$ S. 29 BT.


Continue over rolling land, thru. scattering timber and undergrowth.

Ascend 74 ft., over SE. slope.

52.62 Spur, slopes E. Desc. 100 ft., over N. slope.

67.56 Draw, course NE. Asc. 60 ft., over SE. slope, to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., on surface rock, in a mound of stone, for cor. of secs. 20, 21, 28 and 29, marked on brass cap,



from which,

A cedar, 8 ins. in diam., brs. N. 37° E., 41 lks.
dist., mkd. T30N R6W S21 BT.

A pine, 8 ins. in diam., brs. S. $62\frac{1}{4}^\circ$ E., 64 lks.
dist., mkd. T30N R6W S28 BT.

A cedar, 8 ins. in diam., brs. S. $54\frac{3}{4}^\circ$ W., 47 lks.
dist., mkd. T30N R6W S29 BT.

A cedar, 8 ins. in diam., brs. N. 53° W., 76 lks.
dist., mkd. T30N R6W S20 BT.

Land, rolling.

Soil, gravelly loam, 2nd and 3rd rate.

Timber, scattering cedar and pine.

Undergrowth, scattering scrub cedar and sage brush.

Fair grass.

40.00 S. $89^\circ 50'$ E., on a random line, bet. secs. 21 and 28.
Set temp. $\frac{1}{4}$ sec. cor.

80.10 Fall 7 lks. S. of the cor. of secs. 21, 22, 27 and 28.

Thence N. $89^\circ 59'$ W., on a true line, bet. secs. 21 and 28.


Over rolling land, thru. scattering timber and undergrowth.

Descend very gradually over NW. slope.

30.12 Draw, course NW. Asc. 30 ft., over E. slope.

35.00 Spur, slopes N. Desc. gradually over W. slope, to

40.05 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

Continue over rolling land, thru. scattering timber and undergrowth.

Descend 40 ft., over W. slope.

50.10 Draw, course N. 15° E. Thence over NE. slope, with slight change in elevation.

60.18 Road, brs. N. and S. Extends northerly to National Tank in sec. 21, and southerly to Seligman.

70.20 Draw, course NE. Asc. 80 ft., over E. slope, to

80.10 The cor. of secs. 20, 21, 28 and 29.

Land, rolling.

Soil, gravelly loam, 2nd and 3rd rate.

Timber, scattering cedar and pine.

Undergrowth, scattering scrub oak and sage brush. Fair grass.

Chains.

- N.0°03' W., bet. secs.20 and 21.
Over gently rolling land, thru scattering timber and undergrowth. Desc.70 ft., over NE. slope.
4.95 Leave timber, brs. SE. and NW.
9.94 Draw, course NE. Asc. 25 ft., over SE. slope.
34.89 Spur, slopes NE. Desc. 35 ft., over NE. slope, to
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground, to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
 S20 | S21
 |
 1920

- and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
Continue over gently rolling land, thru, scattering undergrowth, descending very gradually over NE. slope.
52.00 Road, brs. SE. and NW.
80.00 West edge of National Wash, brs. N.5°W., and S.5°E. Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 16, 17, 20 and 21, marked on brass cap,

T30N | R6 W
 S17 | S16
 S20 | S21
 |
 1920

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
Land, gently rolling.
Soil, sandy and gravelly loam, 1st and 2nd rate.
Timber, scattering cedar and pine, where noted.
Undergrowth, scattering scrub cedar and sagebrush.
Good grass.

- 40.00 S. 89°59' E., on a random line, bet. secs. 16 and 21.
Set temp. $\frac{1}{4}$ sec. cor.
80.04 Fall 6 lks. S. of the cor. of secs. 15, 16, 21 and 22.
Thence,
S. 89°58' W., on a true line, bet. secs. 16 and 21.
Over level land, thru. scattering timber, and undergrowth.
6.00 Leave level, and enter gently rolling land. Descend 70 ft.
22.00 Leave timber, brs. N. and S.
40.02 E. edge of draw, brs. N. 20° W. and S. 20° E. Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 16
 S 21
 1920

- and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
Continue over gently rolling, land, thru. scattering, undergrowth, across draw, course N. 20° W.
45.00 W. edge of draw, brs. N. 20° W. and S. 20° E. Leave draw. Enter very scattering timber. Asc. 30 ft., over NE. slope, to
60.00 Thence over N. slope, with slight change in elevation: Leave timber.
70.03 Fence brs. S. 5 $\frac{1}{4}$ ° E. and N. 5 $\frac{1}{4}$ ° W. House brs. S. 26° W. Corral brs. S. 24° W.
71.50 Desc. 40 ft., over W. slope, to
76.00 E. edge of National Wash, brs. N. and S. Thence across said wash, course N.

32 Part (completion) of Township, 30 North, Range 6 West.

Chains,

77.80

80.04

Road, brs. N. and S. Extends southerly to Seligman.
 The cor. of secs. 10, 17, 20 and 21 at W. edge of National Wash, brs. N. 5° W. and S. 5° W.
 Land, E. 6 chs. level; remainder gently rolling.
 Soil, gravelly clay, 2nd rate.
 Timber, scattering cedar and pine, where noted.
 Undergrowth, scattering scrub cedar and sage brush.
 Fair grass.

25.50

27.50


30.00

35.00

39.50

40.00

N. 0° 03' W., bet. secs. 10 and 17.
 Over gently rolling land, devoid of timber or undergrowth.
 Descend very gradually in National Wash, course N. 20° E., to
 W. edge of National Wash, brs. N. 20° E. and S. 5° W. Leave
 wash; ascend 15 ft. over SE. slope, to
 Thence over E. slope, descending slightly to
 Descend 30 ft. over NE. slope, to
 W. edge of National Wash, brs. N. 0° W. and S. 0° E. thence
 across said wash, course N.
 Road, brs. SE. and NW.
 Set an iron post 3 ft. long, 1 in. in diam., 28 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,




and raise a mound of stone, 2 ft. base, 1½ ft. high,
 W. of cor.
 Fence cor. brs. N. 77½° E., about 8 chs. dist., from which
 fence extends S. 5½° E. and S. 82½° E.
 Continue in National Wash, course N. Descend very gradually
 to sec. cor.

67.60

80.00

Road brs. NE. and SW.
 E. edge of National Wash, brs. N. 20° W. and S. 20° E. Set an
 iron post, 3 ft. long, 2 ins. in diam., 28 ins. in the
 ground, for cor. of secs. 8, 9, 16 and 17, marked on
 brass cap,



and raise a mound of stone, 2 ft. base, 1½ ft. high, W.
 W. of cor. brs. N. 77½° E., about 8 chs. dist., from which
 Land, gently rolling. Soil, sandy loam, 1st rate.
 Timber, none.
 Undergrowth, none.
 No grass.

40.00

80.02

N. 89° 58' E., on a random line, bet. secs. 9 and 16.
 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect the cor. of secs. 9, 10, 15 and 16.
 Thence,
 S. 89° 58' W., on a true line, bet. secs. 9 and 16.
 Over rolling land, thru. scattering timber, along N. slope,
 with slight change in elevation.
 Descend gradually over NW. slope.
 S. edge of valley or draw, brs. NE. and SW. Thence across
 valley or draw, draining S. 70° W. from NE. Leave tim-
 ber.
 N. edge of valley or draw, brs. N. 40° E. and S. 70° W. Set
 an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

BOOK 336

Part (completion) of Subdivision lines of T.30 N., R. 6 W.

Chains.

1/4 S 9
S 16
1920

- and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.
- From cor., U.S.L.M. No. 3033, brs. N. 40° 23' W., 22.19 chs. dist.
- Continue over rolling land, devoid of timber or undergrowth. Asc. 35 ft., over SE. slope.
- 51.00 Descend 40 ft., over S. slope. Enter scattering timber.
- 61.00 House, brs. S. 30 lks. dist. Ascend 25 ft., over S. slope.
- 63.70 Mine, brs. N. 100 lks. dist.
- 65.70 Dugout on line.
- 67.00 Descend 80 ft. over SW. slope to sec. cor.
- 75.00 Leave timber.
- 80.02 The cor. of secs. 8, 9, 16 and 17, at E. edge of National Wash, brs. N. 20° W. and S. 20° E.
- Land, rolling.
- Soil, gravelly clay, 2nd rate.
- Timber, scattering cedar and pine, where noted.
- Undergrowth, none.
- Fair grass.

-
- N. 0° 03' W., bet. secs. 8 and 9.
 - Over rolling land, devoid of timber or undergrowth, along W. slope, with slight change in elevation.
 - 8.00 Draw, course W. from N. 5° E. at the E. edge of National Wash, brs. N. 20° W. and S. 20° W. Asc. 40 ft., over S. slope, to
 - 14.00 Point of spur, slopes S. 5° E. Desc. 35 ft., over E. slope, to
 - 20.00 Bend in draw, course S. 5° E. from N. 20° W. Asc. 50 ft., over SE. slope.
 - 30.00 Same spur, slopes S. from NE. Desc. 80 ft., over NW. slope, to
 - 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground, to bed rock, supported in a mound of stone, for 1/4 sec. cor., marked on brass cap,

1/4
S 8 | S 9
1920

- and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.
- Continue over rolling land, devoid of timber or undergrowth.
- Descend slightly over NW. slope; to
- 40.50 East edge of National Wash, brs. NE. and SW. Thence across said wash, course NE.
- 54.00 W. edge of National Wash; brs. NE. and SW. Leave said wash; ascend slightly over E. slope, to
- 60.00 Ascend 60 ft., over SE. slope.
- 65.00 Enter scattering timber, brs. NE. and SW.
- 75.00 Spur, slopes E. Desc. 60 ft., over N. slope, to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in mound of stone, for cor. of secs. 4, 5, 8 and 9, marked on brass cap,

T30N | R6 W
S 5 | S 4
S 8 | S 9
1920

- and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.
 - Land, rolling.
 - Soil, gravelly loam, 2nd rate.
 - Timber, scattering cedar and pine in N. 15 chs. only.
 - Undergrowth, none.
 - Fair grass.
-

34. Part (Completion) of Subdivision lines of T.30 N., R.6 W.

Chains.

N.89°58'E., on a random line, bet. secs.4 and 9.
 40.00 Set temp. $\frac{1}{4}$ sec.cor.
 80.08 Fall 7 lks.N.of the cor.of secs.3,4,9 and 10.
 Thence,
 N.89°59'W., on a true line, bet. secs.4 and 9.
 Over rolling land, thru. scattering timber. Desc.gradually
 over SW.slope,to
 16.50 Head of drain, course SW. Asc. gradually over SE.slope,to
 25.00 Thence over S.slope, descending very gradually to
 40.04 Set an iron post, 3 ft.long, 1 in. in diam., 20 ins. in
 the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,

$$\begin{array}{c} S \\ \frac{1}{4} \\ 4 \\ S \\ 9 \\ 1920 \end{array}$$

 from which,
 A pine, 6 ins. in diam., brs.S.19 $\frac{1}{2}$ °E., 98 lks.
 dist., mkd. $\frac{1}{4}$ S 9 BT.
 A pine, 10 ins. in diam., brs.N.51°W., 166 lks.
 dist., mkd. $\frac{1}{4}$ S 4 BT.
 Continue over rolling land, thru. scattering timber. Desc.
 130 ft., over SW.slope.
 57.00 Mouth of coulee, course SW. Desc.slightly along foot of
 S.slope.
 65.00 E.edge of National Wash, brs.NW. and SE. Thence across
 National Wash; course NW. Desc. slightly to
 70.00 Center of National Wash, course NW. Asc. slightly to
 75.00 W.edge of National Wash, brs.NW. and SE. Leave said
 wash; ascend 25 ft. over NE.slope.
 78.00 Descend very gradually over N.slope,to
 80.08 The cor.of secs.4,5,8 and 9.
 Land, rolling:
 Soil, gravelly and rocky clay loam, 2nd and 3rd rate.
 Timber, scattering cedar and pine.
 Undergrowth, none.
 Poor grass.

N.0°19'E., on a random line, bet. secs.4 and 5.
 40.00 Set temp. $\frac{1}{4}$ sec.cor.
 80.06 Fall 5 lks.W.of the cor.of secs.4,5, 32 and 33, on N.bdy.
 of Tp., hereinbefore described.
 Thence,
 S.0°21'W., on a true line, bet. secs.4 and 5.
 Over rolling land, thru. dense timber. Asc. gradually
 over N.slope,to
 10.00 Desc. 40 ft., over SW.slope.
 16.80 Head of draw, course NW. Asc. 50 ft., over N.slope.
 30.00 Spur, slopes N.30°W. Desc.100 ft., over W.slope,to $\frac{1}{4}$ sec.
 cor.
 35.00 Leave timber, brs.SE. and SW.
 40.06 Set an iron post, 3 ft.long, 1 in. in diam., 6 ins. in
 the ground, to bed rock, supported in a mound of stone
 for $\frac{1}{4}$ sec. cor., marked on brass cap,

$$\begin{array}{c} \frac{1}{4} \\ S \\ 5 \\ S \\ 4 \\ 1920 \end{array}$$

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
 W.of cor.
 Continue over rolling land, devoid of timber or under-
 growth. Descend 50 ft. over SW.slope.
 48.00 Draw, course NW. Ascend 65ft, over N.slope.
 56.00 Spur, slopes E. from NW. Desc. 40 ft., over SE.slope, to
 60.00 E.edge of National Wash, brs.NW. and SE. Thence across
 said wash, course NW.
 70.00 W.edge of National Wash, brs.NW. and SE. Leave said wash.
 Ascend 30 ft., over N. slope, to

Chains.	
80.06	The cor. of secs. 4, 5, 8 and 9. Land, rolling. Soil, gravelly and rocky, 3rd and 4th rate. Timber, dense cedar and pine in N. 35 chs. only. Undergrowth, none. Poor grass.
10.00	From the cor. of secs. 5, 6, 31 and 32, on S. bdy. of Tp., described in Book "A," N. 0° 03' W., bet. secs. 31 and 32. Over level land, thru. scattering timber. Leave level, and enter rolling land. Asc. 35 ft., over SE. slope.
15.00	Leave timber, brs. SE. and NW.
20.00	Spur, slopes E. from SW. extends 10 chs. E. of line. Desc. 40 ft., over N. slope.
30.00	Center of draw, 1 ch. wide, course SE. Asc. 60 ft., over S. slope, to $\frac{1}{4}$ sec. cor.
35.00	Enter dense timber and undergrowth, brs. E. and W.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,
	$\frac{1}{4}$ S31 S32 1920
	from which,
	A pine, 12 ins. in diam., brs. S. 87 $\frac{1}{2}$ ° E., 37 lks. dist., mkd. S 32 BT. A pine, 8 ins. in diam., brs. S. 41 $\frac{3}{4}$ ° W., 8 lks. dist., mkd. S 31 BT.
47.59	Continue over rolling land, thru. dense timber and undergrowth. Ascend 20 ft., over SE. slope.
57.57	Spur, slopes NE. Desc. 35 ft., over N. slope.
62.54	Draw, course SE. Asc. 50 ft., over SW. slope, to sec. cor.
80.00	Leave timber, brs. SE. and NW. continue thru. dense undergrowth. Set an iron post, 3 ft. long, 2 ins. in diam., on surface rock, in a mound of stone, for cor. of secs. 29, 30, 31 and 32, marked on brass cap,
	T30N R6W S30 S29 S31 S32 1920
	and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
	Land, S. 10 chs. level; remainder rolling. Soil, gravelly and rocky, 2nd and 3rd rate. Timber, cedar and pine, scattering and dense where noted. Undergrowth, dense scrub cedar and sage brush in N. 45 chs. only.
40.00	S. 89° 54' E., on a random line, bet. secs. 29 and 32. Set temp. $\frac{1}{4}$ sec. cor.
80.08	Wall 2 lks. N. of the cor. of secs. 28, 29, 32 and 33. Thence, N. 89° 53' W., on a true line, bet. secs. 29 and 32. Over rolling land, thru. dense timber and undergrowth. Ascend slightly over SE. slope, to
15.00	Draw, course SE. Continue very gradual ascent over SE. slope.
20.00	Leave timber, brs. N. and S. Continue thru. dense undergrowth.

36 Part (completion) of Subdivision lines of T.30 N., R.6 W.


Chains.	
40.04	Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground, to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap, $\frac{1}{4}$ S 29 S 32 1920 and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor. Continue over rolling land, thru. dense undergrowth, ascending very gradually over SE. slope to sec. cor.
65.10	Draw, course SE.
80.08	The cor. of secs. 29, 30, 31 and 32. Land, rolling. Soil, rocky, 3rd rate. Timber, dense cedar and pine in E. 20 chs. only. Undergrowth, dense scrub cedar, sage brush and dogwood. Poor grass.

40.00	N. $89^{\circ}54'$ W., on a random line, bet. secs. 30 and 31. Set temp. $\frac{1}{4}$ sec. cor.
79.23	Fall 6 lks. S. of the cor. of secs. 25, 30, 31 and 36, on W. bdy. of Tp., described in Book "C." Thence, S. $89^{\circ}51'$ E., on a true line, bet. secs. 30 and 31. Over gently rolling land, thru. dense timber and undergrowth. Desc. slightly over E. slope.
3.25	Leave dense timber, brs. N. and S.
18.25	Enter dense timber; brs. N. and S.
23.00	Ascend very gradually over W. slope.
30.25	Low spur, slopes E. Desc. very gradually over E. slope.
39.23	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap, $\frac{1}{4}$ S 30 S 31 1920 from which, A pine, 14 ins. in diam., brs. S. $44\frac{1}{2}^{\circ}$ E., 281 lks. dist., mkd. $\frac{1}{4}$ S 31 BT. A cedar, 16 ins. in diam., brs. N. $38\frac{1}{4}^{\circ}$ W., 93 lks. dist., mkd. $\frac{1}{4}$ S 30 BT.
60.00	Continue over gently rolling land, thru. dense timber and undergrowth. Desc. very gradually over E. slope. Leave dense timber, brs. N. and S. Continue thru. dense undergrowth.
71.00	Draw, course SE. Thence over S. slope, with slight change in elevation.
79.23	The cor. of secs. 29, 30, 31 and 32. Land, gently rolling. Soil, gravelly and rocky, 2nd and 3rd rate. Timber, dense cedar and pine, where noted. Undergrowth, dense scrub cedar, sagebrush and dogwood. Poor grass.

10.00	N. $0^{\circ}03'$ W., bet. secs. 29 and 30. Over gently rolling land, thru. dense undergrowth. Asc. gradually over S. slope.
15.00	Thence over E. slope, with slight change in elevation. Enter dense timber, brs. NE. and SW.
30.00	Leave timber, brs. E. and W. Continue thru. dense undergrowth. Desc. 20 ft. to
33.00	Draw, course E. Continue over E. slope, with slight change in elevation.
38.50	Enter scattering timber, brs. NE. and SW.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in

Chains.

the ground, to bed rock, supported in a mound of stone, for 1/4 sec. cor., marked on brass cap,



from which,

A cedar, 12 ins. in diam., brs. N. 19 3/4° E., 335 lks. dist., mkd. 1/4 S 29 BT.

A pine, 9 ins. in diam., brs. N. 18 1/4° W., 315 lks. dist., mkd. 1/4 S 30 BT.


Continue over gently rolling land, thru. scattering timber and dense undergrowth, along E. slope, descending gradually to

48.57 Draw, course E. Asc. gradually over S. slope.

58.00 Descend very gradually over N. slope.

07.26 Enter dense timber, brs. E. and W.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., on surface rock, in mound of stone, for cor. of secs. 19, 20, 29 and 30, marked on brass cap,



from which,

A cedar, 18 ins. in diam., brs. N. 67 1/4° E., 46 lks. dist., mkd. T30N R6W S20 BT.

A cedar, 10 ins. in diam., brs. S. 18 1/4° E., 98 lks. dist., mkd. T30N R6W S29 BT.

A cedar, 8 ins. in diam., brs. S. 47 3/4° W., 107 lks. dist., mkd. T30N R6W S30 BT.

A pine, 12 ins. in diam., brs. N. 42 3/4° W., 71 lks. dist., mkd. T30N R6W S19 BT.

Land, gently rolling.

Soil, gravelly and rocky, 2nd and 3rd rate.

Timber, scrub cedar and pine, dense and scattering where noted.

Undergrowth, dense scrub cedar, sagebrush and dog wood. Fair grass.

40.00

S. 89° 53' E., on a random line, bet. secs. 20 and 29.

80.12

Set temp. 1/4 sec. cor.

Run 12 lks. S. of the cor. of secs. 20, 21, 28 and 29.

Thence,

N. 89° 58' W., on a true line, bet. secs. 20 and 29.

Over rolling land, thru. dense timber and undergrowth.

Descend 70 ft., over NW. slope.

9.60

Draw, course NE. Asc. 75 ft., over NE. slope.

23.40


Leave dense, and enter scattering timber, brs. NW. and SE.

28.50

Desc. 40 ft., over NW. slope, to 1/4 sec. cor.

40.06

Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground, to bed rock, supported in a mound of stone, for 1/4 sec. cor., marked on brass cap,



from which,

A cedar, 6 ins. in diam., brs. N. 60° E., 8 lks. dist., mkd. 1/4 S 20 BT.

and raise a mound of stone 2 ft. base, 1 1/2 ft. high, N. of cor.

Continue over rolling land, thru. very scattering timber and dense undergrowth.

38 Part (completion) of Subdivision lines of T.30 N., R.6 W.

Chains.	
44.82	Descend 20 ft., over NW. slope.
56.12	Draw, course NE. Ascend 75 ft., over E. slope.
60.70	Point of spur, slopes SE. Desc. 40 ft., over SW. slope.
65.00	Draw, course SE. Asc. 50 ft. over NE. slope to sec. cor.
80.12	Leave very scattering, and enter dense timber, brs. SE. and NW. The cor. of secs. 19, 20, 29 and 30. Land, rolling. Soil, gravelly, rocky, 2nd and 3rd rate. Timber, cedar and pine, dense and scattering as noted. Undergrowth, dense scrub cedar and sagebrush. Fair grass.
40.00	N. 89° 51' W., on a random line, bet. secs. 19 and 30. Set temp. $\frac{1}{4}$ sec. cor.
79.11	Fall 10 lks. S. of the cor. of secs. 19, 24, 25 and 30, on W. bdy. of Tp., described in Book "C." Thence, S. 89° 47' E., on a true line, bet. secs. 19 and 30. Over gently rolling land, thru. scattering timber and undergrowth. Desc. slightly over E. slope.
3.00	Leave scattering, and enter dense timber. Continue thru. scattering undergrowth.
8.10	Ascend gradually over NW. slope.
24.00	Spur, slopes N. Desc. gradually over E. slope.
29.00	Leave dense, and enter scattering timber, brs. N. and S.
34.12	Draw, course N. Asc. gradually over W. slope.
38.00	Enter dense timber, brs. N. and S.
39.11	Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground, to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap, $\begin{array}{r} \frac{1}{4} \text{ S } 19 \\ \hline \text{S } 30 \\ 1920 \end{array}$
	from which, A cedar, 10 ins. in diam., brs. S. 83° W., 13 lks. dist., mkd. $\frac{1}{4}$ S 30 BT. A pine, 8 ins. in diam., brs. N. 62° W., 68 lks. dist., mkd. $\frac{1}{4}$ S 19 BT.
44.12	Continue over gently rolling land, thru. dense timber and scattering undergrowth. Asc. gradually over W. slope. Spur, slopes NE. Extends 4 chs. NE. of line. Desc. gradually over E. slope.
54.11	Draw, course NW. Ascend gradually over NW. slope, to
79.11	The cor. of secs. 19, 20, 29 and 30. Land, gently rolling. Soil, gravelly and rocky, 2nd and 3rd rate. Timber, cedar and pine, scattering and dense as noted. Undergrowth, scattering scrub cedar and sage brush. Fair grass.
40.00	N. 0° 03' W., bet. secs. 19 and 20. Over gently, rolling land, thru. scattering timber and dense undergrowth. Desc. gradually over N. slope. Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap, $\begin{array}{r} \frac{1}{4} \\ \hline \text{S } 19 \text{ } \text{S } 20 \\ 1920 \end{array}$
	from which, A cedar, 24 ins. in diam., brs. S. 49° E., 218 lks. dist., mkd. $\frac{1}{4}$ S 20 BT.

Part(completion)of Subdivision lines of T30 N.,R.6 W.

Chains.

45.00 A pine, 8 ins. in diam., brs. N. 11 1/4° W., 382 lks.
 61.67 dist., mkd. 1/4 S 19 BT.
 80.00 Continue over gently rolling land, thru. scattering timber and dense undergrowth. Desc. gradually over N. slope. Draw, course NE. Asc. gradually over SE. slope. Spur, slopes NE. Desc. 75 ft., over N. slope, to Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 17, 18, 19 and 20, marked on brass cap,

T30N	Ro W
S18	S17
S19	S20
1920	

from which,
 A pine, 14 ins. in diam., brs. S. 70 1/2° E., 701 lks.
 dist., mkd. T30N RoW S20 BT.
 A pine, 8 ins. in diam., brs. S. 13 1/2° W., 471 lks.
 dist., mkd. T30N RoW S19 BT.
 A pine, 14 ins. in diam., brs. N. 20° W., 431 lks.
 dist., mkd. T30N RoW S18 BT.
 and raise a mound of stone 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, gently rolling.
 Soil, gravelly and rocky, 2nd and 3rd rate.
 Timber, scattering cedar and pine.
 Undergrowth, dense scrub cedar and sage brush.
 Fair grass.

40.00 S. 89° 58' E., on a random line, bet. secs. 17 and 20.
 80.24 Set temp. 1/4 sec. cor.
 Fall 19 lks. N. of the cor. of secs. 16, 17, 20 and 21.
 Thence N. 89° 50' W., on a true line, bet. secs. 17 and 20.
 Over rolling land, thru. scattering undergrowth.
 Ascend 80 ft., over E. slope.
 5.00 Enter dense timber, brs. N. and S.
 9.92 Spur, slopes N. Descend 25 ft., over NW. slope.
 14.91 Draw, course NE. Asc. 143 ft., over NE. slope.
 24.86 Leave timber, brs. S. and NW.
 29.71 Spur, slopes N. Desc. 55 ft. over NW. slope to 1/4 sec. cor.
 34.70 Enter dense timber, brs. NE. and SW.
 40.12 Set an iron post, 3 ft. long, 1 in. in diam., on surface rock, in a mound of stone, for 1/4 sec. cor., marked on brass cap,

1/4 S 17
S 20
1920

from which,
 A pine, 6 ins. in diam., brs. N. 69 1/2° E., 16 lks.
 dist., mkd. 1/4 S 17 BT.
 A cedar, 12 ins. in diam., brs. S. 11 1/2° E., 57 lks.
 dist., mkd. 1/4 S 20 BT.

45.00 Continue over rolling land, thru. dense timber and scattering undergrowth. Descend 25 ft. over NW. slope.
 50.00 Draw, course N. 15° E. Asc. 65 ft., over E. slope.
 54.94 Leave timber.
 Spur, slopes N. from SW. Desc. 50 ft., over NW. slope. Enter dense timber.
 65.33 Draw, course NE. Ascend 40 ft., over E. slope.
 70.30 Spur, slopes NE. Desc. 40 ft., over NW. slope, to
 79.25 Head of draw, course NE. Asc. slightly, to
 80.24 The cor. of secs. 17, 18, 19 and 20.
 Land, rolling. Soil, gravelly and rocky, 2nd and 3rd rate.
 Timber, dense cedar and pine, where noted.
 Undergrowth, scattering scrub cedar and sagebrush.
 Fair grass.

40.00 N. 89° 47' W., on a random line, bet. secs. 18 and 19.
 78.96 Set temp. 1/4 sec. cor.
 Fall 2 lks. S. of the cor. of secs. 13, 18, 19 and 24, on W. bdy. of Tp., described in Book "C."
 Thence,
 S. 89° 46' E., on a true line, bet. secs. 18 and 19.

40. Part (completion) of Subdivision lines of T. 30 N., R. 6 W.

Chains.

Over gently rolling land, thru dense timber and scattering undergrowth. Desc. very gradually over E. slope.
 4.00 Leave dense, and enter scattering timber, brs. N. and S.
 24:00 Leave scattering, and enter dense timber, brs. SE. and NW.
 38.96 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap,

S 18

S 19

1920

from which,

A pine, 12 ins. in diam., brs. N. $21\frac{1}{4}^{\circ}$ E., 223 lks.
 dist., mkd. "S 18 BT."

A cedar, 10 ins. in diam., brs. S. $47\frac{1}{2}^{\circ}$ W., 110 lks.
 dist., mkd. "S 19 BT."

Continue over gently rolling land, thru dense timber and scattering undergrowth.

Descend 100 ft., over NE. slope.

74.00 Draw, course N. from SW. Ascend 30 ft., over W. slope.

78.00 Spur, slopes N. from SW. Desc. slightly to

78.96 The cor. of secs. 17, 18, 19 and 20.

Land, gently rolling.

Soil, gravelly and rocky, 2nd and 3rd rate.

Timber, cedar and pine, scattering and dense as noted.

Undergrowth, scattering scrub cedar and sage brush.

Fair grass.

N. $0^{\circ}03'$ W., bet. secs. 17 and 18.

Over rolling land, thru scattering timber and undergrowth.

Ascend gradually over E. slope.

6.00 Spur, slopes NE. from S. Descend gradually over NW. slope.

12.37 Draw, course E. from SW. Asc. 40 ft., over S. slope.

14.98 Spur, slopes SE. Desc. slightly over N. slope.

20.00 Draw, course SE. Asc. 135 ft., over SW. slope, to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground, to bedrock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap,

S18 | S17

1920

from which,

A pine, 8 ins. in diam., brs. S. 21° E., 150 lks.
 dist., mkd. "S 17 BT."

A pine, 16 ins. in diam., brs. S. 70° W., 119 lks.
 dist., mkd. "S 18 BT."

Continue over rolling land, thru scattering timber and undergrowth, along W. slope, with slight change in elevation.

45.00 Descend 50 ft., over NW. slope.

58.44 Draw, course NE. Asc. 35 ft., over SE. slope.

68.42 Spur, slopes NE. Desc. 74 ft. over NW. slope.

71.74 Draw, course NE. Asc. 74 ft., over S. slope, to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., on surface rock, in a mound of stone, for cor. of secs. 7, 8, 17 and 18, marked on brass cap,

T30N | R6 W

S 7 | S 8

S18 | S17

1920

from which,

A cedar, 12 ins. in diam., brs. N. $71\frac{1}{2}^{\circ}$ E., 285 lks.
 dist., mkd. "T30N R6W S8 BT."

A pine, 8 ins. in diam., brs. S. $02\frac{1}{2}^{\circ}$ E., 271 lks.
 dist., mkd. "T30N R6W S17 BT."

A cedar, 12 ins. in diam., brs. S. $7\frac{1}{2}^{\circ}$ W., 11 lks.
 dist., mkd. "T30N R6W S18 BT."

A pine, 12 ins. in diam., brs. N. $9\frac{1}{4}^{\circ}$ W., 18 lks.
 dist., mkd. "T30N R6W S7 BT."

Land, rolling. Soil, gravelly & rocky, 2nd and 3rd rate.

Timber, scattering cedar and pine.

Undergrowth, scattering scrub cedar and sagebrush.

Fair grass.

Part (Completion) of Subdivision lines of T. 30 N., R. 6 W. 41


Chains.	S. 89°50'E., on a random line, bet. secs. 8 and 17.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.20	Intersect the cor. of secs. 8, 9, 16 and 17, at E. edge of National Wash.
	Thence,
	N. 89°50'W., on a true line, bet. secs. 8 and 17.
15.45	Over rolling land, across National Wash, course NW. W. edge of National Wash, brs. NW. and SE. Leave said wash. Ascend 60 ft., over NE. slope. Enter scattering timber and undergrowth.
20.27	Spur, slopes N. Desc. 65 ft., over NW. slope.
32.18	Center of draw, 4 chs. wide, course NE. Asc. 30 ft., over E. slope, to
40.10	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,
	$\frac{1}{4} \frac{S \ 8}{S \ 17}$ 1920
	from which,
	A pine, 8 ins. in diam., brs. S. 48 $\frac{3}{4}$ °W., 71 lks. dist., mkd. $\frac{1}{4}$ S 17 BT.
	A pine, 12 ins. in diam., brs. N. 27 $\frac{1}{2}$ °W., 115 lks. dist., mkd. $\frac{1}{4}$ S 8 BT.
	Continue over rolling land, thru. scattering timber and undergrowth. Asc. 80 ft., over E. slope.
48.28	Spur, slopes NE. Desc. 86 ft., over SW. slope.
65.32	Draw, course NE. Asc. 100 ft. over SW. slope, to
80.20	The cor. of secs. 7, 8, 17 and 18.
	Land, rolling.
	Soil, gravelly and rocky, 2nd and 3rd rate.
	Timber, scattering cedar and pine.
	Undergrowth, scattering scrub cedar and sage brush.
	Fair grass.

	N. 89°46'W., on a random line, bet. secs. 7 and 18.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.08	Fall 2 lks. S. of the cor. of secs. 7, 12, 13 and 18, on W. bdy. of Tp., described in Book "C."
	Thence,
	S. 89°45'E., on a true line, bet. secs. 7 and 18.
	Over level land, thru. scattering undergrowth.
29.00	Enter scattering timber, brs. SW. and NW.
39.08	Set an iron post, 3 ft. long, 1 in. in diam., 15 ins. in the ground, to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap,
	$\frac{1}{4} \frac{S \ 7}{S \ 18}$ 1920
	from which,
	A cedar, 22 ins. in diam., brs. N. 73 $\frac{1}{4}$ °E., 130 lks. dist., mkd. $\frac{1}{4}$ S 7 BT.
	A cedar, 24 ins. in diam., brs. S. 68 $\frac{1}{4}$ °E., 215 lks. dist., mkd. $\frac{1}{4}$ S 18 BT.
	Continue over level land, thru. scattering timber and undergrowth.
60.00	Leave level, and enter gently rolling land. Desc. slightly over E. slope.
79.08	The cor. of secs. 7, 8, 17 and 18.
	Land, W. 60 chs. level, remainder, gently rolling.
	Soil, sandy and gravelly loam, 1st and 2nd rate.
	Timber, scattering cedar and pine in E. 50 chs. only.
	Undergrowth, scattering scrub cedar and sage brush.
	Good grass.


42 Part (completion) of Subdivision lines of T.30 N., R.6 W.

Chains.

N.0°03'W., bet. secs. 7 and 8.
 Over gently rolling land, thru. scattering timber and undergrowth, along E. slope, with slight change in elevation.
 20.00 Leave timber, brs. NE. and SW.
 30.00 Enter scattering timber, brs. E. and W. Desc. 30 ft., over NE. slope, to
 35.00 Head of draw, course NE. Asc. slightly over SE. slope.
 40.00 Spur, slopes N.30°E. Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground, to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap,




from which,
 A cedar, 16 ins. in diam., brs. S. 84 $\frac{1}{4}$ °E., 106 lks.
 dist., mkd. "S 8 BT."
 A pine, 12 ins. in diam., brs. N. 50 $\frac{1}{2}$ °W., 414 lks.
 dist., mkd. "S 7 BT."
 Continue over gently rolling land, thru. scattering timber and undergrowth. Desc. 60 ft., over N. slope.
 53.16 Draw, course E. Asc. 60 ft., over SE. slope.
 60.00 Leave scattering, and enter dense timber, brs. E. and W.
 70.00 Descend 90 ft., over N. slope.
 78.55 Draw, course NE. Asc. 20 ft., over SE. slope, to
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., on surface rock, in a mound of stone, for cor. of secs. 5, 6, 7 and 8, marked on brass cap,



from which,
 A pine, 9 ins. in diam., brs. N. 18 $\frac{1}{2}$ °E., 116 lks.
 dist., mkd. "T30N R6W S5 BT."
 A pine, 8 ins. in diam., brs. S. 25 $\frac{1}{4}$ °E., 159 lks.
 dist., mkd. "T30N R6W S8 BT."
 A pine, 15 ins. in diam., brs. S. 50 $\frac{1}{2}$ °W., 220 lks.
 dist., mkd. "T30N R6W S7 BT."
 A pine, 8 ins. in diam., brs. N. 75 $\frac{1}{2}$ °W., 186 lks.
 dist., mkd. "T30N R6W S6 BT."

Land, rolling.
 Soil, gravelly and rocky, 2nd and 3rd rate.
 Timber, scattering cedar and pine where noted.
 Undergrowth, scattering scrub cedar and sage brush.
 Fair grass.

S. 89°50'E., on a random line, bet. secs. 5 and 8.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.22 Fall 2 lks. S. of the cor. of secs. 4, 5 8 and 9.
 thence,
 N. 89°51'W., on a true line, bet. secs. 5 and 8.
 Over rolling land, thru. dense timber and scattering undergrowth. Asc. 40 ft., over N. slope.
 15.00 Desc. 30 ft., over NW. slope.
 17.57 Draw, course NE. Asc. 75 ft. over E. slope.
 23.28 Spur, slopes NE. Desc. 70 ft., over NW. slope, to
 40.11 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground, to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap,



Part (completion) of Subdivision lines of T.30 N., R.6 W. 43

Chains.

from which,
A pine, 222 ins. in diam., brs. N.12 1/4° E., 48 lks.
dist., mkd. 1/4 S 5 BT.
A pine, 18 ins. in diam., brs. S.36° W., 35 lks.
dist., mkd. 1/4 S 8 BT.

Continue over rolling land, thru. dense timber and scattering undergrowth. Desc. 23 ft. over NW slope.
45.40 Draw, course NE Asc. 87 ft., over NE slope, to
59.30 Head of draw, course N.15° E. Asc. 45 ft., over E. slope,
70.00 Spur, slopes N.20° E. Descend 100 ft., over NW slope.
77.83 Draw, course NE. Asc. 40 ft., over SE slope, to
80.22 The cor. of secs. 5, 6, 7 and 8.
Land, rolling..
Soil, gravelly and rocky, 2nd and 3rd rate.
Timber, dense cedar and pine.
Undergrowth, scattering scrub cedar and sage brush.
Poor grass.

N.89°45' W., on a random line, bet. secs. 6 and 7.
40.00 Set temp. 1/4 sec. cor.
79.30 Fall 26 lks. N. of the cor. of secs. 1, 6, 7 and 12, on W. bdy. of Tp., described in Book "C."

Thence,
S.89°56' E., on a true line, bet. secs. 6 and 7.
Over gently rolling land, thru. scattering timber and undergrowth.
Descend 53 ft., over E. slope.
14.30 Draw, course N.15° E. Asc. 60 ft., over N. slope.
20.00 Leave scattering, and enter dense timber.
24.50 Begin very gradual descent, over N. slope.
39.30 Set an iron post, 3 ft. long, 1 in. in diam., 15 ins. in the ground, to bed rock, supported in a mound of stone, for 1/4 sec. cor., marked on brass cap,

1/4 S 6
S 7
1920

from which,
A cedar, 12 ins. in diam., brs. N.33° E., 51 lks.
dist., mkd. 1/4 S 6 BT.
A cedar, 12 ins. in diam., brs. S.47° E., 69 lks.
dist., mkd. 1/4 S 7 BT.

Continue over gently rolling land, thru. dense timber and scattering undergrowth. Desc. gradually over NE slope.
74.25 Descend 25 ft., over SE slope, to
79.30 The cor. of secs. 5, 6, 7 and 8.
Land, gently rolling.
Soil, sandy and gravelly loam, 1st and 2nd rate.
Timber, cedar and pine, scattering and dense as noted.
Undergrowth, scattering scrub cedar and sage brush.
Good grass.

N.0°21' E., on a random line, bet. secs. 5 and 6.
40.00 Set temp. 1/4 sec. cor.
80.08 Fall 23 1/2 lks. E. of the cor. of secs. 5, 6, 31 and 32, on N. bdy. of Tp., here in before described.
Thence,
S.0°11' W., on a true line, bet. secs. 5 and 6.
Over rolling land, thru. scattering timber and undergrowth.
Ascend 70 ft., over N. slope.
15.00 Spur, slopes NE. Desc. 50 ft., over SE slope.
25.00 Draw, course NE. Asc. 40 ft., over N. slope.
35.00 Descend 25 ft., over E. slope, to

44. Part (completion) of Subdivision lines of T. 30 N., R. 6 W.

Chains.

40.08

Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground, to bed rock, supported in a mound of stone for $\frac{1}{4}$ sec. cor., marked on brass cap,

S 6 | S 5

1920

from which

A cedar, 18 ins. in diam., brs. S. $72\frac{1}{4}^{\circ}$ E., 140 lks.
dist., mkd. $\frac{1}{4}$ S 5 BT.

A pine, 10 ins. in diam., brs. N. $80\frac{1}{2}^{\circ}$ W., 84 lks.
dist., mkd. $\frac{1}{4}$ S 6 BT.

Continue over rolling land, thru. scattering timber and undergrowth, along E. slope, with slight change in elevation.

50.00

Descend 110 ft., over SE. slope.

55.58

Draw, course E. Asc. 75 ft., over N. slope.

60.00

Spur, slopes E. Desc. 35 ft., over S. slope.

63.00

Draw, course E. Asc. 40 ft., over NE. slope.

75.00

Descend 75 ft., over SE. slope, to

80.08

The cor. of secs. 5, 6, 7 and 8.

Land, rolling.

Soil, sandy and gravelly loam, 1st and 2nd rate.

Timber, scattering cedar and pine.

Undergrowth, scattering scrub cedar and sagebrush.

Good grass.

The continued satisfactory adjustment of the solar apparatus during the survey of this township is indicated from field tests, as described in Books "E." and "F."

GENERAL DESCRIPTION.

The portion of this township surveyed as described in the foregoing field notes lies entirely within the Hualpai Indian Reservation, and the surface varies from level to rolling and broken, the greater part of the area being gently rolling. The level surface is confined to scattered areas, none of which is of great extent.

The entire township is on the plateau between Cataract Canyon on the east, and the Colorado River Canyon on the north and west.

The drainage in general is toward the north, thru. dry washes and draws, the principal one of which is National Wash, course N., thru. the west central part into National Canyon, and draining nearly all of the west half of the township.

The soil varies from a sandy loam 1st rate, to rocky, 4th rate, the predominating variety being a sandy and gravelly clay, 2nd and 3rd rate. The sandy loam, 1st rate is found in small scattered areas. The rocky, 4th rate soil is confined to a small area in secs. 4 and 5.

The timber consists of cedar and pine in very scattering, scattering, and dense growths. In the ~~west~~ west half, the growth is very scattering, and many portions are devoid of timber. The west half has mostly a scattering growth, with scattered groves where the timber is dense. The east half of the township is almost devoid of undergrowth, but the west half has scattering and dense growths of scrub cedar, sagebrush and dogwood.

There is a fair growth of grass in the west half, and the east range of sections, and the remainder of the surface is covered with a good growth of grass.

There is no permanent flowing water, but there is a stored supply in a tank in the NW. $\frac{1}{4}$ of sec. 21, known as

"National Tank."

A fence enclosing a tract of about 640 acres in secs. 15, 16, 21 and 22, National Tank, a house and corral near said tank, and a house and dugout on line bet. secs. 9 and 16, constitute the improvements in the township.

There is a mine in the SW. $\frac{1}{4}$ of sec. 9 tied to U.S.L.M. No. 3633, but it was not being worked at the time of this survey, and no information is available as to the mineral prospect. Aside from this mine, there are no indications of the existence of valuable mineral in the township.

No settlers were residing in the township at the present time.

A road from Seligman, Arizona, enters the township in the SE. $\frac{1}{4}$ of sec. 33, and extends northerly by the National Tank, terminating near the mine in sec. 9. Another road branches off from the Seligman road in the NE. $\frac{1}{4}$ of sec. 33, and extends northeasterly, leaving the township on the east boundary of sec. 13.

There are no other roads of importance.

BOOK 3506
48

CERTIFICATE OF UNITED STATES TRANSITMAN.

I, James C. O'Brien, U. S. Transitman,, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 105, Arizona, bearing date of the 24th day of February, 1920, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the Subdivision lines of Township 30 North, Range 6 West,

of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in and by diagram on page 1 hereof the foregoing field notes, as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 105, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Place - Phoenix, Arizona,
Date May 8, 1922

James C. O'Brien (deceased)
U. S. Transitman
By [Signature]

APPROVAL. Asst. Supervisor of Surveys.
District No. 5.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

_____, 191

The foregoing field notes of the survey of _____

executed by _____ under his special instructions dated _____, 191, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above-described surveys in _____, has been correctly copied from the original notes on file in this office.

U. S. Surveyor General.

4-680

FIELD ASSISTANTS.

to Dupree R. Averill, U. S. Surveyor

NAMES.	CAPACITY.
<i>James Shine</i>	<i>1st Chainman.</i>
<i>Max Dessau</i>	<i>2nd Chainman.</i>
<i>E. F. Stanley</i>	<i>Axman.</i>
<i>Forrest Nimmo</i>	<i>Cornerman.</i>
<i>Emmet B. Smith</i>	<i>Flagman.</i>

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Dupree R. Averill, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 105, Arizona, bearing date of the 24th day of February, 1920, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the North boundary, and Subdivision lines of

Township 30 North, Range 6 West,

of the Gila and Salt River

Base and Meridian, in the State of Arizona, which are represented in and by diagram on page 1 hereof the foregoing field notes, as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 105, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Place - Phoenix Arizona

Date - July 15, 1921

Dupree R. Averill U. S. Surveyor.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix Arizona, May 13, 1922.

The foregoing field notes of the survey of part of the North boundary, and part of the Subdivision lines of

Township 30 North, Range 6 West,

of the Gila and Salt River Base and Meridian,

in the State of Arizona,

executed by Dupree R. Averill, U. S. Surveyor, and James C. O'Brien, U. S. Transitman, under special instructions dated February 24, 1920 for Group 105, Ariz., 1920, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

James C. O'Brien U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above described surveys in, has been correctly copied from the original notes on file in this office.

U. S. Surveyor General.