

FIELD NOTES

OF THE SURVEY OF

part of the North boundary,

part of the West boundary,

and part (completion) of the Subdivision lines of

Township 26 North, Range 8 West,

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

EXECUTED BY

Quintin Campbell, U. S. Surveyor,

and

Kenneth W. Bond, U. S. Transitman,

In the capacity of U. S. Surveyors, under Special Instructions dated February 25, 1920, issued by the United States Surveyor General to govern surveys included in Group No 107, Arizona, which were approved by the Commissioner of the General Land Office, March 8, 1920, and Assignment Instructions dated March 19 & 29, 1920

Survey commenced March 30, 1920

Survey completed August 19, 1920

3531


3531

152
1A

BOOK 3531


Book "D"
Township 26 North, Range 8 West.
Group 107 - Arizona.

INDEX DIAGRAM.

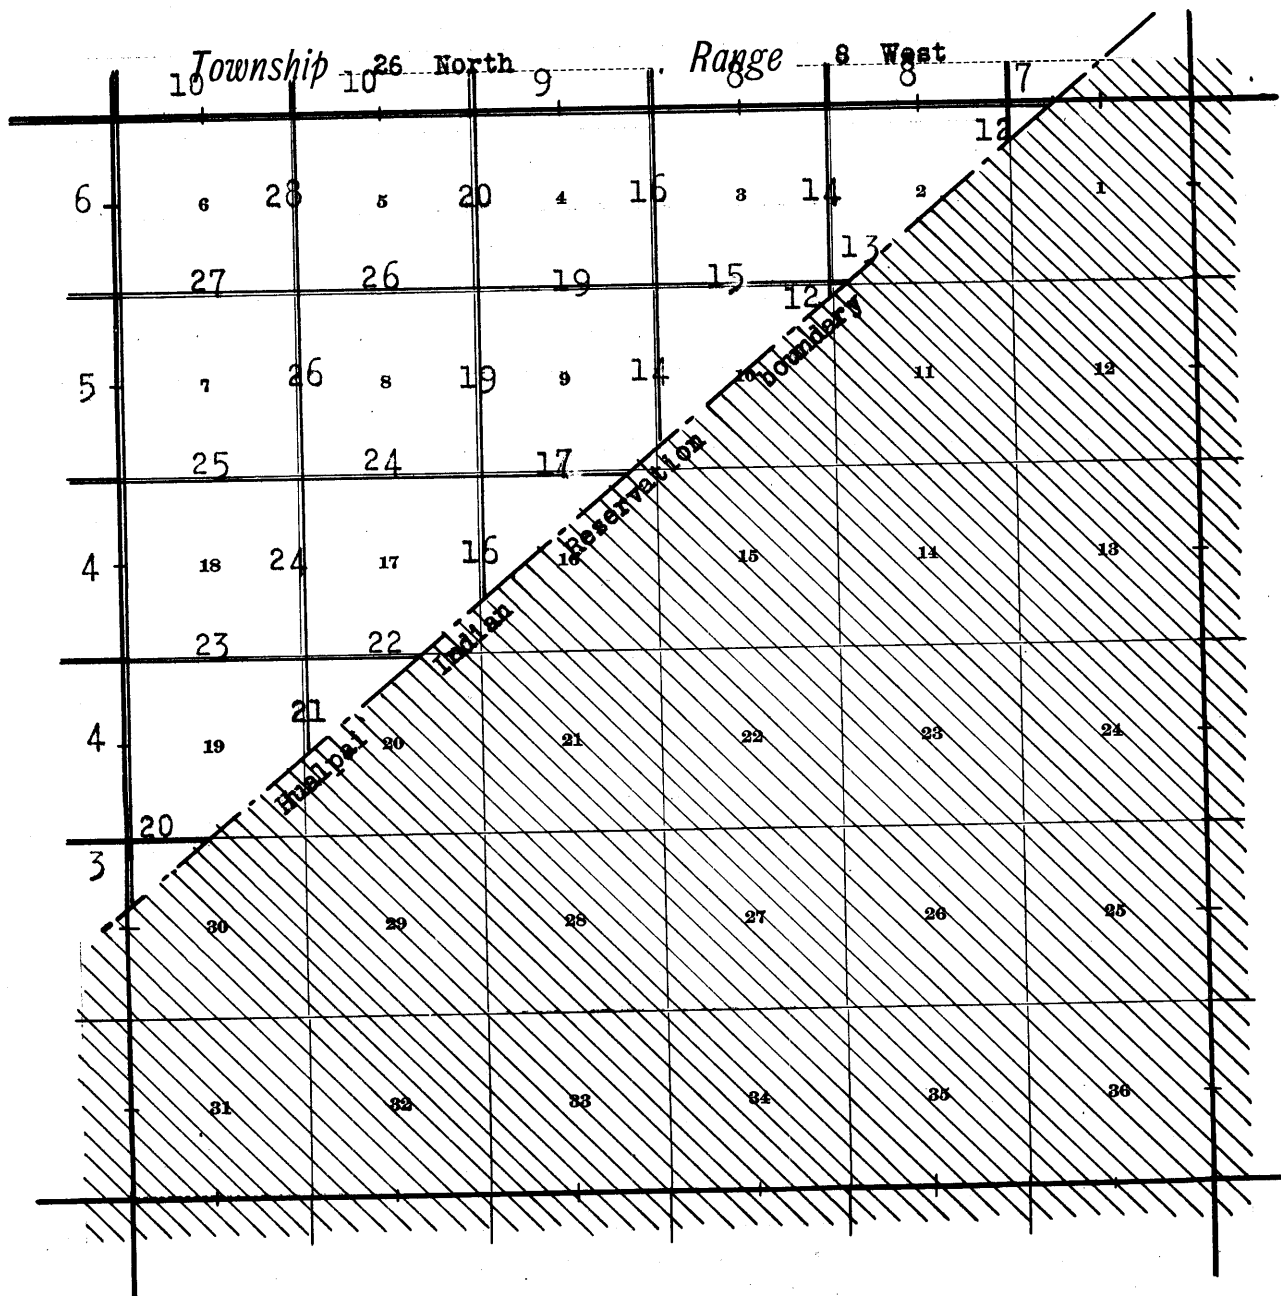

==== Lines surveyed under this Group.

— Accepted surveys.

 Areas surveyed as per accepted plats on file.

1653
 ORIG.

Book "D"

BOOK 3531

Date Diagram

Township 26 North, Range 8 West

		4-29-20	4-1-20			
	5-5-20	5-5-20	4-1-20	3-31-20	3-31-20	3-30-20
5-25-20	6	5	4	3	2	1
	8-17-20	8-16-20	8-16-20	8-19-20	8-19-20	8-19-20
5-23-20	7	8	9	10	11	12
	8-17-20	8-14-20	8-17-20	8-19-20	8-19-20	
5-22-20	18	17	16	15	14	13
	8-14-20	8-14-20	8-13-20			
5-22-20	19	20	21	22	23	24
	8-13-20	8-12-20				
5-21-20	30	29	28	27	26	25
	8-12-20					
	31	32	33	34	35	36

Brown lines on above diagram indicate accepted surveys.

Black lines on above diagram indicate surveys executed by Quintin Campbell, U. S. Surveyor, on dates shown thereon.

Red lines on above diagram indicate surveys executed by Kenneth W. Bond, U. S. Transitman, on dates shown thereon.

Surveys hereinafter described, executed on dates shown on diagram on page 1 hereof by Quintin Campbell, U.S. Surveyor, and Kenneth W. Bond, U.S. Transitman, using respectively, Young and Sons light mountain transits Nos. 8491 and 8477. Each instrument is equipped with full vertical circle, and the Smith solar attachment; unless otherwise specified, all azimuth determinations are accomplished with solar attachments.

Field tests of the instruments on March 29, April 25 and June 29, 1920, are described in Books "A," "B" and "C," respectively, and the dates of such tests precede the dates of the execution of the survey of portions of the North and West boundaries of T.26 N., R.8 W., executed by Quintin Campbell, U.S.S. with instrument No. 8491, as hereinafter described.

A test of the instruments preliminary to the survey of the subdivision lines of T.26 N., R.8 W. is described as follows:

August 11, 1920. We examine the adjustment of each instrument, and correct all errors; then, to test the solar apparatus by comparing its indications from observations made during a.m. and p.m. hours, with a meridian established by Polaris observation, proceed with each instrument as follows:

In camp at Robbers Roost Tank, in the NE. $\frac{1}{4}$ of sec. 8, T.26 N., R.8 W., Gila and Salt River Base and Meridian, Arizona, in latitude, $35^{\circ}39'41''$ N., and longitude, $113^{\circ}09'16''$ W., at 10h.14.6m. p.m., l.m.t., observe Polaris at Eastern elongation, making four observations, two each with the telescope in direct and reversed positions, and mark the mean point in the line thus determined on a peg driven firmly in the ground 6 chs. N.
Azimuth of Polaris at Eastern elongation = $1^{\circ}22'59''$.

August 12, 1920. Lay off the azimuth of Polaris $1^{\circ}23'$ to the west, and mark the meridian thus determined by a tack in a peg driven firmly in the ground, 6 chs. N.

At 7h.0m., a.m., l.m.t., set off $35^{\circ}39\frac{1}{2}'$ N. on the lat. arc; $15^{\circ}17'$ N. on the decl. arc, and determine a meridian with the solar, which agrees with the true meridian.

At app. noon, with the latitude arc unchanged, observe the sun on the meridian; the resulting reading of the decl. arc is $15^{\circ}12\frac{1}{2}'$ N., which agrees with the computed declination of the sun.

At 5h.0m. p.m., l.m.t., with the lat. arc unchanged, set off $15^{\circ}9\frac{1}{2}'$ N. on the decl. arc, and determine a meridian with the solar, which agrees with the true meridian.

As all of the solar observations made with both instruments during the usual hours of solar work come within $1'30''$ of the true meridian, we conclude that the adjustments of the instruments are satisfactory.

Unless otherwise specified, all measurements are made with Lallie steel tapes, 2 and 5 chs. in length, compared with a Lufkin standard steel tape, and found correct.

The measurements are made on the slope, the vertical angle determined, and the slope measurements properly reduced to true horizontal distances.

Survey of part of West bdy. of T. 26 N., R. 8 W. (completion)


Chains.

That portion of the West bdy. of T. 26 N., R. 8 W. situated outside the Hualpai Indian Reservation was surveyed in January, 1912, by William H. Elliott, U.S. Surveyor, who established a closing cor. of Ts. 26 N., Rs. 8 and 9 W. at the point of intersection of the range line with the Reservation boundary.

The following notes describe the completion of the survey of the range line thru. T. 26 N., beginning at the Tp. closing cor., and extending said line due North to point of intersection with the North bdy. of T. 26 N., R. 8 W. extended due west from the closing cor. of Ts. 26 and 27 N., R. 8 W. on the Reservation bdy., as hereinafter described.

The closing cor. of those portions of secs. 25 and 30, Ts. 26 N., Rs. 8 and 9 W., situated outside the Hualpai Indian Reservation is an iron post, 3 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by three pits, one each N. 50° E., S. 50° W., and S. of cor., with a mound of earth S. of post. No bearing trees. This closing cor. is of record as being established on the Reservation boundary at 49.15 chs. North from the cor. of sections 25, 30, 31 and 36.

Change the marking on the brass cap to read:



This closing cor. now refers to areas on both sides of the Reservation boundary.


Thence,

North, on true line, between those parts of secs. 25 and 30, situated inside the H.I.R.

Over gently rolling land, thru. dense timber and scattering undergrowth.

30.85

Ascend gradually along SW. and W. slopes, to (80.00 chs. North from the cor. of secs. 25, 30, 31 and 36), set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 19, 24, 25 and 30, marked on brass cap,



from which,

- A juniper, 10 ins. in diam., brs. N. 38½° E., 141 lks. dist., marked T26N R8W S19 BT.
- A pine, 8 ins. in diam., brs. S. 7½° E., 37 lks. dist., marked T26N R8W S30 BT.
- A juniper, 18 ins. in diam., brs. S. 20° W., 194 lks. dist., marked T26N R9W S25 BT.
- A juniper, 8 ins. in diam., brs. N. 33° W., 14 lks. dist., marked T26N R9W S24 BT.

Land, gently rolling.

Soil, gravelly loam, 3rd rate.

Timber, dense juniper and pine.

Undergrowth, scattering prickly ash and sagebrush.


Good grass.

4 Part of West bdy. of T. 26 N. R. 8 W. (completion)

Chains.

North, on true line, bet. secs. 19 and 24.
Over gently rolling land, thru. dense timber, and scattering undergrowth.


Ascend gradually along W. slope, to
40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,



from which,
A pine, 10 ins. in diam., brs. S. 88° E., 21 lks.
dist., marked $\frac{1}{4}$ S 19 BT.
A pine, 10 ins. in diam., brs. N. 83° W., 53 lks.
dist., marked $\frac{1}{4}$ S 24 BT.

Continue over gently rolling land, thru. dense timber and scattering undergrowth, ascending gradually along W. slope, to

64.00 Wash, 50 lks. wide, course SW. Ascend 50 ft., over S. slope.
78.00 Spur, sloping SW. Descend slightly over NW. slope, to
80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 13, 18, 19 and 24, marked on brass cap,




from which,
A juniper, 24 ins. in diam., brs. N. 46° E., 63 lks.
dist., marked T26N R8W S18 BT.
A pine, 12 ins. in diam., brs. S. 69° E., 53 lks.
dist., marked T26N R8W S19 BT.
A pine, 10 ins. in diam., brs. S. 67° W., 142 lks.
dist., marked T26N R9W S24 BT.
A pine, 8 ins. in diam., brs. N. 39° W., 84 lks.
dist., marked T26N R9W S13 BT.

Land, gently rolling.
Soil, gravelly and rocky, 3rd and 4th rate.
Timber, dense juniper and pine.
Undergrowth, scattering prickly ash and sage brush.
Fair grass.

North, on true line, bet. secs. 13 and 18.
Over rolling land, thru. dense timber and scattering undergrowth.

Descend 25 ft., over NW. slope, to
10.00 Thence along W. slope, descending gradually to
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap,



from which,
A pine, 8 ins. in diam., brs. N. 44° E., 57 lks.
dist., marked $\frac{1}{4}$ S 18 BT.
A pine, 8 ins. in diam., brs. N. 48° W., 76 lks.
dist., marked $\frac{1}{4}$ S 13 BT.

Continue over rolling land, thru. dense timber and scattering undergrowth.

73.26 Descend 250 ft., over NW. slope, to
Gully, 30 lks. wide, course NW. Desc. 70 ft., over NW. slope, to

Part of West bdy. of Township 26 North, Range 8 West (completion) 5

Chains.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 7, 12, 13 and 18, marked on brass cap,

T26N	
R9W	R8W
S12	S 7
S13	S18
1920	

from which,
 A pine, 10 ins. in diam., brs. N. 66° E., 16 lks. dist., marked T26N R8W S7 BT.
 A pine, 8 ins. in diam., brs. S. 66° E., 104 lks. dist., marked T26N R8W S18 BT.
 A juniper, 12 ins. in diam., brs. S. 30° W., 49 lks. dist., marked T26N R9W S13 BT.
 A pine, 6 ins. in diam., brs. N. 32° W., 35 lks. dist., marked T26N R9W S12 BT.

Land, rolling.
 Soil, gravelly and rocky, 3rd and 4th rate.
 Timber, dense juniper and pine.
 Undergrowth, scattering prickly ash and scrub oak.
 No grass.

North, on true line, bet. secs. 7 and 12.
 Over mountainous land, thru. dense timber and scattering undergrowth.

3.00 Descend 56 ft., over NW. slope.
 Gulch, 25 lks. wide, course NW.
 Ascend 125 ft., over S. slope.
 9.40 Spur, slopes W.
 Descend 100 ft., over N. slope.
 16.70 Gulch, 50 lks. wide, course SW. in bottom of Robbers Roost Canyon.
 Ascend 180 ft.
 32.40 Spur, slopes NW. from NE.
 Descend 70 ft., over N. slope, to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$	
S12	S 7
1920	

from which,
 A pine, 8 ins. in diam., brs. N. 66 $\frac{1}{2}$ ° W., 35 lks. dist., marked $\frac{1}{4}$ S 12 BT.
 A pine, 10 ins. in diam., brs. N. 75° E., 11 lks. dist., marked $\frac{1}{4}$ S 7 BT.

Descend 80 ft., over N. slope.
 49.00 Gulch, 25 lks. wide, course W.
 Ascend 85 ft., over S. slope.
 56.50 Spur, slopes SW.
 Descend 65 ft., over NW. slope.
 70.30 Gulch, 20 lks. wide, course SW.
 Ascend 25 ft., over SE. slope.
 75.85 Spur, slopes SW.
 Descend 20 ft., over NW. slope, to
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 1, 6, 7 and 12, marked on brass cap,

T26N	
R9W	R8W
S 1	S 6
S12	S 7
1920	

6 Part of West bdy. of Township 26 N., R. 8 W (completion)

Chains.

from which,

A juniper, 8 ins. in diam., brs. N. $28\frac{1}{2}^{\circ}$ E., 36 lks.
dist., marked T26N R8W S6 BT.A juniper, 24 ins. in diam., brs. S. 50° E., 41 lks.
dist., marked T26N R8W S7 BT.A pine, 12 ins. in diam., brs. S. 72° W., 121 lks.
dist., marked T26N R9W S12 BT.A juniper, 10 ins. in diam., brs. N. 42° W., 62 lks.
dist., marked T26N R9W S1 BT.

Land, mountainous.

Soil, gravelly and rocky, 4th rate.

Timber, dense juniper and pine.

Undergrowth, scattering scrub oak and prickly ash.

No grass.

North, on true line, bet. secs. 1 and 6.Over mountainous land, thru. dense timber and scattering
undergrowth.

Descend 40 ft., over NW. slope.

1.36 Gulch, 30 lks. wide, course SW. Asc. 65 ft., over SE. slope.

28.70 Ridge, brs. NE. and SW., near SW. end of same; descend
45 ft., over NW. slope, to40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,
$$\frac{1}{4}$$

S 1	S 6
1920	

from which,

A pine, 8 ins. in diam., brs. S. $5\frac{1}{2}^{\circ}$ E., 75 lks.
dist., marked $\frac{1}{4}$ S 6 BT.A pine, 8 ins. in diam., brs. N. 63° W., 71 lks.
dist., marked $\frac{1}{4}$ S 1 BT.Bottom of gulch, course SW. from N. brs. W. about a 2
chs. dist.Ascend 90 ft., over SW. slope, along E. side of gulch, course
S.68.00 Ridge, brs. SW., and N. 76° E. Desc. 70 ft., over NW. slope,
to80.22 Intersect the N. bdy. of T. 26 N., R. 8 W., surveyed due
west as hereinafter described.At point of intersection, set an iron post 3 ft. long, 3
ins. in diam., 26 ins. in the ground, for cor. of Ts. 26
and 27 N., Rs. 8 and 9 W., marked on brass cap,

T27N	
R9W	R8W
S36	S31
S 1	S 6
T26N	
1920	

from which,

A pine, 10 ins. in diam., brs. N. $31\frac{1}{2}^{\circ}$ E., 24 lks.
dist., marked T27N R8W S31 BT.A pine, 10 ins. in diam., brs. S. $77\frac{3}{4}^{\circ}$ E., 114 lks.
dist., marked T26N R8W S6 BT.A pine, 8 ins. in diam., brs. S. 82° W., 46 lks.
dist., marked T26N R9W S 1 BT.A pine, 8 ins. in diam., brs. N. 66° W., 30 lks.
dist., marked T27N R9W S36 BT.

Land, mountainous.

Soil, gravelly and rocky, 4th rate.

Timber, dense juniper and pine.

Undergrowth, scattering scrub oak and prickly ash.

No grass.

Chains.

That portion of the North bdy. of T. 26 N. R. 8 W., situated outside the Hualpai Indian Reservation was surveyed in January, 1912, by William H. Elliott, U.S. Surveyor, who established a closing cor. of Ts. 26 and 27 N., R. 8 W., at the intersection of the township boundary with the Reservation boundary.

The following notes describe the completion of the township boundary thru. Range 8 West, beginning at the township closing cor., and extending said line due West to point of intersection with the West boundary of T. 26 N., R. 8 W. extended due North from the closing cor. of T. 26 N., Rs. 8 and 9 W. on the Reservation boundary, as hereinbefore described.

The closing cor. of those portions of Ts. 26 and 27 N., R. 8 W. situated outside the Hualpai Indian Reservation is an iron post, 3 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by a mound of stone, E. of cor., and one properly marked bearing tree, a cedar, S. 46° W., 94 lks. dist.

This closing cor. is of record as being established on the reservation boundary at 59.50 chs. West from the cor. of Ts. 26 and 27 N., Rs. 7 and 8 W. Change the marking on the brass cap to read:

S36	T27N
S 14	S36
CC S1	T26N
	R8W
	1912
	1920

This closing cor. now refers to areas on both sides of the Reservation boundary.

Thence,

West, on true line, between those parts of secs. 1 and 36, situated inside the H. I. R.

Over rolling land, thru. scattering timber and dense undergrowth.

Ascend 85 ft., over E. slope.

8.20
20.50

Spur, slopes N. Descend 100 ft., over NW. slope, to (80.00 chs. W. from the cor. of Ts. 26 and 27 N., Rs. 7 and 8 W.) Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 1, 2, 35 and 36, marked on brass cap,

T27N	R8 W
S35	S36
S 2	S 1
	T26N
	1920

from which,

An oak, 8 ins. in diam., brs. S. 68° W., 279 lks. dist., marked T26N R8W S2 BT.

A sandstone ledge, 6x10x3 ft. high, facing W., brs. S. 61° E., 17 lks. dist., marked X S1 BO.

Raise a mound of stone 2 ft. base, 1½ ft. high, W. of post, 3 ft. dist.

Land, rolling.

Soil, rocky, 4th rate.

Timber, scattering juniper, pine, cedar and white oak.

Undergrowth, dense sagebrush, scrub oak, cacti, and prickly ash.

No grass.

8 Part of North bdy. of Township 26 North, Range 8 West (completion).

Chains.

West, on true line, bet. secs. 2 and 35.
 Over mountainous land, thru. scattering timber and dense undergrowth.
 Descend 20 ft., over NW. slope.
 .50 Gulch, 20 lks. wide, course NE. Asc. 16 ft., over S. slope, to
 8.40 Same gulch, 20 lks. wide, course S. 70° E. Asc. 20 ft., over N. slope, to
 18.00 Same gulch, 30 lks. wide, course NE. Asc. 150 ft., over NE. slope, to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

1/4 S 35
 S 2
 1920

from which,
 A juniper, 28 ins. in diam., brs. N. 13° W., 132 lks. dist., marked 1/4 S 35 BT.
 A juniper, 8 ins. in diam., brs. S. 72° W., 56 lks. dist., marked 1/4 S 2 BT.

Descend slightly over N. slope, to
 43.90 Gulch, 10 lks. wide, course NE. Leave scattering, and enter dense timber. Ascend 500 ft., over E. slope.
 78.20 Ridge, brs. N. and S. Thence over nearly level top of ridge, to
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 6 ins. in the ground to bed rock, and raise a mound of stone around post, for cor. of secs. 2, 3, 34 and 35, marked on brass cap,

T27N R8W
 S34 S35
 S 3 S 2
 T26N
 1920

from which,
 A juniper, 8 ins. in diam., brs. N. 36° E., 100 lks. dist., marked T27N R8W S35 BT.
 A juniper, 10 ins. in diam., brs. S. 40° E., 45 lks. dist., marked T26N R8W S2 BT.
 A juniper, 16 ins. in diam., brs. S. 66° W., 280 lks. dist., marked T26N R8W S3 BT.
 A juniper, 12 ins. in diam., brs. N. 27 1/2° W., 127 lks. dist., marked T27N R8W S34 BT.

Land, mountainous.
 Soil, gravelly and rocky, 4th rate.
 Timber, juniper, pine, cedar and white oak, scattering and dense.
 Undergrowth, dense prickly ash and manzanita.
 No grass.

West, on true line, bet. secs. 3 and 34.
 Over mountainous land, thru. dense timber and undergrowth.
 Descend 70 ft., over W. slope.
 9.10 Gully, 20 lks. wide, course N. 10° E. Asc. 72 ft. over NE. slope, to
 21.30 E. rim of bench, brs. N. and S. Thence across level surface of bench.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

1/4 S 34
 S 3
 1920

from which,
 A pine, 8 ins. in diam., brs. N. 52° E., 13 lks. dist., marked 1/4 S 34 BT.

Part of North hdy. of Township 26 North, Range 8 West (completion) 9.

Chains.

A juniper, 12 ins. in diam., brs. S. 61° E., 25 lks. dist., marked $\frac{1}{4}$ S 3 BT.


Continue across level surface of bench, thru. dense timber and undergrowth.

64.85 W. rim of bench, brs. N. and S. Leave bench. Desc. 90 ft. over W. slope, to

72.28 Foot of descent, brs. NE. and S. A cedar, 36 ins. in diam. on line, marked with 2 notches on E. and W. faces. Leave mountainous, and enter nearly level land. Desc. slightly to

73.88 Gully, 20 lks. wide, course N. Asc. slightly over N. slope, to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 3, 4, 33 and 34, marked on brass cap,



from which,

A juniper, 20 ins. in diam., brs. N. 36° E., 40 lks. dist., marked T27N R8W S34 BT.

A cedar, 10 ins. in diam., brs. S. 14° E., 84 lks. dist., marked T26N R8W S3 BT.

A pine, 8 ins. in diam., brs. S. 57 $\frac{1}{2}$ ° W., 110 lks. dist., marked T26N R8W S4 BT.

A pine, 8 ins. in diam., brs. N. 22° W., 63 lks. dist., marked T27N R8W S33 BT.

Land, E. 72 chs. mountainous; W. 8 chs., nearly level.
 Soil, rocky red clay, 4th rate.
 Timber, dense juniper and pine, and scattering white oak and cedar.
 Undergrowth, dense prickly ash, scrub oak and manzanita,
 No grass.


West, on true line, bet. secs. 4 and 33.
 Over nearly level land, thru dense timber and undergrowth.
 Ascend slightly over NE. slope, to

15.00 Leave nearly level, and enter mountainous land. Asc. 75 ft. over E. slope.

20.58 Ridge, brs. N. and S. Descend 75 ft.

27.00 Foot of descent, brs. N. and S. Leave mountainous, and enter nearly level land. Desc. slightly over W. slope, to

40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,



from which,

A pine, 8 ins. in diam., brs. N. 30° E., 25 lks. dist., marked $\frac{1}{4}$ S 33 BT.


A cedar, 18 ins. in diam., brs. S. 74° E., 37 lks. dist., marked $\frac{1}{4}$ S 4. BT.

Leave nearly level, and enter mountainous land.
 Descend 130 ft., over W. slope, to

62.80 Bottom of canyon, 50 lks. wide, course NW. Asc. 80 ft., over NE. slope.

68.90 Point of spur, slopes N. 10° W. Desc. 156 ft., over W. slope, to

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 4, 5, 32 and 33, marked on brass cap,



from which,

10 Part of N. bdy. of Township 26 North, Range 8 West (completion)

Chains.

- A pine, 8 ins. in diam., brs. N. 76° E., 63 lks. dist., marked T27N R8W S33 BT.
- A pine, 10 ins. in diam., brs. S. 63° E., 111 lks. dist., marked T26N R8W S4 BT.
- A pine, 12 ins. in diam., brs. S. 5° W., 36 lks. dist., marked T26N R8W S5 BT.
- A cedar, 20 ins. in diam., brs. N. 45½° W., 94 lks. dist., marked T27N R8W S32 BT.

Land, nearly level and mountainous.
 Soil, gravelly and rocky, 4th rate.
 Timber, dense juniper and pine, and scattering cedar.
 Undergrowth, dense prickly ash and scrub oak.
 No grass.

West, on true line, bet. secs. 5 and 32.
 Over mountainous land, thru. dense timber and undergrowth.
 Descend 60 ft., over W. slope.
 5.10 Bottom of Robbers Roost Canyon, 50 lks. wide, course S.
 Ascend 90 ft., over E. slope.
 13.40 Ridge, brs. N. and S. Descend 40 ft., over W. slope.
 16.40 Head of gulch, course SW. Ascend 75 ft.
 37.00 SW. end of ridge, brs. N. and S. at this point, general bearing NE. and SW. Desc. 10 ft., over W. slope, to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap,

S 32
¼
S 5
1920

- from which,
- A pine, 10 ins. in diam., brs. N. 34° E., 31 lks. dist., marked ¼ S 32 BT.
 - A juniper, 8 ins. in diam., brs. S. 45° W., 3 lks. dist., marked ¼ S 5 BT.

Descend 300 ft., over W. slope.
 75.30 Gulch, 100 lks. wide, course S.
 Ascend 30 ft., over E. slope.
 79.00 Point of spur, slopes S. Descend 15 ft. over W. slope, to
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 5, 6, 31 and 32, marked on brass cap,

T27N	R8W
S31	S32
S 6	S 5
T26N	
1920	

- from which,
- A pine, 10 ins. in diam., brs. N. 54° E., 11 lks. dist., marked T27N R8W S32 BT.
 - A pine, 8 ins. in diam., brs. S. 13° E., 52 lks. dist., marked T26N R8W S5 BT.
 - A pine, 10 ins. in diam., brs. S. 27° W., 27 lks. dist., marked T26N R8W S6 BT.
 - A juniper, 12 ins. in diam., brs. N. 25° W., 63 lks. dist., marked T27N R8W S31 BT.

Land, mountainous.
 Soil, gravelly and rocky, 4th rate.
 Timber, dense juniper and pine, and scattering cedar.
 Undergrowth, dense prickly ash, scrub oak and quinine brush.
 No grass.

West, on true line, bet. secs. 6 and 31.
 Over mountainous land, thru. dense timber and undergrowth.
 Descend 50 ft., over W. slope.
 2.60 Rocky gulch, 25 lks. wide, course NW. Asc. 30 ft., over NE. slope.

Part of N. bdy. of Township 26 North, Range 8 West (completion) 11

Chains.

- 9.90 Bend in top of spur, slopes W. from S. Descend slightly along top of spur, to
- 22.00 Rim of canyon, brs. NE. and SW. Descend 260 ft. over NW. slope, across steep cliffs and slide rock.
- 34.76 Bottom of canyon, 50 lks. wide, course SW. Ascend 170 ft. over steep SE. slope, to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 31
 S 6
 1920

from which,
 A pine, 10 ins. in diam., brs. N. 27° E., 59 lks. dist., marked $\frac{1}{4}$ S 31 BT.
 A juniper, 10 ins. in diam., brs. S. 50° W., 53 lks. dist., marked $\frac{1}{4}$ S 6 BT.

- Ascend 160 ft., over SE. slope.
- 48.30 Ridge, brs. NE. and SW. Desc. 260 ft., over NW. slope, to
- 78.22 Intersect the W. bdy. of T. 26 N., R. 8 W. surveyed due North, at which point of intersection, establish the cor. of Ts. 26 and 27 N., Rs. 8 and 9 W., as hereinbefore described.

Land, mountainous.
 Soil, gravelly and rocky, 4th rate.
 Timber, dense juniper, pine and cedar.
 Undergrowth, dense prickly ash and scrub oak.
 No grass.




12 Survey of part of Subdivision lines of T.26 N. R.8 W.(completion)

Chains.

The subdivision lines of that portion of T.26 N., R.8 W. situated outside the Hualpai Indian Reservation, were surveyed in January, 1912, by Jesse B. Wright, U.S. Surveyor, who established closing corners at all points of intersection of the subdivision lines with the Reservation boundary.

The following notes describe the survey of the subdivision lines in that portion of the township situated inside the Reservation, extending the existing lines from the closing corners, and completing the survey of the subdivision of the township.

The closing cor. of those parts of secs. 1 and 2, T.26 N., R.8 W., situated outside the Hualpai Indian Reservation is an iron post, 2 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by a mound of stone, S. of cor. No bearing trees. This closing cor. is of record as being established on the H.I.R. boundary at 62.85 chs. N.0°1' W. from the cor. of secs. 1, 2, 11 and 12. Change the marking on the brass cap to read:



This cor. now refers to areas on both sides of the Reservation boundary.

Thence, N.0°1' W., on a random line, between those parts of secs. 1 and 2, situated inside the H.I.R.

17.24 Fall 1 lk. E. of the cor. of secs. 1, 2, 35 and 36, on the N. bdy. of the Tp., hereinbefore described.

Thence, S.0°3' E., on a true line, between those parts of secs. 1 and 2, situated inside the H.I.R.

Over rolling land, thru. very scattering timber and dense undergrowth. Ascend 90 ft. over NW. slope.

8.64 Point of spur. slopes W. Descend 25 ft., over SW. slope, to
 17.24 (80.09 chs. N.0°1' W., from the cor. of secs. 1, 2, 11 and 12,) Intersect the closing cor. of secs. 1 and 2, on the H.I.R. boundary.

Land, rolling.

Soil, gravelly and rocky, 4th rate.

Timber, very scattering juniper and pine.

Undergrowth, dense prickly ash, quinine brush, scrub oak and sage brush.

No grass.

 The closing cor. of those portions of secs. 10 and 11, situated outside the Reservation is an iron post, 2 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by two properly marked bearing trees, as follows:


- A pine, S.2° E., 70 lks. dist., and
- A cedar, S.51½° W., 42 lks. dist.

This closing cor. is of record as being established on the H.I.R. boundary at 76.00 chs. N.0°1' W. from the cor. of secs. 10, 11, 14 and 15.


Change the marking on the brass cap to read:

Part of Subdivision lines of T. 26 N., R. 8 W. (completion) 13

Chains.




Thence,
 N.0°1'W., bet. those parts of secs. 10 and 11, situated inside the H.I.R.
 Over roughly rolling land, thru. scattering timber and dense undergrowth.
 Descend 10 ft., over NE. slope.
 1.29 Gulch, 30 lks. wide, course SE.
 Ascend 35 ft., over S. slope, to
 4.00 (80.00 chs. N.0°1'W. from the cor. of secs. 10, 11, 14 and 15).
 Set an iron post 3 ft. long, 2 ins. in diam., 12 ins. in the ground, to bed rock, and raise a mound of stone around post, for cor. of secs. 2, 3, 10 and 11, marked on brass cap,



from which,
 A juniper, 20 ins. in diam., brs. N.1°E., 58 lks. dist., marked T26N R8W S2 BT.
 and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor., 3 ft. dist.
 Land, roughly rolling.
 Soil, rocky, 4th rate.
 Timber, scattering juniper and pine.
 Undergrowth, dense quinine brush.
 Poor grass.

4.74 East, on a random line, between those parts of secs. 2 and 11, situated inside the H.I.R.
 Intersect the closing cor. of those portions of secs. 2 and 11 situated outside the H.I.R., which is an iron post, 2 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by one properly marked bearing tree,
 A cedar, S.76°E., 176 lks. dist., and a mound of stone, E. of cor.
 This closing cor. is of record as being established on the H.I.R. boundary at 75.00 chs. W. from the cor. of secs. 1, 2, 11 and 12. The total length of sec. line bet. secs. 2 and 11 is therefore 4.74 chs. + 75 chs. = 79.74 chs.

Change the marking on the brass cap to read:



This closing cor. now refers to areas on both sides of the Reservation boundary.
 Thence,
 West, on true line, between those parts of secs. 2 and 11, situated inside the H.I.R.
 Over roughly rolling land, thru. scattering timber and dense undergrowth. Ascend 15 ft. over SE. slope, to

14 Part of Subdivision lines of T. 26 N., R. 8 W. (completion)

Chains.

4.74 (79.74 chs. W. from the cor. of secs. 1, 2, 11 and 12) Intersect the cor. of secs. 2, 3, 10 and 11.
 Land, roughly rolling.
 Soil, rocky, 4th rate.
 Timber, scattering juniper and cedar.
 Undergrowth, dense quinine brush.
 No grass.

N. 0° 1' W., on a random line, bet. secs. 2 and 3.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.18 Fall 12 lks. W. of the cor. of secs. 2, 3, 34 and 35 on the N. bdy. of the Tp., hereinbefore described.
 Thence,
 S. 0° 4' W., on a true line, bet. secs. 2 and 3.
 Over mountainous land, thru. dense timber and undergrowth, along top of ridge, bearing N. and S. Desc. 40 ft., to
 19.80 Head of gulch, course E. Leave top of ridge, brs. N. and SW. Asc. 21 ft., over NE. slope.
 22.90 Fork of two spurs, one sloping E. and one sloping S. Desc. 70 ft., along top of spur, sloping S.
 29.90 Point of spur; leave top of spur, and desc. 144 ft. over S. slope, to
 39.00 Gulch, course SE. Thence along SE. slope, descending slightly to
 40.18 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
 S 3 | S 2
 1920

from which,

A pine, 12 ins. in diam., brs. S. 84° E., 23 lks. dist., marked $\frac{1}{4}$ S 2 BT.

A pine, 8 ins. in diam., brs. N. 53° W., 53 lks. dist., marked $\frac{1}{4}$ S 3 BT.

Descend 70 ft., over SE. slope.

54.70 Gulch, 20 lks. wide, course N. 50° E. Asc. 110 ft., over NE. slope.

72.00 Spur, slopes S. 70° E. Desc. 44 ft., over S. slope, to

80.18 The cor. of secs. 2, 3, 10 and 11.

Land, mountainous.

Soil, gravelly and rocky, 4th rate.

Timber, dense juniper and pine.

Undergrowth, dense scrub oak.

No grass.

The closing cor. of those portions of secs. 9 and 10, situated outside the Reservation is an iron post 2 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by two properly marked bearing trees as follows:

A cedar, N. 78° E., 47 lks. dist., and

A pine, S. 41° W., 100 lks. dist.

This closing cor. is of record as being established on the H. I. R. boundary at 9.00 chs. N. 0° 2' W., from the cor. of secs. 9, 10, 15 and 16. Change the marking on the brass cap to read:

S 9 | S 10

H I R
 CC

S 9 | S 10

T 26 N | R 8 W

1912

1920

Part of Subdivision lines of T. 26 N., R. 8 W. (completion)

Chains.

This closing cor. now refers to areas on both sides of the Reservation boundary.

Thence, N.0°2'W., between those parts of secs.9 and 10, situated inside the H.I.R.

Over gently rolling land, thru. dense timber and undergrowth. Descend gradually over NW.slope, to

14.50 Leave gently rolling, and enter mountainous land. Ascend 45 ft., over SE.slope.

21.00 Point of spur, slopes E. Desc. 94 ft., over NE.slope, to

31.00 (40.00 chs. N.0°2'W., from the cor. of secs.9,10,15 and 16) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,



from which

A juniper, 10 ins. in diam., brs. N.72°E., 49 lks. dist., marked 1/4 S 10 BT.

A juniper, 8 ins. in diam., brs. N.45°W., 14 lks. dist., marked 1/4 S 9 BT.


Descend 57 ft., over NE.slope, to

44.00 Gulch, 10 lks. wide, course NE. Leave mountainous and enter rolling land. Desc. 55 ft., over NE.slope, to

54.00 Gulch, 15 lks. wide, course NW. Desc. gradually over W. slope, to

65.60 Gulch, 20 lks. wide, course NW. from E. Asc. 25 ft., over SW.slope, to

71.00 (80.00 chs. N.0°2'W. from the cor. of secs.9,10,15 and 16) Set an iron post 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bed rock, and raise a mound of stone around post, for cor. of secs. 3,4, 9 and 10, marked on brass cap,



from which,

A pine, 24 ins. in diam., brs. N.26°E., 180 lks. dist., marked T26N R8W S3 BT.

A pine, 14 ins. in diam., brs. S.33°E., 99 lks. dist., marked T26N R8W S10 BT.

A pine, 30 ins. in diam., brs. S.61°W., 190 lks. dist., marked T26N R8W S9 BT.

A pine, 12 ins. in diam., brs. N.36 1/2°W., 94 lks. dist., marked T26N R8W S4 BT.

Land, rolling and mountainous.

Soil, gravelly and rocky, 3rd and 4th rate.

Timber, dense juniper and pine.

Undergrowth, dense scrub oak.

No grass.

40.00 East, on a random line, bet. secs.3 and 10.

79.94 Set temp. 1/4 sec. cor.

Fall 12 lks. S. of the cor. of secs.2,3,10 and 11.

Thence,

S.89°55'W., on a true line, bet. secs.3 and 10.

Over mountainous land, thru. dense timber and undergrowth.

Descend 20 ft., over S.slope.

5.95 Gulch, 10 lks. wide, course SE. Asc. 197 ft., over E.slope.

19.95 Point of spur, slopes NE. Desc. 47 ft., over NW.slope.

27.90 Same gulch, 12 lks. wide, course NE. Ascend 114 ft., over E.slope.

16 Part of Subdivision lines of T.26 N. R.8 W. (completion)

Chains.

36.60

Ridge, brs. N. and S. Thence along top of spur, sloping W. Descend 10 ft., to

39.97

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,
$$\frac{1}{4} \begin{array}{l} S \ 3 \\ S \ 10 \\ 1920 \end{array}$$

from which,

A pine, 6 ins. in diam., brs. N. 50° E., 38 lks. dist., marked $\frac{1}{4}$ S 3 BT.A juniper, 6 ins. in diam., brs. S. 32 $\frac{1}{2}$ ° E., 52 lks. dist., marked $\frac{1}{4}$ S 10 BT.

Continue along top of spur, sloping W.

Descend 115 ft., to

68.00

Leave top of spur. Thence along N. slope of same near top.

Descend 50 ft., to

79.94

The cor. of secs. 3, 4, 9 and 10.

Land, mountainous.

Soil, gravelly and rocky, 4th rate.

Timber, dense juniper and pine.

Undergrowth, dense scrub oak.

No grass.

40.00

N. 0° 4' E., on a random line, bet. secs. 3 and 4.

Set temp. $\frac{1}{4}$ sec. cor.

79.98

Fall 35 lks. E. of the cor. of secs. 3, 4, 33 and 34, on the N. bdy. of the Tp., hereinbefore described.

Thence,

S. 0° 11' E., on a true line, bet. secs. 3 and 4.

Over rolling land, thru. dense timber and scattering undergrowth. Ascend gradually over N. and NE. slope, to

39.98

Ridge, brs. N and SE. Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bed rock, and raise a mound of stone around post, for $\frac{1}{4}$ sec. cor., marked on brass cap,
$$\frac{1}{4} \begin{array}{l} S \ 4 \ | \ S \ 3 \\ 1920 \end{array}$$

from which,

A pine, 12 ins. in diam., brs. S. 71° E., 33 lks. dist., marked $\frac{1}{4}$ S 3 BT.A pine, 8 ins. in diam., brs. S. 6° W., 23 lks. dist., marked $\frac{1}{4}$ S 4 BT.

Leave rolling, and enter mountainous land.

Descend 152 ft. over SW. slope.

66.30

Gulch, 10 lks. wide, course W. Asc. 17 ft., over NW. slope.

71.50

Point of spur, slopes W. Desc. 63 ft., over SW. slope.

76.20

Gulch, 10 lks. wide, course W. Asc. 29 ft., over NW. slope, to

79.98

The cor. of secs. 3, 4, 9 and 10.

Land, N. $\frac{1}{2}$, rolling; S. $\frac{1}{2}$, mountainous.

Soil, gravelly and rocky, 4th rate.

Timber, dense juniper and pine.

Undergrowth, scattering scrub oak.


No grass.

The closing cor. of those portions of secs. 16 and 17 situated outside the H.I.R. is an iron post 2 ins. in diam., projecting 12 ins. above ground firmly set, properly marked on brass cap, and witnessed by three pits, one each N. 50° E., S. 50° W. and S. of post, and a mound of earth S. of cor. No bearing trees.

Part of Subdivision lines of T. 26 N. R. 8 W. (completion) 17

Chains.

This closing cor. is of record as being established on the H.I.R. boundary at 22.10 chs. N. 0° 3' W. from the cor. of secs. 16, 17, 20 and 21. Change the marking on the brass cap to read:




This closing cor. now refers to areas on both sides of the Reservation boundary.

Thence, N. 0° 3' W., bet. those parts of secs. 16 and 17, situated inside the H.I.R.

Over gently rolling land, thru. scattering timber and undergrowth.


17.90 Ascend very gradually over SW. slope, to (40.00 chs. N. 0° 3' W. of the cor. of secs. 16, 17, 20 and 21) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,



- from which,
- A juniper, 24 ins. in diam., brs. N. 63 1/2° E., 36 lks. dist., marked 1/4 S 16 BT.
- A pine, 26 ins. in diam., brs. N. 65° W., 54 1/2 lks. dist., marked 1/4 S 17 BT.

Continue over gently rolling land; ascend very gradually over SW. slope to sec. cor.

25.80 Old road brs. NW. and SE.
42.90 Wash, 20 lks. wide, course SW.
57.90 (80.00 chs. N. 0° 3' W. from the cor. of secs. 16, 17, 20 and 21) Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 8, 9, 16 and 17, marked on brass cap,



- from which,
- A pine, 14 ins. in diam., brs. N. 68° E., 25 lks. dist., marked T26N R8W S9 BT.
- A pine, 12 ins. in diam., brs. S. 75° E., 104 lks. dist., marked T26N R8W S16 BT.
- A pine, 14 ins. in diam., brs. S. 41° W., 54 lks. dist., marked T26N R8W S17 BT.
- A pine, 14 ins. in diam., brs. N. 46° W., 36 lks. dist., marked T26N R8W S8 BT.

Land, gently rolling.
Soil, sandy and gravelly, 3rd rate.
Timber, scattering juniper and pine.
Undergrowth, scattering prickly ash and scrub oak.
Fair grass.

East, on a random line, bet. those parts of secs. 9 and 16, situated inside the H.I.R.

18. Part of subdivision lines of T.26.N.,R.8.W.(completion)

Chains.

40.00 Set temp. $\frac{1}{4}$ sec.cor.
 68.92 Fall 10 lks.N. of the closing cor. of those parts of secs. 9 and 16, situated outside the H.I.R., which is an iron post 2 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by two properly marked bearing trees as follows:


- A pine, S.45°E., 27 lks.dist., and
- A cedar, N.62°E., 62 lks.dist.

This closing cor.is of record as being established on the H.I.R. boundary at 10.72 chs.W. from the cor.of secs.9,10,15 and 16; therefore, the total length of the sec.line bet. secs.9 and 16 is 68.92 chs. + 10.72 chs. = 79.64 chs.

The portion of the E. $\frac{1}{2}$ of secs.9 and 16 situated inside the H.I.R. is an extension of the existing portion of the line, and will therefore, have a true course of west to the midpoint of the sec.line.

The falling of the random line on the C.C. will therefore be the falling for the W.half of line bet. secs.9 and 16, and gives a true course for such portion of the line, N.89°51'W.

Change the marking on the brass cap to read:

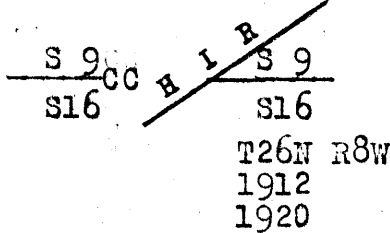

This closing cor.now refers to areas on both sides of the Réservation boundary.

Thence,

West; on a true line, bet. those parts of the East halves of secs.9 and 16 situated inside the H.I.R.

Over gently rolling land, thru. dense timber and scattering undergrowth. Desc.30 ft., over NW.slope, to


3.80 Rim, brs.NW. and SE. Leave gently rolling, and enter mountainous land:

Descend 237 ft.; over SW. slope.

9.82 Gulch, 15 lks.wide, course NW. Asc. 200 ft., over NE.slope.

28.92 Point of steep rocky spur; sloping NW. Desc. slightly over SW.slope, to

29.10 Midpoint of the sec.line (39.82 chs. W.of the cor. of secs. 9,10, 15 and 16) Set an iron post 3 ft.long, 1 in. in diam., 26 ins.in the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,



from which,

A pine, 8 ins. in diam., brs.E.51 $\frac{1}{4}$ °E., 11 lks. dist., marked $\frac{1}{4}$ S 9 BT.

A pine, 8 ins. in diam., brs.S.12°W., 35 lks. dist., marked $\frac{1}{4}$ S 16 BT.

Thence,

N.89°51'W., on a true line bet. the West halves of secs. 9 and 16.

Over mountainous land, thru. dense timber and scattering undergrowth.

Descend 365 ft. over steep SW.slope, to

11.12 Foot of steep descent.

Leave mountainous land and dense timber, and enter rolling land and scattering timber.

Descend 147 ft., over SW.slope, to

25.80 Wash, 20 lks.wide, course SW. Asc. very gradually over SW. slope, to

Part of Subdivision lines of T.26 N. R. 8 W.(completion) 19


Chains.

39.82 The cor.of secs. 8,9,16 and 17.
Land, mountainous and rolling.
Soil,gravelly and rocky, 4th rate.
Timber, juniper and pine, dense and scattering.
Undergrowth, scattering prickly ash and scrub oak.
No grass.

N.0°3'W., bet. secs.8 and 9.
Over gently rolling land, thru. dense timber and under-
growth. Asc. very gradually over SW.slope to 1/4 sec.
cor.

17.30 Wash,12 lks.wide, course SW.

40.00 Set an iron post 3 ft.long, 1 in.in diam., 26 ins.in the
ground, for 1/4 sec.cor., marked on brass cap,



from which,

A pine, 8 ins. in diam., brs.S.8°E.,12 lks.
dist., marked 1/4 S 9 BT.


A pine,14 ins.in diam., brs.N.50°W.,63 lks.
dist., marked 1/4 S 8 BT.

Leave gently rolling, and enter mountainous land.
Ascend 402 ft. over steep SW.slope.

61.00 Ridge, brs.NW. and SE. Desc. gradually over NE.slope, to

71.25 Descend 65 ft.,over NW.slope, to

80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 24 ins. in
the ground, for cor.of secs. 4,5,8 and 9, marked on
brass cap,



from which,

A juniper, 8 ins. in diam., brs.N.58°E.,34 lks.
dist., marked T26N R8W S4 BT.

A juniper, 10 ins.in diam., brs.S.53°E.,41 lks.
dist., marked T26N R8W S9 BT.

A juniper, 8 ins. in diam., brs.S.54°W.,68 lks.
dist., marked T26N R8W S8 BT.

A pine,8 ins. in diam., brs.N.17°W.,26 lks.
dist., marked T26N R8W S5 BT.

Land,S.1/2 gently rolling; N.1/2, mountainous.

Soil, gravelly and rocky, 4th rate.

Timber, dense juniper and pine.

Undergrowth, dense scrub oak and scattering prickly ash.
No grass.

40.00 S.89°55'E., on a random line, bet. secs.4 and 9.

80.00 Set temp.1/4 sec.cor.

80.00 Fall 12 lks.S.of the cor.of secs.3,4,9 and 10.

Thence,

West, on a true line, bet. secs.4 and 9.

Over mountainous land, thru.scattering timber and under-
growth. Descend 28 ft.,over W.slope.

4.90 Gulch,10 lks.wide, course NW. Asc.140 ft.,over NE.slope.

15.00 Spur,slopes NW. Desc.91 ft.,over W.slope.

24.00 Gulch,10 lks.wide,course NW. Asc.146 ft.,over NE.slope.

39.00 Ridge, brs.NW. and SE. Thence over top of ridge, to

20 Part of Subdivision lines of T 26 N. R. 8 W. (completion)

Chains.
40.00

Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 4
S 9
1920

from which,

A pine, 10 ins. in diam., brs. N. $51\frac{1}{2}^{\circ}$ E., 306 lks. dist., marked $\frac{1}{4}$ S 4 BT.

A pine, 12 ins. in diam., brs. S. $33\frac{1}{2}^{\circ}$ E., 170 lks. dist., marked $\frac{1}{4}$ S 9 BT.

Leave top of ridge.

Descend 62 ft. over W. slope.

47.10 Gulch, 10 lks. wide, course NW. Asc. 86 ft., over NE. slope.

59.00 Ridge, brs. NW. and SE. Desc. 109 ft., over W. slope.

65.70 Gulch, 10 lks. wide, course NW. Asc. 58 ft., over NE. slope.

71.00 Point of spur, slopes N. Desc. 175 ft., over NW. slope, to

80.00 The cor. of secs. 4, 5, 8 and 9.

Land, mountainous.

Soil, gravelly and rocky, 4th rate.

Timber, scattering juniper and pine.

Undergrowth, scattering scrub oak.

No grass.

N. $0^{\circ} 11' W.$, on a random line, bet. secs. 4 and 5.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.94 Fall 11 lks. E. of the cor. of secs. 4, 5, 32 and 33, on the N. bdy. of the Tp., hereinbefore described.

Thence,

S. $0^{\circ} 16' E.$, on a true line, bet. secs. 4 and 5.

Over mountainous land, thru. dense timber and scattering undergrowth. Desc. 166 ft. over W. and SW. slopes, along E. side of Robbers Roost Canyon.

24.55 Gulch, 10 lks. wide, course SW. Asc. 65 ft., over NW. slope, to

39.94 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 5 | S 4
1920

from which,

A pine, 10 ins. in diam., brs. S. 81° E., 80 lks. dist., marked $\frac{1}{4}$ S 4 BT.

A juniper, 12 ins. in diam., brs. N. $62\frac{1}{2}^{\circ}$ W., 9 lks. dist., marked $\frac{1}{4}$ S 5 BT.

Ascend 25 ft., over NW. slope.

51.00 Spur, slopes W.; desc. 51 ft., over S. slope.

58.10 Gulch, 12 lks. wide, course W. Ascend 26 ft., over N. slope.

65.90 Ridge, brs. NW. and SE. Desc. 44 ft., over S. slope.

70.95 Gulch, 10 lks. wide, course W. Asc. 91 ft., over NW. slope, to

79.94 The cor. of secs. 4, 5, 8 and 9.

Land, mountainous.

Soil, gravelly and rocky, 4th rate.

Timber, dense juniper and pine.

Undergrowth, scattering scrub oak and prickly ash.

No grass.


The closing cor. of those portions of secs. 19 and 30, situated outside the H. I. R. is an iron post, 2 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by two properly marked bearing trees, as follows:

Part of Subdivision lines of T.26 N., R.8 W. (completion) 21

Chains.

A cedar, N.83°E., 156 lks. dist., and
A cedar, S.15°W., 112 lks. dist.

This closing cor. is of record as being established on the H.I.R. boundary at 42.30 chs. W. from the cor. of secs. 19, 20, 29 and 30. Change the marking on the brass cap to read:



This closing cor. now refers to areas on both sides of the Reservation boundary.

Thence, West, on random line, bet. those parts of secs. 19 and 30, situated inside the H.I.R.

36.85 (79.15 chs. westing from cor. of secs. 19, 20, 29 and 30) fall 10 lks. N. of the cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp., hereinbefore described.

Thence, S. 89° 52' E., on a true line, between those parts of secs. 19 and 30 inside the H.I.R.

Over gently rolling land, thru. dense timber and scattering undergrowth.

Ascend 34 ft., over SW. slope.

19.40 Point of spur, slopes S. Descend 20 ft., over SE. slope.

26.00 Wash, course S. Ascend 14 ft., over W. slope.

30.50 Point of low spur, slopes S. Descend 12 ft., over E. slope.

35.40 Wash, course S. Ascend 14 ft., over SW. slope, to

36.85 Intersect the closing cor. of secs. 19 and 30, on the H.I. R. boundary.

Land, gently rolling.

Soil, gravelly, rocky, 3rd and 4th rate.

Timber, dense juniper and pine.

Undergrowth, scattering prickly ash and sage brush.


Fair grass.

The closing cor. of those portions of secs. 19 and 20, situated outside the H.I.R. is an iron post, 2 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by two properly marked bearing trees as follows:

A cedar, S. 37° E., 223 lks. dist., and
A cedar, S. 22° W., 265 lks. dist.

This closing cor. is of record as being established on the H.I.R. boundary at 35.40 chs. N. 0° 3' W. from the cor. of secs. 19, 20, 29 and 30.

Change the marking on the brass cap to read:



This closing cor. now refers to areas on both sides of the Reservation boundary.

Thence, N. 0° 3' W., bet. those parts of secs. 19 and 20 situated inside the H.I.R.

Over gently rolling land, thru. scattering timber and

22 Part of Subdivision lines of T.26 N. R. 8 W. (completion)


Chains.

4.60 dense undergrowth.
Ascend very gradually over SW slope, to
(40.00 chs. N. 0° 3' W., from the cor. of secs. 19, 20, 29 and 30)
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,



from which,
A juniper, 40 ins. in diam., brs. S. 29 $\frac{1}{4}$ ° W., 185
lks. dist., marked $\frac{1}{4}$ S 19 BT.
A juniper, 30 ins. in diam., brs. N. 88 $\frac{1}{2}$ ° E., 360
lks. dist., marked $\frac{1}{4}$ S 20 BT.


44.60 Leave dense, and enter scattering undergrowth,
Thence over nearly level land. Ascend very gradually
over SW slope, to
(80.00 chs. N. 0° 3' W., from the cor. of secs. 19, 20, 29 and
30), Set an iron post 3 ft. long, 2 ins. in diam.,
24 ins. in the ground, for cor. of secs. 17, 18, 19 and 20,
marked on brass cap,



from which,
A juniper, 28 ins. in diam., brs. N. 71 $\frac{1}{2}$ ° E., 34 lks.
dist., marked T26N R8W S17 BT.
A juniper, 16 ins. in diam., brs. S. 59 $\frac{3}{4}$ ° E., 203 lks.
dist., marked T26N R8W S20 BT.
A juniper, 14 ins. in diam., brs. S. 75 $\frac{1}{2}$ ° W., 66 lks.
dist., marked T26N R8W S19 BT.
A pine, 12 ins. in diam., brs. N. 44° W., 201 lks.
dist., marked T26N R8W S18 BT.

Land, gently rolling and nearly level.
Soil, sandy and gravelly, 3rd rate.
Timber, scattering juniper and pine.
Undergrowth, prickly ash and sagebrush, dense and scat-
tering.
Fair grass.

40.00 East, on a random line, bet. those parts of secs. 17 and
20, situated inside the H.I.R.
53.69 Set temp. $\frac{1}{4}$ sec. cor.
Intersect the closing cor. of those parts of secs. 17 and 20,
situated outside the H.I.R., which is an iron post, 2
ins. in diam., projecting 12 ins. above ground, firmly
set, properly marked on brass cap, and witnessed by two
properly marked bearing trees as follows:
A cedar, N. 85° E., 120 lks. dist., and
A cedar, S. 51° E., 57 lks. dist.
This closing cor. is of record as being established on the
H.I.R. bdy. at 26.35 chs. W. from the cor. of secs. 16, 17,
20 and 21.
The total length of the sec. line is therefore 53.69 chs.
+ 26.35 chs. = 80.04 chs.
Change the marking on the brass cap to read:



Part of Subdivision lines of Township 26 N., R. 8 W. (completion) 23

Chains.

This closing cor. now refers to areas on both sides of the Reservation boundary.

Thence,

West, on true line, bet. those parts of secs.17 and 20, situated inside the H.I.R.

Over nearly level land, thru. scattering timber and undergrowth.

13.40 Wash, 20 lks. wide, course S. 10° W.

13.67 Midpoint on sec. line (40.02 chs. W. from cor. of secs. 16, 17, 20 and 21), Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

1/4 S 17
S 20
1920

from which,

A juniper, 12 ins. in diam., brs. S. 1 1/2° W., 53 lks. dist., marked 1/4 S 20 BT.

A juniper, 10 ins. in diam., brs. N. 3° W., 323 lks. dist., marked 1/4 S 17 BT.

Continue over nearly level land, thru. scattering timber and undergrowth.

Ascend 30 ft., over SE. slope.

19.10 Thence over S. slope, with slight change in elevation.

53.69 (80.04 chs. West from cor. of secs. 16, 17, 20 and 21) Intersect the cor. of secs. 17, 18, 19 and 20.

Land, nearly level.

Soil, sandy and gravelly, 3rd rate.

Timber, scattering juniper, pine and cedar.

Undergrowth, scattering scrub oak and sagebrush.

Fair grass.

West, on a random line, bet. secs. 18 and 19.

40.00 Set temp. 1/4 sec. cor.

78.80 Fall 3 lks. N. of the cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp., hereinbefore described.

Thence,

N. 89° 59' E., on a true line, bet. secs. 18 and 19.

Over rolling land, thru. dense timber and scattering undergrowth.

Ascend 10 ft., over NW. slope.

.80 Spur, slopes SW. Descend 52 ft., over SE. slope.

13.30 Wash, 50 lks. wide, course SW. Leave dense, and enter scattering timber. Ascend 40 ft., over W. slope.

20.30 Ridge, brs. N. and S. Descend 20 ft., over E. slope.

22.50 Ascend 10 ft., over W. slope.

25.90 Point of spur, slopes N. from SW. Desc. 50 ft., over E. slope.

33.80 Wash, 50 lks. wide, course SE. Ascend 20 ft., over SW. slope, to

38.80 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

1/4 S 18
S 19
1920

from which,

A juniper, 30 ins. in diam., brs. S. 29° E., 263 lks. dist., marked 1/4 S 19 BT.

A juniper, 32 ins. in diam., brs. N. 64 1/2° W., 86 lks. dist., marked 1/4 S 18 BT.

Ascend 60 ft., over SW. slope.

45.00 Leave scattering and enter dense timber.

49.55 Spur, slopes S. from NW. Descend 45 ft., over E. slope.

51.30 Leave dense, and enter scattering timber.

57.30 Wash, 60 lks. wide, course S. Leave rolling, and enter

24 Part of Subdivision lines of T.26 N. R.8 W. (completion)

Chains.

- nearly level land.
- 70.70 Leave nearly level, and enter gently rolling land.
Descend 25 ft., over SE. slope.
- 75.00 Wash, 100 lks. wide, course S. 10°W. from N. Ascend 22 ft.
over SW. slope, to
- 78.80 The cor. of secs. 17, 18, 19 and 20.
Land, rolling and nearly level.
Soil, gravelly and rocky, 3rd and 4th rate.
Timber, juniper and pine, scattering and dense.
Undergrowth, scattering prickly ash, scrub juniper and
sage brush.
Fair grass.

- N. 0°3'W., bet. secs. 17 and 18.
Over nearly level land, thru. scattering timber and under-
growth.
Ascend very gradually over S. slope to $\frac{1}{4}$ sec. cor.
- 23.50 Leave scattering and enter dense timber.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
 S18 | S17
 1920

- from which,
- A juniper, 26 ins. in diam., brs. S. 87°E., 34 lks.
dist., marked $\frac{1}{4}$ S 17 BT.
- A juniper, 38 ins. in diam., brs. N. 68°W., 25 lks.
dist., marked $\frac{1}{4}$ S 18 BT.
- Continue over nearly level land, thru. dense timber and
scattering undergrowth.
- Ascend very gradually over SE. slope, to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
the ground, for cor. of secs. 7, 8, 17 and 18, marked on
brass cap,

T26N | R8 W
 S 7 | S 8
 S18 | S17
 1920

- from which,
- A juniper, 12 ins. in diam. brs. N. 38 $\frac{1}{2}$ °E., 85 lks.
dist., marked T26N R8W S8 BT.
- A pine, 10 ins. in diam.; brs. S. 47 $\frac{1}{2}$ °E., 63 lks.
dist., marked T26N R8W S17 BT.
- A juniper, 8 ins. in diam., brs. S. 63 $\frac{1}{4}$ °W., 30 lks.
dist., marked T26N R8W S18 BT.
- A pine, 12 ins. in diam.; brs. N. 41 $\frac{1}{2}$ °W., 118 lks.
dist., marked T26N R8W S7 BT.
- Land, nearly level.
Soil, sandy and gravelly, 2nd rate.
Timber, juniper and pine, scattering and dense.
Undergrowth, scattering prickly ash, scrub oak and cacti.
Fair grass.

- East, on a random line, bet. secs. 8 and 17.
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 80.20 Fall 5 lks. S. of the cor. of secs. 8, 9, 16 and 17.
Thence,
S. 89°58'W., on a true line, bet. secs. 8 and 17.
Over gently rolling land, thru. dense timber and scatter-
ing undergrowth. Desc. very gradually over SW. slope.
- 18.30 Old road, brs. N. and SE.

Part of Subdivision lines of T.26 N., R.8 W. (completion)

Chains.

30.00 Wash, 20 lks. wide, course SW. Thence over S. slope, with slight change in elevation.

40.10 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

1/4 S 8
S 17
1920

from which,
A pine, 8 ins. in diam., brs. N. 62 1/4° E., 90 lks. dist., marked 1/4 S 8 BT.
A pine, 8 ins. in diam., brs. S. 44 1/4° E., 107 lks. dist., marked 1/4 S 17 BT.

Continue over gently rolling land, thru. dense timber and scattering undergrowth.

49.30 Wash, 20 lks. wide, course SW. Leave gently rolling and enter nearly level land.

65.00 Wash, 40 lks. wide, course SW. Leave nearly level, and enter gently rolling land.

80.20 Ascend 51 ft., over E. slope, to the cor. of secs. 7, 8, 17 and 18. Land, gently rolling and nearly level. Soil, sandy and gravelly, 3rd rate. Timber, dense juniper and pine. Undergrowth, scattering prickly ash and scrub oak. Fair grass.

S. 89° 59' W., on a random line, bet. secs. 7 and 18.

40.00 Set temp. 1/4 sec. cor.

73.60 Fall 12 lks. S. of the cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp., hereinbefore described.

Thence, S. 89° 56' E. on a true line, bet. secs. 7 and 18.

Over mountainous land, thru. dense timber and scattering undergrowth.

Descend 26 ft., over NE. slope.

9.40 Gulch, 10 lks. wide, course NW.

Ascend 61 ft., over SW. slope.

18.10 Point of spur, slopes S.

Descend 12 ft., over SE. slope.

22.60 Gulch, 70 lks. wide, course SW. near head. Ascend 151 ft. over W. slope.

32.45 Spur, slopes NW. Descend 53 ft., over NE. slope.

35.85 Gulch, 20 lks. wide, course NW. Ascend 62 ft., over W. slope, to

38.60 Set an iron post 3 ft. long, 1 in. in diam., 12 ins. in the ground to bed rock, and raise a mound of stone around post, for 1/4 sec. cor., marked on brass cap,

1/4 S 7
S 18
1920

from which,
A pine, 7 ins. in diam., brs. S. 65° E., 83 lks. dist., marked 1/4 S 18 BT.
A pine, 10 ins. in diam., brs. N. 37° W., 14 lks. dist., marked 1/4 S 7 BT.

Ascend 50 ft., over W. slope.

45.30 Ridge, brs. N. and S.

Descend 40 ft., over E. slope, to

53.00 Foot of E. slope of ridge, brs. N. and S. Leave mountainous, and enter gently rolling land.

Descend very gradually over E. slope, to

78.60 The cor. of secs. 7, 8, 17 and 18.

Land, west 53 chs. mountainous; remainder, gently rolling. Soil, gravelly and rocky, 3rd and 4th rate.


26 Part of subdivision lines of T.26 N., R.8 W. (completion)

chains.

Timber, dense juniper and pine.
Undergrowth, scattering prickly ash, scrub juniper and cacti.
Fair grass in E. 25 chs. No grass elsewhere.

N.0° 3' W., bet. secs. 7 and 8.
Over gently rolling land, thru dense timber and scattering undergrowth.

- 7.00 Descend 10 ft., over NE. slope.
- Wash, 10 lks. wide, course E.
- Ascend slightly over SW. slope.
- 10.00 Descend 40 ft., over E. slope, to
- 21.17 Foot of ridge, brs. NE. and SW. Leave gently rolling, and enter mountainous land.
- Ascend 165 ft. over S. slope, to
- 39.50 Ridge, brs. NE. and SW. Thence across top of ridge to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,




from which,

- A pine, 12 ins. in diam., brs. N. 62 $\frac{1}{2}$ ° E., 76 lks. dist., marked $\frac{1}{4}$ S 8 BT.
- A pine, 6 ins. in diam., brs. N. 17 $\frac{1}{2}$ ° W., 46 lks. dist., marked $\frac{1}{4}$ S 7 BT.

Continue over mountainous land, thru dense timber and scattering undergrowth.

- Descend 35 ft., over NW. slope, to
- 47.75 South rim of Robbers Roost Canyon, brs. NE. and SW.
- Descend 180 ft., over precipitous NW. slope.
- 51.66 Bottom of Robbers Roost Canyon, 100 lks. wide, course SW.
- Ascend 190 ft., over precipitous SE. slope, to
- 57.75 N. rim of Robbers Roost Canyon, brs. NE. and SW. Asc. 100 ft., over SE. slope, to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 16 ins. in the ground, to bed rock, and raise a mound of stone around post, for cor. of secs. 5, 6, 7 and 8, marked on brass cap,



from which,

- A pine, 10 ins. in diam., brs. N. 63° E., 52 lks. dist., marked T26N R8W S5 BT.
- A juniper, 10 ins. in diam., brs. S. 62 $\frac{1}{4}$ ° E., 68 lks. dist., marked T26N R8W S8 BT.
- A pine, 8 ins. in diam., brs. S. 69 $\frac{1}{2}$ ° W., 56 lks. dist., marked T26N R8W S7 BT.
- A pine, 8 ins. in diam., brs. N. 41 $\frac{3}{4}$ ° W., 22 lks. dist., marked T26N R8W S6 BT.

Land, S. 21 chs., gently rolling; remainder, mountainous.
Soil, gravelly and rocky, 4th rate.

Timber, dense juniper and pine.
Undergrowth, scattering prickly ash, scrub oak and cacti.
Fair grass in S. 21 chs. No grass elsewhere.

- N. 89° 58' E., on a random line, bet. secs. 5 and 8.
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 80.20 Fall 23 lks. S. of the cor. of secs. 4, 5, 8 and 9.
- Thence,

Chains.

S.89°48'W., on a true line, bet. secs.5 and 8.
 Over mountainous land, thru. dense timber and scattering undergrowth.
 Descend 17 ft., over NW. slope.
 3.00 Ascend 30 ft., over NE. slope.
 9.00 N. end of ridge, bearing N. and S. at this point, general bearing NW. and SE.
 Descend 271 ft., over W. slope.
 26.60 Gulch, 10 lks. wide, course S. Ascend 205 ft., over SE. slope to the $\frac{1}{4}$ sec. cor.
 28.50 Robber's Roost Tank, brs. S. 16 chs. dist.
 40.10 Ridge, brs. NE. and S. Set an iron post 3 ft. long, 1 in. in diam., 6 ins. in the ground to bed rock, and raise a mound of stone around post, for $\frac{1}{4}$ sec. cor., marked on brass cap.

$\frac{1}{4}$ S 5
 S 8
 1920

from which,
 A pine, 6 ins. in diam., brs. N. 64° E., 39 lks. dist., marked $\frac{1}{4}$ S 5 BT.
 A pine, 8 ins. in diam., brs. S. 25° W., 31 lks. dist., marked $\frac{1}{4}$ S 8 BT.

Descend 300 ft., over W. slope.
 63.60 Bottom of Robber's Roost Canyon, 50 lks. wide, course SW. Ascend 167 ft., over SE. slope, to
 80.20 The cor. of secs. 5, 6, 7 and 8.
 Land, mountainous.
 Soil, gravelly and rocky, 4th rate.
 Timber, dense juniper and pine.
 Undergrowth, scattering scrub oak, prickly ash and cacti.
 No grass.

N. 89° 56' W., on a random line, bet. secs. 6 and 7.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 78.28 Fall 5 lks. N. of the cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp., hereinbefore described.

Thence,
 S. 89° 58' E., on a true line, bet. secs. 6 and 7.
 Over mountainous land, thru. dense timber and scattering undergrowth.
 Ascend 40 ft. over NW. slope.
 1.50 Spur, slopes SW.
 Descend 15 ft., over SE. slope.
 6.60 Gulch, 50 lks. wide, course SW. Ascend slightly over N. slope, to
 10.80 Same gulch, 10 lks. wide, course NW.
 Ascend 340 ft., over W. slope, to
 38.28 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground, to bed rock, and raise a mound of stone around post, for $\frac{1}{4}$ sec. cor., marked on brass cap.

$\frac{1}{4}$ S 6
 S 7
 1920

from which,
 A juniper, 10 ins. in diam., brs. N. 34 $\frac{1}{2}$ ° E., 21 lks. dist., marked $\frac{1}{4}$ S 6 BT.
 A pine, 12 ins. in diam., brs. S. 19 $\frac{1}{4}$ ° W., 78 lks. dist., marked $\frac{1}{4}$ S 7 BT.

Continue over mountainous land, thru. dense timber and scattering undergrowth.
 Ascend 135 ft., over W. slope.
 60.20 Ridge, brs. NE. and SW.
 Descend 53 ft., over SE. slope, to
 78.28 The cor. of secs. 5, 6, 7 and 8.


28 Part of Subdivision lines of T. 26 N., R. 8 W. (completion)

Chains.

Land, mountainous.
Soil, gravelly and rocky, 4th rate.
Timber, dense juniper and pine.
Undergrowth, scattering prickly ash and scrub oak.
No grass.

40.00 N.0° 16' W., on a random line, bet. secs. 5 and 6.
Set temp. $\frac{1}{4}$ sec. cor.
80.05 Fall 25 lks. W. of the cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp., hereinbefore described.

Thence,
S.0° 5' E., on a true line, bet. secs. 5 and 6.
Over mountainous land, thru. dense timber and undergrowth.
Descend 30 ft., over SW. slope.
6.45 Gulch, 10 lks. wide, course NW.
Ascend 135 ft., over NE. and E. slope, to
40.05 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground, to bed rock, and raise a mound of stone around post for $\frac{1}{4}$ sec. cor., marked on brass cap,



from which,
A juniper, 6 ins. in diam., brs. N. 42 $\frac{3}{4}$ ° E., 148 lks. dist., marked $\frac{1}{4}$ S 5 BT.
A juniper, 8 ins. in diam., brs. S. 76 $\frac{1}{2}$ ° W., 140 lks. dist., marked $\frac{1}{4}$ S 6 BT.
Ascend, 27 ft., over E. and NE. slopes, to
50.15 Point of spur, slopes E. Desc. 32 ft., over SE. slope.
54.50 Head of gulch, course E.
Ascend 35 ft., over N. slope.
58.50 Ridge, brs. NE and SW.
Descend 102 ft., over SE. slope, to
80.05 The cor. of secs. 5, 6, 7 and 8.
Land, mountainous.
Soil, rocky, 4th rate.
Timber, dense juniper and pine.
Undergrowth, dense prickly ash and quinine brush, and scattering scrub oak.
No grass.

The continued satisfactory adjustment of the solar apparatus, during the survey of this township, is indicated from field tests described in book "F."

Boundaries of that part of T.26 N., R.3 W., surveyed under this Group (within the Hualpai Indian Reservation)

Latitudes, Departures and Closing Errors.

Line designated.	True course.	Dist.	Latitudes.		Departures.		
			N.	S.	E.	W.	
West boundary,	North,	351.07	351.07				
North boundary,	East,	418.72			418.72		
Hualpai Indian Reservation Bdy.	S. 50° 05' W.	196.12		125.84		150.42	
	S. 50° W.	350.90		225.55		268.80	
Convergency,					.16		
<u>Totals,</u>			351.07	351.39	418.88	419.22	
				351.07		418.88	
<u>Error in latitude,</u>				0.32			
<u>Error in departure,</u>						0.34	

GENERAL DESCRIPTION.

The portion of this township surveyed as described in the foregoing notes lies entirely within the Hualpai Indian Reservation. The north two tiers of secs. are mountainous, and the remainder is gently rolling and nearly level.

The canyon known as "Robbers Roost Canyon" cuts thru. the northwestern part, draining southwest into the adjoining township; thence northwesterly into Diamond Creek Canyon and the Colorado River Canyon.

The eastern part drains northeasterly into the Aubrey Valley.

The soil is rocky, 4th rate, except the southwestern part, where the soil varies from sandy and gravelly, 2nd rate to rocky, 4th rate.

The timber consisting of Juniper, pine and cedar occurs mostly in dense growths, but all sections have either a scattering or dense growth of timber.

The undergrowth consists of scrub oak, prickly ash, quinine brush, scrub juniper, sage brush and cacti, dense along the N. bdy. of the township, and in the northeastern part, and scattering elsewhere.

A fair growth of grass is prevalent in the southwestern part, but elsewhere there is none.

There is no permanent running water, but there is a tank for periodical storage of water in sec. 8, known as Robbers' Roost Tank. A road bearing southeasterly from this tank is the only road in this part of the township.

There are no settlers, or signs of valuable mineral deposits, and aside from the road and tank mentioned, there are no improvements.

There are no settlers, or signs of valuable mineral deposits, and aside from the road and tank mentioned, there are no improvements.

BOOK 3531

CERTIFICATE OF UNITED STATES TRANSITMAN.

I, Kenneth W. Bond, ^{Transitman} U. S. ~~Surveyor~~, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 107, Arizona, bearing date of the 25th day of February, 1920, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of ^{the} Subdivision: lines of

Township 26 North, Range 8 West,

of the Gila and Salt

River base & Meridian, in the State of Arizona and by diagram on page 1 hereof, which are represented in the foregoing field notes ~~as~~ having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 107, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Place, Denver, Colorado

Date, March 28, 1921

Kenneth W. Bond

U.S. Transitman.

-U.S. Surveyor.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

....., 191

The foregoing field notes of the survey of

executed by

under his special instructions dated, 191, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

.....
U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above-described surveys in, has been correctly copied from the original notes on file in this office.

.....
U. S. Surveyor General.

BOOK 3531

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Quintin Campbell, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General for Group 107, Arizona, bearing date of the 25th day of February, 1920, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the North and West boundaries, and Subdivision lines of

Township 26 North, Range 8 West,

of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes, and by diagram on page 1 hereof as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General for Group 107, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Place - PHOENIX, Arizona
Date - March 31, 1922

Quintin Campbell
U. S. Surveyor.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix, Arizona, February 13, 1923.

The foregoing field notes of the survey of part of the North boundary, part of the West boundary, and part (completion) of the Subdivision lines of Township 26 North, Range 8 West, of the Gila and Salt River Base and Meridian, in the State of Arizona,

executed by Quintin Campbell, U. S. Surveyor, and Kenneth W. Bond, U. S. Transitman, under special instructions dated Feby. 25, 1920, for Group 107, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Frank D. Smith
U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above-described surveys in has been correctly copied from the original notes on file in this office.

U. S. Surveyor General.