

3571

Book "B"

4-879

BOOK 3571

ORIG.

# FIELD NOTES

OF THE RETRACEMENT OF

First Standard Parallel South, thru. part of Range 10 East, and  
Part of the South Bdy. of Township 4 South, Range 10 East, and  
Part of the Subdivision lines of Township 5 South, Range 10 East,

OF THE RESURVEY OF

Part of the South Boundary of Township 4 South, Range 10 East, and  
Part, (E. 1/2) of the N. Bdy., and  
Part (E. 1/2) East Boundary of Township 5 South, Range 10 East,

AND OF THE SURVEY OF

Part (completion) of the Subdivision lines of

TOWNSHIP 5 SOUTH, RANGE 10 EAST,

Of the Gila and Salt River Base and Meridian,

In the State of Arizona.

EXECUTED BY

Sidney E. Blout,

U. S. Cadastral Engineer,

In the capacity of U. S. Surveyor, under Special Instructions dated May 23, 1921,  
issued by the United States Surveyor General to govern surveys included in Group  
No. 116, Arizona, which were approved by the Commissioner of the General Land  
Office, July 6, 1921, and Assignment Instructions dated Nov. 21, 1921.

Retracement,  
Resurvey & Survey commenced January 7, 1922.

Retracement,  
Resurvey & Survey completed January 19, 1922.

3571

3571


1A

Book "B"

Group 116 - - Arizona.

BOOK 3571


INDEX DIAGRAM.

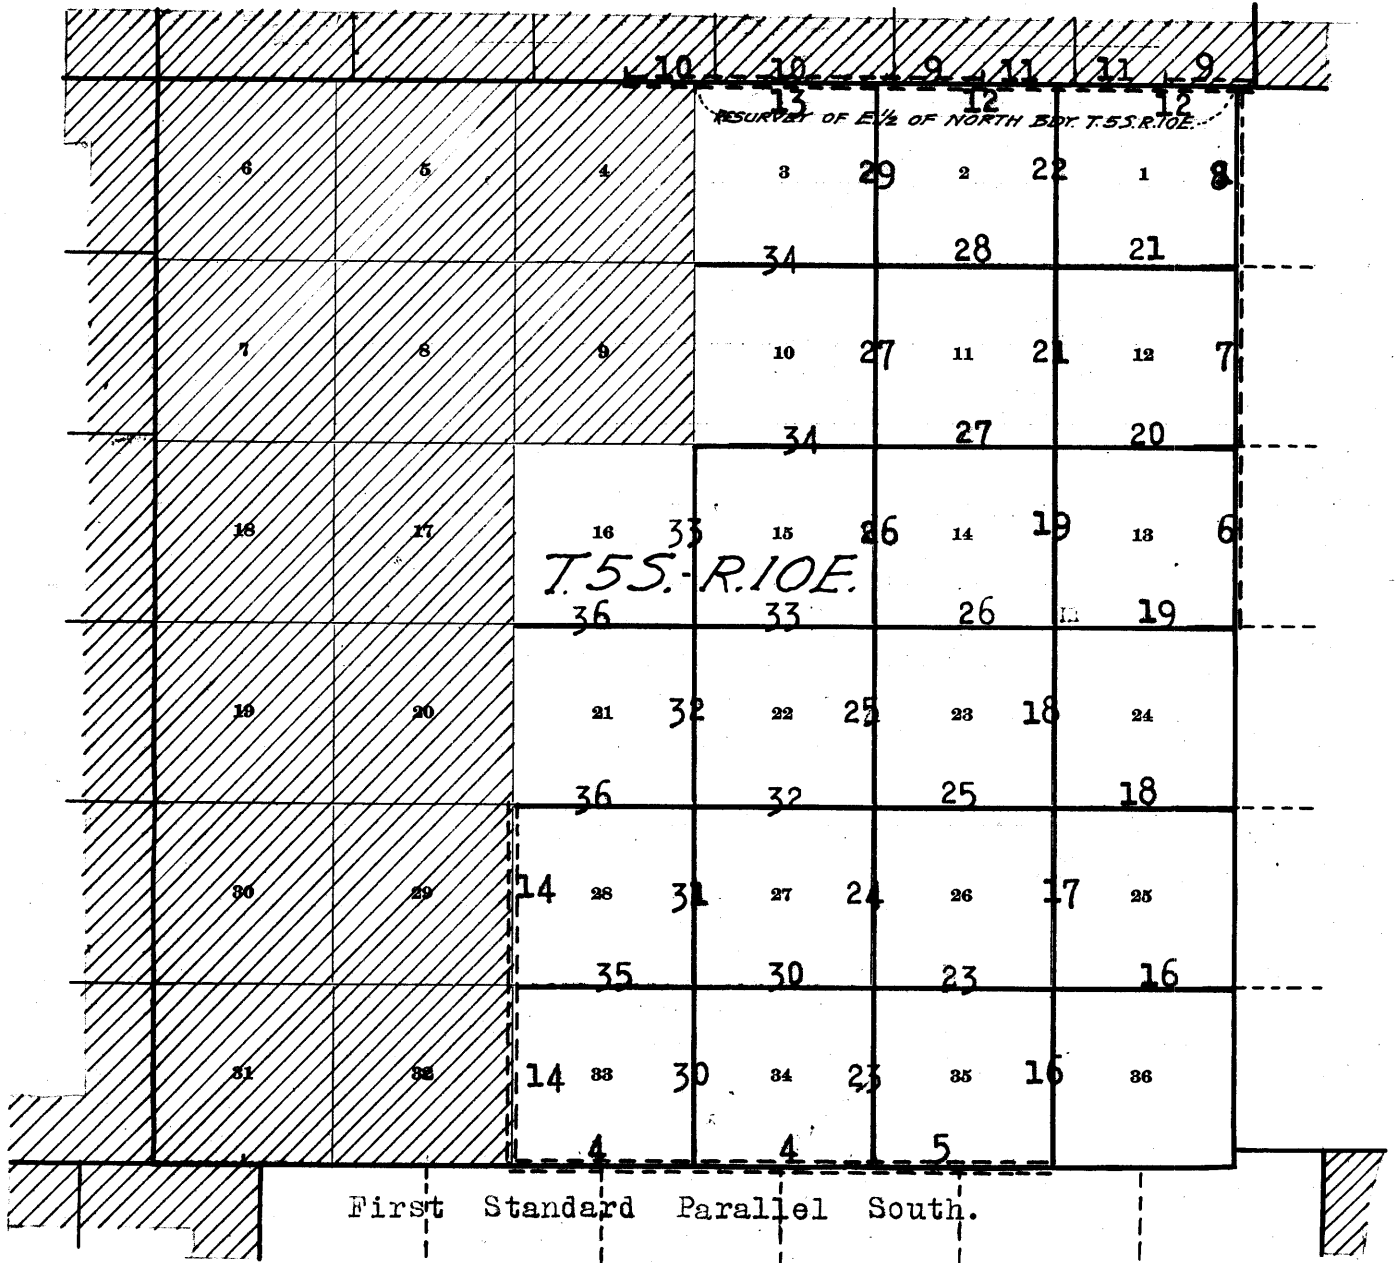

- Lines retraced under this group.
- Lines resurveyed under this group.
- Lines surveyed under this group.
- Accepted surveys.
- Unsurveyed.
- Areas surveyed as per accepted plats on file.

Book "B"  
 Group 116-- Arizona.  
 Township 5 South, Range 10 East.

DATE DIAGRAM.

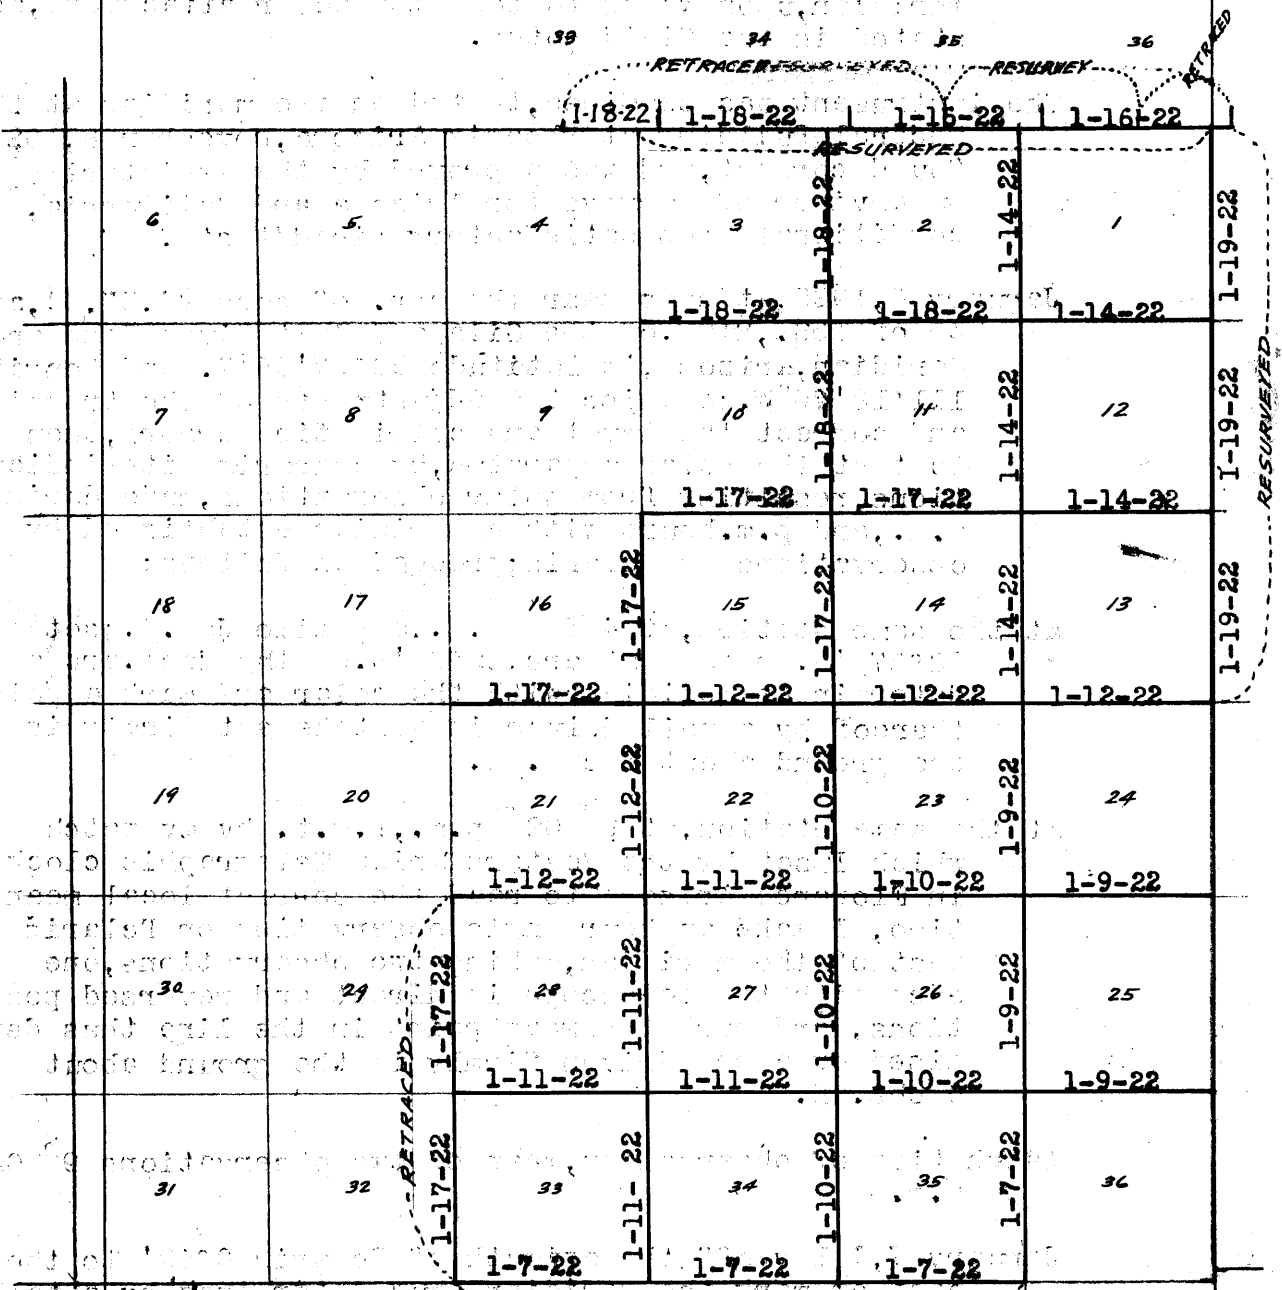

1st Standard Parallel South.

Lines retraced, resurveyed or surveyed on dates shown on above diagram, by Sidney E. Blout, U.S. Cadastral Engineer.

The retracements, resurveys, and surveys hereinafter described, executed on dates, shown on index diagram on page 1 hereof by Sidney E. Blout, U.S. Cadastral Engineer, using a Buff "Rocky Mountain Favorite" solar transit No. 9984, with U-shaped standards  $4\frac{1}{2}$  in. horizontal circle, 4 in. vertical circle, and improved Smith solar attachment; all azimuth determinations are accomplished with the solar attachment, except the special observations on Polaris and the sun for meridian, upon which to test the solar attachment, as stated in the field notes.

The instrument was examined, tested on the meridian at the Federal Building at Phoenix Arizona, November 8, 1921, found correct, and was approved by the Assistant Supervisor of Surveys for Arizona and California, conditional upon satisfactory field tests.

January 6, 1922, at camp near the cor. of secs 26, 27, 34, and 35 of T5S., R10E. of the Gila and Salt River Base and Meridian, Arizona, in latitude  $32^{\circ}57'25''$  N. and Longitude  $111^{\circ}18'20''$  W.; examine the adjustments of the transit and correct the level and collimation errors, then to test the solar apparatus, by comparing its indications, resulting from solar observations, made during a.m., and p.m. hours with a meridian established by observations on Polaris; proceed as follows;

At the same station, at  $4^{\text{h}} 30^{\text{m}}$  p.m., app time Jan. 6.; set off  $32^{\circ}57\frac{1}{2}'$  N. on the lat arc,  $22^{\circ}24'$  S. on the decl. arc and determine a meridian with the solar and mark a point thereof by a nail driven in a stake set firmly in the ground about 8 chs. N.

At the same station, at  $9^{\text{h}} 02^{\text{m}}$  p.m., l.m.t. by my watch which I set by the Western Union Telegraphic clock in Florence Arizona to read the correct local mean time, I make an hour angle observation on Polaris west of the meridian, making two observations, one each with the telescope in direct and reversed positions, and mark the mean point in the line thus determined on a peg driven firmly in the ground about 6 chs. N.

Watch time of observation, mean of two observations  $9^{\text{h}} 02^{\text{m}}$  p.m.


January 7, I lay off the azimuth of Polaris  $0^{\circ}49'$  to the east and mark the meridian thus determined by a tally pin driven in the stake set last evening on which the meridian falls  $0\frac{1}{2}'$  in angular measure E. of the mark determined by the solar.

At  $8^{\text{h}} 00^{\text{m}}$  a.m. app. time with the lat arc unchanged, set off  $22^{\circ}21\frac{1}{2}'$  S. on the decl arc and determine a meridian with the solar and mark a point thereof by a nail driven in the stake already set about 6 chs. N.; this point falls  $1\frac{1}{2}'$  E. of the meridian established by the Polaris observation.

The solar apparatus by p.m., and a.m. observations, defines positions for meridians, which agree within about  $0\frac{1}{2}'$  with the meridian established by the Polaris observation, therefore conclude that the adjustments of the instrument are satisfactory.

The magnetic bearing of the true meridian at 8 a.m., is N  $14^{\circ}16'$  W.

All measurements are made with a Lufkin 5 chain steel tape, compared with a Chesterman standard steel tape, and found correct. The measurements are made on the slope; the vertical angles determined with clinometer, and the slope measurements properly reduced to true horizontal distances.



## Retracement of First Std. Par. S., thru. part of Range 10 East.

## Chains.

The First Standard Parallel South, thru. Range 10 East, was surveyed by S.W. Foreman, U.S.D.S. in 1869, resurveyed by J.B. McLaughlin, U.S.D.S. in 1884, and again resurveyed by W. H. Elliott, U.S.S. in 1911. No subsequent retracement or resurvey of this line is of record. The following notes describe a retracement of the Parallel south of secs. 33, 34 and 35, T.5 S., R.10 E. The area to the south of this part of the line is unsurveyed.

The previously reestablished standard cor. of secs. 32 and 33 is a mesquite post 5 ins. square, projecting 12 ins. above ground, firmly set, properly marked, and witnessed by three pits, one each E., W. and N. of cor., and a mound of earth, N. of cor. No bearing trees.

Thence,

East, on a random line on S. bdy. of sec. 33 (W.  $\frac{1}{2}$ ).

Over nearly level land, sloping slightly to the NW., thru. very scattering timber and dense undergrowth.

8.20 Old road, brs. NW and SE.

40.19 Fall 1 lk. N. of the previously reestablished standard  $\frac{1}{4}$  sec. cor. of sec. 33, which is a mesquite post 4 ins. sq., projecting 10 ins. above ground, firmly set, properly marked, and witnessed by one properly marked mesquite bearing tree NW. of cor. 198 lks. dist.; two pits, one each E. and W. of cor., and mound of earth N. of cor.

True course and dist. of W.  $\frac{1}{2}$  of S. bdy. of sec. 33 are therefore S. 89° 59' E., 40.19 chs.

Thence,

East, on a random line, on S. bdy. of sec. 33 (E.  $\frac{1}{2}$ ).

Over nearly level land, sloping slightly to the NW., thru. very scattering timber and dense undergrowth.

4.81 Wash, 15 lks. wide, 1  $\frac{1}{2}$  ft. deep, course NW.

28.31 Wash, 15 lks. wide, 1 ft. deep, course S. 80° W.

32.30 Same wash, 15 lks. wide, 1 ft. deep, course N. 80° W.

40.18 Fall 2 lks. N. of the previously reestablished standard cor. of secs. 33 and 34, which is a mesquite post 5 ins. sq., projecting 10 ins. above ground, firmly set, properly marked and witnessed by one properly marked ironwood bearing tree NW. of cor. 188 lks. dist. Three pits, one each E., W. and N. of cor. and mound of earth N. of cor. True course and distance of E.  $\frac{1}{2}$  of S. bdy. of sec. 33 are therefore S. 89° 58' E., 40.18 chs.

Land, nearly level.

Soil, gravelly, 2nd rate.

Timber, very scattering mesquite, ironwood and palo verde.

Undergrowth, dense greasewood and scrub mesquite.

Fair grass.

East, on a random line on S. bdy. of sec. 34 (W.  $\frac{1}{2}$ )

Over nearly level land, sloping slightly to the NW., thru. very scattering timber and dense undergrowth.

2.20 State Auto Highway, brs. N. 20° W. and S. 20° E. Extends

northwesterly to Florence and southeasterly to Tucson.

6.50 Wash, 8 lks. wide, 1  $\frac{1}{2}$  ft. deep, course NW.

33.60 Wash, 8 lks. wide, 5 ft. deep, course NW.

40.20 Fall 2 lks. N. of the previously reestablished standard  $\frac{1}{4}$  sec. cor. of sec. 34, which is a mesquite post 5 ins. square, projecting 18 ins. above ground, firmly set, properly marked, and witnessed by two pits, one each E. and W. of cor., and a mound of earth, N. of cor. No bearing trees.

True course and dist. of W.  $\frac{1}{2}$  of S. bdy. of sec. 34 are therefore S. 89° 58' E., 40.20 chs.

Thence,

East, on a random line on S. bdy. of sec. 34 (E.  $\frac{1}{2}$ ).

Retracement of First Std. Par. South, thru part of Range 10 East. 5

Chains.

Over nearly level land, sloping slightly to the NW., thru. very scattering timber and dense undergrowth.

17.80 Wash, 8 lks. wide, 2 ft. deep, course NW.

23.40 Wash, 4 lks. wide, 1 ft. deep, course NW.

38.60 Road, brs. NW and SE.

40.19 Fall  $2\frac{1}{2}$  lks. N. of previously reestablished std. cor. of secs. 34 and 35, which is an ironwood post 4 ins. sq., projecting 18 ins. above ground, firmly set, properly marked, and witnessed by one properly marked mesquite bearing tree NW. of cor. 54 lks. dist., and three pits, one each E., W., and N. of cor., and mound of earth N. of cor.

True course and dist. of E.  $\frac{1}{2}$  of S. bdy. of sec. 34 are therefore S. 89° 58' E., 40.19 chs.

Land, nearly level.

Soil, gravelly, 2nd rate.

Timber, very scattering mesquite, ironwood and palo verde.

Undergrowth, dense greasewood and scrub mesquite.

Fair grass.

---

East, on a random line on S. bdy. of sec. 35 (W.  $\frac{1}{2}$ ).

Over nearly level land, sloping slightly to the NW., thru. very scattering timber, and dense undergrowth.

2.40 Road, brs. N. and S.

35.10 Wash, 40 lks. wide, 2 ft. deep, course NW. Thence over nearly level SW. slope.

36.80 Old road, brs. NW. and SE. Extends northwesterly to Florence, and southeasterly to Mammoth.

40.17 Fall 3 lks. N. of the previously reestablished standard  $\frac{1}{4}$  sec. cor. of sec. 35, which is an ironwood post, 4 ins. sq., projecting 18 ins. above ground, firmly set, properly marked and witnessed by two pits, one each E. and W. of cor., and mound of earth N. of cor. No bearing trees.

True course and distance of W.  $\frac{1}{2}$  of S. bdy. of sec. 35 are therefore S. 89° 58' E., 40.17 chs.

Thence,

East, on a random line on S. bdy. of sec. 35 (E.  $\frac{1}{2}$ ).

Over nearly level land, sloping slightly to the SW., thru. very scattering timber and dense undergrowth.

18.60 Wash, 20 lks. wide,  $2\frac{1}{2}$  ft. deep, course SW. Thence over nearly level NW. slope.

40.10 Fall 5 lks. N. of the previously reestablished std. cor. of secs. 35 and 36, which is an ironwood post, 5 ins. sq. projecting 20 ins. above ground, firmly set, properly marked and witnessed by three pits, one each E., W., and N. of cor., and mound of earth, N. of cor. No bearing trees.

True course and dist. of E.  $\frac{1}{2}$  of S. bdy. of sec. 35 are therefore S. 89° 56' E., 40.10 chs.

Land, nearly level.

Soil, gravelly, 2nd rate.

Timber, very scattering mesquite, palo verde and ironwood.

Undergrowth, dense greasewood and scrub mesquite.

Fair grass.


6 Resurvey of part of (N. 1/2) of East bdy. of Township 5 South, Range 10 East Chains.

This township boundary was surveyed by W.H. Elliott, U.S. in 1911, and no subsequent retracement or resurvey of any part of the line is of record. There being no accepted surveyed areas on either side of this line, the same is subject to rectification. In surveying the subdivision lines of T. 5 S., R. 10 E., hereinafter described, it was found that the connection of said subdivision lines to the existing cors. in the north half of this range line would produce defective alinement in such subdivision lines; therefore, make an independent resurvey of the north half of the Range line, as described as follows:

The original cor. of secs. 13, 18, 19 and 24 is an iron post, 3 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, witnessed by 4 pits, one each NE., SE., SW. and NW. of post, and mound of earth W. of cor. No bearing trees.

Thence, North, on true line, bet. secs. 13 and 18. Over nearly level land, sloping slightly to the NW., thru. very scattering timber and dense undergrowth.


- 6.10 Old road, brs. N. 70° W. and S. 70° E.
- 15.00 Wash, 20 lks. wide, 2 ft. deep, course NW.
- 25.00 Wash, 45 lks. wide, 2 ft. deep, course NW.
- 39.50 Wash, 15 lks. wide, 4 ft. deep, course NW.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor., marked on brass cap,



No trees suitable for bearing trees within limits; dig pits 18x18x12 ins., one each N. and S. of post, 3 ft. dist.

- 40.09 Fall 2 lks. W. of the original 1/4 sec. cor. of secs. 13 & 18, which is an iron post 1 in. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by 2 pits, one each N. and S. of post, and mound of earth W. of cor. No bearing trees. Remove this post, destroy the pits and mound of earth, and reset the post at 40.00 ch. station, as described above, changing the year marking on brass cap from 1911 to 1922.

- 60.00 Wash, 45 lks. wide, 1 ft. deep, course NW.
- 66.00 State Highway, brs. N. 50° W. and S. 50° E. Extends NW. to Florence and NE. to Kelvin.
- 69.80 Wash, 12 lks. wide, 5 ft. deep, course NW.
- 80.00 Set an iron post 3 ft. long, 3 ins. in diam., 26 ins. in the ground, for cor. of secs. 7, 12, 13 and 18, marked on brass cap,



from which,

- A palo verde, 10 ins. in diam., brs. N. 74 1/2° W., 120 lks. dist., marked T5S R10E S12-BT.
- A palo verde, 10 ins. in diam., brs. S 53° W., 126 lks. dist., marked T5S R10E S13 BT.

No other trees suitable for bearing trees available; raise a mound of stone 2 ft. base, 1 1/2 ft. high, W. of cor. Land, nearly level.



Resurvey of part (U. 1) of the East bdy. of Township 5 South Range 10 E.

Chains.


Soil, sandy and gravelly, 2nd and 3rd rate.  
Timber, very scattering palo verde, mesquite and ironwood.  
Undergrowth, dense greasewood, scrub mesquite and cacti.  
Fair grass.

North, on true line, bet. secs. 7 and 12.  
Over nearly level land, sloping slightly to the NW., thru.  
very scattering timber and dense undergrowth.

.31 Fall 5 lks. W. of the original cor. of secs. 7, 12, 13 and 18,  
which is an iron post, 3 ins. in diam., projecting 8  
ins. above ground, firmly set, properly marked on brass  
cap, and witnessed by 4 pits, one each NE., SE., SW. and  
NW. of post, and mound of earth W. of cor. No bearing  
trees.

Remove this post, destroy the pits and mound of earth, and  
reset the post at 80.00 chs. north from cor. of secs.  
13, 18, 19 and 24, as hereinbefore described, changing to  
the marking on the brass cap from 1911 to 1922.

- 3.20 Wash, 180 lks. wide, 1 ft. deep, course NW.
- 10.00 Road, brs. E. and W.
- 12.00 Wash, 12 lks. wide, 2 ft. deep, course W.
- 21.40 Wash, 15 lks. wide, 2 ft. deep, course W.
- 25.70 Old road, brs. NW. and SE.
- 28.00 Wash, 30 lks. wide, 2 ft. deep, course N. 70° W.
- 31.70 Wash, 30 lks. wide, 2 ft. deep, course W.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap,




No trees suitable for bearing trees within limits; dig  
pits 18x18x12 ins., one each N. and S. of post, 3 ft.  
ft. dist.

40.49 Fall 1 lk. E. of the original  $\frac{1}{4}$  sec. cor. of secs. 7 and 12,  
which is an iron post 1 in. in diam., projecting 10 ins.  
above ground, firmly set, properly marked on brass cap,  
and witnessed by 2 pits, one each N. and S. of post, and  
mound of earth, W. of cor. No bearing trees.

Remove this post, destroy the pits and mound of earth,  
and reset the post at 40.00 chs. station as described  
above, changing the year marking on the brass cap  
from 1911 to 1922.

- 43.80 Wash, 20 lks. wide, 3 ft. deep, course NW.
- 50.30 Old road, brs. NW. and SE.
- 54.00 Wash, 15 lks. wide, 5 ft. deep, course NW.
- 59.70 Old road, brs. NW. and SE.
- 79.50 Old road, brs. NW. and SE.
- 80.00 Set an iron post; 3 ft. long, 3 ins. in diam., 26 ins. in  
the ground for cor. of secs. 1, 6, 7 and 12, marked on  
brass cap,



No trees suitable for bearing trees available; dig pits  
18x18x12 ins., one each NE., SE., SW. and NW. of post,  
3 ft. dist.

Land, nearly level.  
Soil, sandy and gravelly, 2nd and 3rd rate.  
Timber, very scattering palo verde, mesquite and ironwood.  
Undergrowth, dense greasewood and cactus.  
Fair grass.

8 Resurvey of part (N. 1/2) of East bdy. of Township 5 South, Range 10 East Chains.

North, on true line, bet. secs. 1 and 6.  
 Over nearly level land sloping slightly to the NW., thru. very scattering timber and dense undergrowth.

.51 Fall 1 lk. E. of the original cor. of secs. 1, 6, 7 and 12, which is an iron post, 3 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by 4 pits, one each NE., SE., SW. and NW. of cor., and mound of earth, W. of cor. No bearing trees.

Remove this post, and destroy the pits and mound of earth, and reset the post at 80.00 chs. North from cor. of secs. 7, 12, 13 and 18, as hereinbefore described, changing the year marking on brass cap from 1911 to 1922.

3.60 Wash, 10 lks. wide, 2 ft. deep, course N. 80° W.  
 26.00 Wash, 10 lks. wide, 2 ft. deep, course NW.  
 37.00 Wash, 12 lks. wide, 2 ft. deep, course NW.  
 39.50 Wash, 60 lks. wide, 2 ft. deep, course NW.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

S 1 1/4 S 6  
 1922

40.50 No trees suitable for bearing trees within limits; dig pits 18x18x12 ins., one each N. and S. of post, 3 ft. dist.  
 Fall 16 lks. E. of the original 1/4 sec. cor. of secs. 1 and 6, which is an iron post 1 in. in diam., projecting 14 ins. above ground, firmly set, properly marked on brass cap, and witnessed by 2 pits, one each N. and S. of cor., and mound of earth W. of cor. No bearing trees.

Remove this post, destroy the pits and mound of earth, and reset the post at 40.00 ch. station as described above, changing the year marking on brass cap from 1911 to 1922.

42.00 Old road, brs. E and W.  
 47.00 Old Florence-Kelvin road brs. E. and W.  
 56.70 Wash, 15 lks. wide, 2 ft. deep, course N. 80° W.  
 70.80 Old road, brs. NW. and SE.  
 73.00 Wash, 8 lks. wide, 1 1/2 ft. deep, course NW.  
 82.92 Intersect the original closing cor. of Ts. 5 S., Rs. 10 and 11 E., on S. bdy. of sec. 36, T. 4 S., R. 10 E., which is an iron post 3 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by three pits, one each E., W. and S. of cor., and mound of earth S. of cor. No bearing trees.

Land, nearly level.  
 Soil, sandy and gravelly, 2nd and 3rd rate.  
 Timber, very scattering, palo verde, mesquite and iron-wood.  
 Undergrowth, dense greasewood and cactus.  
 Fair grass.

---

Retracement of part of S. bdy. of Township 4 South, Range 10 East.

Chains.

The township boundary was surveyed as to the North and South bdrs. of Ts. 5 and 4 S., R. 10 E., respectively by R.W. Norris, U.S.D.S. in 1869, and was resurveyed in 1911 by W.H. Elliott, U.S.S., which reestablished all corners thereon to refer to areas in T. 4 S., R. 10 E. only. No subsequent retracement or resurvey of any part of the line is of record. W.H. Elliott, U.S.S. in 1911, established closing cors. of secs. 3 and 4, 4 and 5, and 5 and 6, T. 5 S., R. 10 E., in connection with his survey of part of the subdivision lines of said township.

The following notes describe a retracement of the South bdy. of T. 4 S., R. 10 E., S. of E. half of sec. 36, S. of W. half of sec. 35, S. of E. half of sec. 33, and S. of sec. 34 of said township.

The cor. of Ts. 4 S., Rs. 10 and 11 E., as reconstructed in 1892 by Daniel Drummond, U.S.D.S. is a mesquite post, 5 ins. sq., projecting 30 ins. above ground, firmly set, marked T4S S31 on NE. face, R11E S6 on SE. face, and R10E S36 on NW. face, with 6 notches on each of N., E. and W. edges, and witnessed by four properly marked bearing trees, one each NE., SE., SW. and NW. of post.

Thence, N. 89° 46' W., on random line on S. bdy. of sec. 36 (E. 1/2).. Over nearly level land, sloping slightly to the NW., thru. very scattering timber and dense undergrowth.

6.95 Fall 5 lks. N. of the original closing cor. of Ts. 5 S., Rs. 10 and 11 E., hereinbefore described.

18.30 Wash, 23 lks. wide, 3 ft. deep, course NW.

40.12 Fall 29 lks. N. of the previously reestablished 1/4 sec. cor. of sec. 36, which is an ironwood post, 4 ins. sq., projecting 14 ins. above ground, firmly set, marked 1/4 S 36 on N. face, and witnessed by two pits, one each E. and W. of cor., and mound of earth N. of cor. No bearing trees.

True course and dist. of E. half of S. bdy. of sec. 36 are therefore S. 89° 49' W., 40.12 chs.

Land, nearly level.  
Soil, sandy and gravelly, 2nd and 3rd rate.  
Timber, very scattering palo verde, mesquite and ironwood.  
Undergrowth, dense greasewood, scrub mesquite and cactus.  
Fair grass.

The previously reestablished 1/4 sec. cor. of sec. 35 is an ironwood post, 4 ins. sq., projecting 12 ins. above ground, firmly set, marked 1/4 S 35 on N. face, and witnessed by two pits, one each E. and W. of post, and mound of earth N. of cor. No bearing trees.

Thence, N. 89° 46' W., on a random line on S. bdy. of sec. 35 (W. 1/2). Over nearly level land, sloping slightly to the NW., thru. very scattering timber and dense undergrowth.

3.89 Enter wash, 20 lks. wide, 2 ft. deep, course W. from SE. Thence along S. side of this wash.

11.09 Leave S. side of same wash, course NW. from E.

16.40 Wash, 15 lks. wide, 2 ft. deep, course N.

30.90 Wash, 15 lks. wide, 4 ft. deep, course N.

40.14 Fall 24 lks. N. of the previously reestablished cor. of secs. 34 and 35, which is an ironwood post, 5 ins. sq., projecting 12 ins. above ground, firmly set, marked T4S S35 on NE. face, and R10E S34 on NW. face, with 2 notches on E. edge, and 4 notches on W. edge, and witnessed by two pits, one each NE. and NW. of post, and mound of earth, N. of cor. No bearing trees.

True course and dist. of W. 1/2 of S. bdy. of sec. 35 are therefore S. 89° 53' W., 40.14 chs.

Land, nearly level.

## 10 Retracement of part of South bdy. of Township 4 South Range 10 East Chains.

Soil, sandy and gravelly clay loam, 2nd and 3rd rate.  
 Timber, very scattering palo verde, mesquite and ironwood.  
 Undergrowth, dense greasewood, scrub mesquite and cactus.  
 Fair grass.

N. 89° 46' W., on random line on S. bdy. of sec. 34, (E.  $\frac{1}{2}$ )  
 Over nearly level land, sloping slightly to the NW., thru,  
 very scattering timber and dense undergrowth,  
 11.50 Wash, 53 lks. wide, 1  $\frac{1}{2}$  ft. deep, course NW.  
 20.00 Wash, 60 lks. wide, 2 ft. deep, course NW.  
 31.00 Wash, 75 lks. wide, 2 ft. deep, course NW.  
 40.28 Fall 30 lks. N. of the previously reestablished  $\frac{1}{4}$  sec. cor.  
 of sec. 34, which is an ironwood post, 3 ins. sq., pro-  
 jecting 12 ins. above ground, firmly set, marked  $\frac{1}{4}$  S  
 34 on N. face, and witnessed by two pits, one each E. and  
 W. of post, and mound of earth N. of cor.

No bearing trees.

True course and dist. of E. half of S. bdy. of sec. 34 are  
 therefore S. 89° 48' W., 40.28 chs.

Thence,

N. 89° 46' W., on random line on S. bdy. of sec. 34 (W.  $\frac{1}{2}$ ).  
 Over nearly level land, sloping slightly to the NW., thru,  
 very scattering timber and dense undergrowth.  
 5.73 Wash, 100 lks. wide, 1  $\frac{1}{2}$  ft. deep, course NW.  
 19.73 Wash, 75 lks. wide, 2 ft. deep, course N. 20° W.  
 26.75 Road, brs. NW. and SE.  
 40.12 Fall 30 lks. N. of the previously reestablished cor. of m  
 secs. 33 and 34, which is an ironwood post, 4 ins. sq.,  
 projecting 12 ins. above ground, firmly set, marked T  
 4 S S34 on NE. face, and R10E, S33 on NW. face, and 3  
 notches on each of E. and W. edges, and witnessed by one  
 properly marked bearing tree NW. of cor., two pits, one  
 each NE. and NW. of post, and mound of earth N. of cor.  
 True course and dist. of W.  $\frac{1}{2}$  of S. bdy. of sec. 34 are  
 therefore S. 89° 48' W., 40.12 chs.

Land, nearly level.

Soil, sandy and gravelly, 2nd and 3rd rate.  
 Timber, very scattering palo verde, mesquite and ironwood.  
 Undergrowth, dense greasewood, scrub mesquite and cactus.  
 Fair grass.

N. 89° 46' W. on random line on S. bdy. of sec. 33 (E.  $\frac{1}{2}$ ).  
 Over nearly level land, sloping slightly to the NW., thru,  
 very scattering timber and dense undergrowth.  
 7.11 Fall 5 lks. N. of the original closing cor. of secs. 3 and 4,  
 T. 5 S., R. 10 E., which is an ironwood post, 4 ins. sq.,  
 projecting 12 ins. above ground, firmly set, marked  
 CC T5S R10E on S face, S3 on E. face, and S4 on W. face,  
 with 3 grooves on each of E. and W. faces, and witnessed  
 by three pits, one each E., W. and S. of post, and mound of  
 earth S. of cor. No bearing trees.  
 11.20 Wash, 100 lks. wide, 2 ft. deep, course NW.  
 31.00 Wash, 50 lks. wide, 2 ft. deep, course NW.  
 40.12 Fall 28 lks. N. of the previously reestablished  $\frac{1}{4}$  sec. cor.  
 of sec. 33, which is an ironwood post, 4 ins. sq., pro-  
 jecting 12 ins. above ground, firmly set marked  $\frac{1}{4}$  S 33  
 on N. face, and witnessed by two pits, one each E. and W.  
 of post, and mound of earth N. of cor. No bearing  
 trees.

True course and dist. of E.  $\frac{1}{2}$  of S. bdy. of sec. 33 are  
 therefore S. 89° 50' W., 40.12 chs.

Land, nearly level.

Soil, sandy and gravelly, 2nd and 3rd rate.  
 Timber, very scattering palo verde, mesquite and ironwood.  
 Undergrowth, dense greasewood, scrub mesquite and cactus.  
 Fair grass.

Resurvey of part of S.bdy. of Township 4 South, Range 10 East. 11  
Chains.

The following notes describe a resurvey of the S.bdy. of T.4 S., R.10 E., south of the E. 1/2 of sec.35, and S. of the W. 1/2 of sec. 36.


Retracement for Resurvey.

40.28 From the previously reestablished 1/4 sec.cor. of sec.36, hereinbefore described, N.89°46'W., on random line, on S.bdy. of sec.36 (W.1/2). Fall 26 lks.N. of the remains of the previously reestablished cor. of secs. 35 and 36, hereinafter described. True course and distance of W.1/2 of S.bdy. of sec.36 are therefore S.89°52'W., 40.28 chs.

40.12 Thence, N.89°46'W., on random line, on S.bdy. of sec.35 (E.1/2). Fall 24 lks.N. of the previously reestablished 1/4 sec.cor. of sec.35, hereinbefore described. True course and dist. of E.1/2 of S. bdy. of sec.35 are therefore S.89°53'W., 40.12 chs.

RESURVEY.

8.08 From the previously reestablished 1/4 sec.cor. of sec.36, hereinbefore described, S.89°52'W., on true line, on S. bdy. of sec.36 (W.1/2).  
25.68 Over nearly level land, sloping slightly to the NW., thru. very scattering timber and dense undergrowth. Wash, 45 lks.wide, 1 1/2 ft. deep, course N.50°W.  
39.30 Wash, 40 lks.wide, 1 ft. deep, course NW.  
40.28 Wash, 90 lks.wide, 1 1/2 ft. deep, course NW. Intersect the remains of the previously reestablished cor. of secs. 35 and 36, consisting of a hole about 8 chs. in diam., 18 ins.deep, equidistant SE. and SW. from two pits, and S. of a mound of earth, which are evidently the record accessories. No bearing trees. The wood post of record as having been set as monument to this cor. has either been removed or was never set, as no trace of same can be found. Reconstruct this cor. as follows: In the hole, set an iron post, 3 ft.long, 2 ins.in diam., 26 ins.in the ground, for cor.of secs.35 and 36, marked on brass cap,



Obliterate the old pits, and dig new pits 18x18x12 ins., one each NE., and NW. of cor. 3 ft. dist.  
Land, nearly level.  
Soil, sandy and gravelly, 2nd and 3rd rate.  
Timber, very scattering palo verde, mesquite and ironwood.  
Undergrowth, dense greasewood, scrub mesquite and cactus.  
Fair grass.

17.70 S.89°53'W., on true line, on S. bdy. of sec.35 (E.1/2).  
31.50 Over nearly level land, sloping slightly to the NW., thru. very scattering timber and dense undergrowth. Wash, 30 lks.wide, 2 ft. deep, course NW.  
38.40 Old road, brs.NW. and SE.  
40.12 Wash, 30 lks.wide, course NW. Intersect the previously reestablished 1/4 sec.cor. of sec. 35, hereinbefore described.

Land, nearly level.  
Soil, sandy and gravelly, 2nd and 3rd rate.  
Timber, very scattering palo verde, mesquite and ironwood.  
Undergrowth, dense greasewood, scrub mesquite and cactus.  
Fair grass.

## 12 Resurvey of part of (E. 1/4) of N. bdy. of Township 5 South Range 10 East.

Chairs.

The following notes describe a resurvey of the N. Bdy. of T. 5 S., R. 10 E., north of secs. 1, 2, and 3, reestablishing the N.  $\frac{1}{4}$  sec. cors. of said secs. at midpoints between the closing cors. established in the survey of the Subdivision lines of said township hereinafter described. The courses on this township boundary are obtained in the retracement and resurvey of part of the South bdy. of T. 4 S., R. 10 E., hereinbefore described.

-----

From the original closing cor. of Ts. 5 S., Rs. 10 and 11 E., hereinbefore described,  
S. 89° 49' W., on a true line, on N. bdy. of sec. 1.  
Over nearly level land, sloping slightly to the NW., thru. very scattering timber and dense undergrowth.  
11.35 Wash, 23 lks. wide, 3 ft. deep, course NW.  
33.17 Intersect the previously reestablished  $\frac{1}{4}$  sec. cor. of sec. 36, hereinbefore described.

Thence,  
40.21 S. 89° 52' W., on true line, continuing measurement.  
(Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished  $\frac{1}{4}$  sec. cor. of sec. 1, T. 5 S., R. 10 E., marked on brass cap,

T. 5 S. 1  
1922

from which,

An ironwood, 12 ins. in diam., brs. S. 94° E., 93 lks. dist., marked  $\frac{1}{4}$  S 1 BT.

A palo verde, 6 ins. in diam., brs. S. 45 $\frac{1}{2}$ ° E., 179 lks. dist., marked  $\frac{1}{4}$  S 1 BT.

41.25 Wash; 45 lks. wide, 1 $\frac{1}{2}$  ft. deep, course N. 50° W.

58.85 Wash, 40 lks. wide, 1 ft. deep, course NW.

72.47 Wash, 90 lks. wide, 1 $\frac{1}{2}$  ft. deep, course NW.

73.45 Intersect the reestablished cor. of secs. 35 and 36, T. 4 S., R. 10 E., hereinbefore described.

Thence,  
80.42 S. 89° 53' W., on true line, continuing measurement.  
Point of intersection of the Subdivision line bet. secs. 1 and 2, T. 5 S., R. 10 E.

Closing cor. of said secs. established here, as hereinafter described in notes of survey of the Subdivision lines of said Tp.

Land, nearly level.

Soil, sandy and gravelly, 2nd and 3rd rate.

Timber, very scattering palo verde, mesquite and ironwood.

Undergrowth, dense greasewood, scrub mesquite and cactus.

Fair grass.

-----

S. 89° 53' W., on a true line, on N. bdy. of sec. 2,  
Over nearly level land, sloping slightly to the NW., thru. very scattering timber and dense undergrowth.

10.73 Wash, 30 lks. wide, 2 ft. deep, course NW.

24.53 Old road, brs. NW. and SE.

31.43 Wash, 30 lks. wide, course NW.

33.15 Intersect the previously reestablished  $\frac{1}{4}$  sec. cor. of sec. 35, hereinbefore described.

Continue line and measurement.

37.04 Enter wash, 20 lks. wide, 2 ft. deep, course W. from SE. Thence along S. side of this wash.

40.22 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished  $\frac{1}{4}$  sec. cor. of sec. 2, T. 5 S., R. 10 E., marked on brass cap.

Resurvey of part (E. 1/4) of North bdy. of Township 5 South Range 10 E. 13

Chains.

1/4 S 2  
1922

from which,

A palo verde, 6 ins. in diam., brs. S. 36 1/2° E., 182  
lks. dist., marked 1/4 S 2 BT.

A palo verde, 10 ins. in diam., brs. S. 38 1/2° W., 80  
lks. dist., marked 1/4 S 2 BT.

Continue along S. side of wash, course W.

44.24 Leave S. side of same wash, course NW. from E.

49.55 Wash, 15 lks. wide, 2 ft. deep, course N.

64.05 Wash, 15 lks. wide, 4 ft. deep, course NW.

73.29 Intersect the previously reestablished cor. of secs. 34 and  
35, T. 4 S., R. 10 E., hereinbefore described.

Thence,

S. 89° 48' W., on true line, continuing measurement:

80.44 Point of intersection of the subdivision line, bet. secs.  
2 and 3; T. 5 S., R. 10 E.

Closing cor. of said secs. established here as hereinaf-  
ter described in notes of survey of the subdivision  
lines of said tp.

Land, nearly level.

Soil, sandy and gravelly, 2nd and 3rd rate.

Timber, very scattering palo verde, mesquite and ironwood.

Undergrowth, dense greasewood, scrub mesquite and cactus.

Fair grass.

S. 89° 48' W., on true line, on N. bdy. of sec. 3.

Over nearly level land, sloping slightly to the NW., thru.  
very scattering timber and dense undergrowth.

4.35 Wash, 53 lks. wide, 1 1/2 ft. deep, course NW.

12.85 Wash, 60 lks. wide, 2 ft. deep, course NW.

23.85 Wash, 75 lks. wide, 2 ft. deep, course NW.

33.13 Intersect the previously reestablished 1/4 sec. cor. of  
sec. 34, T. 4 S., R. 10 E., hereinbefore described.

Continue line and measurement,

38.86 Wash, 100 lks. wide, 1 1/2 ft. deep, course NW.

40.18 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam.,  
26 ins. in the ground, for reestablished 1/4 sec. cor. of  
sec. 3, T. 5 S., R. 10 E., marked on brass cap,

1/4 S 3  
1922

from which,

A palo verde, 12 ins. in diam., brs. S. 69 1/2° E.,  
188 lks. dist., marked 1/4 S 3 BT.

A palo verde, 6 ins. in diam., brs. S. 49° W., 320  
lks. dist., marked 1/4 S 3 BT.

52.86 Wash, 75 lks. wide, 2 ft. deep, course N. 20° W.

59.88 Road, brs. NW. and SE.

73.25 Intersect the previously reestablished cor. of secs. 33 and  
34, T. 4 S., R. 10 E., hereinbefore described.

Thence S. 89° 50' W., on true line, continuing measurement.

80.36 Intersect the original closing cor. of secs. 3 and 4, T. 5 S.,  
R. 10 E., hereinbefore described, near palo verde and ironwood.

Land, nearly level. reestablished, scrub mesquite and cactus.

Soil, sandy and gravelly, 2nd and 3rd rate.

Timber, very scattering palo verde, mesquite and ironwood.

Undergrowth, dense greasewood, scrub mesquite and cactus.

Fair grass.



## 14. Retracement of part of the Subdivision lines of T.5 S., R.10 E.

Chains.

The subdivision lines of secs. 4 and 9 and the west two ranges of secs. in T.5 S., R.10 E., were surveyed in 1911 by W.H. Elliott, U.S.S., and no retracement or resurvey of any part of such lines is of record. The following notes describe a retracement of line bet. secs. 28 and 29, and line bet. secs. 32 and 33.

-----

The cor. of secs. 20, 21, 28 and 29 is an iron post, 2 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by four pits, one each NE., SE., SW. and NW. of post, and a mound of earth W. of cor. No bearing trees.

Thence,

S. 0° 2' E., on random line, bet. secs. 28 and 29 (N.  $\frac{1}{2}$ ).

Over level land, sloping slightly to the NW., thru. very scattering timber and dense undergrowth.

18.80 Road, brs. NW. and SE.

40.05 Fall 2 lks. E. of the  $\frac{1}{4}$  sec. cor. of secs. 28 and 29, which

is an iron post, 1 in. in diam., projecting 10 ins. above ground, firmly set, properly marked on brass cap, and witnessed by two pits, one each N. and S. of post, and a mound of earth W. of cor. No bearing trees.

True course and dist. of N.  $\frac{1}{2}$  of line, bet. secs. 28 and 29 are therefore S. 40.05 chs.

Thence,

S. 0° 2' E., on random line, bet. secs. 28 and 29 (S.  $\frac{1}{2}$ ).

Over level land, sloping slightly to the NW., thru. very scattering timber and dense undergrowth.

18.05 State Auto Highway bears N. 20° W. and S. 20° E. Extends north-

westerly to Florence and southeasterly to Tucson.

40.02 Fall 9 lks. E. of the cor. of secs. 28, 29, 32 and 33, which

is an iron post, 2 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by four pits, one each NE., SE., SW. and NW. of post, and a mound of earth, W. of cor. No bearing trees.

True course and distance of S.  $\frac{1}{2}$  of line, bet. secs. 28 and 29 are therefore S. 0° 6' W., 40.02 chs.

Land, level.

Soil, gravelly, 2nd rate.

Timber, very scattering ironwood and palo verde.

Undergrowth, dense greasewood and cactus.

Fair grass.

-----

S. 0° 2' E., on a random line, bet. secs. 32 and 33 (N.  $\frac{1}{2}$ ).

Over level land, sloping slightly to the W., thru. very scattering timber and dense undergrowth.

22.10 Wash, 40 lks. wide, 2 ft. deep, course N. 70° W.

40.06 Fall 7 lks. E. of the  $\frac{1}{4}$  sec. cor. of secs. 32 and 33, which

is an iron post, 1 in. in diam., projecting 10 ins. above ground, firmly set, properly marked on brass cap, and witnessed by two pits, one each N. and S. of post, and a mound of earth, W. of cor. No bearing trees.

True course and dist. of N.  $\frac{1}{2}$  of line, bet. secs. 32 and 33, are therefore S. 0° 4' W., 40.06 chs.

Thence,

S. 0° 2' E., on random line, bet. secs. 32 and 33 (S.  $\frac{1}{2}$ ).

Over level land, sloping slightly to the NW., thru. very scattering timber and dense undergrowth.

14.94 Wash, 20 lks. wide, 1  $\frac{1}{2}$  ft. deep, course W.

16.70 Head of wash, course W.

25.00 Old road, brs. NW. and SE.

40.04 Fall 16 lks. E. of the previously reestablished std. cor. of secs. 32 and 33, on the S. bdy. of the Tp. (1st Std.

Par. S.) hereinbefore described.



Retracement of part of Subdivision lines of T. 5 S., R. 10 E. 15

Chains.  
 True course and dist. of S.  $\frac{1}{2}$  of line, bet. secs. 32 and 33 are therefore, S.  $0^{\circ}12'W.$ , 40.04 chs.  
 Land, level.  
 Soil, gravelly, 2nd rate.  
 Timber, very scattering mesquite, ironwood and palo verde.  
 Undergrowth, dense greasewood, scrub mesquite and cactus.  
 Fair grass.

-----  
 Boundaries of that portion of Township 5 South,  
 Range 10 East, surveyed under this Group.  
 -----

Latitudes, Departures, and Closing Errors.  
 -----

Lines designated.	True course.	Dist.	Latitudes.		Departures.	
			N.	S.	E.	W.
South Boundary, (1st Std. Par. S.)	West,	80.00				80.00
	N. $89^{\circ}56'W.$	40.10	.05			40.10
	N. $89^{\circ}58'W.$	160.74	.09			160.74
	N. $89^{\circ}59'W.$	40.19	.01			40.19
Subdivisional Boundary,	N. $0^{\circ}12'E.$	40.04	40.04		.14	
	N. $0^{\circ}04'E.$	40.06	40.06		.05	
	N. $0^{\circ}06'E.$	40.02	40.02		.07	
	North,	40.05	40.05			
	N. $0^{\circ}02'W.$	160.00	160.00			.09
	East,	80.00			80.00	
North Boundary,	N. $89^{\circ}50'E.$	7.11	.02		7.01	
	N. $89^{\circ}48'E.$	80.40	.28		80.40	
	N. $89^{\circ}53'E.$	80.26	.16		80.26	
	N. $89^{\circ}52'E.$	40.28	.09		40.28	
	N. $89^{\circ}49'E.$	33.17	.10		33.17	
East Boundary,	South,	482.92		482.92		
Convergency,					.29	
<u>Totals,</u>			482.99	482.92	321.67	321.21
			482.92		321.21	
<u>Error in latitude,</u>			.07			
<u>Error in departure,</u>					.46	

Survey of part

16 (Completion) of the Subdivision lines of T. 5 S. R. 10 E.

Chains.

From the previously reestablished standard cor. of secs. 35 and 36 on S. bdy. of Tp. (1st Std. Par. S.) hereinbefore described,

N. 0° 01' W., bet. secs. 35 and 36.

Over nearly level land, sloping slightly to the W., thru. very scattering timber and dense undergrowth.

3.90 Wash, 30 lks. wide, 2 ft. deep, course S. 70° W.

15.20 Old road, brs. E. and W.

21.00 Wash, 8 lks. wide, 3 ft. deep, course N. 70° W.

26.50 Wash, 15 lks. wide, 2 1/2 ft., course W.


30.60 Old road, brs. N. 70° W. and S. 70° E.

32.00 Wash, 30 lks. wide, 2 ft. deep, course W.

36.00 Old road, brs. NW. and SE.

39.70 Wash, 40 lks. wide, 2 ft. deep, course W.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,



from which,

A palo verde, 10 ins. in diam., brs. S. 64° E., 86 lks. dist., marked 1/4 S 36 BT.


A palo verde, 10 ins. in diam., brs. S. 73 1/2° W., 11 lks. dist., marked 1/4 S 35 BT.

44.80 Old road, brs. E. and W.

57.60 Wash, 40 lks. wide, 2 ft. deep, course West.

59.10 Wire fence, brs. E and W. Fence cor. brs. E. 100 lks. dist., from which fence extends W. and N.

80.00 Set an iron post; 3 ft. long, 2 ins. in diam., 26 ins. in the ground for cor. of secs. 25, 26, 35 and 36, marked on brass cap,



No trees suitable for bearing trees within limits. Dig pits, .18x.18x.12 ins., one each NE., SE., SW. and NW. of post, 3 ft. dist.

Land, nearly level.

Soil, sandy and gravelly, 2nd and 3rd rate.

Timber, very scattering palo verde, mesquite and ironwood.

Undergrowth, dense greasewood, scrub mesquite and cactus.

Fair grass.

East, on a random line, bet. secs. 25 and 36.

40.000 Set temp. 1/4 sec. cor.


80.28 Intersect E. bdy. of Tp. 19 lks. S. of the original cor. of secs. 25, 30, 31 and 36, which is an iron post, 3 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by four pits, one each NE., SE., SW. and NW. of cor., and mound of earth W. of cor. No bearing trees.

Thence,

S. 89° 52' W., on a true line, bet. secs. 25 and 36.

Over nearly level land, sloping slightly to the W., thru. very scattering timber and dense undergrowth.

40.14 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,




from which,

Part (completion) of Subdivision lines of T. 5 S., R. 10 E. 17

Chains.


A palo verde, 6 ins. in diam., brs. N. 88 $\frac{1}{2}$ ° E., 113  
 lks. dist., marked  $\frac{1}{4}$  S 25 BT.  
 A palo verde, 12 ins. in diam., brs. S. 48° W., 234  
 lks. dist., marked  $\frac{1}{4}$  S 36 BT.  
 52.08 Old road, brs. N. 70° W. and S. 70° E.  
 61.48 Wash, 9 lks. wide, 2 $\frac{1}{2}$  ft. deep, course N. 70° W.  
 66.80 Wash, 8 lks. wide, 2 ft. deep, course N. 70° W.  
 71.50 Wash, 15 lks. wide, 2 ft. deep, course N. 70° W.  
 78.08 Wire fence, brs. N. and S.  
 80.28 The cor. of secs. 25, 26, 35 and 36.  
 Land, nearly level.  
 Soil, sandy and gravelly, 2nd and 3rd rate.  
 Timber, very scattering palo verde, mesquite and ironwood.  
 Undergrowth, dense greasewood.  
 Fair grass.

N. 0° 1' W., bet. secs. 25 and 26.  
 Over nearly level land, sloping slightly to the W., thru.  
 very scattering timber and dense undergrowth.  
 .80 Wash, 8 lks. wide, 2 ft. deep, course W.  
 2.70 Wash, 15 lks. wide, 2 ft. deep, course W.  
 6.00 Old road, brs. N. 70° W. and S. 70° E.  
 23.00 Wash, 25 lks. wide, 2 $\frac{1}{2}$  ft. deep, course W.  
 31.00 Wash, 12 lks. wide, 3 ft. deep, course W.  
 39.30 Wash, 10 lks. wide, 2 $\frac{1}{2}$  ft. deep, course N. 80° W.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
 the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap,



from which,  
 A palo verde, 10 ins. in diam., brs. N. 54 $\frac{1}{2}$ ° E., 53  
 lks. dist., marked  $\frac{1}{4}$  S 25 BT.  
 A palo verde, 5 ins. in diam., brs. S. 46 $\frac{1}{2}$ ° W., 75 lks.  
 dist., marked  $\frac{1}{4}$  S 26 BT.

56.50 Wash, 10 lks. wide, 1 $\frac{1}{2}$  ft. deep, course N. 70° W.  
 64.60 Old road, brs. NW. and SE.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in  
 the ground for cor. of secs. 23, 24, 25 and 26, marked  
 on brass cap,



from which,  
 A palo verde, 6 ins. in diam., brs. N. 68 $\frac{1}{2}$ ° E., 151  
 lks. dist., marked T5S R10E S24 BT.  
 A palo verde, 6 ins. in diam., brs. S. 30° E., 98  
 lks. dist., marked T5S R10E S25 BT.  
 A palo verde, 9 ins. in diam., brs. S. 23° W., 101  
 lks. dist., marked T5S R10E S26 BT.  
 A palo verde, 10 ins. in diam., brs. N. 72 $\frac{1}{2}$ ° W., 190  
 lks. dist., marked T5S R10E S23 BT.

Land, nearly level.  
 Soil, sandy and gravelly, 2nd and 3rd rate.  
 Timber, very scattering palo verde, mesquite and ironwood.  
 Undergrowth, dense greasewood, scrub mesquite and cactus.  
 Fair grass.

N. 72 $\frac{1}{2}$ ° W., bet. secs. 23 and 24, cor. sec. 23 and 24.

18. Part (completion) of Subdivision lines of T.5 S., R.10 E.

Chains.

40.00 N.89°52'E., on a random line, bet. secs.24 and 25.  
 Set temp.  $\frac{1}{4}$  sec.cor.  
 80.30 Intersect E. bdy. of Tp., 10 lks. S. of the original cor. of secs. 19,24,25 and 30, which is an iron post, 3 ins. in diam., projecting 10 ins. above ground, firmly set, properly marked on brass cap, and witnessed by four pits, one each NE., SE., SW., and NW. of post, and mound of earth W. of cor.  
 No bearing trees.  
 Thence,  
 S.89°48'W., on true line, bet. secs.24 and 25.  
 Over nearly level land, sloping slightly to the NW., thru. very scattering timber and dense undergrowth.  
 19.60 Old road, brs.N.and S.  
 40.15 Set an iron post, 3 ft.long., 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec.cor., marked on brass cap,

$\frac{1}{4}$  S 24  
 S 25  
 1922

from which,  
 A palo verde, 8 ins. in diam., brs.N.60°W., 243 lks. dist., marked  $\frac{1}{4}$  S 24 BT.  
 A palo verde, 10 ins. in diam., brs.S.4 $\frac{1}{2}$ °W., 160 lks. dist., marked  $\frac{1}{4}$  S 25 BT.

46.50 Wash, 15 lks. wide, 2 ft. deep, course N.60°W.  
 67.30 Wash, 15 lks. wide, 2 ft. deep, course N.80°W.  
 72.70 Old road, brs.N.and S.  
 73.00 Wire fence, brs.N.and S.  
 80.30 The cor. of secs. 23,24,25 and 26.  
 Land, nearly level.  
 Soil, sandy and gravelly, 2nd and 3rd rate.  
 Timber, very scattering palo verde, mesquite and ironwood.  
 Undergrowth, dense greasewood, scrub mesquite and cactus.  
 Fair grass.

N.0°01'W., bet. secs. 23 and 24.  
 Over nearly level land, sloping slightly to the W. and NW. thru. very scattering timber and dense undergrowth.

2.80 Wash, 15 lks. wide, 1 ft. deep, course W.  
 14.80 Wash, 30 lks. wide, 1 ft. deep, course N.70°W.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec.cor., marked on brass cap,

$\frac{1}{4}$   
 S23 | S24  
 1922

from which,  
 A palo verde, 8 ins. in diam., brs.N.38°E., 81 lks. dist., marked  $\frac{1}{4}$  S 24 BT.  
 A palo verde, 7 ins. in diam., brs.N.23 $\frac{1}{4}$ °W., 80 lks. dist., marked  $\frac{1}{4}$  S 23 BT.

45.90 Old road, brs.N.70°W. and S.70°E.  
 49.40 Wash, 10 lks. wide, 2 ft. deep, course NW.  
 56.40 Wire fence, brs.E. and W.  
 56.60 Old road, brs.E. and W.  
 60.50 Wash, 25 lks. wide, 1 ft. deep, course N.70°W.  
 65.00 Wash, 60 lks. wide, 1 ft. deep, course W.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground for cor. of secs. 13,14,23 and 24, marked on brass cap,

T5S | R10E  
 S14 | S13  
 S23 | S24  
 1922

Part (completion) of Subdivision lines of Township 5 S. R. 10 E. 19

Chains.

from which,  
 A palo verde, 8 ins. in diam., brs. N. 42° E., 170 lks. dist., marked T5S R10E S13 BT.  
 A palo verde, 8 ins. in diam., brs. S. 28½° E., 154 lks. dist., marked T5S R10E S24 BT.  
 A palo verde, 8 ins. in diam., brs. S. 13° W., 190 lks., marked T5S R10E S23 BT.  
 A palo verde, 7 ins. in diam., brs. N. 68½° W., 186 lks. dist., marked T5S R10E S14 BT.

Land, nearly level.  
 Soil, sandy and gravelly clay loam, 2nd and 3rd rate.  
 Timber, very scattering palo verde, mesquite and ironwood.  
 Undergrowth, dense greasewood, scrub mesquite and cactus.  
 Fair grass.

40.00 N. 89° 48' E., on a random line, bet. secs. 13 and 24.  
 Set temp. ¼ sec. cor.  
 80.30 Intersect E. bdy. of the Tp., 12 lks. S. of the original cor. of secs. 13, 18, 19 and 24, hereinbefore described.  
 Thence,  
 S. 89° 43' W., on true line, bet. secs. 13 and 24.  
 Over nearly level land sloping slightly to the NW., thru. very scattering timber and undergrowth.  
 7.30 Old road, brs. NW. and SE.  
 10.30 Wash, 15 lks. wide, 2 ft. deep, course N. 80° W.  
 12.30 Same wash, course S. 80° W.  
 14.70 Same wash, course NW.  
 35.60 Wash, 30 lks. wide, 1½ ft. deep, course N. 70° W.  
 40.15 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap,

¼ S 13  
 S 24  
 1922

from which,  
 A palo verde, 8 ins. in diam., brs. S. 29½° E., 31 lks. dist., marked ¼ S 24 BT.  
 A mesquite, 6 ins. in diam., brs. N. 33½° W., 75 lks. dist., marked ¼ S 13 BT

42.60 Wash, 12 lks. wide, 1 ft. deep, course NW.  
 45.60 Wash, 30 lks. wide, 1 ft. deep, course NW.  
 69.30 Old road, brs. NW and SE.  
 80.30 The cor. of secs. 13, 14, 23 and 24.  
 Land, nearly level.  
 Soil, sandy and gravelly clay loam, 2nd and 3rd rate.  
 Timber, very scattering palo verde, mesquite and ironwood.  
 Undergrowth, dense greasewood, scrub mesquite and cactus.  
 Fair grass.

N. 0° 01' W., bet. secs. 13 and 14.  
 Over nearly level land, sloping slightly to the NW, thru. very scattering timber and dense undergrowth.  
 3.60 Wash, 10 lks. wide, 2 ft. deep, course NW.  
 12.30 Old road, brs. N. 30° W. and S. 30° E.  
 13.80 Old road, brs. NW and SE.  
 19.00 Wash, 30 lks. wide, 2 ft. deep, course NW.  
 27.90 Wash, 30 lks. wide, 1 ft. deep, course N. 70° W.  
 31.00 Wash, 15 lks. wide, 1 ft. deep, course NW.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for ¼ sec. cor., marked on brass cap,

¼ S14 | S13  
 1922

20. Part (completion) of Subdivision lines of T. 5 S., R. 10 E.  
Chains.

from which,  
 A palo verde, 12 ins. in diam., brs. N. 16° E., 71 lks.  
 dist., marked  $\frac{1}{4}$  S 13 BT.  
 A palo verde, 8 ins. in diam., brs. N. 17° W., 69 lks.  
 dist., marked  $\frac{1}{4}$  S 14 BT.  
 48.30 Wash, 12 lks. wide, 3 ft. deep, course N. 70° W.  
 61.10 Old road, brs. NW. and SE.  
 64.50 Wash, 40 lks. wide, 3 ft. deep, course NW.  
 76.90 Wash, 10 lks. wide, 4 ft. deep, course N. 60° W.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in  
 the ground, for cor. of secs. 11, 12, 13 and 14, marked on  
 brass cap,

T5S | R10E  
 S11 | S12  
 S14 | S13  
 1922

from which,  
 A palo verde, 62 ins. in diam., brs. N. 62 $\frac{1}{2}$ ° E., 351 lks.  
 dist., marked T5S R10E S12 BT.  
 A palo verde, 10 ins. in diam., brs. S. 34° E., 91 lks.  
 dist., marked T5S R10E S13 BT.  
 A palo verde, 4 ins. in diam., brs. S. 76 $\frac{1}{2}$ ° W., 35 lks.  
 dist., marked BT. R10E S14 BT.  
 A palo verde, 8 ins. in diam., brs. N. 68 $\frac{1}{2}$ ° W., 43 lks.  
 dist., marked T5S R10E S11 BT.  
 Land, nearly level.  
 Soil, sandy and gravelly clay loam, 2nd and 3rd rate.  
 Timber, very scattering palo verde, mesquite and ironwood.  
 Undergrowth, dense greasewood, scrub mesquite and cactus.  
 Fair grass.

N. 89° 43' E., on a random line, bet. secs. 12 and 13.  
 40.00 Set temp,  $\frac{1}{4}$  sec. cor.  
 80.44 Intersect E. bdy. of the Tp., 2 lks. S. of the cor. of secs.  
 7, 12, 13 and 18, hereinbefore described.  
 Thence,  
 S. 89° 42' W., on true line, bet. secs. 12 and 13.  
 Over gently rolling land, sloping NW., thru. very scattering  
 timber and dense undergrowth.  
 13.14 Wash, 15 lks. wide, 4 ft. deep, course N. 40° W.  
 25.45 Old road, brs. NW. and SE.  
 40.22 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
 the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap,

$\frac{1}{4}$  S 12  
 S 13  
 1922

from which,  
 A mesquite, 10 ins. in diam., brs. N. 40 $\frac{1}{2}$ ° W., 126  
 lks. dist., marked  $\frac{1}{4}$  S 12 BT.  
 A palo verde, 8 ins. in diam., brs. S. 11 $\frac{1}{2}$ ° W., 114  
 lks. dist., marked  $\frac{1}{4}$  S 13 BT.  
 41.45 Wash, 6 lks. wide, 2 ft. deep, course N. 50° W.  
 47.45 State Highway, brs. N. 60° W. and S. 60° E. Extends north-  
 westerly to Florence and northeasterly to Kelvin.  
 49.64 Old road, brs. NW. and SE.  
 58.45 Wash, 20 lks. wide, 3 ft. deep, course N. 60° W.  
 69.95 Wash, 20 lks. wide, 2 ft. deep, course N. 70° W.  
 80.44 The cor. of secs. 11, 12, 13 and 14.  
 Land, gently rolling.  
 Soil, gravelly and rocky clay loam, 3rd and 4th rate.  
 Timber, very scattering palo verde, mesquite and ironwood.  
 Undergrowth, dense greasewood, scrub mesquite and cactus.  
 Fair grass.

Part (completion) of Subdivision lines of T. 5 S., R. 10 E. 21

Chains.

- N.0°01'W., bet.secs.'11 and 12.
- Over gantly rolling land, sloping NW. thru,very scatter-  
ing timber and dense undergrowth.
- 6.60 Wash,60 lks.wide, 2 ft.deep,course N.70°W.
- 11.20 State Highway, brs.N.80°W. and S.80°E. Extends north-  
westerly to Florence and northeasterly to Kelvin.
- 20.00 The SE.cor.of fenced field brs.W. about 5.00 chs.dist.
- 22.90 Road, brs.NW. and SE.
- 33.60 Wash,45 lks.wide, 2 ft.deep,course N.80°W.
- 40.00 Set an iron post, 3 ft.long, 1 in.in diam., 26 ins.in  
the ground, for  $\frac{1}{4}$  sec.cor., marked on brass cap,

S11 | S12

1922

from which,

- A palo verde, 10 ins. in diam., brs.N.82 $\frac{1}{2}$ °W., 162  
lks.dist., marked  $\frac{1}{4}$  S 11 BT.
- A palo verde, 6 ins. in diam., brs.S.12°E., 57  
lks.dist., marked  $\frac{1}{4}$  S 12 BT.
- 44.50 Wash,20 lks.wide, 2 ft. deep, course NW.
- 58.50 Road, brs.N.70°W. and S.70°E.
- 70.30 Old road, brs.N.70°W. and S.70°E.
- 72.40 Wash,25 lks.wide, 2 ft.deep, course NW.
- 75.00 Wash,25 lks.wide, 2 ft.deep, course N.70°W.
- 80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 26 ins.in  
the ground for cor.of secs.1,2,11 and 12, marked on  
brass cap,

T5S	R10E
S 2	S 1
S11	S12

1922

from which,

- A palo verde, 8 ins.in diam., brs.N.67 $\frac{1}{2}$ °E., 17 lks.  
dist., marked T5S R10E S1 BT.
- A palo verde, 10 ins.in diam., brs.S.11 $\frac{1}{4}$ °E., 120 lks.  
dist., marked T5S R10E S12 BT.
- A palo verde, 10 ins. in diam., brs.S.24 $\frac{1}{2}$ °W., 47 lks.  
dist., marked T5S R10E S11 BT.
- A palo verde, 6 ins. in diam., brs.N.55 $\frac{1}{4}$ °W., 220 lks.  
dist., marked T5S R10E S2 BT.

Land, gently rolling.

Soil, gravelly and rocky, 3rd and 4th rate.

Timber, very scattering palo verde, mesquite and ironwood.

Undergrowth, dense greasewood.

Fair grass.

- N.89°42' E., on a random line, bet. secs.1 and 12.
- 40.00 Set temp: $\frac{1}{4}$  sec.cor.
- 80.36 Intersect the cor.of secs.1,6,7 and 12, on E. bdy.of Tp.,  
hereinbefore described.
- Thence,
- S.89°42'W., on a true line, bet. secs.1 and 12.
- Over gently rolling land, sloping NW., thru. very scat-  
tering timber and dense undergrowth.
- 12.25 Wash,100 lks.wide, 1 $\frac{1}{2}$  ft. deep, course N.80°W.
- 13.55 Same wash,course S.70°W.
- 21.35 Enter same wash, course W. from S.80°E.; thence in wash.
- 25.15 Leave wash,course N.80°W.from E.
- 26.65 Old road, brs.N.70°W. and S.70°E.
- 36.15 Wash,12 lks.wide, 2 ft.deep,course N.70°W.
- 40.18 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in

22 Part (completion) of Subdivision lines of T.5 S., R.10 E.

Chains.

the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap,

$\frac{1}{4}$  S 1  
S 12  
1922

from which,

An ironwood, 12 ins. in diam., brs. N.  $33\frac{1}{2}^{\circ}$  E., 110 lks. dist., marked  $\frac{1}{4}$  S 1 BT.

A palo verde, 6 ins. in diam., brs. S.  $31^{\circ}$  E., 123 lks. dist., marked  $\frac{1}{4}$  S 12 BT.

61.95 Wash, 25 lks. wide, 3 ft. deep, course N.  $75^{\circ}$  W.

66.85 Old road, brs. N.  $80^{\circ}$  E. and S.  $80^{\circ}$  W.

80.36 The cor. of secs. 1, 2, 11 and 12.

Land, gently rolling.

Soil, gravelly and rocky, 3rd and 4th rate.

Timber, very scattering palo verde, mesquite and ironwood.

Undergrowth, dense greasewood.

Fair grass.

N.  $0^{\circ} 1' W.$ , on true line, bet. secs. 1 and 2.

Over gently rolling land, sloping NW., thru. very scattering timber and dense undergrowth.

16.60 Wash, 15 lks. wide, 2 ft. deep, course N.  $75^{\circ}$  W.

31.50 Wash, 12 lks. wide, 2 ft. deep, course N.  $80^{\circ}$  W.

34.50 Road, brs. E. and W.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap,

$\frac{1}{4}$   
S 2 | S 1  
1922

from which,

A palo verde, 6 ins. in diam., brs. N.  $11\frac{1}{2}^{\circ}$  E., 41 lks. dist., marked  $\frac{1}{4}$  S 1 BT.

A palo verde, 6 ins. in diam., brs. S.  $80\frac{1}{2}^{\circ}$  W., 78 lks. dist., marked  $\frac{1}{4}$  S 2 BT.

42.80 Wash, 30 lks. wide,  $1\frac{1}{2}$  ft. deep, course N.  $80^{\circ}$  W.

48.40 Wash, 40 lks. wide, 2 ft. deep, course N.  $60^{\circ}$  W.

50.40 Old road, brs. NE. and SW.

50.80 Old road, brs. NW. and SE.

72.50 Wash, 45 lks. wide, 2 ft. deep, course N.  $80^{\circ}$  W.

83.24 Intersect N. bdy. of Tp., 6.97 chs. S.  $89^{\circ} 53' W.$  from the re-established cor. of secs. 35 and 36, T.4 S., R.10 E., hereinbefore described.

At point of intersection,

Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for closing cor. of secs. 1 and 2, marked on brass cap,

T4S R10E  
S35  
S 2 | S 1  
T5S R10E  
C C  
1922

from which,

A palo verde, 5 ins. in diam., brs. S.  $31\frac{1}{2}^{\circ}$  E., 279 lks. dist., marked T5S R10E S1 CC BT.

An ironwood, 8 ins. in diam., brs. S.  $56\frac{3}{4}^{\circ}$  W., 83 lks. dist., marked T5S R10E S2 CC BT.

Land, gently rolling.

Soil, sandy and gravelly, 2nd and 3rd rate.

Timber, very scattering palo verde, mesquite and ironwood.

Undergrowth, dense greasewood, scrub mesquite and cactus.

Fair grass.




Part (completion) of Subdivision lines of T. 5 S., R. 10 E. 23

Chains.

From the previously reestablished standard cor. of secs. 34 and 35 on S.bdy. of Tp. (1st Std. Par. S.), hereinbefore described,


N. 0° 01' W., bet. secs. 34 and 35. Over nearly level land, sloping slightly to the W., thru. very scattering timber and dense undergrowth.

- 4.50 Old road, brs. E. and W.
- 15.80 Wash, 30 lks. wide, 2 ft. deep, course W.
- 31.10 Wash, 8 lks. wide, 2 ft. deep, course W.
- 39.90 Wash, 40 lks. wide, 2 ft. deep, course W.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap,



from which,  
 A palo verde, 6 ins. in diam., brs. S. 67 $\frac{1}{2}$ ° E., 112 lks. dist., marked  $\frac{1}{4}$  S 35 BT.  
 A palo verde, 16 ins. in diam., brs. S. 11 $\frac{1}{2}$ ° W., 35 lks. dist., marked  $\frac{1}{4}$  S 34 BT.

- 48.90 Old road, brs. NW. and SE.
- 63.60 Old road, brs. E. and W.
- 64.10 Wire fence, brs. E. and W.
- 65.30 A cement water tank about 26 ft. in diam., and 8 ft. deep, brs. E. 218 lks. dist. Windmill alongside.
- 66.20 Wire fence, brs. E. and W.
- 66.25 A deserted frame house, brs. E. 2.50 chs. dist.
- 68.25 Wash, 60 lks. wide, 1 $\frac{1}{2}$  ft. deep, course N. 80° W.
- 79.20 Wash, 8 lks. wide, 2 ft. deep, course N. 80° W.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground for cor. of secs. 26, 27, 34 and 35, marked on brass cap,



from which,  
 A palo verde verde, 18 ins. in diam., brs. S. 39 $\frac{1}{2}$ ° E., 125 lks. dist., marked T5S R10E S35 BT.  
 A palo verde, 10 ins. in diam., brs. S. 74 $\frac{1}{2}$ ° W., 152 lks. dist., marked T5S R10E S34 BT.  
 A palo verde, 18 ins. in diam., brs. N. 78° W., 228 lks. dist., marked T5S R10E S27 BT.

No other tree available; dig pits, 18x18x12 ins., one each NE., SE., SW. and NW. of post, 3 ft. dist.  
 Land, nearly level.  
 Soil, sandy and gravelly, 2nd and 3rd rate.  
 Timber, very scattering palo verde, mesquite and ironwood.  
 Undergrowth, dense greasewood, scrub mesquite and cactus.  
 Fair grass.

- 40.00 S. 89° 57' E., on a random line, bet. secs. 26 and 35. Set temp.  $\frac{1}{4}$  sec. cor.
- 80.30 Intersect the cor. of secs. 25, 26, 35 and 36. Thence, N. 89° 57' W., on a true line, bet. secs. 26 and 35. Over nearly level land, sloping slightly to the W., thru. scattering timber and dense undergrowth.
- 23.30 Wash, 12 lks. wide, 2 ft. deep, course N. 80° W.
- 40.15 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap,

## 24. Part (completion) of Subdivision lines of Township 5 S. R. 10 E.

Chains.

$$\frac{1}{4} \begin{array}{c} S 26 \\ S 35 \\ 1922 \end{array}$$

from which,

- A palo verde, 8 ins. in diam., brs. N.  $68\frac{1}{2}^{\circ}$  W., 77  
lks. dist., marked  $\frac{1}{4}$  S 26 BT.  
A palo verde, 5 ins. in diam., brs. S.  $65\frac{1}{2}^{\circ}$  E., 37  
lks. dist., marked  $\frac{1}{4}$  S 35 BT.  
45.80 Wash, 25 lks. wide, 2 ft. deep, course N.  $70^{\circ}$  W.  
50.81 Old road, brs. NW. and SE.  
67.70 Old road, brs. NE and SW.  
80.30 The cor. of secs. 26, 27, 34 and 35.  
Land, nearly level.  
Soil, sandy and gravelly, 2nd and 3rd rate.  
Timber, scattering palo verde, mesquite and ironwood.  
Undergrowth, dense greasewood, scrub mesquite and cactus.  
Fair grass.

N.  $0^{\circ} 01'$  W., bet. secs. 26 and 27.Over nearly level land, sloping slightly to the W. and NW.  
thru. scattering timber and dense undergrowth.

- 9.70 Wash, 8 lks. wide, 2 ft. deep, course W.  
11.20 Ditch, 6 lks. wide, with cut banks 4 ft. high, course N.  $70^{\circ}$   
W.  
16.00 Wash, 6 lks. wide, 2 ft. deep, course N.  $70^{\circ}$  W.  
24.37 Old road, brs. NW. and SE.  
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the  
ground for  $\frac{1}{4}$  sec. cor., marked on brass cap,

$$\begin{array}{c} \frac{1}{4} \\ S27 \mid S26 \\ 1922 \end{array}$$

from which,

- A palo verde, 8 ins. in diam., brs. S.  $78^{\circ}$  E., 212  
lks. dist., marked  $\frac{1}{4}$  S 26 BT.  
A palo verde, 10 ins. in diam., brs. S.  $31^{\circ}$  W., 187  
lks. dist., marked  $\frac{1}{4}$  S 27 BT.  
45:00 Wash, 30 lks. wide, 3 ft. deep, course N.  $75^{\circ}$  W.  
77.50 Wash, 15 lks. wide, 2 ft. deep, course N.  $70^{\circ}$  W.  
79.10 Wash, 8 lks. wide,  $1\frac{1}{2}$  ft. deep, course NW.  
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in  
the ground for cor. of secs. 22, 23, 26 and 27, marked  
on brass cap,

$$\begin{array}{c} T5S \mid R10E \\ S22 \mid S23 \\ S27 \mid S26 \\ 1922 \end{array}$$

from which,

- A palo verde, 10 ins. in diam., brs. N.  $62\frac{1}{2}^{\circ}$  E., 138  
lks. dist., marked T5S R10E S23 BT.  
A palo verde, 5 ins. in diam., brs. S.  $20\frac{1}{2}^{\circ}$  E., 154  
lks. dist., marked T5S R10E S26 BT.  
A palo verde, 8 ins. in diam., brs. S.  $78\frac{3}{4}^{\circ}$  W., 59  
lks. dist., marked T5S R10E S27 BT.  
A palo verde, 8 ins. in diam., brs. N.  $80\frac{1}{2}^{\circ}$  W., 87  
lks. dist., marked T5S R10E S22 BT.  
Land, nearly level.  
Soil, sandy and gravelly loam, 2nd and 3rd rate.  
Timber, scattering palo verde, mesquite and ironwood.  
Undergrowth, dense greasewood, scrub mesquite and cactus.  
Fair grass.

Part (completion) of the Subdivision lines of T.5 S., R.10 E. 25

Chains.

S. 89°57'E., on a random line, bet. secs. 23 and 26.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.44 Intersect N. and S. line, 2 lks. S. of the cor. of secs. 23, 24, 25 and 26.  
 Thence,  
 N. 89°58'W., on true line, bet. secs. 23 and 26.  
 Over nearly level land, sloping slightly to the NW., thru scattering timber and undergrowth.  
 16.44 Wash, 4 lks. wide, 1 ft. deep, course NW.  
 27.95 Old road, brs. NW. and SE.  
 33.94 Old road, brs. N. and S.  
 40.22 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap,

$\frac{1}{4}$  S 23  
 S 26  
 1922

from which,

A palo verde, 10 ins. in diam., brs. N. 6 $\frac{1}{2}$ ° E., 77 lks. dist., marked  $\frac{1}{4}$  S 23 BT.  
 A palo verde, 8 ins. in diam., brs. S. 37° W., 137 lks. dist., marked  $\frac{1}{4}$  S 26 BT.  
 78.14 Wash, 12 lks. wide, 1 $\frac{1}{2}$  ft. deep, course NW.  
 80.44 The cor. of secs. 22, 23, 26 and 27.  
 Land, nearly level.  
 Soil, sandy and gravelly, 2nd and 3rd rate.  
 Timber, scattering palo verde, mesquite and ironwood.  
 Undergrowth, dense greasewood, scrub mesquite and cactus.  
 Fair grass.

N. 0°01'W., bet. secs. 22 and 23.  
 Over gently rolling land, sloping NW., thru. very scattering timber and undergrowth.  
 2.40 Wash, 12 lks. wide, 1 $\frac{1}{2}$  ft. deep, course NW.  
 25.80 Old road, brs. NW. and SE.  
 35.30 Wash, 25 lks. wide, 2 ft. deep, course NW.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap,

S22 | S23  
 1922

No trees within limits; dig pits 18x18x12 ins., one each N. and S. of post 3 ft. dist.  
 46.50 Old road, brs. NW. and SE.  
 48.30 Wash, 20 lks. wide, 2 ft. deep, course N. 80° W.  
 50.40 Old road, brs. N. 10° E. and S. 10° W.  
 55.80 Old road, brs. E. and W.  
 62.50 Wire fence, brs. E. and W.  
 62.70 Old road, brs. E. and W.  
 63.80 Wash 22 lks. wide, 2 $\frac{1}{2}$  ft. deep, course N. 70° W.  
 75.20 Wash, 10 lks. wide, 2 ft. deep, course N. 80° W.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground for cor. of secs. 14, 15, 22 and 23, marked on brass cap,

T5S | R10E  
 S15 | S14  
 S22 | S23  
 1922

from which;

A palo verde, 10 ins. in diam., brs. N. 43 $\frac{1}{2}$ ° E., 166 lks. dist., marked T5S R10E S14 BT.

## 26 Part (completion) of Subdivision lines of T.5 S., R.10 E.

Chains.

A palo verde, 9 ins. in diam., brs. S.  $31^{\circ}$  E.,  
198 lks. dist., marked T5S R10E S23 BT.  
A palo verde, 5 ins. in diam., brs. S.  $62\frac{1}{2}^{\circ}$  W.,  
343 lks. dist., marked T5S R10E S22 BT.  
A palo verde, 10 ins. in diam., brs. N.  $49\frac{1}{4}^{\circ}$  W., 276  
lks. dist., marked T5S R10E S15 BT.

Land, gently rolling.

Soil, sandy and gravelly clay loam, 2nd rate.

Timber, very scattering palo verde, mesquite and iron-  
wood.

Undergrowth, dense greasewood, scrub mesquite and cactus.

Fair grass.

40.00 S.  $89^{\circ}58'$  E., on a random line, bet. secs. 14 and 23.  
Set temp.  $\frac{1}{4}$  sec. cor.  
80.34 Intersect N. and S. line, 3 lks. N. of the cor. of secs. 13, 14,  
23 and 24.  
Thence, N.  $89^{\circ}57'$  W., on a true line, bet. secs. 14 and 23.  
Over gently rolling land, sloping slightly to the NW.,  
thru. scattering timber and dense undergrowth.  
40.17 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap,

$\frac{1}{4}$  S 14  
S 23  
1922

from which,

A palo verde, 6 ins. in diam., brs. N.  $48\frac{1}{2}^{\circ}$  E., 55  
lks. dist., marked  $\frac{1}{4}$  S 14 BT.A palo verde, 6 ins. in diam., brs. S.  $82\frac{1}{2}^{\circ}$  W., 37  
lks. dist., marked  $\frac{1}{4}$  S 23 BT.

40.75 Wash, 45 lks. wide,  $1\frac{1}{2}$  ft. deep, course N.  $85^{\circ}$  W.  
42.15 Same wash, course W., thence in wash.  
46.35 Leave wash, course S.  $80^{\circ}$  W.  
60.34 Same wash, course NW.  
80.34 The cor. of secs. 14, 15, 22 and 23.

Land, gently rolling.

Soil, sandy and gravelly, 2nd and 3rd rate.

Timber, scattering palo verde, mesquite and ironwood.

Undergrowth, dense greasewood, scrub mesquite and cactus.

Fair grass.

N.  $0^{\circ}01'$  W., bet. secs. 14 and 15.  
Over gently rolling land, sloping slightly to the NW., thru.  
scattering timber and dense undergrowth.  
19.00 Wash, 45 lks. wide, 2 ft. deep, course N.  $70^{\circ}$  W.  
39.50 Wash, 30 lks. wide, 4 ft. deep, course N.  $80^{\circ}$  W.  
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the  
ground for  $\frac{1}{4}$  sec. cor., marked on brass cap,

$\frac{1}{4}$   
S15 | S14  
1922

from which,

A palo verde, 8 ins. in diam., brs. N.  $70\frac{1}{2}^{\circ}$  W., 103  
lks. dist., marked  $\frac{1}{4}$  S 15 BT.A palo verde, 8 ins. in diam., brs. S.  $27^{\circ}$  E., 54  
lks. dist., marked  $\frac{1}{4}$  S 14 BT.

56.30 Old road brs. NW. and SE.  
57.00 Wash, 12 lks. wide, 4 ft. deep, course N.  $75^{\circ}$  W.  
68.60 Old road, brs. NW. and SE.  
73.50 Wash, 25 lks. wide,  $1\frac{1}{2}$  ft. deep, course W.

BOOK 3571

Part (completion) of Subdivision lines of T.5 S. R.10 E. 27

Chains.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground for cor. of secs. 10, 11, 14 and 15, marked on brass cap,

T5S	R10E
S10	S11
S15	S14

1922

from which,

A palo verde, 8 ins. in diam., brs. N. 42 1/2° E., 119 lks. dist., marked T5S R10E S11 BT.

A palo verde, 4 ins. in diam., brs. S. 59° E., 126 lks. dist., marked BT.

A palo verde, 8 ins. in diam., brs. S. 48 1/4° W., 89 lks. dist., marked T5S R10E S15 BT.

An ironwood, 12 ins. in diam., brs. N. 20 1/4° W., 113 lks. dist., marked T5S R10E S10 BT.

Land, slightly rolling.

Soil, sandy and gravelly, 2nd and 3rd rate.

Timber, scattering palo verde, mesquite and ironwood.

Undergrowth, dense greasewood, scrub mesquite and cactus.

Fair grass.

40.00 Set temp. 1/4 sec. cor.

80.34 Intersect N. and S. line, 12 lks. S. of the cor. of secs. 11, 12, 13 and 14.

Thence,

S. 89° 58' W., on a true line, bet. secs. 11 and 14.

Over gently rolling land, sloping slightly to the NW, thru scattering timber and dense undergrowth.

56.80 Wash, 50 lks. wide, 5 ft. deep, course NW.

19.30 Old road, brs. NW. and SE.

34.20 Wash, 8 lks. wide, 2 ft. deep, course NW.

40.17 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor., marked on brass cap,

1/4 S 11
S 14

1922

from which,

A palo verde, 4 ins. in diam., brs. N. 67 1/4° E., 66 lks. dist., marked BT.

A palo verde, 6 ins. in diam., brs. S. 53° E., 48 lks. dist., marked 1/4 S 14 BT.

45.00 Old road, brs. NW. and SE.

50.00 Old road, brs. NW. and SE.

57.00 Wash, 60 lks. wide, 2 ft. deep, course NW.

80.34 The cor. of secs. 10, 11, 14 and 15.

Land, gently rolling.

Soil, sandy and gravelly, 2nd and 3rd rate.

Timber, scattering palo verde, mesquite and ironwood.

Undergrowth, dense greasewood, scrub mesquite and cactus.

Fair grass.

N. 0° 01' W., bet. secs. 10 and 11.

Over gently rolling land, sloping NW., thru scattering timber and dense undergrowth.

17.50 Old road, brs. NW. and SE.

20.80 Wash, 20 lks. wide, 2 ft. deep, course N. 70° W.

23.80 State Highway, brs. N. 70° W. and S. 70° E. Extends north-westerly to Florence and northeasterly to Kelvin.

28 Part (completion) of Subdivision lines of T.5 S. R.10 E.


Chains.

- 31.00 Old road, brs. NW. and SE.
- 33.30 Wire fence, brs. NW. and SE.
- 34.00 Wash, 10 lks. wide, 3 ft. deep, course NW.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap,



from which,

- A palo verde, 3 ins. in diam., brs. S. 40° E., 96 lks. dist., marked BT.
- A palo verde, 4 ins. in diam., brs. S. 25 $\frac{1}{4}$ ° W., 81 lks. dist., marked BT.
- 76.50 Wash, 45 lks. wide, 2 ft. deep, course N. 50° W.
- 79.75 S. edge of shallow wash, 100 lks. wide, course W.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground for cor. of secs. 2, 3, 10 and 11, marked on brass cap,




from which,

- A palo verde, 10 ins. in diam., brs. S. 76° E., 76 lks. dist., marked T5S R10E S11 BT.
- A palo verde, 10 ins. in diam., brs. S. 17 $\frac{1}{2}$ ° W., 16 lks. dist., marked T5S R10E S10 BT.
- A palo verde, 12 ins. in diam., brs. N. 87 $\frac{1}{2}$ ° W., 145 lks. dist., marked T5S R10E S3 BT.
- No other trees available.
- Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, W. of cor. Land, gently rolling.
- Soil, gravelly and rocky clay loam, 3rd and 4th rate.
- Timber, scattering palo verde, mesquite and ironwood.
- Undergrowth, dense greasewood, scrub mesquite and cactas.
- Fair grass.

- 40.00 N. 89° 58' E., on a random line, bet. secs. 2 and 11. Set temp.  $\frac{1}{4}$  sec. cor.
- 80.34 Intersect N. and S. line, 10 lks. N. of the cor. of secs. 1, 2, 11 and 12.

Thence,

- N. 89° 58' W., on true line, bet. secs. 2 and 11.
- Over gently rolling land, sloping NW., thru. scattering timber and dense undergrowth.
- 10.00 Henry Wills' house brs. South 7.00 chs. dist.
- 12.20 Road brs. N. 5° W. and S. 5° E.
- 12.40 Wire fence brs. N. 5° W. and S. 5° E.
- 13.90 Wash, 40 lks. wide, 1 $\frac{1}{2}$  ft. deep, course N. 30° W.
- 18.00 Road, brs. NW. and SE.
- 27.00 Wash, 30 lks. wide, 1 $\frac{1}{2}$  ft. deep, course N. 40° W.
- 32.50 Wash, 30 lks. wide, 2 $\frac{1}{2}$  ft. deep, course N. 20° W.
- 38.00 Road, brs. NW. and SE.
- 40.17 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap,



from which,

Part (Completion) of Subdivision lines of T.5 S. R.10 E. 29

Chains.

A palo verde, 7 ins. in diam., brs. N. 54 $\frac{1}{2}$ ° E., 100 lks. dist., marked  $\frac{1}{4}$  S 2 BT.  
 A palo verde, 6 ins. in diam., brs. S. 38° W., 73 lks. dist., marked  $\frac{1}{4}$  S 11 BT.

41.40 Wash, 50 lks. wide, 1 $\frac{1}{2}$  ft. deep, course N. 20° W. Leave gently rolling, and enter hilly land.  
 Ascend 35 ft., over E. slope.

43.00 Top of hill, brs. N. and S.  
 Descend 52 ft., over W. slope, to

53.00 Foot of hill, brs. N. and S. Leave hilly, and enter gently rolling land.  
 Descend very gradually over W. slope.

79.00 Enter wash, 100 lks. wide, 1 ft. deep, course W. from S. 80° E.

80.34 The cor. of secs. 2, 3, 10 and 11, in wide shallow wash, course W.  
 Land, gently rolling and hilly.  
 Soil, gravelly and rocky, 3rd and 4th rate.  
 Timber, scattering palo verde, mesquite and ironwood.  
 Undergrowth, dense greasewood, scrub mesquite and cactus.  
 Fair grass.

-----

N. 0° 01' W., on true line, bet. secs. 2 and 3.  
 Over gently rolling land, sloping W., thru. scattering timber and dense undergrowth. Across shallow wash, 100 lks. wide, course W.

.75 North edge of wash brs. E. and W. Leave wash.

21.00 Wash, 12 lks. wide, 2 ft. deep, course W. Leave gently rolling, and enter nearly level land, sloping W. and NW.

31.74 Wire fence, brs. E. and W.

33.50 Road, brs. E. and W. Extends northwesterly to Florence and northeasterly to Kelvin.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap,

$\frac{1}{4}$   
 S 3 | S 2  
 1922

from which,

A palo verde, 8 ins. in diam., brs. N. 45 $\frac{1}{2}$ ° W., 176 lks. dist., marked  $\frac{1}{4}$  S 3 BT.  
 A palo verde, 8 ins. in diam., brs. N. 62 $\frac{3}{4}$ ° E., 91 lks. dist., marked  $\frac{1}{4}$  S 2 BT.

Continue over nearly level land, sloping slightly to the NW., thru. very scattering timber and dense undergrowth.

43.20 Wash, 15 lks. wide, 1 $\frac{1}{2}$  ft. deep, course NW.

51.50 Wash, 105 lks. wide, 2 ft. deep, course NW.

74.50 Wash, 30 lks. wide, 2 ft. deep, course NW.

78.30 Wash, 55 lks. wide, 2 ft. deep, course N. 50° W.

82.82 Intersect N. bdy. of Tp., 7.15 chs. S. 89° 48' W., from the previously reestablished cor. of secs. 34 and 35, T. 4 S. R. 10 E., hereinbefore described.

At point of intersection,  
 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for closing cor. of secs. 2 and 3, marked on brass cap,

T4S R10E  
 S34  
 S 3 | S 2  
 T5S R10E  
 C | C  
 1922

from which,

A palo verde, 10 ins. in diam., brs. S. 62 $\frac{1}{4}$ ° E., 176 lks. dist., marked T5S R10E S2CCBT.

30 Part(completion)of the Subdivision lines T.5 S., R.10 E.

Chains.

A palo verde, 10 ins. in diam., brs. S. 44° W., 309 lks. dist., marked T5S R10E S3 CCBT.

Land, gently rolling and nearly level. Soil, sandy and gravelly, 2nd and 3rd rate. Timber, palo verde, mesquite and ironwood, scattering in S. 1/2; very scattering in N. 1/2. Undergrowth, dense greasewood, scrub mesquite and cactus. Fair grass.

From the previously reestablished standard cor. of secs. 33 and 34 on S. bdy. of Tp. (1st Std. Par. S.), hereinbefore described,

N. 0° 02' W., bet. secs. 33 and 34.

Over nearly level land, sloping slightly to the NW., thru scattering timber and dense undergrowth, State Auto Highway, brs. N. 25° W. and S. 25° E. Extends northwesterly to Florence and southeasterly to Tucson.

2.44  
17.40  
21.45  
40.00

Old road, brs. E. and W. Wash, 30 lks. wide, 2 ft. deep, course N. 60° W. Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor., marked on brass cap,

1/4  
S33 | S34  
1922

from which,

A mesquite, 10 ins. in diam., brs. S. 46 1/2° E., 112 lks. dist., marked 1/4 S 34 BT.  
A palo verde, 8 ins. in diam., brs. S. 72 3/4° W., 140 lks. dist.; marked 1/4 S 33 BT.

44.50  
61.30  
69.80  
72.80  
80.00

Wash, 5 lks. wide, 1 ft. deep, course N. 70° W. Wash, 8 lks. wide, 1 ft. deep, course W. The SW. cor. of fenced field, brs. E. about 4.50 chs. dist. Road, brs. NW. and SE. Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 27, 28, 33 and 34, marked on brass cap,

T5S | R10E  
S28 | S27  
S33 | S34  
1922

from which,

A palo verde, 12 ins. in diam., brs. N. 23 1/4° E., 242 lks. dist., marked T5S R10E S27 BT.  
A mesquite, 4 ins. in diam., brs. S. 64 1/2° E., 388 lks. dist., marked BT.  
A palo verde, 10 ins. in diam., brs. S. 40° W., 487 lks. dist., marked T5S R10E S33 BT.  
A palo verde, 8 ins. in diam., brs. N. 27 1/2° W., 390 lks. dist.; marked T5S R10E S28 BT.

Land, nearly level. Soil, sandy and gravelly clay loam, 2nd and 3rd rate. Timber, scattering palo verde, mesquite and ironwood. Undergrowth, dense greasewood, scrub mesquite and cactus. Fair grass.

40.00  
80.38

S. 89° 58' E., on a random line, bet. secs. 27 and 34. Set temp. 1/4 sec. cor. Intersect N. and S. line, 10 lks. N. of the cor. of secs.




BOOK 8871

Part (Completion) of Subdivision lines of T. 5 S., R. 10 E.


Chains.

26, 27, 34 and 35.  
 Thence,  
 N. 89° 54' W., on true line, bet. secs. 27 and 34.  
 Over nearly level land, sloping slightly to the NW. and  
 W., thru scattering timber and dense undergrowth.  
 2.40 Wash, 12 lks. wide, 2 ft. deep, course N. 70° W.  
 14.00 Wash, 45 lks. wide, 2 ft. deep, course N. 70° W.  
 17.70 Old road, brs. NW. and SE.  
 40.19 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
 the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap,




from which,  
 A palo verde, 10 ins. in diam., brs. N. 63 $\frac{1}{2}$ ° E., 81  
 lks. dist., marked  $\frac{1}{4}$  S 27 BT.  
 A palo verde, 6 ins. in diam., brs. S. 49° W., 128  
 lks. dist., marked  $\frac{1}{4}$  S 34 BT.  
 75.80 Wire fence, brs. N. and S.  
 80.38 The cor. of secs. 27, 28, 33 and 34.  
 Land, nearly level.  
 Soil, sandy and gravelly loam, 2nd and 3rd rate.  
 Timber, scattering palo verde, mesquite and ironwood.  
 Undergrowth, dense greasewood, scrub mesquite and cactus.  
 Fair grass.

N. 0° 02' W., bet. secs. 27 and 28.  
 Over nearly level land, sloping slightly to the W., thru.  
 scattering timber and dense undergrowth.  
 14.40 Wash, 12 lks. wide, 1 $\frac{1}{2}$  ft. deep, course S. 70° W.  
 22.60 Old road, brs. NW. and SE.  
 24.20 Ditch, with cut banks, 8 lks. wide, 4 ft. deep, course N.  
 70° W.  
 28.50 Wash, 10 lks. wide, 2 $\frac{1}{2}$  ft. deep, course N. 80° W.  
 29.00 Wash, 8 lks. wide, 2 $\frac{1}{2}$  ft. deep, course N. 80° W.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
 the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap,



from which,  
 A mesquite, 4 ins. in diam., brs. N. 44 $\frac{3}{4}$ ° E., 56  
 lks. dist., marked BT.  
 A palo verde, 12 ins. in diam., brs. S. 78 $\frac{1}{2}$ ° W., 116  
 lks. dist., marked  $\frac{1}{4}$  S 28 BT.  
 52.50 Wash, 8 lks. wide, 2 ft. deep, course W.  
 58.60 Wash, 10 lks. wide, 2 $\frac{1}{2}$  ft. deep, course W.  
 71.30 Wash, 25 lks. wide, 2 ft. deep, course N. 80° W.  
 75.50 Wash, 15 lks. wide, 1 $\frac{1}{2}$  ft. deep, course N. 80° W.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in  
 the ground, for cor. of secs. 21, 22, 27 and 28, marked  
 on brass cap,



from which,  
 A palo verde, 8 ins. in diam., brs. N. 36° E., 176  
 lks. dist., marked T5S R10E S22 BT.  
 A palo verde, 4 ins. in diam., brs. S. 78° W., 224  
 lks. dist., marked BT.

32 Part (completion) of Subdivision lines of T.5 S., R.10 E.

Chains.

A palo verde, 8 ins. in diam., brs. S. 16° W., 433  
lks. dist., marked T5S R10E S28 BT.

A palo verde, 10 ins. in diam., brs. N. 41½° W., 278  
lks. dist., marked T5S R10E S21 BT.

Land, nearly level.

Soil, sandy and gravelly clay loam, 2nd and 3rd rate.

Timber, scattering palo verde, mesquite and ironwood.

Undergrowth, dense greasewood, scrub mesquite and cactus.

Fair grass.

S. 89° 54' E., on a random line, bet. secs. 22 and 27.

40.00 Set temp. ¼ sec. cor.

80.38 Intersect N. and S. line, 9 lks. S. of the cor. of secs.  
22, 23, 26 and 27.

Thence,

N. 89° 58' W., on true line, bet. secs. 22 and 27.

Over nearly level land, sloping slightly to the NW. and W.,  
thru. very scattering timber and dense undergrowth,

69. Wash, 15 lks. wide, 2 ft. deep, course N. 75° W.

2.00 Wash, 9 lks. wide, 2 ft. deep, course N. 80° W.

40.19 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the  
ground, for ¼ sec. cor., marked on brass cap,

¼ S 22  
S 27  
1922

No trees within limits. Dig pits 18x18x12 ins., one each  
E. and W. of post, 3 ft. dist.

70.12 Wire fence, brs. N. and S.

70.69 Old road, brs. NW. and SE.

80.38 The cor. of secs. 21, 22, 27 and 28.

Land, nearly level.

Soil, sandy and gravelly clay loam, 2nd and 3rd rate.

Timber, very scattering palo verde, mesquite and ironwood.

Undergrowth, dense greasewood, scrub mesquite and cactus.

Fair grass.

N. 0° 02' W., bet. secs. 21 and 22.

Over nearly level land, sloping slightly to the NW., thru.  
scattering timber and dense undergrowth.

8.00 Old road, brs. NW. and SE.

12.90 Wash, 8 lks. wide, 3 ft. deep, course N. 80° W.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
the ground for ¼ sec. cor., marked on brass cap,

¼ S 21 S 22  
1922

from which,

A palo verde, 8 ins. in diam., brs. N. 22¼° E., 129  
lks. dist., marked ¼ S 22 BT.

A palo verde, 5 ins. in diam., brs. S. 75¾° W., 137  
lks. dist., marked ¼ S 21 BT.

43.20 Wash, 12 lks. wide, 4 ft. deep, course N. 70° W.

66.00 Old road, brs. E. and W.

67.90 Wash, 60 lks. wide, 1 ft. deep, course N. 80° W.

77.00 Wash, 30 lks. wide, 2 ft. deep, course N. 70° W.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in  
the ground, for cor. of secs. 15, 16, 21 and 22, marked  
on brass cap,

Part (completion) of Subdivision lines of T. 5 S., R. 10 E. 33

Chains.

T5S	R10E
S16	S15
S21	S22
1922	

- from which,
- A palo verde, 8 ins. in diam., brs. N.  $13\frac{1}{2}^{\circ}$  E., 414 lks. dist., marked T5S R10E S15 BT.
- A palo verde, 6 ins. in diam., brs. S.  $54\frac{3}{4}^{\circ}$  E., 170 lks. dist., marked T5S R10E S22 BT.
- A palo verde, 7 ins. in diam., brs. S.  $20\frac{1}{4}^{\circ}$  W., 223 lks. dist., marked T5S R10E S21 BT.
- A palo verde, 10 ins. in diam.; brs. N.  $85\frac{1}{4}^{\circ}$  W., 206 lks. dist., marked T5S R10E S16 BT.

Land, nearly level.  
 Soil, sandy and gravelly clay loam, 2nd and 3rd rate.  
 Timber, scattering palo verde, mesquite and ironwood.  
 Undergrowth, dense greasewood, scrub mesquite and cactus.  
 Fair grass.

40.00 S.  $89^{\circ}58'$  E., on a random line, bet. secs. 15 and 22.  
 80.28 Set temp.  $\frac{1}{4}$  sec. cor.  
 Intersect N. and S. line, 5 lks. S. of the cor. of secs. 14, 15, 22 and 23.

Thence,  
 West, on a true line, bet. secs. 15 and 22.  
 Over nearly level land, sloping slightly to the W., thru. scattering timber and dense undergrowth.  
 40.14 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap,

$\frac{1}{4}$	S 15
	S 22
	1922

- from which
- A palo verde, 5 ins. in diam., brs. N.  $53\frac{3}{4}^{\circ}$  E., 340 lks. dist., marked  $\frac{1}{4}$  S 15 BT.
- A palo verde, 6 ins. in diam., brs. S.  $34\frac{1}{2}^{\circ}$  W., 184 lks. dist., marked  $\frac{1}{4}$  S 22 BT.

55.00 Wash, 30 lks. wide, 2 ft. deep, course N.  $75^{\circ}$  W.  
 80.28 The cor. of secs. 15, 16, 21 and 22.  
 Land, nearly level.  
 Soil, sandy and gravelly, 2nd and 3rd rate.  
 Timber, scattering palo verde, mesquite and ironwood.  
 Undergrowth, dense greasewood, scrub mesquite and cactus.  
 Fair grass.

40.00 N.  $0^{\circ}02'$  W., on a random line, bet. secs. 15 and 16.  
 80.42 Set temp.  $\frac{1}{4}$  sec. cor.  
 Fall 22 lks. E. of the original cor. of secs. 9, 10, 15 and 16, which is an iron post 2 ins. in diam., projecting 10 ins. above ground, firmly set, properly marked on brass cap, and witnessed by one properly marked ironwood bearing tree SW. of cor., 234 lks. dist., four pits, one each NE., SE., SW. and NW. of post, and mound of earth, W. of cor.

Thence,  
 S.  $0^{\circ}11'$  E., on true line, bet. secs. 15 and 16.  
 Over gently rolling land, sloping NW., thru. scattering timber and dense undergrowth.

18.82 Old road, brs. NW. and SE.  
 27.82 Wash, 10 lks. wide,  $1\frac{1}{2}$  ft. deep, course N.  $70^{\circ}$  W.  
 34.22 Old road, brs. NW. and SE.  
 40.42 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap,

34 Part (completion) of Subdivision lines of T. 5 S., R. 10 E.

Chains.

S16 S15

1922

from which,

A palo verde, 6 ins. in diam., brs. N. 88° E., 230 lks. dist., marked 1/4 S 15 BT.

A palo verde, 8 ins. in diam., brs. S. 14 1/2° W., 72 lks. dist., marked 1/4 S 16 BT.

- 52.22 Wash, 9 lks. wide, 2 ft. deep, course NW.
- 54.22 Wash, 15 lks. wide, 2 1/2 ft. deep, course NW.
- 65.25 Wash, 60 lks. wide, 2 ft. deep, course N. 80° W.
- 80.42 The cor. of secs. 15, 16, 21 and 22.

Land, gently rolling.  
 Soil, gravelly and rocky, 3rd and 4th rate.  
 Timber, scattering palo verde, mesquite and ironwood.  
 Undergrowth, dense greasewood, scrub mesquite and cactus.  
 Fair grass.

- 40.00 From the original cor. of secs. 9, 10, 15 and 16, S. 89° 58' E., on a random line, bet. secs. 10 and 15. Set temp. 1/4 sec. cor.
- 80.46 Intersect N. and S. line, 37 lks. N. of the cor. of secs. 10, 11, 14 and 15.

Thence, N. 89° 42' W., on a true line, bet. secs. 10 and 15.  
 Over gently rolling land, sloping NW., thru. scattering timber and dense undergrowth.

- 11.66 Wash, 45 lks. wide, 1 1/2 ft. deep, course N. 80° W.
- 17.46 Old road, bears NW. and SE. 1/2 mi. S. of the cor. of secs. 10,
- 28.76 Wash, 25 lks. wide, 2 ft. deep, course N. 70° W.
- 33.75 Wash, 30 lks. wide, 2 ft. deep, course N. 60° W.
- 39.66 Old road, brs. NW. and SE.
- 40.23 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor., marked on brass cap,

1/4 S 10  
S 15  
1922

from which,

A palo verde, 6 ins. in diam., brs. N. 18 1/2° W., 320 lks. dist. marked 1/4 S 10 BT.

An ironwood, 4 ins. in diam., brs. S. 14 1/2° W., 122 lks. dist., marked BT.

- 58.16 Wash, 12 lks. wide, 3 ft. deep, course N. 40° W.
- 69.26 Wash, 25 lks. wide, 2 ft. deep, course N. 30° W.
- 80.46 The cor. of secs. 9, 10, 15 and 16.

Land, gently rolling.  
 Soil, gravelly and rocky, 3rd and 4th rate.  
 Timber, scattering palo verde, mesquite and ironwood.  
 Undergrowth, dense greasewood, scrub mesquite and cactus.  
 Fair grass.

- 40.00 The original cor. of secs. 3, 4, 9 and 10, is an iron post, 2 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by one properly marked bearing tree SW. of cor. 202 lks. dist., 4 pits, one each NE., SE., SW. and NW. of post, and mound of earth, W. of cor.
- 80.40 Thence, S. 89° 42' E., on random line, bet. secs. 3 and 10. Set temp. 1/4 sec. cor. Intersect N. and S. line, 2 lks. N. of the cor. of secs. 2, 3, 10 and 11.

Chains.

- Thence,  
N. 89° 41' W., on true line, bet. secs. 3 and 10.  
Over nearly level land, sloping slightly to the NW., thru.  
scattering timber and dense undergrowth, in shallow  
wash, 100 lks. wide, course W.
- 1.35 S. bank of wash, brs. E. and N. 80° W.  
Leave wash, course N. 80° W. from E.
- 7.90 Wash, 45 lks. wide, 2 ft. deep, course N. 60° W.
- 23.00 Leave nearly level, and enter gently rolling land.  
Ascend slightly over NE. slope.
- 31.00 Descend over NW. slope.
- 37.00 Wash, 60 lks. wide, 1½ ft. deep, course N.  
Ascend slightly over NE. slope to ¼ sec. cor.
- 38.00 Wire fence, brs. N. and S.
- 40.20 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
the ground, for ¼ sec. cor., marked on brass
- $\frac{1}{4}$  S 3  
 S 10  
 1922
- from which,  
A palo verde, 8 ins. in diam., brs. N. 10½° E., 24 lks.  
dist., marked ¼ S 3 BT.  
A palo verde, 8 ins. in diam., brs. S. 29½° W., 31  
lks. dist., marked ¼ S 10 BT.
- Continue over gently rolling land, sloping NW., thru. scat-  
tering timber and dense undergrowth.
- 42.40 Old road, brs. N. 20° W. and S. 20° E.
- 68.10 Wash, 15 lks. wide, 4 ft. deep, course N. 30° W.
- 80.40 The cor. of secs. 3, 4, 9 and 10.  
Land, E. 23 chs. nearly level; remainder, gently rolling.  
Soil, gravelly sand rocky, 3rd and 4th rate.  
Timber, scattering palo verde, mesquite and ironwood.  
Undergrowth, dense greasewood, scrub mesquite and cactus.  
Fair grass.
- 
- The original cor. of secs. 28, 29, 32 and 33 is an iron  
post 2 ins. in diam., projecting 10 ins. above ground,  
firmly set, properly marked on brass cap, and witnessed  
by four pits, one each NE., SE., SW. and NW. of post,  
and mound of earth W. of cor. No bearing trees.
- Thence,  
S. 89° 59' E., on a random line, bet. secs. 28 and 33.
- 40.00 Set temp. ¼ sec. cor.
- 80.26 Intersect N. and S. line, 10 lks. N. of the cor. of secs. 27,  
28, 33 and 34.
- Thence,  
N. 89° 55' W., on true line, bet. secs. 28 and 33.  
Over nearly level land, sloping slightly to the W., thru.  
scattering timber and dense undergrowth.
- 6.00 Old road, brs. NW and SE.
- 40.13 Set an iron post; 3 ft. long, 1 in. in diam., 26 ins. in  
the ground for ¼ sec. cor., marked on brass cap,
- $\frac{1}{4}$  S 28  
 S 33  
 1922
- from which,  
A palo verde, 6 ins. in diam., brs. N. 48½° W., 67  
lks. dist., marked ¼ S 28 BT.  
A palo verde, 6 ins. in diam., brs. S. 54¾° E., 354  
lks. dist., marked ¼ S 33 BT.
- 62.80 State Auto Highway, brs. N. 25° W. and S. 25° E. Extends  
northwesterly to Florence and southeasterly to Tucson.
- 80.26 The cor. of secs. 28, 29, 32 and 33.  
Land, nearly level.

36 Part (completion) of the Subdivision lines of T.5 S., R.10 E.

Chains.

Soil, sandy and gravelly, 2nd and 3rd rate.  
Timber, scattering palo verde, mesquite and ironwood.  
Undergrowth, dense greasewood, scrub mesquite and cactus.  
Fair grass.

The original cor. of secs. 20, 21, 28 and 29 is an iron post 2 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by four pits, one each NE., SE., SW. and NW. of post, and mound of earth W. of cor.

Thence,  
S. 89° 55' E., on a random line, bet. secs. 21 and 28.  
40.00 Set temp. 1/4 sec. cor., sloping slightly to the NW., thru.  
80.12 Intersect N. and S. line, 5 lks. N. of cor. of secs. 21, 22,  
15.80 27 and 28,

Thence,  
N. 89° 53' W., on true line, bet. secs. 21 and 28.  
Over nearly level land, sloping slightly to the NW., thru.  
scattering timber and dense undergrowth.

15.80 Wash, 15 lks. wide, 2 ft. deep, course N. 80° W.  
40.06 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
the ground for 1/4 sec. cor.; marked on brass cap,

1/4 S 21  
S 28  
1922

No trees within limits; dig pits 18x18x12 ins., one each E. and W. of post, 3 ft. dist.

57.10 Wash, 25 lks. wide, 4 ft. deep, course N. 65° W.  
75.50 Old road, brs. N. 40° W. and S. 40° E.  
80.12 The cor. of secs. 20, 21, 28 and 29.  
Land, nearly level.  
Soil, sandy and gravelly loam, 2nd and 3rd rate.  
Timber, scattering palo verde, mesquite and ironwood.  
Undergrowth, dense greasewood, scrub mesquite and cactus.  
Fair grass.

The original cor. of secs. 16, 17, 20 and 21 is an iron post 2 ins. in diam., projecting 10 ins. above ground, firmly set, properly marked on brass cap, and witnessed by 4 pits, one each NE., SE., SW. and NW. of post, and mound of earth W. of cor. No bearing trees.

Thence,  
S. 89° 53' E., on a random line, bet. secs. 16 and 21.  
40.00 Set temp. 1/4 sec. cor.  
80.18 Intersect the cor. of secs. 15, 16, 21 and 22.

Thence,  
N. 89° 53' W., on true line, bet. secs. 16 and 21.  
Over nearly level land, sloping slightly to the NW., thru.  
scattering timber and dense undergrowth.

26.00 Wash, 45 lks. wide, 2 ft. deep, course N. 60° W.  
40.09 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
the ground, for 1/4 sec. cor., marked on brass cap,

1/4 S 16  
S 21  
1922

from which,  
A palo verde, 10 ins. in diam., brs. N. 35° W., 23  
lks. dist., marked 1/4 S 16 BT.  
A palo verde, 8 ins. in diam., brs. S. 14° W., 150  
lks. dist., marked 1/4 S 21 BT.

41.60 Wash, 25 lks. wide, 3 ft. deep, course N. 50° W.  
53.20 Old road, brs. NW and SE.

Chains.

70.75 Wash, 60 lks. wide, 3 ft. deep, course N. 60° W.  
 78.20 Old road, brs. N. 30° W. and S. 30° E.  
 78.25 Wash, 8 lks. wide, 4 ft. deep, course N. 70° W.  
 80.18 The cor. of secs. 16, 17, 20 and 21.  
 Land, nearly level.  
 Soil, sandy, gravelly and rocky, 3rd and 4th rate.  
 Timber, scattering palo verde, mesquite and ironwood.  
 Undergrowth, dense greasewood, scrub mesquite and cactus.  
 Fair grass.

-----

The continued satisfactory adjustment of the solar apparatus during the survey of this township is indicated from field tests described in Book "C" of this group.

-----

GENERAL DESCRIPTION.

The surface of the portion of this township surveyed as described in the foregoing field notes is nearly level and gently rolling. The soil in the south half is mostly a sandy and gravelly clay, 2nd and 3rd rate. In the north half, the soil varies from sandy and gravelly, 2nd rate to rocky, 4th rate.

The timber consists of palo verde, mesquite and ironwood, occurring in scattering and very scattering growths in all sections, and a dense undergrowth of greasewood, scrub mesquite and cactus is prevalent in all parts. There is a fair growth of grass over most of the township. The township drains NW., thru. many small washes, and there is no permanent running water.

There is no indication of valuable mineral deposits. There are two settlers, one in sec. 11, and one in section 35.

The improvements consist of a house in sec. 11, a house and cement tank in sec. 35, a fenced pasture in the south half of the Tp. enclosing about 2400 acres, and a fenced pasture in secs. 2, 3, 10 and 11, enclosing about 900 acres.

Two state highways pass thru. this part of the township, one from Florence to Kelvin, and one from Florence to Tucson. Many unimproved roads traverse all sections.

-----

Book "B"  
Group 116 - - Arizona.

BOOK 116

4-680

FIELD ASSISTANTS. to

Sidney E. Blout, U.S. Cadastral Engineer.

NAMES.	CAPACITY.
Ben Mollette,	1st chainman,
Robert R. Parsons,	2nd chainman,
B.G. Towler,	flagman,
Louis J. Spear,	axman,
Rudolph McCormack,	cornerman.



40  
BOOK 3571

CERTIFICATE OF UNITED STATES CADASTRAL ENGINEER.

I, ~~Sidney E. Blout, U.S. Cadastral Engineer~~, Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 116, Arizona, bearing date of the 23rd day of May, 1921, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, ~~retraced~~ all those parts or portions of the First Standard Parallel South, in Range 10 East, the South Bdy. of T.4 S., R.10 E., and Subdivision lines of T.5 S., R.10 E.; resurveyed all those parts or portions of the South Bdy. of T.4 S., R10 E., and the N. & E. bdrs. of T.5 S., R10 E.; and surveyed all those parts or portions of the Subdivision lines of TOWNSHIP 5 SOUTH, RANGE 10 EAST.

of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in and by diagram on page 1 hereof the foregoing field notes as having been executed by me, and under my direction; and that all the corners of retracement, resurvey and said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 116, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such retracement, resurvey and survey.

Place: Phoenix, Arizona  
Date: October 16, 1923

Sidney E. Blout  
U.S. Cadastral Engineer.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix, Arizona, November 2, 1923.

The foregoing field notes of the retracement of the First Standard Parallel South, thru part of Range 10 East, part of South Bdy. of T.4 S., R.10 E., and part of the Subdivision lines of Township 5 South, Range 10 East; of the Resurvey of part of the South Bdy. of T.4 S., R.10 E., part (N. 1/2) of the East bdy., and part (E. 1/2) of North Bdy. of T.5 S., R.10 E.; and of the survey of part (completion) of the Subdivision lines of TOWNSHIP 5 SOUTH, RANGE 10 EAST.

of the Gila and Salt River Base and Meridian, in the State of Arizona, executed by Sidney E. Blout, U. S. Cadastral Engineer,

under his special instructions dated May 23, 1921, for Group 116, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Frank D. Frost  
U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above described surveys in \_\_\_\_\_, has been correctly copied from the original notes on file in this office.