

3576

Book "G"

4-679

143

①

BOOK 3576

FIELD NOTES

OF THE RETRACEMENT OF

The North Boundary,

OF THE RESURVEY OF

The South Boundary,

The East Boundary, and

The West Boundary,

AND OF THE SURVEY OF

The Subdivision Lines of

TOWNSHIP 6 NORTH, RANGE 3 EAST,

Of the Gila and Salt River Base and Meridian,

In the State of Arizona.

EXECUTED BY

Sidney E. Blout,

U.S. Cadastral Engineer,

In the capacity of U. S. Surveyor, under ^{Special} instructions dated May 23, 1921, issued by the United States Surveyor General to govern surveys included in Group No. 116, Ariz., which were approved by the Commissioner of the General Land Office, July 6, 1921, and Assignment Instructions dated Nov. 21, 1921.

Retracement, Resurvey & Survey commenced August 15, 1922.

Retracement, Resurvey & Survey completed September 9, 1922.

3576

3576


(19)

Book "G"

Group 116 - - Arizona,

BOOK 3576

INDEX DIAGRAM.

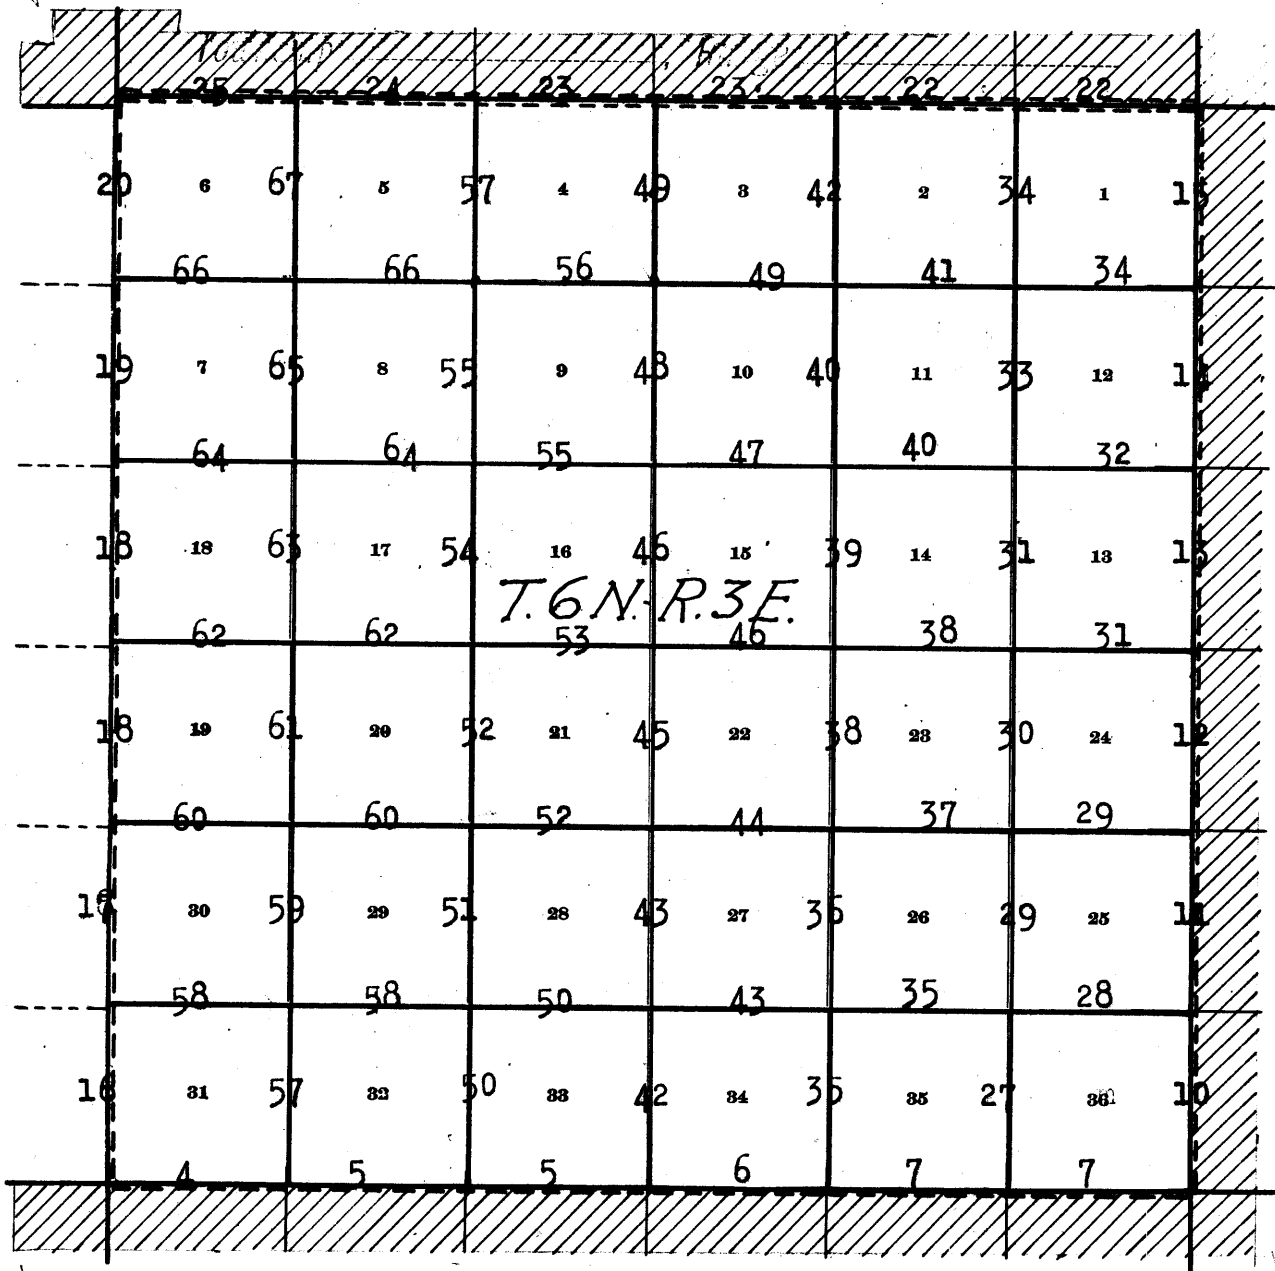

- Lines retraced, under this group.
- Lines resurveyed under this group.
- Lines surveyed under this group.
- Accepted surveys.
- Unsurveyed.
- Areas surveyed as per accepted plat on file.

Book "G"

Group 116 - - Arizona.

Township 6 North, Range 3 East.

DATE DIAGRAM.

RETRACED

RESURVEYED

RESURVEYED

	8-18-22	8-18-22	8-18-22	8-18-22	8-15-22	8-15-22	
9-9-22	6 9-7-22	5 9-7-22	4 9-6-22	3 9-6-22	2 8-29-22	1 8-29-22	9-8-22
9-7-22	7 9-7-22	8 9-6-22	9 9-2-22	10 8-30-22	11 8-28-22	12 8-23-22	8-21-22
9-7-22	18 9-5-22	17 9-5-22	16 9-2-22	15 8-30-22	14 8-28-22	13 8-28-22	8-21-22
9-5-22	19 9-1-22	20 9-1-22	21 8-30-22	22 8-26-22	23 8-24-22	24 8-22-22	8-21-22
9-1-22	30 8-31-22	29 8-31-22	28 8-26-22	27 8-25-22	26 8-24-22	25 8-22-22	8-21-22
9-1-22	31 8-31-22	32 8-26-22	33 8-25-22	34 8-24-22	35 8-22-22	36 8-22-22	8-21-22
	8-31-22	8-31-22	8-31-22	8-25-22	8-25-22	8-22-22	

RESURVEYED

Lines retraced, resurveyed, or surveyed on dates shown on above diagram, by Sidney E. Blout, U.S. Cadastral Engineer.

The retracements, resurveys, and surveys, hereinafter described, executed on dates shown on diagram on page 1 hereof by Sidney E. Blout, U.S. Cadastral Engineer, using a Buff "Rocky Mountain Favorite" solar transit No. 9984 with U-shaped standards, $4\frac{1}{2}$ inch horizontal circle, 4 inch vertical circle, and improved Smith solar attachment. The horizontal limb is provided with two double verniers placed opposite to each other reading to single minutes of arc, which is also the least count of the verniers of the latitude and declination arcs. All azimuth determinations are accomplished with the solar attachment, except the special observations on Polaris and the sun for meridian upon which to test the solar apparatus as, stated in the field notes.

The instrument was examined, tested on the true meridian at the Federal Building at Phoenix Arizona November 8, 1921 and August 5, 1922, found correct and was approved by the Assistant Supervisor of Surveys for Arizona and California, conditional upon satisfactory field tests.

FIELD TEST

Preliminary to beginning the survey of this township I examine the adjustments of the transit and correct the level and collimation errors, then to test the solar apparatus by comparing its indications resulting from solar observations made during a.m. and p.m. hours with a meridian established by observations on Polaris; proceed as follows;

At camp near Charles Beverley's house in sec. 16 T6N., R3E, latitude $33^{\circ}51'10''$ N. and longitude $112^{\circ}02'50''$ W.; August 10, 1922, at $4^{h}00^{m}$ p.m. app. time set off $33^{\circ}51'$ N. on the lat. arc, $15^{\circ}36'$ N. on the decl. arc, and determine a meridian with the solar and mark a point thereof by a tally pin driven in a stake about 5 chs. N.

At the same station at $10^{h}22.8^{m}$ p.m., l.m.t. by my watch which I set by Telegraphic clock to read correct local mean time, observe Polaris at eastern elongation, making four observations, two each with the telescope in direct and reversed positions and mark the mean point in the line thus determined, by a nail driven in stake set in the ground about 5 chs. N. of station.

August 11, at $7^{h}00^{m}$ a.m. lay off the azimuth of Polaris $1^{\circ}20\frac{1}{2}'$ to the west and mark the meridian thus determined by a tally pin driven in the stake set last evening on which the meridian falls $01'$ in angle W. of the point determined by the solar.

At $8^{h}00^{m}$ a.m. app. time with the latitude arc remaining unchanged, set off $15^{\circ}24\frac{1}{2}'$ N. on the decl. arc and determine a meridian with the solar and mark a point thereof on the stake already set about 5 chains N.; This point falls $01'$ in angle W. of the meridian determined by the Polaris observations.

The solar apparatus by p.m., and a.m. observations defines positions for meridians which agree within approximately $01'$ with the meridian established by the Polaris observation; therefore conclude that the adjustments of the instrument are satisfactory.

All measurements are made with a Galile 5-chain steel tape, compared with a Chesterman standard steel tape, and found correct. The measurements are made on the slope, the vertical angles determined and the slope measurements properly reduced to true horizontal distances.

Resurvey of South bdy. of Township 6 North, Range 3 East.

3

Chains.

This township boundary was surveyed by J. H. Martineau, U.S.D.S. in 1894, and no retracement or resurvey of any part of same is of record. The following notes describe a resurvey of the entire line.

RETRACEMENT FOR RESURVEY.

- From the original cor. of Ts. 5 and 6 N., Rs. 3 and 4 E., hereinafter described,
 S. 89°57' W., on a random line, bet. secs. 1 and 36 (E. $\frac{1}{2}$).
 39.99 Fall 14 lks. S. of the original $\frac{1}{4}$ sec. cor. hereinafter described.
 True course and dist. of E. $\frac{1}{2}$ of line, bet. secs. 1 and 36 are therefore S. 89°51' E., 39.99 chs.
 Thence,
 S. 89°57' W., on a random line, bet. secs. 1 and 36 (W. $\frac{1}{2}$).
 40.16 Fall 18 lks. S. of the original cor. of secs. 1, 2, 35 and 36, hereinafter described.
 True course and dist. of W. $\frac{1}{2}$ of line bet. secs. 1 and 36 are therefore S. 89°48' E., 40.16 chs.
-
- S. 89°57' W. on a random line, bet. secs. 2 and 35 (E. $\frac{1}{2}$).
 39.99 Fall 8 lks. S. of the original $\frac{1}{4}$ sec. cor. hereinafter described.
 True course and dist. of E. $\frac{1}{2}$ of line, bet. secs. 2 and 35, are therefore S. 89°56' E., 39.99 chs.
 Thence,
 S. 89°57' W., on a random line, bet. secs. 2 and 35 (W. $\frac{1}{2}$).
 40.22 Fall 9 lks. S. of the original cor. of secs. 2, 3, 34 and 35, hereinafter described.
 True course and dist. of W. $\frac{1}{2}$ of line; bet. secs. 2 and 35 are therefore S. 89°55' E.; 40.22 chs.
-
- S. 89°57' W., on a random line, bet. secs. 3 and 34 (E. $\frac{1}{2}$).
 40.12 Fall 5 lks. S. of the original $\frac{1}{4}$ sec. cor., hereinafter described.
 True course and dist. of E. $\frac{1}{2}$ of line bet. secs. 3 and 34 are therefore S. 89°59' E., 40.12 chs.
 Thence,
 S. 89°57' W., on a random line, bet. secs. 3 and 34 (W. $\frac{1}{2}$).
 40.05 Fall 5 lks. S. of the original cor. of secs. 3, 4, 33 and 34, hereinafter described.
 True course and dist. of W. $\frac{1}{2}$ of line bet. secs. 3 and 34 are therefore S. 89°59' E., 40.05 chs.
-
- S. 89°57' W., on a random line, bet. secs. 4 and 33.
 40.00 Diligent search in this vicinity fails to reveal any trace of the original $\frac{1}{4}$ sec. cor. Set temp. $\frac{1}{4}$ sec. cor.
 80.40 Fall 26 lks. N. of the original cor. of secs. 4, 5, 32 and 33, hereinafter described.
 True course and dist. of line, bet. secs. 4 and 33 are therefore N. 89°46' E., 80.40 chs.
-
- S. 89°57' W., on a random line, bet. secs. 5 and 32.
 40.00 Diligent search in this vicinity fails to reveal any trace of the original $\frac{1}{4}$ sec. cor.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.34 Fall 77 lks. N. of the original cor. of secs. 5, 6, 31 and 32, hereinafter described.
 True course and dist. of line, bet. secs. 5 and 32 are therefore N. 89°24' E., 80.34 chs.

4 Resurvey of S. bdy. of Township 6 North, Range 3 East.

Chains.

(Retracement for Resurvey (continued)).

40.08 S.89°57'W., on a random line, bet. secs.6 and 31 (E.½). Fall 16 lks.N. of the original ¼ sec.cor., hereinafter described.

True course and dist. of E.½ of line bet. secs.6 and 31 are therefore N.89° 43'E., 40.08 chs.

Thence,

39.51 S.89°57'W., on a random line, bet. secs. 6 and 31 (W.½). Fall 195 lks.N. of the original cor. of Ts. 5 and 6 N., Rs. 2 and 3 E., hereinafter described.

True course and dist. of W.½ of line bet. secs.6 and 31 are therefore N.87°08'E., 39.56 chs.

RESURVEY.

The original cor. of Ts.5 and 6 N., Rs.2 and 3 E., as established by J.H.Martineau, U.S.D.S. in 1894, and altered by A.N.Oliver, U.S.D.S. in 1910, is a malpais stone 12x10x8 ins. above ground, firmly set, marked 6N on NE.face, 3E on SE.face, 5N on SW.face, and 2E on NW. face, and 6 notches on each of N., S., E and W. edges, and witnessed by a mound of stone S. of cor., and one properly marked bearing tree SE. of cor., 49 lks. dist.

Thence,

N.87°08'E., on true line, bet. secs.6 and 31 (W.½).


Over rolling land, thru. dense undergrowth.

26.45 Wash, 20 lks. wide, 4 ft. deep, course NW. Leave rolling, and enter level land. Descend 103 ft.

39.56 Intersect the original ¼ sec.cor., which is a malpais stone 8x6x6 ins. above ground, firmly set, marked ¼ on N.face. No accessories.

Reconstruct this cor. as follows:

Alongside the stone, set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground for ¼ sec. cor. of secs.6 and 31, marked on brass cap,



Raise a mound of stone 2 ft. base, 1½ ft. high, N. of cor.


Thence,

N.89°43'E., on a true line, bet. secs.6 and 31 (E.½).

Over level land, thru. dense undergrowth.

40.08 Intersect the original cor. of secs.5,6, 31 and 32, which is a malpais stone 8x6x6 ins. above ground, firmly set, marked with 5 notches on E. edge and 1 notch on W. edge. No accessories. Reconstruct the cor. as follows:

Alongside the stone, set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground for cor. of secs.5,6, 31 and 32, marked on brass cap,



Raise a mound of stone 2 ft. base, 1½ ft. high, W. of cor.

Land, W, 26½ chs.; rolling; remainder, level.

Soil, in W. 26½ chs., rocky; 4th rate; in remainder, gravelly, over 3rd rate. Timber, none.

40.08 Undergrowth, dense scrub palo verde; cedar and mesquite, and scattering greasewood. Above ground, firmly set, marked with 5 notches on E. edge, and 1 notch on W. edge.

No accessories; ---Reconstruct the cor. as follows:---

Resurvey of South hdy. of Township 6 North Range 3 East.

Chains.

5.95 N. 89°24'E., on true line, bet. secs. 5 and 32.
 31.55 Over level land, thru. dense undergrowth.
 40.17 Old road, brs. N. and S.
 Old road, brs. N. and S.
 (Midpoint) Set an iron post 3 ft. long, 1 in. in diam., 26
 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. of secs.
 5 and 32, marked on brass cap,

$\frac{1}{4}$ S 32
 S 5
 1922

80.34. Raise a mound of stone 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.
 Continue over level land, thru. dense undergrowth.
 Intersect the original cor. of secs. 4, 5, 32 and 33, which
 is a malpais stone 8x6x6 ins. above ground, firmly
 set, marked with 4 notches on E. edge and 2 notches on
 W. edge.
 No accessories. Reconstruct the cor. as follows:
 Alongside the stone, set an iron post, 3 ft. long, 2 ins.
 in diam., 27 ins. in the ground for cor. of secs. 4, 5, 32
 and 33, marked on brass cap,

T6N | R3E
 S32 | S33
 S 5 | S 4
 T5N
 1922

Dig pits, 18x18x12 ins., one each NE., SE., SW. and NW. of
 post, 3 ft. dist.
 Land, level.
 Soil, sandy and gravelly, 3rd rate.
 Timber, none.
 Undergrowth, dense greasewood and scattering palo verde
 and mesquite.

28.09 N. 89°46'E., on true line, bet. secs. 4 and 33.
 40.20 Over level land, thru. scattering timber and dense under-
 growth.
 Road, brs. N. and S.
 (Midpoint) Set an iron post 3 ft. long, 1 in. in diam., 26
 ins. in the ground, with a stone marked with a cross
 (x) deposited at base of post, for reestablished $\frac{1}{4}$
 sec. cor. of secs. 4 and 33, marked on brass cap,

$\frac{1}{4}$ S 33
 S 4
 1922

52.00 No trees suitable for bearing trees within limits.
 80.40 Dig pits 18x18x12 ins., one each E. and W. of post, 3 ft.
 dist.
 Continue over level land, thru. scattering timber and
 dense undergrowth.
 Wash, 20 lks. wide, 12 ft. deep, course SW.
 Intersect the original cor. of secs. 3, 4, 33 and 34, which
 is a malpais stone 8x6x6 ins. above ground, firmly
 set, marked with 3 notches on each of E. and W. edges.
 No accessories. Reconstruct this cor. as follows:
 Alongside the stone, set an iron post, 3 ft. long, 2 ins.
 in diam., 27 ins. in the ground for cor. of secs. 3, 4,
 33. and 34, marked on brass cap,

T6N | R3E
 S32 | S33
 S 5 | S 4
 T5N
 1922

6 Resurvey of South bdy. of Township 6 North, Range 3 East.

Chains.

T6N	R3E
S33	S34
S 4	S 3
T5N	
1922	

No trees suitable for bearing trees within limits.
 Raise a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 Land, level.
 Soil, sandy and gravelly, 2nd rate.
 Timber, scattering mesquite and palo verde.
 Undergrowth, dense greasewood and scrub palo verde.

S. $89^{\circ}59'$ E.; on true line, bet. secs. 3 and 34 (W. $\frac{1}{2}$).
 Over level land, thru. scattering timber, and dense under-
 growth.

40.05 Intersect the original $\frac{1}{4}$ sec. cor., which is a malpais
 stone 6x6x5 ins. above ground, firmly set, marked $\frac{1}{4}$
 on N. face. No accessories. Reconstruct this cor. as
 follows:

Alongside the stone, set an iron post 3 ft. long, 1 in. in
 diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 3
 and 34, marked on brass cap,

$\frac{1}{4}$	S 34
	S 3
1922	

from which,

A palo verde, 8 ins. in diam., brs. N. 31° W., 86 lks.
 dist., marked $\frac{1}{4}$ S 34 BT.

A palo verde, 8 ins. in diam., brs. S. 54° W., 27 lks.
 dist., marked $\frac{1}{4}$ S 3 BT.

Thence,

S. $89^{\circ}59'$ E., on true line, bet. secs. 3 and 34 (E. $\frac{1}{2}$).
 Over level land, thru. scattering timber and dense under-
 growth.

40.12 Intersect the original cor. of secs. 2, 3, 34 and 35, which
 is a malpais stone 8x6x6 ins. above ground, loosely
 set, marked with 2 notches on E. and 4 notches on W.
 edges. No accessories. Reconstruct this cor. as
 follows:

Alongside the stone, set an iron post, 3 ft. long, 2 ins.
 in diam., 27 ins. in the ground, for cor. of secs. 2, 3, 34
 and 35, marked on brass cap,

T6N	R3E
S34	S35
S 3	S 2
T5N	
1922	

from which;

A mesquite, 8 ins. in diam., brs. N. 43° E., 210
 lks. dist., marked T6N R3E S35 BT.

A mesquite, 6 ins. in diam., brs. S. $27\frac{1}{2}^{\circ}$ E., 150
 lks. dist., marked T5N R3E S2 BT.

A palo verde, 6 ins. in diam., brs. S. $31\frac{1}{2}^{\circ}$ W., 72
 lks. dist., marked T5N R3E S3 BT.

A palo verde, 18 ins. in diam., brs. N. $33\frac{1}{2}^{\circ}$ W., 160
 lks. dist., marked T6N R3E S34 BT.

Land; level.

Soil, sandy and gravelly, 2nd rate.

Timber, scattering palo verde and mesquite.

Undergrowth, dense greasewood and scrub palo verde and
 ironwood.

Resurvey of South bdy. of Township 6 North, Range 3 East. 7

Chains.

S.89°55'E., on true line, bet. secs.2 and 35 (W. $\frac{1}{4}$).
 Over nearly level land, sloping slightly to the S., thru.
 scattering timber and dense undergrowth.
 7.49 Wash, 40 lks. wide, course S.30°W.
 35.00 Wash, 20 lks. wide, course SW. from N.
 40.22 Intersect the original $\frac{1}{4}$ sec. cor., which is a malpais
 stone 8x6x4 ins. above ground, firmly set, marked $\frac{1}{4}$ on
 N. face.
 No accessories. Reconstruct this cor. as follows:
 Alongside the old stone, set an iron post, 3 ft. long, 1
 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of
 secs. 2 and 35, marked on brass cap,

$\frac{1}{4}$ S 35
 S 2
 1922

from which,
 A palo verde, 12 ins. in diam., brs. N.29°W., 7 lks.
 dist., marked $\frac{1}{4}$ S 35 BT.
 A palo verde, 6 ins. in diam., brs. S.48 $\frac{1}{2}$ °W., 108 lks.
 dist., marked $\frac{1}{4}$ S 2 BT.

Thence,
 S.89°56'E., on true line, bet. secs. 2 and 35 (E. $\frac{1}{4}$).
 Over nearly level land, thru. scattering timber and dense
 undergrowth.
 6.49 Wash, 20 lks. wide, course S.10°E.
 39.00 Wash, 50 lks. wide, course S. Leave nearly level, and enter
 gently rolling land, sloping S.
 Ascend 11 ft. to
 39.99 Intersect the original cor. of secs. 1, 2, 35 and 36, which
 is a malpais stone 8x8x6 ins. above ground, firmly
 set, marked with 1 notch on E. edge and 5 notches on
 W. edge. No accessories. Reconstruct this cor. as
 follows:
 Alongside the stone, set an iron post, 3 ft. long, 2 ins.
 in diam., 24 ins. in the ground for cor. of secs. 1, 2, 35
 and 36, marked on brass cap,

T6N | R3E
 S35 | S36
 S 2 | S 1
 T5N
 1922

No trees suitable for bearing trees, within limits; raise
 a mound of stone 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
 Land, nearly level, except E. 1.00 chs. which is gently
 rolling.
 Soil, sandy and gravelly, 2nd rate.
 Timber, scattering palo verde and mesquite.
 Undergrowth, dense greasewood, scattering scrub palo
 verde and cactus.

S.89°48'E., on true line, bet. secs. 1 and 36 (W. $\frac{1}{4}$).
 Over gently rolling land, sloping S. thru. scattering under-
 growth.
 24.76 Road brs. NW and SE.
 40.16 Intersect the original $\frac{1}{4}$ sec. cor., which is a malpais stone,
 8x6x5 ins. above ground, firmly set, marked $\frac{1}{4}$ on N.
 face, and witnessed by remains of mound of earth N. of
 cor. No bearing trees.
 Reconstruct this cor., as follows:
 Alongside the stone, set an iron post 3 ft. long, 1 in.
 in diam., 24 ins. in the ground, for $\frac{1}{4}$ sec. cor. of
 secs. 1 and 36, marked on brass cap,

8. Resurvey of South bdy. of Township 6 North, Range 3 East.

Chains.

1/4 S 36
S 1
1922


5.99 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor: Thence, S. 89° 51' E., on true line, bet. secs. 1 and 36 (E. 1/2). Over gently rolling land, thru. scattering undergrowth. Descend 58 ft., over SE. slope.

16.50 Wash, 10 lks. wide, course SE.

29.99 Ascend 52 ft., over SE. slope. Old road, brs. NW and SE.

39.99 Wash, 10 lks. wide, course SE. Ascend 24 ft., over SW. slope, to Intersect the original cor. of Ts. 5 and 6 N., Rs. 3 and 4 E., which is a porphyry stone 10x8x5 ins. above ground, firmly set, marked with 6 notches on each of N., E. S. and W. edges, and witnessed by a mound of stone W. of cor.

No bearing trees. Reconstruct this cor. as follows: Alongside the stone, set an iron post 3 ft. long, 3 ins. in diam., 27 ins. in the ground for cor. of Ts. 5 and 6 N., Rs. 3 and 4 E., marked on brass cap.



Destroy the old mound of stone, W. of cor., and build new mound of stone, 4 ft. base, 3 ft. high, S. of cor.

Land, gently rolling.

Soil, gravelly, 2nd and 3rd rate.

Timber, none.

Undergrowth, scattering greasewood, scrub palo verde and mesquite, and cactus.

PROX 8578

Resurvey of East bdy. of Township 6 North, Range 3 East. 9

Chains.

This township boundary was surveyed in 1910, by R.C. Ham, U.S. Deputy Surveyor, and no retracement or resurvey is of record.

RETRACEMENT FOR RESURVEY.

- From the cor. of Ts. 5 and 6 N., Rs. 3 and 4 E., hereinbefore described,
- 39.86 North, on a random line, bet. secs. 31 and 36 ($S.\frac{1}{2}$).
Fall 38 lks. E. of the original $\frac{1}{4}$ sec. cor., hereinafter described.
True course and dist. of $S.\frac{1}{2}$ of line, bet. secs. 31 and 36 are therefore $N.0^{\circ}33'W.$, 39.86 chs.
Thence,
- 40.13 North, on a random line, bet. secs. 31 and 36 ($N.\frac{1}{2}$).
Fall 50 lks. W. of the original cor. of secs. 25, 30, 31 & 36, hereinafter described.
True course and dist. of $N.\frac{1}{2}$ of line, bet. secs. 31 and 36 are therefore $N.0^{\circ}43'E.$, 40.13 chs.
-
- 39.90 North, on a random line, bet. secs. 25 and 30 ($S.\frac{1}{2}$),
Fall 2 $\frac{1}{2}$ lks. E. of the original $\frac{1}{4}$ sec. cor., hereinafter described.
True course and dist. of $S.\frac{1}{2}$ of line, bet. secs. 25 and 30 are therefore $N.0^{\circ}2'W.$, 39.90 chs.
Thence,
- 40.00 North, on a random line, bet. secs. 25 and 30 ($N.\frac{1}{2}$).
Fall 12 lks. W. of the original cor. of secs. 19, 24, 25 and 30, hereinafter described.
True course and dist. of $N.\frac{1}{2}$ of line bet. secs. 25 and 30 are therefore $N.0^{\circ}10'E.$, 40.00 chs.
-
- 39.73 North, on a random line, bet. secs. 19 and 24 ($S.\frac{1}{2}$).
Fall 9 lks. W. of the original $\frac{1}{4}$ sec. cor., hereinafter described.
True course and dist. of $S.\frac{1}{2}$ of line, bet. secs. 19 and 24 are therefore $N.0^{\circ}8'E.$, 39.73 chs.
Thence,
- 40.25 North, on a random line, bet. secs. 19 and 24 ($N.\frac{1}{2}$).
Fall 10 lks. E. of the original cor. of secs. 13, 18, 19 and 24, hereinafter described.
True course and dist. of $N.\frac{1}{2}$ of line, bet. secs. 19 and 24, are therefore $N.0^{\circ}9'W.$, 40.25 chs.
-
- 40.11 North, on a random line, bet. secs. 13 and 18 ($S.\frac{1}{2}$).
Fall 6 lks. E. of the original $\frac{1}{4}$ sec. cor., hereinafter described.
True course and dist. of $S.\frac{1}{2}$ of line, bet. secs. 13 and 18 are therefore $N.0^{\circ}5'W.$, 40.11 chs.
Thence,
- 39.97 North, on a random line, bet. secs. 13 and 18 ($N.\frac{1}{2}$).
Fall 17 lks. E. of the original cor. of secs. 7, 12, 13 and 18, hereinafter described.
True course and dist. of $N.\frac{1}{2}$ of line, bet. secs. 13 and 18, are therefore $N.0^{\circ}15'W.$, 39.97 chs.
-
- 38.70 North, on a random line, bet. secs. 7 and 12 ($S.\frac{1}{2}$).
Fall 6 lks. W. of the witness cor. to the $\frac{1}{4}$ sec. cor., hereinafter described.
This W.C. is of record as being established at 1,30 chs. S. of the true point for $\frac{1}{4}$ sec. cor.; therefore, at

10 Resurvey of East bdy. of Township 6 North, Range 3 East.

- Chains. Retracement for Resurvey continued.
- 40.00 (38.70 + 1.30) Fall 6 lks. W. of the true point for $\frac{1}{4}$ sec. cor. of secs. 7 and 12.
True course and dist. of S. $\frac{1}{2}$ of line, bet. secs. 7 and 12 are therefore, N. 0° 5' E., 40.00 chs.
Thence,
North, on a random line, bet. secs. 7 and 12 (N. $\frac{1}{2}$).
- 40.03 Fall 7 lks. E. of the original cor. of secs. 1, 6, 7 and 12, hereinafter described.
True course and dist. of N. $\frac{1}{2}$ of line, bet. secs. 7 and 12, are therefore N. 0° 6' W., 40.03 chs.
-
- 39.90 North, on a random line, bet. secs. 1 and 6 (S. $\frac{1}{2}$).
Fall 4 lks. W. of the original $\frac{1}{4}$ sec. cor., hereinafter described.
True course and dist. of S. $\frac{1}{2}$ of line, bet. secs. 1 and 6 are therefore N. 0° 3' E., 39.90 chs.
Thence,
North, on a random line, bet. secs. 1 and 6 (N. $\frac{1}{2}$).
- 39.62 Intersect the original cor. of Ts. 6 and 7 N., Rs. 3 and 4 E., hereinafter described.
True course and dist. of N. $\frac{1}{2}$ of line, bet. secs. 1 and 6 are therefore, North, 39.62 chs.
The mean bearing of this Tp. bdy., as determined from the above described retracement is North.

RESURVEY.

- From the cor. of Ts. 5 and 6 N., Rs. 3 and 4 E., hereinbefore described,
N. 0° 33' W., on true line, bet. secs. 31 and 36 (S. $\frac{1}{2}$).
Over gently rolling land, thru. scattering undergrowth.
Ascend 92 ft., over SW. slope, to
- 15.00 Leave rolling, and enter mountainous land.
Ascend 237 ft., over SW. slope.
- 34.09 Point of spur, slopes NW.
Descend 28 ft., over N. slope.
- 38.41 Wash, 10 lks. wide, course N. 80° W.
Ascend 61 ft., over S. slope, to
- 39.86 Intersect the original $\frac{1}{4}$ sec. cor., which is a granite stone, 12x8x6 ins. above ground, firmly set, marked $\frac{1}{4}$ on W. face, and witnessed by a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
No bearing trees.
Reconstruct this cor. as follows:
Alongside the stone, set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground for $\frac{1}{4}$ sec. cor. of secs. 31 and 36, marked on brass cap,

$\frac{1}{4}$
 S36 | S31

1922


- Thence,
N. 0° 43' E., on true line, bet. secs. 31 and 36 (N. $\frac{1}{2}$).
Over mountainous land, thru. scattering undergrowth.
Ascend 56 ft., over S. slope.
- 4.32 Spur, slopes SW.
Descend 55 ft., over NW. slope.
- 13.90 Wash, 10 lks. wide, course SW.
Ascend 216 ft. over S. slope.
- 23.72 A mine shaft brs. W. 10 lks. dist.
- 26.70 Rocky spur, slopes S. 80° W.
Descend 350 ft., over NW. slope, to
- 40.13 Intersect the original cor. of secs. 25, 30, 31 and 36, which

Resurvey of East bdy. of Township 6 North, Range 3 East.

Chains.


is a granite stone 8x8x6 ins. above ground, firmly set, marked with 5 notches on N. edge, and 1 notch on S. edge, and witnessed by a mound of stone 2 ft. base, 1 1/2 ft. high, W. of cor., and two properly marked palo verde bearing trees, one each SE. and SW. of cor.

Reconstruct this cor. as follows: Alongside the stone, set an iron post, 3 ft. long, 2 ins. in diam., 6 ins. in the ground to bed rock, and raise a mound of stone 4 ft. base, 28 ins. high around post, for cor. of secs. 25, 30, 31 and 36, marked on brass cap.



Land, S. 15 chs., rolling; remainder, mountainous. Soil, rocky, 4th rate. Timber, none. Undergrowth, scattering greasewood, scrub palo verde and mesquite, and cactus.

- 8.13 N. 0° 2' W., on true line, bet. secs. 25 and 30 (S. 1/2). Over mountainous land, thru. scattering undergrowth. Descend 107 ft., over NW. slope.
- 9.92 Wash, 20 lks. wide, course S. 70° W.
- 20.00 Ascend 50 ft., over S. slope.
- 23.30 Old road, brs. E and W.
- 31.52 Point of spur, slopes SW.
- 34.75 Ascend 15 ft., over W. slope, to
- 39.90 Wash, 20 lks. wide, course SW. near head.
- Ascend 250 ft., over SW. slope, to
- Same spur, slopes SE.
- Ascend 26 ft., over E. slope.
- Ascend 70 ft., over S. slope, to
- Intersect the original 1/4 sec. cor., which is a granite stone 8x6x4 ins. above ground, firmly set, marked 1/4 on W. face, and witnessed by a mound of stone W. of cor. No bearing trees.
- Reconstruct this cor. as follows: Alongside the stone, set an iron post 3 ft. long, 1 in. in diam., 29 ins. in the ground for 1/4 sec. cor. of secs. 25 and 30, marked on brass cap.




- 1.68 Thence, N. 0° 10' E., on true line, bet. secs. 25 and 30 (N. 1/2). Over mountainous land, thru. scattering undergrowth. Ascend 18 ft., over S. slope.
- 11.15 Rocky ridge, bra. NW. and SE. Descend 192 ft., over NE. slope.
- 15.00 Wash, 10 lks. wide, course NW.
- 17.50 Ascend 11 ft., over SW. slope.
- 23.33 Point of spur, slopes SW.
- 36.08 Descend 47 ft., over NW. slope.
- 38.86 Bottom of gulch, 30 lks. wide, course SW.
- Ascend 85 ft., over SE. slope, to
- Wash, 10 lks. wide, course SE. near head.
- Ascend 349 ft., over SE. slope, to
- Bottom of gulch, 10 lks. wide, course SE. near head.
- Ascend 52 ft., over S. slope.
- Spur, slopes W.

12 Resurvey of East bdy. of Township 6 North, Range 3 East.

Chains.


40.00 Descend 30 ft., over N. slope, to
 Intersect the original cor. of secs. 19, 24, 25 and 30,
 which is a granite stone 8x6x6 ins. above ground,
 firmly set marked with 4 notches on N. edge, and 2
 notches on S. edge, and witnessed by a mound of stone 2
 ft. base, 1 ft. high, W. of cor. No bearing trees.
 Reconstruct this cor. as follows:
 Alongside the stone, set an iron post, 3 ft. long, 2 ins.
 in diam., 10 ins. in the ground to bed rock, deposit
 a stone, marked with a cross (x) at base of post, and
 raise a mound of stone 4 ft. base, 2 ft. high around
 post, for cor. of secs. 19, 24, 25 and 30, marked on brass
 cap,



1922

Land, mountainous.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, scattering scrub palo verde and mesquite,
 greasewood and cactus.

1.83 N.0°8'E., on true line, bet. secs. 19 and 24 (S. $\frac{1}{2}$).
 Over mountainous land, thru. scattering undergrowth.
 Descend 54 ft., over N. slope.
 Wash, 10 lks. wide, course NW.
 Ascend 28 ft., over SW. slope.
 6.04 Spur, slopes NW.
 Descend 241 ft., over NE. and N. slopes, to
 13.12 Head of wash, course NW.
 Descend 154 ft. over NW. slope, to
 26.86 Wash, 10 lks. wide, 6 ft. deep, course NW. Leave mountain-
 ous, and enter rolling land.
 Descend 52 ft., over NW. slope, to
 39.75 Intersect the original $\frac{1}{4}$ sec. cor., which is a malpais
 stone 5x3x2 ins. above ground, firmly set, marked $\frac{1}{4}$
 on W. face, and witnessed by a mound of stone 2 ft. base,
 1 $\frac{1}{2}$ ft. high, W. of cor. No bearing trees.
 Reconstruct this cor. as follows:
 Alongside the stone, set an iron post 3 ft. long, 1 in.
 in diam., 4 ins. in the ground to bed rock, deposit a
 stone marked with a cross (x) at base of post, and
 raise a mound of stone 4 ft. base, 2 $\frac{1}{2}$ ft. high around
 post, for $\frac{1}{4}$ sec. cor. of secs. 19 and 24, marked on
 brass cap,



1922

Thence,
 N.0°9'W., on true line, bet. secs. 19 and 24 (N. $\frac{1}{2}$).
 Over rolling land, thru. scattering undergrowth.
 Descend 85 ft., over NW. slope.
 18.85 Wash, 12 lks. wide, course NE.
 Ascend 50 ft., over SE. slope.
 31.02 Spur, slopes NE.
 Descend 69 ft., over N. slope.
 35.91 Wash, 15 lks. wide, course NE.
 Ascend 15 ft., over SE. slope, to
 40.25 Intersect the original cor. of secs. 13, 18, 19 and 24, which
 is a malpais stone 12x10x6 ins. above ground, firmly
 set, marked 6N. 4E on E. face, and 3 notches on each of

BOOK 3576

Re-survey of East bdy. of Township 6 North, Range 3 East, 13

Chains.

N. and S. edges, and witnessed by a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. and two properly marked palo verde bearing trees, one each NW. and SW. of cor.

Reconstruct this cor. as follows:

Alongside the stone set an iron post 3 ft. long, 2 ins. in diam., 10 ins. in the ground to bed rock, deposit a stone marked with a cross (x) at base of post, and raise a mound of stone 4 ft. base, 2 ft. high, around post, for cor. of secs, 13, 18, 19, and 24, marked on brass cap,

T6N	
R3E	R4E
S13	S18
S24	S19
1922	

Land, S. 27 chs., mountainous; N. 53 chs., rolling.

Soil, gravelly and rocky, 3rd and 4th rate.

Timber, none.

Undergrowth, scattering scrub palo verde and mesquite, greasewood and cactus.

N. $0^{\circ}5'W.$, on true line, bet. secs. 13 and 18 (S. $\frac{1}{2}$).

Over rolling land, thru. scattering undergrowth.

Ascend slightly over E. slope.

10.00 Descend 27 ft., over NE. slope.

14.68 Wash, 20 lks. wide, course NE.

Ascend 35 ft., over SE. slope, to

24.00 Pack trail, brs. E. and W.

Ascend 108 ft., over S. slope, to

40.11 Intersect the original $\frac{1}{4}$ sec. cor., which is a malpais boulder 6x6x4 ins. above ground, firmly set, marked $\frac{1}{4}$ on W. face, and witnessed by a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor., and one properly marked palo verde bearing tree NE. of cor.

Reconstruct this cor. as follows:

Alongside the stone, set an iron post 3 ft. long, 1 in. in diam., 60 ins. in the ground to bed rock, deposit a stone marked with a cross (x) at base of post, and raise a mound of stone 4 ft. base, $1\frac{1}{2}$ ft. high around post for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$	
S13	S18
1922	

Thence,

N. $0^{\circ}15'W.$, on true line, bet. secs. 13 and 18 (N. $\frac{1}{2}$).

Over rolling land, thru. scattering undergrowth.

Ascend 15 ft., over S. slope, to

2.00 Point of bench, from which ridge extends SW. Rim of bench extends NE. and E. from this point.

Descend 55 ft., over NW. slope.

9.25 Wash, 30 lks. wide, course SW.

Ascend 75 ft., over SE. slope, to

18.18 Rim of bench, brs. NE. and SW., thence over nearly level land on bench.

Ascend gradually over SE. slope, to

39.97 Intersect the original cor. of secs. 7, 12, 13 and 18, which is a malpais stone, 10x10x6 ins. above ground, firmly set, marked with two notches on N. edge and 4 notches on S. edge, and witnessed by a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

No bearing trees.

14 Resurvey of East bdy. of Township 6 North, Range 3 East.

Chains.

Reconstruct this cor. as follows:

Alongside the stone, set an iron post, 3 ft. long, 2 ins. in diam., 8 ins. in the ground to bed rock, deposit a stone, marked with a cross (x) at base of post, and raise a mound of stone 4 ft. base, 2 ft. high, around post for cor. of secs. 7, 12, 13 and 18, marked on brass cap,

T6N	
R3E	R4E
S12	S 7
S13	S18

1922

Land, S. 58½ chs., rolling; remainder, nearly level. Soil, gravelly and rocky, 3rd and 4th rate.

Timber, none.

Undergrowth, scattering greasewood, scrub palo verde and mesquite, and cactus.

N. 0° 05' E., on true line, bet. secs. 7 and 12 (S. ½).

Over nearly level land on bench sloping slightly to the SE., thru. scattering undergrowth.

38.70 Intersect the witness cor. to ¼ sec. cor., which is a malpais stone 8x8x6 ins. above ground, marked WC ¼ on W. face, and witnessed by a mound of stone 2 ft. base, 1½ ft. high, W. of cor. No bearing trees.

Reconstruct this cor. as follows:

Alongside the stone, set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground for witness cor. to the ¼ sec. cor. of secs. 7 and 12, marked on brass cap,

W C	
¼	
S12	S 7

1922

This witness cor. is at rim of bench, bearing NW, and SE. Leave nearly level land on bench, and enter rolling land. Descend 40 ft., over NE. slope, to

40.00 True point for ¼ sec. cor. of secs. 7 and 12 falls in wash, 30 lks. wide, course SE.

Thence,

N. 0° 06' W., on true line, bet. secs. 7 and 12 (N. ½).

Over rolling land, thru. scattering undergrowth.

2.14 Ascend slightly over SW. slope, to Same wash, 30 lks. wide, course SW.

17.00 Ascend 67 ft., over SW. slope, to Wash, 15 lks. wide, course SW.

25.00 Ascend 36 ft., over SE. slope, to

Leave rolling and enter mountainous land.

36.37 Ascend 163 ft., over SE. slope, to Spur, slopes SW.

40.03 Ascend 52 ft., over W. slope, to

Intersect the original cor. of secs. 1, 6, 7 and 12, which is a malpais boulder, 10x10x6 ins. above ground, firmly set, marked with 1 notch on N. edge and 5 notches on S. edge, and witnessed by a mound of stone 2 ft. base, 1½ ft. high, W. of cor., and two properly marked palo verde bearing trees, one each NE. and NW. of cor.

Reconstruct this cor. as follows:

Alongside the stone, set an iron post 3 ft. long, 2 ins. in diam., 27 ins. in the ground for cor. of secs. 1, 6, 7 and 12, marked on brass cap,

BOOK SET

Resurvey of East bdy. of Township 6 North, Range 3 East.

Chains.

T6N	
R3E	R4E
S 1	S 6
S12	S 7
1922	

Land, S. 38½ chs. nearly level; N. 15 chs. mountainous; remainder rolling.
 Soil, gravelly and rocky, 3rd and 4th rate.
 Timber, none.
 Undergrowth, scattering scrub mesquite and palo verde and greasewood.

15.85
 31.23
 39.50
 39.90

N. 0° 03' E., on true line, bet. secs. 1 and 6 (S. ½).
 Over mountainous land, thru. scattering undergrowth.
 Ascend 269 ft., over W. slope.
 Ascend 286 ft., over SE. slope.
 Ridge, brs. E. and W.
 Descend 252 ft., over N. slope.
 Bottom of gulch, 20 lks. wide, course S. 80° W.
 Ascend slightly over S. slope, to
 Intersect the original ¼ sec. cor., which is a cross (X) on malpais boulder 4x4x3 ft. above ground, marked ¼ W. of cross, and witnessed by a mound of stone 2 ft. base, 1½ ft. high, W. of cor.

No bearing trees.
 Reconstruct this cor. as follows:
 Alongside the boulder, set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bed rock, deposit a stone, marked with a cross (x) at base of post, and raise a mound of stone 4 ft. base, 22 ins. high around post for ¼ sec. cor. of secs. 1 and 6, marked on brass cap,

¼	
S 1	S 6
1922	

6.03
 8.48
 13.08
 21.00
 39.62

Thence,
 North, on true line, bet. secs. 1 and 6 (N. ½).
 Over mountainous land, thru. scattering undergrowth.
 Ascend 60 ft., over SE. slope.
 Spur, slopes SW.
 Descend 55 ft., over NW. slope, to
 Head of gulch, course NE.
 Descend 129 ft., over NE. slope, to
 Bottom of same gulch, 10 lks. wide, course NW.
 Descend 30 ft., over W. slope, to
 Point of spur, slopes NW.
 Descend 200 ft. over N. slope, to
 Intersect the original cor. of Ts. 6 and 7 N., Rs. 3 and 4 E., which is a malpais boulder 12x11x5 ins. above ground, firmly set, marked 7N on NE. face; 4E on SE. face, 6N on SW. face, and 3E on NW. face, and 6 notches on each of N., E., S. and W. edges, and witnessed by a mound of stone, 3 ft. base, 2 ft. high, S. of cor.

No bearing trees.
 Land, mountainous.
 Soil, gravelly and rocky, 3rd and 4th rate.
 Timber, none.
 Undergrowth, scattering greasewood, scrub palo verde and mesquite, and cactus.

16 Resurvey of West bdy. of Township 6 North, Range 3 East.

Chains.

This township boundary was surveyed by A.N. Oliver, U.S.D.S. in 1910, and no retracement or resurvey of any part of same is of record. The section and $\frac{1}{4}$ section cors. on the line were established common to areas on both sides. There being no subdivision lines tied to this range line, it is subject to rectification; therefore, an independent resurvey is made of same, reestablishing a set of cors. referring to T.6 N., R.3 E. only on a direct line bet. Tp. cors. and destroying all of the original sec. and $\frac{1}{4}$ sec. cors., as described in the following notes:

- From the reestablished cor. of Ts. 6 and 7 N., R. 3 E., hereinafter described,
S. $0^{\circ}4'W.$ (record course) on random line, bet. sec. 36, T. 7 N., R. 2 E. and sec. 6, T. 6 N., R. 3 E.
- 2.65 Intersect the reestablished cor. of Ts. 6 and 7 N., R. 2 E., hereinafter described.
True course and dist. of the range line bet. T. 6 N., R. 3 E. and T. 7 N., R. 2 E. are therefore N. $0^{\circ}4'E.$, 2.65 chs.
Thence,
South, (record course) on random line bet. Ts. 6 N., Rs. 2 and 3 E.
- 479.69 Fall 56 lks. E. of the original cor. of Ts. 5 and 6 N., Rs. 2 and 3 E., hereinbefore described.
True course and dist. of the E. bdy. of T. 6 N., R. 2 E. are therefore N. $0^{\circ}4'E.$, 479.69 chs.
The true course of the W. bdy. of Ts. 6 N., R. 3 E. is therefore N. $0^{\circ}4'E.$, and the distance is 479.69 chs. + 2.65 chs. = 482.34 chs.
From the original cor. of Ts. 5 and 6 N., Rs. 2 and 3 E. N. $0^{\circ}4'E.$ on true line on W. bdy. of sec. 31.
Over rolling land, thru. scattering timber and dense undergrowth.
- 35.30 Descend 167 ft. over NE. slope.
Wash, 10 lks. wide, course W. Leave rolling, and enter nearly level land, sloping slightly to the W.
- 39.95 A point 7 lks. W. of the original $\frac{1}{4}$ sec. cor. of secs. 31 and 36, which is a malpais stone 5x5x4 ins. above ground, firmly set, marked $\frac{1}{4}$ on W. face, and witnessed by two properly marked bearing trees, one each SE. and SW, of stone.
- 42.51 Obliterate marks on stone and bearing trees.
(40.00 chs. S. $0^{\circ}4'W.$ from cor. of secs. 30 and 31)
Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in the ground to bed rock, supported by a mound of stone, for reestablished $\frac{1}{4}$ sec. cor. of sec. 31 only, marked on brass cap,
- $\frac{1}{4}$
 S31
 1922
- from which,
A palo verde, 6 ins. in diam., brs. N. $65^{\circ}E.$, 64 lks. dist., marked $\frac{1}{4}$ S 31 BT.
A palo verde, 4 ins. in diam., brs. S. $57^{\circ}E.$, 186 lks. dist., marked $\frac{1}{4}$ B T.
- 79.93 A point 8 lks. W. of the original cor. of secs. 25, 30, 31 and 36, which is a malpais stone 6x6x7 ins. above ground, firmly set, marked with 5 notches on N. edge, and 1 notch on S. edge, witnessed by a mound of stone, W. of cor., and two properly marked bearing trees, one each NE. and NW. of cor. Obliterate marks on stone and bearing trees.
- 82.51 Point of intersection of the Sectional Correction line surveyed due west thru. T. 6 N., R. 3 E., as hereinafter described. Establish sec. cor. at this point as follows:
Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for reestablished cor. of secs. 30 and 31

Resurvey of West bdy. of Township 6 North, Range 3 East. 17

Chains.

only, marked on brass cap,

	T6N
T6N	R3E
R2E	S30
S25	S31
1922	

from which,

A palo verde, 12 ins. in diam., brs. N. 36 3/4° E., 194 lks. dist., marked T6N R3E S30 BT.

A palo verde, 10 ins. in diam., brs. S. 46 1/4° E., 235 lks. dist., marked T6N R3E S31 BT.

Land, S. 35 1/2 chs., rolling; remainder, nearly level.

Soil, sandy, gravelly and rocky, 2nd and 3rd rate.

Timber, scattering palo verde and mesquite.

Undergrowth, dense greasewood and cactus.

N. 0° 4' E., on true line on W. bdy. of sec. 30.

Over nearly level land, sloping slightly to the W., thru scattering timber and dense undergrowth.

37.44 A point 9 lks. W. of the original 1/4 sec. cor. of secs. 25 and 30, which is a malpais stone 8x8x6 ins. above ground, firmly set, marked 1/4 on W. face, and witnessed by 2 properly marked bearing trees, one each NE. and NW. of cor. Obliterate marking on stone and bearing trees.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 27 ins. in the ground for reestablished 1/4 sec. cor. of sec. 30 only, marked on brass cap,

	1/4 S 30
--	----------

1922

from which,

A palo verde, 10 ins. in diam., brs. N. 16° E., 142 lks. dist., marked 1/4 S 30 BT.

A palo verde, 10 ins. in diam., brs. S. 65 1/4° E., 186 lks. dist., marked 1/4 S 30 BT.

41.94 Wash, 50 lks. wide, 20 ft. deep, course SW. Descend gradually over SW. slope.

50.54 Wash, 20 lks. wide, 4 ft. deep, course SW.

57.44 Dry bed of Skunk Creek, 40 lks. wide, course SW. Ascend gradually over SW. slope.

77.45 A point 10 lks. W. of the original cor. of secs. 19, 24, 25 and 30, which is a malpais stone 8x6x6 ins. above ground, firmly set, marked with 4 notches on N. edge and 2 notches on S. edge, and witnessed by a mound of stone, W. of cor. No bearing trees.

80.00 Obliterate marks on stone, and destroy the mound of stone. Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 19 and 30 only, marked on brass cap,

	T6N
T6N	R3E
R2E	S19
S24	S30
1922	

from which,

A palo verde, 10 ins. in diam., brs. N. 76 1/2° E., 181 lks. dist., marked T6N R3E S19 BT.

A palo verde, 4 ins. in diam., brs. S. 85 1/2° E., 306 lks. dist., marked BT.

Land, nearly level.

Soil, gravelly and rocky, 3rd rate.

Timber, scattering mesquite and palo verde.

Undergrowth, dense greasewood and cacti.

18 Resurvey of West bdy. of Township 6 North, Range 3 East
Chains.

N.0°4'E., on true line on W. bdy. of sec.19.
Over nearly level land, thru. scattering timber and dense undergrowth.

37.49 Ascend gradually over SW. slope.
A point 6 lks.W. of the original 1/4 sec.cor. of secs.19 and 24, which is a malpais stone 6x6x4 ins. above ground, firmly set, marked 1/4 on W.face, and witnessed by two properly marked bearing trees, one each NE. and SW. of cor. Obliterate marking on the stone and bearing trees.

40.00 Set an iron post 3 ft.long, 1 in. in diam., 27 ins.in the ground for reestablished 1/4 sec.cor. of sec.19 only, marked on brass cap,

1/4 S19
1922

from which,
A palo verde, 10 ins. in diam., brs.N.82°E., 412 lks.dist., marked 1/4 S19 BT.
A mesquite, 8 ins. in diam., brs.S.39 3/4°E., 157 lks.dist., marked 1/4 S19 BT.

60.00 Leave nearly level and enter rolling land.
Ascend 75 ft., over SW. slope to sec.cor.
77.52 A point 8 lks.W. of the original cor. of secs.13, 18, 19 and 24, which is a malpais stone, 8x6x6 ins. above ground, firmly set, marked with 3 notches on each of N. and S. edges, and witnessed by four properly marked bearing trees, one each NE., SE., SW., and NW. of cor.

Obliterate marking on stone and trees.
80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 24 ins.in the ground, for reestablished cor. of secs.18 and 19, only, marked on brass cap,

T6N
T6N | R3E
R2E | S18
S13 | S19
1922

from which,
An ironwood, 10 ins. in diam., brs.N.14 1/2°E., 294 lks.dist., marked T6N, R3E S18 BT.
An ironwood, 8 ins. in diam., brs.S.33 1/2°E., 239 lks.dist., marked T6N R3E S19 BT.

Land, S.60 chs., nearly level; remainder, rolling.
Soil, gravelly and rocky, 2nd and 3rd rate.
Timber, scattering palo verde, mesquite and ironwood.
Undergrowth, dense greasewood and cactus.

N.0°04'E., on true line on W. bdy. of sec.18.
Over rolling land, thru. scattering timber and dense undergrowth.

32.50 Ascend 112 ft., over SW. slope, to Wash, 40 lks.wide, course SW.

37.51 Ascend 30 ft., over SW. slope to 1/4 sec.cor. of sec.18.
A point 2 lks.W. of the original 1/4 sec.cor. of secs.13 and 18, which is a malpais stone 7x5x5 ins. above ground, firmly set, marked 1/4 on W.face, and witnessed by two properly marked bearing trees, one each NE. and SW. of cor.

Obliterate marking on stone and trees.
40.00 Set an iron post, 3 ft.long, 1 in. in diam., 18 ins.in the ground to bed rock, supported by a mound of stone for reestablished 1/4 sec.cor. of sec.18 only, marked on brass cap,

8876

Resurvey of West bdy. of Township 6-North, Range 3 East. 19

Chains.

1/4 S 18

1922

- from which,
 - An ironwood, 6 ins. in diam., brs. N. 10 1/2° E., 162 lks. dist., marked 1/4 S 18 BT.
 - A palo verde, 10 ins. in diam., brs. S. 61 1/4° E., 187 lks. dist., marked 1/4 S 18 BT.
- Ascend 137 ft., over SW. slope.
- 72.46 Spur, slopes SE.
- Descend 55 ft., over NE. slope.
- 77.50 A point 5 lks. E. of the original cor. of secs. 7, 12, 13 and 18, which is a granite stone 12x8x8 ins. above ground firmly set, marked with 2 notches on N. edge, and 4 notches on S. edge, and witnessed by four properly marked bearing trees, one each NE., SE., SW. and NW. of cor.
- Obliterate marking on stone and trees.
- 79.25 Wash, 10 lks. wide, course SE.
- Ascend slightly over S. slope, to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 7 and 18, only, marked on brass cap,

	T6N
T6N	R3E
R2E	S 7
S12	S18

1922

- from which,
 - An ironwood, 6 ins. in diam., brs. N. 83 1/4° E., 216 lks. dist., marked T6N R3E S7 BT.
 - A palo verde, 8 ins. in diam., brs. S. 79 1/4° E., 81 lks. dist., marked T6N R3E S18 BT.
 - Land, rolling.
 - Soil, gravelly and rocky, 3rd rate.
 - Timber, scattering palo verde, mesquite and ironwood.
 - Undergrowth, dense greasewood and cactus.
-
- N. 0° 04' E., on true line, on W. bdy. of sec. 7.
 - Over rolling land, thru. scattering timber and dense undergrowth.
 - Ascend 80 ft. over S. slope, to
 - 7.50 Leave rolling and enter mountainous land.
 - Ascend 80 ft., over SW. slope, to
 - 12.31 Spur, slopes SE.
 - Ascend 57 ft., over E. slope.
 - 17.50 Ascend 200 ft. over S. slope, to
 - 23.35 Spur, slopes SE.
 - Ascend 34 ft., over E. slope.
 - 29.00 Ascend 44 ft., over SE. slope, to
 - 31.10 Descend 46 ft., over NE. slope.
 - 34.82 Bottom of gulch, 10 lks. wide, course NE.
 - Ascend 200 ft., over SE. slope to 1/4 sec. cor. of sec. 7.
 - 36.88 A point 6 lks. E. of the original 1/4 sec. cor. of secs. 7 and 12, which is a granite 12x10x6 ins. above ground, firmly set, marked 1/4 on W. face, and witnessed by a mound of stone W. of cor. No bearing trees. Obliterate marks on the stone and destroy the mound of stone.
 - 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bed rock, deposit a stone marked with a cross (x) at base of post, and raise a mound of stone 4 ft. base, 20 ins. high around post for reestablished 1/4 sec. cor. of sec. 7 only, marked on brass cap,

20 Resurvey of West bdy. of Township 6 North, Range 3 East.

Chains.

1/2 S 7

1922

No trees suitable for bearing trees within limits.

- 46.63 Ascend 220 ft., over S. slope.
- Ridge, brs. N. 70° W. and S. 60° E. near SE. edge of same.
- 53.80 Descend 227 ft., over NE. slope.
- Bottom of gulch, 10 lks. wide, course S. 80° E.
- 56.78 Ascend 57 ft., over S. slope.
- Spur, slopes SE.
- 58.85 Descend 50 ft., over NE. slope.
- Bottom of gulch, 20 lks. wide, course SE.
- 63.58 Ascend 275 ft., over SW. slope.
- Spur, slopes SE.
- 71.00 Descend 127 ft., over NE. slope.
- Bottom of gulch, 12 lks. wide, course SE.
- 76.33 Ascend 166 ft., over S. slope to cor. of secs. 6 and 7.
- A point 14 lks. E. of the original cor. of secs. 1, 6, 7 and 12, which is a granite boulder in place 2x3x3 ft. above ground, marked with a cross (x) at exact cor. point, with 3 grooves N., and 5 grooves S. of cross, and witnessed by a mound of stone, W. of cor. No bearing trees. Obliterate marking on the boulder, and destroy the mound of stone.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bed rock, deposit a stone marked with a cross (x) at base of post, and raise a mound of stone around post, for reestablished cor. of secs. 6 and 7, only, marked on brass cap,

T6N T6N
 R2E R3E
 S 1 S 6
 S 7
 1922

No trees suitable for bearing trees within limits.

Land, S. 7 1/2 chs., rolling; remainder, mountainous.
 Soil, rocky, 3rd and 4th rate.
 Timber, scattering palo verde, mesquite and ironwood.
 Undergrowth, dense greasewood and cactus.

N. 0° 4' E., on true line, on W. bdy. of sec. 6:
 Over mountainous land, thru. scattering timber and dense undergrowth.

- 1.24 Ascend 15 ft., over S. slope:
- Spur, slopes SE.
- 6.78 Ascend 68 ft. over E. and SE. slopes, to
- Spur, slopes NE.
- 11.73 Descend 46 ft., over NW. slope.
- Head of gulch, course NE.
- 13.53 Ascend 10 ft., over SE. slope.
- Spur, slopes NE.
- 24.30 Descend 273 ft., over N. slope, to
- 29.33 Descend 17 ft., over W. slope, to
- Spur, slopes NW.
- 36.23 Descend 89 ft., over NE. slope.
- A point 5 lks. E. of the original 1/4 sec. cor. of secs. 1 and 6, which is a malpais stone 8x6x2 ins. above ground, firmly set, marked 1/4 on W. face, and witnessed by a mound of stone W. of cor. No bearing trees. Obliterate marking on stone, and destroy the mound of stone.
- 39.57 Head of gulch, course NE.
- 40.00 Descend slightly over E. slope, to
- Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bed rock, deposit a stone, marked with a cross (x) at base of post, supported by a mound of stone, for reestablished 1/4 sec. cor. of sec. 6, marked on

Resurvey of West bdy. of Township 6 North, Range 3 East.

Chains.

brass cap,

18 6

1922

- No trees suitable for bearing trees within limits.
- Descend 63 ft., over E. slope, to
- 46.28 Spur, slopes NE.
- Descend 266 ft., over NW. slope.
- 57.40 Bottom of gulch, 15 lks. wide, course NE.
- Ascend 31 ft., over SE. slope.
- 60.83 Spur, slopes NE.
- Descend 64 ft., over NW. slope.
- 64.38 Head of gulch, course NE.
- Ascend 12 ft. over SE. slope.
- 65.73 Point of spur, slopes NE.
- Descend 30 ft., over NE. slope.
- 69.13 Bottom of gully, 10 lks. wide, course NE.
- Ascend 21 ft., over SE. slope.
- 73.75 Point of spur, slopes NE.
- Descend 30 ft., over NE. slope, to
- 77.18 Intersect the reestablished cor. of Ts. 6 and 7 N., Rs. 2 E., which is an iron post, 3 ins. in diam., projecting 18 ins. above ground, firmly set in ground and mound of stone, properly marked on brass cap, and witnessed by a mound of stone, W. of cor. No bearing trees.
- Descend 23 ft. over NE. slope, to
- 79.83 Intersect the reestablished cor. of Ts. 6 and 7 N., R. 3 E., which is an iron post, 3 ins. in diam., projecting 26 ins. above ground, firmly set in ground and mound of stone, properly marked on brass cap, and witnessed by a mound of stone, E. of cor.
- No bearing trees.
- Land, mountainous.
- Soil, rocky; 4th rate.
- Timber, scattering mesquite and palo verde.
- Undergrowth, dense greasewood and cactus.



22. Retracement of North bdy. of Township 6 North, Range 3 East.

Chains.

- This township boundary was surveyed by G.F. Rigby, U.S.S. in 1916, and no retracement or resurvey of any part of same is of record. The following notes describe a retracement of the entire line.
- From the original cor. of Ts. 6 and 7 N., Rs. 3 and 4 E., hereinbefore described,
- West, on a random line, bet. secs. 1 and 36 (E. $\frac{1}{2}$).
Over mountainous land, thru. scattering undergrowth.
Descend 168 ft., over N. and NW. slopes, to
14.66 Wash, 70 lks. wide, course NW. Leave mountainous, and enter rolling land.
- Ascend 60 ft., over N. slope, to
40.08 Fall 7 lks. S. of the original $\frac{1}{4}$ sec. cor., which is an iron post, 1 in. in diam., projecting 10 ins. above ground, firmly set, properly marked on brass cap, and witnessed by a mound of stone, N. of cor.
No bearing trees.
True course and dist. of E. $\frac{1}{2}$ of line, bet. secs. 1 and 36 are therefore N. 89° 54' W., 40.08 chs.
Thence,
- West, on a random line, bet. secs. 1 and 36 (W. $\frac{1}{2}$).
Over rolling land, thru. scattering undergrowth.
Ascend 47 ft., over NE. slope.
10.37 Spur, slopes NW.
Descend 90 ft., over W. slope.
20.06 Wash, 10 lks. wide, course NW.
Descend gradually, over NW. slope, to
29.54 Wash, 10 lks. wide, course NW.
Ascend 49 ft., over NE. slope.
37.37 Thence over N. slope, descending slightly to
40.02 Fall 7 lks. S. of the original cor. of secs. 1, 2, 35 and 36, which is an iron post, 2 ins. in diam., projecting 18 ins. above ground, firmly set in ground and mound of stone, properly marked on brass cap, and witnessed by a mound of stone, W. of cor.
No bearing trees.
True course and dist. of W. $\frac{1}{2}$ of line, bet. secs. 1 and 36 are therefore N. 89° 54' W., 40.02 chs.
Land, E. 14 $\frac{1}{2}$ chs., mountainous; remainder rolling.
Soil, gravelly and rocky, 3rd and 4th rate.
Timber, none.
Undergrowth, scattering scrub palo verde and mesquite, greasewood and cactus.
-
- West, on random line, bet. secs. 2 and 35 (E. $\frac{1}{2}$).
Over rolling land, thru. scattering undergrowth.
Descend 65 ft., over NW. slope.
4.36 Wash, 10 lks. wide, course NW.
Ascend 30 ft., over rolling N. and NE. slopes, to
39.92 Fall 4 lks. S. of the original $\frac{1}{4}$ sec. cor., which is an iron post, 1 in. in diam., projecting 24 ins. above ground, firmly set in ground and mound of stone, properly marked on brass cap, and witnessed by a mound of stone, N. of cor. No bearing trees.
True course and dist. of E. $\frac{1}{2}$ of line, bet. secs. 2 and 35 are therefore N. 89° 57' W., 39.92 chs.
Thence,
- West, on a random line, bet. secs. 2 and 35 (W. $\frac{1}{2}$).
Over rolling land, thru. scattering undergrowth.
Descend 25 ft., over N. slope.
.43 Fence, brs. N. and S.
6.60 Spur, slopes NW.
Descend 75 ft., over W. slope.
21.55 Ascend 20 ft., over NE. slope.
24.43 Spur, slopes N.
Descend 63 ft., over W. slope to sec. cor.
30.63 Fence, brs. N. and S.

Retracement of North bdy. of Township 6 North, Range 3 East. 23

Chains.

40.00 Fall 6 lks. S. of the original cor. of secs. 2, 3, 34 and 35, which is an iron post 2 ins. in diam., projecting 20 ins. above ground, firmly set in ground, and mound of stone, properly marked on brass cap, and witnessed by a mound of stone, W. of cor.
 No bearing trees.
 True course and distance of W. $\frac{1}{2}$ of line, bet. secs. 2 and 35 are therefore N. 89° 55' W., 40.00 chs.
 Land, rolling.
 Soil, rocky, 3rd rate.
 Timber, none.
 Undergrowth, scattering scrub palo verde and catclaw, greasewood and cactus.

 West, on a random line, bet. secs. 3 and 34 (E. $\frac{1}{2}$).
 Over rolling land, thru. scattering undergrowth.
 22.72 Old road, brs. NE. and SW.
 33.72 Wash, 10 lks. wide, course SW. near head.
 Ascend 16 ft., over SE. slope, to
 35.71 Rim of bench, brs. NE. and SW. Leave rolling, and enter nearly level land on bench.
 39.95 Intersect the original $\frac{1}{4}$ sec. cor. of secs. 3 and 34, which is an iron post, 1 in. in diam., projecting 10 ins. above ground, firmly set, properly marked on brass cap, and witnessed by 2 properly marked bearing trees, one each NW. and SE. of cor.
 True course and dist. of E. $\frac{1}{2}$ of line bet. secs. 3 and 34 are therefore West 39.95 chs.
 Thence on random line, bet. secs. 3 and 34 (W. $\frac{1}{2}$).
 Over nearly level land, thru. scattering undergrowth on bench.
 Descend gradually over SW. slope.
 20.00 Rim of bench, brs. NE. and SW. Leave nearly level, and enter rolling land.
 Descend 15 ft., over NW. slope, to
 23.00 Wash, 20 lks. wide, course SW.
 Descend 30 ft., over SW. slope, to
 33.00 Center of dry bed of Skunk Creek, 1 ch. wide, course SW.
 Descend 20 ft., over SW. slope, to
 39.95 Intersect the original cor. of secs. 3, 4, 33 and 34, which is an iron post, 2 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by a mound of stone, W. of cor. and 3 properly marked bearing trees, one each NE., SE. and SW. of cor.
 True course and dist. of W. $\frac{1}{2}$ of line, bet. secs. 3 and 34 are therefore West, 39.95 chs.
 Land, rolling, and nearly level.
 Soil, rocky, 3rd rate.
 Timber, none.
 Undergrowth, scattering scrub palo verde and mesquite, cactus and catclaw.

 West, on a random line, bet. secs. 4 and 33 (E. $\frac{1}{2}$).
 Over rolling land, thru. very scattering timber and dense undergrowth.
 Descend 15 ft., over SW. slope.
 2.90 Dry bed of Skunk Creek, 1 ch. wide, course NW.
 Ascend 20 ft., over NE. slope.
 7.20 Point of spur, slopes NW.
 Descend 70 ft., over NW. and W. slopes.
 31.17 Center of dry bed of Skunk Creek, 5.00 chs. wide, course SW.
 Ascend 20 ft., over SE. slope, to
 40.00 Intersect the original $\frac{1}{4}$ sec. cor. of secs. 4 and 33, which is an iron post, 1 in. in diam., projecting 22 ins.

24 Retracement of North bdy. of Township 6 North, Range 3 East.


Chains.

- above ground, firmly set in ground and mound of stone, properly marked on brass cap, and witnessed by a mound of stone, N. of cor., and 2 properly marked bearing trees, one each NE. and SE. of cor.
True course and dist. of E. $\frac{1}{2}$ of line, bet. secs. 4 and 33, are therefore West 40.00 chs.
Thence,
West, on a random line, bet. secs. 4 and 33 (W. $\frac{1}{2}$).
Over rolling land, thru. very scattering timber and dense undergrowth.
Ascend 35 ft., over SE. slope.
- 15.00 Point of spur, slopes SE.
Descend 45 ft., over SW. slope.
- 22.00 Wash, 20 lks. wide, course SW. near head.
Ascend 50 ft., over E. slope, to
- 35.00 Rim of bench, brs. N. and S. Leave rolling, and enter nearly level land on bench.
- 39.98 Fall 2 lks. N. of the original cor. of secs. 4, 5, 32 and 33, which is an iron post, 2 ins. in diam., projecting 21 ins. above ground, firmly set in ground and mound of stone properly marked on brass cap, and witnessed by a mound of stone W. of cor. No bearing trees.
True course and dist. of W. $\frac{1}{2}$ of line, bet. secs. 4 and 33 are therefore S. 89° 58' W., 40.00 chs.
Land, E. 75 chs. rolling; W. 5 chs., nearly level.
Soil, rocky, 3rd rate.
Timber, very scattering palo verde and mesquite.
Undergrowth, dense scrub palo verde and mesquite, and cactus.
-
- West, on a random line, bet. secs. 5 and 32, (E. $\frac{1}{2}$).
Over nearly level land, thru. dense undergrowth on bench.
- 25.00 Rim of bench, brs. N. and S. Leave nearly level and enter rolling land.
Descend 95 ft., over W. slope.
- 34.00 Wash, 1 ch. wide, course SW.
Ascend 35 ft., over SE. slope, to
- 39.97 Fall 6 lks. N. of the original $\frac{1}{4}$ sec. cor. of secs. 5 and 32, which is an iron post, 1 in. in diam., projecting 21 ins. above ground, firmly set in ground and mound of stone, properly marked on brass cap, and witnessed by a mound of stone, N. of cor. No bearing trees.
True course and dist. of E. $\frac{1}{2}$ of line bet. secs. 5 and 32 are therefore S. 89° 55' W., 39.97 chs.
Thence,
West, on a random line, bet. secs. 5 and 32 (W. $\frac{1}{2}$).
Over rolling land, thru. dense undergrowth.
Ascend 30 ft., over SE. slope.
- 4.80 Spur, slopes SW.
Descend 90 ft., over W. slope.
- 25.60 Old road, brs. NE. and SW.
- 30.00 Dry bed of Cottonwood Creek, 1 ch. wide, course SE.
Ascend 25 ft., over SE. slope, to
- 39.98 Fall 3 lks. S. of the original cor. of secs. 5, 6, 31 and 32, which is an iron post, 2 ins. in diam., 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by a mound of stone, W. of cor.
No bearing trees
True course and distance of W. $\frac{1}{2}$ of line, bet. secs. 5 and 32 are therefore N. 89° 57' W., 39.98 chs.
Land, E. 25 chs., nearly level; remainder, rolling.
Soil, rocky, 3rd rate.
Timber, none.
Undergrowth, dense scrub palo verde and mesquite and cactus.
-

3076

Retracement of North bdy. of Township 6 North, Range 3 East. 25
Chains.

West, on a random line, bet. secs. 6 and 31 (E. $\frac{1}{2}$).
 Over rolling land, thru. dense undergrowth.
 Ascend 47 ft., over SE. slope, to
 20.25 Wash, 20 lks. wide, course SE.
 Ascend 20 ft., over SE. slope, to
 27.00 Wash, 10 lks. wide, course SE.
 Ascend 71 ft., over NE. slope, to
 39.98 Fall 3 lks. S. of the original $\frac{1}{4}$ sec. cor. of secs. 6 and
 31, which is an iron post, 1 in. in diam., projecting
 10 ins. above ground, firmly set, properly marked
 on brass cap, and witnessed by a mound of stone N. of
 cor. No bearing trees.
 True course and distance of the E. $\frac{1}{2}$ of line, bet. secs. 6
 and 31 are therefore N. 89° 57' W., 39.98 chs.
 Thence,
 West, on a random line, bet. secs. 6 and 31 (W. $\frac{1}{2}$).
 Over rolling land, thru. dense undergrowth.
 Ascend 53 ft., over NE. slope, to
 18.50 Spur, slopes NW.
 Descend 15 ft., over W. slope.
 24.00 Ascend 30 ft., over NE. slope.
 35.45 Spur, slopes NW.
 Descend 30 ft., over W. slope.
 39.95 Wash, 10 lks. wide, course NW.
 Ascend 5 ft., over NE. slope, to
 40.45 Intersect the reestablished cor. of Ts. 6 and 7 N., R. 3
 E., hereinbefore described.
 True course and dist. of the W. $\frac{1}{2}$ of line bet. secs. 6 and
 31 are therefore West 40.45 chs.
 Land, rolling.
 Soil, rocky, 3rd rate.
 Timber, none.
 Undergrowth, dense scrub palo verde, mesquite and cactus.

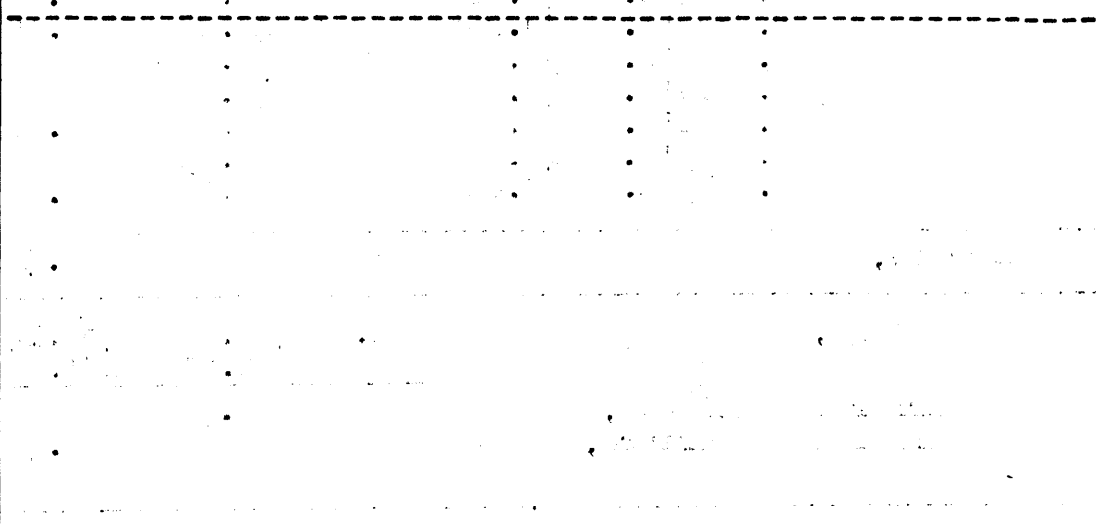

Boundaries of Township 6 North, Range 3 East.
Latitudes, departures and closing errors.

Line designated.	True bearing.	Dist.	Latitudes.		Departures.	
			N.	S.	E.	W.
South boundary,	N. 89° 51' W.	39.99	.10			39.99
	N. 89° 48' W.	40.16	.14			40.16
	N. 89° 56' W.	39.99	.05			39.99
	N. 89° 55' W.	40.22	.06			40.22
	N. 89° 59' W.	80.17	.02			80.17
	S. 89° 46' W.	80.40			.33	80.40
	S. 89° 24' W.	80.34			.84	80.34
	S. 89° 43' W.	40.08			.20	40.08
	S. 87° 08' W.	39.56			2.00	39.51
West boundary,	N. 0° 04' E.	482.34	482.34		.56	
North boundary,	East,	40.45			40.45	
	S. 89° 57' E.	79.96		.07	79.96	
	N. 89° 55' E.	39.98	.06		39.98	
	N. 89° 58' E.	39.98	.02		39.98	
	East,	119.90			119.90	
	S. 89° 55' E.	40.00		.06	40.00	
	S. 89° 57' E.	39.92		.03	39.92	
S. 89° 54' E.	80.10		.14	80.10		
East boundary,	South,	39.62		39.62		
	S. 0° 03' W.	39.90		39.90		.03
	S. 0° 06' E.	40.03		40.03	.07	
	S. 0° 05' W.	40.00		40.00		.06
	S. 0° 15' E.	39.97		39.97	.17	
	S. 0° 05' E.	40.11		40.11	.06	
	S. 0° 09' E.	40.25		40.25	.10	
	S. 0° 08' W.	39.75		39.75		.09
	S. 0° 10' W.	40.00		40.00		.12
	S. 0° 02' E.	39.90		39.90	.02	
	S. 0° 43' W.	40.13		40.13		.50
S. 0° 33' E.	39.86		39.86	.38		
Convergency,				.49		
Totals.			482.79	483.19	482.14	481.66
				482.79	481.66	
Error in latitude,			0.40			
Error in departure,					0.48	

Survey of Subdivision lines of Township 6 North, Range 3 East. 27
Chains.

The south boundary of this township being defective in alignment, a sectional correction line is surveyed west on a true latitudinal curve from the cor. of secs. 25, 30, 31 and 36 on E. bdy. of Tp. to an intersection with the west boundary of township, where the cor. of secs. 30 and 31 is reestablished, as hereinafter described.

The first meridional sec. line is surveyed parallel to the mean bearing of the E. bdy. of the Tp., making proper allowance for convergency, and bet. secs. 1 and 2, survey random line northerly, and true line southerly. All other meridional lines were alined in the regular manner to an intersection with the sectional correction line, and then run on computed courses to their respective objective corners on the N. bdy. of the Tp. for the first four miles and the last mile run random and true. This method was employed to avoid closing corners on the north boundary.

Corners on the meridional sec. lines are established at intervals of 40.00 chs. northerly from the sectional correction line, placing fractional measurement against the north boundary of the Tp., and the 1/4 sec. cors. of the south tier of secs. are established at 40.00 chs. southerly from the sectional correction line, placing fractional measurement against the south bdy. of the Tp.

Fractional measurement of the latitudinal sec. lines in the West range of secs. is placed against the W. bdy. of the Tp.

From the cor. of secs. 1, 2, 35 and 36 on S. bdy. of the Tp. hereinbefore described,

N. 0° 01' W., bet. secs. 35 and 36.

Over gently rolling land, thru scattering undergrowth.

Ascend slightly over SW. slope,

2.70

Old road, brs. E and W.

3.10

Wash, 30 lks. wide, course SW.

Ascend 70 ft., over S. slope.

35.20

Old road, brs. E. and W.

37.00

Spur, slopes SW.

Descend 10 ft., over NW. slope, to

39.72

(40.00 chs. southing from cor. of secs. 25, 26, 35 and 36)

Set an iron post, 3 ft. long, 1 in. in diam,

20 ins. in the ground to bed rock, deposit a

stone marked with a cross (x) at base of post, and

raise a mound of stone around post for 1/4 sec. cor., marked

on brass cap,

1/4
S35 | S36

1922

from which,

Stack of old mill, brs. N. 25° 40' E.

Descend slightly over NW. slope.

42.00

Ascend 35 ft., over S. slope.

49.88

Old road, brs. NE. and SW.

50.60

Spur, slopes SW.

Descend 18 ft., over NW. slope.

54.57

Wash, 10 lks. wide, course SW. Leave rolling, and enter

mountainous land.

Ascend 40 ft., over S. slope.

56.27

Old ore bins on line.

57.56

Spur, slopes SW.

Descend 37 ft., over NW. slope.

65.52

Wash, 10 lks. wide, course SW.

28. Subdivision lines of Township 6 North, Range 3 East.

Chains.

- 67.55 Ascend 46 ft. over S. slope.
Point of spur, slopes SW.
Ascend 37 ft., over W. slope.
- 71.50 Ascend 84 ft., over S. slope.
- 75.20 Ridge, brs. E. and W.
- 79.72 Descend 62 ft., over NW. slope, to
Intersect the sectional correction line at a point 80.22
chs. West of the cor. of secs. 25, 30, 31 and 36 on E.
bdy. of Tp.
At point of intersection, set an iron post, 3 ft. long, 2
ins. in diam., 12 ins. in the ground to bed rock,
deposit a stone marked with a cross (x) at base of
post, and raise a mound of stone around post, for
cor. of secs. 25, 26, 35 and 36, marked on brass cap,

T6N	R3E
S26	S25
S35	S36
1922	

Land, S. 54½ chs., gently rolling; remainder, mountainous.
Soil, rocky, 4th rate.
Timber, none.
Undergrowth, scattering scrub palo verde, mesquite and
cactus.

- From the cor. of secs. 25, 30, 31 and 36 on E. bdy. of Tp.,
hereinbefore described,
West, on a true line, on Sectional Correction Line, bet.
secs. 25 and 36.
Over mountainous land, thru. scattering undergrowth, and
very scattering timber.
Descend 178 ft., over NW. slope.
- 20.10 Wash, 20 lks. wide, course SW. Leave mountainous, and
enter rolling land.
- Ascend 20 ft., over SE. slope:
- 27.84 Old road, brs. NE. and SW.
- 29.00 Descend 25 ft., over SW. slope, to
- 40.11 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in
the ground, for ¼ sec. cor., marked on brass cap,

¼ S 25
S 36
1922

- from which,
A catclaw, 8 ins. in diam., brs. N. 64½° W., 60 lks.
dist., marked ¼ S 25 BT.
A palo verde, 8 ins. in diam., brs. S. 34½° W., 200 lks.
dist., marked ¼ S 36 BT.
Old mill stack, brs. S. 54° W.
- 44.82 Descend 32 ft., over SW. slope, to
Wash, 10 lks. wide, course SW. Leave rolling, and enter
mountainous land.
- Ascend 75 ft., over SE. slope.
- 60.20 Spur, slopes SW.
- Descend 25 ft., over W. slope.
- 61.94 Wash, 10 lks. wide, course SW.
- Ascend 58 ft., over SE. slope.
- 75.20 Ridge, brs. NE and SW.
- Ascend 10 ft. to
- 78.07 Point of short spur, slopes SW.
- Descend 32 ft., over W. slope, to
- 80.22 The cor. of secs. 25, 26, 35 and 36.
Land, E. 20 chs. and W. 35½ chs. mountainous; remainder,
rolling.
Soil, gravelly and rocky, 3rd rate.

Subdivision lines of Township 6 North, Range 3 East. 29

Chains.

Timber, very scattering palo verde.
Undergrowth, scattering catclaw, scrub palo verde and cactus.

N.0°01'W., bet. secs. 25 and 26.
Over mountainous land, thru. scattering undergrowth and very scattering timber.
Ascend 41 ft., over SW.slope.
4.00 Point of spur, slopes SW.
Descend 94 ft., over NW.slope.
13.85 Wash, 10 lks.wide, course SW.
Ascend 174 ft., over SE.slope.
29.32 Spur, slopes SW.
Descend 50 ft., over NW.slope, to
40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in the ground, deposit a stone marked with a cross (x) at base of post for $\frac{1}{4}$ sec.cor., marked on brass cap,

$\frac{1}{4}$
 S26 | S25
 1922.

No trees suitable for bearing trees within limits.
Descend 48 ft., over NW.slope.
46.60 Wash, 10 lks.wide, course SW.
Ascend 30 ft., over SW.slope, to
60.08 Wash, 10 lks.wide, course SW.
Ascend 180 ft., over SE.slope.
76.82 Ridge, brs. NE and SW.
Descend 20 ft., over NW.slope, to
80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 27 ins. in the ground, deposit a stone marked a cross (x) at base of post for cor. of secs. 23, 24, 25 and 26, marked on brass cap,

T6N | R3E
 S23 | S24
 S26 | S25
 1922

No trees suitable for bearing trees within limits.
Land, mountainous.
Soil, rocky, 4th rate.
Timber, very scattering palo verde.
Undergrowth, scattering scrub palo verde, mesquite and catclaw.

East, on a random line, bet. secs. 24 and 25.
40.00 Set temp. $\frac{1}{4}$ sec.cor.
80.34 Fall 12 lks.N. of the cor. of secs. 19, 24, 25 and 30, on E. bdy. of Tp., hereinbefore described.
Thence,
N. 39° 55' W., on a true line, bet. secs. 24 and 25.
Over mountainous land, thru. scattering undergrowth and very scattering timber,
Descend 35 ft., over N.slope, to
3.05 Spur, slopes NW.
Descend 407 ft., over W.slope, to
18.63 Wash, 20 lks.wide, course NW,
Ascend 37 ft., over NE.slope.
23.10 Spur, slopes NW.
Descend 52 ft., over W.slope.
28.30 Wash, 20 lks.wide, course NW.
Ascend 64 ft., over NE.slope, to
33.30 Spur, slopes NW.
Ascend 23 ft. to

30 Subdivision lines of Township 6 North, Range 3 East.


Chains.	
37.38	Spur, slopes NW. Descend 10 ft., over W. slope, to
40.17	Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground to bed rock, deposit a stone, marked with a cross (x) at base of post, and raise a mound of stone around post, for $\frac{1}{4}$ sec. cor., marked on brass cap, $\frac{1}{4}$ S 24 S 25 1922
	No trees suitable for bearing trees within limits. Ascend 28 ft., over E. slope.
45.00	Ridge, brs. N. and S. Descend 150 ft., over W. slope.
54.47	Wash, 10 lks. wide, course SW. Ascend 57 ft., over SE. slope.
56.67	Point of spur, slopes SW. Ascend 64 ft. to
63.97	Point of spur, slopes SE. Ascend 15 ft., over S. and SE. slopes.
68.97	Old mine shaft, brs. S. 20 chs. dist.
72.87	Ridge, brs. NE and SW. Descend 210 ft., over NW. slope, to
80.34	The cor. of secs. 23, 24, 25 and 26. Land, mountainous. Soil, rocky, 4th rate. Timber, very scattering palo verde. Undergrowth, scattering scrub palo verde, catclaw and mesquite.

	N. 0° 01' W., bet. secs. 23 and 24. Over mountainous land, thru. scattering undergrowth, and very scattering timber. Descend 24 ft., over NW. slope.
2.30	Wash, 10 lks. wide, course SW. Ascend 88 ft., over S. slope.
5.76	Spur, slopes SW. Descend 170 ft., over NW. slope.
21.54	Wash, 20 lks. wide, course NW. Ascend 26 ft., over SW. slope.
26.00	Point of spur, slopes W. Descend 38 ft., over NW. slope:
33.50	Wash, 10 lks. wide, course SW. Ascend 68 ft., over S. slope.
36.00	Ridge, brs. E and W. Descend 76 ft., over N. slope, to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap, $\frac{1}{4}$ S 23 S 24 1922
	from which, A catclaw, 6 ins. in diam., brs. N. 73 $\frac{3}{4}$ ° E., 54 lks. dist., marked $\frac{1}{4}$ S 24 BT. A palo verde, 4 ins. in diam., brs. S. 50° W., 105 lks. dist., marked BT.
40.63	Descend 12 ft., over N. slope. Wash, 10 lks. wide, course NW. Descend 51 ft., over W. slope.
54.25	Ascend 15 ft., over SW. slope.
57.24	Spur, slopes NW. Descend 63 ft., over N. slope.
69.30	Old road, brs. NE and SW.
69.90	Wash, 20 lks. wide, course SW.

Subdivision lines of Township 6 North, Range 3 East. 31

Chains.

Ascend 25 ft., over SW.slope to sec.cor.
 71.50 Box Spring, brs.E. 1 ch.dist.
 80.00m Set an iron post, 3 ft.long, 2 ins. in diam., 6 ins. in
 the ground to bed rock, deposit a stone marked with
 a cross (x) at base of post, and raise a mound of
 stone around post, for cor.of secs.13,14,23 and 24,
 marked on brass cap,




No trees suitable for bearing trees within limits.
 Land, mountainous.
 Soil, rocky, 3rd rate.
 Timber, very scattering palo verde and catclaw.
 Undergrowth, scattering scrub palo verde and catclaw.

S.89°55'E., on a random line, bet. secs.13 and 24.
 40.00 Set temp. 1/4 sec.cor.
 80.26 Fall 12 lks.S. of the cor. of secs,13,18,19 and 24, on E.
 bdy.of Tp., hereinbefore described.

Thence,
 West, on a true line, bet. secs.13 and 24.
 Over rolling land, thru. scattering undergrowth and very
 scattering timber.
 10.50 Ascend 20 ft., over SE.slope, to
 Wash, 10 lks.wide, course SE. Leave rolling, and enter
 mountainous land.

Ascend 140 ft., over E. and SE.slopes.
 27.80 Spur, slopes SW.
 Descend 170 ft., over W.slope, to
 40.13 Set an iron post, 3 ft.long, 1 in. in diam., 18 ins. in
 the ground to bed rock, deposit a stone marked with
 a cross (x) at base of post, and raise a mound of
 stone around post, for 1/4 sec.cor., marked on brass
 cap,



No trees suitable for bearing trees within limits.
 Raise a mound of stone, 2 ft, base, 1 1/2 ft.high, N.of cor.
 Descend 91 ft., over W.slope, to
 44.93 Descend 29 ft., over S.slope.

50.00 Spur, slopes SW.
 Descend 48 ft., over W.slope.
 52.66 Apache Spring and house, brs.N.6 chs.dist.
 57.36 Wash, 30 lks.wide, course SW.
 Ascend 25 ft. over SE.slope.
 60.06 Old road, brs.NE. and SW.
 65.06 Fence cor. brs.S. 150 lks.dist., from which fences extend
 W. and S., enclosing small pasture..

68.66 Spur, slopes SW.
 Descend 30 ft. over NW.slope, to
 80.26 The cor. of secs. 13,14,23 and 24.
 Land, E.10 1/2 chs., rolling, remainder, mountainous.
 Soil, gravelly and rocky, 3rd rate.
 Timber, very scattering palo verde.
 Undergrowth, scattering scrub palo verde and catclaw.

N.0°01'W., bet. secs.13 and 14.
 Over mountainous land, thru. scattering undergrowth, and

32 Subdivision lines of Township 6 North, Range 3 East.

Chains.

very scattering timber.
 Ascend 18 ft., over S. slope.
 2.20 Point of spur, slopes SE.
 Descend 10 ft., over NE. slope.
 5.50 Ascend 30 ft., over S. slope.
 12.20 Spur, slopes SE.
 Ascend 147 ft., over E. slope, to
 25.78 Spur, slopes SW.
 Descend 43 ft., over NW. slope.
 29.72 Wash, 10 lks. wide, course SW.
 Ascend 21 ft., over S. slope.
 33.00 Spur, slopes SW.
 Descend 34 ft., over NW. slope, to
 40.00 Wash, 10 lks. wide, course SW. Set an iron post, 3 ft.
 long, 1 in. in diam., 8 ins. in the ground to bed rock,
 deposit a stone marked with a cross (x) at base of
 post, and raise a mound of stone around post, for $\frac{1}{4}$
 sec. cor., marked on brass cap,

$\frac{1}{4}$
 S14 | S13

1922

from which,

A palo verde, 6 ins. in diam., brs. S. $66\frac{1}{4}^{\circ}$ E., 21
 lks. dist., marked $\frac{1}{4}$ S 13 BT.

A palo verde, 4 ins. in diam., brs. S. $66\frac{3}{4}^{\circ}$ W., 23
 lks. dist., marked BT.

Ascend 75 ft., over SW. slope, to
 49.00 Head of wash, course SW.
 Ascend 20 ft. over S. slope, to
 52.80 Rim of bench brs. E. and W. Leave mountainous land, and
 enter nearly level land on bench, sloping slightly to
 the SW.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in
 the ground to bed rock, deposit a stone, marked with
 a cross (x) at base of post, and raise a mound of stone
 around post, for cor. of secs. 11, 12, 13 and 14, marked on
 brass cap,

T6N | R3E
 S11 | S12
 S14 | S13

1922

No trees suitable for bearing trees within limits.
 Land, S. 53 chs., mountainous; remainder, nearly level.
 Soil, gravelly and rocky, 3rd rate.
 Timber, very scattering palo verde, and mesquite, ironwood.
 Undergrowth, scattering scrub palo verde, mesquite & ironwood.

East, on a random line, bet. secs. 12 and 13.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.92 Fall 3 lks. N. of the cor. of secs. 7, 12, 13 and 18 on E.
 bdy. of Tp., hereinbefore described:
 Thence,
 N. $89^{\circ}59'$ W., on a true line, bet. secs. 12 and 13.
 Over nearly level land, thru. scattering undergrowth,
 and very scattering timber.
 Ascend slightly over SE. and S. slopes, to
 39.96 Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in the
 ground to bed rock, supported in a mound of stone,
 for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 12
 S 13

1922

Subdivision lines of Township 6 North, Range 3 East. 33

Chains.

from which,
 A palo verde, 4 ins. in diam., brs. N. 35 1/2° W., 112
 lks. dist., marked BT.
 A palo verde, 6 ins. in diam., brs. S. 41° E., 142
 lks. dist., marked 1/4 S 13 BT.
 Continue over nearly level land on bench, thru. scatter-
 ing undergrowth and very scattering timber.
 Descend slightly over SW. slope, to
 The cor. of secs. 11, 12, 13 and 14.
 Land, nearly level.
 Soil, gravelly and rocky, 3rd rate.
 Timber, very scattering palo verde and mesquite.
 Undergrowth, scattering scrub palo verde and mesquite.

79.92

4.70

7.20

14.70


29.65

32.90

35.70

40.00

N. 0° 01' W., bet. secs. 11 and 12.
 Over nearly level land on bench, thru, scattering timber
 and undergrowth.
 Rim of bench, brs. NE. and W. Leave bench.
 Descend 18 ft., over NW. slope.
 Wash, 20 lks. wide, course SW.
 Ascend 20 ft., over S. slope, to
 Rim of bench, brs. E. and W. Thence over nearly level land
 on bench.
 Rim of bench, brs. NE. and SW. Leave bench.
 Descend 22 ft., over NW. slope.
 Wash, 20 lks. wide, course SW.
 Ascend 28 ft., over SE. slope.
 Rim of bench, brs. NE. and SW. Thence over nearly level
 land on bench.
 Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the
 ground to bed rock, supported in a mound of stone, for
 1/4 sec. cor., marked on brass cap,




47.50

51.50

73.73

80.00

from which,
 A mesquite, 6 ins. in diam., brs. N. 42 1/2° E., 63
 lks. dist., marked 1/4 S 12 BT.
 A palo verde, 6 ins. in diam., brs. N. 70° W., 72
 lks. dist., marked 1/4 S 11 BT.
 Continue over nearly level land on bench, thru. scattering
 timber and undergrowth.
 Rim of bench brs. NE. and SW. Leave bench:
 Descend 23 ft., over NW. slope, to
 Wash, 10 lks. wide, course SW. Leave nearly level and roll-
 ing land, and enter mountainous land.
 Ascend 252 ft., over S. slope.
 Ridge, brs. NE. and SW.
 Descend 66 ft., over NW. slope, to
 Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in
 the ground to bed rock; deposit a stone marked with a
 cross (x) at base of post, and raise a mound of stone
 around post; for cor. of secs. 1, 2, 11 and 12, marked
 on brass cap,



No trees suitable for bearing trees within limits.
 Land, nearly level, rolling and mountainous.
 Soil, gravelly and rocky, 3rd rate.
 Timber, scattering palo verde and mesquite.

34 Subdivision lines of Township 6 North, Range 3 East.

Chains.

Undergrowth, scattering scrub palo verde and mesquite.

- 40.00 S. 89° 59' E., on a random line, bet. secs. 1 and 12.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.90 Fall 20 lks. S. of the cor. of secs. 1, 6, 7 and 12, on E. bdy. of Tp., hereinbefore described.
 Thence,
 S. 89° 52' W., on a true line, bet. secs. 1 and 12.
 Over mountainous land, thru. scattering undergrowth.
 Descend 90 ft., over W. slope.
 10.30 Wash, 20 lks. wide, course SE.
 Ascend 120 ft., over E. slope, to
 20.10 Spur, slopes SE.
 Descend 184 ft., over SW. slope.
 39.00 Wash, 10 lks. wide, course SE.
 Ascend 24 ft., over NE. slope, to
 39.95 Set an iron post, 3 ft. long, 1 in. in diam., over a cross (x) marked on surface rock, and raise a mound of stone 4 ft. base, 34 ins. high around post, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 1
 S 12
 1922

- 46.40 Ascend 127 ft., over NE. slope.
 Spur, slopes SE.
 Descend 60 ft., over SW. slope.
 52.30 Head of wash, course SE.
 Ascend 90 ft., over SE. slope.
 63.70 Ridge, brs. NE. and SW.
 Descend 262 ft., over NW. slope, to
 79.90 The cor. of secs. 1, 2, 11 and 12.
 Land, mountainous.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, scattering scrub palo verde, mesquite and greasewood.

- 40.00 N. 0° 01' W., on a random line, bet. secs. 1 and 2.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.74 Fall 18 lks. E. of the cor. of secs. 1, 2, 35 and 36, on N. bdy. of Tp., hereinbefore described.
 Thence,
 S. 0° 10' E., on a true line, bet. secs. 1 and 2.
 Over mountainous land, thru. scattering undergrowth, and very scattering timber.
 Ascend 46 ft., over NW. slope, to
 4.95 Head of wash, course NW.
 Ascend 381 ft., over NE. slope.
 26.80 Ridge, brs. NW and SE.
 Descend 290 ft., over SW. slope, to
 39.74 Set an iron post, 3 ft. long, 1 in. in diam., 4 ins. in the ground to bed rock, deposit a stone marked with a cross (x) at base of post, and raise a mound of stone around post, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
 S 2 | S 1
 1922

- No trees suitable for bearing trees. in limits.
 Descend 140 ft., over SW. slope, to
 51.00 Wash, 10 lks. wide, course SW.

Subdivision lines of Township 6 North, Range 3 East.

35

Chains.

69.70 Descend 76 ft., over SW. slope, to Wash, 30 lks. wide, course SW.
 79.74 Ascend 102 ft., over NW. slope, to The cor. of secs. 1, 2, 11 and 12.
 Land, mountainous.
 Soil, rocky, 4th rate.
 Timber, very scattering palo verde and mesquite.
 Undergrowth, scattering scrub palo verde and mesquite.

From the cor. of secs. 2, 3, 34 and 35, on S. bdy. of Tp., hereinbefore described,
 N.0°01'W., bet. secs. 34 and 35.
 Over level land, thru. scattering timber and dense undergrowth.
 39.54 (40.00 chs. southing from cor. of secs. 26, 27, 34 and 35,) set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
 S34 | S35
 1922

from which,

A mesquite, 7 ins. in diam., brs. S. 37 $\frac{1}{2}$ ° E., 103 lks. dist., marked $\frac{1}{4}$ S 35 BT.

A palo verde, 4 ins. in diam., brs. S. 77 $\frac{1}{4}$ ° W., 68 lks. dist., marked BT.

Continue over level land, thru. scattering timber and dense undergrowth.

45.35 Old road, brs. SE. and NW.

54.70 Old road, brs. E. and W.

79.54 Intersect sectional correction line at a point 80.26 chs. west of the cor. of secs. 25, 26, 35 and 36.

At point of intersection, set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 26, 27, 34 and 35, marked on brass cap,

T6N | R3E
 S27 | S26
 S34 | S35
 1922

from which,

A palo verde, 12 ins. in diam., brs. N. 53° E., 200 lks. dist., marked T6N R3E S26 BT.

A mesquite, 6 ins. in diam., brs. S. 62 $\frac{3}{4}$ ° E., 140 lks. dist., marked T6N R3E S35 BT.

A mesquite, 8 ins. in diam., brs. S. 61 $\frac{1}{2}$ ° W., 210 lks. dist., marked T6N R3E S34 BT.

A saguaro, 15 ins. in diam., brs. N. 63 $\frac{1}{2}$ ° W., 170 lks. dist., marked T6N R3E S27 BT.

Land, level.

Soil, gravelly loam, 3rd rate.

Timber, scattering palo verde and mesquite.

Undergrowth, dense scrub palo verde and mesquite, greasewood and cactus.

From the cor. of secs. 25, 26, 35 and 36, West, on a true line, on Sectional Correction line, bet. secs. 26 and 35.

Over mountainous land, thru. scattering timber and undergrowth.

Descend 75 ft., over W. slope, to

7.50 Leave mountainous, and enter gently rolling land.

36 Subdivision lines of Township 6 North, Range 3 East.

Chains.

12.70	Descend 10 ft., over W. slope. Wash, 10 lks. wide, course SW.
15.24	Descend 18 ft., over SW. slope, to Wash, 20 lks. wide, course SW.
17.65	Descend 18 ft., over SW. slope. Old mine shaft, brs. S. 8 chs. dist.
21.15	Wash, 20 lks. wide, course SW. Ascend 38 ft., over S. slope.
25.55	Old road, brs. N. and S.
27.64	Descend 45 ft., over SW. slope.
39.84	Wash, 10 lks. wide, course SW. Leave gently rolling and enter nearly level land.
40.13	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap, <div style="text-align: center;"> $\frac{1}{4}$ S 26 S 35 1922 </div>
	from which, A palo verde, 6 ins. in diam., brs. N. 31° E., 58 lks. dist., marked $\frac{1}{4}$ S 26 BT. A palo verde, 6 ins. in diam., brs. S. 52° E., 35 lks. dist., marked $\frac{1}{4}$ S 35 BT. Continue over nearly level land, thru. scattering timber and undergrowth.
42.80	Old road, brs. SE. and NW.
56.30	Dry bed of Apache Creek, 40 lks. wide, course SE.
70.80	Old road; brs. N. and S.
80.26	The cor. of secs. 26, 27, 34 and 35. Land, E. 7 $\frac{1}{2}$ chs.; mountainous; W. 40 $\frac{1}{2}$ chs., nearly level; remainder, gently rolling. Soil, gravelly and rocky, 3rd rate. Timber, scattering palo verde. Undergrowth, scattering scrub mesquite and greasewood.
	----- N: 0° 2' E., bet. secs. 26 and 27. Over nearly level land, thru. scattering timber and undergrowth. Ascend slightly over SW. slope, to 25.30 Old trail, brs. SE. and NW. Descend slightly over W. slope, to 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap, <div style="text-align: center;"> $\frac{1}{4}$ S 27 S 26 1922 </div>
	from which, A mesquite, 4 ins. in diam., brs. S. 60° E., 93 lks. dist., marked BT. A mesquite, 6 ins. in diam., brs. N. 36° W., 94 lks. dist., marked $\frac{1}{4}$ S 27 BT. Leave nearly level, and enter rolling land.
49.70	Descend 30 ft., over NW. slope. Wash, 1 ch. wide, course NW.
55.00	Ascend 29 ft., over SW. slope. Spur, slopes W.
60.00	Descend 10 ft., over NW. slope.
68.00	Ascend 31 ft., over SW. slope. Spur, slopes SE.
75.00	Descend 36 ft., over NE. slope. Wash, 10 lks. wide, course SE.
80.00	Ascend 21 ft., over SW. slope, to Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground

Subdivision lines of Township 6 North, Range 3 East. 37

Chains.

in the ground to bed rock, supported in a mound of stone, for cor. of secs. 22, 23, 26 and 27, marked on brass cap,

T6N	R3E
S22	S23
S27	S26

1922

from which,

A palo verde, 8 ins. in diam., brs. N. $29\frac{1}{2}^{\circ}$ E., 48 lks. dist., marked T6N R3E S23 BT.

A palo verde, 10 ins. in diam., brs. S. $75\frac{3}{4}^{\circ}$ E., 150 lks. dist., marked T6N R3E S26 BT.

A palo verde, 8 ins. in diam., brs. S. $48\frac{3}{4}^{\circ}$ W., 130 lks. dist., marked T6N R3E S27 BT.

A palo verde, 8 ins. in diam., brs. N. 59° W., 120 lks. dist., marked T6N R3E S22 BT.

Land, S. $\frac{1}{2}$ nearly level; N. $\frac{1}{2}$, rolling.

Soil, gravelly and rocky, 3rd rate.

Timber, scattering palo verde.

Undergrowth, scattering scrub palo verde and mesquite.

East, on a random line, bet. secs. 23 and 26.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.46 Fall 14 lks. S. of the cor. of secs. 23, 24, 25 and 26.

Thence,

S. $89^{\circ}54'$ W.; on a true line, bet. secs. 23 and 26.

Over mountainous land, thru: scattering timber and undergrowth.

Descend 71 ft., over NW. slope.

3.54 Wash, 10 lks. wide, course SW.

Ascend 20 ft., over SE. slope.

4.90 Descend slightly over S. slope, to

5.74 Point of spur, slopes SW.

Descend 145 ft., over W. slope,

17.44 Same wash, 10 lks. wide, course NW. Leave mountainous, and enter gently rolling land in valley.

Descend 32 ft., over NW. slope, to

30.62 Same wash, 20 lks. wide, course SW.

Descend 15 ft., over SW. slope, to

40.23 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 23

S 26

1922

from which,

An ironwood, 8 ins. in diam., brs. N. $58\frac{1}{2}^{\circ}$ E., 34 lks. dist., marked $\frac{1}{4}$ S 23 BT.

A palo verde, 5 ins. in diam., brs. S. $87\frac{1}{4}^{\circ}$ W., 42 lks. dist., marked $\frac{1}{4}$ S 26 BT.

Descend 18 ft. over SW. slope, to

46.00 Wash, 20 lks. wide, course SE.

Descend 10 ft. over SE. slope.

49.50 Old road, brs. NE. and SW.

51.20 Dry bed of Apache Creek, 100 lks. wide, course SE.

Ascend 85 ft., over SE. slope.

78.20 Point of spur, slopes S.

Descend 12 ft., over SW. slope, to

80.46 The cor. of secs. 22, 23, 26 and 27.

Land, E. $17\frac{1}{2}$ chs., mountainous; remainder, gently rolling.

Soil, gravelly and rocky, 3rd rate.


Timber, scattering palo verde.

Undergrowth, scattering scrub palo verde and catclaw.

38 Subdivision lines of Township 6 North, Range 3 East.

Chains.


N.0°02'E., bet. secs.22 and 23.
 Over rolling land, thru. scattering timber and under-
 growth.
 Descend slightly over SW.slope, to
 .50 Head of wash, course SW.
 Ascend 52 ft., over S.slope.
 10.00 Spur, slopes SE.
 Descend 40 ft., over NE.slope.
 23.55 Wash, 20 lks.wide, course NE.near head.
 Ascend 15 ft., over SE.slope.
 27.85 Old road, brs.SE. and NW.
 30.25 Point of spur, slopes NE.
 Descend 29 ft. over NE.slope.
 35.25 Wash, 15 lks.wide, course SE.
 Ascend 28 ft., over SE.slope, to
 40.00 Set an iron post, 3 ft.long, 1 in. in diam., 20 ins.in
 the ground to bed rock, supported in a mound of stone,
 for $\frac{1}{4}$ sec.cor., marked on brass cap,



from which,

A palo verde, 8 ins.in diam., brs.N.82 $\frac{1}{2}$ °E., 39
 lks.dist., marked $\frac{1}{4}$ S 23 BT.
 A palo verde, 6 ins. in diam., brs.N.81 $\frac{3}{4}$ °W., 74
 lks.dist., marked $\frac{1}{4}$ S 22 BT.

Ascend 20 ft., over SE. slope, to
 49.50 Wash, 10 lks.wide, course SE.
 Ascend 46 ft., over SW.slope.
 60.00 Spur, slopes SE.
 Descend 45 ft., over NE.slope.
 60.98 Old road, brs.SE. and NW.
 70.56 Wash 1 ch. wide, course SE.
 Ascend 52 ft., over S.slope, to
 80.00 Set an iron post, 3' ft.long, 2 ins. in diam., 26 ins.
 in the ground for cor.of secs. 14, 15, 22 and 23,
 marked on brass cap,



from which,

A palo verde, 10 ins. in diam., brs. N.24 $\frac{1}{2}$ ° E.,
 43 lks.dist., marked T6N R3E S14 BT.
 A palo verde, 8 ins.in diam., brs.S.7 $\frac{1}{2}$ °E., 124
 lks.dist., marked T6N R3E S23 BT.
 A palo verde, 4 ins. in diam., brs.S.37 $\frac{1}{2}$ °W., 178
 lks.dist., marked BT.
 A palo verde, 10 ins. in diam., brs.N.60°W., 129
 lks.dist., marked T6N R3E S15 BT.
 Land, rolling.
 Soil, gravelly and rocky, 3rd rate.
 Timber, scattering palo verde and catclaw.
 Undergrowth, scattering scrub palo verde, catclaw and
 mesquite.

N.89° 54' E., on a random line, bet. secs.14 and 23.
 40.00 Set temp. $\frac{1}{4}$ sec.cor.
 80.36 Intersect N.and S. line, 35 lks.N.of the cor.of secs.13,
 14, 23 and 24.
 Thence,
 N.89°51'W., on a true line, bet. secs.14 and 23.

Subdivision lines of Township 6 North, Range 3 East.

Chains.

Over rolling land, thru. scattering timber and undergrowth.
 Descend 5 ft., over NW.slope.
 .90 Wash, 20 lks.wide, course SW., near head.
 Ascend 36 ft., over SE.slope.
 15.70 Point of spur, slopes SE.
 Descend 38 ft., over SW.slope.
 23.70 Wash, 20 lks, wide, course SE.
 Ascend 45 ft., over E.slope, to
 40.18 Set an iron post, 3 ft.long, 1 in. in diam., 8 ins.in
 the ground to bed rock, deposit a stone marked with
 a cross (x) at base of post, and raise a mound of
 stone around post, for $\frac{1}{4}$ sec.cor., marked on brass
 cap,

$\frac{1}{4}$ S 14
 S 23
 1922

No trees suitable for bearing trees within limits.
 Ascend 15 ft., over E.slope.
 44.80 Spur, slopes SE.
 Descend 22 ft., over SW.slope.
 51.70 Wash, 10 lks.wide, course SE.
 Ascend 24 ft., over NE.slope.
 57.87 Spur, slopes SE.
 Descend 10 ft., over SW.slope.
 59.60 Wash, 10 lks.wide, course SE.
 Ascend 40 ft., over E.slope.
 70.35 Spur, slopes SE.
 Descend 20 ft., over SW. and S.slopes, to
 80.36 The cor. of secs. 14,15,22 and 23.
 Land, rolling.
 Soil, gravelly and rocky, 3rd rate.
 Timber, scattering palo verde, catclaw and ironwood.
 Undergrowth, scattering scrub palo verde, catclaw, ironwood
 and mesquite.

 N.0°02'E., bet. secs.14 and 15.

Over rolling land, thru. scattering timber and under-
 growth.
 Ascend 84 ft., over S. and SW.slopes, to
 15.00 Spur, slopes SE. Leave rolling, and enter mountainous
 land.
 Ascend 132 ft., over E.slope, to
 25.00 Ascend 83 ft., over S.slope.
 31.60 Spur, slopes SE.
 Ascend 156 ft., over E.slope, to
 40.00 Set an iron post, 3 ft.long, 1 in. in diam., 8 ins. in the
 ground to bed rock, deposit a stone, marked with a
 cross (x) at base of post, and raise a mound of stone
 around post, for $\frac{1}{4}$ sec.cor., marked on brass cap,

$\frac{1}{4}$
 S15 | S14
 1922

No trees suitable for bearing trees within limits.
 Ascend 375 ft., over E. and SE.slopes.
 58.45 Spur, slopes NE.
 Descend 450 ft., over N.slope, to
 80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 10 ins.in
 the ground to bed rock, deposit a stone marked with
 a cross (x) at base of post, and raise a mound of
 stone around post, for cor.of secs. 10,11,14 and 15,
 marked on brass cap,

T6N | R3E
 S10 | S11
 S15 | S14
 1922

40 Subdivision lines of Township 6 North, Range 3 East.

Chains.

No trees suitable for bearing trees within limits.
Land, S. 15 chs. rolling; remainder, mountainous.
Soil, rocky, 4th rate.
Timber, scattering palo verde and mesquite.
Undergrowth, scattering scrub mesquite and palo verde.

-
- S. 89°51'E., on a random line, bet. secs. 11 and 14.
40.00 Set temp. $\frac{1}{4}$ sec. cor.
80.08 Intersect N. and S. line, 21 lks. S. of the cor. of secs. 11,
12, 13 and 14.
Thence,
West, on true line, bet. secs. 11 and 14.
Over nearly level land on bench, thru. scattering timber
and undergrowth.
20.50 Rim of bench, brs. N. and S. Leave nearly level, and en-
ter rolling land.
Descend 10 ft., over W. slope.
22.50 Ascend slightly over N. slope.
25.50 Spur, slopes NW.
Descend 8 ft., over W. slope.
29.00 Wash, 20 lks. wide, course NW.
Ascend 46 ft., over NE. slope, to
40.04 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in
the ground for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 11
S 14
1922

from which,

- A mesquite, 4 ins. in diam., brs. N. 30 $\frac{3}{4}$ ° W., 135
lks. dist., marked BT.
A mesquite, 4 ins. in diam., brs. S. 7° E., 59
lks. dist., marked BT.
Ascend 70 ft., over NE. slope.
53.30 Spur, slopes NW.
Descend 70 ft., over SW. slope.
63.60 Wash, 20 lks. wide, course NW. Leave rolling, and enter
mountainous land.
Ascend 91 ft., over NE. slope.
72.30 Spur, slopes NW.
Descend 10 ft., over W. slope.
74.00 Descend 94 ft., over N. slope, to
80.08 The cor. of secs. 10, 11, 14 and 15.
Land, E. 20 $\frac{1}{2}$ chs. nearly level; W. 16 $\frac{1}{2}$ chs., mountainous;
remainder, rolling.
Soil, gravelly and rocky, 3rd rate.
Timber, scattering palo verde and mesquite.
Undergrowth, scattering scrub palo verde and mesquite.

-
- N. 0° 02' E., bet. secs. 10 and 11.
Over mountainous land, thru. scattering timber and under-
growth.
Descend 280 ft., over N. slope.
14.30 Wash, 10 lks. wide, course NW.
Ascend 10 ft., over SW. slope.
17.90 Point of spur, slopes NW.
Descend 65 ft., over NW. slope.
23.10 Wash, 1 ch. wide, course SW.
Ascend 100 ft., over S. slope, to
33.90 Rim of bench, brs. E. and W. Leave mountainous, and enter
nearly level land on bench.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 22 ins. in
the ground to bed rock, for $\frac{1}{4}$ sec. cor., marked on
brass cap,

Subdivision lines of Township 6 North, Range 3 East.

41

Chains.

$$\frac{1}{4} \text{ S10 | S11}$$

1922

from which,

A palo verde, 6 ins. in diam., brs. N. 76° W., 117 lks. dist., marked $\frac{1}{4}$ S 10 BT.A palo verde, 6 ins. in diam., brs. S. 52 $\frac{1}{2}$ ° E., 6 lks. dist., marked $\frac{1}{4}$ S 11 BT.

- Continue over nearly level land, thru. scattering timber and undergrowth, on bench, sloping slightly to the SW.
- 70.00 Wash, 30 lks. wide, course SW. Leave nearly level, and enter rolling land.
- Ascend 23 ft., over S. slope, to
- 75.00 Leave rolling, and enter mountainous land.
- Ascend 92 ft., over S. slope, to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bed rock, deposit a stone marked with a cross (x) at base of post, and raise a mound of stone around post, for cor. of secs. 2, 3, 10 and 11, marked on brass cap,

$$\begin{array}{c} \text{T6N | R3E} \\ \text{S 3 | S 2} \\ \hline \text{S10 | S11} \\ \text{1922} \end{array}$$

No trees suitable for bearing trees within limits.
Land, S. 34 chs. and N. 5 chs. mountainous; remainder, nearly level and rolling.
Soil, gravelly and rocky, 3rd rate.
Timber, scattering palo verde.
Undergrowth, scattering scrub palo verde.

- 40.00 East, on a random line, bet. secs. 2 and 11.
Set temp. $\frac{1}{4}$ sec. cor.
- 79.92 Intersect N. and S. line, 7 lks. N. of the cor. of secs. 1, 2, 11 and 12.
- Thence,
N. 89° 57' W., on a true line, bet. secs. 2 and 11.
Over mountainous land, thru. scattering timber and undergrowth.
- 5.78 Descend 35 ft., over S. slope, to
Spur, slopes SW.
- 26.00 Descend 96 ft., over W. slope, to
Ascend 10 ft., over S. slope.
- 36.00 Spur, slopes SW.
Descend 17 ft., over W. slope.
- 39.60 Wash, 30 lks. wide, course SW. Leave mountainous, and enter rolling land.
- 39.96 Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in the ground to bed rock, supported in a mound of stone for $\frac{1}{4}$ sec. cor., marked on brass cap,

$$\frac{1}{4} \text{ S 2}$$

$$\text{S 11}$$

1922

from which,

A palo verde, 6 ins. in diam., brs. N. 67 $\frac{3}{4}$ ° W., 97 lks. dist., marked $\frac{1}{4}$ S 2 BT.A palo verde, 6 ins. in diam., brs. S. 42 $\frac{3}{4}$ ° E., 57 lks. dist., marked $\frac{1}{4}$ S 11 BT.

Continue over rolling land, thru. scattering timber and undergrowth.

Descend 20 ft., over SW. slope, to

42 Subdivision lines of Township 6 North, Range 6 East.

Chains.	
52.00	Wash, 20 lks. wide, course SW.
67.00	Ascend 25 ft., over SE. slope, to Leave rolling, and enter mountainous land.
72.00	Ascend 29 ft., over SE. slope, to
79.92	Ascend 60 ft., over S. slope, to The cor. of secs. 2, 3, 10 and 11. Land, E. 39½ chs. and W. 13 chs., mountainous; remainder, rolling. Soil, rocky, 3rd rate. Timber, scattering palo verde and mesquite. Undergrowth, scattering scrub palo verde and mesquite.

40.00	N. 0° 02' E., on a random line, bet. secs. 2 and 3. Set temp. ¼ sec. cor.
79.64	Fall 42 lks. E. of the cor. of secs. 2, 3, 34 and 35, on the N. bdy. of the Tp., hereinbefore described. Thence, S. 0° 16' E., on a true line, bet. secs. 2 and 3. Over rolling land, thru. scattering undergrowth. Ascend 64 ft., over W. slope, to
11.95	Descend 58 ft., over SW. slope.
24.70	Wash, 10 lks. wide, course SW. Leave rolling, and enter mountainous land and scattering timber.
39.64	Ascend 73 ft., over NW. slope, to Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for ¼ sec. cor., marked on brass cap,
$\begin{array}{c} \frac{1}{4} \\ S \ 3 \ \ S \ 2 \\ 1922 \end{array}$	
No trees suitable for bearing trees within limits. Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor. Continue over mountainous land, thru. scattering timber and undergrowth.	
40.50	Ascend slightly over NW. slope, to Spur, slopes SW.
49.50	Descend 150 ft., over S. slope.
70.32	Wash, 20 lks. wide, course SW. Ascend 282 ft., over NW. slope. Spur, slopes SW.
79.64	Descend 200 ft., over S. slope, to The cor. of secs. 2, 3, 10 and 11. Land, N. 24½ chs. rolling; remainder, mountainous. Soil, rocky, 4th rate. Timber, scattering palo verde and mesquite, in S. 55 chs. none elsewhere. Undergrowth, scattering scrub palo verde and mesquite, greasewood and cactus.

From the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp., hereinbefore described, N. 0° 02' W., bet. secs. 33 and 34. Over level land, thru. scattering timber and dense under- growth.	
18.20	Wash, 10 lks. wide, course SW.
39.52	(40.00 chs. S.) Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground for ¼ sec. cor., marked on brass cap,

$$\begin{array}{c} \frac{1}{4} \\ S \ 33 \ | \ S \ 34 \\ 1922 \end{array}$$

1922

from which,

A mesquite, 4 ins. in diam., brs. N. 42° E., 116
lks. dist., marked BT.

Subdivision lines of Township 6 North, Range 3 East. 43

Chains.


A palo verde, 4 ins. in diam., brs. N. 59 $\frac{1}{2}$ ° W., 221 lks. dist., marked BT.

50.60 Wash, 10 lks. wide, course SW.

70.00 Old road, brs. NE and SW.

75.40 Wash, 10 lks. wide; course SW. Leave level, and enter rolling land.

79.52 Ascend 20 ft., over SW. slope, to Intersect the sectional correction line at a point 80.20 chs. west of the cor. of secs. 26, 27, 34 and 35. At point of intersection, set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground for cor. of secs. 27, 28, 33 and 34, marked on brass cap,



from which,

A palo verde, 6 ins. in diam., brs. N. 57° E., 58 lks. dist.; marked T6N R3E S27 BT.

A palo verde; 6 ins. in diam., brs. S. 55° E., 170 lks. dist.; marked T6N R3E S34 BT.


A palo verde, 4 ins. in diam., brs. S. 58 $\frac{1}{4}$ ° W., 79 lks. dist., marked BT.

A palo verde, 8 ins. in diam., brs. N. 83 $\frac{1}{2}$ ° W., 146 lks. dist., marked T6N R3E S 28 BT.

Land, S. 75 $\frac{1}{2}$ chs., level; remainder, rolling.
 Soil, sandy and gravelly, 2nd and 3rd rate.
 Timber, scattering mesquite and palo verde.
 Undergrowth, dense greasewood, scrub palo verde, mesquite, catclaw and ironwood.

From the cor. of secs. 26, 27, 34 and 35, West, on true line, on Sectional correction line, bet. secs. 27 and 34.

40.10 Over level land, thru. scattering timber and undergrowth. Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap,



from which,

A mesquite, 4 ins. in diam., brs. N. 34 $\frac{3}{4}$ ° E., 110 lks. dist., marked B T.

A mesquite, 4 ins. in diam.; brs. S. 17 $\frac{3}{4}$ ° E., 195 lks. dist., marked BT.

Continue over level land, thru. scattering timber and undergrowth.

67.90 Wash, 10 lks. wide, course SW. Leave level, and enter rolling land.

80.20 Ascend gradually over S. slope, to The cor. of secs. 27, 28, 33 and 34. Land, E. 68 chs. level; remainder rolling. Soil, sandy and gravelly, 3rd rate. Timber, scattering palo verde and mesquite. Undergrowth, scattering scrub palo verde and mesquite.

N. 0° 04' E., bet. secs. 27 and 28. Over rolling land, thru. scattering timber and undergrowth. Ascend gradually to the $\frac{1}{4}$ sec. cor., over rolling SW. slope.

4.00 Wash, 10 lks. wide, course SW.

8.00 Spur, slopes SW.

22.10 Spur, slopes SW.

44 Subdivision lines of Township 6 North, Range 3 East.

Chains.

37.10 Spur, slopes SW.
40.00 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap,

S28 | S27
↑
1922

from which,

A palo verde, 8 ins. in diam., brs. N. $33\frac{1}{2}^{\circ}$ E.,
157 lks. dist., marked $\frac{1}{4}$ S 27 BT.

A palo verde, 10 ins. in diam., brs. S. $83\frac{1}{2}^{\circ}$ W.,
120 lks. dist., marked $\frac{1}{4}$ S 28 BT.

Continue over rolling land, thru. scattering timber and undergrowth.

Ascend gradually to sec. cor., over rolling SW. slope.

50.00 Spur, slopes SW.

65.00 Spur, slopes SW.

66.90 Wash, 10 lks. wide, course SW.

77.20 Wash, 10 lks. wide, course SW.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground for cor. of secs. 21, 22, 27 and 28, marked on brass cap,

T6N | R3E
S21 | S22
S28 | S27
1922

from which,

A palo verde, 10 ins. in diam., brs. N. $55\frac{1}{2}^{\circ}$ E.,
35 lks. dist., marked T6N R3E S22 BT.

A palo verde, 4 ins., in diam., brs. S. $17\frac{1}{4}^{\circ}$ E.,
170 lks. dist., marked BT.

A palo verde, 8 ins. in diam., brs. S. 10° W., 220
lks. dist., marked T6N R3E S28 BT.

A palo verde, 10 ins. in diam., brs. N. 29° W., 240
lks. dist., marked T6N R3E S21 BT.

Land, rolling.

Soil, sandy and gravelly, 3rd rate.

Timber, scattering palo verde.

Undergrowth, scattering scrub palo verde and mesquite.

40.00 East, on a random line, bet. secs. 22 and 27.

Set temp. $\frac{1}{4}$ sec. cor.

80.12 Intersect N. and S. line, 5 lks. S. of the cor. of secs.
22, 23, 26 and 27.

Thence,

S. $89^{\circ}58'$ W., on a true line, bet. secs. 22 and 27.

Over mountainous land; thru. scattering timber and undergrowth.

.50 Descend slightly over W. slope, to

Wash, 10 lks. wide, course SW.

Ascend 190 ft., over NE. slope.

17.50 Spur, slopes SE.

Descend 16 ft., over SW. slope.

20.90 Ascend 25 ft., over E. slope.

28.00 Spur, slopes SE.

Descend 77 ft., over SW. slope.

31.60 Wash, 10 lks. wide, course SE. near head.

Ascend 93 ft., over SE. slope, to

40.06 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap,

Chains.

$\frac{1}{4}$ S 22
 S 27
 1922

No trees suitable for bearing trees within limits.
 Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of
 cor.
 Ascend slightly over SE. slope, to
 40.50 Spur, slopes SW.
 Descend 122 ft., over W. slope, to
 49.65 Wash, 10 lks. wide, course SW. Leave mountainous, and enter
 rolling land.
 Descend gradually over rolling SW. slope to sec. cor.
 55.65 Spur, slopes SW.
 62.10 Wash, 20 lks. wide, course SW.
 73.00 Spur, slopes SW.
 77.00 Wash, 20 lks. wide, course SW.
 80.12 The cor. of secs. 21, 22, 27 and 28.
 Land, $\frac{1}{4}$ chs., mountainous; remainder, rolling.
 Soil, gravelly and rocky, 3rd rate.
 Timber, scattering palo verde.
 Undergrowth, scattering scrub palo verde and mesquite.

 N. $0^{\circ}04'E.$, bet. secs. 21 and 22.
 Over mountainous land, thru. scattering timber and under-
 growth.
 Ascend 73 ft., over SE. slope.
 9.10 Spur, slopes SW.
 Descend 10 ft., over W. slope.
 14.05 Ascend 79 ft., over S. slope.
 19.00 Spur, slopes SW.
 Ascend 52 ft., over W. slope, to
 24.00 Ascend 85 ft., over S. slope.
 34.80 Spur, slopes SW.
 Descend 40 ft., over NW. slope, to
 40.00 Set an iron post, $\frac{3}{4}$ ft. long, 1 in. in diam., 28 ins. in
 the ground for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
 S21 | S22
 1922

from which,
 A palo verde, 6 ins. in diam., brs. N. $79^{\circ}E.$, 28
 lks. dist., marked $\frac{1}{4}$ S 22 BT.
 A palo verde, 6 ins. in diam., brs. S. $36\frac{3}{4}^{\circ}W.$, 97
 lks. dist., marked $\frac{1}{4}$ S 21 BT.
 Descend 90 ft., over NW. slope.
 51.00 Wash, 20 lks. wide, course SW.
 Ascend 160 ft., over SE. slope.
 62.80 Spur, slopes SW.
 Descend 21 ft., over NW. slope.
 65.10 Wash, 10 lks. wide, course SW.
 Ascend 150 ft., over SE. slope, to
 70.44 Spur, slopes SW.
 Ascend 30 ft., over W. slope.
 72.00 Ascend 40 ft., over S. slope.
 74.30 Spur, slopes SW.
 Descend 120 ft., over NW. slope, to
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 4 ins. in
 the ground to bed rock, deposit a stone marked with
 a cross (x) at base of post, and raise a mound of
 stone around post, for cor. of secs. 15, 16, 21 and 22,
 marked on brass cap,

46. Subdivision lines of Township 6 North, Range 3 East.

Chains.

T6N	R3E
S16	S15
S21	S22
1922	

No trees suitable for bearing trees within limits.
Land, mountainous.
Soil, rocky, 4th rate.
Timber, scattering palo verde.
Undergrowth, scattering scrub palo verde.

40.00 N.89° 58'E., on a random line, bet. secs.15 and 22.
Set temp. $\frac{1}{4}$ sec. cor.
80.04 Intersect N. and S. line, 5 lks.S. of the cor. of secs.
14,15,22 and 23.
Thence,
S.89°56'W., on a true line, bet. secs.15 and 22.
Over mountainous land, thru. scattering timber and
undergrowth.
6.70 Descend 35 ft., over SW.slope.
Wash, 20 lks.wide, course SW.
Ascend 40 ft., over NE.slope.
10.15 Old road, brs.N.and S.
12.82 Point of spur, slopes NE.
Ascend 32 ft., over N.slope.
15.00 Ascend 34 ft., over NE.slope.
20.65 Point of spur, slopes NE.
Ascend 156 ft., over N.slope, to
32.83 Wash, 10 lks.wide, course NE. near head.
Ascend 156 ft., over E.slope, to
40.02 Set an iron post, 3 ft.long, 1 in. in diam., 25 ins.in
the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,

$\frac{1}{4}$ S 15
S 22
1922

No trees suitable for bearing trees within limits.
Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft.high, N.of cor.
50.00 Ascend 100 ft., over NE.slope, to
Point of spur, slopes NE.
51.93 Ascend 23 ft., over N.slope, to
Wash, 10 lks.wide, course NE.
59.00 Ascend 150 ft., over SE.slope.
Spur, slopes SW.
Descend 123 ft., over W.slope.
59.12 Prospect hole, brs.S. 5 lks.dist.
63.50 Head of wash, course SW.
Descend 160 ft. over S.slope, to
70.20 Spur, slopes SW.
Descend 115 ft. over NW.slope, to
80.04 The cor. of secs.15,16,21 and 22.
Land, mountainous.
Soil, rocky, 4th rate.
Timber, scattering palo verde and mesquite.
Undergrowth, scattering scrub palo verde and mesquite.

N.0°04'E., bet. secs.15 and 16.
Over mountainous land, thru. scattering timber and under-
growth.
3.00 Descend 24 ft., over NW.slope.
Wash, 20 lks.wide, course SW.
7.75 Ascend 86 ft., over S.slope.
Spur, slopes SW.
Descend 158 ft., over NW.slope.
18.73 Wash, 20 lks.wide, course SW.

Subdivision lines of Township 6 North, Range 3 East.

Chains.

- 22.20 Ascend 36 ft., over S. slope.
- Spur, slopes SW.
- 25.70 Descend 20 ft., over NW. slope.
- Wash, 10 lks. wide, course SW.
- 30.00 Ascend 70 ft., over S. slope.
- Spur, slopes SW.
- 30.96 Descend 105 ft., over NW. slope to $\frac{1}{4}$ sec. cor.
- Mine shaft, brs. W., 12 chs. dist.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
 S16 | S15
 1922

No trees suitable for bearing trees within limits.
 Raise a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 From this cor.,

- Apache Peak, brs. N. $81^{\circ} 15' E.$
- Stack of old smelter, brs. N. $23^{\circ} W.$
- Beverly House, brs. N. $16^{\circ} 35' W.$
- Beverly Bunkhouse, brs. N. $14^{\circ} W.$
- Blacksmith shop, brs. N. $11^{\circ} W.$

- 49.73 Descend 145 ft., over NW. slope.
- Old smelter brs. W., 5 chs. dist.
- 52.73 Wash, 10 lks. wide, course SW.
- Ascend 25 ft., over SW. slope.
- 54.73 Old corral brs. E. 1 ch.
- 59.73 Wash, 50 lks. wide, course SW.
- Ascend 20 ft., over SE. slope.
- 60.80 Fence brs. NE. and SW.
- 61.00 Rim of bench, brs. NE. and SW. Leave mountainous, and enter nearly level land on bench.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in the ground for cor. of secs. 9, 10, 15 and 16, marked on brass cap,

T6N | R3E
 S 9 | S10
 S16 | S15
 1922

No trees suitable for bearing trees within limits.
 Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 From this cor.,

- Beverly House, brs. S. $15^{\circ} W.$
- Stack of old smelter, brs. S. $6\frac{1}{2}^{\circ} W.$
- Beverly Bunk House brs. S. $8^{\circ} W.$
- Blacksmith shop, brs. S. $5^{\circ} W.$

Land, S. 61 chs., mountainous; remainder, nearly level.
 Soil, rocky, 4th rate.
 Timber, scattering palo verde, and mesquite.
 Undergrowth, scattering palo verde and mesquite.

-
- 40.00 N. $89^{\circ} 56' E.$, on a random line, bet. secs. 10 and 15.
 - Set temp. $\frac{1}{4}$ sec. cor.
 - 80.16 Intersect N. and S. line, 14 lks. N. of the cor. of secs. 10, 11, 14 and 15.
 - Thence,
 - N. $89^{\circ} 58' W.$, on a true line, bet. secs. 10 and 15.
 - Over mountainous land, thru. scattering timber and undergrowth.
 - Ascend 43 ft., over NE. slope.
 - 4.72 Spur, slopes NW.
 - Descend 197 ft., over W. slope.
 - 15.25 Wash, 15 lks. wide, course NW.

48 Subdivision lines of Township 6 North, Range 3 East.

Chains.	<p>Ascend 17 ft., over NE. slope, to 18.00 Descend 52 ft., over N. slope, to 28.20 Spur, slopes NW. Descend 97 ft., over SW. slope. 35.00 Descend 23 ft., over S. slope, to 40.08 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap,</p> <p style="text-align: center;"> $\frac{1}{4}$ S 10 S 15 1922</p> <p>from which, A mesquite, 4 ins. in diam., brs. N. $12\frac{3}{4}^{\circ}$ W., 181 lks. dist., marked BT. A palo verde, 8 ins. in diam., brs. S. $3\frac{3}{4}^{\circ}$ W., 144 lks. dist., marked $\frac{1}{4}$ S 15 BT.</p> <p>42.60 Descend 15 ft., over S. slope, to Spur, slopes SW. Descend 145 ft., over W. slopes. 66.60 Wash, 50 lks. wide, course SW. Ascend 20 ft., over SE. slope, to 70.15 Rim of bench, brs. NE. and SW. Leave mountainous, and enter nearly level land on bench. 80.16 The cor. of secs. 9, 10, 15 and 16. Land, E. 70 chs., mountainous; W. 10 chs., nearly level. Soil, rocky and gravelly, 3rd rate. Timber, scattering palo verde and mesquite. Undergrowth, scattering scrub palo verde and mesquite.</p> <hr style="border-top: 1px dashed black;"/> <p>N. $0^{\circ}04'$ E., bet. secs. 9 and 10. Over nearly level land on bench, thru. scattering timber and undergrowth. 4.00 Leave nearly level, and enter rolling land. Ascend 50 ft., over S. slope, to 7.35 Rim of bench, brs. E. and W. Leave rolling, and enter nearly level land on bench. 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 15 ins. in the ground to bed rock, supported by a mound of stone for $\frac{1}{4}$ sec. cor., marked on brass cap,</p> <p style="text-align: center;"> $\frac{1}{4}$ S 9 S 10 1922</p> <p>from which, A palo verde, 8 ins. in diam., brs. N. $68\frac{1}{2}^{\circ}$ E., 27 lks. dist., marked $\frac{1}{4}$ S 10 BT. A mesquite, 6 ins. in diam., brs. S. $68\frac{1}{4}^{\circ}$ W., 110 lks. dist., marked $\frac{1}{4}$ S 9 BT.</p> <p>Continue over nearly level land on bench, thru. scattering timber and undergrowth. 47.90 Road, brs. NE. and SW. 54.00 Wash, 20 lks. wide, 4 ft. deep, course SW. 57.00 Road, brs. E. and W. 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground for cor. of secs. 3, 4, 9 and 10, marked on brass cap,</p> <p style="text-align: center;"> T6N R3E S 4 S 3 S 9 S 10 1922</p> <p>No trees suitable for bearing trees within limits. Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.</p>
---------	---


Subdivision lines of Township 6 North, Range 3 East. 49

Chains.

Land, nearly level.
Soil; gravelly, 3rd rate.
Timber, scattering palo verde, mesquite and ironwood.
Undergrowth, scattering scrub palo verde, mesquite and ironwood.

40.00
80.06

S.89°58'E., on a random line, bet. secs.3 and 10.
Set temp. 1/4 sec.cor.
Intersect the cor.of secs.2,3, 10 and 11.
Thence,
N.89°58'W., on a true line, bet. secs. 3 and 10.
Over rolling land, thru. scattering timber and undergrowth.
Ascend 10 ft., over SE.slope.
Point of short spur, slopes SE.
Descend 160 ft., over SW. slope, to
Foot of descent, brs.N.and S. Thence over nearly level
land, on bench.
Set an iron post, 3 ft.long, 1 in. in diam., 28 ins. in
the ground for 1/4 sec.cor., marked on brass cap,



1.00
25.00
40.03

from which,
A mesquite, 6 ins. in diam., brs.N.26 1/2°E., 144
lks.dist., marked 1/4 S 3 BT.
A palo verde, 4 ins. in diam., brs.S.9°W., 130
lks.dist., marked BT.

70.00
80.06

Continue over nearly level land on bench, thru. scatter-
ing timber and undergrowth.
Road, brs.NE.and SW.
The cor.of secs.3,4,9 and 10.
Land, E. 25 chs. rolling; W.55 chs., nearly level.
Soil, sandy and gravelly, 3rd rate.
Timber, scattering palo verde and mesquite.
Undergrowth, scattering scrub palo verde and mesquite.

40.00
79.61

N.0°17'W., on a random line, bet. secs. 3 and 4.
Set temp. 1/4 sec.cor.
Fall 30 lks.W. of the cor. of secs. 3,4, 33 and 34, on the
N. bdy. of the Tp., hereinbefore described.
Thence,
S.0°04'E., on a true line, bet. secs.3 and 4.
Over rolling land, thru. scattering timber and under-
growth.
Descend 10 ft., over SW.slope.
Dry bed of Skunk Creek, 50 lks.wide, course NW.
Ascend 190 ft., over N.slope.
Spur, slopes NW.
Descend 110 ft., over SW.slope, to
Set an iron post, 3 ft.long, 1 in. in diam., 28 ins. in
the ground, for 1/4 sec.cor., marked on brass cap,



2.50
28.85
39.61

from which,
A palo verde, 8 ins. in diam., brs.S.57 3/4°E., 42
lks.dist., marked 1/4 S 3 BT.
A palo verde, 8 ins. in diam., brs.S.55 1/4°W., 23.
lks.dist., marked 1/4 S 4 BT.

51.34

Descend 73 ft., over SW.slope.
Wash, 20 lks.wide, course SW.

50 Subdivision lines of YTownship 6 North, Range 3 East.

Chains.

61.30 Ascend 50 ft., over NW.slope, to Rim of bench, brs.NE. and SW. Leave rolling, and enter nearly level land on bench.

73.60 Wash, 30 lks.wide, course NW.

79.61 The cor. of secs. 3, 4, 9 and 10.

Land N. 61 1/2 chs., rolling; remainder, nearly level.

Soil, sandy and gravelly, 3rd rate.

Timber, scattering palo verde and mesquite.

Undergrowth, scattering scrub palo verde and mesquite, catclaw and cactus.

From the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of Tp. hereinbefore described,

N. 0° 02' W., bet. secs. 32 and 33.

Over level land, thru. very scattering timber and dense undergrowth.

39.80 (40.00 chs. southing from the cor. of secs. 28, 29, 32 and 33) Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, with a stone marked with a cross (x) deposited at base of post, for 1/4 sec. cor., marked on brass cap,



No trees suitable for bearing trees within limits.

Continue over level land, thru. very scattering timber and dense undergrowth.

79.80 Intersect the sectional correction line at a point 80.43 chs. west of the cor. of secs. 27, 28, 33 and 34.

At point of intersection, set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground for cor. of secs. 28, 29, 32 and 33, marked on brass cap,



from which,

A mesquite, 8 ins. in diam., brs. N. 57° E., 216 lks. dist., marked T6N R3E S28 BT.

A mesquite, 5 ins. in diam., brs. S. 52 1/2° E., 186 lks. dist., marked T6N R3E S33 BT.

A mesquite, 6 ins. in diam., brs. S. 12° W., 190 lks. dist., marked T6N R3E S32 BT.

A mesquite, 6 ins. in diam., brs. N. 45 1/2° W., 269 lks. dist., marked T6N R3E S29 BT.

Land, level.

Soil, sandy and gravelly, 3rd rate.

Timber, very scattering mesquite, catclaw and ironwood.

Undergrowth, dense greasewood and scattering scrub mesquite, catclaw and ironwood.

From the cor. of secs. 27, 28, 33 and 34,

West, on a true line, on Sectional Correction line, bet. secs. 28 and 33.

Over gently rolling land, thru. scattering timber and dense undergrowth.

Descend 15 ft., over SW. slope, to

3.00 Wash, 20 lks. wide, course SE. Leave gently rolling, and enter level land.

15.50 Wash, 20 lks. wide, course SE.

30.70 Road, brs. SE. and NW.

B 8876

Subdivision lines of Township 6 North, Range 3 East. 51

Chains.
 40.21 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,
 $\frac{1}{4}$ S. 28
 S 33
 1922

from which,
 A mesquite, 4 ins. in diam., brs. N. $7\frac{3}{4}^{\circ}$ W., 96 lks. dist., marked BT.
 A mesquite, 4 ins. in diam., brs. S. $12\frac{1}{2}^{\circ}$ E., 172 lks. dist., marked B T.

Continue over level land, thru. scattering timber and dense undergrowth.
 44.30 Old road, brs. N. and S.
 80.43 The cor. of secs. 28, 29, 32 and 33.
 Land, E. 3 chs., gently rolling; remainder, level.
 Soil, sandy and gravelly, 3rd rate.
 Timber, scattering palo verde, mesquite and catclaw.
 Undergrowth, dense greasewood, scattering scrub palo verde, mesquite and catclaw.

N. $0^{\circ}08'$ E., bet. secs. 28 and 29.
 Over level land, thru. scattering timber and undergrowth.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,
 $\frac{1}{4}$ S 29 S 28
 1922

from which,
 A mesquite, 4 ins. in diam., brs. S. $22\frac{1}{4}^{\circ}$ E., 24 lks. dist., marked B T.
 A mesquite, 6 ins. in diam., brs. N. 80° W., 153 lks. dist., marked $\frac{1}{4}$ S 29 BT.

Continue over level land, thru. scattering timber and undergrowth.
 67.00 Head of wash, course SW. Leave level and enter rolling land.
 Ascend gradually over rolling SW. slope to sec. cor.
 70.00 Old road, brs. NE. and SW. on top of spur, sloping SW.
 79.90 Head of wash, course SW.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 20, 21, 28 and 29, marked on brass cap,

T6N R3E
 S20 S21
 S29 S28
 1922

from which,
 A palo verde, 8 ins. in diam., brs. N. $62\frac{3}{4}^{\circ}$ E., 50 lks. dist., marked T6N R3E S21 BT.
 A palo verde, 6 ins. in diam., brs. S. 41° E., 127 lks. dist., marked T6N R3E S28 BT.
 A palo verde, 6 ins. in diam., brs. S. $5\frac{1}{2}^{\circ}$ W., 108 lks. dist., marked T6N R3E S29 BT.
 A palo verde, 5 ins. in diam., brs. N. $10\frac{1}{2}^{\circ}$ W., 34 lks. dist., marked T6N R3E S20 BT.

Land, S. 67 chs., level; remainder, rolling.
 Soil, sandy and gravelly, 3rd rate.
 Timber, scattering palo verde and mesquite.
 Undergrowth, scattering greasewood, scrub palo verde and mesquite.

52 Subdivision lines of Township 6 North, Range 3 East.

Chains.

East, on a random line, bet. secs. 21 and 28.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.48 Intersect N. and S. line, 9 lks. N. of the cor. of secs. 21, 22, 27 and 28.
 Thence,
 N. $89^{\circ}56'W.$, on a true line, bet. secs. 21 and 28.
 Over rolling land, thru. scattering timber and undergrowth.
 Descend 28 ft., over SW. slope.
 12.30 Wash, 20 lks. wide, course SW.
 Ascend 10 ft., over SE. slope.
 15.50 Point of spur, slopes SE.
 Descend 14 ft., over SW. slope.
 17.50 Wash, 20 lks. wide, course SE.
 Ascend 15 ft., over SE. slope.
 20.50 Point of spur, slopes SE.
 Descend 15 ft., over SW. slope.
 23.50 Wash, 20 lks. wide, course SE.
 Ascend 14 ft., over E. slope.
 25.50 Rim of small bench, brs. N. and S. Thence over nearly level land on bench.
 40.24 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 21
 S 28
 1922

from which,

- A mesquite, 4 ins. in diam., brs. N. $46^{\circ}E.$, 230 lks. dist., marked BT.
- A mesquite, 6 ins. in diam., brs. S. $66^{\circ}W.$, 43 lks. dist., marked $\frac{1}{4}$ S 28 BT.

Continue over nearly level surface of small bench, thru. scattering timber and undergrowth.

42.10 Rim of bench, brs. N and S. Leave nearly level, and enter rolling land.
 Descend 18 ft., over W. slope.
 49.90 Wash, 20 lks. wide, course SE.
 Ascend 10 ft., over SE. slope, to
 54.90 Wash, 10 lks. wide, course SE.
 Ascend 25 ft., over E. slope.
 62.10 Spur, slopes SW. Thence over rolling SW. slope, descending gradually to sec. cor.
 68.50 Wash, 10 lks. wide, course SW.
 72.60 Old road, brs. NE. and SW.
 77.30 Old road, bears NE. and S.
 80.48 The cor. of secs. 20, 21, 28 and 29.
 Land, E. $25\frac{1}{2}$ chs. and W. $38\frac{1}{2}$ chs. rolling; remainder, nearly level.
 Soil, sandy and gravelly, 3rd rate.
 Timber, scattering palo verde and mesquite.
 Undergrowth, scattering scrub palo verde and mesquite.

 N. $0^{\circ}08'E.$, bet. secs. 20 and 21.
 Over rolling land, thru. scattering timber and undergrowth.
 Ascend gradually over rolling SW. slope to $\frac{1}{4}$ sec. cor.

11.50 Head of wash, course SW.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
 S 20 | S 21
 1922

from which,

- A palo verde, 4 ins. in diam., brs. S. $16^{\circ}E.$, 41

Subdivision lines of Township 6 North, Range 3 East.

Chains.

dist., marked BT.
 A palo verde, 6 ins. in diam., brs. N. $57\frac{3}{4}^{\circ}$ W.,
 172 lks. dist., marked $\frac{1}{4}$ S 20 BT.
 Continue over rolling land, thru. scattering timber and
 undergrowth.
 Ascend 20 ft., over W. slope, to
 47.10 Wash, 30 lks. wide, course SW.
 Ascend 56 ft., over SE. slope.
 62.30 Spur, slopes SW.
 Descend 40 ft., over NW. slope.
 65.50 Wash, 10 lks. wide, course SW.
 Ascend 17 ft., over SE. slope.
 67.30 Spur, slopes SW.
 Descend 26 ft., over NW. slope.
 72.80 Wash, 10 lks. wide, course SW.
 Ascend 64 ft., over SE. slope, to
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 8 ins. in
 the ground to bed rock, deposit a stone, marked with
 a cross (x) at base of post, and raise a mound of stone
 around post, for cor. of secs. 16, 17, 20 and 21, marked
 on brass cap,

T6N	R3E
S17	S16
S20	S21

1922

No trees suitable for bearing trees within limits.
 Land, rolling.
 Soil, rocky, 3rd rate.
 Timber, scattering palo verde.
 Undergrowth, scattering scrub palo verde.

S. $89^{\circ}56'$ E., on a random line, bet. secs. 16 and 21.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.28 Intersect N. and S. line, 10 lks. S. of the cor. of secs. 15,
 16, 21 and 22.
 Thence,
 West, on a true line, bet. secs. 16 and 21.
 Over mountainous land, thru. scattering timber and under-
 growth.
 Descend 172 ft., over NW. slope.
 23.40 Wash, 23 lks. wide, course SE.
 Ascend 20 ft., over E. slope.
 29.40 Spur, slopes SE.
 Descend 10 ft., over SW. slope,
 33.00 Wash, 10 lks. wide, course SE.
 Ascend 56 ft., over NE. slope, to
 40.14 Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in
 the ground to bed rock, deposit a stone marked with
 a cross (x) at base of post, and raise a mound of
 stone around post, for $\frac{1}{4}$ sec. cor., marked on brass
 cap,

S 16
S 21

1922

No trees suitable for bearing trees within limits.
 Ascend slightly over NE. slope, to
 40.60 Spur, slopes SE.
 Descend 144 ft., over SW. slope.
 55.20 Wash, 20 lks. wide, course SE.
 Ascend 24 ft., over SE. slope.
 59.20 Old road, brs. SE. and NW.
 64.86 Wash, 10 lks. wide, course SE. near head.
 Ascend 80 ft., over E. slope.
 69.60 Spur, slopes SW.
 Descend 77 ft., over W. slope.

54 Subdivision lines of Township 6 North, Range 3 East.

Chains.

- 75.00 Wash, 10 lks. wide, course SW. near head.
Ascend 32 ft., over SE. slope, to
- 80.28 The cor. of secs. 16, 17, 20 and 21.
Land, mountainous.
Soil, rocky, 3rd rate.
Timber, scattering palo verde and ironwood.
Undergrowth, scattering scrub palo verde.
-
- 1.00 N. 0° 08' E., bet. secs. 16 and 17.
Over rolling land, thru. scattering timber and undergrowth
Ascend slightly over SE. slope, to
Spur, slopes SW.
Descend 35 ft., over NW. slope.
- 7.60 Wash, 10 lks. wide, course SW.
Ascend 38 ft., over S. slope.
- 11.35 Spur, slopes SW.
Ascend 30 ft., over W. slope, to
- 33.40 Wash, 20 lks. wide, course SW.
Ascend 15 ft., over S. slope.
- 35.30 Spur, slopes SW.
Ascend 21 ft., over W. slope, to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in
the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
 S17 | S16
 1922

from which,

A palo verde, 8 ins. in diam., brs. N. 30° E., 20
lks. dist., marked $\frac{1}{4}$ S 16 BT.

A palo verde, 8 ins. in diam., brs. N. 75° W., 202
lks. dist., marked $\frac{1}{4}$ S 17 BT.

- Ascend 44 ft., over SW. slope.
- 46.60 Point of spur, slopes W.
Descend 46 ft., over NW. slope, to
- 51.50 Wash, 50 lks. wide, 6 ft. deep, course SW.
Ascend 10 ft., over SW. slope, to
- 57.50 Wash, 10 lks. wide, 3 ft. deep, course SW.
Ascend 34 ft., over S. slope.
- 61.60 Spur, slopes SW.
Descend 67 ft. over W. slope to sec. cor.
- 68.27 Old road, brs. E. and W.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in
the ground for cor. of secs. 8, 9, 16 and 17, marked on
brass cap,

T6N | R3E
 S 8 | S 9
 S17 | S16
 1922

from which,

A mesquite, 6 ins. in diam., brs. N. 80 $\frac{1}{2}$ ° E., 140
lks. dist., marked T6N R3E S9 BT.

A mesquite, 8 ins. in diam., brs. S. 56° E., 144
lks. dist., marked T6N R3E S16 BT.

A palo verde, 8 ins. in diam., brs. S. 10 $\frac{1}{4}$ ° W., 248
lks. dist., marked T6N R3E S17 BT.

A mesquite, 8 ins. in diam., brs. N. 51 $\frac{1}{2}$ ° W., 273
lks. dist., marked T6N R3E S8 BT.

Land, rolling.

Soil, rocky, 3rd rate.

Timber, scattering palo verde, ironwood and mesquite.

Undergrowth, scattering scrub palo verde, ironwood and
mesquite.

Subdivision lines of Township 6 North, Range 3 East. 55

Chains.

East, on a random line, bet. secs. 9 and 16.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.96 Intersect N. and S. line, 7 lks. N. of the cor. of secs. 9, 10, 15 and 16.
 Thence,
 N. $89^{\circ}57'W.$, on a true line, bet. secs. 9 and 16.
 Over nearly level land, thru. scattering timber and undergrowth, on bench.
 25.70 Rim of bench, brs. NW and SE. Leave nearly level, and enter mountainous land.
 Descend 112 ft., over SW. slope.
 37.86 Bottom of gulch, course SW.
 Ascend 10 ft., over SE. slope, to
 39.98 Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the ground, to bed rock, supported by a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 9
 S 16
 1922

from which,
 A palo verde, 4 ins. in diam., brs. N. $43^{\circ}W.$, 125 lks. dist., marked B T.
 A mesquite, 10 ins. in diam., brs. S. $32\frac{1}{4}^{\circ}W.$, 114 lks. dist., marked $\frac{1}{4}$ S 16 BT.
 Descend 625 ft., over steep broken SW. slope, to
 75.00 Foot of steep descent, brs. N. and S. Leave mountainous, and enter rolling land.
 Descend 15 ft., over W. slope, to
 79.96 The cor. of secs. 8, 9, 16 and 17.
 Land, E. $25\frac{1}{2}$ chs., nearly level; W. 5 chs. rolling; remainder, mountainous.
 Soil, rocky, 4th rate.
 Timber, scattering palo verde and mesquite.
 Undergrowth, scattering scrub palo verde and mesquite.


N. $0^{\circ}08'E.$, bet. secs. 8 and 9.
 Over rolling land, thru. scattering timber and undergrowth.
 Ascend 30 ft., over W. slope, to
 17.40 Wash, 10 lks. wide, 4 ft. deep, course SW. Leave rolling, and enter mountainous land.
 Ascend 140 ft., over S. slope.
 33.85 Spur, slopes SW.
 Descend 68 ft., over NW. slope.
 37.71 Wash, 20 lks. wide, course SW.
 Ascend 38 ft., over S. slope, to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in the ground to bed rock, supported in a mound of stone for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
 S 8 | S 9
 1922

from which,
 A palo verde, 6 ins. in diam., brs. N. $34^{\circ}E.$, 22 lks. dist., marked $\frac{1}{4}$ S 9 BT.
 An ironwood, 10 ins. in diam., brs. S. $70\frac{1}{2}^{\circ}W.$, 65 lks. dist., marked $\frac{1}{4}$ S 8 BT.
 Beyond this $\frac{1}{4}$ sec. cor., the sec. line passes over a series of cliffs on the S. slope of Pyramid Peak, and chaining is impracticable; therefore, triangulate as described as follows, and as shown on the diagram hereon:

56. Subdivision lines of Township 6 North, Range 3 East.

Chains.

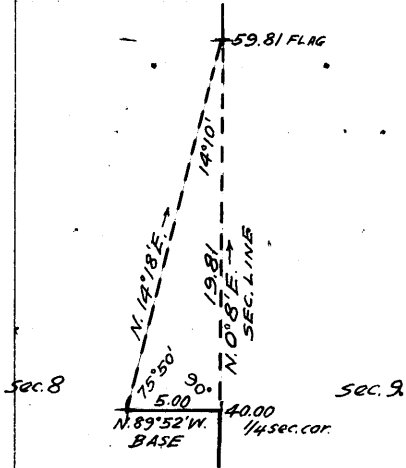

From $\frac{1}{4}$ sec.cor., measure a Base, N.89°52'W., 5.00 chs., Set flag ahead on sec.line on top of Pyramid Peak. From W. end of Base, the flag brs. N.14°18'E. Vertical angle from $\frac{1}{4}$ sec.cor.to flag is + 20°. Included angles of the triangle are 90°00', 75°50' and 14°10', the sum of which is 180°00'.

Triangulated measurement on sec.line is obtained by, Tang. 75°50' x Base or 3.96165 x 5.00 = 19.81 chs., which added to 40.00 chs. gives 59.81 chs. N.0°8'E.from the cor. of secs. 8,9,16 and 17 for the position of the flag.

- 59.81 Flag point of above described triangulation, on top of Pyramid Peak, 476 ft. above the $\frac{1}{4}$ sec.cor. Continue line and measurement by chaining. Descend 405 ft., over N.slope, to
- 80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 8 ins. in the ground to bed rock, deposit a stone, marked with a cross (x) at base of post, and raise a mound of stone around post, for cor.of secs.4,5,8 and 9, marked on brass cap,

T6N	R3E
S 5	S. 4
S 8	S 9
1922	

No trees suitable for bearing trees within limits. Land, S. 17 $\frac{1}{2}$ chs., rolling; remainder, mountainous. Soil, rocky, 3rd rate. Timber, scattering palo verde and ironwood. Undergrowth, scattering scrub palo verde and ironwood.

- 40.00 S.89°57'E., on a random line, bet. secs.4 and 9. Set temp. $\frac{1}{4}$ sec.cor.
- 80.22 Intersect N. and S. line 23 lks.S.of the cor.of secs.3,4, 9 and 10. Thence, S.89°53'W., on a true line, bet.secs. 4 and 9. Over nearly level land on bench, thru.scattering timber and undergrowth.
- 40.11 Set an iron post, 3 ft. long, 1 in. in diam., 15 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec.cor., marked on brass cap,

$\frac{1}{4}$ S	4
S	9
1922	

from which,

- A mesquite, 4 ins. in diam., brs.N.61 $\frac{1}{2}$ °W., 160 lks.dist.; marked BT.
- A mesquite, 6 ins. in diam., brs.S.59°W., 180 lks.dist., marked $\frac{1}{4}$ S 9 BT.


- Continue over nearly level land, on bench, thru.scattering timber and undergrowth.
- 67.75 Wash, 20 lks.wide, course NW. Leave nearly level, and enter mountainous land. Ascend 85 ft., over N.slope, to

Subdivision lines of Township 6 North, Range 3 East.

Chains.

80.22 The cor. of secs. 4, 5, 8 and 9.
Land, E. 68 chs., nearly level; remainder, mountainous.
Soil, sandy and gravelly, 3rd rate.
Timber, scattering palo verde and mesquite.
Undergrowth, scattering scrub palo verde and mesquite.

N. 0° 08' E., on a random line, bet. secs. 4 and 5.
40.00 Set temp. 1/4 sec. cor.
79.75 Fall 18 lks. W. of the cor. of secs. 4, 5, 32 and 33, on the
N. bdy. of the Tp., hereinbefore described.
Thence,
S. 0° 16' W., on a true line, bet. secs. 4 and 5.
Over nearly level land on bench, thru. scattering timber
and undergrowth.
11.05 Rim of bench, brs. NE. and SW. Leave nearly level, and
enter rolling land.
Descend 25 ft., over SE. slope.
16.56 Wash, 20 lks. wide, course SW.
Descend gradually over SW. slope to 1/4 sec. cor.
37.55 Wash, 150 lks. wide, course SW.
39.75 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for 1/4 sec. cor., marked on brass cap,



from which,
A palo verde, 8 ins. in diam., brs. S. 57 1/2° E., 187
lks. dist., marked 1/4 S 4 BT.
A mesquite, 6 ins. in diam., brs. N. 81 1/2° W., 188
lks. dist., marked 1/4 S 5 BT.

Continue over rolling land, thru. scattering timber and
undergrowth.
Descend gradually over SW. slope.
46.27 Wash, 30 lks. wide, 6 ft. deep, course SW.
Ascend 35 ft., over NW. slope.
47.67 Old road, brs. NE. and SW.
57.25 Descend 28 ft., over SW. slope.
60.00 Wash, 20 lks. wide, 6 ft. deep, course NW.
Ascend gradually over NW. slope.
65.65 Same road, brs. SE. and NW.
70.47 Wash, 50 lks. wide, course NW. Leave rolling, and enter
mountainous land.
Ascend 126 ft., over N. slope, to
79.75 The cor. of secs. 4, 5, 8 and 9.
Land, N. 11 chs., nearly level; S. 9 1/2 chs., mountainous;
remainder rolling.
Soil, sandy and gravelly, 3rd rate.
Timber, scattering palo verde and mesquite.
Undergrowth, scattering scrub palo verde and mesquite.

From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the
Tp., hereinbefore described,
N. 0° 03' W., bet. secs. 31 and 32.
Over level land, thru. dense undergrowth.
40.64 (40.00 chs. southing from cor. of secs. 29, 30, 31 and 32)
Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in
the ground for 1/4 sec. cor., marked on brass cap,



from which,

58 Subdivision lines of Township 6 North, Range 3 East.

Chains.

A mesquite, 4 ins. in diam., brs. N. $31\frac{1}{2}^{\circ}$ E., 120 lks. dist., marked BT.

A mesquite, 4 ins. in diam., brs. N. 10° W., 144 lks. dist., marked BT.

Continue over level land, thru. dense undergrowth. Enter scattering timber.

80.64 Intersect Sectional Correction line at a point 80.38 chs. west of the cor. of secs. 28, 29, 32 and 33.

At point of intersection, set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground for cor. of secs. 29, 30, 31 and 32, marked on brass cap,

T6N	R3E
S30	S29
S31	S32

1922

from which,

A mesquite, 6 ins. in diam., brs. N. $63\frac{1}{2}^{\circ}$ E., 64 lks. dist., marked T6N R3E S29 BT.

A palo verde, 8 ins. in diam., brs. S. $15\frac{1}{2}^{\circ}$ E., 237 lks. dist., marked T6N R3E S32 BT.

A mesquite, 4 ins. in diam., brs. S. 51° W., 212 lks. dist., marked BT.

A mesquite, 4 ins. in diam., brs. N. $30\frac{1}{4}^{\circ}$ W., 138 lks. dist., marked BT.

Land. level.

Soil, sandy loam, 2nd rate.

Timber, scattering palo verde and mesquite in N. $\frac{1}{2}$. No timber in S. $\frac{1}{2}$.

Undergrowth, dense greasewood and scattering scrub palo verde and mesquite.

From the cor. of secs. 28, 29, 32 and 33, West, on a true line, on Sectional Correction Line, bet. secs. 29 and 32.

Over level land, thru. scattering timber and dense undergrowth.

30.50 Old road, brs. N. and S.

40.19 Set an iron post 3 ft. long, 1 in. in diam., 27 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 29
S 30

1922

from which,

A mesquite, 6 ins. in diam., brs. N. $28\frac{1}{2}^{\circ}$ W., 56 lks. dist., marked $\frac{1}{4}$ S 29 BT.

A mesquite, 6 ins. in diam., brs. S. $7\frac{1}{4}^{\circ}$ E., 103 lks. dist., marked $\frac{1}{4}$ S 30 BT.

Continue over level land, thru. scattering timber and dense undergrowth.

54.00 Old house, brs. S. 7 chs. dist.

66.00 Old trail, brs. N. and S.

67.00 Old house, brs. S. 3 chs. dist.

80.38 The cor. of secs. 29, 30, 31 and 32.

Land, level.

Soil, sandy loam, 2nd rate.

Timber, scattering palo verde and mesquite.

Undergrowth, dense greasewood and scattering scrub palo verde and mesquite.

West, on a true line, on Sectional Correction Line, bet. secs. 30 and 31.

Over level land, thru. scattering timber, and dense

BOOK 1078

Subdivision lines of Township 6 North, Range 3 East. 59

chains.

8.50 undergrowth. .
Old trail, brs.N. and S.
40.00 Set an iron post; 3 ft. long, 1 in.in diam., 27 ins.in
the ground for 1/4 sec.cor., marked on brass cap,

1/4 S 30
S 31
1922

from which,
A mesquite, 6 ins.in diam., brs.N:44 1/4°E., 65 lks.
dist., marked 1/4 S 30 BT.
A mesquite, 6 ins. in diam., brs:S. 8°W.; 78 lks.
dist., marked 1/4 S 31 BT.

Continue over level land, thru.scattering timber and
dense undergrowth.
79.53 Intersect W. bdy. of Tp. at a point 82.51 chs.N.0°4'E.,
from the cor.of Ts.5 and 6 N., Rs.2 and 3 E., reestab-
lish the cor.of secs. 30 and 31 at this point, as here-
inbefore described in notes of resurvey of the W.bdy.
of T.6 N.,R.3 E.

Land, level.
Soil, sandy loam, 2nd rate.
Timber, scattering palo verde and mesquite.
Undergrowth, dense greasewood and scattering scrub palo
verde and mesquite, and cactus.

N.0°13'E., bet. secs.29 and 30.
Over level land, thru. scattering timber and dense
undergrowth..

40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in
the ground for 1/4 sec.cor., marked on brass cap,

1/4
S30 | S29
1922

from which,
A palo verde, 8 ins. in diam., brs.N.39 1/4°W.,
214 lks.dist., marked 1/4 S 30 BT.
A palo verde,, 4 ins. in diam., brs.S.55°E.,
142 lks. dist., marked BT.

Continue over level land, thru. scattering timber and
dense undergrowth.
65.00 Wash, 20 lks.wide, course SW. Thence over nearly level
land.

Ascend slightly over S.slope, to
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins.in
the ground for cor.of secs. 19,20. 29 and 30, marked
on brass cap,

T6N | R3E
S19 | S20
S30 | S29
1922

from which,
A palo verde, 10 ins. in diam., brs.N.74 1/2°E.,
213 lks.dist., marked T6N R3E S20 BT.
A palo verde, 8 ins.in diam., brs.S.13 3/4°E., 354
lks.dist., marked T6N R3E S29 BT.
A palo verde, 10 ins.in diam., brs.S.72°W., 138
lks. dist., marked T6N R3E S30 BT.
A palo verde, 8 ins.in diam., brs.N.5°W., 159
lks.dist., marked T6N R3E S19 BT.

Land, S.65 chs., level; N.15 chs., nearly level.

60 Subdivision lines of Township 6 North, Range 3 East.
Chains.

Soil, sandy loam, 2nd rate.
Timber, scattering mesquite and palo verde.
Undergrowth, dense greasewood and scattering scrub palo verde and mesquite, and cactus.

East, on a random line, bet. secs. 20 and 29.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.22 Intersect N. and S. line, 10 lks. N. of the cor. of secs. 20, 21, 28 and 29.

Thence,

N. $89^{\circ}56'W.$, on true line, bet. secs. 20 and 29.

Over gently rolling land, thru. scattering timber and dense undergrowth.

Descend gradually over SW. slope.

10.00 Wash, 40 lks. wide, course SE:

Ascend gradually over SE. slope.

25.00 Descend gradually over SW. slope, to

40.11 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 20
S 29
1922

from which,

A mesquite, 6 ins. in diam., brs. N. $33\frac{1}{2}^{\circ}W.$, 81 lks. dist., marked $\frac{1}{4}$ S 20 BT.

A mesquite, 4 ins. in diam., brs. S. $68^{\circ}W.$, 64 lks. dist., marked B T.

Continue over gently rolling land, thru. scattering timber and dense undergrowth.

Descend gradually over SW. slope.

44.92 Old trail, brs. N. and S.

Ascend gradually over SE. slope.

59.00 Descend gradually over SW. slope.

72.00 Wash, 30 lks. wide, course SE. Leave gently rolling, and enter nearly level land.

Ascend slightly over SE. slope, to

80.22 The cor. of secs. 19, 20, 29 and 30.

Land, E. 72 chs., gently rolling; remainder, nearly level.

Soil, sandy loam, 2nd rate.

Timber, scattering palo verde and mesquite.

Undergrowth, dense greasewood and scattering scrub palo verde and mesquite and cactus.

West, on random line, bet. secs. 19 and 30.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.59 Fall 12 lks. S. of the reestablished cor. of secs. 19 and 30, on W. bdy. of Tp., hereinbefore described.

Thence,

S. $89^{\circ}55'E.$, on a true line, bet. secs. 19 and 30.

Over gently rolling land, thru. scattering timber and dense undergrowth.

Ascend gradually over SW. slope.

19.60 Spur, slopes SW.

Descend gradually over SE. slope.

38.59 Center of dry bed of Skunk Creek, 7 chs. wide, course SW. Thence over nearly level land, sloping SW.

Ascend slightly to

39.59 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground to bed rock, supported in a mound of stone for $\frac{1}{4}$ sec. cor., marked on brass cap,

FOOTNOTES

Subdivision lines of Township 6 North, Range 3 East. 61

chains.

1/4 S 19
S 30
1922

from which,
A palo verde, 7 ins. in diam., brs. North, 232 lks. dist., marked 1/4 S 19 BT.
A palo verde, 4 ins. in diam., brs. S. 11 3/4° W., 235 lks. dist., marked BT.

79.59 Continue over nearly level land, sloping slightly to the SW., thru. scattering timber and dense undergrowth. Ascend slightly to The cor. of secs. 19, 20, 29 and 30. Land, W. 38 1/2 chs., gently rolling; remainder, nearly level Soil, sandy, 2nd rate. Timber, scattering palo verde and ironwood. Undergrowth, dense greasewood and scattering scrub palo verde and mesquite, and cactus.

35.00 N. 0° 13' E., bet. secs. 19 and 20. Over nearly level land, thru. scattering timber and dense undergrowth. Ascend slightly over S. slope, to Thence over gently rolling land.

40.00 Ascend gradually over SW. slope, to Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground to bed rock, supported in a mound of stone, for 1/4 sec. cor., marked on brass cap,

1/4 S19 | S20
1922

from which,
A palo verde, 4 ins. in diam., brs. S. 63 1/2° E., 38 lks. dist., marked BT.
A palo verde, 6 ins. in diam., brs. S. 61° W., 105 lks. dist., marked 1/4 S 19 BT.

45.00 Continue over gently rolling land, thru. scattering timber and dense undergrowth. Ascend gradually over SW. slope.

54.00 Descend 25 ft., over NW. slope, to Dry bed of East side channel of Skunk Creek, 1 ch. wide, course SW. Thence over nearly level land, bet. dry channels of Skunk Creek.

80.00 Ascend slightly over S. slope, to Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground for cor. of secs. 17, 18, 19 and 20, marked on brass cap,

T6N | R3E
S18 | S17
S19 | S20
1922

from which,
A palo verde, 6 ins. in diam., brs. N. 75 3/4° E., 281 lks. dist., marked T6N R3E S17 BT.
A palo verde, 8 ins. in diam., brs. S. 78 3/4° E., 264 lks. dist., marked T6N R3E S20 BT.
A palo verde, 4 ins. in diam., brs. S. 44° W., 39 lks. dist., marked BT.
A palo verde, 6 ins. in diam., brs. N. 47 1/2° W., 134 lks. dist., marked T6N R3E S18 BT.

Land, S. 35 chs. and N. 26 chs. nearly level; remainder, gently rolling. Soil, sandy and gravelly, 2nd rate.

62 Subdivision lines of Township 6 North, Range 3 East.

Chains.

Timber, scattering palo verde and mesquite.
Undergrowth, dense greasewood and scattering scrub palo verde and mesquite and cactus.

-
- S.89°56'E., on a random line, bet. secs.17 and 20.
40.00 Set temp. $\frac{1}{4}$ sec.cor.
80.14 Intersect N. and S. line, 5 lks.S. of the cor. of secs.16, 17, 20 and 21.
Thence,
N.89° 58'W., on a true line, bet. secs.17 and 20.
Over rolling land, thru. scattering timber and undergrowth.
7.50 Descend 57 ft., over SW.slope.
Wash, 10 lks.wide, course SE.
Ascend .23 ft., over E.slope.
12.40 Spur, slopes SE.
Descend gradually over SW.slope.
29.40 Wash, 30 lks.wide, course SE. near head.
Ascend 20 ft., over SE.slope.
37.50 Descend gradually over SW.slope.
40.07 Set an iron post, 3 ft.long, 1 in.in diam., 28 ins.in the ground, for $\frac{1}{4}$.sec.cor., marked on brass cap,

 $\frac{1}{4}$ S 17

S 20

1922

from which,

A palo verde, 8 ins.in diam.; brs.N.58 $\frac{3}{4}$ °W., 140 lks.dist., marked $\frac{1}{4}$ S 17 BT.

A palo verde, 10 ins.in diam., brs.S. 38 lks. dist., marked $\frac{1}{4}$ S 20 BT.

- Continue over rolling land, thru. scattering timber and undergrowth.
Descend gradually over SWs slope.
41.25 Wash, 10 lks.wide, course SW.
Descend gradually over S. slope, to
66.25 Spur, slopes SW.
Descend gradually over SW.slope, to
76.00 Dry bed of East channel of Skunk Creek, 2 chs.wide, course SW. Thence over nearly level land, bet. channels of Skunk Creek.
80.14 The cor. of secs.17; 18, 19 and 20.
Land, E.76 chs. rolling; remainder, nearly level.
Soil, gravelly and rocky, 3rd rate.
Timber, scattering palo verde.
Undergrowth, scattering greasewood, scrub palo verde and mesquite.

-
- N.89°55'W., on random line, bet. secs.18 and 19.
40.00 Set temp. $\frac{1}{4}$ sec.cor.
79.74 Fall 14 lks.N. of the reestablished cor. of secs.18 and 19, hereinbefore described.
Thence,
N.89°59'E., on a true line, bet. secs.18 and 19.
Over rolling land, thru.scattering timber and dense undergrowth.
Ascend gradually over SW.slope to $\frac{1}{4}$ sec.cor.
21.90 Wash, 10 lks.wide, course SW.
38.75 Old road, brs.NE. and SW.
39.74 Set an iron post, 3 ft.long, 1 in. in diam., 24 ins. in the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,

Subdivision lines of Township 6 North, Range 3 East. 63

Chains.

$\frac{1}{4}$ S 18
S 19
1922

from which,

- A palo verde, 8 ins. in diam., brs. N.6 $\frac{1}{2}$ °W., 128 lks. dist., marked $\frac{1}{4}$ S 18 BT.
- A palo verde, 8 ins. in diam., brs. S.32 $\frac{1}{2}$ °E., 125 lks. dist., marked $\frac{1}{4}$ S 19 BT.

Continue over rolling land, thru. scattering timber and dense undergrowth.

Ascend gradually over SW. slope.

- 54.70 Descend gradually over SE. slope, to
- 69.55 Dry bed of west channel of Skunk Creek, 2 chs. wide, course SW. Thence over nearly level, land, bet. channels, of Skunk Creek.
- 77.63 Wash, 20 lks. wide, course SW.
- 79.74 The cor. of secs. 17, 18, 19 and 20. Land, W. 69 $\frac{1}{2}$ chs., rolling; remainder, nearly level. Soil, gravelly and rocky, 3rd rate. Timber, scattering palo verde and ironwood. Undergrowth, dense greasewood and scattering scrub palo verde and ironwood.

N. 0° 13' E., bet. secs. 17 and 18.

Over nearly level land, bet. dry channels of Skunk Creek, thru. scattering timber and dense undergrowth.

- 4.50 Wash, 50 lks. wide, course SE.
- 18.50 Wash, 1 ch. wide, course SE.
- 30.00 Dry bed of East channel of Skunk Creek, 1 ch. wide, course SE. Leave nearly level, and enter gently rolling land. Ascend gradually over SW. slope, to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 34 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
S 18 | S 17
1922

from which,

- An ironwood, 8 ins. in diam., brs. N. 43° E., 55 lks. dist., marked $\frac{1}{4}$ S 17 BT.
- A palo verde, 6 ins. in diam., brs. S. 79 $\frac{3}{4}$ ° W., 210 lks. dist., marked $\frac{1}{4}$ S 18 BT.

Continue over gently rolling land, thru. scattering timber and dense undergrowth.

- 40.20 Wash, 250 lks. wide, course SW. Ascend slightly over SE. slope, to
- 55.00 Wash, 20 lks. wide, course SE. Ascend gradually over SW. slope, to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 7, 8, 17 and 18, marked on brass cap,

T6N | R3E
S 7 | S 8
S 18 | S 17
1922

from which,

- A palo verde, 8 ins. in diam., brs. N. 76° E., 93 lks. dist., marked T6N R3E S8 BT.
- A mesquite, 8 ins. in diam., brs. S. 34 $\frac{1}{2}$ ° E., 92 lks. dist., marked T6N R3E S17 BT.
- A mesquite, 8 ins. in diam., brs. S. 60° W., 107 lks. dist., marked T6N R3E S18 BT.
- A palo verde, 10 ins. in diam., brs. N. 74 $\frac{1}{2}$ ° W., 162 lks. dist., marked T6N R3E S7 BT.

64. Subdivision lines of Township 6 North, Range 3 East.

Chains.

Land, S. 30 chs. nearly level; N. 50 chs., gently rolling.
Soil, gravelly and rocky, 3rd rate.
Timber, scattering palo verde and ironwood.
Undergrowth, dense greasewood and scattering palo verde
and ironwood.

- 40.00 S. 89° 58' E., on a random line, bet. secs. 8 and 17.
Set temp. $\frac{1}{4}$ sec. cor.
80.08 Intersect N. and S. line, 2 lks. S. of the cor. of secs.
8, 9, 16 and 17.
Thence,
N. 89° 59' W., on a true line, bet. secs. 8 and 17.
Over gently rolling land, thru. scattering timber and
undergrowth.
Descend gradually over rolling SW. slope to $\frac{1}{4}$ sec. cor.
10.30 Low spur, slopes SW.
17.00 Low spur, slopes SW.
40.04 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 8.
S 17
1922

from which,

- An ironwood, 12 ins. in diam., brs. N. 27 $\frac{1}{4}$ ° W., 130 lks.
dist., marked $\frac{1}{4}$ S 8 BT.
A palo verde, 10 ins. in diam., brs. S. 24° W., 110
lks. dist., marked $\frac{1}{4}$ S 17 BT.
Continue over gently rolling land, thru. scattering tim-
ber and undergrowth.
Descend gradually over SW. slope to sec. cor.
41.10 Old road, brs. SE. and NW.
54.00 Wash, 10 lks. wide, course SW.
62.40 Low spur, slopes SW.
80.08 The cor. of secs. 7, 8, 17 and 18.
Land, gently rolling.
Soil, gravelly and rocky, 3rd rate.
Timber, scattering palo verde and mesquite.
Undergrowth, scattering scrub palo verde and mesquite.

- 40.00 S. 89° 59' W., on random line, bet. secs. 7 and 18.
Set temp. $\frac{1}{4}$ sec. cor.
79.95 Fall 2 lks. S. of the reestablished cor. of secs. 7 and 18,
on the W. bdy. of the Tp., hereinbefore described.
Thence,
East, on a true line, bet. secs. 7 and 18.
Over rolling land, thru. scattering timber and dense
undergrowth.
Descend gradually over S. slope, to
3.70 Wash, 20 lks. wide, course SW.
Ascend 20 ft., over W. slope.
7.60 Point of spur, slopes SW.
Descend 22 ft., over SE. slope.
12.73 Wash, 10 lks. wide, course SW. Leave rolling, and enter
mountainous land.
Ascend 72 ft., over W. slope.
17.05 Point of spur, slopes SW.
Descend 65 ft., over SE. slope.
21.14 Wash, 10 lks. wide, course SW. near head.
Ascend 103 ft. over W. slope, to
26.05 Spur, slopes SW.
Ascend 10 ft., over S. slope, to
27.15 Ascend 133 ft., over NW. slope.
33.42 Ridge, brs. NE. and SW.

SOL 176

Subdivision lines of Township 6 North, Range 3 East. 65

Chains.

39.95 Descend 121 ft. over SE. slope, to
Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in
the ground to bed rock, deposit a stone, marked with
a cross (x) at base of post, and raise a mound of stone
around post for 1/4 sec. cor.; marked on brass cap,

1/4 S 7
S 18
1922

No trees suitable for bearing trees within limits.
42.00 Descend 25 ft., over S. slope, to
Spur, slopes SE.
55.00 Descend 203 ft., over NE. slope, to
Leave mountainous, and enter gently rolling land.
70.30 Descend 75 ft., over NE. slope.
Dry bed of Skunk Creek, 2 chs. wide, course SE.
75.00 Ascend 12 ft., over SW. slope.
76.70 Descend 10 ft., over E. slope.
Wash, 30 lks. wide, course SE.
79.95 Ascend 5 ft., over SW. slope, to
The cor. of secs. 7, 8, 17 and 18.
Land, W. 12 1/2 chs. rolling. E. 25 chs., gently rolling; re-
mainder, mountainous.
Soil, gravelly and rocky, 3rd rate.
Timber, scattering palo verde and mesquite.
Undergrowth, dense greasewood and scattering scrub palo
verde, mesquite and cactus.

N. 0° 13' E., bet. secs. 7 and 8.
Over gently rolling land, thru. scattering timber and
undergrowth.

7.10 Ascend gradually over SW. and W. slopes to 1/4 sec. cor.
Old road, brs. NE. and SW.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground for 1/4 sec. cor., marked on brass cap,

1/4
S 7 | S 8
1922

from which,

A mesquite, 6 ins. in diam., brs. S. 83 3/4° E., 138
lks. dist., marked 1/4 S 8 BT.
A palo verde, 8 ins. in diam., brs. N. 89 1/2° W., 163
lks. dist., marked 1/4 S 7 BT.

Continue over gently rolling land, thru. scattering timber
and undergrowth.

50.00 Ascend slightly over W. slope, to
Center of dry bed of Skunk Creek, 8 chs. wide, course SW.
65.00 Ascend slightly over SW. slope, to
Dry bed of Cottonwood Creek, 2 chs. wide, course SW.
80.00 Ascend gradually over SE. slope, to
Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins.
in the ground for cor. of secs. 5, 6, 7 and 8, marked
on brass cap,

T6N | R3E
S 6 | S 5
S 7 | S 8
1922

from which,

A palo verde, 6 ins. in diam., brs. N. 47 1/4° E., 149
lks. dist., marked T6N R3E S5 BT.

66 Subdivision lines of Township 6 North Range 3 East.

Chains.

A palo verde, 10 ins. in diam., brs. S. $29\frac{1}{2}^{\circ}$ E., 180
lks. dist., marked T6N R3E S8 BT.

An ironwood, 8 ins. in diam., brs. S. $40\frac{1}{2}^{\circ}$ W., 107
lks. dist., marked T6N R3E S7 BT.

An ironwood, 6 ins. in diam., brs. N. $62\frac{1}{2}^{\circ}$ W., 115
lks. dist., marked T6N R3E S6 BT.

Land, gently rolling.

Soil, gravelly and rocky, 3rd rate.

Timber, scattering palo verde and ironwood.

Undergrowth, scattering scrub mesquite and palo verde.

S. $89^{\circ}59'$ E., on a random line, bet. secs. 5 and 8.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.06 Intersect N. and S. line, 7 lks. N. of the cor. of secs. 4, 5, 8
and 9.

Thence,

N. $89^{\circ}56'$ W., on a true line, bet. secs. 5 and 8.

Over mountainous land, thru. scattering timber and under-
growth.

Ascend 103 ft., over NE. slope:

12.90 Spur, slopes NW.

Descend 243 ft., over SW. slope.

29.10 Dry bed of Skunk Creek, 2 chs. wide, course SW. Leave moun-
tainous, and enter gently rolling land.

Ascend slightly over S. slope, to

40.03 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in
the ground for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 5
S 8
1922'

from which,

A mesquite, 5 ins. in diam., brs. N. 71° W., 36 lks.
dist., marked $\frac{1}{4}$ S 5 BT.

An ironwood, 14 ins. in diam., brs. S. $22\frac{1}{2}^{\circ}$ W., 42 lks.
dist., marked $\frac{1}{4}$ S 8 BT.

Continue over gently rolling land, thru. scattering timber
and undergrowth.

Ascend gradually over S. slope.

50.00 Descend gradually over SW. slope, to

68.40 Center of dry bed of Cottonwood Creek, 3 chs. wide, course
SW.

Ascend gradually over SE. slope.

80.06 The cor. of secs. 5, 6, 7 and 8.

Land, E. 29 chs. mountainous; remainder, gently rolling.

Soil, gravelly and rocky, 3rd rate.

Timber, scattering palo verde, mesquite and ironwood.

Undergrowth, scattering scrub palo verde and mesquite.

West, on random line, bet. secs. 6 and 7.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.23 Fall 10 lks. N. of the reestablished cor. of secs. 6 and 7,
on the W. bdy. of the Tp., hereinbefore described.

Thence,

N. $89^{\circ}56'$ E., on a true line, bet. secs. 6 and 7.

Over mountainous land, thru. scattering timber and dense
undergrowth.

Descend 40 ft., over S. slope, to

1.83 Spur, slopes SE.

Descend 91 ft., over NE. slope, to

8.85 Descend 438 ft., over N. slope, to

28.68 Spur, slopes NE.

Descend 182 ft., over E. slope, to

40.23 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in

Subdivision lines of Township 6 North, Range 3 East.

Chains

the ground, for 1/4 sec.cor., marked on brass cap,

1/4 S 6
S 7
1922

from which,

A palo verde, 8 ins. in diam., brs. N.2°E., 93 lks. dist., marked 1/4 S 6 BT.

A palo verde, 4 ins. in diam., brs. S.55°W., 38 lks. dist., marked BT.

Continue over mountainous land, thru. scattering timber and dense undergrowth.

46.68 Descend 61 ft., over E. slope, to Wash, 20 lks. wide, course SE. Leave mountainous, and enter rolling land.

65.46 Descend 75 ft., over SE. slope, to Wash, 10 lks. wide, course SE.

Ascend 24 ft., over SW. slope.

72.95 Spur, slopes SE.

Descend 41 ft., over E. and SE. slopes, to

80.23 The cor. of secs. 5, 6, 7 and 8.

Land, W. - 46 1/2 chs., mountainous; remainder, rolling.

Soil, gravelly and rocky, 3rd rate.

Timber, scattering palo verde and ironwood.

Undergrowth, dense greasewood and scattering palo verde and mesquite, and cactus.

40.00 N. 0°13'E., on a random line, bet. secs. 5 and 6. Set temp. 1/4 sec. cor.

79.63 Fall 2 lks. E. of the cor. of secs. 5, 6, 31 and 32 on the N. bdy. of the Tp., hereinbefore described.

Thence,

S. 0°12'W., on a true line, bet. secs. 5 and 6.

Over rolling land, thru. scattering timber and dense undergrowth.

Descend gradually over SE. slope.

25.15 Wash, 10 lks. wide, course NE.

Ascend gradually over NE. slope, to

39.63 Set an iron post 3 ft. long, lin. in diam., 26 ins. in the ground for 1/4 sec. cor., marked on brass cap,

1/4 S 6 | S 5
1922

from which,

A palo verde, 4 ins. in diam., brs. N. 28 3/4° E., 46 lks. dist., marked BT.

A palo verde, 6 ins. in diam., brs. S. 39 3/4° W., 57 lks. dist., marked 1/4 S 6 BT.

Continue over rolling land, thru. scattering timber and dense undergrowth.

Descend gradually over E. and SE. slopes to

52.37 Wash, 10 lks. wide, course SE.

Ascend gradually over SE. slope, to

60.68 Wash, 20 lks. wide, course SE.

Ascend gradually over NE. and N. slopes.

76.50 Spur, slopes NE.

Descend 30 ft., over SE. slope, to

79.63 The cor. of secs. 5, 6, 7 and 8.

Land, rolling.

Soil, gravelly and rocky, 3rd rate.

Timber, scattering palo verde, ironwood and mesquite.

Undergrowth, dense scrub palo verde and mesquite, and scattering greasewood and cactus.

Chains.

FINAL FIELD TEST OF BUFF SOLAR TRANSIT NO. 9984.

Sept. 10, 1922. At camp, near Charles Beverley's house in sec. 16, T. 6 N., R. 3 E., G. & S. R. B. & M., Ariz., in latitude $33^{\circ}52'N.$, and longitude $112^{\circ}02'50''$, at 8h.00m. a.m., l.m.t., using the meridian determined by Polaris observation on August 10th as hereinbefore described, set off $33^{\circ}52'N.$ on the lat. arc, and $5^{\circ}6\frac{1}{2}'N.$ on the decl. arc, and determine a meridian with the solar, which agrees with the true meridian.

At apparent noon, with the lat. arc unchanged, observe the sun on the meridian; the resulting reading of the decl. arc is $5^{\circ}2'N.$, which agrees with the computed declination of the sun.

At 4h.00m.p.m., l.m.t., with the lat. arc unchanged, set off $4^{\circ}59'N.$ on the decl. arc, and determine a meridian with the solar, which agrees with the true meridian.

From the results of the above observations, conclude that the instrument is in satisfactory adjustment.

GENERAL DESCRIPTION.

The surface of this township varies from level to mountainous. About 5000 acres are level, about 3000 acres nearly level, about 3000 acres gently rolling, about 6000 acres rolling, and about 6000 acres mountainous.

The level surface is confined to the southwestern part but the other varieties are scattered:

The soil over the level land is sandy and gravelly, 2nd and 3rd rate, and the remainder of the township has a gravelly and rocky soil, 3rd and 4th rate.

There is a scattering growth of palo verde, ironwood and mesquite timber in nearly all sections.

In the western and southern parts there is a dense undergrowth of greasewood mixed with a scattering undergrowth of scrub palo verde, scrub mesquite and cactus, and in the other parts of the township, the undergrowth of same varieties occur in a scattering growth.

There is no water course carrying a permanent flow of water, the only water being furnished by Apache Spring in sec. 13, Box Spring in sec. 24, and a spring near Charles Beverley's house in sec. 16.

The principal water courses draining the township are Apache Creek in the eastern part, and Cottonwood Creek and Skunk Creek in the western part.

There are indications of deposits of gold, silver and copper in secs. 16, 21, 22, 24, 25, 35 and 36. There are mine shafts and prospect holes in these sections, an old smelter in sec. 16, and an old mill in sec. 36. There were no mining operations being carried on in the Tp. at the time of this survey.

The only settler in the Tp. is Charles Beverly in sec. 16. The Tp. is at present used for grazing purposes, as in many parts there is a fair growth of grass.