

3608

SRIG 126
1

BOOK "E"

4-679

BOOK 3608

FIELD NOTES

OF THE RESURVEY OF

The East and North Boundaries and

the survey of

The South Boundary and Subdivision Lines of

Township 7 North, Range 6 West

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

EXECUTED BY

William H. Thorn, U.S. Cadastral Engineer,

and

Ty White, U.S. Transitman

In the capacity of U. S. Surveyors, under Special Instructions dated May 20, 1921, issued by the United States Surveyor General to govern surveys included in Group No. 115, Arizona, which were approved by the Commissioner of the General Land Office, November 8, 1921, and Assignment Instructions dated October 23, 1922

Resurvey and Survey commenced December 17, 1922.

Resurvey and Survey completed January 3, 1923.

3608

3608


122
1A

3608

Book "E"
Group 115 - - - Arizona.

BOOK 3608

INDEX DIAGRAM.

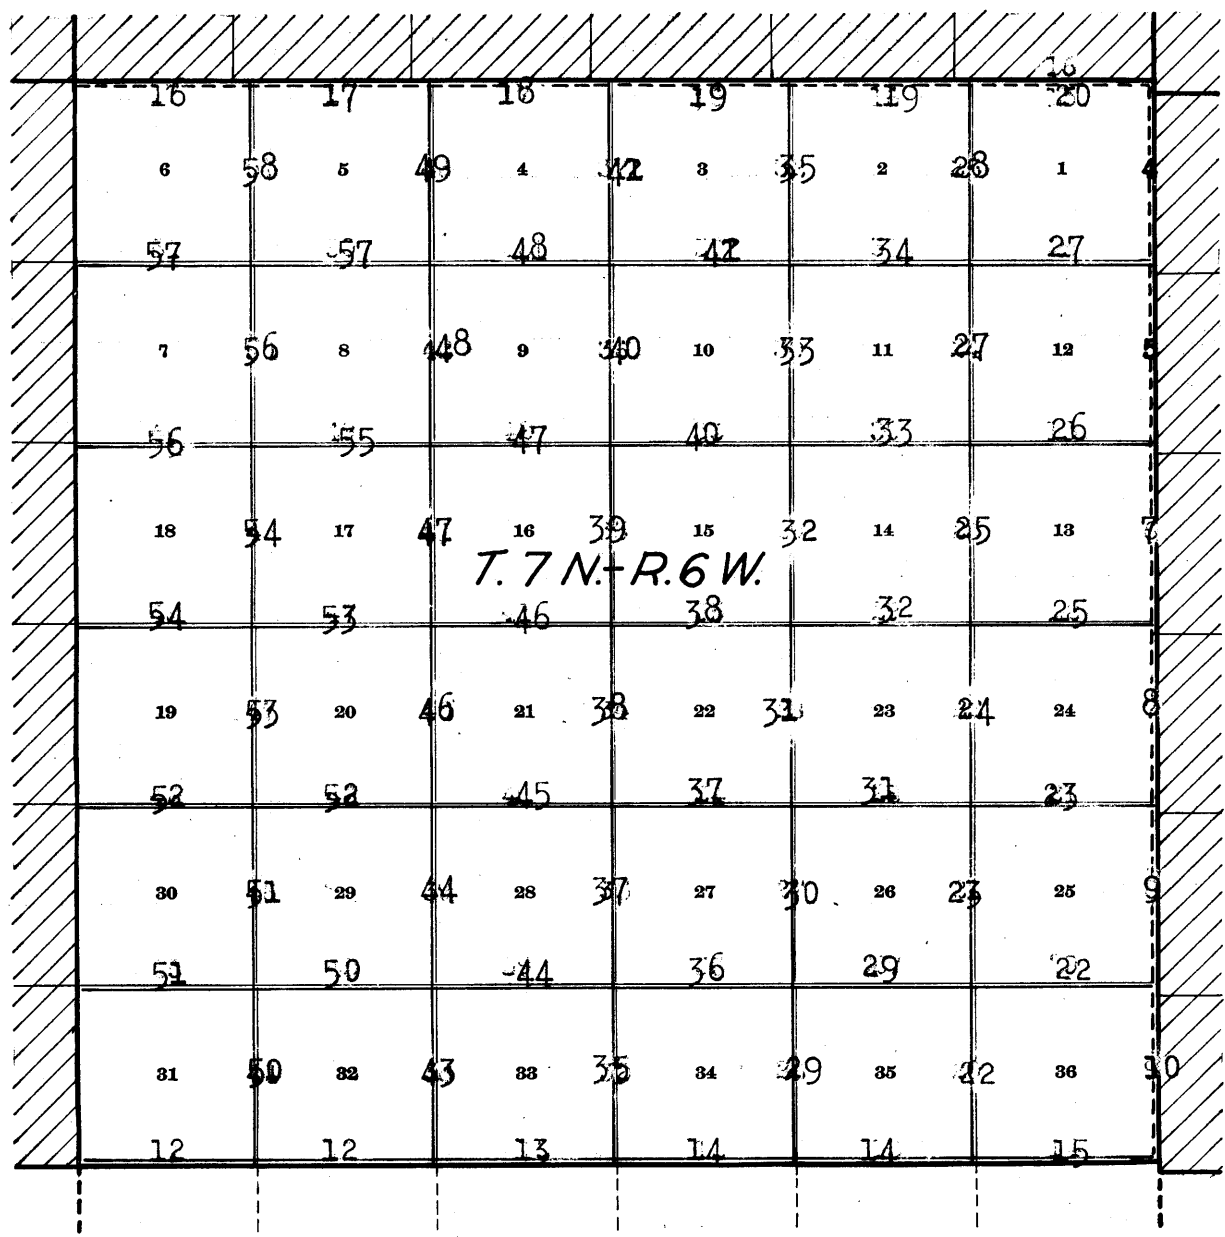

- Lines surveyed under this group.
- - - Lines resurveyed under this group.
- Accepted surveys.
- - - Unsurveyed.
- //// Areas surveyed as per accepted plats on file.

DATE DIAGRAM

Book "E"

Group 115 Arizona

Township 7 North, Range 6 West

1-3-23 6 1-3-23	1-3-23 5 1-3-23	1-2-23 4 1-2-23	12-30-22 3 12-30-22	12-28-22 2 12-28-22	12-29-22 1 12-28-22
1-2-23 7 1-2-23	1-2-23 8 1-2-23	1-2-23 9 1-2-23	12-30-22 10 12-30-22	12-28-22 11 12-27-22	12-29-22 12 12-27-22
1-2-23 18 1-2-23	1-2-23 17 1-2-23	12-29-22 16 12-29-22	12-30-22 15 12-29-22	12-27-22 14 12-27-22	12-26-22 13 12-26-22
12-30-22 19 12-30-22	12-30-22 20 12-29-22	12-29-22 21 12-29-22	12-29-22 22 12-27-22	12-26-22 23 12-26-22	12-26-22 24 12-23-22
12-30-22 30 12-30-22	12-30-22 29 12-29-22	12-29-22 28 12-29-22	12-29-22 27 12-26-22	12-26-22 26 12-23-22	12-23-22 25 12-23-22
12-16-22 31 12-30-22	12-16-22 32 12-29-22	12-16-22 33 12-29-22	12-18-22 34 12-26-22	12-18-22 35 12-23-22	12-18-22 36 12-23-22

Red lines indicate surveys executed by William M. Thorn, U. S. Cadastral Engineer on dates shown thereon.

Broken red lines indicate resurveys executed by William M. Thorn, U. S. Cadastral Engineer on dates shown thereon.

Blue lines indicate surveys executed by Ty White, U. S. Transitman, on dates shown thereon.

Broken blue lines indicate resurveys executed by Ty White, U. S. Transitman, on dates shown thereon.

Black lines indicate accepted surveys.

Resurveys & Surveys herein described, were executed on dates shown on diagram on page 1 hereof, by William H. Thorn, U. S. C. E., and Ty White, U. S. T., using respectively, Young & Sons light mountain transits No. 8592 and 8540, each equipped with full vertical circle and Smith solar attachment; unless otherwise specified, all azimuth determinations are accomplished with the solar attachment.

Field Test of Instrument No. 8592 by W. H. Thorn, U. S. Cadastral Engineer.

December 17, 1922: I examine the adjustments of the transit and correct all errors; then, to test the solar apparatus, by comparing its indications, resulting from observations made during a.m. and p.m. hours with a meridian established by Polaris observation, I proceed as follows:

At camp near the cor. of secs. 15, 16, 21 and 22, T. 7 N., R. 6 W., G. & S. R. B. and M., Arizona, lat. $33^{\circ}56\frac{1}{2}'N.$, long. $112^{\circ}52\frac{1}{2}'W.$, using the meridian established by Ty White, U. S. Transitman, as hereinafter described, at 9 hrs. 0 m., a.m., l.m.t., I set off $33^{\circ}56\frac{1}{2}'N.$ on the lat. arc; $23^{\circ}18\frac{1}{2}'S.$ on the decl. arc; and determine a meridian with the solar, which I find to agree with the true meridian.

At apparent noon, with the lat. arc unchanged, I observe the sun on the meridian; the resulting reading of the decl. arc is $23^{\circ}20'S.$, which agrees with the computed decl. of the sun.

At 3 hrs. 0 m., p.m., l.m.t., with the lat. arc unchanged, I set off $23^{\circ}19\frac{1}{2}'S.$ on the decl. arc, and determine a meridian with the solar, which I find to agree with the true meridian.

As all of the solar observations during the usual hours of solar work come within $1'30''$ of the true meridian, I conclude that the adjustment of the instrument is satisfactory.

Unless otherwise specified, all measurements are made with a Lufkin steel tape, 5 chs. in length, compared with a Lufkin 1 ch. standard steel tape and found correct. The measurements are made on the slope, the vertical angle determined and the slope measurements properly reduced to true horizontal distances.

Field Test of Instrument No. 8540 by Ty White, U. S. Transitman.

December 16, 1922: At camp near the cor. of secs. 15, 16, 21 and 22, T. 7 N., R. 6 W., G. and S. R. 3. and M., Arizona, lat. $33^{\circ}56\frac{1}{2}'N.$, long. $112^{\circ}52\frac{1}{2}'W.$, I examine the adjustments of the transit and correct all errors; then to test the solar apparatus, by comparing its indications, resulting from observations made during a.m. and p.m. hours with a meridian established by Polaris observation, proceed as follows:

With the telescope in the meridian, and elevated to the sun's altitude, I observe the sun's transit for time, noting the watch time of transit of each limb;

Mean watch time of apparent noon
12 hrs. 5 m. 3 sec.

Watch fast of local mean time 0.5 m.

At the same station, at 4 h 53 m. p.m., l.m.t., I make an hour angle observation on Polaris east of the meridian, making four observations, two each with the telescope in direct and reversed positions, and mark the mean point in the line thus determined on a peg driven firmly in the ground, 5 chs. N.

Watch time of observation, mean of four readings = 4 hrs. 58 m.

I lay off the azimuth of Polaris; $57^{\circ}10''$ to the west, and mark the meridian thus determined by a tack in a peg driven firmly in the ground, 5 chs. N.

December 17, 1922. At 9h.0m.a.m., l.m.t., I set off $33^{\circ}56\frac{1}{2}'$ N. on the lat. arc; $23^{\circ}18\frac{1}{2}'$ S. on the decl. arc; and determine a meridian with the solar, which I find to agree with the true meridian.

At apparent noon, with the latitude arc unchanged, I observe the sun on the meridian; the resulting reading of the decl. arc is $23^{\circ}20'S.$, which agrees with the computed decl. of the sun.

At 3h.0m.p.m., l.m.t., with the lat. arc unchanged, I set off $23^{\circ}19\frac{1}{2}'$ S. on the decl. arc; and determine a meridian with the solar, which I find to agree with the true meridian.

As all of the solar observations during the usual hours of solar work come within $1'30''$ of the true meridian, I conclude that the adjustment of the instrument is satisfactory.

Unless otherwise specified, all measurements are made with a Lufkin steel tape, 5 chs. in length, compared with a Lufkin 1 ch. standard steel tape, and found correct. The measurements are made on the slope, the vertical angle determined, and the slope measurements properly reduced to true horizontal distances.

4 Resurvey of the East bdy. of Township 7 North Range 6 West.

Chains.

The range line, bet. Ts. 7 and 8 N., Rs. 5 and 6 W. was surveyed by S.W. Foreman, U.S.D.S. in 1871 and 1872, establishing all corners thereon common to sections and quarter sections on both sides of the line. This range line thru. T. 8 N. was resurveyed in 1909 by J.F. Hesse, U.S.D.S., reestablishing all corners on the line including the township cors., with a common reference to the areas on both sides of the line. No subsequent retracement or resurvey of the range line in T. 8 N., and no retracement or resurvey of the range line in T. 7 N. is of record.

In 1914, W.H. Thorn, U.S.S., and W.K. Kierulff, U.S.T. surveyed the S. and W. boundaries and subdivision lines of T. 8 N., R. 6 W., closing the S. bdy. and subdivision lines of said Tp. against this range line in T. 8 N., and changing the corner of Ts. 7 and 8 N., Rs. 5 and 6 W. to refer to Ts. 7 and 8 N., R. 5 W. only, and all corners on the range line N. therefrom to refer to areas E. of the line only. The closing cor. of Ts. 7 and 8 N., R. 6 W. then became the NE. cor. of T. 7 N., R. 6 W.

The following notes describe a resurvey of the East bdy. of T. 7 N., R. 6 W., combined with a resurvey of the West bdy. of T. 7 N., R. 5 W. as two sets of corners are required on the range line owing to the offset developed by the closing of the township boundary between Ts. 7 and 8 N., R. 6 W.

Retracement for Resurvey.

From the closing cor. of Ts. 7 and 8 N., R. 6 W., S. 0° 1' W. (record course) on random line.

6.30 Intersect the cor. of Ts. 7 and 8 N., R. 5 W.

Thence,

South (record course) on random line, searching diligently at record intervals for the original corners. Fail to find trace of any old corner; and at

480.00 (Record dist.) Diligent search in this vicinity failing to reveal any trace of the old township cor., set temp. cor. of Ts. 6 and 7 N., R. 5 W.

The range line thru. T. 6 N., has never been surveyed; therefore in order to locate an old corner which can be used as a basis for reestablishment of this Tp. cor. by proportionate measurement, begin at the temp. Tp. cor., and retrace the South bdy. of T. 7 N., R. 5 W., searching diligently at record intervals for the old corners. Fail to find any trace of any corner on this line; therefore, abandon the attempt to reestablish the corner of Ts. 6 and 7 N., R. 5 W. by proportionate measurement between old corners, and return to the closing corner of Ts. 7 and 8 N., R. 6 W., and make an independent resurvey of the line as described as follows:

Resurvey:

The closing cor. of Ts. 7 and 8 N., R. 6 W. is an iron post, 3 ins. in diam., projecting 24 ins. above ground, firmly set in ground and mound of stone, properly marked on brass cap, and witnessed by a mound of stone, W. of cor. No bearing trees.

Thence,

S. 0° 1' W., on true line, on E. bdy. of sec. 1.

Over rolling and mountainous land, thru. scattering timber and dense undergrowth.

Ascend 104 ft., over N. slope, to

6.30 Intersect the cor. of Ts. 7 and 8 N., R. 5 W., which is a malpais stone 12x10x10 ins. above ground, firmly set, marked 8 N. on NE. face, 5 W. on SE. face, and 6 notches

Resurvey of East bdy. of Township 7 North, Range 6 West. 5

Chains.


on each of E., N. and S. edges, and witnessed by a mound of stone E. of cor. No bearing trees.

Thence, South, on a true line, continuing measurement. Descend 55 ft., over SE. slope.

16.15 Wash, 20 lks. wide, course NE. Ascend 95 ft., over NW. slope.

31.20 Ridge, brs. NE. and SW. Descend 76 ft., over SE. slope, to


40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 1 only, marked on brass cap,



1922

No bearing trees available. Raise a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, W. of cor. Descend 30 ft., over SE. slope, to

46.30 (40.00 chs. S. from cor. of Ts. 7 and 8 N., R. 5 W.) Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 6 only, marked on brass cap,



1922

from which, A mesquite, 10 ins. in diam., brs. N. 80° E., 102 lks. dist., marked 1/4 S 6 BT.


No other bearing tree available. Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor. Descend 12 ft., over SE. slope.

50.70 Wash, 50 lks. wide, course NE. Ascend 110 ft., over NW. slope.

63.30 Spur, slopes NE. Descend 32 ft., over SE. slope.

72.90 Head of wash, course NE. Ascend 65 ft., over NW. slope, to

80.00 Spur, slopes NE. Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bed rock, deposit a stone, marked with a cross (x) at base of post, and raise a mound of stone around post, for reestablished cor. of secs. 1 and 12 only, marked on brass cap,



1922

No bearing trees available. Land, rolling and mountainous. Soil, rocky, 4th rate; malpais formation. Timber, palo verde and mesquite. Undergrowth, catclaw, greasewood and ocotillo.

South, on a true line, on E. bdy. of sec. 12. Over mountainous land, thru. scattering timber and dense undergrowth.

6.30 Descend 38 ft. over SE. slope, to (80.00 chs. south from cor. of Ts. 7 and 8 N., R. 5 W.) Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bed rock, deposit a stone, marked with

6 Resurvey of the East bdy. of Township 7 North, Range 6 West.

Chains.

a cross (x) at base of post, and raise a mound of stone, around post, for reestablished cor. of secs. 6 and 7 only, marked on brass cap.

T7N	T7N
T7N	S 6
R6W	S 7
S12	R5W
1922	

No bearing trees available. Descend slightly over SE. slope, to

- 7.40 Wash, 10 lks. wide, course E.
Ascend 25 ft., over N. slope.
- 13.30 Spur, slopes E.
Descend 45 ft., over S. slope.
- 18.55 Ascend 36 ft., over N. slope.
- 23.26 Ridge, brs. E. and W.
Descend 110 ft., over S. slope.
- 38.70 Wash, 70 lks. wide, course E.
Ascend 10 ft., over NE. slope, to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 12 only, marked on brass cap,

$\frac{1}{4}$ S12
1922

No bearing trees available.

- 46.30 Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Descend 45 ft., over SE. slope, to (40.00 chs. S. from cor. of secs. 6 and 7) Set an iron post 3 ft. long, 1 in. in diam., 10 ins. in the ground, to bed rock, supported in a mound of stone for reestablished $\frac{1}{4}$ sec. cor. of sec. 7 only, marked on brass cap,

$\frac{1}{4}$ S 7
1922

No bearing trees available.

- 51.30 Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, E. of cor. Ascend 64 ft., over NW. slope.
Spur, slopes NE.
- 60.60 Descend 61 ft., over SE. slope.
Wash, 20 lks. wide, course NE.
Ascend 145 ft., over NW. slope.
- 75.50 Spur, slopes NE.
Descend 20 ft., over SE. slope, to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in the ground to bed rock, supported in a mound of stone, for reestablished cor. of secs. 12 and 13 only, marked on brass cap,

T7N	
S12	T7N
S13	R5W
R6W	S 7
1922	

No bearing trees available.

Raise a mound of stone 2 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor. Land, mountainous.
Soil, rocky, 4th rate, malpais formation.
Timber, mesquite and palo verde.
Undergrowth, greasewood, ocotillo and cactus.

Resurvey of East boundary of Township 7 North, Range 6 West. 7

Chains.

South, on a true line, on E. bdy. of sec. 13.
Over mountainous land, thru. scattering timber and dense undergrowth.

6.20 Descend 64 ft., over SE. slope.
Wash, 10 lks. wide, course E.

6.30 Ascend slightly over N. slope, to
Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bed rock, supported in a mound of stone, for reestablished cor. of secs. 7 and 18 only, marked on brass cap,

T7N
T7N | S 7
R6W | S 18
S13 | R5W
1922

18.30 No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor. Asc. 83 ft., over N. slope.
Ridge, brs. E. and W.

29.45 Descend 115 ft., over S. slope, to
Wash, 20 lks. wide, course SE. Thence over rolling land.

38.90 Descend 60 ft., over SE. slope, to
Wash, 20 lks. wide, course SE.

40.00 Ascend 25 ft., to
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for reestablished sec. cor. of sec. 13 only, marked on brass cap, sec. cor. of sec. 18 only, marked on brass cap,

1/4 S13
1922

46.30 No bearing trees available.
Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
Descend 20 ft., over SE. slope, to

(40.00 chs. S. from cor. of secs. 7 and 18) Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bed rock, supported in a mound of stone, for reestablished 1/4 sec. cor. of sec. 18 only, marked on brass cap,

1/4 S18
1922

54.10 No bearing trees available.
Raise a mound of stone, 3 1/2 ft. base, 2 ft. high, E. of cor.
Descend 40 ft., over SE. slope.

61.80 State Highway brs. E. to Wickenburg, and W. to Aguila.
Wash, 50 lks. wide, course E.

69.30 Ascend 80 ft., over N. slope:
Spur, slopes E.

75.70 Descend 30 ft., over SE. slope.
Wash, 10 lks. wide, course E.

80.00 Ascend 20 ft., over N. slope, to
Set an iron post, 3 ft. long, 2 ins. in diam., 14 ins. in

the ground to bed rock, supported in a mound of stone, for reestablished cor. of secs. 13 and 24 only, marked on brass cap,

T7N | T7N
S13 | R5W
S24 | S18
R6W
1922

No bearing trees available.
Raise a mound of stone, 2 1/2 ft. base, 2 ft. high, W. of cor.
Land, rolling and mountainous.

8 Resurvey of East bdy. of Township 7 North, Range 6 West.

Chains.

Soil, rocky, 4th rate, malpais and granite formation.
Timber, palo verde and mesquite.
Undergrowth, greasewood, catclaw, crucifixion thorn, ocotillo and cactus.

South, on a true line, on E. bdy. of sec. 24.
Over mountainous land, thru. scattering timber and dense undergrowth.

6.30 Ascend 28 ft., over N. slope, to
(80.00 chs. S. from cor. of secs. 7 and 18) Set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in the ground to bed rock, supported in a mound of stone, for reestablished cor. of secs. 18 and 19 only, marked on brass cap,

T7N | T7N
R6W | S18
S24 | S19
R5W
1922

No bearing trees available.
Raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor.
Ascend 67 ft., over N. slope.

14.30 Spur, slopes E.
Descend 132 ft., over S. slope.

26.70 Wash, 10 lks. wide, course E.
Ascend 75 ft., over N. slope, to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bed rock, supported in a mound of stone for reestablished $\frac{1}{4}$ sec. cor. of secs. 24 only, marked on brass cap,

$\frac{1}{4}$ S24 |
1922

No bearing trees available.
Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
Ascend 55 ft., over N. slope, to

46.30 (40.00 chs. S. from cor. of secs. 18 and 19) Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bed rock, supported in a mound of stone, for reestablished $\frac{1}{4}$ sec. cor. of sec. 19 only, marked on brass cap,

$\frac{1}{4}$ S19
1922

No bearing trees available.
Raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, E. of cor.
Ascend 55 ft. over N. slope, to

52.20 Ridge, brs. E. and W. of sec. 24 and 19) Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground to bed rock, supported in a mound of stone, for reestablished cor. of secs. 24 and 25 only, marked on brass cap,

74.64 Descend, 160 ft., over SE. slope, to
Wash, 50 lks. wide, course E. Thence over rolling land, to

80.00 Ascend gradually over NW. slope, to
Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for reestablished cor. of secs. 24 and 25 only, marked on brass cap,

T7N | T7N
S24 | R5W
S25 | S19
R6W
1922

No bearing trees available.
Raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 2 ft. high, W. of cor.
Land, rolling and mountainous.

Resurvey of East bdy. of Township 7 North, Range 6 West. 9

Chains.

Soil, rocky, 4th rate, malpais and granite formation.
Timber, palo verde and mesquite.
Undergrowth, greasewood, cactus, catclaw, yucca and ocotillo.

6.30

South, on a true line on E. bdy. of sec. 25.
Over rolling land, thru. scattering timber and undergrowth.
Ascend slightly over NW. slope, to
(80.00 chs. S. from cor. of secs. 18 and 19) Set an iron post
3 ft. long, 2 ins. in diam., 26 ins. in the ground, for
reestablished cor. of secs. 19 and 30 only, marked on
brass cap,

T7N | T7N
R6W | S19
S25 | S30
R5W
1922

40.00

No bearing trees available. Raise a mound of stone, 2 1/2 ft.
base, 2 ft. high, E. of cor.
Ascend gradually over NW. and W. slopes, to
Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the
ground to bed rock, supported in a mound of stone for
reestablished 1/4 sec. cor. of sec. 25 only, marked on
brass cap,

1/4 S25 |

1922

41.10

No bearing trees available.
Raise a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, W. of cor.
Ascend slightly over W. slope, to
Wash, course NW.

43.30

From this point, prospect hole brs. West 10 lks. dist.

46.30

(40.00 chs. S. from cor. of secs. 19 and 30) Set an iron post,
3 ft. long, 1 in. in diam., 26 ins. in the ground, for
reestablished 1/4 sec. cor. of sec. 30 only, marked on
brass cap,

1/4 S30 |

1922

76.30

No bearing trees available. Raise a mound of stone, 3 ft.
base, 2 ft. high, E. of cor.
Thence over mountainous land, ascending 300 ft., over N.
slope.

80.00

Ridge, brs. E. and W.
Descend 35 ft., over SE. slope, to
Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in
the ground, for reestablished cor. of secs. 25 and 36
only, marked on brass cap,

T7N | T7N
S25 | R5W
S36 | S30
R6W |

1922

No bearing trees available.
Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
Land, rolling and mountainous.
Soil, rocky, 4th rate; malpais formation.
Timber, palo verde and mesquite.
Undergrowth, greasewood, cactus, yucca and ocotillo.

10 Resurvey of East bdy. of Township 7 North, Range 6 West.
Chains.

South, on a true line, on E. bdy. of sec. 36.
 Over mountainous land, thru. scattering timber and under-
 growth.
 Descend 14 ft., over SE. slope.
 0.40 Wash, 20 lks. wide, 5 ft. deep, course E. near head.
 Ascend 25 ft., to
 6.30 (80.00 chs. S. from cor. of secs. 19 and 30) Set an iron
 post, 3 ft. long, 2 ins. in diam., on surface rock, de-
 posit a stone marked with a cross (x) at base of post,
 and raise a mound of stone around post, for reestab-
 lished cor. of secs. 30 and 31, only, marked on brass
 cap,

	T7N
T7N	S30
R6W	S31
S36	R5W
1922	

No bearing trees available. Asc. 185 ft.
 23.00 Spur, slopes E.
 Descend 115 ft., over S. slope.
 30.30 Bottom of gulch, 1 ch. wide, course SE.
 Ascend 21 ft.

33.30 Spur, slopes SE.
 Descend 60 ft., over SW. slope.
 35.40 Gulch, course SE.

Ascend 120 ft., over NE. slope, to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., on surface
 rock, deposit a stone marked with a cross (X) at base
 of post, and raise a mound of stone around post, for
 reestablished $\frac{1}{4}$ sec. cor. of sec. 36 only, marked on
 brass cap,

$\frac{1}{4}$ S36

1922

No bearing trees available.
 Ascend 7 ft., over NE. slope.
 40.80 Ridge, brs. NW. and SE.

Descend 94 ft., over SW. slope, to
 46.30 Set an iron post, 3 ft. long, 1 in. in diam., on surface
 rock, over a cross (x) marked at exact cor. point, and
 raise a mound of stone around post, for reestablished
 $\frac{1}{4}$ sec. cor. of sec. 31 only, marked on brass cap,

$\frac{1}{4}$ S31

1922

No bearing trees available.
 Descend 50 ft.
 48.50 Wash, 20 lks. wide, course SE.
 Ascend 20 ft., over NE. slope.

55.70 Descend 55 ft., over SE. slope.
 67.30 Draw, course E.

Ascend 175 ft., over N. slope.
 78.20 Ridge, brs. NW. and SE.

Descend 45 ft., over SW. slope, to
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., on surface
 rock, over a cross (x) marked at exact cor. point, and
 raise a mound of stone, 4 ft. base, 3 ft. high around
 post, for reestablished cor. of T. 7 N., R. 6 W. (SE. cor.)
 marked on brass cap,

T7N
R6W
S36

1922

Resurvey of East bdy. of Township 7 North, Range 6 West. 11

Chains.

No bearing trees available.

Thence,

South on true line, completing the resurvey of the W.bdy. of T.7 N., R.5 W.

6.30 Descend 230 ft., over SW. slope, to (80.00 chs. S. from cor. of secs. 30 and 31) Set an iron post 3 ft. long, 2 ins. in diam., 15 ins. in the ground to bed rock, and raise a mound of stone, 3 ft. base, 20 ins. high around post, for reestablished cor. of T.7 N., R.5 W. (SW.cor.) marked on brass cap,

T7N
R5W
S31

1922


No bearing trees available. Raise a mound of stone 3 ft. base, 2 ft. high, NE. of cor.

Land, mountainous.

Soil, rocky, 4th rate, malpais formation.

Timber, palo verde, mesquite and ironwood.

Undergrowth, greasewood, catclaw, and cactus.

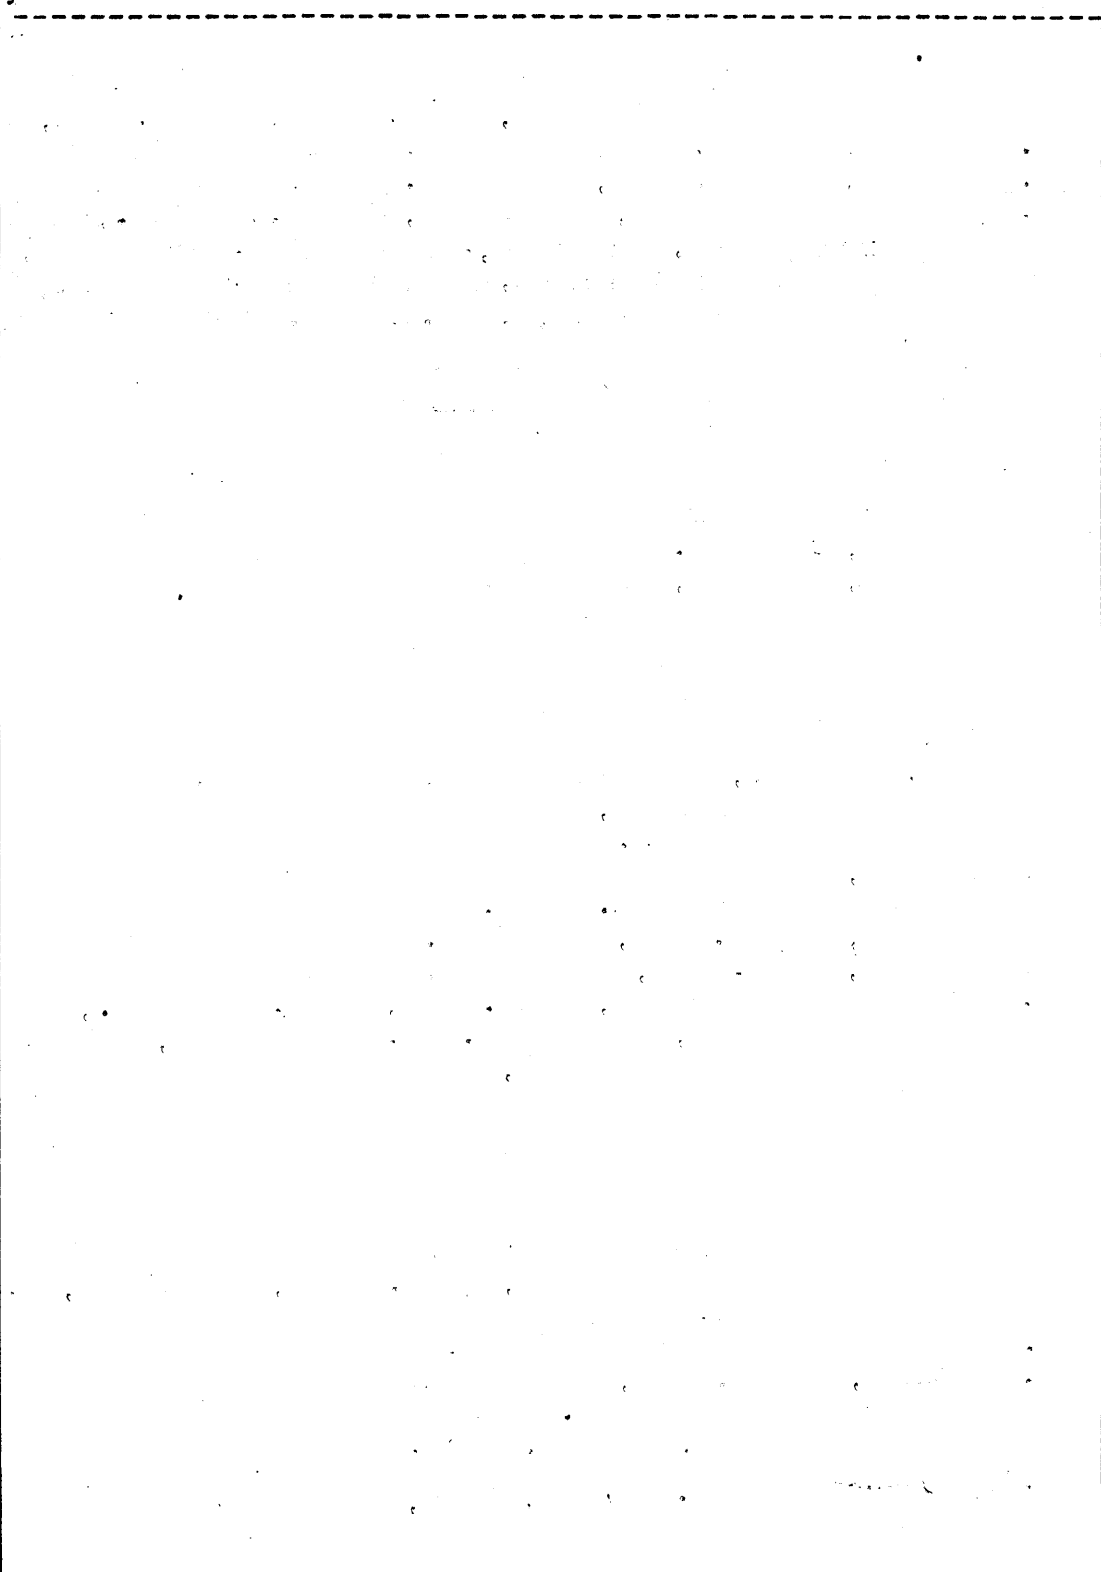

12 Survey of the South bdy. of Township 7 North, Range 6 West.

Chains.

From the reestablished cor. of T. 7 N., R. 6 W. (SE. cor.), or hereinbefore described, West, on a random line, along the S. bdy. of T. 7 N., R. 6 W., setting temp, $\frac{1}{4}$ sec. and sec. cors. at intervals of 40.00 chs.; and at 499.84 chs., fall 18 lks. S. of the cor. of Ts. 6 and 7 N., Rs. 6 and 7 W., which is an iron post, 3 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by 4 pits, one each E., W., N. and S. of cor., and mound of earth, S. of cor.

No bearing trees. The falling answers to a correction of $0^{\circ}11'$, br, 2 lks. N. per mile, counting from SE. cor. of the Tp.

From the cor. of Ts. 6 and 7 N., Rs. 6 and 7 W., S. $89^{\circ}59'E.$, on a true line, along the S. bdy. of sec. 31. Over rolling land, thru. scattering timber and undergrowth. Ascend gradually over NW. slope.

2.05 Wash, 3 lks. wide, course NW.
15.85 Wash, 5 lks. wide, course NW.
50.84 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 31, T. 7 N., R. 6 W., marked on brass cap,

1/4 S 31

1922

No bearing trees available.

66.85 Raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor.
73.35 Wash, 15 lks. wide, course N. $15^{\circ}E.$
90.84 Wash, 10 lks. wide, course N. $45^{\circ}W.$
Set an iron post, 3 ft. long, 2 ins. in diam., on surface of rock, deposit a stone, marked with a cross (x) at base of post, and raise a mound of stone around post, for cor. of secs. 31 and 32, T. 7 N., R. 6 W., marked on brass cap,

T7N	R6W
S31	S32

1922

No bearing trees available.

Land, rolling.
Soil, gravelly, 3rd rate.
Timber, palo verde.
Undergrowth, cactus and greasewood.

S. $89^{\circ}59'E.$, on a true line, along the S. bdy. of sec. 32. Over rolling land, thru. scattering timber and undergrowth. Ascend gradual W. slope.

4.00 Spur, slopes N.
Descend gradual W. slope.
11.90 Wash, 10 lks. wide, course N.
19.50 Wash, 5 lks. wide, course NW.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 32, T. 7 N., R. 6 W., marked on brass cap,

1/4 S 32

1922

No bearing trees available.

Raise a mound of stone, 4 ft. base, 3 ft. high, N. of cor.
Ascend 25 ft.
44.40 Descend gradually over NE. slope.
67.00 Wash, 5 lks. wide, course NE. Leave rolling and enter mountainous land.
Ascend 145 ft. over NW. slope.
76.10 Descend 85 ft. over NE. slope, to

Survey of South bdy. of Township 7 North, Range 6 West. 1213

Chains.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in the ground to bed rock, deposit a stone, marked with a cross (x) at base of post, and raise a mound of stone around post, for cor. of secs. 32 and 33, marked on brass cap,

T7N R6W
S32 S33

1922

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 1/2 ft. high, N. of cor.

Land, rolling and mountainous.

Soil, rocky, 3rd rate.

Timber, palo verde.

Undergrowth, greasewood and cactus.

S. 89° 59' E., on a true line, along the S. bdy. of sec. 33. Over rolling land, thru. scattering timber and undergrowth.

Descend gradually over NE. slope.

4.60 Wash, 8 lks. wide, course NE.

Ascend 95 ft., over NW. slope.

17.30 Ridge, brs. NE. and SW.

Descend 45 ft., over SE. slope, to

25.90 Wash, 5 lks. wide, course NE.

Descend 35 ft., over NE. slope, to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor. of sec. 33, T. 7 N., R. 6 W., marked on brass cap,

~~S~~ 33

1922

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 1/2 ft. high, N. of cor.

41.30 Wash, 5 lks. wide, course NE.

Ascend gradually over SW. slope.

50.40 Descend 15 ft.

57.80 Ascend 45 ft., over W. slope.

62.00 Ridge, brs. NE. and SW.

Descend 45 ft., over E. slope.

69.00 Wash, 20 lks. wide, course S. 60° E. near head.

Ascend gradually over SW. and S. slopes, to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 33 and 34, T. 7 N., R. 6 W., marked on brass cap,

T7N R6W
S33 S34

1922

No bearing trees available.

Raise a mound of stone, 4 ft. base, 3 ft. high, N. of cor.

Land, rolling and hilly.

Soil, gravelly and rocky, 3rd rate.

Timber, palo verde.

Undergrowth, cactus.

14 ~~Re~~Survey of ^{South} ~~East~~ bdy. of Township 7 North, Range 6 West.

Chains.

S. 89°59'E., on a true line, along the S. bdy. of sec. 34.
Over rolling land, thru. scattering timber and undergrowth.
Ascend gradually over S. slope.
4.00 Descend slightly.
4.60 Wash, 5 lks. wide, course SE.
Ascend 70 ft., over SW. slope.
18.00 Old road, brs. N. and S.
Descend slightly.
18.30 Wash, 30 lks. wide, course S.
Ascend 15 ft.
21.40 Descend 10 ft.
23.90 Wash, 5 lks. wide, course SW.
Ascend 65 ft., over SW. slope.
26.45 Descend 10 ft.
27.50 Wash, 5 lks. wide, course S. 45°W.
Ascend 44 ft., over SW. slope.
32.45 Descend 80 ft., over SE. slope, to
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in
the ground to bed rock, supported in a mound of stone
for $\frac{1}{4}$ sec. cor. of sec. 34, T. 7 N., R. 6 W., marked on
brass cap,

 $\frac{1}{4}$ S 34

1922

No bearing trees available.
Raise a mound of stone, 5 ft. base, 3 ft. high, N. of cor.
Descend 10 ft., over SE. slope.
41.30 Wash, 10 lks. wide, course SW.
Ascend slightly over NW. slope.
42.00 Low ridge, brs. NE and SW.
Descend 70 ft., over SE. slope.
53.50 Ascend 50 ft., over S. and SW. slopes.
67.80 Same ridge, brs. NW. and SE.
Descend 5 ft., over NE. slope.
69.30 Wash, 10 lks. wide, course NW.
Ascend gradually over NW. slope, to
79.80 Head of draw, course NE.
Ascend slightly over N. slope, to
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in
the ground to bed rock, supported in a mound of stone,
for cor. of secs. 34 and 35, T. 7 N., R. 6 W., marked on
brass cap,

T7N R6W

S34 | S35

1922

from which,
A palo verde, 4 ins. in diam., brs. N. 43°W., 41
lks. dist., marked BT.
No other bearing tree available.
Raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 1 $\frac{1}{8}$ ft. high, N. of cor.
Land, rolling.
Soil, gravelly and rocky, 3rd and 4th rate.
Timber, palo verde.
Undergrowth, cactus.

S. 89°59'E., on a true line, along the S. bdy. of sec. 35.
Over rolling land, thru. scattering timber and under-
growth.
Ascend gradually over N. slope.
3.00 Descend 25 ft., over NE. slope.
6.60 Wash, 30 lks. wide, course N. 30°W.
Ascend 112 ft., over W. slope.
14.60 Ridge, brs. N. 30°W. and S. 30°E. Desc. 75 ft., over NE. slope.
20.00 Ascend 50 ft., over N. and NW. slopes to $\frac{1}{4}$ sec. cor.
31.80 Old road, brs. N. and S.

Survey of South bdy. of Township 7 North, Range 6 West. 15

Chains.

39.70 Old road, brs. NW. and SE.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 35, T.7 N., R.6 W., marked on brass cap,

1/4 S 35
 1922

No bearing trees available.
 Dig pits, 18x18x12 ins., one each E. and W. of post, 3 ft. dist.

48.50 Descend gradually over N. slope.
 Wash, 3 lks. wide, course NW.
 Ascend gradually over W. slope.
 70.00 Low ridge, brs. NW. and SE.
 Descend gradually over E. slope.
 78.20 Wash, 5 lks. wide, course SW. near head.
 Ascend 15 ft., over SW. slope, to
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 35 and 36, T.7 N., R.6 W., marked on brass cap,

T7N R6W
S35 S36
 1922

No bearing trees available.
 Raise a mound of stone, 3 ft. base, 2 1/2 ft. high, N. of cor.
 Land, rolling and mountainous.
 Soil, gravelly, 3rd and 4th. rate.
 Timber, palo verde.
 Undergrowth, cactus.

 S. 89°59'E. on a true line, along S. bdy. of sec. 36.
 Over rolling and mountainous land, thru. scattering timber and undergrowth. Asc. 87 ft., over SW. slope.
 4.40 Ridge, brs. N. 30°W. and S. 30°E. Desc. 25 ft. over NE. slope.
 11.00 Bottom of ravine, 4 lks. wide, course S. 45°E.
 Ascend 115 ft., over SW. slope.
 18.30 Ridge, brs. NW. and SE. Desc. 100 ft., over NE. slope, to
 32.50 Head of ravine, course N. 70°E. Desc. 50 ft., over NE. slope, to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in the ground to bedrock, deposit a stone, marked with a cross (x) at base of post, and raise a mound of stone around post for $\frac{1}{4}$ sec. cor. of sec. 36, T.7 N., R.6 W., marked on brass cap,

1/4 S 36
 1922

45.00 No bearing trees available. Desc. 25 ft., over NE. slope, to
 Wash, 30 lks. wide, course S. from NW. Asc. 70 ft. over W. slope.
 47.50 Ridge, brs. N. and S. Desc. 70 ft., over E. slope, to
 52.50 Wash, 10 lks. wide, course SE. Desc. 29 ft., over SE. slope.
 58.30 Bottom of ravine, 15 lks. wide, course S. Asc. 53 ft. over W. slope, to
 64.00 Point of spur, slopes SW. Asc. 195 ft., over S. and SW. slopes, to
 80.00 The reestablished cor. of T.7 N., R.6 W. (SE. cor.), as hereinbefore described.
 Land, rolling and mountainous.
 Soil, rocky, 4th rate.
 Timber, palo verde.
 Undergrowth, greasewood and cactus.

16 Resurvey of North bdy. of Township 7 North, Range 6 West.

Chains.

This township boundary was surveyed in 1914 by W.K. Kierulff, U.S. Transitman, who established the corners for subdivision of T.8 N., R.6 W. at intervals of 40.00 chs., counting from the West, and placing an excess measurement of 9.43 chs. against the range line bet. Ranges 5 and 6 West. The sec. and $\frac{1}{4}$ sec. cors. were iron posts with brass caps marked and witnessed with a common reference to areas both N. and S. of the Tp. bdy. The subdivision of T.7 N., R.6 W., executed as hereinafter described, places the excess or deficiency in measurements against the N. and W. bdrs. of said township; therefore, it becomes necessary to establish a new set of cors. on the N. bdy. of T.7 N., R.6 W., which refer to areas in such Tp. only, and change the markings and accessories of the old cors. in such manner as to give reference to the areas in T.8 N., R.6 W. only.

The subdivision lines of T.7 N., R.6 W. are surveyed North to intersection with the N. bdy. of the Tp., and closing cors. established; then, $\frac{1}{4}$ sec. cors. are established for the $\frac{1}{4}$ secs. of T.7 N., R.6 W. at midpoints between said closing cors. except on N. bdy. of sec. 6 where $\frac{1}{4}$ sec. cor. is established at 40.00 chs. W. from C.C. of secs. 5 and 6.

Preliminary to the resurvey of the line, a retracement of two miles thereof is made S. of secs. 34 and 35, and the courses and measurements between the old cors. are found to agree with the record; therefore, no retracement of the other portion of the line is made, and the record data of the survey of this Tp. bdy. is accepted and used as a basis for the establishment of the new set of cors. referring to areas in T.7 N., R.6 W. only. The offset measurements between the two sets of $\frac{1}{4}$ sec. cors., and between the sec. cors. of T.8 N., R.6 W. and the closing cors. of T.7 N., R.6 W. are the only measurements actually chained at this time, but in the following notes these measurements are combined with the record so as to present the resurvey of the N. bdy. of T.7 N., R.6 W. in proper form, omitting however the topographical features and other similar data, for description of which reference must be made to the record of the survey of the Tp. bdy.

The cor. of Ts. 7 and 8 N., Rs. 6 and 7 W. is an iron post, 3 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by four pits, one each, E., W., N. and S. of post, and mound of earth S. of cor.

No bearing trees.

Thence

East, on true line, on N. bdy. of sec. 6.

40.00

The original $\frac{1}{4}$ sec. cor. of secs. 6 and 31, which is an iron post, 1 in. in diam., projecting 10 ins. above ground, firmly set, properly marked on brass cap for reference to the quarters of said sections and witnessed by two pits, one each E. and W. of post, and a mound of earth, N. of cor.

No bearing trees.

Alter this cor. to refer to the quarters of sec. 31 only by changing the markings on the brass cap to read:

1/4 S 31

1914-23

No bearing trees available.

Chain measurement of 9.90 chs. East to

49.90

(Computed position of 40.00 chs. W. from closing cor. of secs. 5 and 6) Set an iron post, 3 ft. long, 1 in. in

20 X 866

Resurvey of North bdy. of Township 7 North, Range 6 West. 17

Chains.

diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 6 only, marked on brass cap,

$\frac{1}{4}$ S 6
1923

No bearing trees available.
Dig pits, 18x18x12 ins., one each E. and W. of post, 3 ft. dist.

80.00 The original cor. of secs. 5, 6, 31 and 32, which is an iron post, 3 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap for reference to said secs., and witnessed by four pits, one each NE., SE., SW. and NW. of post, and a mound of earth, W. of cor. No bearing trees.

Alter this cor. to refer to secs. 31 and 32 only by changing the marking on the brass cap to read:

T8N R6W
S31 S32
S 6
T7N R6W
1914-23

No bearing trees available.
Obliterate the pits SE. and SW. of cor., and destroy the mound of earth W. of cor.

89.90 Chain measurement of 9.90 chs. East to Point of intersection of the Subdivision lines, bet. secs. 5 and 6, T. 7 N., R. 6 W., surveyed N. 0° 3' W. Closing cor. of said secs. established at this point as hereinafter described.

From closing cor. of secs. 5 and 6, hereinafter described, East, on true line, on N. bdy. of sec. 5.

30.10 (40.00 chs. E. from cor. of secs. 31 and 32) The original $\frac{1}{4}$ sec. cor. of secs. 5 and 32, which is an iron post, 1 in. in diam., projecting 10 ins. above ground, firmly set, properly marked on brass cap for reference to the quarters of said secs., and witnessed by two pits, one each E. and W. of post, and a mound of earth, N. of cor.

No bearing trees.
Alter this cor. to refer to the quarters of sec. 32 only by changing the markings on the brass cap to read

$\frac{1}{4}$ S 32
1914-23

No bearing trees available.
Chain measurement of 9.90 chs. East to

40.00 (Computed midpoint of N. bdy. of sec. 5). Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 5 only, marked on brass cap,

$\frac{1}{4}$ S 5
1923

No bearing trees available.
Dig pits 18x18x12 ins., one each E. and W. of post, 3 ft. dist.
70.10 (80.00 chs. E. from cor. of secs. 31 and 32) The original cor. of secs. 4, 5, 32 and 33, which is an iron post, 3 ins. in diam., projecting 12 ins. above ground, firmly set,

18 Resurvey of North bdy. of Township 7 North Range 6 West.

Chains.

properly marked on brass cap with reference to said secs., and witnessed by four pits, one each NE., SE., SW. and NW. of post, and mound of earth, W. of cor. No bearing trees.

Alter this cor. to refer to secs. 32 and 33 only, by changing the marking on the brass cap to read

T8N R6W
S32 | S33
S 5
T7N R6W
1914-23

No bearing trees available. Obliterate the pits SE. and SW. of cor., and destroy the mound of earth, W. of cor.

80.00 Chain measurement of 9.90 chs. East to Point of intersection of the subdivision line, bet. secs. 4 and 5, T.7 N., R.6 W. surveyed N.0°2'W. Closing cor. of said secs. established at this point, as hereinafter described.

From the closing cor. of secs. 4 and 5, hereinafter described,

30.10 East, on true line, on N. bdy. of sec. 4. (40.00 chs. E. from cor. of secs. 32 and 33) The original $\frac{1}{4}$ sec. cor. of secs. 4 and 33, which is an iron post, 1 in. in diam., projecting 10 ins. above ground, firmly set, properly marked on brass cap for reference to the quarters of said secs., and witnessed by two pits, one each E. and W. of post, and a mound of earth, N. of cor. No bearing trees. Alter this cor. to refer to the quarters of sec. 33 only by changing the markings on the brass cap to read:

$\frac{1}{4}$ S 33
1914-23

No bearing trees available.

39.98 Chain measurement of 9.88 chs. East to (Computed midpoint of N. bdy. of sec. 4) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 4 only, marked on brass cap,

$\frac{1}{4}$ S 4
1923

No bearing trees available.

70.10 Raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, S. of cor. (80.00 E. from cor. of secs. 32 and 33). The original cor. of secs. 3, 4, 33 and 34, which is an iron post, 3 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, with reference to said secs., and witnessed by four pits, one each NE., SE., SW. and NW. of post, and mound of earth, W. of cor. No bearing trees.

Alter this cor. to refer to secs. 33 and 34 only, by changing the marking on the brass cap, to read:

T8N R6W
S33 | S34
S 4
T7N R6W
1914-23

No bearing trees available.

Resurvey of North bdy. of Township 7 North, Range 6 West. 19

Chains.

79.96

Obliterate the pits SE. and SW. of cor., and destroy the mound of earth, W. of cor.
Chain measurement of 9.86 chs. East, to
Point of intersection of the Subdivision line, bet. secs. 3 and 4, T.7 N., R.6 W., surveyed N.0°2'W.
Closing cor. of said secs. established at this point as hereinafter described.

30.14

From the closing cor. of secs. 3 and 4, hereinafter described,
East, on a true line, on N. bdy. of sec. 3.
(40.00 chs. E. from cor. of secs. 33 and 34) The original $\frac{1}{4}$ sec. cor. of secs. 3 and 34, which is an iron post, 1 in. in diam., projecting 10 ins. above ground, firmly set properly marked on brass cap with reference to the quarters of said secs., and witnessed by two pits, one each E. and W. of post, and a mound of earth N. of cor.
No bearing trees.
Alter this cor. to refer to the quarters of sec. 34 only by changing the markings on the brass cap to read:

$\frac{1}{4}$ S 34
1914-22

39.99

No bearing trees available. Chain measurement of 9.85 chs. East to
(Computed midpoint of N. bdy. of sec. 3) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 3 only, marked on brass cap,

$\frac{1}{4}$ S 3
1922

70.14

No bearing trees available. Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, S. of cor.
(80.00 chs. E. from cor. of secs. 33 and 34) The original cor. of secs. 2, 3, 34 and 35, which is an iron post 3 ins. in diam., projecting 30 ins. above ground, firmly set in ground and mound of stone, properly marked on brass cap, with reference to said secs., and witnessed by a mound of stone, W. of cor. No bearing trees.
Alter this cor. to refer to secs. 34 and 35 only by changing the marking on the brass cap, to read:

T8N R6W
S34 S35
S 3
T7N R6W
1914-22.

79.98

No bearing trees available.
Destroy the mound of stone, W. of cor., and raise a new mound of stone, 3 ft. base, 2 ft. high, N. of cor.
Chain measurement of 9.84 chs. E. to
Point of intersection of the subdivision line, bet. secs. 2 and 3, T.7 N., R.6 W., surveyed N.0°1'W.
Closing cor. of said secs. established at this point as hereinafter described.

30.16

From the closing cor. of secs. 2 and 3, hereinafter described,
East, on true line, on N. bdy. of sec. 2.
(40.00 chs. E. from cor. of secs. 34 and 35) The original

20

Chains.

$\frac{1}{4}$ sec.cor. of secs.2 and 35, which is an iron post, 1 in. in diam., projecting 36 ins. above ground, firmly set in a mound of stone, properly marked on brass cap with reference to the quarters of said secs., and witnessed by a mound of stone, N. of cor. No bearing trees.

Alter this cor. to refer to the quarters of sec.35 only by changing the marking on the brass cap to read:

$\frac{1}{4}$ S 35

1914-22.

No bearing trees available.

39.91 Chain measurement of 9.75 chs. East, to (Computed midpoint of N. bdy. of sec.2) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec.cor. of sec.2 only, marked on brass cap,

$\frac{1}{4}$ S 2

1922

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.

70.16 (80.00 chs. E. from cor. of secs.34 and 35) The original cor. of secs. 1, 2, 35 and 36, which is an iron post, 3 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, with reference to said secs.; and witnessed by four pits, one each NE., SE., SW. and NW. of post, and a mound of earth W. of cor. No bearing trees.
Alter this cor. to refer to secs. 35 and 36 only by changing marking on brass cap to read

T8N R6W

S35 | S36

S 2

T7N R6W

1914-22

No bearing trees available.

Obliterate the pits SE and SW. of cor., and destroy the mound of earth, W. of cor.

79.81 Chain measurement of 9.65 chs. East to Point of intersection of the subdivision line, bet. secs. 1 and 2, T.7 N., R.6 W., surveyed N.0° 1'W. Closing cor. of said secs. established at this point as hereinafter described.

From the closing cor. of secs. 1 and 2, hereinafter described,

30.35 East, on true line, on N. bdy. of sec.1. (40.00 chs. E. from cor. of secs.35 and 36) The remains of the original $\frac{1}{4}$ sec.cor. of secs.1 and 36, consisting of the mound of stone in which a 1 in. iron post with brass cap is recorded as having been set, and a mound of stone N. of cor., which is the record accessory. No bearing trees. Make diligent search in this vicinity for the iron post cor. monument, but fail to find it. Reconstruct this cor. as follows:
In the center of the mound of stone, which was originally raised around the cor. monument, set an iron post 3 ft. long, 1 in. in diam., 8 ins. in the ground, for $\frac{1}{4}$ sec.cor. of sec.36 only, marked on brass cap,

BOOK 3608

Resurvey of North bdy. of Township 7 North, Range 6 West. 21

chains.

1/4 S 36
1922

39.89 No bearing trees available.
Chain measurement of 9.54 chs. East to
(Computed midpoint of N. bdy. of sec. 1) Set an iron post,
3 ft. long, 1 in. in diam., 26 ins. in the ground, for
reestablished 1/4 sec. cor. of sec. 1 only, marked on
brass cap,

1/4 S 1
1922

79.78 No bearing trees available.
Raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.
(89.43 chs. E. from cor. of secs. 35 and 36) The original
closing cor. of Ts: 7 and 8 N.; R. 6 W., hereinbefore de-
scribed.

Boundaries of Township 7 North, Range 6 West.
Latitudes, departures and closing errors.

Line designated.	True bearing.	Dist: Chs.	Latitudes.		Departures.	
			N.	S.	E.	W.
South boundary,	N. 89° 59' W.	490.84	.18			490.84
West boundary,	North,	480.00	480.00			
North boundary,	East,	489.43			489.43	
East boundary,	S. 0° 11' W. South	476.30 473.70		476.30 473.70		
Convergency,					.50	
Totals,			480.18	480.00	489.93	490.84
			480.00			489.93
Error in latitude,			0.18			
Error in departure,					0.91	

22 Survey of Subdivision lines of Township 7 North, Range 6 West.

Chains.

From the cor. of secs. 35 and 36, on the S. bdy. of Tp.,
 hereinbefore described,
 N.0°1'W., bet. secs. 35 and 36.
 Over hilly, broken land, thru. scattering timber and under-
 growth.
 Ascend 80 ft.
 10.10 Ridge, brs. N.30°W., and S.30°E.
 Descend 70 ft.
 19.90 Wash, 10 lks. wide, course N.55°W.
 Ascend 45 ft.
 33.40 Spur, slopes W.
 Descend 35 ft.
 36.30 Wash, 4 lks. wide, course SW.
 Ascend 10 ft. to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., over a cross
 (x) marked on surface rock, and raise a mound of stone
 around post, for $\frac{1}{4}$ sec. cor., marked on brass cap,

S35 | S36

1922

No bearing trees available.

Ascend 15 ft.
 42.30 Descend 10 ft.
 44.70 Wash, 5 lks. wide, course W.
 Ascend 80 ft.
 60.40 From this point, peak brs. E. 12 chs. dist.
 Descend 115 ft., over NW. slope:
 74.00 Ravine, course NW. near head.
 Ascend 10 ft.
 77.47 Spur, slopes NW.
 Descend 30 ft., to
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 6 ins. in
 the ground to bed rock, deposit a stone, marked with
 a cross (x) at base of post, and raise a mound of stone
 around post for cor. of secs. 25, 26, 35 and 36, marked on
 brass cap,

T7N R6W

S26 | S25

S35 | S36

1922

No bearing trees available.

Land, hilly and broken.
 Soil, rocky, 4th rate.
 Timber, palo verde.
 Undergrowth, cactus and greasewood.

S.89°59'E., on a random line, bet. secs. 25 and 36.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.98 Fall 2 lks. S. of the reestablished cor. of secs. 25 and 36,
 on the E. bdy. of the Tp., hereinbefore described.
 Thence,
 West, on a true line, bet. secs. 25 and 36.
 Over mountainous land, thru. scattering timber and under-
 growth.
 Ascend 254 ft.
 11.50 Ridge, brs. N.30°W. and S.30°E.
 Descend 290 ft.
 26.20 Bottom of gulch, 10 lks. wide, course N.70°W.
 Ascend 35 ft.
 36.70 Descend 20 ft., to
 39.99 Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in
 the ground to bed rock, and raise a mound of stone
 around post, for $\frac{1}{4}$ sec. cor., marked on brass cap,

Survey of Subdivision lines of Township 7 North, Range 6 West. 23

Chains.

$\frac{1}{4}$ S 25
S 36
1922

No bearing trees available.
 Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
 Thence over rolling land.
 Descend.
 42.50 Wash, 3 lks. wide, course NW.
 Descend gradually over NW. slope, to
 52.40 Wash, 10 lks. wide, course NW.
 Ascend 140 ft., over NE. slope.
 71.70 Ridge, bears N. 29° W. and S. 20° E.
 Descend 95 ft., over SW. slope.
 78.00 Head of ravine, course NW.
 Ascend slightly to
 79.98 The cor. of secs. 25, 26, 35 and 36.
 Land, mountainous and rolling.
 Soil, rocky, 4th rate.
 Timber, palo verde and mesquite.
 Undergrowth, catclaw and cactus.

 N. 0° 1' W., bet. secs. 25 and 26.
 Over hilly land, thru. scattering timber and undergrowth.
 Descend 6 ft.
 0.50 Ravine, course N. 70° W. Thence along W. slope.
 12.50 Ravine, course S. 70° W.
 Ascend 50 ft., over S. slope, to
 19.00 Ridge, brs. N. and SW. Thence along top of ridge.
 Ascend 40 ft. to
 34.00 Leave top of ridge, brs. NE. and S.
 Descend slightly over NW. slope, to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
S26 | S25
1922

No bearing trees available. Raise a mound of stone, 3 ft.
 base, 2 ft. high, W. of cor.
 Descend 80 ft., over NW. slope.
 55.40 Wash, 5 lks. wide, course N. 50° W.
 Ascend 80 ft., over SW. slope.
 66.50 Spur, slopes N. from SE.
 Descend 45 ft. along top of spur, to
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in
 the ground, for cor. of secs. 23, 24, 25 and 26, marked
 on brass cap,

T7N R6W
S23 | S24
S26 | S25
1922

No bearing trees available. Raise a mound of stone, 3
 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.
 Land, hilly.
 Soil, rocky, 4th rate.
 Timber, palo verde and mesquite.
 Undergrowth, cactus and catclaw.

 East, on a random line, bet. secs. 24 and 25.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.

24 Survey of Subdivision lines of Township 7 North, Range 6 West.

Chains.

- 79.88 Fall 2 lks.S. of the reestablished cor. of secs.24 and 25, on the E. bdy. of Tp., hereinbefore described.
Thence,
S. $89^{\circ}59'W.$, on a true line, bet. secs.24 and 25.
Over rolling land, thru. scattering timber and undergrowth.
Descend gradually over NW.slope.
6.40 Wash, 30 lks.wide, course NE.
18.40 Ravine, 5 lks.wide, course SE.
Ascend 45 ft.
22.90 Spur, slopes N.
Descend 20 ft.
24.90 Ravine, 20 lks.wide, course N. $45^{\circ}W.$
Ascend 190 ft.
35.90 Ridge, brs.N. $10^{\circ}W.$ and S. $10^{\circ}E.$
Descend 43 ft.to
39.94 Set an iron post, 3 ft.long, 1 in. in diam., 10 ins.in the ground to bed rock, deposit a stone, marked with a cross (x) at base of post, and raise a mound of stone around post, for $\frac{1}{4}$ sec.cor. of secs.24 and 25, marked on brass cap,

$\frac{1}{4}$ S 24
S 25
1922

- No bearing trees available.
Descend 110 ft.
47.70 Wash, 40 lks.wide, course N.
Ascend 165 ft.
62.90 Ridge, brs.N. and S.
Descend 95 ft.
76.50 Wash, 5 lks.wide, course N. $20^{\circ}W.$
Ascend 15 ft.to
79.88 The cor.of secs.23, 24, 25 and 26.
Land, rolling and mountainous.
Soil, rocky and gravelly, 4th rate.
Timber, palo verde.
Undergrowth, cactus.

- N. $0^{\circ}1'W.$, bet. secs. 23 and 24.
Over rolling and hilly land, thru. scattering timber and undergrowth.
Descend 72 ft., over NE.slope, to
21.10 Wash, 10 lks.wide, course N. $45^{\circ}W.$
Descend gradually over NW.slope, to
28.80 Wash, course W.
Descend gradually over W. and NW.slopes, to
40.00 Set an iron post, 3 ft.long, 1 in. indiam., 12 ins.in the ground to bed rock, deposit a stone marked with a cross (x) at base of post, and raise a mound of stone around post, for $\frac{1}{4}$ sec.cor., marked on brass cap,

$\frac{1}{4}$
S23 | S24
1922

- No bearing trees available.
Descend 40 ft.
42.50 Wash, 3 lks.wide, course NW.
Descend gradually over NW.slope.
50.30 Wash, course NW.
Descend gradually over W.slope.
66.40 Wash, course SW.
Ascend 35 ft.
75.50 Descend 35 ft., to

30010 3608

Survey of Subdivision lines of Township 7 North, Range 6 West. 25

Chains.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 8 ins. in the ground to bed rock, deposit a stone, marked with a cross (x) at base of post, and raise a mound of stone around post, for cor. of secs. 13, 14, 23 and 24, marked on brass cap,

T7N R6W
S14 | S13
S23 | S24
1922

No bearing trees available. Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.
Land, rolling and hilly.
Soil, rocky, 4th rate.
Timber, palo verde.
Undergrowth, cactus.

40.00 N. 89° 59' E., on a random line, bet. secs. 13 and 24.
79.92 Set temp. 1/4 sec. cor.
Fall 5 lks. S. of the reestablished cor. of secs. 13 and 24, on the E. bdy. of the Tp., hereinbefore described.

Thence,
S. 89° 57' W., on a true line, bet. secs. 13 and 24.
Over mountainous land, thru. scattering timber and undergrowth.

12.32 Ascend 140 ft.
Spur, slopes NW.
24.70 Descend 125 ft., over SW. slope.
Wash, 10 lks. wide, course NW.
29.60 Descend 26 ft., over N. slope.
Wash, 15 lks. wide, course NE.
39.96 Ascend 85 ft., over NE. slope, to
Set an iron post, 3 ft. long, 1 in. in diam., on surface rock, deposit a stone marked with a cross (x) at base of post, and raise a mound of stone around post, for 1/4 sec. cor., marked on brass cap,

1/4 S 13
S 24
1922

No bearing trees available.
40.90 Ascend 15 ft.
Ridge, brs. N. and S.
Descend 90 ft., over W. slope.
46.50 Wash, 20 lks. wide, course NW. Thence along N. slope.
48.70 Old road, brs. NW. and SE.
51.90 Wash, 4 lks. wide, course NE.
65.10 Ascend 53 ft., over NE. slope, to
Ravine, 10 lks. wide, course NE.
71.80 Ascend 87 ft., over NE. slope.
Ridge, brs. N. and S.
79.92 Descend 65 ft., over W. slope, to
The cor. of secs. 13, 14, 23 and 24.
Land, mountainous.
Soil, rocky, 3rd and 4th rate.
Timber, palo verde and mesquite.
Undergrowth, cactus, ocotillo, catclaw and greasewood.

N. 0° 1' W., bet. secs. 13 and 14.
Over rolling land, thru. scattering timber and undergrowth.
11.70 Descend gradually over W. slope, to
26.30 Descend 110 ft., over NW. slope.
Highway brs. E. to Wickenburg and S. 75° W. to Aguila.

26 Survey of Subdivision lines of Township 7 North, Range 6 West.

chains.

- 34.20 Wash, 30 lks. wide, course N. 70° E.
Ascend gradually over SE. slope, to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,
- $\frac{1}{4}$
S14 | S13
1922
- No bearing trees available. Raise a mound of stone, 3 ft.
base, 2 $\frac{1}{2}$ ft. high, W. of cor.
Ascend gradually over SE. slope.
- 52.50 Spur, slopes E.
Descend 15 ft., over N. slope.
- 58.30 Wash, 10 lks. wide, course N. 70° E.
Ascend 20 ft., over SE. slope.
- 67.50 Ridge, brs. NE. and W. Desc. 40 ft., over NW. and W. slopes, to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins.
in the ground to bed rock, and raise a mound of stone
around post, for cor. of secs. 11, 12, 13 and 14, marked
on brass cap,
- T7N R6W
S11 | S12
S14 | S13
1922
- No bearing trees available. Raise a mound of stone, 3
ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.
Land, rolling and hilly.
Soil, rocky, 4th rate.
Timber, palo verde and mesquite.
Undergrowth, cactus.
-
- 40.00 N. 89° 57' E., on a random line, bet. secs. 12 and 13.
Set temp. $\frac{1}{4}$ sec. cor.
- 79.80 Fall 7 lks. S. of the reestablished cor. of secs. 12 and 13,
on the E. bdy. of Tp., hereinbefore described.
Thence,
S. 89° 54' W., on a true line, bet. secs. 12 and 13.
Over hilly land, thru. scattering timber and dense under-
growth.
- 4.80 Ascend 15 ft., over SE. slope.
Spur, slopes NE.
- 23.80 Descend 148 ft., over NW. slope.
Wash, 20 lks. wide, course N. 20° E.
- 30.50 Ascend 80 ft. over E. slope.
Spur, slopes N.
- 39.90 Descend 105 ft., over W. slope, to
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,
- $\frac{1}{4}$ S 12'
S 13'
1922
- from which,
A catclaw, 9 ins. in diam., brs. N. 3° E., 54 lks.
dist., marked $\frac{1}{4}$ S12 BT.
A catclaw, 6 ins. in diam., brs. S. 40° W., 70 lks.
dist., marked $\frac{1}{4}$ S 13 BT.
- 56.50 Descend 35 ft., over NW. slope.
Center of wash, 1 ch. wide, course N. 70° E. Ascend 65
ft., over E. slope.
- 73.80 Ridge, brs. N. and S.
Descend 25 ft., over W. slope, to
- 79.80 The cor. of secs. 11, 12, 13 and 14.

Survey of Subdivision lines of Township 7 North, Range 6 West. 27

Chains.

Land, hilly and rolling.
Soil, rocky, malpais and porphyry formations, 3rd and 4th rates.
Timber, palo verde and mesquite.
Undergrowth, greasewood, catclaw, ocotillo and cactus.

N.0°1'W., bet. secs. 11 and 12.
Over rolling land, thru. scattering timber and undergrowth.
Ascend 15 ft., over W. slope.
4.00 Descend 42 ft., over NW. slope, to
12.60 Wash, 35 lks. wide, course NE.
Descend 18 ft. to
15.50 Same wash, course NW.
Descend 24 ft.
20.60 Same wash, course NE.
Descend slightly over NE. slope, to
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
 S11 | S12

1922

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.
41.00 Wash, course NE.
Ascend 15 ft.
48.00 Descend 25 ft.
53.50 Wash, 2 lks. wide, course NE. Asc. gradually over E. slope, to
59.90 Wash, 3 lks. wide, course SE. Asc. gradually over S. slope.
71.30 Low spur, slopes NE. from W.
Descend gradually over N. slope.
79.00 Head of wash course NE.
Ascend slightly over E. slope, to
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 1, 2, 11 and 12, marked on brass cap,

T7N R6W
 S 2 | S 1
 S11 | S12
 1922

No bearing trees available.
Raise a mound of stone 3 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.
Land, rolling.
Soil, gravelly and rocky, 3rd rate.
Timber, palo verde and mesquite.
Undergrowth, ocotillo, cactus and catclaw.

N.89°54'A., on a random line, bet. secs. 1 and 12.
40.00 Set temp. $\frac{1}{4}$ sec. cor.
79.80 Fall 2 lks. N. of the reestablished cor. of secs. 1 and 12, on the E. bdy. of Tp., hereinbefore described.
Thence,
S.89°55'W., on a true line, bet. secs. 1 and 12.
Over rolling land, thru. scattering timber and undergrowth.
Descend gradually over NW. slope.
4.00 Ascend 40 ft., over E. slope.
9.00 Spur, slopes N.
Descend 74 ft., over W. slope.
16.60 Ravine, 5 lks. wide, course N.10°W.
Ascend 35 ft., over NE. slope.
20.30 Point of spur, slopes N.

28 Survey of Subdivision lines of Township 7 North, Range 6 West.

Chains.

34.90 Descend 62 ft., over NW. slope.
 Wash, 35 lks. wide, course N. 60° E.
 Ascend gradually over SE. slope, to
 39.90 Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in
 the ground to bed rock, deposit a stone, marked with a
 cross (x) at base of post and raise a mound of stone,
 around post, for 1/4 sec. cor., marked on brass cap,

1/4 S 1
 S 12
 1922

No bearing trees available. Raise a mound of stone, 3
 ft. base, 2 1/2 ft. high, N. of cor.
 68.20 Ascend 96 ft., over SE. slope.
 Spur, slopes N. 70° E.
 78.75 Descend 27 ft., over NW. slope.
 Wash, course NE. near head.
 Ascend slightly over E. slope, to
 79.80 The cor. of secs. 1, 2, 11 and 12.
 Land, rolling.
 Soil, gravelly and rocky, 3rd and 4th rate.
 Timber, palo verde and mesquite,
 Undergrowth, cactus, catclaw, ocotillo and yucca.

N. 0° 1' W., on a true line, bet. secs. 1 and 2.
 Over rolling land, thru scattering timber and undergrowth.
 0.15 Wash, 5 lks. wide, course NE. near head.
 Ascend 40 ft., over SE. slope.
 12.30 Spur, slopes NE.
 Descend 82 ft., over NW. slope.
 33.90 Wash, 20 lks. wide, course N. 70° E.
 Ascend 10 ft., over SE. slope, to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground for 1/4 sec. cor., marked on brass cap,

1/4 S 1
 S 2 | S 1
 1922

No bearing trees available. Raise a mound of stone, 3 ft.
 base, 2 ft. high, W. of cor.
 49.00 Ascend 45 ft., over SE. slope.
 Spur, slopes E.
 53.00 Descend 25 ft., over N. slope.
 Ravine, course E.
 Ascend 40 ft., over S. slope.
 68.50 Low ridge, brs. E. and W.
 Descend 37 ft., over N. slope, to
 80.08 Intersect the N. bdy. of the Tp., at a point 9.65 chs. E.
 of the original cor. of secs. 1, 2, 35 and 36, changed to
 cor. of secs. 35 and 36 only, as hereinbefore described.
 At the point of intersection,
 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in
 the ground, for closing cor. of secs. 1 and 2, T. 7 N.,
 R. 6 W., marked on brass cap,

T8N R6W
 S36
 S 2 | S 1
 T7N R6W
 C C
 1922

No bearing trees available.
 Dig pits, 18x18x12 ins., one each E., W. and S. of cor. 3.
 ft. dist.
 Land, rolling.

BOOK 3608

Survey of Subdivision lines of Township 7 North, Range 6 West. 29

Chains.

Soil, rocky and gravelly, 3rd rate.
 Timber, palo verde and mesquite.
 Undergrowth, catclaw, cactus and greasewood.

 From the cor. of secs. 34 and 35, on the S. bdy. of Tp.,
 hereinbefore described,
 N. $9^{\circ}1'W.$, bet. secs. 34 and 35.
 Over rolling land, thru. scattering timber and dense un-
 dergrowth.

0.20 Draw, course NE. near head.
 Descend gradually over NE. slope to $\frac{1}{4}$ sec. cor.
 2.50 Wash, 5 lks. wide, course NE.
 6.00 Wash, 10 lks. wide, course NE.
 12.50 Wash, 10 lks. wide, course NE.
 18.50 Wash, 20 lks. wide, course NE.
 24.70 Wash, 10 lks. wide, course NE.
 27.50 Wash, 20 lks. wide, course NE.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
 S34 | S35

1922

from which,

A crucifixion thorn, 8 ins. in diam., brs. N. $5\frac{1}{2}^{\circ}W.$, 80
 lks. dist., marked $\frac{1}{4}$ S 34 BT.

No other bearing trees available.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
 Descend slightly over NE. slope, to
 44.00 Wash, 10 lks. wide, course NE.
 Descend gradually over E. slope, to sec. cor.
 52.00 Dim road, brs. N. $10^{\circ}W.$ and S. $10^{\circ}E.$
 53.00 Wash, 20 lks. wide, course N. $20^{\circ}W.$
 55.00 Same wash, course N. $20^{\circ}E.$
 59.00 Same wash, course N. $20^{\circ}W.$
 70.50 Same wash, 20 lks. wide, course N. $30^{\circ}E.$
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in
 the ground, for cor. of secs. 26, 27, 34 and 35, marked
 on brass cap,

T7N R6W
 S27 | S26
 S34 | S35
 1922

from which,

A mesquite, 6 ins. in diam., brs. S. $4\frac{1}{2}^{\circ}E.$, 50
 lks. dist., marked T7N R6W S35 BT,

A mesquite, 4 ins. in diam., brs. S. $1^{\circ}W.$, 50
 lks. dist., marked B T.

No other bearing trees available.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
 Land, rolling.

Soil, gravelly, 3rd rate.

Timber, palo verde and mesquite.

Undergrowth, greasewood, mesquite, ocotillo and cactus.

 S. $89^{\circ}59'E.$, on a random line, bet. secs. 26 and 35.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.92 Intersect N. and S. line, 7 lks. N. of the cor. of secs. 25,
 26, 35 and 36.
 Thence,
 N. $89^{\circ}56'W.$, on a true line, bet. secs. 26 and 35.
 Over rolling land, thru. scattering timber and dense

30 Survey of Subdivision lines of Township 7 North, Range 6 West.

Chains.

- undergrowth.
- Ascend 10 ft., over NE. slope.
- 3.00 Point of spur, slopes NW.
- Descend 33 ft., over NW. slope.
- 8.00 Wash, course NW.
- Ascend slightly over N. slope.
- 29.00 Descend 22 ft., over NW. slope.
- 29.60 Wash, 50 lks. wide, course N.
- Ascend 20 ft., over E. slope to $\frac{1}{4}$ sec. cor.
- 33.60 Old road, brs. N. and S.
- 39.96 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 26
S 35
1922

- No bearing trees available.
- Raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.
- Ascend 90 ft., over E. slope.
- 54.90 Ridge, brs. N. and S.
- Descend 80 ft., over W. slope.
- 73.60 Wash, 70 lks. wide, course N.
- Ascend 15 ft., over E. slope, to
- 79.92 The cor. of secs. 26, 27, 34 and 35.
- Land, rolling.
- Soil, gravelly, 3rd rate.
- Timber, mesquite, palo verde, and ironwood.
- Undergrowth, catclaw, greasewood and yucca.
- Thick grass.

-
- N. 0° 1' W., bet. secs. 26 and 27.
 - Over rolling land, thru. scattering timber and dense undergrowth.
 - Descend gradually, over NE. slope, to
 - 20.50 Wash, 10 lks. wide, course NE.
 - Descend gradually over E. slope to $\frac{1}{4}$ sec. cor.
 - 28.60 Wash, 30 lks. wide, 1 ft. deep, course E.
 - 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
S 27 | S 26
1922

- No bearing trees available.
- Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
- 41.00 Wash, 20 lks. wide, course E.
- Ascend gradually over SE. slope.
- 70.00 Low ridge, brs. NE. and SW.
- Descend gradually over NW. and W. slopes to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 22, 23, 26 and 27, marked on brass cap,

T 7 N R 6 W
S 22 | S 23
S 27 | S 26
1922

- No bearing trees available.
- Raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 2 ft. high, W. of cor.
- Land, rolling.
- Soil, rocky, 4th rate; malpais and granite formations.
- Timber, palo verde.
- Undergrowth, greasewood, catclaw, ocotillo, yucca and cactus.

Survey of Subdivision lines of Township 7 North, Range 6 West. 31

Chains.

40.00 S.89°56'E., on a random line, bet. secs.23 and 26.
 Set temp. ¼ sec.cor.
 79.84 Intersect the cor.of secs. 23,24,25 and 26.
 Thence,
 N.89°56'W., on a true line, bet. secs.23 and 26.
 Over rolling land, thru. scattering timber and dense under-
 growth.
 25.35 Descend 106 ft., over NW.slope.
 Wash,40 lks.wide, course N.
 Ascend 45 ft., over E.slope.
 30.35 Old road, brs.N.and S.
 37.35 Ridge, brs.N.and S.
 Descend 20 ft., over W. slope, to
 39.92 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins.in
 the ground, for ¼ sec.cor., marked on brass cap,

¼ S 23
 S 26
 1922

No bearing trees available. Raise a mound of stone, 2½ ft.
 base, 2 ft.high, N.of cor.
 Descend 15 ft., over W.slope.
 46.35 Wash,70 lks.wide, course N.
 Ascend 86 ft., over E.slope.
 74.85 Ridge, brs.N.and S.
 Descend 23 ft., over W.slope, to
 79.84 The cor.of secs.22, 23, 26 and 27.
 Land, rolling.
 Soil,rocky, 4th rate;malpais and granite formations.
 Timber,palo verde and mesquite.
 Undergrowth, greasewood, catclaw,ocotillo and cactus.

N.0°1' W., bet.secs. 22 and 23.
 Over rolling land, thru. scattering timber and dense
 undergrowth. Desc.60 ft., over W.slope, to
 40.00 Set an iron post, 3 ft.long, 1 in. in diam., 12 ins.in
 the ground, to bed rock, and raise a mound of stone
 around post, for ¼ sec.cor., marked on brass cap,

¼ S22 | S23
 1922

No bearing trees available.
 Raise a mound of stone, 2½ ft.base, 2 ft. high, W.of cor.
 Ascend 25 ft., over W.slope, to
 50.00 Ridge, brs.N.5°W. and S.5°E.
 Descend 37 ft., over NE.slope.
 69.80 Highway, brs.N.60°E. to Wickenburg and S.60°W. to Aguila.
 74.50 Head of wash, course NE.
 Ascend slightly over SE; slope, to
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in
 the ground for cor. of secs.14,15,22 and 23, marked
 on brass cap,

T7N R6W
 S15 | S14
 S22 | S23
 1922

No bearing trees available. Raise a mound of stone 3 ft.
 base, 2 ft. high, W. of cor.
 Land, rolling.
 Soil,rocky,3rd rate;granite formation.
 Timber, palo verde and mesquite.
 Undergrowth,greasewood,catclaw,ocotillo,yucca and cactus.

32 Survey of Subdivision lines of Township 7 North, Range 6 West.

Chains.	
	S. $89^{\circ}56'E.$, on a random line, bet. secs. 14 and 23.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.78	Intersect N. and S. line, 2 lks. N. of the cor. of secs. 13, 14, 23 and 24.
	Thence,
	N. $89^{\circ}55'W.$, on a true line, bet. secs. 14 and 23.
	Over rolling land, thru. scattering timber and dense undergrowth.
	Descend 44 ft., over W. slope.
12.80	Wash, 15 lks. wide, course NW.
	Ascend 23 ft., over NE. slope.
16.80	Descend 25 ft.
19.30	Center of wash, 1.50 chs. wide, course N.
	Ascend 15 ft., over E. slope.
25.80	Ridge, brs. N. and S.
	Descend 25 ft.
26.80	Dim road, brs. N. and SW.
30.20	Wash, 30 lks. wide, course N.
	Ascend slightly over N. slope, to
32.80	Wash, 10 lks. wide, course NE.
	Ascend 10 ft., over NE. slope to $\frac{1}{4}$ sec. cor.
36.10	Highway brs. NE. to Wickenburg and SW. to Aguila.
39.89	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap,
	$\frac{1}{4}$ S 14 S 23 1922
	No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
	Ascend gradually over NE. slope.
55.00	Descend gradually over N. slope.
73.90	Wash, 10 lks. wide, course NE.
	Ascend 12 ft., over SE. slope, to
79.78	The cor. of secs. 14, 15, 22 and 23.
	Land, rolling and gently rolling.
	Soil, gravelly, 3rd rate, quartz formation.
	Timber, palo verde and mesquite.
	Undergrowth, greasewood, catclaw, ocotillo, yucca and cactus.

	N. $0^{\circ}1'W.$, bet. secs. 14 and 15.
	Over rolling land, thru. scattering timber and dense undergrowth.
	Ascend 25 ft., over SE. slope.
7.00	Descend slightly over NE. slope.
10.30	Wash, course E.
	Ascend 38 ft., over S. slope.
25.00	Ridge, brs. E. and W.
	Descend 34 ft., over N. slope.
34.00	Ascend 15 ft. over SE. slope.
36.45	Descend 8 ft., over NE. slope, to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,
	$\frac{1}{4}$ S15 S14 1922
	No bearing trees available. Raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 2 ft. high, W. of cor.
	Descend 25 ft., over NE. slope, to
45.00	Thence over level land, brs. E. and W.
55.00	Leave level land.
	Ascend 100 ft., over S. slope.
65.86	Spur, slopes E.
	Descend 52 ft., over NE. slope.

BOOK 3608

Survey of Subdivision lines of Township 7 North, Range 6 West, 33

Chains.	
71.30	Bottom of ravine, 1 ch. wide, course S. 70° E.
80.00	Ascend 48 ft., over S. slope, to Set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in ground to bed rock, and raise a mound of stone around post for cor. of secs. 10, 11, 14 and 15, marked on brass cap, T7N R6W S10/S11 S15/S14 1922
40.00	No bearing trees available. Raise a mound of stone 3 ft. base, 2 ft. high, W. of cor.
79.78	Land, level and rolling. Soil, rocky, 4th rate, quartz and porphyry formations. Timber, palo verde and mesquite. Undergrowth, greasewood, catclaw, ocotillo and yucca.
40.00	S. 89° 55' E., on a random line, bet. secs. 11 and 14.
79.78	Set temp. $\frac{1}{4}$ sec. cor. Intersect N. and S. line, 2 lks. S. of the cor. of secs. 11, 12, 13 and 14.
11.30	Thence, N. 89° 56' W., on a true line, bet. secs. 11 and 14. Over rolling land, thru. scattering timber and undergrowth. Descend 48 ft., over W. slope.
39.89	Wash, 20 lks. wide, course N. 20° E. Ascend 120 ft., over E. slope, to Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap, $\frac{1}{4}$ S 11 S 14 1922
59.80	No bearing trees available. Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.
65.50	Ascend 190 ft., over E. slope, to Rocky bluff, 10 ft. high, brs. NW. and SE. facing NE. Ascend 10 ft., over NE. slope, to Spur, slopes SE.
79.78	Descend 57 ft., over SW. and S. slopes, to The cor. of secs. 10, 11, 14 and 15. Land, rolling. Soil, rocky, 3rd and 4th rate; malpais and porphyry formations. Timber, palo verde and mesquite. Undergrowth, greasewood, catclaw, and ocotillo.
16.00	N. 0° 1' W., bet. secs. 10 and 11. Over mountainous land, thru. scattering timber and dense undergrowth.
20.70	Ascend 185 ft., over S. and SE. slopes. Ridge, brs. NE. and SW. Descend 25 ft., over NW. slope.
25.70	Thence over rolling W. slope to $\frac{1}{4}$ sec. cor. Ascend 25 ft.
30.70	Descend 20 ft.
36.15	Ascend 20 ft.
40.00	Descend 24 ft., to Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bed rock, deposit a stone marked with a cross (x) at base of post, and raise a mound of stone around

34 Survey of Subdivision lines of Township 7 North, Range 6 West.

Chains.

post for $\frac{1}{4}$ sec.cor., marked on brass cap,

S10 | S11

1922

No bearing trees available.
Ascend 200 ft., over SW.slope.

61.70

Spur, slopes MW.

Descend 265 ft., over NE.slope, to

80.00

Set an iron post, 3 ft.long, 2 ins.in diam., 12 ins.in the ground to bedrock, and raise a mound of stone around post, for cor. of secs. 2,3,10 and 11, marked on brass cap,

T7N R6W

S 3 | S 2

S10 | S11

1922

No bearing trees available.
Raise a mound of stone, 3 ft. base, 2 ft. high, W.of cor.
Land, mountainous.
Soil, rocky, 4th rate, malpais formation.
Timber, palo verde and mesquite.
Undergrowth, greasewood, catclaw, ocotillo, yucca and cactus.

S.89° 56'E., on a random line, bet. secs.2 and 11.

40.00

Set temp. $\frac{1}{4}$ sec.cor.

79.82

Intersect N. and S. line, 5 lks. N. of the cor. of, secs. 1,2,11 and 12.

Thence,

N.89°54'W., on a true line, bet. secs.2 and 11.

Over rolling and mountainous land, thru.scattering timber and dense undergrowth.

11.30

Ascend 40 ft., over E.slope.

Ridge, bra.N.and S.

19.00

Descend 55 ft., over W.slope.

Wash, 10 lks.wide, course N:

38.80

Ascend 70 ft., over E.slope.

Spur, slopes N.

39.91

Descend 5 ft., over W.slope, to

Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,

S 2

S 11

1922

No bearing trees available. Raise a mound of stone, 2 $\frac{1}{2}$ ft.base, 2 ft.high, N.of cor.

42.30

Descend 20 ft., over W.slope.

Draw, course N.

68.75

Ascend 230 ft., over NE.slope.

Ridge, brs. NW. and SE.

74.90

Descend 125 ft., over SW.slope.

Draw, 10 lks.wide, course NW.

79.82

Ascend 85 ft., over NE.slope, to

The cor.of secs. 2,3,10 and 11.

Land, rolling and mountainous.

Soil, rocky, 3rd and 4th rate; malpais formation.

Timber, palo verde and mesquite.

Undergrowth, greasewood, ocotillo and cactus.

N.0°1'W., on a true line, bet. secs 2 and 3.

Over rolling and mountainous land, thru.scattering timber

Survey of Subdivision lines of Township 7 North Range 6 West. 35

Chains.

and dense undergrowth.
 Descend 130 ft., over NE. slope.
 10.50 Draw, course NW.
 Ascend 10 ft., over SW. slope.
 15.00 Ridge, brs. NW. and SE.
 Descend 130 ft., over NE. slope, to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
 S 3 | S 2
 1922

No bearing trees available.
 Raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 2 ft. high, W. of cor.
 Descend slightly over NE. slope.
 41.80 Draw, course E.
 Ascend 35 ft., over SE. slope.
 55.00 Ridge, brs. E. and SW.
 Descend 46 ft., over NW. slope.
 65.00 Wash, 50 lks. wide, course NE.
 Ascend 25 ft., over SE. and E. slope.
 72.80 Dim road, brs. NE. and SW.
 79.92 Intersect the N. bdy. of the Tp. at a point 9.84 chs. E.
 of the original cor. of secs. 2, 3, 34 and 35, changed to
 refer to secs. 34 and 35, T. 8 N., R. 6 W. only, as hereinbe-
 fore described.

At the point of intersection,
 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in
 the ground, for closing cor. of secs. 2 and 3, T. 7 N.,
 R. 6 W., marked on brass cap,

T8N R6W
 S35
 S 3 | S 2
 T7N R6W
 C C
 1922

No bearing trees available.
 Raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.
 Land, rolling and mountainous.
 Soil, rocky, 4th rate.
 Timber, palo verde, mesquite and ironwood.
 Undergrowth, greasewood and cactus.

 From the cor. of secs. 33 and 34, on the S. bdy. of the
 Tp., hereinbefore described,
 N. 0° 2' W., bet. secs. 33 and 34.
 Over rolling and hilly land, thru. scattering timber
 and dense undergrowth.

Ascend 5 ft., over S. slope.
 2.00 Top of hill.
 Descend 8 ft., over N. slope.
 4.70 Draw, course E. near head.
 Ascend 83 ft., over S. slope.
 8.00 Top of hill.
 Descend 125 ft., over N. slope, to
 34.00 Thence over level land.
 39.90 Wash, 20 lks. wide, course NW.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
 S33 | S34
 1922

36 Survey of Subdivision lines of Township 7 North, Range 6 West.

Chains.

No bearing trees available.
 Dig pits, 18x18x12 ins., one each N. and S. of post, 3 ft. dist.
 Continue over level land.
 41.70 Dim road, brs. N. 30° W. and S. 30° E.
 65.00 Leave level land, brs. E. and W. Enter rolling land.
 Ascend 98 ft., over S. slope, to
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 27, 28, 33 and 34, marked on brass cap,

T7N R6W
 S28 | S27
 S33 | S34
 1922

No bearing trees available.
 Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Land, rolling, hilly and level.
 Soil, rocky, 3rd and 4th rate; malpais formation.
 Timber, palo verde and mesquite.
 Undergrowth, greasewood, ocotillo and cactus.
 Thick grass.

 S. 89° 59' E., on a random line, bet. secs. 27 and 34.
 40.00 Set temp. 1/4 sec. cor.
 80.12 Intersect N. and S. line, 5 lks. N. of the cor. of secs. 26, 27, 34 and 35.
 Thence,
 N. 89° 57' W., on a true line, bet. secs. 27 and 34.
 Over gently rolling land, thru. scattering timber and dense undergrowth.
 7.60 Ascend slightly over E. slope.
 10.00 Old road, brs. N. 30° W. and S. 30° E.
 23.10 Descend slightly over W. slope.
 Wash, 20 lks. wide, course N.
 Ascend 65 ft., over E. slope.
 33.15 Descend 20 ft., over W. slope.
 36.10 Wash, 20 lks. wide, course N.
 Ascend 35 ft., over E. slope, to
 40.06 Set an iron post, 3 ft. long, 1 in. in diam., on surface rock, deposit a stone, marked with a cross (x) at base of post, and raise a mound of stone around post, for 1/4 sec. cor., marked on brass cap,

1/4 S 27
 S 34
 1922

No bearing trees available.
 Ascend slightly over E. slope.
 43.10 Ridge, brs. N. and S.
 Descend 52 ft., over W. slope.
 54.50 Wash, 20 lks. wide, course N. 20° E.
 Ascend 76 ft. over E. slope.
 67.10 Spur, slopes N.
 Descend 17 ft., over W. slope.
 70.10 Ascend 25 ft., over S. slope, to
 80.12 The cor. of secs. 27, 28, 33 and 34.
 Land, rolling and gently rolling;
 Soil, rocky, 4th rate, granite formation.
 Timber palo verde and mesquite.
 Undergrowth, greasewood, yucca, catclaw, and cactus.

BOOK 3608

Survey of the Subdivision of Township 7 North, Range 6 West. 37

Chains.

N.0°2'W., bet. secs. 27 and 28.
 Over rolling land, thru. scattering timber and dense undergrowth.
 Ascend 30 ft., over S. slope.
 4.00 Ridge, brs.E. and W.
 Descend 80 ft., over N. slope.
 19.30 Wash, 20 lks. wide, course NW.
 Ascend 60 ft., over SW. slope.
 28.90 Point of spur, slopes W.
 Descend 74 ft., over NW. slope, to
 38.90 Same wash, course N.70°E.
 Ascend slightly over E. slope, to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

S28 | S27

1922

No bearing trees available.
 Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
 Descend 27 ft., over E. slope, to
 50.40 Wash, 15 lks. wide, course E.
 Ascend 30 ft., over SE. slope.
 65.00 Ridge, brs. NE. and SW.
 Descend 25 ft., over NW. slope, to
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 21, 22, 27 and 28, marked on brass cap,

T7N R6W
 S21 | S22
 S28 | S27

1922

No bearing trees available.
 Raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 2 ft. high, W. of cor.
 Land, rolling and gently rolling.
 Soil, rocky, 4th rate; granite formation.
 Timber, palo verde and mesquite.
 Undergrowth, greasewood, catclaw, yucca and cactus.

S.89°57'E., on a random line, bet. secs. 22 and 27.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.00 Intersect N. and S. line, 5 lks. S. of the cor. of secs. 22, 23, 26 and 27.
 Thence,
 N.89°59'W., on a true line, bet. secs. 22 and 27.
 Over rolling land, thru. scattering timber and dense undergrowth.
 Descend slightly over W. slope, to
 2.00 Foot of descent, brs. N. and S. Leave rolling, and enter level land
 12.00 Leave level land, brs. N. and S. Enter rolling land.
 Ascend 32 ft., over E. slope.
 32.00 Descend 36 ft. over W. slope.
 39.00 Wash, 10 lks. wide, course NW.
 Ascend slightly, over E. slope, to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 22
 S 27
 1922

No bearing trees available.

38 Survey of Subdivision lines of Township 7 North, Range 6 West.

Chains.	Raise a mound of stone, $2\frac{1}{2}$ ft. base, 2 ft. high, N. of cor. Ascend 7 ft., over E. slope.
43.00	Descend 11 ft., over W. slope.
47.80	Wash, 20 lks. wide, course N. Ascend 38 ft., over SE. slope.
58.00	Ridge, brs. NE. and SW. Descend 40 ft., over NW. slope to sec. cor.
76.80	Dim road, brs. NW and SE.
80.00	The cor. of secs. 21, 22, 27 and 28. Land, level and rolling. Soil, sandy loam, 2nd rate. Timber, palo verde, mesquite and ironwood. Undergrowth, greasewood, ocotillo and cactus.

	N. $0^{\circ}2'W.$, bet. secs. 21 and 22. Over gently rolling land, thru. scattering timber and dense undergrowth. Descend gradually over NW. slope.
22.20	Old road, brs. NW and SE.
14.00	Wash, 10 lks. wide, course NE. Thence, over nearly level land. Descend slightly over NE. slope, to
31.00	Same wash, 20 lks. wide, course W. Descend slightly over W. slope, to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,
	$\begin{array}{c} \uparrow \\ S21 S22 \\ \downarrow \\ 1922 \end{array}$
	No bearing trees available. Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor. Continue over nearly level land, descending gradually over NW. slope.
40.35	Highway, brs. E. to Wickenburg and W. to Aguila.
59.20	Same wash, 25 lks. wide, course N. $70^{\circ}E.$ Leave nearly level and enter gently rolling land. Asc. 35 ft., over SE. slope.
75.00	Ridge, brs. NE. and SW. Descend 25 ft. over NW. slope, to
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bed rock, and raise a mound of stone around post for cor. of secs. 15, 16, 21 and 22, marked on brass cap,
	$\begin{array}{c} T7N R6W \\ S16 S15 \\ S21 S22 \\ 1922 \end{array}$
	No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Land, nearly nearly level and gently rolling. Soil, sandy loam, 2nd rate. Timber, palo verde. Undergrowth, greasewood and cactus.

40.00	S. $89^{\circ}59'E.$ on a random line, bet. secs. 15 and 22. Set temp. $\frac{1}{4}$ sec. cor.
79.96	Intersect N. and S. line, 2 lks. S. of the cor. of secs. 14, 15, 22 and 23. Thence, West, on a true line, bet. secs. 15 and 22. Over rolling land, thru. scattering timber and dense undergrowth.

Survey of Subdivision lines of Township 7 North, Range 6 West. 39

Chains.

10.00 Ascend 22 ft., over SE. slope.
 Ridge, brs. N. 5° W. and S. 5° E.
 Descend 37 ft., over W. slope.

16.95 Old road, brs. N. and S.

19.70 Wash, 15 lks. wide, 4 ft. deep, course N. 20° W.
 Descend slightly over N. slope.

23.85 Wash, 30 lks. wide, course N.

39.98 Ascend 20 ft., over SE. slope, to
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for 1/4 sec. cor., marked on brass cap,

1/4 S 15
 S 22
 1922

No bearing trees available.
 Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
 Ascend 45 ft., over SE. slope.

57.95 Descend 10 ft.

59.95 Ascend 46 ft., over SE. slope.

74.95 Ridge, brs. NE. and SW.
 Descend 40 ft., over NW. slope, to
 79.96 The cor. of secs. 15, 16, 21 and 22.
 Land, rolling and gently rolling.
 Soil, gravelly loam, 2nd rate.
 Timber, palo verde and mesquite.
 Undergrowth, greasewood and cactus.
 Thick grass.

N. 0° 2' W., bet. secs. 15 and 16.
 Over gently rolling land, thru. scattering timber and
 dense undergrowth.

38.40 Descend gradually over NW. slope.
 Wash, 15 lks. wide, course W.

40.00 Ascend slightly over S. slope, to
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for 1/4 sec. cor., marked on brass cap,

1/4 S 16 | S 15
 1922

No bearing trees available.
 Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
 Ascend 80 ft., over SW. slope.

54.20 Spur, slopes NW.
 Descend 85 ft., over NE. slope.

69.00 Draw, course NW.
 Ascend 12 ft., over SW. slope.

72.40 Point of spur, slopes W.
 Descend 30 ft., over NW. slope.

78.20 Same draw, 10 lks. wide, course NE.
 Ascend slightly over NE. slope, to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in
 the ground, for cor. of secs. 9, 10, 15 and 16, marked on
 brass cap,

T7N R6W
 S 9 | S 10
 S 16 | S 15
 1922

No bearing trees available.
 Raise a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, W. of cor.
 Land, gently rolling and rolling.
 Soil, rocky, 3rd and 4th rate; malpais and granite formation.

40 Survey of Subdivision lines of Township 7 North, Range 6 West.

Chains.

Timber, palo verde and mesquite.
Undergrowth, greasewood, yucca, cactus and ocotillo.

40.00 East, on a random line, bet. secs. 10 and 15.
Set temp. $\frac{1}{4}$ sec. cor.
79.94 Intersect N. and S. line, 2 lks. N. of the cor. of secs.
10, 11, 14 and 15.
Thence,
N. $89^{\circ}59'W.$, on a true line, bet. secs. 10 and 15.
Over rolling and mountainous land, thru. scattering timber
and dense undergrowth.
7.65 Ascend 28 ft., over SE. slope, to
Saddle in ridge, brs. NE. and SW.
12.65 Ascend 35 ft. over NE. slope, to
Descend 200 ft., over NW. slope, to
35.00 Thence over gently rolling land.
Descend slightly over NW. and W. slopes, to
39.97 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 10
S 15
1922

No bearing trees available.
Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
Continue over gently rolling land.
Descend slightly over W. slope.
43.25 Wash, 50 lks. wide, course N. $20^{\circ}W.$
Ascend 40 ft., over NE. slope,
44.05 Old road, brs. N. $20^{\circ}W.$ and S. $20^{\circ}E.$
55.95 Thence along N. slope.
Descend 25 ft., to
74.95 Descend 10 ft., over NW. slope.
78.85 Draw, course N. $20^{\circ}E.$
Ascend slightly over NE. slope, to
79.94 The cor. of secs. 9, 10, 15 and 16.
Land, rolling, gently rolling and mountainous.
Soil, rocky, 4th rate.
Timber, palo verde and mesquite.
Undergrowth, greasewood, cactus and catclaw.
Good grass.

N. $0^{\circ}2'W.$, bet. secs. 9 and 10.
Over gently rolling land, thru. scattering timber and
dense undergrowth.
Descend slightly over NE. slope.
10.00 Wash, 5 lks. wide, course N. $70^{\circ}E.$
18.00 Ascend 28 ft., over SE. slope, to
Rim of mesa, brs. NE. and SW. Thence over level land; on
low mesa.
38.00 Rim of mesa, brs. NW and SE. Leave level, and enter gently
rolling land.
Descend slightly over NE. slope, to
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

S 9 | S 10
1922

No bearing trees available. Raise a mound of stone, $2\frac{1}{2}$
ft. base, 2 ft. high, W. of cor.
Descend gradually over NE. slope.
56.00 Wash, 10 lks. wide, 2 ft. deep, course E.
Descend slightly over E. slope, to

Survey of Subdivision lines of Township 7 North, Range 6 West. 41

Chains.

67.50 Draw, course E.
 Ascend slightly over SE. slope.
 75.00 Descend slightly over N. slope, to
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins.
 in the ground, for cor. of secs. 3, 4, 9 and 10, marked
 on brass cap,

T7N	R6W
S 4	S 3
S 9	S 10

1922

No bearing trees available.
 Raise a mound of stone 2½ ft. base, 2 ft. high, W. of cor.
 Land, level and gently rolling.
 Soil, rocky, 3rd and 4th rate, granite and malpais for-
 mation.
 Timber, palo verde.
 Undergrowth, greasewood, crucifixion thorn, catclaw, yucca
 and cactus.

42. Survey of Subdivision lines of Township 7 North, Range 6 West.

Chains.

S. 89° 59' E., on a random line, bet. secs. 3 and 10.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.94 Intersect N. and S. line, 2 lks. S. of the cor. of secs.
 2, 3, 10 and 11.
 Thence,
 West, on true line, bet. secs. 3 and 10.
 Over rolling land, thru. scattering timber and dense
 undergrowth.
 Ascend 40 ft., over NE. slope.
 4.95 Spur, slopes NW.
 Descend 260 ft., over W. slope.
 32.45 Wash, 50 lks. wide, course N.
 Ascend slightly over NE. slope, to
 39.97 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

 S 3
 S 10
 1922

No bearing trees available.
 Raise a mound of stone, 3 ft. base, 2 ft. high, N. of
 cor.
 Ascend gradually over NE. slope.
 50.00 Descend gradually over NW. slope;
 60.45 Dim road, brs. N. and S.
 71.85 Wash, 70 lks. wide, course N.
 Ascend gradually over NE. slope, to
 79.94 The cor. of secs. 3, 4, 9 and 10.
 Land, rolling.
 Soil, rocky, 3rd and 4th rate.
 Timber, palo verde and mesquite.
 Undergrowth, greasewood, cactus and ocotillo.
 Good grass.

N. 9° 2' W., on a true line, bet. secs. 3 and 4.
 Over rolling land, thru. scattering timber and dense
 undergrowth.
 Descend 12 ft., over N. slope.
 6.70 Wash, course NE.
 Ascend 100 ft., over SE. slope.
 31.00 Spur, slopes NE.
 Descend 48 ft., over NW. slope, to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins.
 in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

Survey of Subdivision lines of Township 7 North, Range 6 West, 43

Chains.

1/4
S 4 | S 3
1922

No bearing trees available.
Raise a mound of stone, 2 1/2 ft. base, 2 ft. high, W. of cor.
Descend 46 ft., over NW. slope, to
55.00 Thence over gently rolling land.
Descend gradually over NW. slope.
75.95 Old road, brs. E. and W.
80.06 Intersect the N. bdy. of the Tp. at a point 9.86 chs. E. of
the original cor. of secs. 3, 4, 33 & 34, changed to refer
to secs. 33 and 34, T. 8 N., R. 6 W. only, as hereinbefore
described.
At the point of intersection,
Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in
the ground, for closing cor. of secs. 3 and 4, T. 7 N.,
R. 6 W., marked on brass cap,

T8N R6W
S34
S 4 | S 3
T7N R6W
C C
1922

No bearing trees available. Raise a mound of stone, 3
ft. base, 2 ft. high, S. of cor.
Land, rolling and gently rolling.
Soil, rocky, 4th rate; malpais formation.
Timber, palo verde.
Undergrowth, greasewood, cactus.
Good grass.

From the cor. of secs. 32 and 33, on the S. bdy. of Tp.,
hereinbefore described,
N. 0° 2' W., bet. secs. 32 and 33.
Over rolling land, thru. scattering timber and dense
undergrowth.
2.60 Descend gradually over NE. slope.
Head of wash, course N. 45° E.
Ascend 20 ft., over E. slope.
9.00 Descend 25 ft., over NE. slope.
13.50 Wash, 5 lks. wide; course S. 75° E.
Ascend 60 ft., over SE. slope.
19.00 Point of spur, slopes E.
Descend 70 ft., over NE. slope, to
29.30 Wash, 3 lks. wide, course E.
Descend 30 ft., over E. and NE. slopes, to
37.00 Wash, 3 lks. wide, course NE; Enter grassy valley.
Descend slightly over NE. slope, to
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for 1/4 sec. cor., marked on brass cap,

1/4
S32 | S33
1922

No bearing trees available.. Raise a mound of stone, 3 1/2
ft. base, 1 1/2 ft. high, W. of cor.
Continue across grassy valley.
Descend slightly over NE. slope.
50.00 Grassy draw, course N. 45° W.
Ascend gradually over W. slope.

44 Survey of Subdivision Lines of Township 7 North, Range 6 West.

Chains.

- 70.00 Low ridge, brs. N. 30° W. and S. 30° E.
Descend gradually, over NE. slope, to
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in
the ground, for cor. of secs. 28, 29, 32 and 33, marked
on brass cap,

T7N R6W

S29/S28S32/S33

1922

No bearing trees available. Raise a mound of stone, 3½
ft. base, 2½ ft. high, W. of cor.

Land, rolling and gently rolling.

Soil, gravelly and stony, 3rd and 4th rate.

Timber, palo verde and mesquite.

Undergrowth, greasewood, yucca and cactus.

Good grass.

- 40.00 S. 89° 59' E., on a random line, bet. secs. 28 and 33.
Set temp. $\frac{1}{4}$ sec. cor.
80.00 Intersect N. and S. line, 5 lks. S. of the cor. of secs. 27,
28, 33 and 34.
Thence,
S. 89° 59' W., on a true line, bet. secs. 28 and 33.
Over gently rolling land, thru. scattering timber and
dense undergrowth.
Descend 45 ft., over S. and SW. slopes.
11.70 Wash, 3 lks. wide, course SW.
Descend slightly, over SW. slope.
30.00 Wash, 30 lks. wide, course NW.
Ascend slightly over NE. slope.
31.10 Dim road, brs. N. 45° W. and S. 45° E.
32.00 From this point, small reservoir, brs. North 2 chs. dist.
36.00 Descend slightly over W. slope.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

 $\frac{1}{4}$ S 28

S 33

1922

No bearing trees available. Raise a mound of stone, 2½
ft. base, 2 ft. high, N. of cor.

Descend slightly over W. slope.

- 42.70 Grassy draw, course N. 20° W.

Ascend 23 ft., over NE. slope.

- 46.70 Low ridge, brs. N. 20° W. and S. 20° E.

Descend gradually over SW. slope.

- 60.00 Grassy draw, course N. 15° W.

Ascend gradually over NE. slope, to

- 70.00 Low ridge, brs. N. 20° W. and S. 20° E.

Descend gradual slope.

- 75.00 Grassy draw, course N. 20° W.

Ascend gradually over NE. slope, to

- 80.00 The cor. of secs. 28, 29, 32 and 33.

Land, gently rolling.

Soil, rocky, 3rd and 4th rate.

Timber, palo verde and mesquite.

Undergrowth, catclaw, cactus and greasewood.

Good grass.

N. 0° 2' W., bet. secs. 28 and 29.

Over gently rolling land, thru. scattering timber and
undergrowth.

Survey of Subdivision lines of Township 7 North, Range 6 West. 45

Chains.

40.00 Descend gradually over NE. and E. slopes.
Along W. side of grassy draw, draining N.
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

1/4
S29 | S28

1922

No bearing trees available.
Raise a mound of stone, 3 ft. base, 2 1/2 ft. high, W. of cor.
Descend gradually over E. slope, along W. side of draw, draining N.

77.00 Grassy draw, course N. 15° W.

80.00 Descend slightly over W. slope, to

Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground for cor. of secs. 20, 21, 28 and 29, marked on brass cap,

T7N R6W
S20 | S21

S29 | S28

1922

No bearing trees available.
Raise a mound of stone, 3 ft. base, 2 1/2 ft. high, W. of cor.

Land, gently rolling.
Soil, gravelly, 2nd and 3rd rate.
Timber, mesquite and palo verde.
Undergrowth, catclaw and cactus.
Good grass.

40.00 N. 89° 59' E., on a random line, bet. secs. 21 and 28.
Set temp. 1/4 sec. cor.

80.00 Intersect N. and S. line, 2 lks. S. of the cor. of secs. 21, 22, 27 and 28.

Thence,

S. 89° 58' W., on a true line, bet. secs. 21 and 28.

Over gently rolling land, thru. scattering timber and undergrowth.

5.00 Descend gradually over NW. slope.

Wash, 5 lks. wide, course NE.

12.00 Ascend 45 ft., over NE. slope.

Top of ascent on N. side of hill.

40.00 Descend gradually over NW. slope, to

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

1/4 S 21
S 28

1922

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 1/2 ft. high, N. of cor.

Continue over gently rolling land.

Descend gradually over W. slope.

49.40 Dim road, brs. NE. and SW.

78.60 Dim road, brs. NW. and SE.

80.00 The cor. of secs. 20, 21, 28 and 29.

Land, gently rolling.

Soil, gravelly and stony, 3rd rate.

Timber, palo verde.

Undergrowth, catclaw and cactus.

Good grass.

46 Survey of Subdivision lines of Township 7 North, Range 6 West.

Chains.

N.0°2'W., bet. secs. 20 and 21.
 Over gently rolling land, thru. scattering timber and undergrowth.
 Descend gradually over W.slope.
 2.00 Dim road, brs.N.30°W. and S.30°E.
 30.70 Old road, brs.E. and W.
 40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,

$$\frac{1}{4}$$

S20		S21
-----	--	-----

1922

No bearing trees available.
 Raise a mound of stone, 3 ft. base, 2 ft. high, W.of cor.
 Descend gradually over W. slope.
 40.20 Highway, brs.S. 70°E. to Wickenburg and N.45°W. to Aguila.
 61.20 Wash, 5 lks.wide, course S.45°W.
 Ascend 40 ft., over SE.slope.
 68.00 Descend 10 ft., over NE.slope.
 73.00 Same wash, 5 lks.wide, course SE.
 Ascend 50 ft., over SE.slope.
 78.00 Point of spur, slopes E.
 Descend 16 ft., over NE.slope, to
 80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 26 ins.in the ground, for cor.of secs.15,16,21 and 22, marked on brass cap,

T7N	R6W	
S17		S16
S20		S21

1922

No bearing trees available. Raise a mound of stone, 3 ft. base, 2½ ft. high, W.of cor.
 Land, gently rolling and rolling.
 Soil, gravelly and stony, 3rd and 4th rate.
 Timber, palo verde and mesquite.
 Undergrowth, catclaw, cactus and greasewood.

40.00 N.89°58'E., on a random line, bet. secs.16 and 21.
 Set temp. $\frac{1}{4}$ sec.cor.
 80.02 Intersect N. and S. line, 5 lks.S. of the cor. of secs.15, 16, 21 and 22.
 Thence,
 S.89°56'W., on a true line, bet. secs. 16 and 21.
 Over rolling land, thru. scattering timber and undergrowth.
 Descend gradually, over NW.slope.
 11.30 Leave rolling and enter mountainous land.
 Ascend 145 ft., over SE.slope.
 25.80 Top of ascent on S. side of top of hill.
 Descend 140 ft., over SW.slope, to
 35.00 Foot of descent, brs.NW. and SE.
 Leave mountainous and enter level land.
 40.01 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,

$$\frac{1}{4}$$

S 16
S 21

1922

No bearing trees available. Raise a mound of stone, 3 ft. base, 2½ ft. high, N.of cor.
 Thence, of over level land.

BOOK 3608

Survey of Subdivision lines of Township 7 North, Range 6 West. 47

Chains.

52.00 Leave level, and enter rolling land.
Ascend slightly over N. slope.

52.20 Dim road, brs. NW. and SE.

64.00 Wash, 5 lks. wide, course NE.
Ascend over NE. slope, to

70.30 Wash, 5 lks. wide, course N. 20° E.
Ascend 70 ft., over NE. slope, to

80.02 The cor. of secs. 16, 17, 20 and 21.
Land, rolling, mountainous, gently rolling and level.
Soil, gravelly and stony, 3rd rate.
Timber, palo verde and mesquite.
Undergrowth, cactus, catclaw, ocotillo and greasewood.

N. 0° 2' W., bet. secs. 16 and 17.
Over gently rolling land, thru. scattering timber and undergrowth.

9.10 Descend gradually over N. slope, to
Wash, 5 lks. wide, course NE.

20.50 Descend gradually over NE. slope.
Wash, 2 lks. wide, course NE.

26.60 Wash, 4 lks. wide, course NE.
Ascend 20 ft., over SE. slope, to

31.00 Descend gradually over NE. slope, to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
S17 | S16

1923

No bearing trees available. Raise a mound of stone, 3
ft. base, 2 $\frac{1}{2}$ ft. high, W of cor.

Ascend gradually over SE. slope.

53.00 Spur, slopes NE.
Descend gradually over N. slope, to

65.00 Leave timber, brs. N. 45° W. and S. 45° E. Thence across
grassy flat.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in
the ground, for cor. of secs. 8, 9, 16 and 17, marked on
brass cap,

T7N R6W
S 8 | S 9

S17 | S16
1923

No bearing trees available. Raise a mound of stone, 3 $\frac{1}{2}$
ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.
Land, gently rolling and level.
Soil, gravelly and rocky, 3rd and 4th rate.
Timber, palo verde.
Undergrowth, ocotillo, catclaw and cactus.
Good grass.

40.00 N. 89° 56' E., on a random line, bet. secs. 9 and 16.
Set temp: $\frac{1}{4}$ sec. cor.

80.02 Intersect N. and S. line, 7 lks. N. of the cor. of secs.
9, 10, 15 and 16:
Thence,
S. 89° 59' W., on a true line, bet. secs. 9 and 16.
Over gently rolling land, thru. scattering undergrowth.
Ascend gradually over NE. slope.

15.00 Low spur, slopes NW.
Descend gradually over W. slope, to

48 Survey of Subdivision lines of Township 7 North, Range 6 West.

Chains.

32.00 Center of grassy draw, 1 ch. wide, course N. 30° W. Thence over level land.
 40.01 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 9
 S 16
 1923

No bearing trees available. Raise a mound of stone, 3 ft. base, 2½ ft. high, N. of cor.

68.70 Center of grassy draw, 2 chs. wide, course N.

73.00 Dim road, brs. N. 20° W. and S. 20° E.

80.02 The cor. of secs. 8, 9, 16 and 18.

Land, gently rolling and level.
 Soil, gravelly and stony, 3rd and 4th rate.
 Timber, none.
 Undergrowth, catclaw and ocotillo.

N. 0° 2' W., bet. secs. 8 and 9.

Over level land, thru. scattering undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
 S 8 | S 9
 1923

No bearing trees available.

Raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.

Continue over level land.

66.50 Dim road, brs. N. 60° E. and S. 60° W.

75.00 Leave level, and enter gently rolling land.

Ascend gradually over S.E. slope, to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bed rock, deposit a stone, marked with a cross (x) at base of post, and raise a mound of stone around post, for cor. of secs. 4, 5, 8 and 9, marked on brass cap,

T7N R6W
 S 5 | S 4
 S 8 | S 9
 1923

No bearing trees available. Raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.

Land, level and gently rolling.

Soil, gravelly, 3rd and 4th rate.

Timber, none.

Undergrowth, catclaw, ocotillo and cactus.

Good grass.

N. 89° 59' E., on a random line, bet. secs. 4 and 9.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.04 Intersect N. and S. line, 7 lks. N. of the cor. of secs. 3, 4, 9 and 10.

Thence,

N. 89° 58' W., on a true line, bet. secs. 4 and 9.

Over gently rolling land, thru. scattering timber and undergrowth.

Descend slightly over N. slope.

1.95 Wash, 3 lks. wide, course N. 15° E. near head.

Survey of Subdivision lines of Township 7 North, Range 6 West. 49

Chains.

15.00 Ascend gradually over NE. slope.
 Low spur, slopes N.
 25.05 Descend gradually over NW. slope, to
 Grassy draw, course NW.
 40.02 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 4
 S 9
 1923

No bearing trees available. Raise a mound of stone, 3 ft.
 base, $2\frac{1}{2}$ ft. high, N. of cor.
 Descend gradually over NW. slope.
 56.00 Center of grassy draw, course NW. Thence over level land.
 72.25 Dim road, brs. NE. and SW.
 75.00 Leave level, and enter gently rolling land.
 Ascend 25 ft., over SE. slope, to
 80.04 The cor. of secs. 4, 5, 8 and 9.
 Land, gently rolling and level.
 Soil, gravelly, 3rd rate.
 Timber, palo verde.
 Undergrowth, ocotillo, catclaw and cactus,
 Good grass.

N. $0^{\circ}2'W.$, on a true line, bet. secs. 4 and 5.
 Over rolling and mountainous land, thru. scattering tim-
 ber and undergrowth.
 Ascend 235 ft., over SE. slope.
 25.80 Top of ascent. Top of hill brs. West 20 chs. dist.
 Descend 195 ft., over NE. slope, to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
 S 5 | S 4
 1923

No bearing trees available. Raise a mound of stone, 3 ft.
 base, $2\frac{1}{2}$ ft. high, W. of cor.
 Descend 92 ft., over NE. slope, to
 50.00 Foot of hill, brs. NW and SE. Thence over level land.
 79.90 Intersect the N. bdy. of the T., 9.90 chs. E. of the orig-
 inal cor. of secs. 4, 5, 32 and 33 changed to refer to
 secs. 32 and 33, T. 8 N., R. 6 W. only, as hereinbefore
 described.

At the point of intersection,
 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins.
 in the ground, for closing cor. of secs. 4 and 5, T. 7
 N., R. 6 W., marked on brass cap,

T8N R6W
 S33
 S 5 | S 4
 T7N | R6W
 C C
 1923

No bearing trees available.
 Raise a mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high, S. of cor.
 Land, mountainous and level.
 Soil, gravelly and rocky, 4th rate.
 Timber, palo verde.
 Undergrowth, catclaw, cactus and ocotillo.

50 Survey of Subdivision lines of Township 7 North, Range 6 West.

Chains.

From the cor. of secs. 31 and 32, on the S. bdy. of the Tp., hereinbefore described,
 N. $0^{\circ}31'W.$, bet. secs. 31 and 32.
 Over hilly land, thru. scattering timber and undergrowth.
 Ascend 20 ft., over SW. slope.
 4.00 Spur, slopes W. from SE.
 Descend 140 ft., over NE. slope.
 21.70 Wash, 14 lks. wide, course NW.
 Ascend 50 ft., over SW. slope.
 34.00 Spur, slopes S. $45^{\circ}W.$
 Descend 40 ft. over NW. slope, to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bed rock, and raise a mound of stone around post for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
 S31 | S32

1922

No bearing trees available. Raise a mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high, W. of cor.
 Thence over gently rolling land.
 Descend gradually over NW. slope, to
 54.75 Bend in wash, 20 lks. wide, course NW. from SW.
 Descend gradually along W. slope, to
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 29, 30, 31 and 32, marked on brass cap,

T7N R6W
 S30 | S29

S31 | S32
 1922

No bearing trees available. Raise a mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high, W. of cor.
 Land hilly and gently rolling.
 Soil, gravelly and rocky, 3rd and 4th rate.
 Timber, palo verde.
 Undergrowth, catclaw and cactus.

S. $89^{\circ}59'E.$, on a random line, bet. secs. 29 and 32.
 40.00 Set temp. $\frac{1}{4}$ sec. cor..
 79.98 Intersect the cor. of secs. 28, 29, 32 and 33.
 Thence,
 N. $89^{\circ}59'W.$, on a true line, bet. secs. 29 and 32.
 Over gently rolling land, thru. scattering timber and undergrowth.
 Ascend gradually over NE. slope.
 6.00 Low ridge, brs. N. $20^{\circ}W.$ and S. $20^{\circ}E.$
 Descend gradually over W. slope.
 13.00 Center of grassy draw, 8 chs. wide, course N. $5^{\circ}W.$
 Ascend gradually over E. slope, to
 39.99 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bed rock, and raise a mound of stone around post, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 29
 S 32
 1922

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
 Ascend gradually over E. slope.
 59.30 Low ridge, brs. N. and S.
 Descend gradually over W. slope.

3608

Survey of Subdivision lines of Township 7 North, Range 6 West. 51

Chains.

66.00 Center of grassy draw, 8 chs.wide, course,N.
Ascend gradually over E.slope.

75.00 Top of low ridge, brs.N.and S.
Descend gradually over.W.slope.

79.98 The cor.of secs.29, 30, 31 and 32.

Land, gently rolling.

Soil, gravelly and rocky, 3rd and 4th rate.

Timber, palo verde and mesquite.

Undergrowth, cactus, catclaw and yucca.

Good grass.

40.00 N.89°59'W., on a random line, bet. secs.30 and 31.

Set temp. $\frac{1}{4}$ sec.cor.

90.68 Fall 5 lks.S. of the cor.of secs.25,30,31 and 36, on the
W. bdy.of the Tp., which is an iron post, 3 ins. in
diam., projecting 12 ins. above ground, firmly set,
properly marked on brass cap, and witnessed by four
pits, one each NE.,SE.,SW. and NW. of cor.,and a mound
of earth W.of cor. No bearing trees.

Thence,

S.89°57'E. on a true line, bet. secs.30 and 31.

Over gently rolling land, thru. scattering timber and
undergrowth.

Descend slightly over N.slope.

27.70 Wash, course NW.

Ascend gradually over W. slope.

43.00 Descend gradually over NE.slope, to

50.68 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins.in
the ground, for $\frac{1}{4}$ sec.cor.,marked on brass cap,

$\frac{1}{4}$ S 30

S 31

1922

No bearing trees available.

Raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, N.of cor.

Descend gradually over NE.slope, to

63.70 Center of grassy draw, course NW.

Ascend gradually over SW.slope.

77.20 Ridge, brs.N.30°W. and S.30°E.

Descend 35 ft., over NE. slope.

86.90 Wash, 20 lks.wide, course N.

Ascend gradually over W.slope, to

90.68 The cor.of secs.29,30,31 and 32.

Land, gently rolling.

Soil, gravelly and stony, 3rd and 4th rate.

Timber, palo verde and mesquite.

Undergrowth, cactus, catclaw and ocotillo.

Good grass.

N.0°3'W., bet. secs. 29 and 30.

Over gently rolling land, thru. scattering undergrowth.

Descend gradually over W. and NW.slopes, to

18.10 Wash, 20 lks.wide, course N.30°E.

Descend gradually over E. and NE.slopes, to

40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,

$\frac{1}{4}$
S30 | S29

1922

No bearing trees available.

Raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft.high,W.of cor.

Descend gradually.

52 Survey of Subdivision lines of Township 7 North Range 6 West.

Chains.

- 70.00 Ascend 20 ft. over SE. slope.
 77.00 Low ridge, brs. NE. and SW.
 Descend 12 ft., over NW. slope, to
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in
 the ground, for cor. of secs. 19, 20, 29 and 30, marked on
 brass cap,
- T7N R6W
 S19|S20
 S30|S29
 1922
- No bearing trees available.
 Raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.
 Land, gently rolling.
 Soil, gravelly, 3rd rate.
 No timber.
 Undergrowth, ocotillo, catclaw and cactus.
 Fair grass.
-
- 40.00 S. 89°59'E., on a random line, bet. secs. 20 and 29.
 Set temp. ¼ sec. cor.
 79.92 Intersect N. and S. line, 2 lks. S. of the cor. of secs. 20,
 21, 28 and 29,
 Thence,
 West, on true line, bet. secs. 20 and 29.
 Over gently rolling land, thru. scattering timber and
 undergrowth.
 Descend gradually over W. slope.
 1.00 Grassy draw, course N. 10°W.
 Ascend gradually over E. slope.
 37.20 Low ridge, brs. NW and SE.
 Descend gradually over W. slope, to
 39.96 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for ¼ sec. cor., marked on brass cap,
- ¼ S 20
 S 29
 1922
- No bearing trees available.
 Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
 Descend 20 ft., over W. slope, to
 43.30 Enter grassy valley. Thence across valley, drains N. 20°
 W.
 68.90 Leave valley. Ascend 55 ft., over SE. slope.
 77.40 Low ridge, brs. N. 45°E. and S. 45°W.
 Descend 17 ft., over NW. slope, to
 79.92 The cor. of secs. 19, 20, 29 and 30.
 Land, gently rolling.
 Soil, gravelly, 3rd rate.
 Timber, palo verde.
 Undergrowth, ocotillo, catclaw and cactus.
 Good grass.
-
- 40.00 N. 89°57'W., on a random line, bet. secs. 19 and 30.
 Set temp. ¼ sec. cor.
 90.56 Fall 2 lks. N. of the cor. of secs. 19, 24, 25 and 30, on
 the W. bdy. of Tp., which is an iron post, 3 ins. in
 diam., projecting 12 ins. above ground, firmly set,
 properly marked on brass cap, and witnessed by four
 pits, one each NE., SE., SW. and NW. of post, and mound
 of earth, W. of cor. No bearing trees.
 Thence,

Survey of Subdivision lines of Township 7 North, Range 6 West. 53

Chains.

Thence,
S.89°58'E., on a true line, bet. secs. 19 and 30.
Over gently rolling land, thru. scattering undergrowth.
Ascend gradually, over N. slope.
1.75 Dim road, bra. N.60°E. and S.60°W.
50.56 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 19
S 30
1922

No bearing trees available.
Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
Ascend gradually over N. and NW. slopes.
75.55 Dim road, brs. NW and SE.
90.56 The cor. of secs. 19, 20, 29 and 30.
Land, gently rolling.
Soil, gravelly, 3rd rate.
Timber, none.
Undergrowth, ocotillo, cactus and catclaw.
Fair grass.

N.0°3'W., bet. secs. 19 and 20.
Over gently rolling land, thru. scattering undergrowth.
Descend 46 ft., over NW. slope, to
10.00 Foot of descent, brs. NE and SW. Thence over level land.
20.75 Dim road, brs. E. and W.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
S19 | S20
1923

No bearing trees available. Dig pits, 18x18x12 ins.,
one each N. and S. of post, 3 ft. dist.
59.50 Trail, brs. NW and SE.
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins.
in the ground, for cor. of secs. 17, 18, 19 and 20,
marked on brass cap,

T7N R6W
S18 | S17
S19 | S20
1923

No bearing trees available. Raise a mound of stone, 3 ft.
base, 2 ft. high, W. of cor.
Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
Land, gently rolling and level.
Soil, gravelly loam, 2nd rate.
Timber, none.
Undergrowth, greasewood and cactus.
Good grass.

East, on a random line, bet. secs. 17 and 20.
40.00 Set temp. $\frac{1}{4}$ sec. cor.
80.00 Intersect N. and S. line, 2 lks. S. of the cor. of secs. 16,
17, 20 and 21.
Thence,
S.89°59'W., on a true line, bet. secs. 17 and 20.
Over rolling land, thru. scattering timber and undergrowth.
Descend 35 ft., over N. slope.
8.20 Ascend 40 ft., over E. slope.

54 Subdivision lines of Township 7 North, Range 6 West.

Chains.

13.00 Hill, brs.N. and S.
Descend 100 ft., over W.slope.
23.90 Wash, 10 lks.wide, course S.
Ascend 16 ft., over E.slope.
32.00 Spur, slopes SE.
Descend 20 ft., over SW.slope.
36.00 Leave rolling, and enter level land.
37.00 Giant cactus 20 ft. high, on line.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in
the ground to bed rock, and raise a mound of stone
around post, for $\frac{1}{4}$ sec.cor., marked on brass cap,

$\frac{1}{4}$ S 17
S 20
1923

No bearing trees available. Raise a mound of stone $2\frac{1}{2}$
ft. base, 2 ft. high, N. of cor.
From this cor., top of hill, brs.N. about 10 chs. dist.
Continue over level land.
57.40 Highway brs.NW. to Aguila and SE. to Wickenburg.
80.00 The cor. of secs. 17, 18, 19 and 20.
Land, rolling and level.
Soil, stony, 3rd and 4th rate, malpais formation.
Timber, palo verde and mesquite.
Undergrowth, greasewood, cactus, catclaw and ocotillo.
Good grass.

N. $89^{\circ}58'$ W., on a random line, bet. secs. 18 and 19.
40.00 Set temp. $\frac{1}{4}$ sec. cor.
90.42 Intersect the cor. of secs. 13, 18, 19 and 24, on the W.
bdy. of Tp., which is an iron post, 3 ins. in diam., pro-
jecting 12 ins. above ground, firmly set, properly
marked on brass cap, and witnessed by four pits, one
each NE., SE., SW. and NW. of post, and mound of earth
W. of cor.
No bearing trees.
Thence,
S $89^{\circ}58'$ E., on a true line, bet. secs. 18 and 19.
6.00 Over level land, thru. scattering timber and undergrowth.
Leave level and enter rolling land.
Ascend 30 ft., over W.slope.
15.40 Top of hill, brs.N. and S.
Descend 35 ft., over E.slope, to
20.40 Thence over level, grassy land.
47.30 Old road, brs.NE and SW.
50.42 Set an iron post; 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,

$\frac{1}{4}$ S 18
S 19
1923

No bearing trees available. Dig pits, 18x18x12 ins. one,
each E. and W. of post, 3 ft. dist.
89.45 Highway, brs.NE. to Wickenburg and SW. to Aguila.
90.42 The cor. of secs. 17, 18, 19 and 20.
Land, rolling and level.
Soil, gravelly loam, 2nd and 3rd rate.
Timber, palo verde.
Undergrowth, greasewood, cactus and yucca.
Good grass.

N. $0^{\circ}3'$ W., bet. secs. 17 and 18.
Over level land, thru. scattering timber and undergrowth.

BOOK 3608

Survey of Subdivision lines of Township 7 North, Range 6 West, 55

Chains.

0.35 Highway, brs.N.60°E. to Wickenburg and S.75°W. to Aguila.
 20.00 Old road, brs.NW. and SE.
 35.00 From this point, reservoir brs.West about 10 chs.dist.
 40.00 Set an iron post, 3 ft.long, 1 in.in diam.,26 ins.in the
 ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,

$\frac{1}{4}$
 S18/S17
 1923

No bearing trees available. Raise a mound of stone, 3 ft.
 base, 2 ft.high, W.of cor.
 Continue over level land.
 60.00 Leave level and enter rolling land.
 Ascend 14 ft., over S.slope.
 63.40 Low ridge, brs.E. and W.
 Descend 25 ft.,over N.slope.
 73.90 Wash,8 lks.wide, 2 ft. deep, course NW.
 Ascend gradually over W.slope, to
 80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 26 ins. in
 the ground, for cor. of secs.7,8, 17 and 18, marked
 on brass cap,

T7N R6W
 S 7/S 8
 S18/S17
 1923

No bearing trees available. Dig pits, 18x18x12 ins.,one
 each NE.,SE.,SW. and NW. of post, 3 ft. dist.
 Land, level and rolling.
 Soil, gravelly loam, 2nd and 3rd rate.
 Timber, palo verde.
 Undergrowth, yucca, greasewood, cactus.
 Good grass.

40.00 N.89°59'E. on a random line, bet. secs. 8 and 17.
~~40.00~~ ^{SET TEMP. IN SEC COR.} Intersect N. and S. line, 2 lks.N. of the cor. of secs.
 8,9,16 and 17.
 Thence,
 West, on true line, bet. secs.8 and 17.
 Over level land, thru. scattering timber and dense under-
 growth.
 4.50 Leave level and enter rolling land.
 Ascend gradually over E.slope, to
 10.00 Point of low ridge, brs.E.and W. Thence along top of
 ridge,
 18.00 Leave top of ridge, brs.E. and SW.
 Descend 20 ft. over NW.slope, to
 25.00 Thence over level land.
 40.00 Set an iron post, 3 ft.long, 1 in. indiam., 26 ins.in the
 ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,

$\frac{1}{4}$ S 8
 S 17
 1923

No bearing trees available. Dig pits, 18x18x12 ins.one
 each E. and W.of post, 3 ft. dist.
 Continue over level land.
 43.60 Draw, course NE.
 58.50 Leave level, and enter rolling land.
 Ascend 50 ft., over E.slope..
 68.50 Ridge, brs.N. and S.
 Descend 65 ft., over W.slope, to

56 Survey of Subdivision lines of Township 7 North, Range 6 West.

Chains.

80.00 The cor. of secs. 7, 8, 17 and 18.
Land, rolling and level.
Soil, gravelly and rocky, 3rd and 4th rate; malpais formation.
Timber, palo verde.
Undergrowth, greasewood, yucca and cactus.

40.00 N. 89° 58' W., on a random line, bet. secs. 7 and 18.
Set temp. $\frac{1}{4}$ sec. cor.
90.27 Intersect the cor. of secs. 7, 12, 13 and 18, on the W. bdy. of Tp., which is an iron post, 3 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by four pits, one each NE., SE., SW. and NW. of post, and a mound of earth W. of cor.

No bearing trees.
Thence,
S. 89° 58' E., on a true line, bet. secs. 7 and 18.
Over level land, thru. scattering timber and dense undergrowth.

12.97 Old road, brs. N. 10° E. and S. 10° W.
50.27 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 7
S 18
1923

No bearing trees available. Dig pits, 18x18x12 ins., one each E. and W. of post, 3 ft. dist.

59.75 Old road, brs. N. and S.
75.00 Old road, brs. NE. and SW.
80.25 Leave level, and enter gently rolling land. Wash, course NW.

Ascend gradually over W. slope, to
90.27 The cor. of secs. 7, 8, 17 and 18.
Land, level and gently rolling.
Soil, sandy loam, 2nd rate.
Timber, palo verde.
Undergrowth, greasewood, ocotillo and cactus.
Good grass.

N. 0° 3' W., bet. secs. 7 and 8.
Over gently rolling land, thru. scattering timber and undergrowth.

Ascend gradually over SW. slope.
11.00 Point of low spur, slopes W.
Descend gradually over NW. slope to $\frac{1}{4}$ sec. cor.

17.00 Wash, 5 lks. wide, course NW.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

S 7 $\frac{1}{4}$ S 8
1923

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.
Descend gradually over NW. slope.

55.00 Leave gently rolling, and enter mountainous land.
Ascend 260 ft., over SE. slope, to
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in the ground to bed rock, and raise a mound of stone around post for cor. of secs. 5, 6, 7 and 8, marked on

Survey of Subdivision lines of Township 7 North, Range 6 West. 57

Chains.

brass cap,

T7N	R6W
S 6	S 5
S 7	S 8
1923	

No bearing trees available.
 Raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.
 Land, gently rolling and mountainous.
 Soil, rocky and gravelly, 3rd and 4th rate.
 Timber, palo verde.
 Undergrowth, catclaw, ocotillo and cactus.

40.00 East, on a random line, bet. secs. 5 and 8.
 Set temp. ¼ sec. cor.
 80.04 Intersect N. and S. line, 5 lks. S. of the cor. of secs. 4, 5, 8 and 9.

Thence,
 S. 89° 58' W., on a true line, bet. secs. 5 and 8.
 Over rolling and hilly land, thru. scattering timber and undergrowth.

13.35 Ascend 92 ft., over SE. slope.
 Descend 20 ft., over SW. slope.
 18.05 Gulch, 5 lks. wide, course S.
 Ascend 16 ft., over SE. slope.
 25.00 Descend 75 ft., over SW. slope, to
 40.02 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap,

¼ S	5
S	8
1923	

No bearing trees available. Raise a mound of stone, 3 ft. base, 2½ ft. high, N. of cor.
 Descend 5 ft., over SW. slope.
 41.05 Gulch, 3 lks. wide, course SW. Thence over level land.
 55.00 Center of grassy draw, 1 ch. wide, course NW.
 60.00 Leave level land, brs. N. and S., and enter mountainous land.

80.04 Ascend 285 ft., over E. slope, to
 The cor. of secs. 5, 6, 7 and 8.
 Land, level, rolling, hilly and mountainous.
 Soil, gravelly and stony, 3rd and 4th rate.
 Timber, palo verde.
 Undergrowth, cactus, catclaw and ocotillo.

40.00 N. 89° 58' W., on a random line, bet. secs. 6 and 7.
 Set temp. ¼ sec. cor.
 90.04 Fall 2 lks. S. of the cor. of secs. 1, 6, 7 and 12, on the W. bdy. of Tp., which is an iron post, 3 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by four pits, one each NE, SE, SW, and NW. of cor., and mound of earth W. of cor.

No bearing trees.
 Thence,
 S. 89° 57' E., on a true line, bet. secs. 6 and 7.
 Over level land, thru. scattering timber and undergrowth.
 33.75 Dim road, brs. NE. and SW.
 40.00 Leave level, and enter gently rolling land.
 Descend gradually over NE. slope, to
 50.04 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the the ground, for ¼ sec. cor., marked on brass cap,

58 Survey of Subdivision lines of Township 7 North, Range 6 West, Chains.

1/4 S 6
S 7
1923

No bearing trees available.
 Raise a mound of stone, 3 ft. base, 2 1/2 ft. high, N. of cor.
 Continue over gently rolling land.
 Descend gradually over NE. slope.
 51.00 Center of draw, 2 chs. wide, course N. 30° W.
 Ascend gradually over W. slope.
 61.00 Dim road, brs. N. and SE.
 67.15 Leave gently rolling, and enter mountainous land.
 Ascend 330 ft., over NW. slope.
 88.65 Top of hill.
 Descend 30 ft., over SE. slope, to
 90.04 The cor. of secs. 5, 6, 7 and 8.
 Land, level, gently rolling and mountainous.
 Soil, gravelly and rocky, 3rd and 4th rate.
 Timber, palo verde.
 Undergrowth, cactus, catclaw, and ocotillo.

N. 0° 3' W., on a true line, bet. secs. 5 and 6.
 Over mountainous land, thru. scattering timber and undergrowth.
 Ascend 15 ft., over SE. slope.
 3.00 Saddle between two hills, brs. NE and SW.
 Descend 320 ft., over NW. slope, to
 25.00 Foot of descent, brs. NE and SW. Leave mountainous and enter level land.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

1/4 S 6 | S 5
1923

No bearing trees available. Dig pits, 18x18x12 ins., one each N. and S. of post, 3 ft. dist.
 Continue over level land.
 76.80 Dim road, brs. NE and SW.
 79.96 Intersect the N. bdy. of the Tp., 9.90 chs. E. of the original cor. of secs. 5, 6, 31 and 32, changed to secs. 31 and 32, T. 8 N., R. 6 W. only, as hereinbefore described.
 At the point of intersection,
 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for closing cor. of secs. 5 and 6, T. 7 N., R. 6 W., marked on brass cap,

T8N R6W
S32
S 6 | S 5
T7N | R6W
C C
1923

No bearing trees available. Dig pits, 18x18x12 ins., one each, E., W. and S. of post, 3 ft. dist.
 Land, mountainous and level.
 Soil, gravelly and rocky, 3rd and 4th rate.
 Timber, palo verde.
 Undergrowth, greasewood, cactus and ocotillo.

Survey of Subdivision lines of Township 7 North, Range 6 West. 59

Chains.

The continued satisfactory adjustment of the solars during the survey of this township is indicated from field tests as described in Book "F."

GENERAL DESCRIPTION.

This township consists of rolling, gently rolling, and level land, except for the east two ranges of sections which in addition to rolling land, contains mountainous and hilly. Portions of the NW. cor. of the Tp. are also mountainous. For the most part, the land is covered with a scattering growth of palo verde and mesquite timber, and ocotillo, greasewood and cactus undergrowth. The west central part of the Tp. has sandy loam soil of 2nd rate texture, but in general the soil of the Tp. may be classed as rocky, 3rd and 4th rate, of malpais formation. There are no settlers. Dirt reservoirs are found in sections 13, 6, 18, and two in section 28. The drainage is to the north. A main traveled highway between Arizona and California, traverses the township in a westerly direction.

4-680

BOOK 3608

FIELD ASSISTANTS.

to ~~Ty~~ White, U. S. Transitman.

NAMES.	CAPACITY.
John W. Malzacher	First Chainman
Donald W. Allen	Second Chainman
Stephen C. Pool	Flagman
John J. Tanner	Cornerman
J. E. Kring	Axman

BOOK 3608

62

BOOK 3608

CERTIFICATE OF UNITED STATES TRANSITMAN

I, Ty White, U. S. Transitman, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 115, Arizona

bearing date of the 20th day of May, 1921, I have well, faithfully, and truly

in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, resurveyed all those parts or portions of the

North Boundary of T. 7 N., R. 6 W., and Surveyed all those parts of
portions of the South Boundary and Subdivision Lines of

T. 7 N., R. 6 W.

of the Gila and Salt

River Base and Meridian, in the State of Arizona, which are represented in and by diagram on page 1 hereof

the foregoing field notes as having been executed by me, and under my direction; and that all the corners of resurvey and

said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 115, Arizona,

and in the specific manner described in the field notes, and that the foregoing are the original field notes of such resurvey and survey.

Date April 17 1924

Ty White
U.S. Transitman

Place Long Beach Calif.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

_____, 191

The foregoing field notes of the survey of _____

executed by _____

under his special instructions dated _____, 191____, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above-described surveys in _____

_____, has been correctly copied from the original notes on file in this office.

U. S. Surveyor General.

64
BOOK 3608

CERTIFICATE OF UNITED STATES CADASTRAL ENGINEER.

I, William H. Thorn, U. S. Cadastral Engineer, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 115, Arizona bearing date of the 20th day of May, 1921, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, resurveyed all those parts or portions of the South Boundary of East and North Boundaries and Surveyed all those parts or portions of the Subdivision Lines of T. 7 N., R. 6 W. of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in and by diagram on page 1 hereof the foregoing field notes as having been executed by me, and under my direction; and that all the corners of resurvey and said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 115, Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such resurvey and survey.

Date March 22nd 1924
Place At Camp T. 7 N. R. 6 W. G. S. R. B. M.

William H. Thorn
U.S. Cadastral Engineer.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix, Arizona, April 22, 1924.

The foregoing field notes of the resurvey of the East and North Boundaries and the Boundary of T. 7 N., R. 5 W., and of the survey of the South Boundary and Subdivision Lines of T. 7 N., R. 6 W. of the Gila and Salt River Base and Meridian, in the State of Arizona,

executed by William H. Thorn, U. S. Cadastral Engineer, and Ty White, U. S. Transitman under ~~his~~ special instructions dated May 20, 1921 for Group 115, Arizona, resurveys and having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Charles M. Donohoe.
U. S. Surveyor General.

~~I certify that the foregoing transcript of the field notes of the above described surveys in~~ has been correctly copied from the original notes on file in this office.

U. S. Surveyor General.