

Survey of North bdy. of Township 6 North, Range 16 West. 13

Chains.

A mesquite, 5 ins. in diam., brs. S. 16° 30' W., 294
lks. dist., marked T6N R16W S5 BT.

An ironwood, 4 ins. in diam., brs. N. 21° 50' W., 492
lks. dist., marked BT.

Land, level and hilly.

Soil, sandy and gravelly, 2nd and 3rd rate; and rocky, lava
formation, 4th rate.

Timber, ironwood, palo verde and mesquite.

Undergrowth, greasewood, ocotillo, catclaw and cactus.

40.00

West, on true line, bet. secs. 5 and 32.
Over level land, thru scattering timber and undergrowth.
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$$\begin{array}{r} \frac{1}{4} S 32 \\ S 5 \\ 1923 \end{array}$$

from which,

An ironwood, 4 ins. in diam., brs. N. 85° W., 418
lks. dist., marked BT.

An ironwood, 12 ins. in diam., brs. S. 83° E., 375
lks. dist., marked $\frac{1}{4}$ S 5 BT.

51.00

Wash, 5 lks. wide, course SW.

80.00

Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in
the ground, for cor. of secs. 5, 6, 31 and 32, marked on
brass cap,

$$\begin{array}{r|l} T7N & R16W \\ S31 & S32 \\ \hline S 6 & S 5 \\ T6N & \\ 1923 & \end{array}$$

from which,

An ironwood, 6 ins. in diam., brs. S. 0° 33' W., 488
lks. dist., marked T6N R16W S6 BT.

No other bearing tree available.

Dig pits, 18x18x12 ins., one each NE., SE., SW. and NW. of
post, 3 ft. dist.

Land, level.

Soil, stony, 3rd rate.

Timber, ironwood, palo verde and mesquite.

Undergrowth, greasewood and cactus.

18.00

West, on a true line, bet. secs. 6 and 31.
Over level land, thru scattering timber and undergrowth.
Enter heavy timber and undergrowth, bearing N. 85° W. and S.
85° E.

31.00

Enter wash, 75 lks. wide, course N. 85° W.

40.00

The true point for $\frac{1}{4}$ sec. cor. falls in same wash.

43.20

Leave wash, course N. 85° W.

43.50

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for witness cor. to $\frac{1}{4}$ sec. cor., marked on
brass cap,

$$\begin{array}{r} \frac{1}{4} S 31 \\ S 6 \\ 1923 \end{array} WC$$

from which,

An ironwood, 18 ins. in diam., brs. N. 52° 30' E.,
135 lks. dist., marked WC $\frac{1}{4}$ S 31 BT.

A mesquite, 6 ins. in diam., brs. S. 7° 50' E.,
250 lks. dist., marked WC $\frac{1}{4}$ S 6 BT.

14 Survey of North boundary of Township 6 North, Range 16 West.

Chains.
 45.00 Wash, 10 lks. wide, course NW.
 63.40 A.T. and S.F. R.R. brs. N. 49° 13' W., and S. 49° 13' E.
 64.25 Telegraph line, brs. N. 49° 13' W., and S. 49° 13' E.
 69.80 Road, brs. NW. and SE. Extends westerly to Los Angeles, California, and southeasterly to Phoenix, Arizona.
 81.02 Intersect the E. bdy. of T. 7 N., R. 17 W., 4.02 chs. N. of the cor. of Ts. 6 and 7 N., R. 17 W., hereinbefore described. Flag on $\frac{1}{4}$ sec. cor. of secs. 31 and 36 is visible and brs. North.
 At the point of intersection, Set an iron post, 3 ft. long, 3 ins. in diam., 26 ins. in the ground, for closing cor. of Ts. 6 and 7 N., R. 16 W., marked on brass cap,

T7N	T7N	
R17W	R16W	
S36	S31	CC
	S 6	
	1923 T6N	

No bearing trees available. Dig pits, 18x18x12 ins., one each N., S. and E. of post, 3 ft. dist.

Land, level.

Soil, stony, 3rd rate.

Timber, palo verde, ironwood and mesquite.

Undergrowth, greasewood, catclaw and cactus.

Boundaries of Township 6 North, Range 16 West.
 Latitudes, departures and closing errors.

Line designated.	True bearing.	Dist.	Latitudes.		Departures.	
			N.	S.	E.	W.
South boundary,	N. 89° 51' W.	481.17	1.20			481.17
West boundary,	N. 0° 2' W. North,	480.93 4.02	480.93 4.02			.28
North boundary,	East,	481.02			481.02	
East boundary,	South,	485.84		485.84		
Convergency,					.49	
Totals,			486.15 485.84	485.84	481.51 481.45	481.45
Error in latitude,			0.31			
Error in departure,					0.06	

Survey of Subdivision lines of Township 6 North, Range 16 West. 15

Chains.

From the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., hereinbefore described,
 N. 0° 1' W., bet. secs. 35 and 36.
 Over level land, thru. scattering undergrowth.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,
 S35 | S36
 1923

No bearing trees available. Dig pits, 18x18x12 ins., one each N. and S. of post, 3 ft. dist.
 52.90 Draw, course SW.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 29 ins. in the ground, for cor. of secs. 25, 26, 35 and 36, marked on brass cap,
 T6N | R16W
 S26 | S25
 S35 | S36
 1923

No bearing trees available. Dig pits, 18x18x12 ins., one each NE., SE., SW. and NW. of post, 3 ft. dist.
 Land, level.
 Soil, sandy, 2nd rate.
 Timber, none.
 Undergrowth, greasewood and cactus.

S. 89° 51' E., on a random line, bet. secs. 25 and 36.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.06 Fall 9 lks. S. of the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the Tp., described in Book "I."
 Thence,
 N. 89° 55' W., on a true line, bet. secs. 25 and 36.
 Over level land, thru. scattering undergrowth.
 34.00 Draw, course SW.
 40.03 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,
 S 25
 S 36
 1923

No bearing trees available. Dig pits, 18x18x12 ins., one each E. and W. of post, 3 ft. dist.
 80.06 The cor. of secs. 25, 26, 35 and 36.
 Land, level.
 Soil, sandy, 2nd rate.
 Timber, none.
 Undergrowth, greasewood and cactus.

N. 0° 1' W., bet. secs. 25 and 26.
 Over level land, thru. scattering undergrowth.
 27.30 Draw, course S. 60° W.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,
 S26 | S35
 1923

No bearing trees available. Dig pits, 18x18x12 ins., one each N. and S. of post, 3 ft. dist.

16 Survey of Subdivision lines of Township 6 North, Range 16 West.

Chains.									
71.40	Road brs. N. 49° W. and S. 49° E.								
71.90	Road brs. N. 49° W. and S. 49° E. Both of these roads extend westerly to Los Angeles, Calif., and S.E. to Phoenix, Ariz.								
73.82	Telegraph line brs. N. 49° W. and S. 49° E.								
74.34	Utting Side track, brs. N. 49° W. and S. 49° E.								
74.64	A.T. and S.F.R.R. brs. N. 49° 12' W. and S. 49° 12' E.								
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 23, 24, 25 and 26, marked on brass cap,								
	<table border="1"> <tr><td>T6N</td><td>R16W</td></tr> <tr><td>S23</td><td>S24</td></tr> <tr><td>S26</td><td>S25</td></tr> <tr><td colspan="2">1923</td></tr> </table>	T6N	R16W	S23	S24	S26	S25	1923	
T6N	R16W								
S23	S24								
S26	S25								
1923									
	No bearing trees available. Dig pits, 18x18x12 ins., one each NE., SE., SW. and NW. of post, 3 ft. dist.								
	Land, level.								
	Soil, 1st and 2nd rate, sandy loam.								
	Timber, none.								
	Undergrowth, greasewood and cactus.								

	S. 89° 55' E., on a random line, bet. secs. 24 and 25.								
40.00	Set temp. $\frac{1}{4}$ sec. cor.								
80.06	Intersect the cor. of secs. 19, 24, 25 and 30, on E. bdy. of Tp., described in Book "I."								
	Thence,								
	N. 89° 55' W., on a true line, bet. secs. 24 and 25.								
	Over level land, thru. scattering undergrowth.								
10.75	Draw, course SW.								
40.03	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,								
	<table border="1"> <tr><td>S 24</td></tr> <tr><td>S 25</td></tr> <tr><td>1923</td></tr> </table>	S 24	S 25	1923					
S 24									
S 25									
1923									
	No bearing trees available. Dig pits, 18x18x12 ins., one each E. and W. of post, 3 ft. dist.								
43.15	Road brs. N. 20° E. and S. 20° W.								
52.65	Draw, course S. 30° W.								
69.35	Dim road, brs. N. and S.								
80.06	The cor. of secs. 23, 24, 25 and 26.								
	Land, level.								
	Soil, sandy loam, 2nd rate.								
	Timber, none.								
	Undergrowth, greasewood and cactus.								

	N. 0° 1' W., bet. secs. 23 and 24.								
	Over level land, thru. scattering timber and undergrowth.								
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,								
	<table border="1"> <tr><td>S23</td><td>S24</td></tr> <tr><td colspan="2">1923</td></tr> </table>	S23	S24	1923					
S23	S24								
1923									
	No bearing trees available. Dig pits, 18x18x12 ins., one each N. and S. of post, 3 ft. dist.								
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 13, 14, 23 and 24, marked on brass cap,								
	<table border="1"> <tr><td>T6N</td><td>R16W</td></tr> <tr><td>S14</td><td>S13</td></tr> <tr><td>S23</td><td>S24</td></tr> <tr><td colspan="2">1923</td></tr> </table>	T6N	R16W	S14	S13	S23	S24	1923	
T6N	R16W								
S14	S13								
S23	S24								
1923									
	No bearing trees available.								

Survey of Subdivision lines of Township 6 North, Range 16 West. 17

Chains.

Dig pits, 18x18x12 ins., one each NE., SE., SW. and NW. of post, 3 ft. dist.
 Land, level.
 Soil, sandy, 2nd and 3rd rate.
 Timber, mesquite and ironwood.
 Undergrowth, greasewood, ocotillo and cactus.

40.00 S. 89° 55' E., on a random line, bet. secs. 13 and 24.
 80.06 Set temp. $\frac{1}{4}$ sec. cor.
 Fall 7 lks. S. of the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of Tp., described in Book "I,"

Thence,
 40.03 N. 89° 58' W., on a true line, bet. secs. 13 and 24.
 Over level land, thru. scattering timber and undergrowth.
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$$\begin{array}{c} \frac{1}{4} \text{ S } 13 \\ \text{S } 24 \\ 1923 \end{array}$$

80.06 No bearing trees available. Dig pits, 18x18x12 ins., one each E. and W. of post, 3 ft. dist.
 The cor. of secs. 13, 14, 23 and 24.
 Land, level.
 Soil, sandy, 2nd and 3rd rate.
 Timber, palo verde and mesquite.
 Undergrowth, greasewood, cactus and ocotillo.

40.00 N. 0° 1' W., bet. secs. 13 and 14.
 Over level land, thru. scattering undergrowth.
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$$\begin{array}{c} \frac{1}{4} \\ \text{S14} | \text{S13} \\ 1923 \end{array}$$

80.06 No bearing trees available. Dig pits 18x18x12 ins., one each N. and S. of post, 3 ft. dist.
 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 11, 12, 13 and 14, marked on brass cap,

$$\begin{array}{c} \text{T6N} | \text{R16W} \\ \text{S11} | \text{S12} \\ \text{S14} | \text{S13} \\ 1923 \end{array}$$

No bearing trees available. Dig pits, 18x18x12 ins. in one each NE., SE., SW. and NW. of post, 3 ft. dist.
 Land, level.
 Soil, sandy, 2nd and 3rd rate.
 Timber, none.
 Undergrowth, greasewood and ocotillo.

40.00 S. 89° 58' E., on a random line, bet. secs. 12 and 13.
 80.08 Set temp. $\frac{1}{4}$ sec. cor.
 Fall 5 lks. S. of the cor. of secs. 7, 12, 13 and 18, on the E. bdy. of Tp., described in Book "I."
 Thence,
 40.04 West, on a true line, bet. secs. 12 and 13.
 Over level land, thru. scattering undergrowth.
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in

18 Survey of the Subdivision lines of Township 6 North, Range 16 W.

Chains.

the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,
$$\begin{array}{c} \frac{1}{4} \text{ S } 12 \\ \text{S } 13 \\ 1923 \end{array}$$

80.08 No bearing trees available. Dig pits, 18x18x12 ins., one each E. and W. of post, 3 ft. dist.
The cor. of secs. 11, 12, 13 and 14.
Land, level.
Soil, sandy, 2nd and 3rd rate.
Timber, none.
Undergrowth, greasewood, ocotillo and cactus.

40.00 N. 0° 1' W., bet. secs. 11 and 12.
Over level land, thru. scattering undergrowth.
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$$\begin{array}{c} \frac{1}{4} \\ \text{S } 11 \text{ | } \text{S } 12 \\ 1923 \end{array}$$

80.00 No bearing trees available. Dig pits, 18x18x12 ins., one each N. and S. of post, 3 ft. dist.
Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 1, 2, 11 and 12, marked on brass cap,

$$\begin{array}{c} \text{T } 6 \text{ N } \text{ | } \text{R } 16 \text{ W} \\ \text{S } 2 \text{ | } \text{S } 1 \\ \text{S } 11 \text{ | } \text{S } 12 \\ 1923 \end{array}$$

No bearing trees available. Dig pits 18x18x12 ins., one each NE., SE., SW. and NW. of post, 3 ft. dist.
Land, level.
Soil, sandy, 2nd and 3rd rate.
Timber, none.
Undergrowth, greasewood, ocotillo and cactus.

40.00 East, on a random line, bet. secs. 1 and 12.
80.04 Set temp. $\frac{1}{4}$ sec. cor.
Fall 2 lks. N. of the cor. of secs. 1, 6, 7 and 12, on the East bdy. of the Tp., described in Book "I."

40.02 Thence,
N. 89° 59' W., on a true line, bet. secs. 1 and 12.
Over level land, thru. scattering timber and undergrowth.
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$$\begin{array}{c} \frac{1}{4} \text{ S } 1 \\ \text{S } 12 \\ 1923 \end{array}$$

80.04 No bearing trees available. Dig pits, 18x18x12 ins., one each E. and W. of post, 3 ft. dist.
The cor. of secs. 1, 2, 11 and 12.
Land, level.
Soil, sandy loam, 2nd and 3rd rate.
Timber, palo verde, ironwood and mesquite.
Undergrowth, greasewood, ocotillo and cactus.

Survey of Subdivision of Township 6 North, Range 16 West. 19

Chains.

40.00 N.0°1'W., on a random line, bet. secs. 1 and 2.
Set temp. $\frac{1}{4}$ sec. cor.
85.85 Intersect the cor. of secs. 1, 2, 35 and 36, on the N. bdy. of
the Tp., hereinbefore described.
Thence,
S.0°1'E., on a true line, bet. secs. 1 and 2.
Over level land, thru scattering timber and undergrowth.
17.00 Right edge of Cunningham wash, brs. NE. and SW. Thence
across said wash, formed by a series of washes as fol-
lows:
17.75 Wash, 30 lks. wide, course SW.
20.85 Wash, 25 lks. wide, course SW.
24.35 Wash, 40 lks. wide, course SW.
26.00 Left edge of Cunningham wash, brs. NE and SW. Leave said
wash.
45.85 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$$\begin{array}{c} \frac{1}{4} \\ S\ 2\ \big| \ S\ 1 \\ 1923 \end{array}$$

No bearing trees available. Dig pits, 18x18x12 ins., one
each N. and S. of post, 3 ft. dist.
78.35 Wash, 25 lks. wide, course S.45° W.
85.85 The cor. of secs. 1, 2, 11 and 12.
Land, level.
Soil, sandy, 2nd and 3rd rate.
Timber, palo verde and ironwood.
Undergrowth, greasewood, ocotillo and cactus.

From the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of Tp.,
hereinbefore described,
N.0°1'W., bet. secs. 34 and 35.
Over level land, thru scattering undergrowth.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$$\begin{array}{c} \frac{1}{4} \\ S\ 34\ \big| \ S\ 35 \\ 1923 \end{array}$$

No bearing trees available. Dig pits, 18x18x12 ins., one
each, N. and S. of post, 3 ft. dist.
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in
the ground, for cor. of secs. 26, 27, 34 and 35, marked on
brass cap,

$$\begin{array}{c} T6N\ | \ R16W \\ S27\ | \ S26 \\ \hline S34\ | \ S35 \\ 1923 \end{array}$$

No bearing trees available. Dig pits, 18x18x12 ins., one
each NE., SE., SW. and NW. of post, 3 ft. dist.
Land, level.
Soil, sandy and gravelly, 2nd and 3rd rate.
Timber, none.
Undergrowth, greasewood and sagebrush.

40.00 S.89°51'E., on a random line, bet. secs. 26 and 35.
Set temp. $\frac{1}{4}$ sec. cor.
79.96 Intersect N. and S. line, 2 lks. N. of the cor. of secs. 25,
26, 35 and 36.
Thence,

20 Survey of Subdivision lines of Township 6 North, Range 16 West.

Chains.	
39.98	<p>N.89°50'W., on a true line, bet. secs.26 and 35. Over level land, thru, scattering undergrowth. Set an iron post, 3 ft.long, 1 in. in diam.,26 ins.in the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,</p> $\begin{array}{r} \frac{1}{4} \text{ S } 26 \\ \text{S } 35 \\ 1923 \end{array}$ <p>No bearing trees available. Dig pits, 18x18x12 ins., one each E.and W.of post, 3 ft. dist.</p>
79.96	<p>The cor.of secs.26,27, 34 and 35. Land,level. Soil,sandy,2nd and 3rd rate. Timber, none. Undergrowth, greasewood,ocotillo and cactus.</p> <p>-----</p>
40.00	<p>N.0°1'W., bet. secs. 26 and 27. Over level land, thru. scattering undergrowth. Set an iron post, 3 ft.long, 1 in. in diam.,26 ins.in the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,</p> $\begin{array}{c} \frac{1}{4} \\ \text{S27} \quad \quad \text{S26} \\ \\ 1923 \end{array}$ <p>No bearing trees available. Dig pits, 18x18x12 ins., one each N.and S.of post, 3 ft. dist.</p>
80.00	<p>Set an iron post, 3 ft.long, 2 ins. in diam.,26 ins.in the ground, for cor.of secs.22,23,26 and 27, marked on brass cap,</p> $\begin{array}{c} \text{T6N} \quad \quad \text{R16W} \\ \text{S22} \quad \quad \text{S23} \\ \text{S27} \quad \quad \text{S26} \\ 1923 \end{array}$ <p>No bearing trees available. Dig pits, 18x18x12 ins.,one each NE., SE.,SW. and NW. of post, 3 ft. dist. Land,level. Soil,sandy, 2nd and 3rd rate. Timber, none. Undergrowth, greasewood,ocotillo and cactus.</p> <p>-----</p>
40.00	<p>S.89°50'E.,on a random line, bet. secs.23 and 26. Set temp.$\frac{1}{4}$ sec.cor.</p>
80.02	<p>Intersect N. and S. line, 2 lks.N. of the cor.of secs.23, 24, 25 and 26. Thence,</p>
6.12	<p>N.89°49'W., on a true line, bet. secs.23 and 26. Over level land, thru. scattering undergrowth.</p>
7.12	<p>A.T.and S.F. R.R. brs.N.49°13'W. and S.49°13'E.</p>
9.07	<p>Telegraph line, brs.N.49°W. and S.49°E.</p>
9.92	<p>Road, brs.N.49°W. and S.49°E. Both of these roads extend westerly to Los Angeles,California,and southeasterly to Phoenix,Arizona,</p>
40.01	<p>Set an iron post, 3 ft.long, 1 in. in diam.,26 ins.in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,</p> $\begin{array}{r} \frac{1}{4} \text{ S } 23 \\ \text{S } 26 \\ 1923 \end{array}$ <p>No bearing trees available. Dig pits, 18x18x12 ins.,</p>

Survey of Subdivision lines of Township 6 North, Range 16 West, 21

Chains.

80.02 one each E. and W. of post, 3 ft. dist.
The cor. of secs. 22, 23, 26 and 27.
Land, level.
Soil, sandy, 2nd and 3rd rate.
Timber, none.
Undergrowth, greasewood, ocotillo and cactus.

40.00 N. 0° 1' W., bet. secs. 22 and 23.
Over level land, thru. medium undergrowth.
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
S22 | S23
1923

50.50 No bearing trees available. Dig pits, 18x18x12 ins., one
each N. and S. of post, 3 ft. dist.
60.87 Old road, brs. NE. and SW.
Road brs. N. 49° 12' W. and S. 49° 12' E. Extends westerly to Los
Angeles, Calif. & southeasterly to Phoenix, Arizona.
62.78 Telegraph line, brs. N. 49° 12' W. and S. 49° 12' E.
63.53 A. T. & S. F. R. R. brs. N. 49° 12' W. and S. 49° 12' E.
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in
the ground, for cor. of secs. 14, 15, 22 and 23, marked
on brass cap,

T6N | R16W
S15 | S14
S22 | S23
1923

No bearing trees available, Dig pits, 18x18x12 ins., one
each NE., SE., SW. and NW. of post, 3 ft. dist.
Land, level.
Soil, 1st rate.
Timber, none.
Undergrowth, greasewood and cactus.

40.00 S. 89° 49' E., on a random line, bet. secs. 14 and 23.
Set temp. $\frac{1}{4}$ sec. cor.
80.02 Intersect N. and S. line, 5 lks. S. of the cor. of secs. 13,
14, 23 and 24.

40.01 Thence,
N. 89° 51' W., on a true line, bet. secs. 14 and 23.
Over level land, thru. medium undergrowth.
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 14
S 23
1923

80.02 No bearing trees available. Dig pits, 18x18x12 ins.,
one each E. and W. of post, 3 ft. dist.
The cor. of secs. 14, 15, 22 and 23.
Land, level.
Soil, sandy loam, 1st rate.
Timber, none.
Undergrowth, greasewood and cactus.

40.00 S. 89° 49' E., on a random line, bet. secs. 14 and 23.
Set temp. $\frac{1}{4}$ sec. cor.

22 Survey of Subdivision lines of Township 6 North, Range 16 West.

Chains.

- N.0°1'W., bet. secs. 14 and 15.
Over level land, thru. medium undergrowth.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,
$$\begin{array}{c} \frac{1}{4} \\ S15 \mid S14 \\ 1923 \end{array}$$
- No bearing trees available. Dig pits, 18x18x12 ins., one each N. and S. of post, 3 ft. dist.
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 10, 11, 14 and 15, marked on brass cap,
$$\begin{array}{c} T6N \mid R16W \\ S10 \mid S11 \\ \hline S15 \mid S14 \\ 1923 \end{array}$$
- No bearing trees available. Dig pits, 18x18x12 ins., one each NE., SE., SW. and NW. of post, 3 ft. dist.
Land, level.
Soil, sandy, 1st rate.
Timber, none.
Undergrowth, greasewood and cactus.
-
- S.89°51'E., on a random line, bet. secs. 11 and 14.
40.00 Set temp. $\frac{1}{4}$ sec. cor.
79.98 Intersect the cor. of secs. 11, 12, 13 and 14.
Thence,
N.89°51'W., on a true line, bet. secs. 11 and 14.
Over level land, thru. dense undergrowth.
39.99 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,
$$\begin{array}{c} \frac{1}{4} \ S \ 11 \\ S \ 14 \\ 1923 \end{array}$$
- No bearing trees available. Dig pits, 18x18x12 ins., one each E. and W. of post, 3 ft. dist.
79.98 The cor. of secs. 10, 11, 14 and 15.
Land, level.
Soil, sandy, 1st rate.
Timber, none.
Undergrowth, greasewood, ocotillo and cactus.
-
- N.0°1'W., bet. secs. 10 and 11.
Over level land, thru. scattering undergrowth.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,
$$\begin{array}{c} \frac{1}{4} \\ S10 \mid S11 \\ 1923 \end{array}$$
- No bearing trees available. Dig pits 18x18x12 ins., one each N. and S. of post, 3 ft. dist.
47.00 Enter scattering timber, brs. N.60°E. and S.60°W.
51.70 Wash, 30 lks. wide, course SW.
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 2, 3, 10 and 11, marked on brass cap,

Survey of Subdivision lines of Township 6 North, Range 16 West, 23

Chains.

T6N	R16W
S 3	S 2
S10	S11
1923	

No bearing trees available. Dig pits 18x18x12 ins., one each NE., SE., SW., and NW. of post, 3 ft. dist.
 Land, level.
 Soil, sandy, 2nd and 3rd rate.
 Timber, palo verde, ironwood and mesquite.
 Undergrowth, greasewood, ocotillo and cactus.

- 40.00 S. 89°51' E., on a random line, bet. secs. 2 and 11. Set temp. $\frac{1}{4}$ sec. cor.
- 79.92 Intersect N. and S. line, 2 lks. N. of the cor. of secs. 1, 2, 11 and 12.
 Thence,
 N. 89°50' W., on a true line, bet. secs. 2 and 11.
 Over level land, thru. scattering timber and undergrowth.
- 17.70 Wash, 20 lks. wide, course SW.
- 18.60 Wash, 20 lks. wide, course SW.
- 39.96 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 2
S 11
1923

- 79.92 No bearing trees available. Dig pits, 18x18x12 ins., one each E. and W. of post, 3 ft. dist.
 The cor. of secs. 2, 3, 10 and 11.
 Land, level.
 Soil, sandy, 2nd and 3rd rate.
 Timber, ironwood, palo verde and mesquite.
 Undergrowth, greasewood and cactus.

- 40.00 N. 0°1' W., on a random line, bet. secs. 2 and 3. Set temp. $\frac{1}{4}$ sec. cor.
- 85.62 Fall 12 lks. E. of the cor. of secs. 2, 3, 34 and 35, on the N. bdy. of the Tp., hereinbefore described.
 Thence,
 S. 0°6' E., on a true line, bet. secs. 2 and 3.
 Over level land, thru. scattering timber and undergrowth.
- 45.62 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 3	S 2
1923	

- 53.00 No bearing trees available. Dig pits, 18x18x12 ins., one each N. and S. of post, 3 ft. dist.
 Right edge of Cunningham wash, brs. N. 70° E. and S. 70° W.
 Thence across said wash, formed by a series of washes, as follows:
- 54.80 Wash, 20 lks. wide, course S. 70° W.
- 60.40 Wash, 20 lks. wide, course S. 70° W.
- 63.40 Wash, 15 lks. wide, course S. 70° W.
- 64.00 Left edge of Cunningham wash, brs. N. 70° E. and S. 70° W. Leave said wash.
- 85.62 The cor. of secs. 2, 3, 10 and 11.
 Land, level.
 Soil, sandy and gravelly, 2nd and 3rd rate.

24 Survey of Subdivision lines of Township 6 North, Range 16 West.

Chains.

Timber, ironwood, palo verde and mesquite.
Undergrowth, greasewood, ocotillo and cactus.

- From the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of
Tp., hereinbefore described,
N. 0° 2' W., bet. secs. 33 and 34.
Over level land, thru. medium undergrowth.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
S33 | S34
1923

- No bearing trees available. Dig pits, 18x18x12 ins.,
one each N. and S. of post, 3 ft. dist.
- 58.60 Draw, course SW.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in
the ground, for cor. of secs. 27, 28, 33 and 34, marked
on brass cap,

T6N | R16W
S28 | S27
S33 | S34
1923

No bearing trees available. Dig pits, 18x18x12 ins.,
one each NE., SE., SW. and NW. of post, 3 ft. dist.
Land, level.
Soil, sandy, 1st rate.
Timber, none.
Undergrowth, greasewood and cactus.

- S. 89° 51' E., on a random line, bet. secs. 27 and 34.
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 80.06 Intersect N. and S. line, 5 lks. S. of the cor. of secs. 26,
27, 34 and 35.
- Thence,
N. 89° 53' W., on a true line, bet. secs. 27 and 34.
Over level land, thru. medium undergrowth.
- 36.85 Wash, 20 lks. wide, course SW.
- 40.03 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 27
S 34
1923

- No bearing trees available. Dig pits, 18x18x12 ins., one
each E. and W. of post, 3 ft. dist.
- 61.85 Draw, course SW.
- 80.06 The cor. of secs. 27, 28, 33 and 34.
Land, level.
Soil, sandy loam, 1st rate.
Timber, none.
Undergrowth, greasewood and cactus.

- N. 0° 2' W., bet. secs. 27 and 28.
Over level land, thru. medium undergrowth.
- 11.40 Draw, course SW.

Survey of Subdivision lines of Township 6 North, Range 16 West. 25

Chains.

35.00 Wash, 50 lks. wide, course SW
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$$\begin{array}{c} \frac{1}{4} \\ \text{S28} \mid \text{S27} \\ \hline 1923 \end{array}$$

No bearing trees available.

Dig pits, 18x18x12 ins., one each N. and S. of post, 3 ft.
 dist.

55.50 Old road, brs. NE. and SW.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in
 the ground, for cor. of secs. 21, 22, 27 and 28, marked
 on brass cap,

$$\begin{array}{c} \text{T6N} \mid \text{R16W} \\ \text{S21} \mid \text{S22} \\ \hline \text{S28} \mid \text{S27} \\ \hline 1923 \end{array}$$

No bearing trees available. Dig pits, 18x18x12 ins., one
 each NE., SE., SW. and NW. of post, 3 ft. dist.

Land, level.

Soil, 1st rate.

Timber, none.

Undergrowth, greasewood and cactus.

40.00 S. 89°53' E., on a random line, bet. secs. 22 and 27.
 Set temp. $\frac{1}{4}$ sec. cor.

80.04 Intersect the cor. of secs. 22, 23, 26 and 27.

Thence,

N. 89°53' W., on a true line, bet. secs. 22 and 27.

Over level land, thru. dense undergrowth.

40.02 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$$\begin{array}{c} \frac{1}{4} \text{ S } 22 \\ \hline \text{S } 27 \\ \hline 1923 \end{array}$$

No bearing trees available.

Dig pits, 18x18x12 ins., one each E. and W. of post, 3
 ft. dist.

56.15 Old road, brs. NE. and SW.

80.04 The cor. of secs. 21, 22, 27 and 28.

Land, level.

Soil, sandy loam, 1st rate.

Timber, none.

Undergrowth, greasewood and cactus.

N. 0°2' W., bet. secs. 21 and 22.

Over level land, thru. dense undergrowth.

27.20 Old road, brs. NE. and SW.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$$\begin{array}{c} \frac{1}{4} \\ \text{S21} \mid \text{S22} \\ \hline 1923 \end{array}$$

26 Survey of Subdivision lines of Township 6 North, Range 16 West.

Chains.

80.00 No bearing trees available. Dig pits, 18x18x12 ins., one each N. and S. of post, 3 ft. dist.
Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 15, 16, 21 and 22, marked on brass cap,

T6N	R16W
S16	S15
S21	S22

1923

No bearing trees available.
Dig pits, 18x18x12 ins., one each NE., SE., SW. and NW. of post, 3 ft. dist.
Land, level.
Soil, sandy loam, 1st rate.
Timber, none.
Undergrowth, greasewood and cactus.

40.00 S. 89° 53' E., on a random line, bet. secs. 15 and 22.
Set temp. $\frac{1}{4}$ sec. cor.
80.08 Intersect N. and S. line, 2 lks. N. of the cor. of secs. 14, 15, 22 and 23.
Thence, N. 89° 52' W., on a true line, bet. secs. 15 and 22.
Over level land, thru. sedium undergrowth, and
19.20 A. T. & S. F. R. R. brs. N. 49° 12' W. and S. 49° 12' E.
20.10 Telegraph line, brs. N. 49° 12' W. and S. 49° 12' E.
22.30 Road brs. N. 49° W. and S. 49° E. extends westerly to Los Angeles, California and southeasterly to Phoenix, Ariz.
40.04 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 15
S 22

1923

80.08 No bearing trees available. Dig pits, 18x18x12 ins., one each E. and W. of post, 3 ft. dist.
The cor. of secs. 15, 16, 21 and 22.
Land, level.
Soil, sandy loam, 1st rate.
Timber, none.
Undergrowth, greasewood and cactus.

40.00 N. 0° 2' W., bet. secs. 15 and 16.
Over level land, thru. scattering undergrowth.
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$	S16	S15
---------------	-----	-----

1923

47.25 No bearing trees available. Dig pits, 18x18x12 ins., one each N. and S. of post, 3 ft. dist.
Road, brs. NW and SE.
49.82 Road brs. N. 49° 13' W. and S. 49° 13' E.
Both of these roads extend westerly to Los Angeles and southeasterly to Phoenix.
51.70 Telegraph line, brs. N. 49° 13' W. and S. 49° 13' E.
52.45 A. T. and S. F. R. R. brs. N. 49° 13' W. and S. 49° 13' E.
56.20 Storm ditch, course SW.
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 9, 10, 15 and 16, marked on

Survey of Subdivision lines of Township 6 North, Range 16 West. 27

Chains.

brass cap,

T6N	R16W
S 9	S10
S16	S15
1923	

No bearing trees available.
 Dig pits, 18x18x12 ins., one each NE., SE., SW. and NW.
 of post, 3 ft. dist.
 Land, level.
 Soil, sandy loam, 1st rate.
 Timber, none.
 Undergrowth, greasewood and cactus.

- S.89°52' E., on a random line, bet. secs.10 and 15.
 40.00 Set temp. $\frac{1}{4}$ sec.cor.
 80.10 Intersect N. and S. line, 2 lks.S. of the cor. of secs. 10,
 11,14 and 15.
 Thence,
 N.89°53'W., on a true line, bet. secs.10 and 15.
 Over level land, thru. scattering undergrowth.
 40.05 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins.in
 the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,

$\frac{1}{4}$ S 10
S 15
1923

- No bearing trees available.
 Dig pits, 18x18x12 ins., one each E. and W. of post, 3 ft.
 dist.
 80.10 The cor. of secs.9,10,15 and 16.
 Land, level.
 Soil, sandy loam, 1st rate.
 Timber, none.
 Undergrowth, greasewood and cactus.

- N.0°2'W., bet. secs. 9 and 10.
 Over level land, thru. scattering timber and undergrowth.
 32.20 Wash, 50 lks.wide, course S.70°W.
 40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins.in
 the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,

$\frac{1}{4}$
S 9 S10
1923

- No bearing trees available.
 Dig pits, 18x18x12 ins., one each N. and S. of post, 3 ft.
 dist.
 80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 26 ins.in
 the ground, for cor. of secs.3,4,9 and 10, marked on
 brass cap,

T6N	R16W
S 4	S 3
S 9	S10
1923	

28 Survey of Subdivision lines of Township 6 North, Range 16 West,.

Chains.

No bearing trees available.
 Dig pits, 18x18x12 ins., one each NE., SE., SW. and NW.
 of post, 3 ft. dist.
 Land, level.
 Soil, sandy, 2nd and 3rd rate.
 Timber, ironwood, palo verde and mesquite.
 Undergrowth, greasewood and cactus.

-
- S. 89°53'E., on a random line, bet. secs. 3 and 10.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.04 Intersect N. and S. line, 2 lks. S. of the cor. of secs. 2, 3,
 10 and 11.
 Thence,
 N. 89°54'W., on a true line, bet. secs. 3 and 10.
 Over level land, thru. scattering timber and under-
 growth.
 40.02 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor.; marked on brass cap,

$$\frac{1}{4} \text{ S } 3$$

$$\text{S } 10$$
 1923

- No bearing trees available. Dig pits, 18x18x12 ins.,
 one each E. and W. of post, 3 ft. dist.
 72.85 From this point, a lone sahuaro brs. North 15 lks. dist.
 80.04 The cor. of secs. 3, 4, 9 and 10.
 Land, level.
 Soil, sandy, 2nd and 3rd rate.
 Timber, ironwood, palo verde and mesquite.
 Undergrowth, greasewood and cactus.

-
- N. 9°7'W., on a random line, bet. secs. 3 and 4.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 85.50 Fall 7 lks. W. of the cor. of secs. 3, 4, 33 and 34, on the
 N. bdy. of the Tp., hereinbefore described.
 Thence,
 S. 9°4'E., on a true line, bet. secs. 3 and 4.
 Over level land, thru. scattering timber and undergrowth.
 40.00 Leave level, and enter rolling land.
 Ascend gradually over NE. slope, to
 45.50 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$$\frac{1}{4}$$

$$\text{S } 4 \text{ | } \text{S } 3$$
 1923

- No bearing trees available.
 Raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, W. of
 cor.
 Ascend 45 ft., over NE. slope.
 60.50 Low ridge, brs. NW and SE., extends 2 chs. SE.
 Descend 52 ft., over S. slope, to
 65.50 Right edge of Cunningham wash, brs. E. and W. Thence
 across said wash, course S. 70°W.
 75.70 Wash, 30 lks. wide, course S. 70°W.

3611

Book "H"

4-679

BOOK 3611

FIELD NOTES

OF THE RESURVEY OF

West boundary,

and the Survey of

North boundary,

South boundary, and

Subdivision lines of

TOWNSHIP 6 NORTH, RANGE 16 WEST,

Of the Gila and Salt River Base and Meridian,

In the State of Arizona.

EXECUTED BY

William H. Thorn, U.S. Cadastral Engineer,

and

Ty White, U. S. Transitman,

In the capacity of U. S. Surveyor 5, under Special Instructions dated May 20, 1921, issued by the United States Surveyor General to govern surveys included in Group No. 115 Arizona, which were approved by the Commissioner of the General Land Office, November 8, 1921, and Assignment Instructions dated October 23, 1922.

Resurvey and Survey commenced February 1, 1923.

Resurvey and Survey completed February 8, 1923.

3611


3611

3611

Book "H"
Group 115 - - - Arizona.

BOOK 3611

INDEX DIAGRAM.

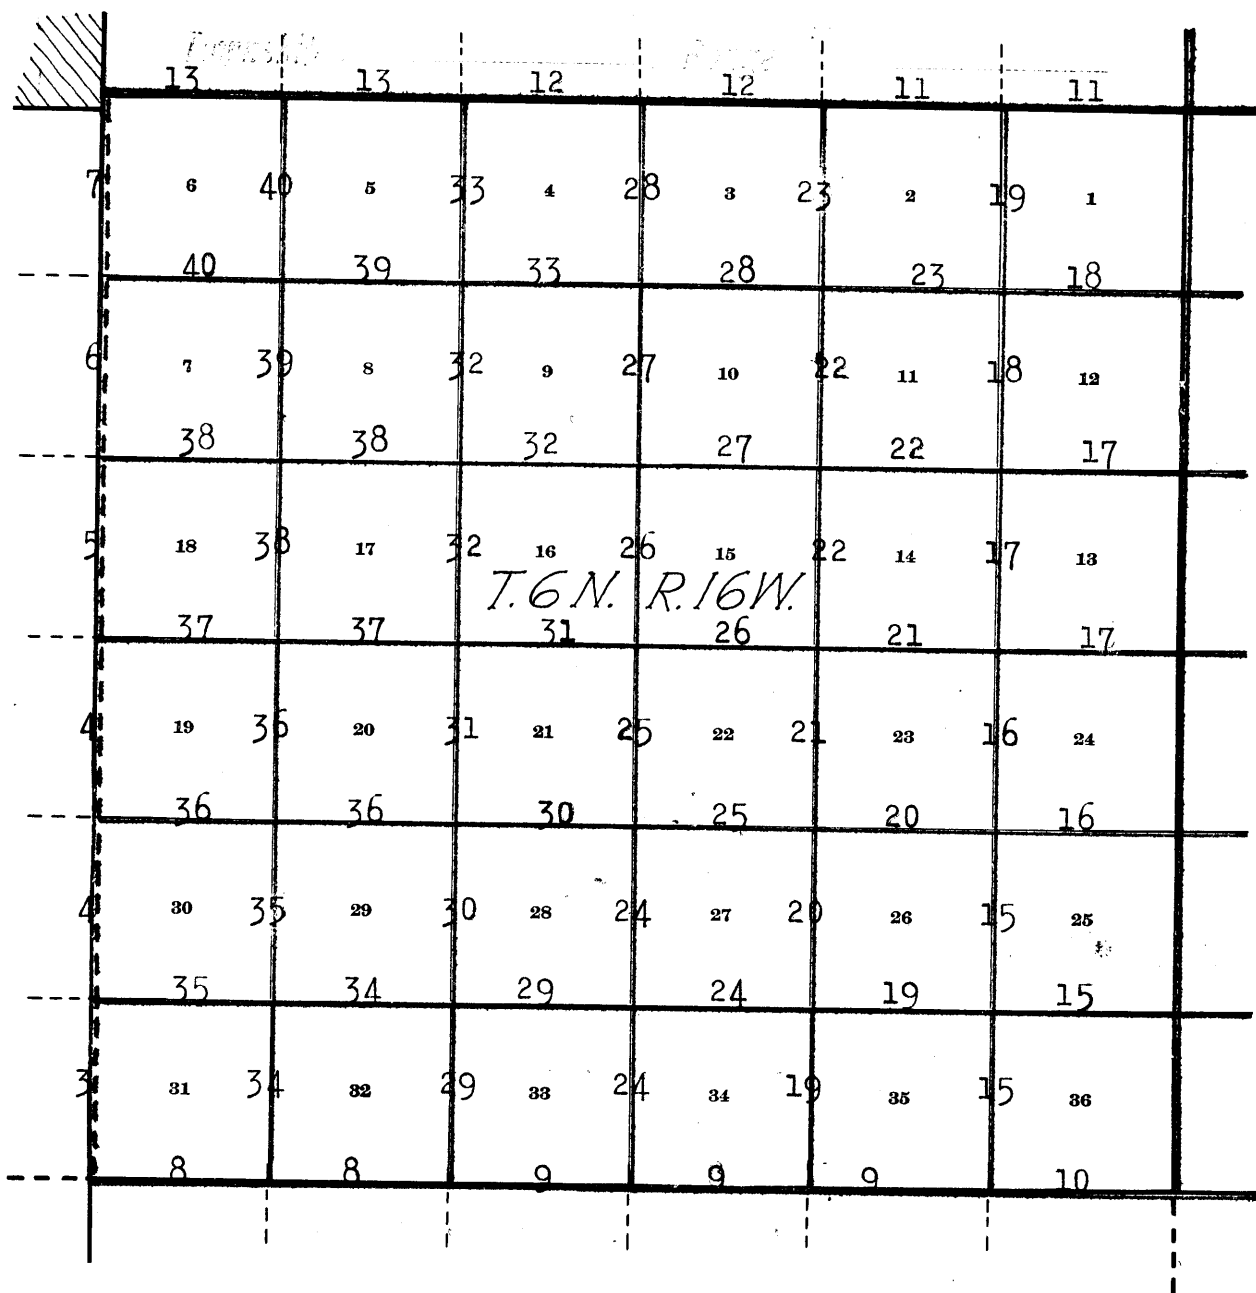

———— Lines surveyed under this group.

----- Lines retraced under this group.

———— Accepted surveys.

----- Unsurveyed.



Areas surveyed as per accepted plats on file.

DATE DIAGRAM

Book "H"

Group 115 - - - - Arizona.

Township 6 North, Range 16 West.

	2-6-23	2-6-23	2-6-23	2-5-23	2-5-23	2-5-23
2-8-23	6 2-8-23	5 2-8-23	4 2-7-23	3 2-7-23	2 2-6-23	1 2-5-23
2-8-23	7 2-8-23	8 2-7-23	9 2-7-23	10 2-5-23	11 2-3-23	12 2-3-23
2-8-23	18 2-7-23	17 2-7-23	16 2-6-23	15 2-5-23	14 2-3-23	13 2-3-23
2-7-23	19 2-6-23	20 2-6-23	21 2-5-23	22 2-3-23	23 2-3-23	24 2-2-23
2-7-23	30 2-6-23	29 2-6-23	28 2-5-23	27 2-3-23	26 2-3-23	25 2-2-23
2-7-23	31 2-6-23	32 2-6-23	33 2-5-23	34 2-3-23	35 2-3-23	36 2-2-23
2-7-23	2-1-23	2-1-23	2-1-23	2-1-23	2-1-23	2-1-23

- Indicates surveys executed by William H. Thorn, U.S. Cadastral Engineer, on dates shown thereon.
- - - - - Indicates resurveys executed by William H. Thorn, U.S. Cadastral Engineer, on dates shown thereon.
- Indicates surveys executed by Ty White, U.S. Transitman, on dates shown thereon.
- - - - - Indicates resurveys executed by Ty White, U.S. Transitman on dates shown thereon.
- Indicates accepted survey.

Resurveys and surveys herein described, were executed on dates shown on diagram on page 1 hereof, by William H. Thorn, U.S.C.E., and Ty White, U.S.T., using respectively Young & Sons light mountain transits Nos. 8592 and 8540; both instruments are equipped with full vertical circle and Smith solar attachment; unless otherwise specified, all azimuth determinations are accomplished with the solar attachment.

January 27, 1923: We examine the adjustments of the transits and correct all errors; then, to test the solar apparatus by comparing their indications resulting from observations made during a.m. and p.m. hours with a meridian established by observations on Polaris, we proceed as follows:

At camp, near the $\frac{1}{4}$ sec. cor. of secs. 25 and 26, T. 6 N., R. 16 W., G. and S. R. B. and M., Arizona; lat. $33^{\circ}50'N.$; long. $113^{\circ}47'W.$, at 11 h. 4.5m. p.m., l.m.t., we observe Polaris at western elongation, making four observations, two each with the telescope in direct and reversed positions, and mark the mean point in the line thus determined on a peg driven firmly in the ground, 8 chs. N.

Azimuth of Polaris at western elongation, $1^{\circ}19'39''$.

January 28, 1923: At 8h. 8m. a.m., l.m.t., we lay off the azimuth of Polaris, $1^{\circ}19\frac{1}{2}'$ to the east, and mark the true meridian thus determined by a tack in a peg, driven firmly in the ground, 8 chs. North.

At 9h. 0m. a.m., l.m.t., we set off $33^{\circ}50'N.$ on the lat. arcs; $18^{\circ}18\frac{1}{2}'S.$ on the decl. arcs; and determine a meridian with each solar, which agrees with the true meridian.

At apparent noon, with the lat. arcs unchanged, we observe the sun on the meridian with each solar; the resulting reading of each decl. arc is $18^{\circ}17'S.$, which agrees with the computed decl.

At 3h. 0m. p.m., l.m.t., with the lat. arcs unchanged, we set off $18^{\circ}14\frac{1}{2}'S.$ on the decl. arcs, and determine a meridian with each solar, which we find to agree with the true meridian.

As all of the solar observations during the usual hours of solar work come within $1'30''$ of the true meridian, we conclude that the adjustments of the instruments are satisfactory.

Unless otherwise specified, all measurements are made with a Lufkin steel tape, 5chs. in length, compared with a Lufkin 1 ch. standard steel tape, and found correct. The measurements are made on the slope, the vertical angle determined, and the slope measurements properly reduced to true horizontal distances.

Resurvey of the West bdy. of Township 6 North, Range 16 West. 3

Chains.

The West boundaries of Ts. 6 and 7 N., R.16 W. were surveyed in 1909, by John F.Hesse, U.S.D.S., and no retracement or resurvey of the range line in either T.6 N. or T.7 N. is of record.

As no subdivisional surveys have been executed in either T.6 N., R.16 W. or T.6 N., R.17 W., the range line, thru T.6 N. is subject to rectification; therefore, an independent resurvey is executed as described as follows:

From the original cor. of Ts. 6 and 7 N., Rs. 16 and 17 W., hereinafter described,

South, on random line, to obtain bearing of the Range line.

480.93

Run 28 lks. W. of the original cor. of Ts. 5 and 6 N., Rs. 16 and 17 W., which is a granite stone, 8x6x4 ins. above ground, firmly set, marked 6N on NE. face, 16W on SE. face, 5N on SW. face, 17N on NW. face, and 6 notches on each of E., W., N. and S. edges, and witnessed by a mound of stone, S. of cor. No bearing trees.

Thence,

N. 0° 2' W., on a true line, bet. secs. 31 and 36.


Over nearly level land, thru scattering timber and dense undergrowth.

36.10

Wash, 10 lks. wide, course E.

40.00

Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for reestablished 1/4 sec. cor., marked on brass cap,



from which,

An ironwood, 9 ins. in diam., brs. S. 81 1/2° E., 145 lks. dist., marked 1/4 S. 31 BT.

An ironwood, 10 ins. in diam., brs. N. 6 1/2° W., 445 lks. dist., marked 1/4 S. 36 BT.

40.06

A point 2 lks. W. of the original 1/4 sec. cor., which is a quartzite stone 6x6x6 ins. above ground, firmly set, marked 1/4 on W. face, and witnessed by a mound of stone W. of cor. No bearing trees. Remove the stone, and destroy the accessory.

40.25

Road brs. NE. and SW.

47.25

Road, brs. NE. and SW.

54.90


Wash, 10 lks. wide, course E.

65.40

Wash, 15 lks. wide, course E.

80.00

Set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for reestablished cor. of secs. 25, 30, 31 and 36, marked on brass cap,



from which,

An ironwood, 8 ins. in diam., brs. S. 11 1/2° E., 469 lks. dist., marked T6N R16W S31 BT.

A palo verde, 16 ins. in diam., brs. N. 71 1/2° W., 386 lks. dist., marked T6N R17W S25 BT.

No other bearing trees available. Raise a mound of stone 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, nearly level.

Soil, gravelly and rocky, 3rd and 4th rate.


Timber, ironwood and palo verde.

Undergrowth, greasewood, scrub palo verde, ironwood and cactus.


4 Resurvey of the West bdy. of Township 6 North, Range 16 West.

Chains.

- N.0°2'W., on a true line, bet. secs.25 and 30.
Over level land, thru. scattering timber and dense undergrowth.
- .18 A point 5 lks.E. of the original cor. of secs.25,30,31 and 36, which is a quartzite stone, 7x7x6 ins. above ground, firmly set, marked with 1 notch on S. face, and 5 notches on N. face, and witnessed by a mound of stone, W. of cor. No bearing trees. Remove the stone, and destroy the accessories.
- 6.25 Old road, brs. N.15°W. and S.15°E.
- 29.70 Wash, 10 lks. wide, course E.
- 38.18 Wash, 10 lks. wide, course E.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap,



- from which,
- An ironwood, 10 ins. in diam., brs. S.35°E., 233 lks. dist., marked $\frac{1}{4}$ S 30 BT.
- An ironwood, 8 ins. in diam., brs. S.22°W., 441 lks. dist., marked $\frac{1}{4}$ S 25 BT.
- 40.29 A point $3\frac{1}{2}$ lks. E. of the original $\frac{1}{4}$ sec. cor., which is a quartzite stone 8x6x6 ins. above ground, firmly set, marked $\frac{1}{4}$ on W. face, and witnessed by two pits, one each N. and S. of stone, and a mound of earth, W. of cor. No bearing trees. Remove the stone, and destroy the accessories.
- 73.00 Wash, 25 lks. wide, course NE.
- 79.50 Wash, 70 lks. wide, course NE.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for reestablished cor. of secs. 19, 24, 25 and 30, marked on brass cap,




- from which,
- An ironwood, 18 ins. in diam., brs. S.82°W., 105 lks. dist., marked T6N R17W S25 BT.
- An ironwood, 9 ins. in diam., brs. S.53°E., 105 lks. dist., marked T6N R16W S30 BT.
- No other bearing trees available.
- Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. Land, level.
- Soil, sandy and gravelly, 3rd rate.
- Timber, scattering palo verde and ironwood.
- Undergrowth, greasewood, scrub catclaw and mesquite.

-
- N.0°2'W., on true line, bet. secs. 19 and 24.
Over level land, thru. scattering timber and dense undergrowth.
 - .83 Intersect the original witness cor. to cor. of secs. 19, 24, 25 and 30, which is a quartzite stone, 8x6x6 ins. above ground, firmly set, marked WC on NE. face, 2 notches on S. face, and 4 notches on N. face, and witnessed by 4 pits, one each NE., SE., SW. and NW. of cor., and a mound of earth W. of cor. No bearing trees. Remove the stone, and destroy the accessories.
 - 14.45 Wash, 15 lks. wide, course NE.
 - 19.50 Wash, 15 lks. wide, course NE.
 - 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in

Resurvey of West bdy. of Township 6 North, Range 16 West. 5

Chains.

the ground for reestablished 1/4 sec.cor., marked on brass cap,



No bearing trees available.
Dig pits, 18x18x12 ins., one each N. and S. of post, 3-ft. dist.

40.43 A point 2 lks.E. of original 1/4 sec.cor., which is a quartzite stone, 10x8x6 ins. above ground, firmly set, marked 1/4 on W. face, and witnessed by two pits, one each N. and S. of stone, and mound of earth, W. of cor. No bearing trees.


Remove the stone and destroy the accessories.

49.00 Wash, 15 lks.wide, 4 ft. deep, course NE.

79.55 A point 2 lks.E. of the original witness cor. to cor. of secs. 13, 18, 19 and 24, which is a quartzite stone 8x6x5 ins. above ground; firmly set, marked WC on NE. face, and 3 notches on each of N. and S. faces, and witnessed by four pits, one each NE., SE., SW., and NW. of cor., and a mound of earth, W. of cor. No bearing trees.

Remove the stone and destroy the accessories.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 13, 18, 19 and 24, marked on brass cap,



- from which,
- An ironwood, 12 ins. in diam., brs. N. 16° E., 190 lks. dist., marked T6N R16W S18 BT.
- An ironwood, 9 ins. in diam., brs. S. 12 3/4° E., 230 lks. dist., marked T6N R16W S19 BT.
- An ironwood, 8 ins. in diam., brs. S. 31° W., 335 lks. dist., marked T6N R17W S24 BT.
- An ironwood, 8 ins. in diam., brs. N. 24 1/2° W., 86 lks. dist., marked T6N R17W S13 BT.

Land, level.
Soil, sandy and gravelly, 3rd rate.
Timber, scattering ironwood and palo verde.
Undergrowth, greasewood, scrub palo verde and cactus.

N. 9° 2' W., on true line, bet. secs. 13 and 18.
Over nearly level land, thru. scattering timber and dense undergrowth.

.60 Wash, 15 lks.wide, course NE.


13.10 Road, brs. NW. and SE.

16.55 Wash, 15 lks.wide, course NE.

30.80 Wash, 20 lks.wide, course NE.

39.35 Wash, 20 lks.wide, course NE.

40.00 Set an iron post, 3-ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec.cor., marked on brass cap,



No bearing trees available.
Dig pits, 18x18x12 ins., one each N. and S. of post, 3 ft. dist.

40.60 A point, 1 lk.W. of the original 1/4 sec.cor., which is a quartzite stone 8x6x5 ins. above ground, firmly set, marked 1/4 on W. face, and witnessed by two pits, one

6 Resurvey of West bdy. of Township 6 North, Range 16 West.

Chains.

- each N. and S. of stone, and a mound of earth W. of cor.
No bearing trees.
Remove the stone, and destroy the accessories.
54.20 Center of Bouse Wash, 6.00 chs. wide, 8 ft. deep, course NW.
57.90 Barbed wire fence, 4 strand, brs. NW. and SE. along right
edge of Bouse wash.
79.30 Barbed wire fence, 4 strand, brs. NW. and SE.
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in
the ground, for reestablished cor. of secs. 7, 12, 13 and
18, marked on brass cap,

T6N	
R17W	R16W
S12	S 7
S13	S18

1923

No bearing trees available. Dig pits, 18x18x12 ins., one
each NE., SE., SW. and NW. of post, 3 ft. dist.
Land, level.
Soil, sandy and gravelly, 2nd and 3rd rate.
Timber, ironwood and palo verde.
Undergrowth, greasewood, scrub palo verde and cactus.

- N. 0° 2' W., on true line, bet. secs. 7 and 12.
Over nearly level land, thru. dense undergrowth.
.64 A point 1 lk. W. of the original cor. of secs. 7, 12, 13 and 18
which is a silica stone 16x8x6 ins. above ground, firmly
set, marked with 4 notches on S. face, and 2 notches on
N. face, and witnessed by four pits, one each NE., SE.,
SW. and NW. of stone, and a mound of earth W. of cor.
No bearing trees. Remove the stone, and destroy the ac-
cessories.
5.40 Wash, 40 lks. wide, course NW.
8.50 Wash, 20 lks. wide, course NW.
18.00 Left edge of Cunningham Wash, brs. E. and W. Thence across
said wash, course W. formed by a series of washes, as
follows:
20.40 Wash, 25 lks. wide, course W.
27.60 Wash, 50 lks. wide, course W.
31.00 Wash, 90 lks. wide, course W.
32.00 Right edge of Cunningham Wash, brs. E. and W. Leave said
wash.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in
the ground, for reestablished $\frac{1}{4}$ sec. cor., marked on
brass cap,

$\frac{1}{4}$ S12	$\frac{1}{4}$ S 7
-------------------	-------------------

1923

- No bearing trees available.
Dig pits, 18x18x12 ins., one each N. and S. of post, 3 ft.
dist.
40.68 A point, 1 lk. W. of the original $\frac{1}{4}$ sec. cor., which is a
granite stone, 10x8x6 ins. above ground, firmly set
marked $\frac{1}{4}$ on W. face, and witnessed by two pits, one
each N. and S. of stone, and a mound of earth W. of cor.
No bearing trees. Remove the stone, and destroy the ac-
cessories.
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in
the ground, for reestablished cor. of secs. 1, 6, 7 and 12,
marked on brass cap,

T6N.	
R17W	R16W
S 1	S 6
S12	S 7

1923

Resurvey of West bdy. of Township 6 North, Range 16 West. 7

Chains.

No bearing trees available. Dig pits, 18x18x12 ins., one each NE., SE., SW. and NW. of post, 3 ft. dist.
Land, nearly level.
Soil, sandy and gravelly, 2nd and 3rd rate.
Timber, none.
Undergrowth, greasewood.

N.0°2'W., on a true line, on W. bdy. of sec.6.
Over nearly level land, thru. dense undergrowth.

.75 A point, 5 lks.W. of the original cor.of secs.1,6,7 and 12, which is a granite stone, 10x6x6 ins. above ground, firmly set, marked with 5 notches on S.face, and 1 notch on N.face, and witnessed by four pits, one each NE., SE., SW. and NW. of stone, and a mound of earth, W. of cor. No bearing trees.

Remove the stone, and destroy the accessories.

32.75 Wash, 15 lks.wide, course W.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for reestablished $\frac{1}{4}$ sec.cor.of secs. 1 and 6, marked on brass cap,

$\frac{1}{4}$ S1 | $\frac{1}{4}$ S6

1923.

No bearing trees available. Dig pits, 18x18x12 ins., one each N. and S. of post, 3 ft. dist.

40.87 A point 4 lks.W.of the original $\frac{1}{4}$ sec.cor., which is a granite stone, 10x8x6 ins. above ground, firmly set, marked $\frac{1}{4}$ on W. face, and witnessed by 2 pits, one each N. and S. of stone, and a mound of earth, W.of cor.

No bearing trees. Remove the stone, and destroy the accessories.

59.50 Wash, 12 lks.wide, course W.

80.93 Intersect the original cor.of Ts.6 and 7 N., Rs.16 and 17 W., which is a porphyry stone, 10x10x4 ins. above ground, firmly set, marked 7N on NE.face, 16W on SE. face, 6N on SW. face, 17W on NW face, and 6 notches on each of E., W., N. and S. edges, and witnessed by four pits, one each E., W., N. and S. of stone, and a mound of earth S. of cor. No bearing trees. Alter this cor. to refer to Ts.6 and 7 N., R.17 W. only, by obliterating the marking on NE. and SE.faces, and the notches on E. edge of stone, filling in the pit E. of cor., and moving the mound of earth from S. to W. of cor.

From this cor., a flag on the $\frac{1}{4}$ sec.cor.of secs.31 and 36, Ts.7 N., Rs.16 and 17 W. is visible, and brs.North; therefore, from above described cor., continue measurement of W. bdy. of sec.6,

North, on true line, bet. secs.6 and 36.

84.95 Point of intersection of the North bdy.of T.6 N., R.16 W., surveyed due West. Closing cor.of Ts.6 and 7 N., R.16 W. is established at this point, as hereinafter described.

Land, nearly level.

Soil, sandy and gravelly, 2nd and 3rd rate.

Timber, none.

Undergrowth, greasewood and cactus.

8 Survey of South bdy. of Township 6 North, Range 16 West.

Chains.

From the cor. of Ts. 5 and 6 N., Rs. 15 and 16 W., described in Book "I," West, on a random line, setting temp. cors. at intervals of 40.00 chs.; and at 481.17 chs. fall 1.20 chs. South of the cor. of Ts. 5 and 6 N., Rs. 16 and 17 W., hereinbefore described. The falling answers to a correction of 0°9', or 20 lks. N. per mile, counting from the SE. cor. of T. 6 N., R. 16 W.

From the cor. of Ts. 5 and 6 N., Rs. 16 and 17 W., S. 89°51' E., on a true line, bet. secs. 6 and 31. Over level land, thru. medium undergrowth.

41.17 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

1/4 S 31
S 6
1923

No bearing trees available. Dig pits, 18x18x12 ins., one each E and W. of post, 3 ft. dist.

66.75 Wash, 5 lks. wide, course NE.

77.45 Draw, course NE.

81.17 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 5, 6, 31 and 32, marked on brass cap,

T6N | R16W
S31 | S32
S 6 | S 5
T5N
1923

No bearing trees available. Dig pits, 18x18x12 ins., one each NE., SE., SW. and NW. of post, 3 ft. dist.

Land, level.

Soil, 2nd rate.

Timber, none.

Undergrowth, mesquite and greasewood.

S. 89°51' E., on a true line, bet. secs. 5 and 32. Over level land, thru. medium undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

1/4 S 32
S 5
1923

No bearing trees available. Dig pits, 18x18x12 ins., one each, E. and W. of post, 3 ft. dist.

55.00 Enter dense undergrowth, brs. N. and S.

63.00 Leave dense undergrowth, brs. N. and S.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 4, 5, 32 and 33, marked on brass cap,

T6N | R16W
S32 | S33
S 5 | S 4
T5N
1923

No bearing trees available. Dig pits, 18x18x12 ins., one each NE., SE., SW. and NW. of post, 3 ft. dist.

Land, level.

Soil, sandy loam, 1st and 2nd rate.

No timber.

Undergrowth, greasewood and mesquite.

Survey of South bdy. of Township 6 North, Range 16 West, 9

Chains.

S.89°51'E., on a true line, bet. secs.4 and 33.
 Over level land, thru. scattering undergrowth.
 6.80 Draw, course.N.
 23.50 Road, brs.NW and SE.
 33.30 Dim road, brs.NW and SE.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam.,26 ins.in
 the ground, for 1/4 sec.cor., marked on brass cap,

1/4 S 33
 S 4
 1923

No bearing trees available. Dig pits, 18x18x12 ins.,one
 each, E.and W.of post, 3 ft. dist.
 50.00 Left edge of Bouse Wash, brs.NW, and SE. Thence across
 said wash, course NW.
 70.00 Right edge of Bouse Wash, brs.NW, and SE. Leave said wash.
 80.00 Set an iron post, 3 ft.long, 2 ins. in diam.,26 ins.in
 the ground, for cor.of secs.3,4,33 and 34, marked on
 brass cap,

T6N | R16W
 S33 | S34
 S 4 | S 3
 T5N
 1923

No bearing trees available..Dig pits, 18x18x12 ins.,one
 each NE.,SE., SW. and NW. of post, 3 ft. dist.
 Land,level.
 Soil,sandy loam, 1st rate.
 Timber, none.
 Undergrowth, greasewood and mesquite.

S.89°51'E., on a true line, bet. secs.3 and 34.
 Over level land, thru. scattering undergrowth.
 16.90 Draw, course SW.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam.,26 ins,in
 the ground, for 1/4 sec.cor., marked on brass cap,

1/4 S 34
 S 3
 1923

No bearing trees available. Dig pits, 18x18x12 ins.,one
 each E.and W.of post, 3 ft. dist.
 80.00 Set an iron post, 3 ft.long, 2 ins.in diam.,26 ins. in
 the ground, for cor.of secs.2,3, 34 and 35, marked
 on brass cap,

T6N | R16W
 S34 | S35
 S 3 | S 2
 1923

No bearing trees available. Dig pits 18x18x12 ins.,one
 each NE., SE., SW. and NW. of post, 3 ft. dist.
 Land,level.
 Soil, sandy loam, 1st rate.
 Timber, none.
 Undergrowth, greasewood and cactus.

S.89°51'E.on a true line, bet. secs.2 and 35.
 Over level land, thru. scattering undergrowth.
 17.00 Draw, course SW.
 40.00 Set an iron post, 3 ft.long, 1 in. in diam.,26 ins.in
 the ground, for 1/4 sec.cor., marked on brass cap,

10 Survey of South bdy. of Township 6 North, Range 16 West.

Chains.

$$\frac{1}{4} \frac{S 35}{S 2}$$
 1923

50.00 No bearing trees available. Dig pits, 18x18x12 ins., one each E. and W. of post, 3 ft. dist.
 80.00 Sand ridge, 5 ft. high, brs. NE and SW.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 1, 2, 35 and 36, marked on brass cap,

T6N	R16W
S35	S36

$$\frac{S 2}{T5N}$$
 1923

No bearing trees available. Dig pits, 18x18x12 ins., one each NE., SE., SW. and NW. of post, 3 ft. dist.
 Land, level.
 Soil, sandy loam, 1st rate.
 Timber, none.
 Undergrowth, greasewood and cactus.

40.00 S. 89° 51' E., on a true line, bet. secs. 1 and 36.
 Over level land, thru. scattering undergrowth.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$$\frac{1}{4} \frac{S 36}{S 1}$$
 1923

80.00 No bearing trees available. Dig pits, 18x18x12 ins., one each E. and W. of post, 3 ft. dist.
 80.00 The cor. of Ts. 5 and 6 N., Rs. 15 and 16 W., described in Book "I."
 Land, level.
 Soil, sandy loam, 1st. and 2nd rate.
 Timber, none.
 Undergrowth, greasewood and cactus.

Survey of the North bdy. of Township 6 North, Range 16 West. 11

Chains.

From the cor. of Ts. 6 and 7 N., Rs. 15 and 16 W., described in Book "I,"

West, on a random line, setting temp. cors. at intervals of 40.00 chs.; and at 481.02 chs., fall 4.02 chs. N. of the cor. of Ts. 6 and 7 N., Rs. 16 and 17 W., hereinbefore described. Return to the cor. of Ts. 6 and 7 N., Rs. 15 and 16 W.

Thence,

West, on a true line, bet. secs. 1 and 36.

Over level land, thru. scattering timber and undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 36
S 1
1923

from which,

An ironwood, 6 ins. diam., brs. N. 75° 5' E., 233 lks. dist., marked $\frac{1}{4}$ S 36 BT.

An ironwood, 6 ins. in diam., brs. S. 59° 45' E., 68 lks. dist., marked $\frac{1}{4}$ S 1 BT.

50.00 Wash, 15 lks. wide, course S. 60° W.

59.70 Wash, 30 lks. wide, course S. 60° W.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 1, 2, 35 and 36, marked on brass cap,

T7N | R16W
S35 | S36
S 2 | S 1
T6N
1923

No bearing trees available. Dig pits, 18x18x12 ins., one each NE., SE., SW. and NW. of post, 3 ft. dist.

Land, level.

Soil, sandy, 2nd and 3rd rate.

Timber, palo verde, ironwood and mesquite.

Undergrowth, greasewood, ocotillo, catclaw and cactus.

West, on a true line, bet. secs. 2 and 35.

Over level land, thru. scattering timber and undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 35
S 2
1923

No bearing trees available. Dig pits, 18x18x12 ins., one each E. and W. of post, 3 ft. dist.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 2, 3, 34 and 35, marked on brass cap,

T7N | R16W
S34 | S35
S 3 | S 2
T6N
1923

No bearing trees available. Dig pits, 18x18x12 ins., one each NE., SE., SW. and NW. of post, 3 ft. dist.

Land, level.

Soil, sandy, 2nd and 3rd rate.

Timber, palo verde, ironwood and mesquite.

Undergrowth, greasewood, ocotillo and cactus.

12 Survey of North hdy. of Township 6 North Range 16 West.

Chains.

West, on true line, bet. secs. 3 and 34.
Over level land, thru. scattering timber and undergrowth.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$$\frac{1}{4} \begin{array}{c} S 34 \\ S 3 \\ 1923 \end{array}$$

No bearing trees available. Dig pits 18x18x12 ins., one
each E. and W. of post, 3 ft. dist.
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in
the ground, for cor. of secs. 3, 4, 33 and 34, marked on
brass cap,

$$\begin{array}{c|c} T7N & R16W \\ \hline S33 & S34 \\ \hline S 4 & S 3 \\ T6N & \\ 1923 & \end{array}$$

from which,

An ironwood, 6 ins. in diam., brs. S. 3° 50' E., 429
lks. dist., marked T6N R16W S3 BT.

No other bearing tree available. Dig pits, 18x18x12 ins.,
one each NE., SE., SW. and NW. of post, 3 ft. dist.
Land, level.

Soil, sandy and gravelly, 2nd and 3rd rate.

Timber, palo verde and ironwood.

Undergrowth, greasewood and cactus.

West, on true line, bet. secs. 4 and 33.
Over level land, thru. scattering timber and undergrowth.
13.20 Wash, 25 lks. wide, course SW.
20.00 Leave level, and enter hilly land.
Ascend 175 ft., over NE. slope.
37.00 Volcanic ridge, brs. N. and S.
Descend 31 ft., over SW. slope.
39.00 Head of gulch, course S. 45° W.
Ascend slightly over SE. slope, to
40.00 Set an iron post, 3 ft. long, 1 in. in diam., on surface
rock, deposit a stone marked with a cross (x) at base
of post, and raise a mound of stone around post, for
 $\frac{1}{4}$ sec. cor., marked on brass cap,

$$\frac{1}{4} \begin{array}{c} S 33 \\ S 4 \\ 1923 \end{array}$$

No bearing trees available.
Ascend 12 ft. over SE. slope.
41.50 Spur, slopes S. 45° W.
Descend 160 ft., over NW. slope, to
55.00 Foot of descent, brs. NE. and SW. Thence over level land.
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in
the ground, for cor. of secs. 4, 5, 32 and 33, marked
on brass cap,

$$\begin{array}{c|c} T7N & R16W \\ \hline S 5 & S 4 \\ \hline T6N & \\ 1923 & \end{array}$$

from which,

An ironwood, 6 ins. in diam., brs. N. 72° 25' E.,
319 lks. dist., marked T7N R16W S33 BT.

An ironwood, 6 ins. in diam., brs. S. 51° 40' E.,
525 lks. dist., marked T6N R16W S4 BT.

BOOK 3611

Survey of Subdivision Lines of Township 6 North Range 16 West. 29

Chains.

83.70 Wash, 10 lks. wide, course SW.
 84.50 Left edge of Cunningham wash, brs. N. 70° E. and S. 70° W. Leave said wash.
 85.50 The cor. of secs. 3, 4, 9 and 10.
 Land, level and rolling.
 Soil, rocky, 4th rate, lava formation.
 Timber, ironwood, palo verde and mesquite.
 Undergrowth, greasewood and cactus.

 From the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of Tp., hereinbefore described, N. 0° 2' W., bet. secs. 32 and 33.
 Over level land, thru. medium undergrowth.

21.20 Road, brs. NW and SE.
 38.10 Old road, brs. NW and SE.
 40.00 Set an iron post; 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
 S32 | S33
 1923

No bearing trees available.
 Dig pits, 18x18x12 ins., one each N. and S. of post, 3 ft. dist.

41.64 From this point, windmill brs. N. 24° 15' W.
 46.40 Left edge of Bouse wash, brs. NW and SE. Thence across said wash.
 54.40 Main channel, 20' lks. wide, 4 ft. deep, course NW.
 63.40 Right edge of Bouse Wash, brs. NW and SE. Leave said wash.
 74.20 Old road, brs. NE and SW.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 28, 29, 32 and 33, marked on brass cap,

T6N | R16W
 S29 | S28
 S32 | S33
 1923

No bearing trees available.
 Dig pits, 18x18x12 ins., one each NE., SE., SW. and NW. of post, 3 ft. dist.
 Land, level.
 Soil, sandy loam, 1st rate.
 Timber, none.
 Undergrowth, greasewood, mesquite and cactus.

 S. 89° 51' E. on a random line, bet. secs. 28 and 33.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.92 Intersect the cor. of secs. 27, 28, 33 and 34.
 Thence,
 N. 89° 51' W., on a true line, bet. secs. 28 and 33.
 Over level land, thru. dense undergrowth.
 39.96 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 28
 S 33
 1923

30 Survey of Subdivision lines of Township 6 North, Range 16 West.

Chains.

No bearing trees available.
Dig pits, 18x18x12 ins., one each E. and W. of post, 3 ft. dist.

70.80 Old road, brs. NE. and SW.
79.92 The cor. of secs. 28, 29, 32 and 33.
Land, level.
Soil, sandy loam, 1st rate.
Timber, none.
Undergrowth, greasewood and mesquite.

N. 0° 2' W., bet. secs. 28 and 29.
Over level land, thru. dense undergrowth.

30.00 Wash, course W.
39.90 Draw, course SW.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
S29 | S28
1923

No bearing trees available.
Dig pits, 18x18x12 ins., one each N. and S. of post, 3 ft. dist.

48.50 Old road, brs. NE and SW.
72.50 Wash, 50 lks. wide, course SW.
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 20, 21, 28 and 29, marked on brass cap,

T6M | R16W
S20 | S21
S29 | S28
1923

No bearing trees available.
Dig pits, 18x18x12 ins., one each NE., SE., SW. and NW. of post, 3 ft. dist.

Land, level.
Soil, sandy loam, 1st rate.
Timber, none.
Undergrowth, greasewood and mesquite.

40.00 S. 89° 51' E., on a random line, bet. secs. 21 and 28.
79.94 Set temp. $\frac{1}{4}$ sec. cor.
Intersect N. and S. line, 5 lks. S. of the cor. of secs. 21, 22, 27 and 28.

Thence,
39.97 N. 89° 53' W., on a true line, bet. secs. 21 and 28.
Over level land, thru. dense undergrowth.
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 21
S 28
1923


No bearing trees available.

Survey of Subdivision lines of Township 6 North, Range 16 West. 31


Chains.

49.45 Dig pits, 18x18x12 ins., one each E. and W. of post, 3 ft. dist.
 74.95 Old road, brs. NE. and SW.
 79.94 Wash, 50 lks. wide, course SW.
 The cor. of secs. 20, 21, 28 and 29.
 Land, level.
 Soil, sandy loam, 1st rate.
 Timber, none.
 Undergrowth, greasewood and mesquite.

21.00 N. 0° 2' W., bet. secs. 20 and 21.
 Over level land, thru. scattering undergrowth.
 40.00 Wash, 20 lks. wide, course SW.
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,




80.00 No bearing trees available.
 Dig pits, 18x18x12 ins., one each N. and S. of post, 3 ft. dist.
 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 16, 17, 20 and 21, marked on brass cap,



No bearing trees available. Dig pits, 18x18x12 ins., one each NE., SE., SW. and NW. of post, 3 ft. dist.
 Land, level.
 Soil, sandy loam, and gravelly, 1st rate.
 Timber, none.
 Undergrowth, greasewood and cactus.

40.00 S. 89° 53' E., on a random line, bet. secs. 16 and 21.
 79.92 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect the cor. of secs. 15, 16, 21 and 22.
 Thence,
 N. 89° 53' W., on a true line, bet. secs. 16 and 21.
 39.96 Over level land, thru. dense undergrowth.
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,



79.92 No bearing trees available. Dig pits 18x18x12 ins., one each E. and W. of post, 3 ft. dist.
 The cor. of secs. 16, 17, 20 and 21.
 Land, level.
 Soil, sandy, 1st rate.
 Timber, none.
 Undergrowth, greasewood and cactus.

32 Survey of Subdivision lines of Township 6 North, Range 16 West.

Chains.	N.0°2'W., bet. secs. 16 and 17. Over level land, thru. scattering undergrowth.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap, $\begin{array}{c} \frac{1}{4} \\ \hline S17 S16 \end{array}$ 1923
80.00	No bearing trees available. Dig pits, 18x18x12 ins., one each N. and S. of post, 3 ft. dist. Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 8, 9, 16 and 17, marked on brass cap, $\begin{array}{c} T6N R16W \\ \hline S 8 S 9 \\ \hline S17 S16 \\ \hline 1923 \end{array}$
	No bearing trees available. Dig pits, 18x18x12 ins., one each NE., SE., SW. and NW. of post, 3 ft. dist. Land, level. Soil, sandy, 2nd and 3rd rate. Timber, none. Undergrowth, greasewood and cactus.
40.00	S.89°53'E., on a random line, bet. secs. 9 and 16. Set temp. $\frac{1}{4}$ sec. cor.
79.94	Intersect N. and S. line, 9 lks. N. of the cor. of secs. 9, 10, 15 and 16. Thence, N.89°49'W., on a true line, bet. secs. 9 and 16. Over level land, thru. scattering undergrowth.
32.10	A.T. and S.F.R.R. brs. N.49°13'W. and S.49°13'E.
32.94	Telegraph line brs. N.49°13'W. and S.49°13'E.
34.25	Wash, 20 lks. wide, course SW.
39.97	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap, $\begin{array}{c} \frac{1}{4} S 9 \\ \hline S 16 \\ \hline 1923 \end{array}$
41.94	No bearing trees available. Dig pits, 18x18x12 ins., one each E. and W. of post, 3 ft. dist. Road, brs. N.50°W. and S.50°E. Extends westerly to Los Angeles, California, and southeasterly to Phoenix, Arizona.
79.94	The cor. of secs. 8, 9, 16 and 17. Land, level. Soil, sandy loam, 2nd and 3rd rate. Timber, none. Undergrowth, greasewood and cactus.
13.00	N.0°2'W., bet. secs. 8 and 9. Over level land, thru. scattering timber and undergrowth. From this point, two sahuaros, 3 ft. apart, bear east 4 chs. dist.
29.80	Wash, 60 lks. wide, course S.70°W.
36.80	Road, brs. N.50°W. and S.50°E. Extends westerly to Los Angeles, Calif., and southeasterly to Phoenix, Arizona.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap, $\begin{array}{c} \frac{1}{4} \\ \hline S 8 S 9 \end{array}$ 1923

Survey of Subdivision lines of Township 6 North Range 16 West. 33

Chains.

- No bearing trees available. Dig pits, 18x18x12 ins., one each N. and S. of post, 3 ft. dist.
- 40.35 Telegraph line, brs. N. 49°13'W. and S. 49°13'E.
- 41.15 A.T. and S.F.R.R. brs. N. 49°13'W. and S. 49°13'E.
- 63.00 Left edge of Cunningham wash, brs. N. 70°E. and S. 70°W. Thence across said wash, course S. 70°W.
- 65.00 Wash, 35 lks. wide, course S. 70°W.
- 68.60 Wash, 20 lks. wide, course S. 70°W.
- 70.00 Right edge of Cunningham wash, brs. N. 70°E. and S. 70°W. Leave said wash.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 4, 5, 8 and 9, marked on brass cap,

T6N	R16W
S 5	S 4
S 8	S 9

 1923

No bearing trees available. Dig pits, 18x18x12 ins., one each NE., SE., SW. and NW. of post, 3 ft. dist.
 Land, level.
 Soil, sandy and stony, 3rd rate.
 Timber, ironwood, palo verde and mesquite.
 Undergrowth, greasewood and cactus.

- 40.00 S. 89°49'E., on a random line, bet. secs. 4 and 9. Set temp. 1/4 sec. cor.
- 80.00 Intersect N. and S. line, 7 lks. N. of the cor. of secs. 3, 4, 9 and 10. Thence, N. 89°46'W., on a true line, bet. secs. 4 and 9. Over level land, thru. scattering timber and undergrowth.
- 9.00 Left edge of Cunningham wash, brs. N. 70°E. and S. 70°W. Thence across said wash, course S. 70°W.
- 15.50 Wash, 20 lks. wide, course S. 70°W.
- 22.00 Wash, 30 lks. wide, course S. 70°W.
- 35.00 Right edge of Cunningham wash, brs. N. 70°E. and S. 70°W. Leave said wash.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

1/4 S	4
S 9	

 1923

- 80.00 No bearing trees available. Dig pits, 18x18x12 ins., one each E. and W. of post, 3 ft. dist. The cor. of secs. 4, 5, 8 and 9. Land, level. Soil, sandy, 2nd and 3rd rate. Timber, ironwood and palo verde. Undergrowth, greasewood and cactus.

- 40.00 N. 0°4'W., on a random line, bet. secs. 4 and 5. Set temp. 1/4 sec. cor.
- 85.18 Fall 5 lks. W. of the cor. of secs. 4, 5, 32 and 33, on the N. bdy. of Tp., hereinbefore described. Thence, S. 0°2'E., on a true line, bet. secs. 4 and 5. Over level land, thru. scattering timber and undergrowth.
- 36.38 Wash, 50 lks. wide, course W.
- 45.18 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

S 5	S 4
-----	-----

 1923

No bearing trees available.

34 Survey of Subdivision Lines of Township 6 North, Range 16 West.

Chains.

Dig pits, 18x18x12 ins., one each N. and S. of post, 3 ft. dist.
 85.18 The cor. of secs. 4, 5, 8 and 9.
 Land, level.
 Soil, sandy and stony, 2nd and 3rd rate.
 Timber, ironwood, palo verde and mesquite.
 Undergrowth, greasewood and cactus.

 From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of
 Tp.; hereinbefore described,
 N. 0° 3' W., bet. secs. 31 and 32.
 Over level land, thru. dense undergrowth.
 4.00 Draw, course NE.
 15.00 Wash, 5 lks. wide, course NE.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

	1 	
S31		S32

1923

No bearing trees available. Dig pits 18x18x12 ins., one
 each N. and S. of post, 3 ft. dist.
 60.00 From this point, Jones' ranch house brs. East.
 61.10 Road, brs. E. and W.
 65.78 From this point, same ranch house, brs. S. 39° E.
 67.00 Road brs. NE. and SW.
 80.00 W. edge of cleared field, brs. N. 20° W. and S. 20° E. Set an
 iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the
 ground, for cor. of secs. 29, 30, 31 and 32, marked on
 brass cap,

T6N		R16W
S30		S29
S31		S32

1923

No bearing trees available. Dig pits, 18x18x12 ins., one
 each NE., SE., SW. and NW. of post, 3 ft. dist.
 From this cor., windmill at Hip O Cattle ranch, owned by
 T.W. Bales, brs. S. 68° 45' W.
 Land, level.
 Soil, sandy loam, 1st rate.
 Timber, none.
 Undergrowth, greasewood, and cactus.

 S. 89° 51' E., on a random line, bet. secs. 29 and 32.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.04 Intersect N. and S. line, 2 lks. N. of the cor. of secs. 28,
 29, 32 and 33.
 Thence,
 N. 89° 50' W., on a true line, bet. secs. 29 and 32.
 Over level land, thru. dense undergrowth.
 11.05 Right edge of Bouse Wash, brs. NW. and SE. Thence across
 said wash, course NW.
 11.35 Old road, brs. N. and S.
 19.95 Wash, 20 lks. wide, 6 ft. deep, course NW.
 23.75 Left edge of Bouse Wash, brs. NW. and SE. Leave said wash.
 27.00 E. edge of cleared field, brs. NW. and SE. Leave dense under-
 growth. Thence over cleared field.
 40.02 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

	1 	
$\frac{1}{4}$ S 29		

	1 	
S 32		

1923

No bearing trees available. Dig pits, 18x18x12 ins., one
 each E. and W. of post, 3 ft. dist.

Survey of Subdivision Lines of Township 6 North, Range 16 West, 35

Chains.

64.00 Continue over cleared field.
 Road, brs.NE and SW.
 80.04 The cor.of secs.29,30,31 and 32 at W. edge of cleared field.
 Land,level.
 Soil,sandy loam,1st rate.
 Timber, none.
 Undergrowth, greasewood and cactus.

40.00 N.89°51'W., on a random line, bet. secs.30 and 31.
 Set temp.¼ sec.cor.
 81.15 Intersect the cor.of secs.25,30,31 and 36,on the W. bdy. of Tp., hereinbefore described.
 From this cor.,windmill at Hip O Ranch brs.S.45°E.
 Thence,
 S.89°51'E.,on a true line, bet. secs.30 and 31.
 Over level land, thru. scattering timber and undergrowth.
 2.70 Old road, brs.NW. and SE.
 31.20 Leave scattering timber, brs.N. and S.
 41.15 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins.in the ground, for ¼ sec.cor., marked on brass cap,

S 30
 ¼
 S 31
 1923

No bearing trees available. Raise a mound of stone, 2 ft.base, 1½ ft.high,N.of cor.
 54.50 Road, brs.NE and SW.
 81.15 The cor.of secs.29,30, 31 and 32, at W. edge of cleared field.
 Land,level.
 Soil,sandy loam,2nd rate.
 Timber,ironwood and palo verde.
 Undergrowth, greasewood and cactus.

N.0°3'W.,bet. secs.29 and 30.
 Over level land,across cleared field.
 15.80 Road brs.NE and SW.
 26.60 North edge of cleared field, brs.NE and SW. Leave cleared field,and enter dense undergrowth.
 38.30 Draw, course NE.
 40.00 Set an iron post, 3 ft.long, 1 in. in diam.,26 ins.in the ground, for ¼ sec.cor., marked on brass cap,

¼
 S30 | S29
 1923

No bearing trees available. Dig pits, 18x18x12 ins.,one each N.and S.of post, 3 ft.dist.
 66.70 Road, brs.NW. and SE.
 80.00 Set an iron post, 3 ft.long, 2 ins. in diam.,26 ins. in the ground, for cor.of secs.19,20,29 and 30, marked on brass cap,

T6N | R16W
 S19 | S20
 S30 | S29
 1923

No bearing trees available. Dig pits, 18x18x12 ins., one each NE., SE., SW. and NW.of post,3 ft.dist.
 Land,level.
 Soil,sandy, 1st rate.
 Timber, none.
 Undergrowth, greasewood and cactus.

BOOK 3611

36 Survey of Subdivision lines of Township 6 North, Range 16 West,

Chains.

- S.89°50'E., on a random line, bet. secs.20 and 29.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.02 Intersect N. and S. line, 5 lks. S. of the cor. of secs. 20, 21, 28 and 29.
 Thence,
 N.89°52'W., on a true line, bet. secs. 20 and 29.
 Over level land, thru. dense undergrowth.
 15.50 Wash, 30 lks. wide, course SW.
 40.01 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$$\frac{1}{4} \text{ S } 20$$

$$\text{S } 29$$
 1923
- No bearing trees available. Dig pits, 18x18x12 ins., one each E. and W. of post, 3 ft. dist.
 69.00 Right edge of Bouse wash, brs. NW and SE. Thence across said wash, course NW.
 71.00 Wash, 50 lks. wide, 10 ft. deep, course NW.
 74.50 Wash, 20 lks. wide, 6 ft. deep, course NW.
 79.75 Left edge of Bouse wash, brs. NW. and SE. Leave said wash.
 80.02 The cor. of secs. 19, 20, 29 and 30.
 Land, level.
 Soil, sandy, 1st rate.
 Timber, none.
 Undergrowth, greasewood, mesquite and cactus.
-
- N.89°51'W., on a random line, bet. secs. 19 and 30.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 81.16 Fall 7 lks. N. of the cor. of secs. 19, 24, 25 and 30, on the W. bdy. of Tp., hereinbefore described.
 Thence,
 S.89°54'E., on a true line, bet. secs. 19 and 30.
 Over level land, thru. scattering timber and dense undergrowth.
 0.40 Wash, 70 lks. wide, course NE.
 7.70 Wash, 30 lks. wide, course NE.
 21.18 Leave scattering timber, brs. N. and S.
 41.16 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$$\frac{1}{4} \text{ S } 19$$

$$\text{S } 30$$
 1923
- No bearing trees available. Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
 73.20 Road, brs. NW and SE.
 81.16 The cor. of secs. 19, 20, 29 and 30.
 Land, level.
 Soil, sandy and gravelly, 2nd rate.
 Timber, palo verde and ironwood.
 Undergrowth, greasewood, catclaw, and mesquite.
-
- N.0°3' W., bet. secs. 19 and 20.
 Over level land, thru. medium undergrowth.
 0.25 Left edge of Bouse Wash, brs. NW. and SE. Thence across said wash, 15 ft. deep, course NW.
 16.00 Right edge of Bouse Wash, brs. N, 20°W. and S. 20°E. Leave said wash.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$$\frac{1}{4} \text{ S } 19 \text{ S } 20$$
 1923

Survey of Subdivision lines of Township 6 North, Range 16 West. 37

Chains.

80.00 No bearing trees available. Dig pits, 18x18x12 ins., one each N. and S. of post, 3 ft. dist.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 17, 18, 19 and 20, marked on brass cap,

T6N	R16W
S18	S17
S19	S20

1923

No bearing trees available.
 Dig pits, 18x18x12 ins., one each NE., SE., SW. and NW. of post, 3 ft. dist.
 Land, level.
 Soil, sandy loam, 1st rate.
 Timber, none.
 Undergrowth, greasewood, mesquite and cactus.

40.00 S. 89°52'E., on a random line, bet. secs. 17 and 20.
 80.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.00 Intersect N. and S. line, 5 lks. N. of the cor. of secs. 16, 17, 20 and 21.

40.00 Thence, N. 89°50'W., on a true line, bet. secs. 17 and 20.
 40.00 Over level land, thru. scattering undergrowth.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 17
S 20

1923

80.00 No bearing trees available.
 80.00 Dig pits, 18x18x12 ins., one each E. and W. of post, 3 ft. dist.
 80.00 The cor. of secs. 17, 18, 19 and 20.
 Land, level.
 Soil, sandy loam, 1st rate.
 Timber, none.
 Undergrowth, greasewood and cactus.

40.00 N. 89°54'W., on a random line, bet. secs. 18 and 19.
 81.16 Set temp. $\frac{1}{4}$ sec. cor.
 81.16 Intersect the cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp., hereinbefore described.
 10.48 Thence, S. 89°54'E., on a true line, bet. secs. 18 and 19.
 27.50 Over level land, thru. scattering timber and undergrowth.
 38.00 Road brs. NW. and SE.
 41.16 Left edge of Bouse Wash, brs. NW. and SE. Thence across said wash, 20 ft. deep, course NW.
 41.16 Right edge of Bouse Wash, brs. NW. and SE. Leave said wash.
 41.16 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 18
S 19

1923

57.58 No bearing trees available. Dig pits, 18x18x12 ins., one each E. and W. of post, 3 ft. dist.
 81.16 Wash, 15 lks. wide, course S. 80°W.
 81.16 The cor. of secs. 17, 18, 19 and 20.

28 Survey of Subdivision lines of Township 6 North, Range 16 West.

Chains.	<p>Land, level. Soil, sandy loam, 2nd rate. Timber, ironwood. Undergrowth, greasewood and cactus.</p>								
40.00	<p>N.0°3'W., bet. secs. 17 and 18. Over level land, thru. scattering undergrowth. Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,</p> <div style="text-align: center;"> $\begin{array}{c} \frac{1}{4} \\ S18 \mid S17 \\ 1923 \end{array}$ </div>								
80.00	<p>No bearing trees available. Dig pits, 18x18x12 ins., one each N. and S. of post, 3 ft. dist. Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 7, 8, 17 and 18, marked on brass cap,</p> <div style="text-align: center;"> <table border="1"> <tr> <td>T6N</td> <td>R16W</td> </tr> <tr> <td>S 7</td> <td>S 8</td> </tr> <tr> <td>S18</td> <td>S17</td> </tr> <tr> <td colspan="2">1923</td> </tr> </table> </div>	T6N	R16W	S 7	S 8	S18	S17	1923	
T6N	R16W								
S 7	S 8								
S18	S17								
1923									
	<p>No bearing trees available. Dig pits, 18x18x12 ins., one each NE., SE., SW. and NW. of post, 3 ft. dist. Land, level. Soil, sandy loam, 1st rate. Timber, none. Undergrowth, greasewood.</p>								
40.00 80.00	<p>S.89°50'E., on a random line, bet. secs. 8 and 17. Set temp. $\frac{1}{4}$ sec.cor. Intersect the cor. of secs. 8, 9, 16 and 17. Thence, N.89°50'W., on a true line, bet. secs. 8 and 17. Over level land, thru. scattering undergrowth.</p>								
40.00	<p>Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,</p> <div style="text-align: center;"> $\begin{array}{c} \frac{1}{4} \text{ S } 8 \\ \text{S } 17 \\ 1923 \end{array}$ </div>								
80.00	<p>No bearing trees available. Dig pits, 18x18x12 ins., one each E. and W. of post, 3 ft. dist. The cor. of secs. 7, 8, 17 and 18. Land, level. Soil, sandy loam, 1st rate. Timber, none. Undergrowth, greasewood.</p>								
40.00 81.07	<p>N.89°54'W., on random line, bet. secs. 7 and 18. Set temp. $\frac{1}{4}$ sec.cor. Intersect the cor. of secs. 7, 12, 13 and 18, on W. bdy. of Tp., hereinbefore described.</p>								
41.07	<p>Thence, S.89°54'E., on a true line, bet. secs. 7 and 18. Over level land, thru. scattering timber and undergrowth. Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap,</p>								

Survey of Subdivision lines of Township 6 North, Range 16 West. 39

Chains.

$\frac{1}{4}$ S 7
S 18
1923

81.07 No bearing trees available. Dig pits, 18x18x12 ins., one each E. and W. of post, 3 ft. dist.
The cor. of secs. 7, 8, 17 and 18.
Land, level.
Soil, sandy, 2nd and 3rd rate.
Timber, ironwood and palo verde.
Undergrowth, greasewood and cactus.

18.60 N. 0° 3' W., bet. secs. 7 and 8.
Over level land, thru. scattering timber and undergrowth.
30.00 Wash, 30 lks. wide, course W.
Left edge of Cunningham wash, brs. N. 80° E. and S. 80° W. Thence across said wash, formed by a series of washes, as follows:
30.40 Wash, 20 lks. wide, course S. 80° W.
35.10 Wash, 40 lks. wide, course W.
37.60 Wash, 30 lks. wide, course S. 60° W.
38.00 Right edge of Cunningham wash, brs. N. 60° E. and S. 60° W.
Leave said wash.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
S 7 | S 8
1923

80.00 No bearing trees available. Dig pits, 18x18x12 ins., one each N. and S. of post, 3 ft. dist.
Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 5, 6, 7 and 8, marked on brass cap,

T6N | R16W
S 6 | S 5
S 7 | S 8
1923

No bearing trees available. Dig pits, 18x18x12 ins., one each NE., SE., SW. and NW. of post, 3 ft. dist.
Land, level.
Soil, sandy loam, 1st rate.
Timber, mesquite and catclaw.
Undergrowth, greasewood.

40.00 S. 89° 50' E., on a random line, bet. secs. 5 and 8.
Set temp. $\frac{1}{4}$ sec. cor.
79.98 Intersect N. and S. line, 5 lks. S. of the cor. of secs. 4, 5, 8 and 9.
Thence,
N. 89° 52' W., on a true line, bet. secs. 5 and 8.
Over level land, thru. dense undergrowth.
35.53 Railroad drainage ditch, course N. 49° W.
39.99 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 5
S 8
1923

40 Survey of Subdivision lines of Township 6 North, Range 16 West.

Chains.	No bearing trees available. Dig pits 18x18x12 ins., one each E. and W. of post, 3 ft. dist.
43.40	Railroad drainage ditch, course S.49°E.
45.15	A.T. and S.F.R.R. brs. N.49°13'W. and S.49°13'E.
46.10	Telegraph line, brs. N.49°13'W. and S.49°13'E.
52.40	Railroad drainage ditch, course S.60°W.
52.70	Road, brs. N.49°W. and S.49°E. Extends westerly to Los Angeles, and southeasterly to Phoenix.
79.98	The cor. of secs. 5, 6, 7 and 8. Land, level. Soil, sandy loam, 1st rate. Timber, none. Undergrowth, greasewood.

40.00	N.89°54'W., on a random line, bet. secs. 6 and 7. Set temp. $\frac{1}{4}$ sec. cor.
81.05	Fall 12 lks. N. of the cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp., hereinbefore described. Thence, S.89°59'E., on a true line, bet. secs. 6 and 7. Over level land, thru. medium undergrowth.
41.05	Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap, $\begin{array}{c} \frac{1}{4} \text{ S } 6 \\ \hline \text{S } 7 \\ 1923 \end{array}$
81.05	No bearing trees available. Dig pits, 18x18x12 ins., one each E. and W. of post, 3 ft. dist. The cor. of secs. 5, 6, 7 and 8. Land, level. Soil, sandy loam, 2nd rate. Timber, none. Undergrowth, greasewood.

40.00	N.0°3'W., on a random line, bet. secs. 5 and 6. Set temp. $\frac{1}{4}$ sec. cor.
84.98	Fall 2 lks. E. of the cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp., hereinbefore described. Thence, S.0°4'E., on a true line, bet. secs. 5 and 6. Over level land, thru. medium undergrowth.
5.98	Wash, 30 lks. wide, course W.
44.98	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap, $\begin{array}{c} \frac{1}{4} \\ \text{S } 6 \text{ S } 5 \\ \hline 1923 \end{array}$
52.78	No bearing trees available. Dig pits, 18x18x12 ins., one each N. and S. of post, 3 ft. dist. Railroad drainage ditch, course N.49°W.
55.00	A.T. and S.F.R.R. brs. N.49°13'W. and S.49°13'E.
55.80	Telegraph line, brs. N.49°13'W. and S.49°13'E.
62.20	Road, brs. N.48°W. and S.48°E. Extends westerly to Los Angeles, and southeasterly to Phoenix.
84.98	The cor. of secs. 5, 6, 7 and 8. Land, level. Soil, sandy loam, 1st rate. Timber, none. Undergrowth, greasewood.

The continued satisfactory adjustment of the solars during the survey of this township is indicated from field tests as described in Book "I."

GENERAL DESCRIPTION.

With the exception of sec.4, which is rolling, rocky land, this township consists of level, sandy or sandy loam land of 1st and 2nd rate texture, covered with a scattering growth of palo verde, mesquite and ironwood timber, and greasewood, ocotillo and cactus undergrowth.

The general drainage is to the southwest, thru. Cunningham wash, and other small washes, into the Bouse Wash, which flows in a northwesterly direction thru. the southwest quarter of the township. The A. T. and S. F. R. R. crosses this township in a northwesterly-southeasterly direction, dividing the township very nearly into halves. There is one settler in sec.32. The Hip O cattle ranch house is located in sec.31. Utting Siding lies in secs.25 and 26.

44
BOOK 3611

CERTIFICATE OF UNITED STATES TRANSITMAN

I, Ty White, U. S. Transitman, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 115, Arizona, bearing date of the 20th day of May, 1921, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, ~~resurveyed all those parts or portions of the west boundary, and surveyed all those parts or portions of the north boundary and subdivision lines of Township 6 North, Range 16 West,~~

~~of the Gila and Salt Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of resurvey and said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 115, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such resurvey and survey.~~

Place: Long Beach Calif. Ty White
U. S. Transitman.

Date: April 17 1924
APPROVAL.

~~OFFICE OF THE UNITED STATES SURVEYOR GENERAL,~~

~~, 191~~

The foregoing field notes of the survey of

executed by
under his special instructions dated _____, 191____, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

~~U. S. Surveyor General.~~

I certify that the foregoing transcript of the field notes of the above described surveys in _____, has been correctly copied from the original notes on file in this office.

~~U. S. Surveyor General.~~

CERTIFICATE OF UNITED STATES CADASTRAL ENGINEER.

BOOK 3611

I, William H. Thorn, U.S. Cadastral Engineer hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 115, Arizona, bearing date of the 20th day of May, 1921, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, resurveyed all those parts or portions of the West Boundary, and surveyed all those parts or portions of the south boundary and Subdivision Lines of

TOWNSHIP 6 NORTH, RANGE 16 WEST,

of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in and by diagram on page 1 hereof the foregoing field notes as having been executed by me, and under my direction; and that all the corners of resurvey and said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 115, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such resurvey and survey.

Place: Ajo Arizona U.S. Cadastral Engineer.
Date: April 1, 1924

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix, Arizona, April 22, 1924.

The foregoing field notes of the resurvey of the West Boundary, and the survey of the North, and South Boundaries, and Subdivision Lines of TOWNSHIP 6 NORTH, RANGE 16 WEST,

of the Gila and Salt River Base and Meridian, in the State of Arizona,

executed by William H. Thorn, U.S. Cadastral Engineer, and Ty White, U.S. Transitman, under his special instructions dated May 20, 1921, for Group 115, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above described surveys in, has been correctly copied from the original notes on file in this office.

U. S. Surveyor General.