

3660

85  
0888 11/14

Book "C"  
4-679

(1)

# BOOK 3660

## FIELD NOTES

OF THE RESURVEY OF THE

East boundary of Township 14 North, Range 1 East, and

South boundary of Township 14 North, Range 2 East,

and of the Survey of the

East boundary,

North boundary, and

Subdivision lines of

TOWNSHIP 14 NORTH, RANGE 2 EAST,

Of the Gila and Salt River Base and Meridian,

In the State of Arizona.

EXECUTED BY

Benjamin J. Kinsey, U.S.T., and

Ty White, U. S. T.

In the capacity of U. S. Surveyors, under Special Instructions dated May 26, 1922, issued by the United States Surveyor General to govern surveys included in Group No. 120, Arizona, which were approved by the Commissioner of the General Land Office, June 23, 1922, and Assignment Instructions dated May 26, 1923.

Resurvey and Survey commenced June 7, 1923.

Resurvey and Survey completed Aug. 4, 1923.

3660

3660

3660

Book "C"

Group 120 ~ Arizona


INDEX DIAGRAM.







Cor. of T. 14 N. & 15 N. R. 3 E.

Cor. of T. 14 N. R. 2 E. only N. 40 25' E. 12777' 20

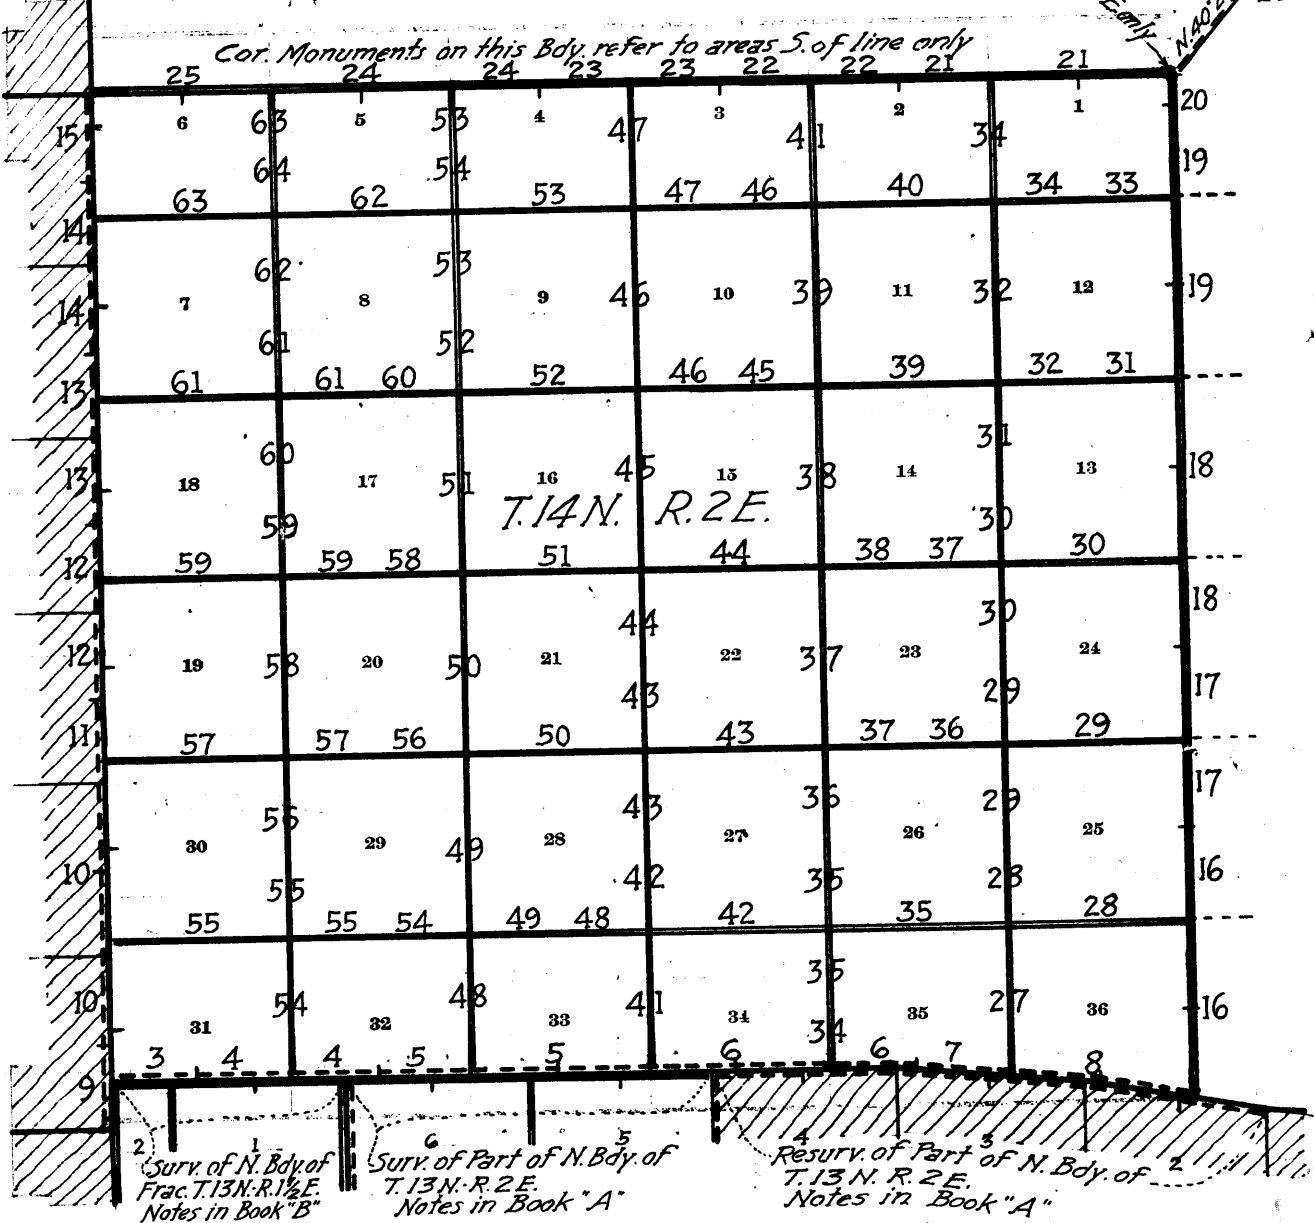Township \_\_\_\_\_, Range \_\_\_\_\_

Cor. Monuments on this Bdy. refer to areas S. of line only




-  Lines surveyed under this group.
-  Lines resurveyed under this group.
-  Lines surveyed with reference to areas on one side and resurveyed with reference to areas on opposite side.
-  Accepted surveys.
-  Unsurveyed.
-  Areas surveyed as per accepted plats on file.

# BOOK 3660

16

Book "C"  
Group 120 - - Arizona.  
Township 14 North, Range 2 East.

## DATE DIAGRAM 1923

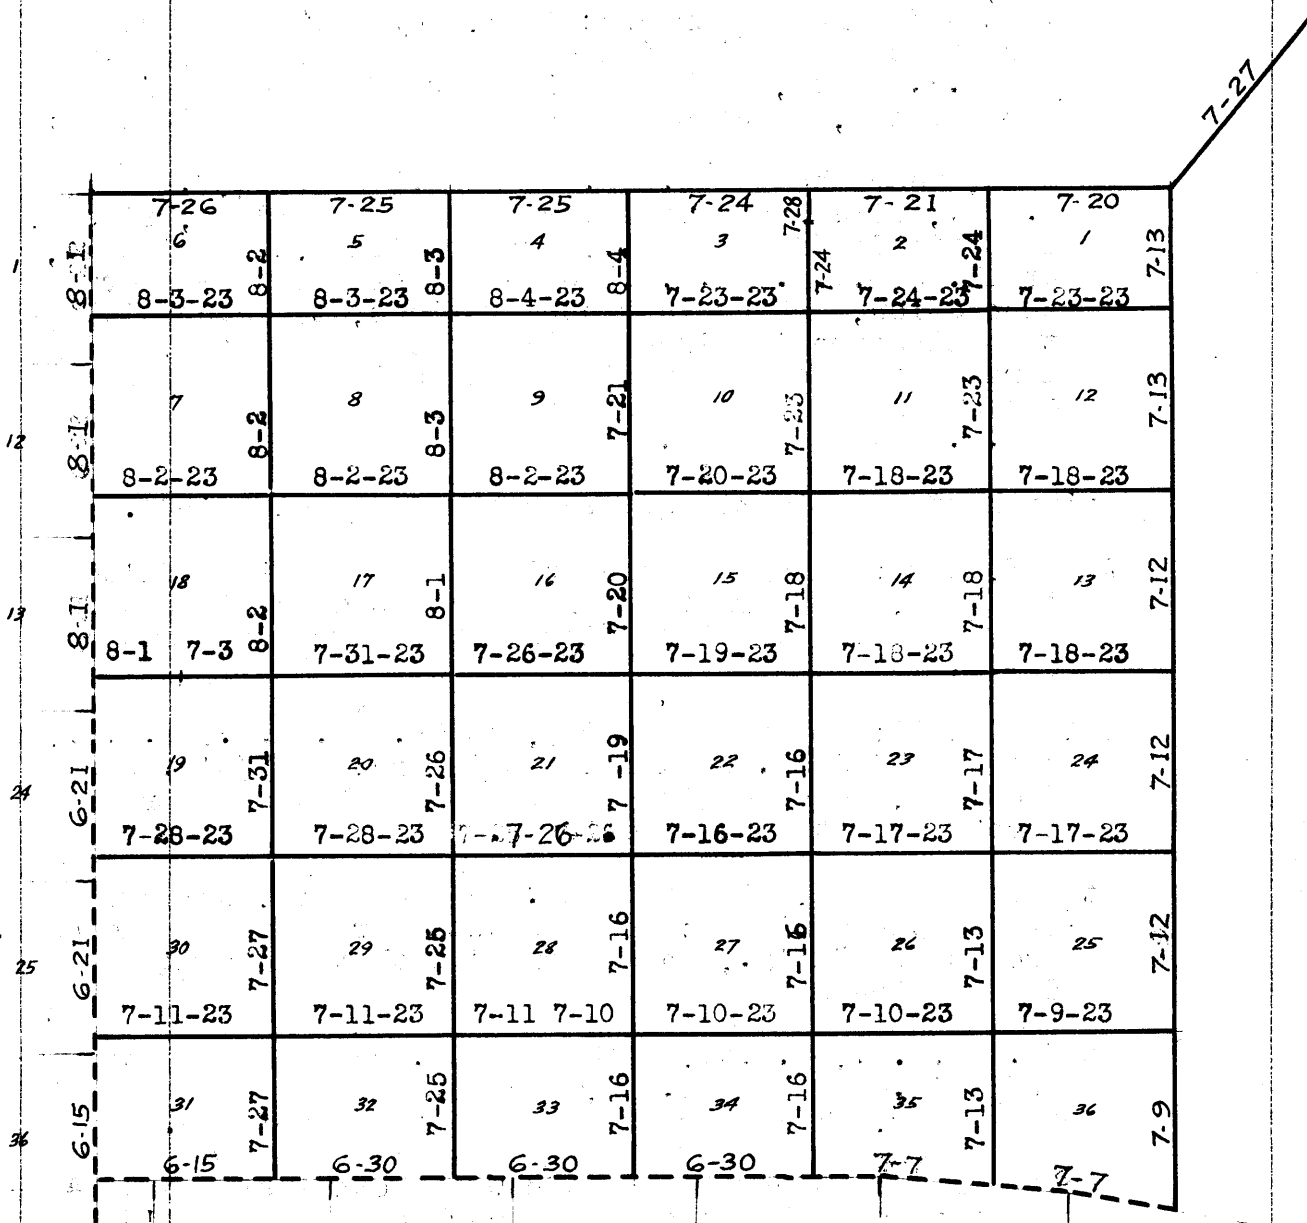

- Indicates lines surveyed by Benjamin J. Kinsey, U.S.T. on dates shown thereon.
- - - - - Indicates lines resurveyed by Benjamin J. Kinsey, U.S.T. on dates shown thereon.
- Indicates lines surveyed by Ty White, U.S.T., on dates shown thereon.
- - - - - Indicates lines resurveyed by Ty White, U.S.T., on dates shown thereon.

## BOOK 3660

2

The resurveys and surveys hereinafter described were executed on dates shown on diagram on page 1 hereof, by Benjamin J. Kinsey and Ty White, U.S. Transitmen, using respectively Buff Rocky Mountain Favorite solar transit No. 9940, with U-shaped standards,  $4\frac{1}{2}$  in. horizontal circle, 4 in. vertical circle, and improved Smith solar attachment; and Young & Sons transit No. 8540, with full vertical circle and Smith solar attachment. Unless otherwise specified, all azimuth determinations are accomplished with the solar attachments.

July 2, 1923: We examine the adjustment of each instrument and find no errors; then, to test the solar apparatus by comparing its indications during the a.m. and p.m. hours, with a meridian established by Polaris observation, proceed with each instrument as follows:

At camp, near the  $\frac{1}{4}$  sec. cor. of secs. 13 and 24, T. 14 N., R. 2 E., Gila and Salt River Base and Meridian, Arizona, in latitude  $34^{\circ}45'10''$  N., and longitude  $112^{\circ}06'11''$  W., at 1h. 02m. a.m., l.m.t., observe Polaris at eastern elongation, making four observations, two each with the telescope in direct and reversed positions, and marking the mean point in the line thus determined by a tack in a stake driven firmly in the ground about 5 chs. N. of instrument.

Azimuth of Polaris at eastern elongation =  $1^{\circ}20'59''$ .

July 3, 1923: Lay off the azimuth of Polaris  $1^{\circ}21'$  to the west, and mark the meridian thus determined by a tack in a stake driven firmly in the ground about 5 chs. N.

July 8, 1923: At same station, at 9h. 00m. a.m., l.m.t., set off  $34^{\circ}45'$  N. on the latitude arc;  $22^{\circ}33\frac{1}{2}'$  N. on the decl. arc, and determine a meridian with the solar which agrees with the true meridian.

At apparent noon, with the lat. arc unchanged, observe the sun on the meridian; the resultant reading of the decl. arc is  $22^{\circ}32\frac{1}{2}'$  N., which agrees with the computed declination of the sun.

At 3h. 00m. p.m., l.m.t., with the lat. arc unchanged set off  $22^{\circ}31\frac{1}{2}'$  N. on the decl. arc, and determine a meridian with the solar, which agrees with the true meridian.

As all of the observations made with both instruments during the usual hours of solar work come within  $1'30''$  of the true meridian, conclude that the adjustments of the instruments are satisfactory.

All measurements are made with Lufkin steel tapes, 5 chs. in length, compared with a Chesterman standard steel tape, and found correct. The measurements are made on the slope, the vertical angles determined with clinometer, and the slope measurements properly reduced to true horizontal distances.

Chains.

The east four miles of the S. bdy. of T.14 N., R.2 E. were surveyed in 1877 by C.B. Foster, U.S.D.S. in connection with the subdivision of the East four ranges of secs. in T.13 N., R.2 E., and the cor. monuments on said Tp. bdy. were established with a common reference to areas on both sides of the lines.

In 1917, G.F. Rigby, U.S.S., resurveyed the line between secs. 4 and 33, reestablishing the  $\frac{1}{4}$  sec. cor., and the cor. of secs. 4, 5, 32 and 33, with original reference, and surveyed the remainder of the township bdy. W. from said sec. cor., establishing cors. thereon with reference to areas in T.14 N., R.2 E. only.

No other resurvey and no retracement of the line is of record.

As the subdivision lines and E. bdy. of T.14 N., R.2 E. have never been surveyed, the position of all cor. monuments on the line which refer to said township only, is subject to change, but in view of the fact that the East four ranges of sections in T.13 N., R.2 E. are embraced within accepted surveys, the position of the existing cor. monuments on the N. bdy. thereof, and their reference to areas in T.13 N., R.2 E. must be preserved, though their reference to T.14 N., R.2 E. may be destroyed if necessary.

The completion of survey of T.13 N., R.2 E., as described in Book "A" of this group, created a fractional township designated as T.13 N., R.1 $\frac{1}{2}$  E., between the original and new positions of the W. bdy. of T.13 N., R.2 E.; therefore, the S. bdy. of T.14 N., R.2 E. is now identical in position with the N. bdy. of frac. T.13 N., R.1 $\frac{1}{2}$  E., and part of T.13 N., R.2 E.

The establishment of the cors. on the line referring to areas in frac. T.13 N., R.1 $\frac{1}{2}$  E. is described in Book "B" of this group as "survey of North bdy. of frac. T.13 N., R.1 $\frac{1}{2}$  E."

The establishment of cors. on the line referring to secs. 5 and 6, T.13 N., R.2 E. is described in Book "A" of this group as "Survey of part of N. bdy. of T.13 N., R.2 E." and the reconstruction and reestablishment of cors. referring to areas in sec. 2, 3, and 4 of said Tp. is described in same book as "Resurvey of Part of the N. bdy. of T.13 N., R.2 E."

The following notes describe the resurvey of the S. bdy. of T.14 N., R.2 E., reestablishing cors. referring to areas in said township only at intervals of 40.00 chs. in easting, counting from the SW. cor. thereof.

From original closing cor. of frac. T.13 N., R.1 $\frac{1}{2}$  E., and reestablished closing cor. of T.14 N., R.2 E., described in Book "B" of this group,

East, on true line, on S. bdy. of sec. 31. Over rolling land, thru. very scattering timber and dense undergrowth. Asc. gradually over SW. slope.

1.41 Wire fence, brs. N. and S.

3.15 Intersect W. side line (3-4) of "Bonnybel" patented lode mining claim, Mineral Survey No. 2541 at a point 8.09 chs, N. 04° 00' W. from cor. No. 4 thereof. Thence across said claim.

3.30 Foot of steep slope, brs. NW. and SE. Enter mountainous land.

8.88 Ascend 83 ft., over steep SW. slope. Spur, slopes S.

From this point, U.S.L.M. No. 2541, Agua Fria Mining District brs. S. 0.38 chs. dist., which is a quartz stone, 12x12x24 ins., marked "USLM 2541" on S. face, and firmly set in a mound of stone, 5 ft. base, 4 ft. high.

12:26 Descend 113 ft., over E. slope.

Intersect E. side line (1-2) of "Bonnybel" patented lode mining claim, Mineral Survey No. 2541 at a point 1.43

## BOOK 3660

4 Resurvey of South bdy. of Township 14 North, Range 2 East.

- Chains
- chs. N. 4°00' W. from cor. No. 5 of "Texas" patented lode claim, which is on said E. side line of the "Bonnybel" claim. Leave patented mining claims.
- 13.01 Intersect NW. side line (4-5) of the "Texas" patented lode mining claim, Mineral Survey No. 2541, at a point 1.57 chs. N. 24°31' E. from cor. No. 5 thereof, Thence across patented mining claims.
- 17.11 Leave mountainous, and enter nearly level land.
- 20.91 Road, brs. NE. and SW.
- 24.11 Foot of slope, brs. NE. and SW. Enter rolling land. Ascend 50 ft., over W. slope.
- 25.41 Intersect the closing cor. of sec. 1, and frac. sec. 2, Frac. T. 13 N., R. 1½ E., described in Book "B" of this group.
- 30.21 Point of spur, slopes NW. Descend 20 ft., over NE. slope.
- 31.80 Wash, 10 lks. wide, course NW. Enter mountainous land. Ascend 65 ft., over SW. slope, to ¼ sec. cor.
- 36.31 Intersect E. side line (3-4) of "Minnehaha" patented lode mining claim, Mineral Survey No. 2541, at a point 8.14 chs. N. 23°45' E. from cor. No. 4 thereof. Leave patented mining claims.
- 40.00 Reset an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished ¼ sec. cor. of sec. 31 only, with brass cap, marked

S 31

1917-23

- No bearing tree available. Raise a mound of stone 3 ft. base, 2 ft. high, N. of cor. The above described iron post was removed from a point 110.20 chs. E. herefrom, where it was set by G. F. Rigby, U.S.S. in 1917.
- Ascend 85 ft., over S. slope, to
- 61.71 Wash, 10 lks. wide, course S. 80° W. Enter rolling land. Ascend 124 ft., over W. slope.
- 65.27 Intersect the ¼ sec. cor. of sec. 1, frac. T. 13 N., R. 1½ E., described in Book "B" of this group.
- 74.30 Low ridge, brs. NE. and S.
- Descend 20 ft., over SE. slope, to
- 80.00 Reset an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for reestablished cor. of secs. 31 and 32, only, with marking on the brass cap, changed to read:

T14N | R2 E

S31 | S32

S 1

T13N | R1½ E

1917-23

- No bearing trees available.
- Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor. The above described iron post was removed from a point 110.11 chs. E. herefrom, where it was set by G. F. Rigby, U.S.S. in 1917.
- Land, rolling, mountainous and nearly level.
- Soil, rocky, 3rd and 4th rate.
- Timber, oak and mesquite.
- Undergrowth, catclaw and cactus.

- East, on a true line, on S. bdy. of sec. 32.
- Over rolling land, thru. very scattering timber and dense undergrowth.
- Descend 4 ft., over SE. slope, to
- 1.44 Leave rolling, and enter nearly level land.
- Descend slightly over SE. slope to ¼ sec. cor.
- 24.70 Road, brs. NE. and SW.
- 25.12 Intersect the closing cor. of frac. T. 13 N., R. 1½ E., and T. 13 N., R. 2 E., described in Book "B" of this group.
- 36.90 Road, Camp Verde to Dewey, brs. NW. and SE.
- 40.00 Reset an iron post, 3 ft. long, 1 in. in diam., 26 ins. in

Resurvey of South boundary of Township 14 North, Range 2 East. 5

Chains.

the ground, for reestablished  $\frac{1}{4}$  sec. cor. of sec. 32 only, with brass cap, marked

1/4 S 32

1917-23

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

The above described iron post was removed from a point 110.13 chs. E. herefrom, where it was set by G. F. Rigby, U.S.S. in 1917.

Continue over nearly level land, thru. very scattering timber and dense undergrowth.

Descend over very gradual SE. slope.

65.17 Intersect the  $\frac{1}{4}$  sec. cor. of sec. 6, T. 13 N., R. 2 E., described in Book "A" of this group.

74.92 Wash, 15 lks. wide, course E.

Ascend slightly over W. slope, to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for reestablished cor. of secs. 32 and 33 only, with brass cap, marked

T14N R2 E  
S32 S33

S 6

T13N R 2E  
1923

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Land, rolling.

Soil, rocky, 4th rate.

Timber, oak, juniper and mesquite.

Undergrowth, scrub oak and catclaw.

East, on true line, on S. bdy. of sec. 33.

Over nearly level land, thru. very scattering timber and dense undergrowth.

Ascend slightly over W. slope, to

8.22 Enter gently rolling land.

Ascend 37 ft., over W. slope.

21.22 Low ridge, brs. NW. and SE.

Descend 66 ft., over NE. and E. slopes.

25.22 Intersect the closing cor. of secs. 5 and 6, T. 13 N., R. 2 E., described in Book "A" of this group.

34.82 Wash, 50 lks. wide, course SE.

Descend slightly over SE. slope.

35.02 Road, brs. NW. and SE.

36.82 Wash, 25 lks. wide, course SE.

Ascend 12 ft., over SW. slope, to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished  $\frac{1}{4}$  sec. cor. of sec. 33 only, with brass cap, marked

1/4 S 33

1923

No bearing trees available.

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Continue over gently rolling land.

Ascend 80 ft., over SW. slope.

65.02 Descend 43 ft., over SE. slope.

65.22 Intersect the  $\frac{1}{4}$  sec. cor. of sec. 5, T. 13 N., R. 2 E., described in Book "A" of this group.

76.77 Wash, 20 lks. wide, course SE. Enter rolling land.

Ascend 22 ft., over SW. slope, to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for reestablished cor. of secs. 33 and 34, only, with brass cap, marked

## BOOK 3660

6 Resurvey of South bdy. of Township 14 North, Range 2 East.

Chains.

T14N R2E  
S33 S34S 5  
T13N R2E  
1923

No bearing trees available. Raise a mound of stone 3 ft. base, 2 ft. high, N. of cor.  
Land, nearly level, gently rolling and rolling.  
Soil, rocky, 3rd rate.  
Timber, juniper and mesquite.  
Undergrowth, scrub oak, catclaw and cactus.

East, on true line, on S. bdy. of sec. 34.  
Over rolling land, thru. very scattering timber and dense undergrowth.

- Ascend 200 ft. over SW. slope to  $\frac{1}{4}$  sec. cor.  
30.05 Intersect the cor. of secs. 4 and 5, T.13 N., R.2 E., described in Book "A" of this group.  
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished  $\frac{1}{4}$  sec. cor. of sec. 34 only, with brass cap, marked

 $\frac{1}{4}$ S 34

1923

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

- Ascend 20 ft., over SW. slope.  
42.35 Spur, slopes S. Enter mountainous land.  
Descend 143 ft., over steep SE. slope, to  
49.95 Foot of steep slope. Enter rolling land.  
Descend 141 ft., over NE. slope.  
57.95 Wagon trail, brs. NE. and SW.  
69.99 Intersect the  $\frac{1}{4}$  sec. cor. of sec. 4, T.13 N., R.2 E., described in Book "A" of this group.  
74.60 Wash, 20 lks. wide, course NE.  
Ascend 48 ft., over NW. slope.  
78.85 Point of spur, slopes NE.  
Descend 11 ft., over NE. slope, to  
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for reestablished cor. of secs. 34 and 35 only, with brass cap, marked

T14N R2 E  
S34 S35S 4  
T13N R2E  
1923

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.  
Land, rolling and mountainous.  
Soil, rocky, 3rd rate.  
Timber, juniper.  
Undergrowth, scrub oak, buck brush, catclaw and cactus.

East, on true line, on S. bdy. of sec. 35.  
Over rolling land, thru. very scattering timber and dense undergrowth.

- Descend 94 ft., over NE. slope to Ash Creek.  
0.05 A point 2 lks. S. of cor. No. 3 (SW. cor.) of Forest Homestead No. 543, which is a granite stone 18x10x8 ins. above ground, firmly set and marked "HE 3" on S. face and "CC" on N. face. Thence along S. bdy. of said homestead.  
4.50 Road, Dewey to Camp Verde, brs. NW, and SE.



BOOK 3660

## Resurvey of South bdy. of Township 14 North, Range 2 East. 7

- Chains.
- 5.60 Wire fence, brs.N.10°W. and S.10°E. Enter cultivated field.
- 7.40 Barn brs.S., 40 lks.dist.
- 8.89 Wire fence, brs.NW. and SE.
- 9.19 Fence brs.N.and S. Leave cultivated field.
- 9.30 House of Joe Scisorilla, brs.S. 1 ch.dist.
- 10.60 Ash Creek, 50 lks.wide, course SE. containing a stream of water 4 lks.wide, 2 ins.deep. Thence over gently rolling land.
- Ascend 45 ft., over SW. slope.
- 11.60 Enter cultivated field, brs.NW. and SE.
- 18.05 Leave cultivated field, brs.NW. and SE.
- 20.19 Intersect cor.No.1 (SE.cor.) of Forest Homestead No.543, which is a granite stone 2x12x12 ins. above ground, firmly set and marked "CC" on E.face and "H543" on N. face. This NE.cor. is under a wire fence, bearing N.and S. Leave S. bdy.of HES No. 543.
- 29.93 Intersect the cor.of secs. 3 and 4, T.13 N.,R.2 E., described in Book "A" of this group.
- Thence,  
S.86°1'E., on true line, continuing measurement of S.bdy. of sec.35.
- 31.13 Spur, slopes S. Enter mountainous land.
- Descend 66 ft., over E.slope.
- 33.43 Wash, 10 lks.wide, course S.
- Ascend 89 ft., over W. slope.
- 39.83 Spur, slopes S. Enter rolling land.
- Descend slightly over E.slope, to
- 40.02 (40.00 chs. in easting from cor.of secs.34 and 35) Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in the ground, for reestablished  $\frac{1}{4}$  sec.cor. of sec. 35 only, with brass cap, marked
- TS 35
- 1923
- No bearing trees available. Raise a mound of stone 3 ft.base, 2 ft.high, N.of cor.
- Descend 47 ft., over E.slope.
- 48.43 Wash, 10 lks.wide, course S.
- Ascend 54 ft., over W.slope.
- 65.93 Point of spur, slopes S.
- Descend 41 ft., over SE.slope.
- 69.53 Wash, 30 lks.wide, course SW.
- Ascend 60 ft., over NW. and W.slopes.
- 72.88 Intersect the reestablished  $\frac{1}{4}$  sec.cor.of sec.3, T.13 N., R.2 E., described in Book "A" of this group.
- 79.03 Point of spur, slopes SW.
- Ascend slightly over S.slope, to
- 80.12 (80.00 chs. in easting from cor.of secs.34 and 35). Set an iron post, 3 ft.long, 2 ins.in diam., 20 ins.in the ground to bed rock, deposit a stone, marked with a cross (x) at base of post, and raise a mound of stone, around post for reestablished cor.of secs. 35 and 36 only, with brass cap, marked

T14N	R2 E
S35	S36

S 3  
T13N R2E  
1923

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft.high, N.of cor.

Land, rolling, gently rolling and mountainous.

Soil, sandy 2nd rate in a strip about 10 chs.wide E.of Ash Creek; elsewhere, rocky, 4th rate.

Timber, thick ash and cottonwood along Ash Creek; elsewhere very scattering juniper.

Undergrowth, scrub oak, buck brush, catclaw and cactus.

-----

# BOOK 3660

8 Resurvey of South bdy. of Township 14 North, Range 2 East.

Chains.

- S. 86° 1' E., on true line, on S. bdy. of sec. 36.  
Over rolling land, thru. very scattering timber and dense undergrowth.
- 22.81 Ascend 32 ft., over S. slope.
- 28.81 Ascend 74 ft., over SW. slope.
- Spur, slopes S.
- 35.71 Descend 54 ft., over E. slope to  $\frac{1}{4}$  sec. cor.  
Intersect the cor. of secs. 2 and 3, T. 13 N., R. 2 E., described in Book "A" of this group.
- Thence,  
S. 88° 16' E., on true line, continuing measurement of S. bdy. of sec. 36.
- 40.09 (40.00 chs. in easting from cor. of secs. 35 and 36) Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in ground for reestablished  $\frac{1}{4}$  sec. cor. of sec. 36 only, with brass cap, marked

$\frac{1}{4}$ S 36  
-----  
1923

- No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
- 47.81 Descend 40 ft., over E. slope.  
Wash, 10 lks. wide, course S.
- 65.01 Ascend 80 ft., over W. slope.  
Spur, slopes S.
- 76.34 Descend 138 ft., over SE. slope.  
Intersect the reestablished  $\frac{1}{4}$  sec. cor. of sec. 2, T. 13 N., R. 2 E., described in Book "A" of this group.
- 78.39 Road, Dewey to Camp-Verde, brs. NE. and SW.
- 79.01 Little Hackberry Wash, 70 lks. wide, course S. from NE.
- 80.11 Ascend 6 ft., over W. slope, to  
(80.00 chs. in easting from cor. of secs. 35 and 36) Set an iron post, 3 ft. long, 3 ins. in diam., 26 ins. in the ground, for reestablished cor. of Ts. 14 N., Rs. 2 and 3 E., only, with brass cap, marked

T14N  
R2 E | R3 E  
S36 | S31  
-----  
S 2  
T13N R2 E  
1923

Land, rolling.  
Soil, rocky, 4th rate.  
Timber, juniper.  
Undergrowth, scrub oak, buck brush, catclaw and cactus.

Resurvey of East boundary of Township 14 North, Range 1 East. 9  
Chains.

The East bdy. of T.14 N., R.1 E., was surveyed in 1871 by S.W. Foreman, U.S.D.S., establishing all cor. monuments thereon with a common reference to areas on both sides of the line.

In 1917, G.F. Rigby, U.S.S. surveyed the completion of the S. bdy. of T.14 N., R.2 E., established closing cor. of Ts. 13 and 14 N., R. 2 E. on the range line at 19.86 chs. N. of the original cor. of Ts. 13 and 14 N., Rs. 1 and 2 E., and reconstructed said township cor., changing its reference to Ts. 13 and 14 N., R.1 E. only.

No retracement or resurvey of the East bdy. of T.14 N., R. 1 E., is of record.

Preliminary to the survey of the West bdy. of frac. T.13 N., R.1 1/2 E., executed under this group, the East bdrs. of Ts. 13 and 14 N., R.1 E., were retraced as described in Book "B."

In said retracement no trace of any sec. cor. or 1/4 sec. cor. monument on the E. bdy. of T.14 N., R.1 E., could be found.

The true bearing and length of said Tp. bdy., as determined by the retracement was N. 0° 47' E., 474.84 chs., giving 12 intervals of 39.57 chs. each, for the reestablishment of the missing cor. monuments.

The following notes describe a resurvey of the E. bdy. of T.14 N., R.1 E., reestablishing the 1/4 sec. and sec. cor. monuments referring to areas in said township only, at the proportional intervals of 39.57 chs., reestablishing a 1/4 sec. cor. referring to sec. 31, T.14 N., R.2 E. at a point on the range line theoretically due W. of the 1/4 sec. cor. of secs. 31 and 36, on the E. bdy. of said township, and then reestablishing the sec. and 1/4 sec. cors. referring to areas in T.14 N., R.2 E. only; alternately at intervals of 40.00 chs. in northing, beginning at the reestablished 1/4 sec. cor. of sec. 31 of said township, and placing the deficiency in measurement in the N. 1/2 of W. bdy. of sec. 6.

- From cor. of Ts. 13 and 14 N., R.1 E., described in Book "B," of this group,
- N. 0° 47' E., on true line, on E. bdy. of sec. 36.
- Over rolling land, thru. dense undergrowth, nearly parallel to wire fences, about 140 lks. E. of line.
- Descend 55 ft., over N. slope.
- 11.00 Center of wash, 360 lks. wide, course W.
- Ascend 72 ft., over SW. slope, to
- 19.70 Intersect the closing cor. of frac. T.13 N., R.1 1/2 E., and T. 14 N., R.2 E., described in Book "B" of this group.
- Continue line and measurement.
- Ascend 24 ft., over SW. and W. slopes.
- 30.82 Wash, 10 lks. wide, course SW. Asc. 30 ft. over SE. slope, to
- 39.57 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished 1/4 sec. cor. of sec. 36 only, with brass cap, marked

1/4 S 36  
1023

- No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
- Continue nearly parallel to wire fence, about 110 lks. E. of line. Asc. 37 ft., over SE. slope, to
- 52.40 (Theoretically due W. of the 1/4 sec. cor. of secs. 31 and 36 on the E. bdy. of T.14 N., R.2 E.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 31 only, with brass cap, marked

1/4 S 31

1923

- No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor.
- Ascend 40 ft., over SE. slope.

# BOOK 3660

10 Resurvey of East bdy. of Township 14 North, Range 1 East.

Chains.									
61.30	Spur, slopes SW. Desc. 43 ft., over NW. slope.								
68.36	Wash, 30 lks. wide, course SW. Enter mountainous land. Ascend 52 ft., over SW. slope.								
71.78	Wire fence, brs. E. and W. Fence cor. brs. E. 1.02 chs. dist., from which fences extend NE. and S.								
71.86	Ascend 16 ft., over W. slope, to								
79.14	(Proportional dist.) Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for reestablished cor. of secs. 25 and 36 only, with brass cap, marked								
	<table border="1"> <tr><td>T14N</td><td>T14N</td></tr> <tr><td>R1E</td><td>R2E</td></tr> <tr><td>S25</td><td>S31</td></tr> <tr><td>S36</td><td></td></tr> </table> <p>1923</p>	T14N	T14N	R1E	R2E	S25	S31	S36	
T14N	T14N								
R1E	R2E								
S25	S31								
S36									
	No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Land, rolling and mountainous. Soil, rocky; 3rd rate. Timber, none. Undergrowth, scrub oak, catclaw and cactus.								
	-----								
	N. 0° 47' E., on true line, on E. hdy. of sec. 25. Over mountainous land, thru dense undergrowth. Ascend 18 ft., over W. slope.								
6.42	Power transmission line, brs. N. 10° E. and S. 10° W.								
7.74	Descend 32 ft., over NW. slope.								
11.72	Telephone line, brs. N. 10° E. and S. 10° W.								
13.26	(40.00 chs. in northing from $\frac{1}{4}$ sec. cor. of sec. 31), Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground for reestablished cor. of secs. 30 and 31 only, with brass cap, marked								
	<table border="1"> <tr><td>T14N</td><td>T14N</td></tr> <tr><td>R1E</td><td>R2E</td></tr> <tr><td>S25</td><td>S30</td></tr> <tr><td></td><td>S31</td></tr> </table> <p>1923</p>	T14N	T14N	R1E	R2E	S25	S30		S31
T14N	T14N								
R1E	R2E								
S25	S30								
	S31								
	No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor. Continue line and measurement.								
14.50	Wash, 20 lks. wide, course SW. Ascend 105 ft., over SE. slope.								
26.26	Spur, slopes SW. Desc. 82 ft., over NW. slope, to								
39.57	(Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. of sec. 25 only, with brass cap, marked								
	<table border="1"> <tr><td><math>\frac{1}{4}</math>S</td><td>25</td></tr> </table> <p>1923</p>	$\frac{1}{4}$ S	25						
$\frac{1}{4}$ S	25								
	No bearing trees available. Raise a mound of stone 3 ft. base, 2 ft. high, W. of cor. Descend 32 ft., over NW. slope.								
45.26	Wash, 25 lks. wide, course SW. Asc. 39 ft., over SE. slope, to								
53.26	(40.00 chs. in northing from cor. of secs. 30 and 31) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. of sec. 30 only, with brass cap, marked								
	<table border="1"> <tr><td><math>\frac{1}{4}</math>S</td><td>30</td></tr> </table> <p>1923</p>	$\frac{1}{4}$ S	30						
$\frac{1}{4}$ S	30								
	No trees available. Raise a mound of stone 3 ft. base, 2 ft. high, E. of cor. Asc. 114 ft., over SE. slope.								
74.16	Spur, slopes SW. Asc. gradually over W. slope, to								
79.14	(Proportional dist.) Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground for reestablished cor. of secs. 24 and 25 only, with brass cap, marked								

BOOK 3660

## Resurvey of East boundary of Township 14 North, Range 1 East. 11

Chains.

T14N	T14N
R1E	R2E
S24	S30
S25	
1923	

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
Land, mountainous.  
Soil, rocky, 4th rate.  
Timber, none.  
Undergrowth, scrub oak, catclaw and cactus.

- N.0° 47'E., on a true line, on E. bdy. of sec. 24.  
Over mountainous land, thru. dense undergrowth.  
Descend 85 ft., over NW. slope.
- 6.12 Wash, 10 lks. wide, course SW.  
Ascend 41 ft., over S. slope, to
- 14.12 (80.00 chs. in northing from cor. of secs. 30 and 31) Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground for reestablished cor. of secs. 19 and 30, only, with brass cap, marked

T14N	T14N
R1E	R2E
S24	S30
	S19
1923	

- No bearing trees available. Raise a mound of stone 3 ft. base, 2 ft. high, E. of cor.  
Continue line and measurement of E. bdy. of sec. 24.  
Ascend 90 ft. over S. slope.
- 23.42 Spur, slopes W.  
Descend 69 ft., over N. slope.
- 28.20 Wash, 10 lks. wide, course W.  
Ascend 60 ft., over S. slope.
- 33.02 Spur, slopes W.  
Descend 74 ft., over N. slope.
- 39.02 Wash, 10 lks. wide, course SW.  
Ascend 31 ft., over S. slope to  $\frac{1}{4}$  sec. cor.
- 39.32 Old road, brs. E. and W.
- 39.57 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished  $\frac{1}{4}$  sec. cor. of sec. 24 only, with brass cap, marked

$\frac{1}{4}$ S24
1923

- No bearing trees available.  
Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
Ascend 20 ft., over S. slope.
- 43.92 Spur, slopes W.  
Descend 23 ft., over N. slope.
- 47.12 Wash, 10 lks. wide, course SW.  
Ascend 15 ft., over SE. slope.
- 52.60 Spur, slopes SW.  
Descend 12 ft. over NW. slope, to
- 54.12 (40.00 chs. in northing from cor. of secs. 19 and 30) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished  $\frac{1}{4}$  sec. cor. of sec. 19 only, with brass cap, marked

$\frac{1}{4}$ S19
-------------------

1923

No bearing trees available.

## BOOK 3660

12 s. Resurvey of East bdy of Township 14 North, Range 1 East.  
Chains.

- 57.25 Raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor.  
Descend 14 ft., over NW. slope.  
Wash, 20 lks. wide, course SW.  
62.82 Ascend 67 ft., over S. slope.  
Old road, brs. NE and SW.  
69.15 Spur, slopes SW.  
Descend 83 ft., over NW. slope, to  
79.14 (Proportional dist.) Set an iron post, 3 ft. long, 2 ins.  
in diam., 26 ins. in the ground for reestablished cor.  
of secs. 13 and 24 only, with brass cap, marked

T14N	T14N
R1E	R2E
<u>S13</u>	
S24	S19
1923	

No bearing trees available. Raise a mound of stone, 3 ft.  
base, 2 ft. high, W. of cor.  
Land, mountainous.  
Soil, rocky, 3rd rate.  
Timber, none  
Undergrowth, scrub oak and catclaw.

- 2.78 N. 0° 47' E., on true line, on E. bdy. of sec. 13.  
Over mountainous land, thru. scattering undergrowth.  
Descend 17 ft., over NW. slope.  
Wash, 60 lks. wide, course SW.  
Ascend 112 ft., over SE. slope, to  
14.98 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in  
the ground for reestablished cor. of secs. 18 and 19  
only, with brass cap, marked

T14N	T14N
R1E	R2E
<u>S13</u>	<u>S18</u>
S19	S19
1923	

- No bearing trees available. Raise a mound of stone, 3 ft.  
base, 2 ft. high, E. of cor. Continue line and measure-  
ment of E. bdy. of sec. 13.  
Ascend 18 ft. over SE. slope.  
16.38 Spur, slopes SW.  
Descend 34 ft., over NW. slope.  
24.55 Wash, 10 lks. wide, course SW.  
Ascend 28 ft., over SE. slope.  
27.33 Spur, slopes SW.  
Descend 12 ft., over NW. slope.  
33.80 Wash, 5 lks. wide, course W.  
Ascend 19 ft., over S. slope.  
37.38 Spur, slopes SW.  
Descend 17 ft., over NW. slope, to  
39.57 (Proportional dist.) Set an iron post, 3 ft. long, 1 in.  
in diam., 26 ins. in the ground, for reestablished  $\frac{1}{2}$   
sec. cor. of sec. 13 only, with brass cap, marked

<u>S13</u>
------------

1923

- No bearing trees available.  
Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
Ascend 25 ft., over SW. slope.  
45.68 Point of spur, slopes W.  
Descend 57 ft., over NW. slope.  
51.88 Wash, 50 lks. wide, course SW.  
Ascend 47 ft., over SW. slope, to

Chains.

54.98 (40.00 chs. in northing from cor. of secs. 18 and 19) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor. of sec. 18 only, with brass cap, marked

1/4 S 18

1923

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor.

Thence over gently rolling land.

Ascend gradually over SW. and W. slopes to sec. cor.

66.08 Road, brs. NE. and SW.

77.29 Enter dense undergrowth, brs. E. and W.

79.14 (Proportional dist.) Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for reestablished cor. of secs. 12 and 13 only, with brass cap, marked

T14N | T14N

R1E | R2E

S12 | S18

S13 |

1923

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, mountainous and gently rolling.

Soil, rocky, 3rd rate.

Timber, none.

Undergrowth, scrub oak, catclaw and cactus.

N. 0° 47' E., on true line, on E. bdy. of sec. 12.

Over gently rolling land, thru dense undergrowth.

Ascend gradually over W. slope.

3.04 Leave dense, and enter scattering undergrowth, brs. E. and W.

15.84 (80.00 chs. in northing from cor. of secs. 18 and 19) Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground for reestablished cor. of secs. 7 and 18, only, with brass cap, marked

T14N | T14N

R1E | R2E

S12 | S 7

S18 |

1923

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor.

Continue over gently rolling land.

Ascend slightly over W. slope.

36.74 Descend 20 ft., over NW. slope, to

38.78 Foot of descent brs. E. and W. Thence across level land.

39.57 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 12 only, with brass cap, marked

1/4 S 12

1923

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Continue over level land.

48.15 Leave level, and enter gently rolling land.

Ascend 60 ft., over SW. slope, to

55.84 (40.00 chs. in northing from cor. of secs. 7 and 18) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished 1/4 sec. cor. of sec. 7 only, with

# BOOK 3660

## 14 Resurvey of East bdy. of Township 14 North, Range 1 East.

Chains.

brass cap, marked

1/4 S 7

1923

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor.

Continue line and measurement over gently rolling land.

Ascend gradually over W. slope, to

61.54 Wash, 10 lks. wide, course SW.

Ascend gradually over SW. slope, to

79.14 (Proportional dist.) Set an iron post 3 ft. long, 2 ins. in diam. 26 ins. in the ground for reestablished cor. of secs. 1 and 12, only, with brass cap, marked

T14N	T14N
R1E	
S 1	R2E
S12	S 7

1923

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, gently rolling and level.

Soil, rocky, 3rd rate. Timber, none.

Undergrowth, scrub oak, catclaw and cactus.

N.0°47'E., on true line, on E. bdy. of sec. 1.

Over rolling land, thru. scattering undergrowth.

Ascend gradually over W. slope, to

16.70 (80.00 chs. in northing from cor. of secs. 7 and 18) Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for reestablished cor. of secs. 6 and 7 only, with brass cap, marked

T14N	T14N
R1E	R2E
S 1	S 6
	S 7

1923

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor.

Descend 74 ft., over NW. slope.

29.60 Wash, 20 lks. wide, course SW.

Ascend 36 ft., over SE. slope

33.10 Spur, slopes SW.

Descend 25 ft., over NW. slope.

38.80 Wash, 15 lks. wide, course SW.

Ascend 29 ft., over SW. slope, to

39.57 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 1, only, with brass cap, marked

1/4 S 1

1923

No bearing trees available

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Ascend 36 ft., over SW. slope, to

44.17 Ascend gradually over W. slope, to

56.70 (40.00 chs. in northing from cor. of secs. 6 and 7) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 6 only, with brass cap, marked

1/4 S 6

1923



BOOK 3660

Resurvey of East bdy. of Township 14 North, Range 1 East.

15

Chains.

No bearing trees available. Raise a mound of stone 3 ft. base, 2 ft. high, E. of cor.

66.60 Ascend 46 ft., over W. slope, to Wash, 10 lks. wide, course SW. near head.

73.65 Ascend 39 ft., over SW. slope. Spur, slopes W. from SE.

79.14 Descend 32 ft., over N. slope, to (22.43 chs. N.  $0^{\circ}47'E$ . from  $\frac{1}{4}$  sec. cor. of sec. 6) Intersect the cor. of Ts. 14 and 15 N., Rs. 1 and 2 E., reconstructed in original position by F.W. Rodolf, U.S.S. in 1911, which is an iron post, 3 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by a mound of stone, S. of cor. No bearing trees. No change in this cor. monument is necessary.

Land, rolling.  
Soil, rocky, 3rd rate.  
Timber, none.  
Undergrowth, scrub oak, catclaw and cactus.

---

## BOOK 3660

16

Survey of East boundary of Township 14 North, Range 2 East.

Chains.

- From the reestablished cor. of Ts. 14 N. Rs. 2 and 3 E., on N. bdy. of sec. 2, T. 13 N., R. 2 E. hereinbefore described, North, on true line, bet. secs. 31 and 36.  
Over rolling land, thru. dense undergrowth.  
Ascend slightly over SW. slope, to
- 1.10 Little Hackberry Wash, 50 lks. wide, course SW.  
Road from Dewey to Camp Verde, brs. NE. and SW.  
Ascend 89 ft., over SE. slope, to
- 39.50 Little Hackberry Wash, 25 lks. wide, course SE. Enter mountainous land.  
Ascend 6 ft., over S. slope, to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of secs. 31 and 36, with brass cap, marked

$$\frac{1}{4}$$

S36	S31
-----	-----

1923

- No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
Ascend 122 ft., over S. slope.
- 50.80 Spur, slopes SE.  
Descend 20 ft., over NE. slope.
- 55.40 Wash, 10 lks. wide, course SE., near head.  
Ascend 267 ft., over steep SE. slope.
- 64.50 Spur, slopes S. 10° W.  
Ascend 112 ft., over W. and SW. slopes, to
- 72.30 Same spur, slopes SE.  
Descend 62 ft., over NE. slope, to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 16 ins. in the ground to bed rock, supported in a mound of stone, for the cor. of secs. 25, 30, 31 and 36, with brass cap, marked

PLAN	
R2E	R3E
S25	S30
S36	S31

1923

No bearing trees available. Raise a mound of stone 3 ft. base, 2 ft. high, W. of cor.  
Land, rolling and mountainous.  
Soil, rocky, 4th rate.  
Timber, none.  
Undergrowth, scrub oak, catclaw and cactus.

- North, on true line, bet. secs. 25 and 30.  
Over mountainous land, thru. very scattering timber and dense undergrowth.  
Descend 14 ft., over NE. slope.
- 1.00 Wash, 10 lks. wide, course E.  
Ascend 54 ft., over S. slope.
- 5.00 Spur, slopes E. from NW.  
Descend 32 ft., over NE. slope.
- 12.80 Wash, 10 lks. wide, course E.  
Ascend 315 ft., over SE. slope.
- 36.10 Spur, slopes E.  
Descend 36 ft., over N. slope, to
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec. cor. of secs. 25 and 30, with brass cap, marked

$$\frac{1}{4}$$

S25	S30
-----	-----

1923

BOOK 3660

## Survey of East boundary of Township 14 North, Range 2 East. 17

Chains.

- No bearing trees available.  
 Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
 Descend 34 ft., over NE. slope.  
 47.50 Wash, 15 lks. wide, course SE.  
 Ascend 67 ft., over SE. slope.  
 52.80 Ridge, brs. NE. and SW.  
 Descend 95 ft., over NW. slope.  
 57.70 A lone juniper tree, 36 ins. in diam., brs. W. 60 lks. dist.  
 77.73 Ascend 14 ft., over SW. slope, to  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in  
 the ground, for cor. of secs. 19, 24, 25 and 30, with  
 brass cap, marked

T14N	
R2E	R3E
S24	S19
S25	S30
1923	

from which,

- A juniper, 10 ins. in diam., brs. N. 61° 50' E., 188  
 lks. dist., marked T14N R3E S19 BT.  
 A juniper, 10 ins. in diam., brs. S. 15° E., 135  
 lks. dist., marked T14N R3E S30 BT.  
 A juniper, 10 ins. in diam., brs. S. 52 1/2° W., 238  
 lks. dist., marked T14N R2E S25 BT.

No other bearing tree available. Raise a mound of stone  
 3 ft. base, 2 ft. high, W. of cor.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, juniper.

Undergrowth, scrub oak, catclaw and cactus.

North, on true line, bet. secs. 19 and 24.

Over mountainous land, thru. scattering timber and dense  
 undergrowth.

- Ascend 34 ft., over SW. slope.  
 12.10 Spur, slopes W.  
 Descend 69 ft., over NW. slope.  
 30.50 Wash, 10 lks. wide, course NW.  
 Ascend 22 ft., over SW. slope.  
 33.50 Point of spur, slopes W.  
 Descend 26 ft., over NW. slope.  
 35.60 Wash, 10 lks. wide, course W.  
 Ascend 125 ft., over S. slope, to  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
 the ground for 1/4 sec. cor. of secs. 19 and 24, with  
 brass cap, marked

↑	
S24	S19
1923	

from which,

- A juniper, 6 ins. in diam., brs. N. 23° 40' E., 52  
 lks. dist., marked 1/4 S 19 BT.

No other bearing tree available. Raise a mound of  
 stone, 3 ft. base, 2 ft. high, W. of cor.

- Ascend 29 ft.; over S. slope.  
 42.40 Spur, slopes W.  
 Descend 110 ft., over steep N. slope.  
 48.40 Wash, 20 lks. wide, course SW.  
 Ascend 85 ft., over S. slope.  
 53.80 Spur, slopes W.  
 Descend 72 ft. over N. slope.  
 63.20 Wash, 20 lks. wide, course W., containing a stream of clear  
 water 5 lks. wide, 2 ins. deep.  
 Ascend 148 ft., over SE. slope.  
 76.20 Descend 30 ft., over NE. slope.

## BOOK 3660

## 18 Survey of East boundary of Township 14 North, Range 2 East.

Chains.

- 77.50 Wash, 20 lks. wide, course SE. in head of gulch.  
Ascend 110 ft., over SE. slope, to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 14 ins. in the ground to bed rock, supported in a mound of stone for cor. of secs. 13, 18, 19 and 24, with brass cap, marked

T14N	
R2E	R3E
S13	S18
S24	S19

1923

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
Land, mountainous.  
Soil, rocky, 4th rate.  
Timber, juniper.  
Undergrowth, scrub oak, catclaw and cactus.

- 14.30 North, on true line, bet. secs. 13 and 18.  
Over mountainous land, thru. scattering timber and dense undergrowth.  
Ascend 292 ft., over steep SE. slope.  
Rim of mesa, brs. NE. and SW. Thence over nearly level land on mesa. Leave dense and enter scattering undergrowth, brs. E. and W.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of secs. 13 and 18, with brass cap, marked

$\frac{1}{4}$	
S13	S18

1923

from which,

A juniper, 4 ins. in diam., brs. N.  $57\frac{3}{4}^{\circ}$  E., 99 lks. dist., marked BT.

A juniper, 32 ins. in diam., brs. S.  $45\frac{1}{2}^{\circ}$  W., 78 lks. dist., marked  $\frac{1}{4}$  S 13 BT.

Continue over nearly level land on mesa, thru. scattering timber and undergrowth.

- 55.00 Descend slightly over NW. slope, to  
Rim of mesa, brs. NE. and SW. Leave mesa; enter mountainous land and dense undergrowth.
- 80.00 Descend 539 ft., over precipitous NW. slope, to  
Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground, for cor. of secs. 7, 12, 13 and 18, with brass cap, marked

T14N	
R2E	R3E
S12	S 7
S13	S18

1923

from which,

An oak, 4 ins. in diam., brs. N.  $10\frac{3}{4}^{\circ}$  W., 157 lks. dist., marked BT.

An oak, 14 ins. in diam., brs. N.  $30^{\circ}$  E., 113 lks. dist., marked T14N R3E S7 BT.

A juniper, 14 ins. in diam., brs. S.  $75\frac{1}{4}^{\circ}$  E., 74 lks. dist., marked T14N R3E S18 BT.

An oak, 10 ins. in diam., brs. S.  $10\frac{3}{4}^{\circ}$  W., 157 lks. dist., marked T14N R2E S12 BT.

Land, mountainous.  
Soil, rocky, 4th rate.  
Timber, juniper.  
Undergrowth, scrub oak, catclaw and cactus.

BOOK 3660

Survey of East boundary of Township 14 North, Range 2 East. 19

Chains.

- North, on true line, bet. secs. 7 and 12.
- Over mountainous land, thru. scattering timber and dense undergrowth.
- 4.30 Descend 25 ft., over NW slope, to Left bank of wash, brs. E. and W. Thence across wash, course W.
- 5.50 Right bank of wash; brs. E. and W. Leave wash. Enter rolling land.
- 16.50 Ascend 33 ft., over SW slope. Point of spur, slopes W.
- 17.80 Left bank of Ash Creek, brs. NE. and SW. Thence across dry bed of Ash Creek, course SW.
- 18.50 Right bank of Ash Creek, brs. NE. and SW. Leave Ash Creek; enter mountainous land.
- 33.40 Ascend 206 ft., over SE slope. Descend 30 ft., over NE slope.
- 35.40 Wash, 10 lks. wide, course E. near head.
- 40.00 Ascend 114 ft., over SE slope, to Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of secs. 7 and 12, with brass cap, marked

$\uparrow$   
 S12 | S 7  
 1923

- No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
- 42.00 Ascend 29 ft., over SE slope. Top of ascent on E. side of ridge, the top of which brs. N. and S. at about 10 chs. W. of this point.
- 45.00 Descend 91 ft., over steep NE slope. Rocky wash, 10 lks. wide, course E. near head.
- 52.80 Ascend 134 ft., over steep SE slope. Point of spur, slopes E.
- 63.80 Descend 113 ft., over NE slope. Wash, 5 lks. wide, course E.
- 78.50 Ascend 81 ft., over SE slope. Point of spur, slopes NE.
- 80.00 Descend 44 ft., over N. slope, to Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 1, 6, 7 and 12, with brass cap, marked

T14N  
 R2E | R3E  
 S 1 | S 6  
 S12 | S 7  
 1923

from which,

- A juniper, 10 ins. in diam., brs. N.  $86\frac{1}{2}^\circ$  W., .80 lks. dist., marked T14N R2E S1 BT.
- A juniper, 38 ins. in diam., brs. S.  $62^\circ$  E., .111 lks. dist., marked T14N R3E S7 BT.
- A juniper, 8 ins. in diam., brs. S.  $49\frac{1}{2}^\circ$  W., .93 lks. dist., marked T14N R2E S12 BT.

No other bearing tree available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
 Land, mountainous and rolling.  
 Soil, rocky, 4th rate.  
 Timber, juniper, oak and ash.  
 Undergrowth, scrub oak, catclaw and cactus.

-----

North, on true line, bet. secs. 1 and 6.  
 Over mountainous land, thru. scattering timber and dense undergrowth.  
 Descend 95 ft., over N. slope, to

# BOOK 3660

20 Survey of East boundary of Township 14 North, Range 2 East.

Chains.

- 3.90 Right bank of Ash Creek, brs.NW. and SE. Thence across dry creek bed, course SE.
- 6.20 Left bank of Ash Creek, brs.NW. and SE. Leave creek bed. Ascend 26 ft., over SW.slope, to
- 11.80 Wash, 40 lks.wide, course SW. Ascend 160 ft., over SE. slope.
- 20.00 From this point, the S. end of a ridge bearing N. and S. brs.W. about 3 chs.dist. Thence along E. slope. Ascend 34 ft., to
- 30.20 Descend 56 ft., over NE.slope.
- 35.30 Wash, 10 lks.wide, course N. 10° E. Asc. 82 ft., over SW.slope, to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, supported in a mound of stone, for 1/4 sec.cor.of secs.1 and 6, with brass cap, marked

S 1 S 6

1923

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Ascend 116 ft. over SW.slope.

- 46.50 Point of spur, slopes W. Descend 73 ft., over NW.slope.
- 51.10 Wash, 15 lks.wide, course SW. Ascend 230 ft., over SW.slope, to
- 62.21 Intersect random N. bdy. of T. 14 N., R. 2 E. surveyed due east as hereinafter described: At point of intersection, Set an iron post, 3 ft. long, 3 ins. in diam., 26 ins. in the ground, for NE. cor. of T. 14 N., R. 2 E., with brass cap, marked

T14N  
R2E  
S 1

1923

No bearing trees available: Raise a mound of stone 3 ft. base, 2 ft. high; SW. of cor. From this Tp. cor., the original cor. of Ts. 14 and 15 N., R. 3 E., established by S. E. Blout, U.S.S. in 1917, brs. N. 40° 25' E., 127.77 chs. dist., which is an iron post, 3 ins. in diam., projecting 24 ins. above ground, firmly set in ground and mound of stone, properly marked on brass cap, for reference to said Tps. No accessories.

Land, mountainous.  
Soil, rocky, 4th rate.  
Timber, juniper and oak.  
Undergrowth, scrub oak and catclaw.

Survey of North bdy. of Township 14 North, Range 2 East.

Chains.

From the cor. of Ts. 14 and 15 N., Rs. 1 and 2 E., herein- before described, East, on a random line, and at 473.26 chs. intersect the E. bdy. of T. 14 N., R. 2 E., surveyed due North. At this point, establish the NE. cor. of T. 14 N., R. 2 E., as herein- before described.

Thence, West, on true line, on N. bdy. of sec. 1. Over mountainous land, thru. scattering timber and dense undergrowth.

- 1.10 Descend 17 ft., over SW. slope.
- Head of wash, course S. 10° W.
- Ascend 55 ft., over SE. slope.
- 10.90 Ridge, brs. N. and S.
- Descend 179 ft., over W. slope.
- 19.40 Wash, 10 lks. wide, course S.
- Ascend 85 ft., over E. slope.
- 25.30 Spur, slopes S.
- Descend 83 ft., over W. slope.
- 31.00 Wash, 10 lks. wide, course S. Asc. 31 ft., over E. slope.
- 34.20 Spur, slopes S.
- Descend 30 ft., over SW. slope, to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 1 only, with brass cap, marked

1/4 S 1.  
1923

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.

- 45.00 Descend 50 ft., over SW. slope.
- Leave scattering, and enter dense timber.
- 50.20 Center of Ash Creek, 100 lks. wide, course SE., containing a stream of clear water, 5 lks. wide, 2 ins. deep.
- Ascend 102 ft., over NE. slope.
- 64.10 Point of spur, slopes N.
- Descend 52 ft., over NW. slope.
- 66.50 Wash, 20 lks. wide, course NE.
- Ascend 57 ft., over SE. slope.
- 71.40 Spur, slopes NE.
- Descend 12 ft., over NW. slope.
- 73.20 Wash, 10 lks. wide, course NE.
- Ascend 86 ft., over E. slope, to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 1 and 2 only, with brass cap, marked

S2 | S1  
T14N | R2 E  
1923

from which,

- A jack pine, 8 ins. in diam., brs. S. 15° E., 31 lks. dist., marked T14N R2E S1 BT.
- A jack pine, 6 ins. in diam., brs. S. 54 1/2° W., 19 lks. dist., marked T14N R2E S2 BT.

Land, mountainous.  
Soil, rocky, 4th rate.  
Timber, juniper, oak and jack pine.  
Undergrowth, scrub oak, catclaw and manzanita.

- 18.20 West, on true line, on N. bdy. of sec. 2.
- Over mountainous land, thru. dense timber and undergrowth.
- Ascend 270 ft., over E. slope.
- Spur, slopes S.
- Descend 43 ft., over SW. slope.

## BOOK 3660

22 Survey of North bdy. of Township 14 North, Range 2 East.

Chains.

- 27.30 Saddle, brs. SE and NW.  
Ascend 65 ft., over NE. slope.
- 34.10m Ridge, brs. N. and S.  
Descend 34 ft., over NW. slope, to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 2 only, with brass cap, marked

 $\frac{1}{4}$ S 2

1923

from which,

- A yellow pine, 36 ins. in diam., brs. S. 42° E., 62 lks. dist., marked  $\frac{1}{4}$ S 2 BT.
- A yellow pine, 36 ins. in diam., brs. S. 34° W., 38 lks. dist., marked  $\frac{1}{4}$ S 2 BT.
- Descend 86 ft., over W. slope.
- 46.20 A frame house, brs. N. about 2.50 chs. dist.
- 48.80 Wash, 10 lks. wide, course S.  
Ascend 502 ft., over SE. slope.
- 48.85 Old road, brs. N and S.
- 49.00 Old mine shaft and boiler house brs. N. about 2.50 chs. dist.
- 73.00 Ridge, brs. NE. and S.  
Ascend 14 ft., over N. slope.
- 78.50 Descend 10 ft., over NW. slope, to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 2 and 3 only, with brass cap, marked

S 3	S 2
T14N	R2 E

1923

from which,

- A jack pine, 8 ins. in diam., brs. S. 9° E., 36 lks. dist., marked T14N R2E S2 BT.
- A jack pine, 24 ins. in diam., brs. S. 32° W., 115 lks. dist., marked T14N R2E S3 BT.
- Land, mountainous.  
Soil, rocky, 4th rate:  
Timber, juniper, oak, jack and yellow pine.  
Undergrowth, scrub oak, manzanita and cactus.

- West, on true line, on N. bdy. of sec. 3.  
Over mountainous land, thru. dense timber and undergrowth.  
Descend 68 ft., over NW. slope.
- 6.90 Wash, 10 lks. wide, course N. near head.  
Ascend 46 ft., over E. slope.
- 14.90 Spur, slopes N.  
Descend 49 ft., over NW. slope.
- 22.00 Wash, 10 lks. wide, course NW.  
Ascend 26 ft., over NE. slope.
- 26.20 Spur, slopes N.  
Descend 85 ft., over NW. slope.
- 38.60 Wash, 10 lks. wide, course N.  
Ascend 17 ft., over E. slope, to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bed rock, supported in a mound of stone for  $\frac{1}{4}$  sec. cor. of sec. 3 only, with brass cap, marked

 $\frac{1}{4}$ S 3

1923

from which,



BOOK 3660

## Survey of North bdy. of Township 14 North, Range 2 East. 23

Chains.

- A yellow pine, 24 ins. in diam., brs. S. 36° E., 41 lks. dist., marked  $\frac{1}{4}$  S 3 BT.  
 A jack pine, 30 ins. in diam., brs. S. 19° W., 82 lks. dist., marked  $\frac{1}{4}$  S 3 BT.
- Ascend 32 ft., over E. slope.
- 46.20 Spur, slopes N.  
 Descend 35 ft., over NW. slope.
- 53.20 Wash, 10 lks. wide, course N. 30° E.  
 Ascend 249 ft., over E. slope.
- 76.30 Spur, slopes N.  
 Descend 72 ft., over NW. slope.
- 78.90 Wash, 10 lks. wide, course N.  
 Ascend 26 ft., over E. slope, to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 3 and 4 only, with brass cap, marked

S 4	S 3
T14N	R 2E
1923	

from which,

- A pine, 8 ins. in diam., brs. S. 33° E., 15 lks. dist., marked T14N R2E S3 BT.  
 A pine, 8 ins. in diam., brs. S. 14 $\frac{1}{2}$ ° W., 50 lks. dist., marked T14N R2E S4 BT.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, jack and yellow pine, oak and juniper.

Undergrowth, scrub oak, manzanita and cactus.

- West, on true line, on N. bdy. of sec. 4.  
 Over mountainous land, thru. dense timber and undergrowth.
- 9.70 Ascend 124 ft., over NE. slope.  
 Ridge, brs. N. and S.
- 10.00 Descend 131 ft., over SW. slope.
- 15.70 Wire fence, brs. N. and S.  
 Head of wash, course SW.
- 24.10 Ascend 20 ft., over SE. slope.  
 Spur, slopes SW.
- 36.20 Descend 209 ft., over SW. slope.  
 Wash, 10 lks. wide, course S.
- 40.00 Ascend 67 ft., over E. slope, to  
 Set an iron post, 3 ft. long, 1 in. in diam., on surface rock, supported in a mound of stone, for  $\frac{1}{4}$  sec. cor. of sec. 4 only, with brass cap, marked

$\frac{1}{4}$ S 4
-------------------

1923

from which,

- A juniper, 8 ins. in diam., brs. N. 43° 20' E., 123 lks. dist., marked  $\frac{1}{4}$  S 4 BT.  
 A white oak, 6 ins. in diam., brs. S. 48° 50' E., 93 lks. dist., marked  $\frac{1}{4}$  S 4 BT.
- Ascend 68 ft., over E. slope.
- 45.40 Ridge, brs. N. and S.  
 Descend 286 ft., over W. slope.
- 61.50 Wash, 10 lks. wide, course S.  
 Ascend 92 ft., over E. slope.
- 65.20 Spur, slopes S.  
 Descend 189 ft., over W. slope.
- 66.70 Old road, brs. N. and S.

## BOOK 3660

24 Survey of North boundary of Township 14 North, Range 2 East.

Chains.

- 67.40 Grapevine wash, 50 lks. wide, course S.  
Ascend 20 ft., over SE. slope.
- 68.80 Point of spur, slopes SE.  
Descend 31 ft., over SW. slope.
- 72.40 Wash, 10 lks. wide, course SE.  
Ascend 188 ft., over E. slope, to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bed rock, supported in a mound of stone, for cor. of secs. 4 and 5, only, with brass cap, marked

S 5	S 4
T14N	R 2E

1923

from which,

A juniper, 12 ins. in diam., brs. S. 1° E., 291 lks. dist., marked T14N R2E S4 BT.

A juniper, 36 ins. in diam., brs. S. 15° W., 113 lks. dist., marked T14N R2E S5 BT.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, yellow and jack pine, oak and juniper.

Undergrowth, scrub oak, manzanita and cactus.

-----  
West, on true line, on N. bdy. of sec. 5.

Over mountainous land, thru. scattering timber, and dense undergrowth.

Ascend 152 ft., over E. slope.

- 6.00 Ridge, brs. NW. and S.

Descend 127 ft., over SW. slope.

- 11.00 Wash, 10 lks. wide, course S. in head of gulch.

Ascend 437 ft., over SE. slope, to

- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bed rock, supported in a mound of stone, for
- $\frac{1}{4}$
- sec. cor. of sec. 5 only, with brass cap, marked

S 5
-----

1923

No bearing trees available. Raise a mound of stone 3 ft. base, 2 ft. high, S. of cor.

- 40.50 Spur, slopes S.

Descend 81 ft., over SW. slope, to

- 48.00 Head of wash, course SE.

Descend 78 ft., over S. slope, to

- 52.45 Ridge, brs. NE and SW.

Descend 555 ft., over steep NW. slope.

- 60.91 Intersect E. side line (3-4) of "Storm Cliff" patented lode mining claim, Mineral Survey No. 3013, at a point 8.33 chs. N. 11° 31' E. from cor. No. 4 thereof. Thence across patented mining claims.

- 63.00 Rocky wash, 10 lks. wide, course SW.

Ascend 35 ft., over SE. slope.

- 71.00 Spur, slopes S.

Descend 125 ft., over SW. slope, to sec. cor.

- 79.39 Intersect W. side line (1-2) of "Bucky O'Neil No. 2" patented lode mining claim, Mineral Survey No. 3013, at a point 4.39 chs. S. 11° 31' W. from cor. No. 2 thereof. Leave patented mining claims.

- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 5 and 6 only, with brass cap, marked

S 6	S 5
T14N	R 2 E

1923

Survey of North bdy. of Township 14 North, Range 2 East. 25

Chains.

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.  
Land, mountainous.  
Soil, rocky, 4th rate.  
Timber, juniper, oak, jack and yellow pine.  
Undergrowth, scrub oak and catclaw.

-----  
West, on true line, on N. bdy. of sec. 6.  
Over mountainous land, thru. scattering timber and dense undergrowth.

- 15.60 Descend 427 ft., over SW. slope.
- From this point Cor. No. 2 of "Valley" patented lode mining claim, Mineral Survey No. 3013, bears N. 7 lks. dist.
- 19.20 Wash, 10 lks. wide, course SW.
- Ascend 55 ft., over SE. slope.
- 22.90 Point of spur, slopes S.
- Descend 161 ft., over SW. slope.
- 31.90 Wash, 10 lks. wide, course NW.
- Ascend 28 ft., over NE. slope.
- 35.20 Point of spur, slopes N.
- Descend 64 ft., over NW. slope, to
- 40.00 Set an iron post, 3 ft. long, 1 in. indiam., 26 ins. in the ground, for 1/4 sec. cor. of sec. 6 only, with brass cap, marked

1/4 S 6  
1923

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.  
Descend 90 ft., over NW. slope.

- 43.10 Electric power transmission line, brs. N. and S.
- 44.56 Telephone line, brs. N. and S.
- 46.40 Wash, 10 lks. wide, course SW.
- Ascend 49 ft., over SE. slope.
- 48.80 Spur, slopes SW.
- Descend 57 ft., over NW. slope.
- 57.90 Wash, 10 lks. wide, course SW.
- Ascend 44 ft. over SE. slope.
- 62.20 Point of spur, slopes S.
- Descend 84 ft., over SW. slope.
- 69.80 Same wash, course NW.
- Ascend 44 ft., over NE. slope, to
- 73.26 Intersect the cor. of Ts. 14 and 15 N., Rs. 1 and 2 E., here-  
inbefore described.
- Land, mountainous.
- Soil, rocky, 4th rate.
- Timber, juniper.
- Undergrowth, scrub oak and cactus.

-----

## BOOK 3660

26

Boundaries of Township 14 North, Range 2 East.  
 Latitudes, departures and closing errors.

Line designated.	True bearing.	Dist.	Latitudes.		Departures.	
			N.	S.	E.	W.
South boundary,	N.88°16'W.	44.40	1.34			44.38
	N.86°1'W.	85.90	5.97			85.69
	West,	349.93				349.93
West boundary,	N.0°47'E.	455.13	455.09		6.22	
North boundary,	East,	473.26			473.26	
East boundary,	South,	462.21		462.21		
Convergency,					.48	
Totals			462.40	462.21	479.96	480.00
			462.21			479.96
	Error in latitude,		0.19			
	Error in departure,					0.04

BOOK 3660

Survey of Subdivision lines of Township 14 North, Range 2 East. 27

Chains.

The south boundary of this township is defective in alignment; therefore, preliminary to the survey of the subdivision lines, begin at the cor. of secs. 25, 30, 31 and 36 on the E. bdy. and survey a Governing Section Line due west a distance of five miles, setting temp. cors. thereon at intervals of 40.00 chs., and from the temp. cor. of secs. 29, 30, 31 and 32, connect said Governing Section Line with the cor. of secs. 30 and 31 on the W. bdy. by a random line West, and true line easterly.

The meridional sec. lines of the south tier of secs. are then surveyed from their respective sec. cors. on the S. bdy. in the normal manner, establishing the  $\frac{1}{4}$  sec. cors. at 40.00 chs. S. from the Governing Section Line, and establishing the permanent sec. cors. at the several points of intersection of the meridional sec. lines with the Governing Section Line. The  $\frac{1}{4}$  sec. cors. on the Governing Sec. Line are then established at midpoints between the sec. cors., with the exception of that part of said line situated bet. secs. 30 and 31, where the permanent  $\frac{1}{4}$  sec. cor. of said sections is established at 40.00 chs. in westing from the cor. of secs. 29, 30, 31 and 32.


The survey of the subdivision lines of the north five tiers of sections is then initiated from the sec. cors. on the Governing Sec. Line, and executed in the normal manner, placing the deficiency in measurement against the N. and W. boundaries of the township.

From the reestablished cor. of secs. 35 and 36, on the S. bdy. of the Tp., hereinbefore described, N. 0° 1' W., on true line, bet. secs. 35 and 36. Over rolling land, thru. very scattering timber and dense undergrowth.

- 6.00 Ascend 31 ft., over S. slope. Spur, slopes SW.
- 9.60 Descend 26 ft., over NW. slope. Wash, 15 lks. wide, course SW.
- 14.90 Ascend 54 ft., over SE. slope. Point of spur, slopes E.
- 33.70 Descend 39 ft., over NE. slope, to Wash, 10 lks. wide, course SE.
- 36.42 Ascend 17 ft., over SE. slope, to Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of secs. 35 and 36, with brass cap, marked



- 51.40 No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Ascend 68 ft., over SE. slope, to Leave rolling, and enter mountainous land.
- 76.42 Ascend 418 ft., over steep SW. slope, to Intersect the Governing Section Line at a point 4 lks. E. of the temp. cor. of secs. 25, 26, 35 and 36. At point of intersection, set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 25, 26, 35 and 36, with brass cap, marked



No bearing trees available: Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Land, rolling, and mountainous. Soil, rocky, 4th rate.

## BOOK 3660

28 Survey of Subdivision lines of Township 14 North, Range 2 East.  
Chains.

Timber, juniper.  
Undergrowth, scrub oak, catclaw and cactus.

- 
- From the cor. of secs. 25, 30, 31 and 36, on E. bdy. of Tp., hereinbefore described,  
West, on true line, on Governing Section Line, bet. secs. 25 and 36.  
Over mountainous land, thru. very scattering timber and dense undergrowth.  
Ascend 220 ft., over steep NE. slope.
- 12.00 Spur, slopes SE.  
Descend 108 ft., over SW. slope, to
- 23.70 Wash, 8 lks. wide, course SW.  
Descend 68 ft., over SW. slope, to
- 35.20 Wash, 10 lks. wide, course SE., near head.  
Ascend 115 ft., over SE. slope, to
- 39.98 Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the ground to bed rock, supported in a mound of stone, for  $\frac{1}{4}$  sec. cor. of secs. 25 and 36, with brass cap, marked
- $\frac{1}{4}$  S 25  
 S 36  
 1923
- No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.  
Ascend 16 ft., over SE. slope.
- 41.00 Ridge, brs. NE. and SW.  
Descend 88 ft., over NW. slope, to
- 47.70 Head of gulch, course NW.  
Descend slightly over N. slope, to
- 53.00 Same ridge, brs. NW. and SE.  
Descend 81 ft., over SW. slope.
- 60.10 Head of gulch, course S.  
Ascend 366 ft., over steep SE. slope.
- 79.60 Spur, sloping SE. from N.  
Descend 10 ft., over steep SW. slope, to
- 79.96 Intersect the cor. of secs. 25, 26, 35 and 36.  
Land, mountainous.  
Soil, rocky, 4th rate.  
Timber, juniper.  
Undergrowth, scrub oak, catclaw and cactus.

- 
- N. 0° 1' W., on a true line, bet. secs. 25 and 26.  
Over mountainous land, thru. very scattering timber and dense undergrowth.  
Ascend 152 ft., over steep SW. slope.
- 8.50 Ridge, brs. NW. and SE.  
Descend 55 ft., over NE. slope.
- 18.40 Head of wash, course NW.  
Ascend 12 ft., over SW. slope.
- 24.00 Spur, slopes NW.  
Descend 213 ft., over NE. slope, to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bed rock, supported in a mound of stone for  $\frac{1}{4}$  sec. cor. of secs. 25 and 26, with brass cap, marked

$\frac{1}{4}$   
 S 26 | S 25

1923

- No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
Descend 344 ft., over steep NE. slope.
- 56.80 Wash, 10 lks. wide, in gulch, course NW.  
Ascend 136 ft., over SW. slope.

Survey of Subdivision lines of Township 14 North Range 2 East. 29

Chs. ins.

73.50

Ridge, brs. E. and W.  
Descend 114 ft., over N. slope, to

80.00

Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 23, 24, 25 and 26, with brass cap, marked

T14N	R2 E
S23	S24
S26	S25

1923

from which,

An ash, 6 ins. in diam., brs. N. 3 1/2° W., 218 lks. dist., marked T14N R2E S23 BT.

A juniper, 6 ins. in diam., brs. N. 28 1/2° E., 33 lks. dist., marked T14N R2E S24 BT.

An oak, 4 ins. in diam., brs. S. 78° W., 34 lks. dist., marked BT.

No other bearing tree available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, juniper, oak and ash.

Undergrowth, scrub oak, catclaw and cactus.

40.00

East, on random line, bet. secs. 24 and 25.

80.24

Set temp. 1/4 sec. cor.

Fall 10 lks. S. of the cor. of secs. 19, 24, 25 and 30, on the E. bdy. of the Tp., hereinbefore described.

Thence

S. 89° 56' W., on true line, bet. secs. 24 and 25.

Over mountainous land, thru. very scattering timber and dense undergrowth. Desc. 8 ft., over SW. slope, to

1.40

Head of wash, course NW. Desc. 89 ft., over NW. slope.

16.75

Wash, 10 lks. wide, course NW. Asc. 53 ft., over NE. slope.

21.68

Descend 12 ft., over N. slope.

23.19

Ascend 40 ft., over NE. slope.

29.24

Spur, slopes N. Desc. 69 ft., over NW. slope, to

40.12

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor. of secs. 24 and 25, with brass cap, marked

1/4 S 24
S 25

1923

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor. Desc. 21 ft., over NW. slope.

45.75

Head of gulch, course N. Asc. 153 ft., over NE. slope.

50.45

Ridge, brs. N. and S. Desc. 503 ft., over W. slope.

67.45

Wire fence, brs. NE. and SW.

69.55

Center of Ash Creek, 100 lks. wide, in bend, course NW. from NE. Ascend 33 ft. over NE. slope.

72.25

Fence brs. NW. and SE. turns to E. at about 10 lks. SE. from this point. A small frame house brs. S. about 3 chs. dist.

77.75

Fence brs. NW. and SE.

78.00

Descend 5 ft., over N. slope, to

80.24

Intersect the cor. of secs. 23, 24, 25 and 26.

Land, mountainous. Soil, rocky, 4th rate.

Timber, juniper, oak and ash.

Undergrowth, scrub oak, catclaw and cactus.

N. 0° 1' W., on true line, bet. secs. 23 and 24.

Over mountainous land, thru. very scattering timber and dense undergrowth. Desc. 34 ft., over N. slope.

2.20

Wire fence, brs. E. and W.

2.90

Center of Ash Creek, 100 lks. wide, course SW., containing a stream of clear water, 3 lks. wide, 1 in. deep.

Ascend 434 ft., over SW. slope.

25.00

Spur, slopes SE. Desc. 204 ft., over NE. slope.

36.10

Wash, 20 lks. wide, course E. Asc. 24 ft., over SE. slope, to

40.00

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor. of secs. 23 and 24, with brass cap, marked,

## BOOK 3660

30 Survey of Subdivision lines of Township 14 North, Range 2 West.

Chains.


	$\frac{1}{4}$ S23   S24 1923
48.50	No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Asc. 16 ft. over SE. slope.
55.40	Spur, slopes E. Desc. 89 ft., over NE. slope.
60.60	Head of gulch, course S. 70° E. Asc. 59 ft. over SE. slope.
61.50	Wire fence, brs. E. and W.
74.70	Ridge, brs. E. and W. Desc. 48 ft., over N. and NE. slopes.
79.50	Road, brs. E. and W.
80.00	Wash, 20 lks. wide, course E. from NW. Asc. 5 ft. over S. slope, to Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 13, 14, 23 and 24, with brass cap, marked
	T14N   R2 E S14   S13 S23   S24 1923
	from which, A juniper, 18 ins. in diam., brs. S. 36½° W., 200 lks. dist., marked T14N R2E S23 BT.
	No other bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Land, mountainous. Soil, rocky, 4th rate. Timber, juniper and oak. Undergrowth, scrub oak, catclaw and cactus.
40.00	N. 89° 56' E., on random line, bet. secs. 13 and 24.
80.30	Set temp. $\frac{1}{4}$ sec. cor. Fall 11 lks. S. of the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of Tp. hereinbefore described.
	Thence, S. 89° 51' W., on a true line, bet. secs. 13 and 24. Over mountainous land, thru. scattering timber and dense undergrowth. Asc. 74 ft., over SE. slope.
4.80	Spur, slopes S. Desc. 87 ft., over SW. slope.
12.50	Head of gulch, course S. Asc. 101 ft., over SE. slope.
28.50	Ridge, brs. NE. & SW. Desc. 277 ft., over NW. and W. slopes, to
40.15	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 13 and 24, with brass cap, marked
	$\frac{1}{4}$ S 13 S 24 1923
52.64	No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor. Desc. 254 ft. over W. slope to Ash Creek. Intersect the E. side line (1-2) of Forest Homestead No. 328 at a point 8.19 chs. N. 0° 53' E. from cor. No. 2 thereof, which is a granite stone, 18x12x6 ins. above ground, firmly set and marked "2 HES 328" on W. face. Thence across Forest Homestead No. 328.
56.50	East side of small reservoir.
57.70	West side of small reservoir.
58.00	Wire fence brs. N. 10° W. and S. 10° E. Enter cultivated field.
60.60	Leave cultivated field.
60.65	Wire fence, brs. N. and S.
61.39	Intersect W. side line (3-4) of Forest Homestead No. 328 at a point 9.62 chs. N. 0° 22' W., from cor. No. 3 thereof. Leave H.E.S. No. 328.
61.70	Center of Ash Creek, 100 lks. wide, course S. Ascend 87 ft., over SE. and S. slopes, to
80.30	Intersect the cor. of secs. 13, 14, 23 and 24. Land, mountainous. Soil, rocky, 4th rate. Timber, cottonwood and ash along Ash Creek; elsewhere, juniper. Undergrowth, scrub oak and catclaw.
13.50	N. 0° 1' W. on true line, bet. secs. 13 and 14. Over mountainous land, thru. scattering timber & dense undergrowth. Asc. 156 ft., over S. slope. Ridge, brs. E. and NW.



BOOK 3660

Survey of Subdivision lines of Township 14 North, Range 2 East. 31

- Chains.
- 25.53 Descend 110 ft., over NE.slope.  
From this point,  
U.S.L.M. No.328 brs.N.83°30'E., which is a granite stone 3 ft.x 3 ft.x 4 ins. above ground; firmly set in ground, marked "USLM 328" on SE face, and witnessed by a mound of stone 5 ft. base, 5 ft.high, SE. of monument.
  - 32.50 Wire fence, brs.E.and W.
  - 32.80 Wash, 10 lks.wide, course E.  
Ascend 38 ft., over S.slope to  $\frac{1}{4}$  sec.cor.
  - 33.40 Old road, brs.E. and W.
  - 38.60 Old road, brs.NE. and SW.
  - 40.00 Set an iron post 3 ft.long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec.cor. of secs.13 and 14, with brass cap, marked




from which,

A juniper, 24 ins.in diam., brs.N.89°E., 300 lks.dist., marked  $\frac{1}{4}$ S 13 BT.

A juniper, 8 ins. in diam., brs.N.3°W., 434 lks.dist. marked  $\frac{1}{4}$  S 14 BT.

From this  $\frac{1}{4}$  sec.cor., U.S.L.M. No.328, hereinbefore described, brs.S.80°15'E.

- Ascend 16 ft., over S.slope.
- 43.70 Spur, slopes SE.  
Descend 74 ft., over NE.slope.
- 64.40 Road, brs.NW. and SE.
- 65.20 Wash, 10 lks.wide, course SE.  
Ascend 130 ft., over SW.slope, to
- 80.00 Set an iron post 3 ft.long, 2 ins.in diam., 26 ins.in the ground, for cor.of secs.11,12,13 and 14, with brass cap, marked



from which,

A juniper, 18 ins. in diam., brs.S.78 $\frac{1}{2}$ °W., 170 lks.dist., marked T14N R2E S14 BT.

No other bearing trees available. Raise a mound of stone, 3 ft.base, 2 ft.high, W.of cor.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, juniper.

Undergrowth, scrub oak, catclaw and cactus.

- 40.00 N.89°51'E., on a random line, bet. secs.12 and 13.  
Set temp. $\frac{1}{4}$  sec.cor.
- 80.34 Fall 12 lks.S. of the cor.of secs. 7,12,13 and 18, on the E. bdy.of the Tp., hereinbefore described.  
Thence:  
S.89°46'W., on a true line, bet. secs.12 and 13.  
Over mountainous land, thru. dense timber and undergrowth.  
Descend 113 ft., over NW. and W.slopes.
- 11.35 Ash Creek, 50 lks.wide, course S.  
Ascend 94 ft., over E.slope.
- 21.35 Spur, slopes SE.  
Descend 65 ft., over SW.slope.
- 24.85 Wash, 20 lks.wide, course SE.  
Ascend 45 ft., over NE.slope.
- 31.35 Ridge, brs.NW. and SE.

## BOOK 3660

32 Survey of Subdivision lines of Township 14 North, Range 2 East.

Chains.

39.17 Descend 31 ft., over SW. slope, to  
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
the ground, for witness cor. to  $\frac{1}{4}$  sec. cor., with brass  
cap, marked

$$\begin{array}{r} \text{WC } \frac{1}{4} \quad \text{S } 12 \\ \quad \quad \quad \text{S } 13 \\ \quad \quad \quad 1923 \end{array}$$

from which,

An oak, 10 ins. in diam., brs. N. 73° W., 149 lks. +  
dist., marked  $\frac{1}{4}$  S 12 WC BT.

An oak, 6 ins. in diam., brs. S. 60° W., 75 lks. +  
dist., marked  $\frac{1}{4}$  S 13 WC BT.

Leave dense, and enter scattering timber.

40.17 Descend 28 ft., over W. slope.  
True point for  $\frac{1}{4}$  sec. cor. falls in wash, 50 lks. wide,  
course S., where it is impracticable to set monument;  
therefore, establish witness cor. at point on line, 1.00  
ch. N. 89° 46' E. as described above.

53.66 Ascend 256 ft., over E. slope.  
From this point, U.S.L.M. No. 328, brs. S. 26° 10' E.

55.25 Spur, slopes SE.

Descend 158 ft.; over W. slope.

69.55 Wash, 10 lks. wide, course SE.

Ascend 90 ft.; over E. slope.

78.00 Ridge, brs. N. and SE.

Descend 42 ft., over SW. slope, to

80.34 Intersect the cor. of secs. 11, 12, 13 and 14.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, juniper.

Undergrowth, scrub oak, catchaw and cactus.

-----  
N. 0° 1' W., on true line, bet. secs. 11 and 12.

Over mountainous land, thru. scattering timber and dense  
undergrowth.

19.30 Ascend 117 ft., over SW. slope.  
Point of spur, slopes W.

Descend 59 ft., over NW. slope.

24.10 Wash, 10 lks. wide, in gulch, course W. near head.

Ascend 201 ft., over SW. slope.

38.50 Ridge, brs. NW. and SE.

Descend 9 ft., over NE. slope, to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor. of secs. 11 and 12, with  
brass cap, marked

$$\begin{array}{r} \frac{1}{4} \\ \text{S11} \quad \text{S12} \\ | \\ 1923 \end{array}$$

No bearing trees available. Raise a mound of stone, 3 ft.  
base, 2 ft. high, W. of cor.

56.00 Descend 139 ft., over NE. slope.

Wash, 10 lks. wide, course SE.

Ascend 322 ft., over SE. slope, to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in  
the ground, for cor. of secs. 1, 2, 11 and 12, with brass  
cap, marked

$$\begin{array}{r} \text{T14N} \quad \text{R2 E} \\ \text{S } 2 \quad \text{S } 1 \\ \text{S11} \quad \text{S12} \\ 1923 \end{array}$$

No bearing trees available. Raise a mound of stone, 3 ft.  
base, 2 ft. high, W. of cor.

Survey of Subdivision lines of Township 14 North, Range 2 East. 33  
Chains.

Land, mountainous.  
Soil, rocky, 4th rate.  
Timber, juniper and oak.  
Undergrowth, scrub oak, catclaw and cactus.

- 40.00 N.89°46'E., on a random line, bet. secs.1 and 12.
- 80.34 Set temp.  $\frac{1}{4}$  sec.cor.  
Fall 2 lks.N. of the cor.of secs. 1,6,7 and 12, on the  
E. bdy.of the Tp., hereinbefore described.
- Thence,  
S.89°47'W., on true line, bet. secs.1 and 12.  
Over mountainous land, thru. very scattering timber and  
dense undergrowth.
- 5.50 Ascend 20 ft., over NE.slope, to
- 9.50 Ascend 10 ft., over N. slope.
- 10.40 Descend 23 ft., over NW.slope.
- 10.40 Wash, 10 lks.wide, course NE.
- 30.00 Ascend 531 ft., over NE.slope.  
Ridge, brs. NW. and SE.
- 40.17 Descend 129 ft., over SW.slope, to  
Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in  
the ground, for  $\frac{1}{4}$  sec.cor. of secs.1 and 12, with  
brass cap, marked

$\frac{1}{4}$  S 1  
S 12  
1923

- 53.85 No bearing trees available.  
Raise a mound of stone, 3 ft.base, 2 ft.high, N.of cor.  
Descend 268 ft., over SW.slope.
- 65.34 Wash, 10 lks.wide, course SE.  
Ascend 255 ft., over NE.slope.  
Ridge, brs.NW. and SE.
- 68.45 Descend 24 ft., over SW.slope, to  
Head of gulch, course S.
- 71.75 Ascend 38 ft., over SE.slope.  
Spur, slopes S.
- 77.45 Descend 148 ft., over SW.slope.  
Wash, 10 lks.wide in gulch, course S.
- 80.34 Ascend 107 ft., over SE.slope, to  
Intersect the cor. of secs. 1, 2, 11 and 12.  
Land, mountainous.  
Soil, rocky, 4th rate.  
Timber, juniper and oak.  
Undergrowth, scrub oak, catclaw and cactus.

- 40.00 N.O° 1'W., on random line, bet. secs.1 and 2.
- 62.28 Set temp.  $\frac{1}{4}$  sec.cor.  
Fall 11 lks.W. of the cor.of secs.1 and 2, on the N.bdy.  
of the Tp., hereinbefore described,  
Thence,  
S.O°5'W., on true line, bet. secs.1 and 2.  
Over mountainous land, thru. dense timber and undergrowth.
- 3.90 Descend 61 ft., over SE. slope.  
Wash, 10 lks.wide, course E. Leave dense, and enter scat-  
tering timber.
- 21.30 Ascend 385 ft., over NE:slope.  
Ridge, brs.E. and W.
- 22.28 Descend 14 ft., over S. slope, to  
Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in

# BOOK 3660

## 34 Survey of Subdivision lines of Township 14 North Range 2 East.

Chains.

the ground, for  $\frac{1}{4}$  sec.cor. of secs.1 and 2, with brass cap, marked

$\frac{1}{4}$   
 S 2 | S 1  
 1923

- No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft.high, W.of cor.  
 Descend 418 ft., over S.slope.
- 40.00 Wash, 10 lks.wide in gulch, course SE.  
 Ascend 138 ft., over NE.slope.
- 54.60 Ridge, brs.NW. and SE. A spur, slopes S.from ridge at about 2 chs. NW.
- 62.28 Descend 149 ft., over SE.slope, to  
 Intersect the cor.of secs.1, 2, 11 and 12.  
 Land, mountainous.  
 Soil, rocky, 4th rate.  
 Timber, juniper and oak.  
 Undergrowth, scrub oak, catclaw and cactus.

- From the reestablished cor. of secs: 34 and 35, on the S.bdy.of the Tp., hereinbefore described,  
 N.0°1'W., on true line, bet. secs.34 and 35.  
 Over rolling land, thru. very scattering timber and dense undergrowth.
- 0.02 Descend 46 ft., over NE.slope.  
 From this point, cor.No.2 of Forest Homestead No.543  
 brs.E. 5 lks.dist. Thence parallel to, and 5 lks.W.  
 of W. bdy. of said homestead.
- 3.00 Road, Camp Verde to Dewey, brs.E. and W.
- 4.50 Wash, 30 lks.wide, course NE. Thence over nearly level land.  
 Descend slightly over NE.slope.
- 10.01 From this point, cor.No.3 (NW.cor.) of Forest Homestead No.543, brs.E. 5 lks.dist.
- 10.90 Center of Ash Creek; 90 lks.wide, course SE., containing a stream of clear water, 4 lks.wide, 3 ins. deep.  
 Continue over nearly level land.  
 Ascend slightly over SW.slope.
- 11.90 Irrigation ditch, 5 lks.wide, 1 ft.deep, course SE.
- 13.50 From this point a fence corner at NW. cor. of Joe Scissorilla's pasture, brs. East. 25 lks. distant, from which fences extend E. and SE.
- 15.00 Descend slightly over NW.slope.
- 17.90 Center of Ash Creek, 100 lks.wide, course SW.  
 Enter rolling land.  
 Ascend 75 ft., over SE.slope, to
- 32.90 Set an iron post, 3 ft.long, 1 in. in diam., 20 ins. in the ground to bed rock, supported in a mound of stone, for  $\frac{1}{4}$  sec.cor. of secs. 34 and 35, with brass cap, marked

$\frac{1}{4}$   
 S34 | S35  
 1923

from which,


- A willow, 24 ins. in diam., brs.S.89 $\frac{1}{4}$ °W., 152 lks. dist., marked  $\frac{1}{4}$ S 34 BT.  
 A walnut, 8 ins. in diam., brs.S.9°00'E., 82 lks. dist., marked  $\frac{1}{4}$ S 35 BT.

BOOK 3660

Survey of Subdivision lines of Township 14 North, Range 2 East. 35


Chains.

Continue over rolling land, thru. very scattering timber and dense undergrowth,  
 Ascend 12 ft., over E. slope, to  
 43.90 Ash Creek, 40 lks. wide, course SE.  
 Ascend 6 ft., over W. slope, to  
 46.90 Ash Creek, 40 lks. wide, course SW.  
 Ascend 123 ft., over S. slope.  
 60.00 Road, brs. NE. and SW.  
 66.70 Point of spur, slopes SW. Enter mountainous land.  
 Ascend 48 ft., over W. slope, to  
 72.90 Intersect the temp. cor. of secs. 26, 27, 34 and 35, on the  
 Governing Sec. line. Remove the temp. cor., and at  
 same point set an iron post, 3 ft. long, 2 ins. in  
 diam., 26 ins. in the ground, for cor. of secs. 26, 27,  
 34 and 35, with brass cap, marked



No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
 Land, rolling, nearly level and mountainous.  
 Soil, rocky, 4th rate.  
 Timber, juniper and ash.  
 Undergrowth, scrub oak, catclaw and cactus.

From the cor. of secs. 25, 26, 35 and 36,  
 West, on true line, on Governing Sec. Line, bet. secs. 26  
 and 35.  
 Over mountainous land, thru. very scattering timber and  
 dense undergrowth.  
 Descend 148 ft., over SW. slope.  
 8.10 Wash, 10 lks. wide, in gulch, course SE.  
 Ascend 79 ft., over SE. slope.  
 18.80 Spur, slopes SW.  
 Descend 285 ft., over NW. slope, to  
 40.02 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor. of secs. 26 and 35, with brass  
 cap, marked



No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.  
 Descend 271 ft., over W. slope.  
 60.90 Center of Ash Creek, 100 lks. wide, course S., containing a  
 stream of clear water, 5 lks. wide, 4 ins. deep,  
 Ascend 158 ft., over E. slope.  
 64.60 Road, brs. NE. and SW.  
 76.60 Spur, slopes S.  
 Descend 25 ft., over W. slope, to  
 80.04 Intersect the cor. of secs. 26, 27, 34 and 35.  
 Land, mountainous.  
 Soil, rocky, 4th rate.  
 Timber, ash and cottonwood along Ash Creek, elsewhere, juniper.  
 Undergrowth, scrub oak, manzanita, catclaw and cactus.

N.0°1'W., on true line, bet. secs. 26 and 27.  
 Over mountainous land, thru. very scattering timber and  
 dense undergrowth.  
 Ascend 129 ft., over W. and SW. slopes, to  
 11.80 Spur, slopes SW.  
 Ascend 20 ft., over W. slope.  
 24.00 Descend 46 ft., over NW. slope.

# BOOK 3660

## 36. Survey of Subdivision lines of Township 14 North, Range 2 East.

- Chains.
- 32.00 Wash, 5 lks.wide, course SW.  
Ascend 22 ft., over S.slope, to
- 40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins.in  
the ground, for  $\frac{1}{4}$  sec.cor. of secs. 26 and 27, with  
brass cap, marked
- $\frac{1}{4}$   
S27 | S26  
1923
- No bearing trees available.. Raise a mound of stone, 3 ft.  
base, 2 ft.high, W.of cor.  
Ascend 39 ft., over S.slope..
- 47.70 Spur, slopes W.  
Descend 33 ft., over N.slope.
- 61.90 Wash, 8 lks.wide, course SW. Enter rolling land.  
Ascend 39 ft., over SW.slope, to
- 77.25 Wash, 10 lks.wide, course SW.  
Ascend 5 ft., over SW. slope, to
- 80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 26 ins. in the  
ground, for cor.of secs. 22, 23, 26 and 27, with brass  
cap, marked

T14N | R2E  
S22 | S23  
S27 | S26  
1923

from which,  
A juniper, 10 ins. in diam., brs.N.7 $\frac{1}{2}$ °E., 352  
lks.dist., marked T14N R2E S23 BT.  
No other bearing trees available. Raise a mound  
of stone 3 ft.base, 2 ft.high, W.of cor.  
Land, mountainous and rolling.  
Soil, rocky, 4th rate.  
Timber, juniper.  
Undergrowth, scrub oak, catclaw and cactus.

- East, on random line, bet. secs.23 and 26.
- 40.00 Set temp. $\frac{1}{4}$  sec.cor.
- 80.02 Fall 4 lks.S. of the cor.of secs.23,24,25 and 26.  
Thence,  
S.89°58'W., on true line, bet secs. 23 and 26.  
Over mountainousland, thru. scattering timber and dense  
undergrowth.
- 3.60 Descend 44 ft., over N.slope.  
Ash Creek, 70 lks.wide, course SW, containing a stream  
of clear water, 3 lks.wide, 2 ins.deep.
- 17.90 Ascend 91 ft., over SE. slope.  
Point of spur, slopes S.  
Descend 85 ft., over SW.slope.
- 24.50 Wash, 50 lks.wide, course S.  
Ascend 230 ft., over E.slope to  $\frac{1}{4}$  sec.cor.
- 24.80 Road, brs.N.20°W. and S.20°E.
- 40.01 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in  
the ground, for  $\frac{1}{4}$  sec.cor. of secs.23 and 26, with  
brass cap, marked

$\frac{1}{4}$  S 23  
S 26  
1923

- No bearing trees available. Raise amount of stone, 3 ft.  
base, 2 ft.high, N.of cor.  
Ascend 178 ft., over E.slope.
- 51.00 Ridge, brs.N.and S.  
Descend 263 ft., over steep W.slope, to
- 68.00 Foot of steep descent, brs.N.and S. Enter rolling land.

BOOK 3660

Survey of Subdivision lines of Township 14 North, Range 2 East. 37


Chains.

78.00 Descend 38 ft., over W.slope, to Wash, 10 lks. wide, course SW.

80.02 Descend slightly over SW.slope, to Intersect the cor. of secs. 22, 23, 26 and 27. Land, mountainous and rolling. Soil, rocky, 4th rate. Timber, juniper. Undergrowth, scrub oak, catclaw and cactus.

N.0°1'W., on true line, bet. secs. 22 and 23. Over rolling land, thru very scattering timber and dense undergrowth. Ascend 308 ft., over SW.slope to 1/4 sec. cor. Leave rolling, and enter mountainous land.

31.50 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor. of secs. 22 and 23, with brass cap, marked




No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Ascend 9 ft., over SW.slope.

41.00 Ridge, brs. NW. and SE.

52.90 Descend 181 ft., over steep NE.slope. Wash, 40 lks. wide, in gulch, course SE.

80.00 Ascend 205 ft., over SW.slope, to Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 14, 15, 22 and 23, with brass cap, marked



from which,

A juniper, 3 ins. in diam., brs. N. 30 1/4° W., 132 lks. dist., marked BT.

A juniper, 6 ins. in diam., brs. N. 23 1/4° E., 84 lks. dist., marked T14N R2E S14 BT.

No other bearing trees available. Raise a mound of stone 3 ft. base, 2 ft. high, W. of cor. Land, rolling and mountainous. Soil, rocky, 4th rate. Timber, juniper and oak. Undergrowth, scrub oak and catclaw.

N. 89° 58' E., on random line, bet. secs. 14 and 23.

40.00 Set temp. 1/4 sec. cor.

79.82 Fall 2 lks. S. of the cor. of secs. 13, 14, 23 and 24. Thence, S. 89° 57' W., on true line, bet. secs. 14 and 23. Over mountainous land, thru. very scattering timber and dense undergrowth.

Ascend slightly over S.slope.

0.32 Wash, 10 lks. wide, course SE.

6.00 Ascend 48 ft., over NE.slope. Ridge, brs. NW. and SE.

16.60 Descend 90 ft., over SW.slope. Wire fence, brs. N. and S.

19.82 Road, brs. N. and SE.

20.72 Road, brs. N. and S.

22.80 Wash, 30 lks. wide, course S.

# BOOK 3660

## 38 Survey of Subdivision lines of Township 14 North, Range 2 East.

Chains.

- 23.82 Ascend 15 ft., over SE.slope.  
Point of spur, slopes S.
- 26.80 Descend 12 ft., over SW.slope.  
Wash, 90 lks.wide, course SE.
- 39.91 Ascend 154 ft., over NE.slope, to  
Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in  
the ground, for  $\frac{1}{4}$  sec.cor. of secs.14 and 23, with  
brass cap, marked

$\frac{1}{4}$  S 14  
S 23  
1923

- No bearing trees available. Raise a mound of stone 3 ft.  
base, 2 ft. high, N.of cor.
- 57.02 Ascend 130 ft., over NE.slope.  
Saddle in ridge, brs.NW. and SE.
- 79.82 Descend 146 ft., over SW.slope, to  
Intersect the cor.of secs.14,15,, 22 and 23.  
Land, mountainous.  
Soil, rocky, 4th rate.  
Timber, juniper.  
Undergrowth, scrub oak and catclaw.

- N.0°1'W.on true line, bet. secs.14 and 15.  
Over mountainous land,, thru. very scattering timber and  
dense undergrowth.
- 8.90 Ascend 27 ft., over W.slope, to  
Wash, 10 lks.wide, course S. 10°W.
- 19.90 Ascend 174 ft., over SW.slope.  
Ridge, brs.NW. and SE.
- 33.20 Descend 95 ft., over NE.slope.  
Wash, 40 lks.wide, course SE.
- 40.00 Ascend 66 ft., over SW.slope, to  
Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in  
the ground, for  $\frac{1}{4}$  sec.cor. of secs.14 and 15, with  
brass cap, marked

$\frac{1}{4}$   
S15 | S14  
1923

- No bearing trees available. Raise a mound of stone, 3  
ft.base, 2 ft. high, W.of cor.
- 42.90 Ascend 40 ft., over SW.slope..  
Spur, slopes SE.
- 52.23 Descend 38 ft., over NE.slope..
- 59.00 Ascend 15 ft., over E.slope, to  
Wash, 30 lks.wide, course SE.
- 73.80 Ascend 156 ft., over SW.slope, to
- 80.00 Ascend 12 ft.. over W.slope, to  
Set an iron post, 3 ft.long, 2 ins. in diam., 26 ins. in  
the ground, for cor.of secs.10,11,14 and 15, with brass  
cap, marked

T14N | R2 E  
S10 | S11  
S15 | S14  
1923

- No bearing trees available. Raise a mound of stone, 3 ft.  
base, 2 ft. high, W.of cor.
- Land, mountainous.  
Soil, rocky, 4th rate.  
Timber, juniper.  
Undergrowth, scrub oak, catclaw and cactus.

- 40.00 N.89°57'E., on a random line, bet. secs.11 and 14.  
Set temp. $\frac{1}{4}$  sec.cor.



Survey of Subdivision lines of Township 14 North, Range 2 East. 39

Chains.

79.72 Fall 7 lks.N. of the cor. of secs. 11,12,13 and 14. Thence, West, on true line, bet. secs.11 and 14. Over mountainous land, thru. very scattering timber and dense undergrowth. Descend 63 ft., over W. slope.

3.30 Wash, 20 lks.wide, course S. Ascend 57 ft., over SE.slope.

7.30 Point of spur, slopes SE. Descend 73 ft., over SW.slope.

16.92 House brs.S. about 3 chs.dist.

17.75 Road, brs.NW. and S.

18.40 Wash, 30 lks.wide, course SE. Ascend 219 ft., over NE.slope.

24.80 From this point; mine shaft brs.N. about 10 chs.dist.

34.30 Ascend 30 ft., over N.slope, to

39.86 Set an iron post, 3 ft.long; 1 in. in diam., 26 ins.in the ground for  $\frac{1}{4}$  sec.cor. of secs.11 and 14, with brass cap, marked

$\frac{1}{4}$  S 11  
S 14  
1923

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft.high, N.of cor. Ascend 28 ft., over N.slope.

45.80 Ridge, brs.N.50°W. and S.70°E. Descend 23 ft., over SW. slope.

51.70 Wash, 10 lks.wide, course SE. Ascend 234 ft. over NE.slope.

68.80 Ridge, brs.NW. and SE. Descend 217 ft., over W.slope, to

79.72 Intersect the cor.of secs.10,11, 14 and 15. Land, mountainous. Soil, rocky, 4th rate. Timber, juniper. Undergrowth, scrub oak, catclaw and cactus.

N. 0° 1'W., on true line, bet. secs.10 and 11. Over mountainous land, thru. scattering timber and dense undergrowth. Ascend 39 ft., over W.slope.

7.80 Descend 54 ft., over NW.slope.

10.60 Wash, 10 lks.wide, in gulch, course S.10°W. Ascend 136 ft., over SE.slope.

24.50 Descend 50 ft., over NE.slope.

28.30 Wash, 20 lks.wide, in gulch, course SE. Ascend 228 ft., over SW.slope, to

40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec.cor. of secs.10 and 11, with brass cap, marked

$\frac{1}{4}$   
S10 | S11  
1923

No bearing trees available. Raise a mound of stone, 3 ft.base, 2 ft.high, W.of cor. Ascend 10 ft., over SW.slope.

41.70 Ridge, brs.NW. and SE. Descend 56 ft., over NE.slope.

50.50 Wash, 20 lks.wide, course SE. Ascend 364 ft., over S. and SW. slopes.

79.90 Ridge, brs.NW. and SE. Descend slightly over NE. slope, to

80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 26 ins.in the ground, for cor.of secs.2,3,10 and 11, with brass cap, marked

# BOOK 3660

## 40. Survey of Subdivision lines of Township 14 North, Range 2 East.

Chains.

T14N	R2E
S 3	S 2
S10	S11
1923	

from which,  
 A juniper, 30 ins. in diam., brs. N. 57° W., 343 lks.  
 dist., marked T14N R2E S3 BT.  
 A juniper, 8 ins. in diam., brs. S. 34½° E., 337 lks.  
 dist., marked T14N R2E S11 BT.  
 A juniper, 8 ins. in diam., brs. S. 23° W., 60 lks.  
 dist., marked T14N R2E S10 BT.  
 No other bearing tree available. Raise a mound of  
 stone, 3 ft. base, 2 ft. high, W. of cor.  
 Land, mountainous.  
 Soil, rocky, 4th rate,  
 Timber, juniper and yellow pine.  
 Undergrowth, scrub oak, catclaw and cactus.

East, on random line, bet. secs. 2 and 11.  
 40.00 Set temp. ¼ sec. cor.  
 79.86 Fall 14 lks. S. of the cor. of secs. 1, 2, 11 and 12.  
 Thence,  
 S. 89° 54' W., on true line, bet. secs. 2 and 11.  
 Over mountainous land, thru. scattering timber and dense  
 undergrowth.  
 Ascend 32 ft., over E. slope.  
 1.20 Spur, slopes S.  
 Descend 189 ft. over W. slope.  
 10.05 Wash, 10 lks. wide, in gulch, course SW.  
 Ascend 44 ft., over SE. slope.  
 12.00 Point of spur, slopes SW.  
 Descend 47 ft., over SW. slope.  
 17.35 Wash, 10 lks. wide, course S.  
 Ascend 32 ft., over E. slope.  
 21.55 Spur, slopes S.  
 Descend 94 ft., over SW. slope.  
 28.95 Wash, 10 lks. wide, in gulch, course SE.  
 Ascend 153 ft., over NE. slope, to  
 39.93 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
 the ground for the ¼ sec. cor. of secs. 2 and 11, with  
 brass cap, marked

¼	S 2
S 11	
1923	

No bearing trees available. Raise a mound of stone, 3 ft.  
 base, 2 ft. high, N. of cor.  
 Ascend 29 ft., over N. slope.  
 43.50 Descend 3 ft., over NW. slope.  
 45.10 Ascend 34 ft., over N. slope.  
 47.15 Descend 26 ft., over NW. slope.  
 51.67 Ascend 73 ft., over E. slope.  
 60.00 Spur, slopes NE.  
 Descend 40 ft., over NW. slope.  
 64.35 Wash, 10 lks. wide, course NE.  
 Ascend 221 ft., over NE. slope, to  
 79.86 Intersect the cor. of secs. 2, 3, 10 and 11.  
 Land, mountainous.  
 Soil, rocky, 4th rate.  
 Timber, juniper and yellow pine.  
 Undergrowth, scrub oak, catclaw and cactus.


N. 0° 1' W., on random line, bet. secs. 2 and 3.  
 40.00 Set temp. ¼ sec. cor.  
 62.41 Fall 14 lks. W. of cor. of secs. 2 and 3, on N. bdy. of Tp.,

Survey of Subdivision lines of Township 14 North Range 2 East. 41

Chains.

hereinbefore described.


Thence  
S.0°7'W., on true line, bet. secs.2 and 3.  
Over mountainous land, thru. dense timber and undergrowth.  
Ascend 65 ft., over NW.slope.  
5.90 Ridge, bra.E.and W.  
22.41 Descend 401 ft., over steep S.slope, to  
Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in  
the ground, for 1/4 sec.cor. of secs. 2 and 3, with brass  
cap, marked



1923

No bearing trees available. Raise a mound of stone, 3 ft.  
base, 2 ft.high, W.of cor.  
28.00 Descend 126 ft., over steep S. slope.  
Wash, 10 lks.wide, in gulch, course SE.  
32.70 Ascend 61 ft., over NE. slope.  
Point of point, slopes SE.  
36.20 Descend 33 ft., over SE. slope.  
Wash, 10 lks.wide, in gulch; course E.  
45.20 Ascend 147 ft., over N.slope.  
Spur.slopes E.  
53.90 Descend 122 ft., over S.slope.  
Wash, 10 lks.wide in gulch, course E.  
62.41 Ascend 79 ft., over NE.slope, to  
Intersect the cor. of secs.2,3, 10 and 11.  
Land, mountainous.  
Soil, rocky, 4th rate.  
Timber, yellow and jack pine, juniper and spruce.  
Undergrowth, scrub oak, catclaw and cactus.

-----  
From the reestablished cor.of secs.33 and 34, on the S.  
bdy.of the Tp., hereinbefore described,  
N.0°2'W., on true line, bet. secs.33 and 34.  
Over rolling land, thru. very scattering timber and dense  
undergrowth.  
13.10 Ascend about 70 ft., over SW. and W.slopes to 1/4 sec.cor.  
Wire fence, brs.E. 10 chs.to SE.cor. and W.10 chs. to SW.  
cor.of enclosed tract.  
25.50 Enter cultivated field, brs.NE.and SW.  
27.00 From this point a house 12x14 ft. brs.E. about 7 chs.dist.  
31.90 Leave cultivated field, brs.E. and W.  
32.92 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in the  
ground, for 1/4 sec.cor. of secs.33 and 34, with brass  
cap, marked



1923

No bearing trees available. Raise a mound of stone, 3  
ft.base, 2 ft.high, W.of cor.  
37.50 Ascend 34 ft., over W.slope, to  
Wash, 50 lks.wide, course SW.  
41.10 Ascend 89 ft., over S.slope to sec.cor.  
Wire fence brs.E.10 chs. to NE.cor. and W.10 chs.to NW.  
cor.of enclosed tract.  
42.30 Road, Camp Verde to Dewey, brs.E.and W.  
72.92 Intersect the Governing Section Line, at a point 6 lks.  
W. of the temp. cor.of secs.27,28, 33 and 34.  
At point of intersection, set an iron post, 3 ft.long, 2  
ins.in diam., 26 ins.in the ground, for cor.of secs.  
27,28, 33 and 34, with brass cap, marked

# BOOK 3660

42. Survey of Subdivision lines of Township 14 North, Range 2 East  
Chains.

T14N	R2E
S28	S27
S33	S34

1923

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
Land, rolling.  
Soil, rocky, 4th rate.  
Timber, juniper.  
Undergrowth, scrub oak and catclaw.

From the cor. of secs. 26, 27, 34 and 35,  
West, on true line, on Governing Section Line, bet. secs.  
27 and 34.

Over mountainous land, thru. very scattering timber and dense undergrowth.

Descend 60 ft., over W. slope.

10.30 Wash, 15 lks. wide, course SE. Enter rolling land.

Ascend 156 ft., over gradual E. slope, to

40.03 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of secs. 27 and 34, with brass cap, marked

S 27
S 34

1923

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Ascend 56 ft., over E. slope.

46.20 Spur, slopes S.

Descend 44 ft., over W. slope.

59.80 Wash, 50 lks. wide, course S. 10° W.

Ascend 55 ft., over E. slope.

68.80 Spur, slopes S.

Descend 20 ft., over SW. slope.

78.00 Ascend 10 ft., over S. slope, to

80.06 Intersect the cor. of secs. 27, 28, 33 and 34.

Land, mountainous and rolling.

Soil, rocky, 4th rate.

Timber, juniper.

Undergrowth, scrub oak, catclaw and cactus.

N. 0° 2' W., on true line, bet. secs. 27 and 28.

Over rolling land, thru. very scattering timber and dense undergrowth.

Ascend 80 ft., over S. slope.

8.00 Ridge, brs. NE. and SW.

Descend 41 ft., over NW. slope.

16.00 Head of wash, course SW.

Ascend 16 ft., over S. slope.

18.60 Spur, slopes W.

Descend 37 ft., over NW. slope.

26.90 Wash, 25 lks. wide, course W.

Ascend gradually over W. slope, to

38.90 Wash, 5 lks. wide, course SW.

Ascend slightly over SW. slope, to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of secs. 27 and 28, with brass cap, marked


S28	S27
-----	-----

1923

Survey of Subdivision lines of Township 14 North, Range 2 East. 43


Chains.

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
 Ascend gradually over SW. and W. slopes to sec. cor.  
 41.90 Old road, brs. NE. and SW.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 21, 22, 27 and 28, with brass cap, marked




No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
 Land, rolling.  
 Soil, rocky, 4th rate.  
 Timber, juniper.  
 Undergrowth, scrub oak, catclaw and cactus.

East, on random line, bet. secs. 22 and 27.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.10 Intersect the cor. of secs. 22, 23, 26 and 27.  
 Thence,  
 West, on true line, bet. secs. 22 and 27.  
 Over rolling land, thru. dense undergrowth.  
 Descend gradually over SW. slope.  
 22.50 Wash, 5 lks. wide, course SE.  
 Ascend 55 ft., over SE. and S. slopes, to  
 40.05 Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bed rock, supported in a mound of stone, for  $\frac{1}{4}$  sec. cor. of secs. 22 and 27, with brass cap, marked



No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.  
 Descend 12 ft., over SW. slope.  
 42.00 Wash, 5 lks. wide, course SE.  
 Ascend 30 ft., over E. slope.  
 47.40 Ridge, brs. N. and S.  
 Descend 42 ft., over W. slope.  
 56.50 Old road, brs. NW. and SE.  
 60.60 Wash, 5 lks. wide, course SW.  
 Ascend 20 ft., over E. slope.  
 63.00 Spur, sloping SW.  
 Descend 38 ft., over W. slope, to  
 80.10 The cor. of secs. 21, 22, 27 and 28.  
 Land, rolling.  
 Soil, rocky, 4th rate.  
 Timber, none.  
 Undergrowth, scrub oak and buck brush.

N.0°2'W., on true line, bet. secs. 21 and 22.  
 Over rolling land, thru. dense undergrowth.  
 Ascend 49 ft., over W. slope, to  
 12.40 Wash, 10 lks. wide, course SW.  
 Ascend 102 ft., over SE. slope, to  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of secs. 21 and 22, with brass cap, marked



# BOOK 3660

## 44 Survey of Subdivision lines of Township 14 North, Range 2 East.

Chains.

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
 Ascend 63 ft., over gradual SE. slope.  
 47.50 Fence, brs. NE. and SW.  
 50.00 Foot of steep slope, brs. NE. and SW. Leave rolling, and enter mountainous land. Asc. 288 ft. over SE. & E. slopes, to  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground, to bed rock, supported in a mound of stone, for cor. of secs. 15, 16, 21 and 22, with brass cap, marked

T14N	R2E
S16	S15
S21	S22
1923	

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
 Land, rolling and mountainous.  
 Soil, rocky, 4th rate.  
 Timber, none.  
 Undergrowth, buck brush and scrub oak.

40.00 East, on a random line, bet. secs. 15 and 22.  
 80.02 Set temp.  $\frac{1}{4}$  sec. cor.  
 Fall 10 lks. N. of the cor. of secs. 14, 15, 22 and 23.  
 Thence  
 N.  $89^{\circ}56'$  W., on true line, bet. secs. 15 and 22.  
 Over mountainous land, thru. dense undergrowth.  
 Descend 6 ft., over W. slope.  
 1.40 Wash, 15 lks. wide, course S.  
 Ascend 15 ft., over SE. slope.  
 5.00 Point of spur, slopes S.  
 Descend 21 ft., over SW. slope.  
 10.40 Wash, 20 lks. wide, course SE.  
 Ascend 206 ft., over E. slope.  
 27.10 Spur, slopes SE.  
 Descend 227 ft., over SW. slope, to  
 40.01 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bed rock, supported in a mound of stone, for  $\frac{1}{4}$  sec. cor. of secs. 15 and 22, with brass cap, marked

$\frac{1}{4}$	S 15
	S 22
1923	


No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.  
 Descend 18 ft., over SW. slope.  
 41.30 Wash, 40 lks. wide, course SE.  
 Ascend 15 ft., over SE. slope.  
 42.70 Point of spur, slopes SE.  
 Descend 12 ft., over SW. slope.  
 43.00 Enter wash, 20 lks. wide, course SE. from W.  
 Ascend slightly in wash, to  
 46.80 Leave wash, course E. from NW.  
 Ascend 286 ft., over E. slope.  
 55.90 Fence, brs. N. and S.  
 75.00 Ridge, brs. NW. and SE.  
 Descend 30 ft., over SW. slope.  
 78.40 Head of gulch, course S.  
 Ascend 10 ft., over E. slope, to  
 80.02 Intersect the cor. of secs. 15, 16, 21 and 22.  
 Land, mountainous.  
 Soil, rocky, 4th rate.  
 Timber, none.  
 Undergrowth, buck brush and scrub oak.

Survey of Subdivision lines of Township 14 North, Range 2 East. 45

Chains.


N.0° 2'W., on a true line, bet. secs.15 and 16.  
Over mountainous land, thru. scattering timber and dense undergrowth.

- 2.30 Ascend 25 ft., over S.slope. Ridge, brs.NW. and SE.
- 20.00 Descend 177 ft., over NE. slope. Wash, 20 lks.wide, course SE.
- 40.00 Ascend 440 ft., over steep SW.slope, to Set an iron post, 3 ft.long, 1 in. in diam., 18 ins. in the ground, to bed rock, supported in a mound of stone, for  $\frac{1}{4}$  sec.cor. of secs.15 and 16, with brass cap, marked



No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W.of cor.


- 45.40 Ascend 91 ft., over SW. slope. Fence, brs.N.10°W. and S.10°E.
- 46.50 Ridge, brs.NW. and SE. Descend 55 ft., over NE.slope.
- 52.90 Ascend 45 ft., over E. slope.
- 59.00 Descend 140 ft., over NE.slope.
- 76.60 Wash, 10 lks.wide, course S, 10°E. Ascend 55 ft., over SW. slope, to
- 80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 20 ins. in the ground to bed rock, supported in a mound of stone, for cor.of secs.9,10,15 and 16, with brass cap, marked



No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft.high, W.of cor.

Land, mountainous.  
Soil, rocky, 4th rate.  
Timber, juniper.  
Undergrowth, buck brush and scrub oak.

- 40.00 S.89°56'E., on random line, bet. secs.10 and 15. Set temp. $\frac{1}{4}$  sec.cor.
- 79.88 Fall 9 lks. N. of the cor.of secs.10,11,14 and 15. Thence, N.89°52'W., on true line, bet.secs.10 and 15. Over mountainous land, thru. scattering timber and dense undergrowth.
- 2.10 Descend 32 ft., over W.slope. Wash, 20 lks.wide, in gulch, course S.
- 35.50 Ascend 255 ft., over NE. slope. Bend in ridge, from N. to SE.
- 39.94 Descend 85 ft., over steep W.slope, to Set an iron post, 3 ft.long, 1 in. in diam., 15 ins. in the ground, supported in a mound of stone, for  $\frac{1}{4}$  sec.cor. of secs.10 and 15, with brass cap, marked



No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft.high, N.of cor.

- 44.70 Descend 168 ft., over W.slope. Wash, 20 lks.wide, in gulch, course S. Ascend 433 ft., over steep E.slope.

## BOOK 3660

## 46. Survey of Subdivision lines of Township 14 North, Range 2 East.

Chains.

- 70.40 Ridge, brs. N. 10° W., and S. 10° E.  
Descend 210 ft., over steep SW. slope, to
- 79.88 The cor. of secs. 9, 10, 15 and 16.  
Land, mountainous.  
Soil, rocky, 4th rate.  
Timber, juniper.  
Undergrowth, scrub oak and buck brush.
- 
- N. 0° 2' W., on true line, bet. secs. 9 and 10.  
Over mountainous land, thru. scattering timber and dense undergrowth.  
Ascend 687 ft., over steep SW. slope.
- 29.70 Ridge, brs. NW. and SE.  
Descend 229 ft., over NW. slope.
- 37.20 Wash, 20 lks. wide, in gulch, course E. near head.  
Ascend 50 ft., over steep south slope, to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec. cor. of secs. 9 and 10; with brass cap, marked
- $\frac{1}{4}$   
S 9 | S 10  
1923
- No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
- 47.00 Ascend 115 ft., over S. slope.  
Spur, slopes E. Enter dense timber, brs. E. and W.  
Descend 175 ft., over N. slope.
- 63.10 Wash, 10 lks. wide, in gulch, course E. Leave dense timber, brs. E. and W.  
Ascend 182 ft., over SW. slope, to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 3, 4, 9 and 10, with brass cap, marked
- T14N | R2 E  
S 4 | S 3  
S 9 | S 10  
1923
- No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
Land, mountainous.  
Soil, rocky, 4th rate.  
Timber, pine and juniper.  
Undergrowth, scrub oak and buck brush.
- 
- S. 89° 52' E., on a random line, bet. secs. 3 and 10.  
Set temp.  $\frac{1}{4}$  sec. cor.
- 40.00 80.00 Fall 16 lks. S. of the cor. of secs. 2, 3, 10 and 11.  
Thence,  
N. 89° 59' W., on true line, bet. secs. 3 and 10.  
Over mountainous land, thru. scattering timber and dense undergrowth.  
Ascend 13 ft., over NE. slope.
- 0.42 Ridge, brs. W. and SE.  
Ascend 75 ft., along top of ridge, to
- 8.80 Leave top of ridge, brs. NW. and E. A spur, slopes S. from this point.  
Descend 233 ft., over SW. slope.
- 24.30 Wash, 20 lks. wide in gulch, course S.  
Ascend 116 ft., over E. slope.
- 30.00 Spur, slopes S.  
Descend 46 ft., over W. slope.
- 35.70 Wash, 20 lks. wide, course S.  
Ascend 51 ft., over SE. slope, to




Survey of Subdivision lines of Township 14 North, Range 2 East. 47

Chains.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec. cor. of secs. 3 and 10, with brass cap, marked

$\frac{1}{4}$  S 3  
 S 10  
 11923

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.  
 Ascend 96 ft., over SE slope:  
 56.90 Spur, slopes S.  
 Descend 106 ft. over W. slope.  
 64.80 Wash, 20 lks. wide, in gulch, course S.  
 Ascend 289 ft., over E. slope.  
 78.90 Spur, slopes SE.  
 Descend 8 ft., over SW slope, to  
 80.00 The cor. of secs. 3, 4, 9 and 10.  
 Land, mountainous.  
 Soil, rocky, 4th rate.  
 Timber, yellow pine and juniper.  
 Undergrowth, scrub oak and buck brush.

N. 0° 2' W., on random line, bet. secs. 3 and 4  
 40.00 Set temp,  $\frac{1}{4}$  sec. cor.  
 62.30 Fall 22 lks. W. of the cor. of secs. 3 and 4, on the N. bdy. of the Tp., hereinbefore described.  
 Thence,  
 S. 0° 11' W., on true line, bet. secs. 3 and 4.  
 Over mountainous land; thru. dense timber and undergrowth.  
 Ascend slightly over E. slope, to  
 .50 Wash, 10 lks. wide, course NE.  
 Ascend 220 ft., over NE. slope.  
 15.10 Ridge, brs. N. 70° E. and S. 70° W. Leave dense, and enter scattering timber.  
 Descend 100 ft., over SE. slope, to  
 22.30 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bed rock, supported in a mound of stone for  $\frac{1}{4}$  sec. cor. of secs. 3 and 4; with brass cap, marked



from which,  
 A juniper, 12 ins. in diam., brs. N. 74 $\frac{1}{2}$ ° E., 52 lks. dist., marked  $\frac{1}{4}$  S 3 BT.  
 A yellow pine, 6 ins. in diam., brs. S. 32 $\frac{1}{4}$ ° W., 153 lks. dist., marked  $\frac{1}{4}$  S 4 BT.

Descend 111 ft., over SE. slope.  
 25.30 Leave scattering, and enter dense timber, brs. E. and W.  
 28.50 Wash, 10 lks. wide, in gulch, course E.  
 Ascend 47 ft., over NE. slope.  
 31.80 Spur, slopes E.  
 Descend 18 ft., over S. slope.  
 35.10 Wash, 10 lks. wide, course E.  
 Ascend 100 ft., over N. slope.  
 39.50 An oak, 12 ins. in diam., on line. Cut two notches on each of N. and S. faces.  
 44.30 Ridge, brs. N. 70° E. and S. 70° W. Leave dense, and enter scattering timber.  
 Descend 197 ft., over steep S. slope.  
 54.70 Wash, 10 lks. wide, course SE.  
 Ascend 46 ft., over NE. slope.  
 61.30 Spur, slopes SE.  
 Descend 10 ft., over SW. slope, to  
 62.30 The cor. of secs. 3, 4, 9 and 10.  
 Land, mountainous.  
 Soil, rocky, 4th rate.

# BOOK 3660


48 Survey of Subdivision lines of T.14 North, Range 2 East.

Chains.

Timber, yellow pine and juniper.  
Undergrowth, buck brush, scrub oak and mountain mahogany.


-----  
From the reestablished cor. of secs. 32 and 33, on the S. by. of the Tp., hereinbefore described, N.0°2'W., on true line, bet. secs. 32 and 33. Over nearly level land, thru. very scattering timber and dense undergrowth.

- 7.50 Ascend slightly over W. slope.
- 13.00 Road, Camp Verde to Dewey, brs. E. and W. Wash, 10 lks. wide, course S.10° W. Leave timber.
- 32.84 Ascend slightly over S. slope, to Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec. cor. of secs. 32 and 33, with brass cap, marked



No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Leave nearly level, and enter gently rolling land.

- 52.15 Ascend 72 ft., over S. slope. Point of spur, slopes SE.
- 59.22 Descend 23 ft., over NE. slope. Wash, 10 lks. wide, course SE. near head.
- 64.35 Ascend 58 ft., over S. slope. Spur, slopes E.
- 69.34 Descend 25 ft., over N. slope. Wash, 10 lks. wide, course NE. near head.
- 72.84 Ascend 25 ft., over SE. slope, to Intersect the Governing Section Line at a point 16 lks. W. of the temp. cor. of secs. 28, 29, 32 and 33. At point of intersection, set an iron post, 3 ft. long, 2 ins. in diam., 14 ins. in the ground, to bed rock, supported in a mound of stone, for cor. of secs. 28, 29, 32 and 33, with brass cap, marked



No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Land, nearly level and rolling. Soil, rocky, 4th rate. Timber, oak and mesquite. Undergrowth, scrub oak and buck brush.

-----  
From the cor. of secs. 27, 28, 33 and 34, West, on true line, on Governing Section Line, bet. secs. 28 and 33.

- 25.00 Over rolling land, thru. dense undergrowth. Descend 65 ft., over S. and SW. slopes.
- 25.80 Road, brs. N. and S.
- 30.10 Fence, brs. N. and S.
- 32.50 Enter cultivated field, brs. N. and S.
- 33.00 Leave cultivated field, brs. N. and S. Wash, 25 lks. wide, course S.
- 34.70 Ascend 20 ft., over E. slope to  $\frac{1}{4}$  sec. cor. Fence, brs. N. and S.
- 40.05 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of secs. 28 and 33, with brass cap,

BOOK 3660

Survey of Subdivision Lines of Township 14 North Range 2 East. 49

Chains.

marked,

$\frac{1}{4}$  S 28  
S 33  
1923

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor. Ascend 15 ft., over E. slope.

46.70 Low spur, slopes S. Descend 18 ft., over W. slope.

56.70 Wash, 30 lks. wide, course S. Ascend 84 ft., over E. slope.

72.00 Low spur, slopes NE. Ascend 15 ft., over N. slope, to

75.50 Wash, 10 lks. wide, course NE. Ascend 49 ft., over SE. slope, to

80.10 The cor. of secs. 28, 29, 32 and 33. Land, rolling. Soil, black sandy loam, 2nd rate in a strip about 10 chs. wide along wash in E.  $\frac{1}{4}$ ; elsewhere, gravelly and rocky, 3rd and 4th rate. Timber, none. Undergrowth, scrub oak and buck brush.

N. 0° 2' W., on true line, bet. secs. 28 and 29. Over rolling land, thru. dense undergrowth. Ascend 16 ft., over SE. slope, to

7.90 Wash, 15 lks. wide, course SE. near head. Ascend 27 ft., over SE. slope.

16.60 Descend 23 ft., over NE. slope. Leave dense, and enter scattering undergrowth, brs. NE. and SW.

21.70 Ascend gradually over E. slope, to

37.30 Wash, 12 lks. wide, course SE. Ascend 20 ft., over SW. slope, to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground, to bed rock, supported in a mound of stone, for  $\frac{1}{4}$  sec. cor. of secs. 28 and 29, with brass cap, marked

$\frac{1}{4}$   
S 29 | S 28  
1923

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Ascend 160 ft., over SW. and W. slopes to sec. cor.

65.00 Leave scattering, and enter dense undergrowth, brs. NE. and SW.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 16 ins. in the ground to bedrock, supported in a mound of stone, for cor. of secs. 20, 21, 28 and 29, with brass cap, marked

T14N R2'E  
S20 | S21  
S29 | S28  
1923

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Land, rolling. Soil, rocky, 4th rate. Timber, none. Undergrowth, scrub oak and buck brush.

East, on random line, bet. secs. 21 and 28.

40.00 Set temp.  $\frac{1}{4}$  sec. cor..

79.98 Fall 2 lks. S. of the cor. of secs. 21, 22, 27 and 28.

# BOOK 3660

## 50 Survey of Subdivision lines of Township 14 North, Range 2 East.

Chains.

Thence,  
 S.89°59'W., on true line, bet. secs.21 and 28.  
 Over rolling land, thru. dense undergrowth.  
 Descend 17 ft., over W.slope.  
 2.90 Wash, 10 lks.wide, course S.  
 Descend slightly over S.slope, to  
 16.80 Wash, 10 lks.wide, course S.  
 Ascend gradually over SE. and S.slopes, to  
 39.99 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins.in.  
 the ground, for  $\frac{1}{4}$  sec.cor. of secs.21 and 28, with  
 brass cap, marked

$\frac{1}{4}$  S 21  
 S 28  
 1923

No bearing trees available. Raise a mound of stone 3 ft.  
 base, 2 ft.high, N.of cor.  
 Ascend 12 ft., over S.slope.  
 42.09 Descend 55 ft., over SW.slope.  
 58.10 Wash, 20 lks.wide, course S.  
 Ascend 19 ft., over E.slope.  
 67.00 Low spur, slopes S.  
 Descend 10 ft., over W.slope.  
 70.20 Wash, 10 lks.wide, course S.  
 Ascend 46 ft., over E.slope.  
 78.70 Spur, slopes S.10°E.from N.  
 Descend 8 ft., over W.slope, to  
 79.98 The cor.of secs.20, 21, 28 and 29.  
 Land, rolling.  
 Soil, rocky, 4th rate.  
 Timber, none.  
 Undergrowth, scrub oak and buck brush.

N.0°2'W., on a true line, bet. secs.20 and 21.  
 Over rolling land, thru. dense undergrowth.  
 Ascend 38 ft., over W.slope.  
 17.50 Fence, brs. E.and W.  
 23.19 Leave rolling, and enter mountainous land.  
 Ascend 196 ft., over SW.slope, to  
 40.00 Set an iron post 3 ft.long, 1 in. in diam., 16 ins. in  
 the ground to bed rock, supported in a mound of stone,  
 for  $\frac{1}{4}$  sec.cor. of secs. 20 and 21, with brass cap,  
 marked

$\frac{1}{4}$   
 S20 | S21  
 1923

No bearing trees available. Raise a mound of stone, 3 ft.  
 base, 2 ft.high, W.of cor.  
 Ascend 348 ft., over SW.slope.  
 67.30 Ridge, brs.N.10°W. and S.10°E.  
 Ascend 37 ft., over E.slope, to  
 80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 16 ins. in  
 the ground, to bed rock, supported in a mound of stone,  
 for cor.of secs. 16, 17, 20 and 21, with brass cap,  
 marked

T14N | R2E  
 S17 | S16  
 S20 | S21  
 1923

No bearing trees available. Raise a mound of stone, 3 ft.  
 base, 2 ft. high, W.of cor.  
 Land, rolling and mountainous.  
 Soil, rocky, 4th rate.  
 Timber, none.  
 Undergrowth, buck brush and scrub oak.

Survey of Subdivision lines of Township 14 North, Range 2 East. 51

Chains.

N.89°59'E., on random line, bet. secs.16 and 21.  
 40.00 Set temp.  $\frac{1}{4}$  sec.cor.  
 80.06 Fall 10 lks.N.of the cor.of secs. 15,16, 21 and 22.  
 Thence,  
 N.89°57'W., on true line, bet. secs.16 and 21.  
 Over mountainous land, thru. dense undergrowth.  
 Ascend 100 ft., over SE.slope.  
 8.60 Descend 22 ft., over S.slope.  
 11.50 Ascend 34 ft., over SE.slope.  
 16.00 Ascend 98 ft., over E.slope.  
 22.65 Spur, slopes SE.  
 Descend 141 ft., over SW.slope.  
 38.15 Wash, 10 lks.wide, course S.  
 Ascend 27 ft., over E.slope, to  
 40.03 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins.in  
 the ground, for  $\frac{1}{4}$  sec.cor. of secs.16 and 21, with brass  
 cap, marked

$\frac{1}{4}$  S 16  
 S 21  
 1923

No bearing trees available: Raise a mound of stone, 3-ft.  
 base, 2 ft.high, N.of cor.  
 Ascend 46 ft., over E.slope.  
 45.05 Spur, slopes S.  
 Descend 76 ft., over W.slope.  
 50.85 Wash, 20 lks.wide, course S.  
 Ascend 29 ft., over E.slope.  
 55.05 Spur, slopes S.  
 Descend 40 ft., over SW.slope.  
 58.45 Wash, 10 lks.wide, course S.  
 Ascend 136 ft., over SE.slope.  
 76.85 Spur, slopes S.  
 Descend 43 ft., over W.slope.  
 79.65 Wash, 5 lks.wide, course SE. near head.  
 Ascend 10 ft. over E slope, to  
 80.06 The cor. of secs. 16,17,20 and 21.  
 Land, mountainous.  
 Soil, rocky, 4th rate:  
 Timber, none.  
 Undergrowth, scrub oak and buck brush,

N.0°2'W., on true line, bet. secs.16 and 17.  
 Over mountainous land, thru. dense undergrowth.  
 Ascend 234 ft., over SE.slope.  
 20.00 Ridge, brs.NE. and SW.  
 Descend 40 ft., over NW.slope.  
 25.50 Ascend 83 ft., over W.slope.  
 31.60 Descend 42 ft., over NW.slope, to  
 40.00 Set an iron post, 3 ft.long; 1 in. in diam., 26 ins.in  
 the ground, for  $\frac{1}{4}$  sec.cor. of secs. 16 and 17, with  
 brass cap, marked

$\frac{1}{4}$   
 S17 | S16  
 1923

No bearing trees available. Raise a mound of stone, 3  
 ft.base, 2 ft. high, W.of cor.  
 Descend 303 ft., over NW. slope.  
 64.30 Wash, 20 lks.wide, course W. Old road, brs, E. and W.  
 Ascend 227 ft., over SW. slope, to  
 80.00 Set an iron post, 3 ft.long, 2 ins.in diam., 26 ins.in  
 the ground, for cor.of secs.8,9,16 and 17, with brass  
 cap, marked

TL4N | R2 E  
 S 8 | S 9  
 S17 | S16  
 1923

## BOOK 3660

52 Survey of Subdivision lines of Township 14 North, Range 2 East.

Chains.

No bearing trees available.  
 Raise a mound of stone, 3 ft. base, .2 ft. high, W. of cor.  
 Land, mountainous.  
 Soil, rocky, 4th rate.  
 Timber, none.  
 Undergrowth, scrub oak and buck brush.

40.00 S. 89° 57' E., on random line, bet. secs. 9 and 16.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.02 Fall 5 lks. S. of the cor. of secs. 9, 10, 15 and 16.  
 Thence,  
 N. 89° 59' W., on true line, bet. secs. 9 and 16.  
 Over mountainous land, thru. scattering timber and dense  
 undergrowth.  
 1.30 Descend 33 ft., over W. slope.  
 Wash, 10 lks. wide, course S.  
 Ascend 461 ft., over E. slope.  
 20.00 Fence brs. N. and S.  
 23.00 Ridge, brs. N. and SE.  
 40.01 Descend 414 ft., over W. slope, to  
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
 the ground, for  $\frac{1}{4}$  sec. cor. of secs. 9 and 16, with brass  
 cap, marked

S 9  
 S 16  
 1923

No bearing trees available. Raise a mound of stone, 3 ft.  
 base, 2 ft. high, N. of cor.  
 41.00 Descend 15 ft., over W. slope.  
 Wash, 20 lks. wide, in gulch, course S.  
 Ascend 193 ft., over E. slope.  
 55.60 Ridge, brs. N. and S.  
 Descend 138 ft., over W. slope.  
 56.20 Old road, brs. N. and S.  
 57.50 Old mine, brs. N. about 8 chs. dist.  
 61.20 Wash, 10 lks. wide, course SW.  
 Ascend 96 ft., over SE. slope.  
 71.50 Spur, slopes S.  
 Descend 74 ft., over SW. slope, to  
 80.02 The cor. of secs. 8, 9, 16 and 17.  
 Land, mountainous.  
 Soil, rocky, 4th rate.  
 Timber, walnut and cedar.  
 Undergrowth, scrub oak and buck brush.

N. 0° 2' W., on true line, bet. secs. 8 and 9.  
 Over mountainous land, thru. scattering timber and dense  
 undergrowth.  
 1.00 Ascend 10 ft., over SW. slope.  
 Spur, slopes W.  
 Descend 137 ft., over N. slope.  
 8.70 Wash, 10 lks. wide, course W.  
 Ascend 52 ft., over S. slope.  
 12.30 Spur, slopes W.  
 Descend 92 ft., over N. slope.  
 26.10 Wash, 10 lks. wide, course W.  
 Ascend 260 ft., over S. slope.  
 37.50 Ridge, brs. E. and W.  
 Descend 25 ft., over NW. slope, to  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
 the ground, for  $\frac{1}{4}$  sec. cor. of secs. 8 and 9, with brass  
 cap, marked

S 8 | S 9  
 1923

BOCK 3660

Survey of Subdivision lines of Township 14 North, Range 2 East. 53

Chains. No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Desc. 105 ft. over NW. slope.  
 48.40 Wash, 10 lks. wide, course W. Asc. 110 ft., over SW. slope.  
 53.00 Spur, slopes W. Desc. 91 ft., over N. slope.  
 56.40 Wash, 10 lks. wide, course W. Asc. 270 ft. over S. & SW. slopes.  
 78.20 Descend 31 ft., over NW. slope, to  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 14 ins. in the ground, to bed rock, supported in a mound of stone, for cor. of secs. 4, 5, 8 and 9, with brass cap, marked

T14N | R2 E  
 S 5 | S 4  
 S 8 | S 9  
 1923

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
 Land, mountainous.  
 Soil, rocky, 4th rate.  
 Timber, juniper. Undergrowth, scrub oak and buck brush.

40.00 S. 89° 59' E., on random line, bet. secs. 4 and 9.  
 Set temp. 1/4 sec. cor.  
 79.94 Fall 9 lks. S. of the cor. of secs. 3, 4, 9 and 10.  
 Thence,  
 S. 89° 57' W., on true line, bet. secs. 4 and 9.  
 Over mountainous land, thru scattering timber and dense undergrowth. Desc. 10 ft., over SW. slope.  
 0.51 Ascend 11 ft., over S. slope.  
 1.55 Ascend 57 ft., over SE. slope.  
 5.85 Wire fence, brs. N. and S.  
 6.45 Spur, slopes S. Desc. 114 ft., over steep W. slope.  
 10.85 Wash, 10 lks. wide, in gulch, course SW.  
 Ascend 105 ft., over SE. slope.  
 18.85 Spur, slopes S. Desc. 127 ft., over SW. slope.  
 28.75 Wash, 10 lks. wide, course SE. Asc. 83 ft., over E. slope, to  
 39.97 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor. of secs. 4 and 9, with brass cap, marked

S 4  
 S 9  
 1923

No bearing trees available.  
 Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.  
 Ascend 31 ft., over E. slope.  
 42.95 Ridge, brs. N. and S. Desc. 263 ft., over W. slope.  
 51.55 Wash, 10 lks. wide, in gulch, course NW. Asc. 68 ft. over NE. slope.  
 54.95 Spur, slopes NW. Desc. 114 ft., over W. slope.  
 59.45 Wash, 10 lks. wide in gulch, course NW. Asc. 47 ft. over NE. slope.  
 61.95 Spur, slopes NW. Desc. 196 ft., over steep W. slope.  
 67.45 Wash, 10 lks. wide, course NW. Asc. 31 ft., over NE. slope.  
 69.95 Point of spur, slopes N. Desc. 89 ft., over steep NW. slope.  
 72.75 Wash, 10 lks. wide, in gulch, course N.  
 Ascend 160 ft., over E. slope.  
 78.35 Point of spur, slopes N. 20° W. Desc. 28 ft., over NW. slope, to  
 79.94 The cor. of secs. 4, 5, 8 and 9.  
 Land, mountainous. Soil, rocky, 4th rate.  
 Timber, yellow pine, juniper and white oak.  
 Undergrowth, scrub oak, manzanita and mountain mahogany.

N. 0° 2' W., on random line, bet. secs. 4 and 5.  
 40.00 Set temp. 1/4 sec. cor.  
 62.25 Fall 21 lks. W. of the cor. of secs. 4 and 5, on the N. bdy. of the Tp., hereinbefore described.  
 Thence,  
 S. 0° 7' W., on true line, bet. secs. 4 and 5.  
 Over mountainous land, thru scattering timber and dense undergrowth. Asc. 82 ft., over E. slope, to  
 8.55 Wash, 10 lks. wide, course E. near head.  
 Ascend 70 ft., over NE. slope.  
 12.75 Point of spur, slopes E. Desc. 116 ft., over S. slope, to  
 22.25 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in

# BOOK 3660

## 34 Survey of Subdivision lines of Township 14 North, Range 2 East, Chains.

the ground to bedrock, supported in a mound of stone, for  $\frac{1}{4}$  sec.cor.of secs. 4 and 5, with brass cap, marked

+  
S 5 | S 4  
1923

from which,

A juniper, 8 ins. in diam., brs. S. 50° E., 154 lks. dist., marked  $\frac{1}{4}$  S 4 BT.

A juniper, 12 ins. in diam., brs. N. 15° W., 143 lks. dist., marked  $\frac{1}{4}$  S 5 BT.

Descend 104 ft., over SW. slope.

31.75 Head of gulch, course W. Asc. 31 ft., over N. slope.

33.75 Spur, slopes W. Desc. 361 ft., over S. slope.

52.00 Road, brs. E. and W.

52.25 Grapevine wash, 50 lks. wide, course W. Asc. 328 ft. over NW. slope, to

62.25 The cor. of secs. 4, 5, 8 and 9.

Land, mountainous. Soil, rocky, 4th rate.

Timber, yellow pine, juniper and oak.

Undergrowth, scrub oak, manzanita and mountain mahogany.

-----  
From the reestablished cor. of secs. 31 and 32, on S. bdy. of the Tp., hereinbefore described,

N. 0° 3' W., on true line, bet. secs. 31 and 32.

Over gently rolling land, thru. very scattering timber and dense undergrowth. Asc. 17 ft., over SE. slope.

6.20 Low ridge, brs. NE. and SW. Desc. 39 ft., over NW. slope.

14.80 Wash, 25 lks. wide, course NW. Asc. 40 ft. over SW. slope, to

32.88 Set an iron post 3 ft. long, 1 in. in diam., 16 ins. in the ground to bed rock, supported in a mound of stone, for  $\frac{1}{4}$  sec. cor. of secs. 31 and 32, with brass cap, marked

+  
S 31 | S 32  
1923

No bearing trees available.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Ascend 35 ft., over SW. and S. slopes.

60.80 Spur, slopes SW. Desc. 48 ft., over NW. slope.

71.34 Wash, 60 lks. wide, course SW. Asc. slightly over SW. slope to sec. cor.

71.98 Wire fence, brs. E. and W.

72.88 Intersect the Governing Section Line at a point 12 lks. W. from the temp. cor. of secs. 29, 30, 31 and 32.

At point of intersection, set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 29, 30, 31 and 32, with brass cap, marked

T14N | R2 E  
S30 | S29  
S31 | S32  
1923

from which,

A cottonwood, 4 ins. in diam., brs. N. 30° 05' W., 45 lks. dist., marked BT.

No other bearing tree available. Raise a mound of stone 3 ft. base, 2 ft. high, W. of cor.

A well brs. S. 65° W., 107 lks. dist.

Land, gently rolling. Soil, rocky, 4th rate.

Timber, oak, mesquite and cottonwood.

Undergrowth, scrub oak and cactus.

-----  
From the cor. of secs. 28, 29, 32 and 33,

West on true line, on Governing Sec. Line, bet. secs. 29 & 32.

Over rolling land, thru. dense undergrowth.

Ascend 40 ft., over E. slope.

4.70 Ridge, brs. N. and S. Desc. 63 ft., over W. slope.

29.50 Fence, brs. N. and S.

31.40 Enter cultivated field, brs. N. and S.

33.10 Leave cultivated field, brs. N. and S.

33.90 Wash, 25 lks. wide, course S. Asc. 12 ft. over E. slope, to  $\frac{1}{4}$  sec. cor.

39.90 Enter cultivated field, brs. N. and S.

39.98 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the



Survey of Subdivision lines of Township 14 North, Range 2 East. 55

Chains.

ground for  $\frac{1}{4}$  sec.cor. of secs. 29 and 32, with brass cap, marked

$\frac{1}{4}$  S 29  
S 32  
1923

No bearing trees available. Raise a mound of stone 3 ft. base, 2 ft. high, N. of cor.

Ascend 33 ft., over E. slope.

41.20 Leave cultivated field, brs. N. and S.

43.90 Wire fence, brs. N. and S.

47.40 Road, brs. NW and SE.

52.50 Ridge, brs. N. and S. Desc. 88 ft., over W. slope, to

64.00 Wash, 20 lks. wide, course S. 70° W.

Descend 24 ft., over SW. slope, to

77.20 Wash, 30 lks. wide, course SW.

Descend slightly over SW. slope to sec. cor.

77.40 Fence brs. NE. and SW.

78.30 Fence, brs. N. and S.

79.96 Intersect the cor. of secs. 29, 30, 31 and 32.

Land, rolling.

Soil, sandy, gravelly and rocky, 2nd and 3rd rate.

Timber, none.

Undergrowth, scrub oak.

West, on random line, bet. secs. 30 and 31.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.08 Fall 12 lks. N. of the reestablished cor. of secs. 30 and 31, on W. bdy. of the Tp., hereinbefore described.

Thence

N. 89° 55' E., on true line, on Governing Sec. Line, bet. secs. 30 and 31.

Over mountainous land, thru. dense undergrowth.

Ascend 78 ft., over NW. slope.

0.28 Telephone line, brs. N. 10° E. and S. 10° W.

1.13 Power transmission line, brs. N. 10° E. and S. 10° W.

6.00 Spur, slopes SW. Desc. 110 ft., over SE. slope.

8.10 Fence, brs. N. and S.

16.80 Wash, 30 lks. wide, course SW. Enter rolling land.

Ascend 70 ft., over SW. slope.

22.60 Spur, slopes S. Desc. 52 ft., over E. slope, to

39.08 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of secs. 30 and 31, with brass cap, marked

$\frac{1}{4}$  S 30  
S 31  
1923

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Descend 22 ft., over E. slope.

46.00 Wash, 10 lks. wide, course S. Asc. 18 ft., over W. slope.

56.10 Spur, slopes S. Desc. 96 ft., over SE. slope.

57.70 Road, brs. N. and S.

67.30 Same road, brs. NW. and SE.

72.80 Wash, 90 lks. wide, course SW. Asc. 137 ft. over SW. slope to sec. cor.

74.20 Wire fence, brs. NE. and SW.

77.10 Wire fence, brs. N. and S.

77.70 House of Daniel McGilleland, 12x14 ft. on line at this point.

79.08 The cor. of secs. 29, 30, 31 and 32.

Land, mountainous and rolling.

Soil, sandy, gravelly and rocky, 2nd and 3rd rate.

Timber, none.

Undergrowth, scrub oak.

N. 0° 3' W., on true line, bet. secs. 29 and 30.

Over rolling land, thru. scattering undergrowth.

Ascend 45 ft., over SW. slope.

# BOOK 3660

## 56 Survey of Subdivision lines of Township 14 North, Range 2 East.

Chains.

- 2.20 Garage brs.E. 20 lks.dist.
- 3.00 Fence, brs.NW. and SE.
- 3.60 Fence, brs.NE. and SW.
- 3.80 Road, brs.E.and W. Enter dense undergrowth.
- 10.10 Point of low spur, slopes SW.  
Ascend 20 ft., over W.slope, to
- 19.40 Wash, 50 lks.wide, course SW.  
Ascend 35 ft., over SE.slope, to
- 40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in  
the ground, for  $\frac{1}{4}$  sec.cor. of secs. 29 and 30, with  
brass cap, marked

$\frac{1}{4}$   
 S30 | S29  
 1923

- No bearing trees available. Raise a mound of stone, 3 ft.  
base, 2 ft.high, W.of cor.  
Ascend 6 ft., over SE.slope, to
- 40.90 Wash, 10 lks.wide, course SE.  
Ascend 69 ft., over SE.slope.
- 46.70 Road, brs.NE. and SW.
- 50.80 Same road, brs.NW. and SE.
- 51.40 Same road, brs.NE. and SW.
- 62.00 Same road, brs. NW. and SE.
- 62.60 Wash 20 lks.wide, course SE. Enter mountainous land.  
Ascend 90 ft., over SW.slope.
- 69.40 Point of spur, slopes SW.  
Descend 32 ft., over W.slope, to
- 80.00 Set an iron post, 3 ft.long, 2 ins.in diam., 26 ins. in  
the ground, for cor.of secs.19, 20, 29 and 30, with  
brass cap, marked

T14N | R2 E  
 S19 | S20  
 S30 | S29  
 1923

from which,  
 A willow, 5 ins.in diam., brs.S.  $33^{\circ}W.$ , 86  
 lks.dist., marked T14N R2E S30 BT.  
 No other bearing trees available. Raise a mound  
 of stone, 3 ft:base; 2 ft.high, W.of cor.

Land, rolling and mountainous:  
 Soil, rocky, 3rd rate.  
 Timber, none, except a few willows at N.end of line.  
 Undergrowth, scrub oak and buck brush.

- 
- 40.00 East, on random line, bet. secs. 20 and 29.  
Set temp.  $\frac{1}{4}$  sec.cor.
  - 79.88 Intersect the cor.of secs. 20, 21; 28 and 29.

Thence,  
 West, on true line, bet. secs. 20 and 29.  
 Over rolling land, thru. dense undergrowth.

- 9.80 Descend 80 ft., over W.slope.  
Wash, 10 lks.wide, course S.  
Ascend 43 ft., over E.slope.
- 22.90 Spur, slopes S.  
Descend 76 ft., over W.slope.
- 37.90 Wash, 10 lks.wide, course S.  
Ascend 16 ft., over E.slope, to
- 39.94 Set an iron post, 3 ft.long, 1 in.in diam., 18 ins.in the  
ground, to bed rock, supported in a mound of stone, for  
 $\frac{1}{4}$  sec.cor.of secs. 20 and 29, with brass cap, marked

$\frac{1}{4}$  S 20  
 S 29  
 1923

Survey of Subdivision lines of Township 14 North Range 2 East. 57

Chains.	No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor. Ascend 10 ft., over E. slope.
42.05	Spur, slopes S. Descend 107 ft., over W. slope.
69.10	Wash, 10 lks. wide, course S. Enter mountainous land. Ascend 45 ft., over E. slope.
75.40	Spur, slopes S. Descend 61 ft., over W. slope, to
79.88	The cor. of secs. 19, 20, 29 and 30. Land, rolling and mountainous. Soil, rocky, 4th rate. Timber, none. Undergrowth, scrub oak and buck brush.
-----	
40.00	S. 89° 55' W., on random line, bet. secs. 19 and 30. Set temp. $\frac{1}{4}$ sec. cor.
77.90	Fall 32 lks. S. of the reestablished cor. of secs. 19 and 30, on W. bdy. of the Tp., hereinbefore described. Thence, S. 89° 51' E., on true line, bet. secs. 19 and 30. Over mountainous land, thru. dense undergrowth. Ascend slightly over S. slope.
1.45	Descend 34 ft., over SE. slope.
6.00	Wash, 10 lks. wide, course SW. Ascend 85 ft., over NW. slope.
13.30	Spur, slopes SW. Descend 54 ft., over SE. slope.
13.76	Intersect W. side line (1-2) of "Chicago" patented lode mining claim, Mineral Survey No. 1411, at a point 11.29 chs. S. 10° 00' W. from cor. No. 1 thereof. Thence across patented mining claims.
21.00	Wash, 10 lks. wide, course SW. Ascend 147 ft., over W. slope.
24.60	Telephone line, brs. N. and S.
26.00	Power transmission line, brs. N. and S.
32.21	Intersect E. side line (3-4) of "Brooklyn" patented lode mining claim, Mineral Survey No. 1411 at a point 7.99 chs. S. 10° W. from cor. No. 4 thereof. Leave patented mineral land.
36.00	Spur, slopes S. Descend 15 ft., over E. slope, to
37.90	Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bed rock, supported in a mound of stone for $\frac{1}{4}$ sec. cor. of secs. 19 and 30, with brass cap, marked
	$\frac{1}{4}$ S 19 S 30 1923
	No bearing trees available. Raise a mound of stone 3 ft. base, 2 ft. high, N. of cor. Descend 42 ft., over E. slope.
49.30	Wash, 20 lks. wide, course S. Ascend 85 ft., over W. slope.
56.30	Spur, slopes S. Descend 65 ft., over E. slope.
61.10	Fence, brs. N. 20° E. and S. 20° W.
62.30	Road, brs. N. and S.
64.70	Wash, 20 lks. wide, course SE. Ascend 27 ft., over W. slope.
70.70	Spur, slopes S. Descend 58 ft., over E. slope.
76.90	Wash, 20 lks. wide, course S, in gulch, known as "Texas" Gulch. Ascend 14 ft., over W. slope, to
77.90	The cor. of secs. 19, 20, 29 and 30. Land, mountainous. Soil, rocky, 4th rate.

# BOOK 3660

## 58 Survey of Subdivision lines of Township 14 North, Range 2 East.

Chains.

Timber, none.  
Undergrowth, scrub oak and buck brush.

N.0° 3'W., on true line, bet. secs.19 and 20.  
Over mountainous land, thru. dense undergrowth.  
Ascend 28 ft. over W. slope.  
2.70 Old road, brs.N.30°E. and S.30°W.  
6.00 Wash, 20 lks.wide, course SW. in gulch, known as "Texas"  
gulch.  
Ascend 232 ft., over SE.slope.  
13.40 Wire fence, brs.E.and W.  
38.50 Spur.slopes SE.  
Descend 10 ft., over E.slope, to  
40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins.in  
the ground, for  $\frac{1}{4}$  sec.cor. of secs.19 and 20, with  
brass cap, marked

PLAN 1/2  
S19 | S20  
S19 | S20  
1923

No bearing trees available. Raise a mound of stone, 3 ft.  
base, 2 ft.high, W.of cor.  
44.50 Descend 20 ft. over E.slope, to  
Saddle in ridge, brs. NE. and SW.  
53.00 Descend 99 ft., over N.slope.  
Head of draw, course W.  
72.40 Ascend 324 ft., over SW.slope.  
Spur, slopes W.  
80.00 Descend 76 ft.; over NW.slope, to  
Set an iron post, 3 ft.long, 2 ins.in diam., 26 ins. in the  
ground, for cor.of secs. 17, 18, 19 and 20, with brass  
cap, marked

T14N | R2 E  
S18 | S17  
S19 | S20  
1923

No bearing trees available. Raise a mound of stone, 3 ft.  
base, 2 ft. high, W.of cor.  
Land, mountainous. Soil, rocky, 4th rate.  
Timber, none.  
Undergrowth, scrub oak and buck brush.

East, on random line, bet. secs.17 and 20.  
40.00 Set temp.  $\frac{1}{4}$  sec.cor.  
79.98 Fall 12 lks.S. of the cor.of secs. 16, 17, 20 and 21.  
Thence,  
S.89°55'W., on true line, bet. secs.17 and 20.  
Over mountainous land, thru. dense undergrowth.  
Ascend 91 ft., over E.slope.  
5.00 Ridge, brs.N. and S.  
Descend 294 ft., over W.slope.  
21.95 Wash, 15 lks.wide in gulch, course S.  
Ascend 69 ft., over E.slope.  
28.80 Ridge, brs.N.and S.  
Descend 195 ft., over W.slope, to  
39.99 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in the  
ground, for  $\frac{1}{4}$  sec.cor. of secs.17 and 20, with brass  
cap, marked

S 17  
S 20  
1923

No bearing trees available. Raise a mound of stone, 3 ft.

Survey of Subdivision lines of Township 14 North, Range 2 East.

Chains base, 2 ft. high, N. of cor.  
 Descend 190 ft., over W. slope.  
 50.60 Center of wash, 200 lks. wide, course SW., in gulch,  
 known as "Texas" gulch. Ascend 261 ft., over SE. slope.  
 74.20 Ridge, brs. NE. and SW.  
 Descend 154 ft., over steep W. slope, to  
 79.98 Intersect the cor. of secs. 17, 18, 19 and 20.  
 Land, mountainous.  
 Soil, rocky, 4th rate.  
 Timber, none.  
 Undergrowth, scrub oak and buck brush.

N. 89° 51' W., on random line, bet. secs. 18 and 19.  
 40.00 Set temp. 1/4 sec. cor.  
 76.64 Fall 16 lks. N. of the reestablished cor. of secs. 18 and  
 19, on the W. bdy. of the Tp., hereinbefore described.  
 Thence,  
 S. 89° 58' E., on true line, bet. secs. 18 and 19.  
 Over mountainous land, thru dense undergrowth.  
 Descend 59 ft., over SE. slope.  
 6.15 Wash, 10 lks. wide, course SW.  
 Ascend 137 ft., over NW. slope.  
 17.65 Spur, slopes SW. Descend 79 ft., over SE. slope.  
 26.25 Wash, 20 lks. wide, course SW.  
 Ascend 63 ft., over W. slope.  
 33.45 Telephone line, brs. N. and S.  
 34.65 Spur, slopes SW. Power transmission line, brs. N. and S.  
 35.45 Dim road, brs. NE. and SW. Desc. 12 ft. SE. slope to 1/4 sec. cor.  
 36.64 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
 the ground, for 1/4 sec. cor. of secs. 18 and 19, with  
 brass cap marked.

1/4 S 18  
 S 19  
 1923

No bearing trees available. Raise a mound of stone, 3  
 ft. base, 2 ft. high; N. of cor.  
 Descend 10 ft. over SE. slope.  
 39.65 Wash, 30 lks. wide, course SW.  
 Ascend 270 ft., over W. slope to sec. cor.  
 55.45 Road, brs. N. 20° E. and South.  
 76.64 The cor. of secs. 17, 18, 19 and 20.  
 Land, mountainous.  
 Soil, rocky, 4th rate.  
 Timber, none.  
 Undergrowth, scrub oak and buck brush.

N. 0° 3' W., on true line, bet. secs. 17 and 18.  
 Over mountainous land, thru dense undergrowth.  
 Ascend 24 ft., over W. slope.  
 3.75 Descend 85 ft., over NW. slope.  
 12.60 Wash, 10 lks. wide, course W.  
 Ascend 82 ft., over SW. slope.  
 24.00 Spur, slopes NW. Descend 177 ft., over N. slope.  
 33.00 Head of gulch, course W.  
 Ascend 154 ft., over S. and SW. slopes to  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
 the ground, for 1/4 sec. cor. of secs. 17 and 18, with  
 brass cap marked.

1/4 S 18 | S 17  
 1923

No bearing trees available. Raise a mound of stone, 3  
 ft. base, 2 ft. high, W. of cor.

## 60 BOOK 3660

## Survey of Subdivision lines of Township 14 North, Range 2 East.

Chains	Ascend 12 ft., over SW. slope.
42.00	Spur, slopes W. Descend 149 ft., over NW. slope.
51.70	Wash, 15 lks. wide in gulch, course W. Ascend 94 ft., over SW. slope.
59.00	Spur, slopes W. Descend 78 ft., over NW. slope.
74.00	Wash, 10 lks. wide, course W. Ascend 30 ft., over S. slope to
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 7, 8, 17 and 18, with brass cap marked
	T 14 N R 2 E S 7   S 8 S 18   S 17 1923
	No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
	Land, mountainous.
	Soil, rocky, 4th rate.
	Timber, none.
	Undergrowth, scrub oak and buck brush.
	-----
	N. 89° 55' E., on a random line, bet. secs. 8 and 17.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.18	Intersect the cor. of secs. 8, 9, 16 and 17. Thence
	S. 89° 55' W., on true line, bet. secs. 8 and 17. Over mountainous land, thru scattering timber and dense undergrowth. Descend over SW. slope, 426 ft.
13.03	Intersect line 3-4 of the Euna Gwendolin claim, M. S. 2050 at S. 21° 39' W., 6.36 chs. from Cor. 4.
17.30	Wash, 10 lks. wide, course NW. Ascend 56 ft., over NE. slope.
22.20	Point of spur, slopes NW. Descend 186 ft., over W. slope to
35.38	Old road, brs. N. and SW.
35.60	Grapevine wash, 50 lks. wide, course SW. Descend 16 ft., over SW. slope, to
37.59	Intersect line 1-2 of the Kansas claim, M. S. 1521, at S. 68° 21' E., 5.30 chs. from Cor. 1.
38.90	Same wash, course N. 60° W. Ascend 8 ft., over NE. slope to $\frac{1}{4}$ sec. cor.
39.98	Old road, brs. NW. and SE.
40.09	Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. of secs. 8 and 17, with brass cap marked
	$\frac{1}{4}$ $\frac{S 8}{S 17}$ 1923
	from which
	A walnut, 4 ins. in diam., brs. N. 54° W., 105 lks. dist., marked BT.
	A walnut, 4 ins. in diam., brs. S. 75° E., 140 lks. dist., marked B T.
	Ascend 161 ft., over NE. slope
44.08	Intersect line 2-3 of the Prudential claim, M. S. 2050, at S. 31° 29' W., 2.41 chs. from Cor. 3.
48.94	Point of spur, slopes NE. Descend 21 ft., over NW. slope.
53.40	Ascend 90 ft., over NE. slope.
54.69	Intersect line 1-4 of the Prudential claim, M. S. 2050, at S. 31° 29' W., 6.32 chs. from Cor. 4.
63.20	Spur, slopes N.

BOOK 3660

## Survey of Subdivision lines of Township 14 North, Range 2 East. 61

Chains.

- 80.18 Descend 302 ft., over W.slope, to  
The cor. of secs. 7, 8, 17 and 18.  
Land, mountainous.  
Soil, rocky, 4th rate.  
Timber, walnut and oak.  
Undergrowth, scrub oak.
- 
- 40.00 N. 89° 58' W., on random line, bet. secs. 7 and 18.  
Set temp.  $\frac{1}{4}$  sec. cor.
- 75.29 Fall 10 lks. N. of the reestablished cor. of secs. 7 and 18,  
on the W. bdy. of the Tp., hereinbefore described.  
Thence  
N. 89° 58' E., on a true line, bet. secs. 7 and 18.  
Over gently rolling land, thru. scattering undergrowth.  
Ascend gradually over W. slope.
- 7.50 Old road, brs. NE. and SW. Asc. gradually over SW. slope.
- 21.40 Road, brs. NE. and SW. Enter dense undergrowth.  
Descend gradually over S. slope to  $\frac{1}{4}$  sec. cor.
- 31.80 Telephone line, brs. N. and S.
- 33.30 Power transmission line, brs. N. and S.
- 35.29 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor. of secs. 7 and 18, with brass  
cap, marked

$$\frac{1}{4} \text{ S } 7$$

$$\text{S } 18$$

$$1923$$

- No bearing trees available. Raise a mound of stone 3 ft.  
base, 2 ft. high, N. of cor.
- 38.20 Descend slightly over SE. slope.
- 56.10 Wash, 10 lks. wide, course SW. Asc. 104 ft., over NW. slope.  
Spur, slopes SW.
- 67.50 Descend 35 ft., over SE. slope.
- 71.00 Wash, 5 lks. wide, course S. Asc. 92 ft., over W. slope to  
sec. cor.
- 75.29 Road, brs. N. 5° W. and S. 5° E.  
The cor. of secs. 7, 8, 17 and 18.  
Land, gently rolling and mountainous.  
Soil, rocky, 4th rate.  
Timber, none.  
Undergrowth, scrub oak and buck brush.

- 
- N. 0° 3' W., on a true line, bet. secs. 7 and 8.  
Over mountainous land, thru. very scattering timber and  
dense undergrowth.
- 12.10 Descend 25 ft., over W. slope.
- 13.20 Descend 46 ft., over NW. slope.
- 14.10 Road, brs. E. and SW.
- 16.50 Cabin and windmill, brs. W. about 10 chs. dist.  
Grapevine wash, 50 lks. wide, course W.  
Ascend 97 ft., over S. slope.
- 24.00 Spur, slopes SW.  
Descend 49 ft., over NW. slope.
- 35.00 Wash, 15 lks. wide, course SW.  
Ascend 22 ft., over SE. slope, to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor. of secs. 7 and 8, with brass cap,  
marked

$$\frac{1}{4}$$

$$\text{S } 7 \text{ S } 8$$

$$1923$$

No bearing trees available. Raise a mound of stone, 3 ft.  
base, 2 ft. high, W. of cor.

## BOOK 3660

62 Survey of Subdivision lines of Township 14 North, Range 2 East.

Chains.

50.70 Ascend 60 ft., over SE.slope.  
Spur, slopes SW.

52.80 Descend 22 ft., over NW.slope.  
Wash, 10 lks.wide, course SW.

66.39 Ascend 246 ft., over SW.slope to sec.cor.  
Intersect E. side line (2-3) of "Arizona Central" patented  
lode mining claim, Mineral Survey No. 3013 at a point  
7.86 chs. S.17°W. from cor. No. 2 thereof. Thence across  
patented mining claims.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in  
the ground, for cor. of secs. 5, 6, 7 and 8, with brass  
cap, marked

T14N R2 E  
S 6 S 5  
S 7 S 8  
1923

No bearing trees available. Raise a mound of stone, 3 ft.  
base, 2 ft. high, W. of cor.  
Land, mountainous.  
Soil, rocky, 4th. rate.  
Timber, willow.  
Undergrowth, scrub oak and buck brush.

40.00 N. 89° 55' E., on random line, bet. secs. 5 and 8.  
Set temp.  $\frac{1}{4}$  sec. cor. on line, bet. secs. 5 and 8.

80.22 Fall 5 lks. N. of the cor. of secs. 4, 5, 8 and 9.  
Thence,  
S. 89° 57' W., on true line, bet. secs. 5 and 8.  
Over mountainous land, thru. very scattering timber and  
dense undergrowth.

13.50 Descend 418 ft., over W. slope.  
Grapevine wash, 30 lks. wide in gulch, of same name,  
course S. 10° W.

14.20 Ascend 603 ft., over steep E. slope.  
Old road, brs. N. 10° E. and S. 10° W.

34.20 Spur, slopes S.

40.11 Descend 60 ft., over SW. slope, to  
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
the ground for  $\frac{1}{4}$  sec. cor. of secs. 5 and 8, with brass  
cap, marked

$\frac{1}{4}$  S 5  
S 8  
1923

No bearing trees available. Raise a mound of stone, 3 ft.  
base, 2 ft. high, N. of cor.

46.10 Descend 107 ft., over SW. slope.  
Wash, 10 lks. wide, in gulch, course S.

54.10 Ascend 112 ft., over SE. slope.  
Ridge, brs. NE. and S.

68.34 Descend 465 ft., over SW. and S. slopes,  
Intersect E. side line (2-3) of "Cincinnati" patented lode  
mining claim, Mineral Survey No. 3013, at a point 10.12  
chs. S. 9° 1' W., from cor. No. 2 thereof. Thence across  
patented mining claims.

74.20 Point of spur, slopes SW.

80.22 Descend 117 ft., over W. slope, to  
The cor. of secs. 5, 6, 7 and 8.  
Land, mountainous. Soil, rocky, 4th rate.  
Timber, willow and juniper.  
Undergrowth, scrub oak and buck brush.

40.00 S. 89° 58' W., on random line, bet. secs. 6 and 7.  
Set temp.  $\frac{1}{4}$  sec. cor.

74.10 Fall 7 lks. N. of the reestablished cor. of secs. 6 and 7, on  
the W. bdy. of the Tp., hereinbefore described.  
Thence,



## Survey of Subdivision lines of Township 14 North, Range 2 East 63

Chains.	
	N.89°55'E., on true line, bet. secs.6 and 7. Over rolling land, thru. very scattering timber and dense undergrowth. Ascend 33 ft., over NW.slope. Ridge, brs.N. and SW.
17.10	Descend 15 ft., over SE.slope, to
23.20	Wash, 20 lks.wide, course SW. Ascend slightly over SW.slope, to
25.90	Wash, 10 lks.wide, course SW. Ascend 20 ft., over W. slope to $\frac{1}{4}$ sec.cor.
29.90	Telephone line, brs.N. and S.
31.30	Power Transmission line, brs.N. and S.
34.10	Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec.cor.of secs. 6 and 7, with brass cap, marked
	$\frac{1}{4} S \ 6$ $S \ 7$ 1923
	No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft.high, N.of cor.
46.60	Ascend 93 ft., over W.slope. Ridge, brs.N. and SW.
48.90	Descend 25 ft., over E.slope. Wash, 10 lks.wide, course SW. Enter mountainous land.
55.10	Ascend 55 ft., over SW. slope. Ridge, brs.N. and S.
59.80	Descend 25 ft., over E.slope. Wash, 10 lks.wide, in gulch, course SW. Old road, brs.NE. and SW.
61.30	Ascend 144 ft., over steep W.slope. Intersect S. end line (3-4) of "Blue Horse" patented lode mining claim, Mineral Survey No.3013 at a point 1.90 chs.S.68°E.from cor.No.4 thereof. Thence across patented mining claims.
66.10	Ridge, brs.N.10°E. and S.10°W. Descend 81 ft., over steep E. slope.
69.00	Wash, 10 lks.wide, in gulch, course SW. Ascend 114 ft., over W.slope, to
74.10	The cor.of secs.5,6,7 and 8. Land, rolling and mountainous. Soil, rocky, 4th rate. Timber, willow and juniper. Undergrowth, scrub oak and buck brush.
	-----
40.00	N.0°3'W., on random line, bet. secs.5 and 6. Set temp. $\frac{1}{4}$ sec.cor.
62.25	Fall 7 lks.E. of the cor.of secs.5 and 6, on the N.bdy. of the Tp., hereinbefore described. Thence, S.0°7'E., on a true line, bet. secs.5 and 6. Over mountainous land, thru. very scattering timber and dense undergrowth.
2.95	Descend 207 ft., over SW.slope. Intersect W. side line (1-2) of "Bucky O'Neil No.2" patented lode mining claim, Mineral Survey No.3013 at a point 7.39 chs. S.11°31'W.from cor.No.2 thereof. Thence across patented mining claims.
8.35	Wash, 10 lks.wide, course SW. Ascend 36 ft., over NW.slope.
13.25	Point of spur, slopes W. Descend 59 ft., over SW.slope.
17.25	Wash, 10 lks.wide, course W. Ascend 20 ft., over NW. slope to $\frac{1}{4}$ sec.cor.
21.75	From this point a mine shaft 10x10x50 ft.brs.W.72 lks. dist.
22.25	Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec.cor. of secs.5 and 6, with brass cap, marked

# BOOK 3660

## 64 Survey of Subdivision lines of Township 14 North, Range 2 East.

Chains.

S 6<sup>1</sup>/<sub>4</sub> S. 5  
1923

- No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
- 28.25 Descend 30 ft., over SW. slope.
- Wash, 20 lks. wide, course W.
- 33.05 Ascend 18 ft., over NW. slope.
- Road, brs. NW and SE.
- 37.20 Spur, slopes SW. Old mining camp mess house on line at this point.
- Descend 92 ft., over S. and SW. slopes.
- 38.00 Mine shaft, brs. E. about 4 chs. dist.
- 39.25 Power transmission line, brs. E. and W.
- 40.00 East end of four bunk houses in a row, bearing E. and W., brs. W., about 2 chs. dist.
- 55.10 Wash, 10 lks. wide, course SW.
- Ascend 26 ft., over W. slope to sec. cor.
- 62.25 The cor. of secs. 5, 6, 7 and 8.
- Land, mountainous.
- Soil, rocky, 4th rate.
- Timber, juniper.
- Undergrowth, scrub oak and buck brush.

The continued satisfactory adjustment of the solar apparatus of the instruments used in the execution of the resurveys and surveys described in the foregoing notes is indicated from field tests described in Book "D" of this group.

### GENERAL DESCRIPTION.

This township is situated in the Black Hills, bet. the Agua Fria and Verde Rivers, and lies partly within the Prescott Forest Reserve.

Ash Creek, with a general southerly course, drains the greater part of the Tp.

Grapevine wash, carrying an intermittent stream of water drains the NW. cor.

The elevation ranges from 3000 ft. in the south, to 5,500 ft. in the extreme northern part.

The soil under cultivation is black, sandy loam and 2nd rate in grade. Elsewhere, the soil is a rocky, 3rd and 4th rate.

The timber in the south half of the township is scattering juniper, with a growth of willows and cottonwood along the principal washes. In the northern part can be found a thick growth of yellow pine and oak.

The slopes throughout are covered with dense oak and buck brush, and in the north sections, thickets of manzanita and mountain mahogany.

Mine shafts, tunnels, and other improvements evidence the presence of mineral, especially copper.

Water can be found in a well, owned by W. Wilkins, in sec. 7, a spring of good water at the Bottle Ranch, in sec. 24, owned by Wm. West, who also has improvements, consisting of houses, barns, orchards and fences in secs. 13 and 24. The same class of improvements can be found in secs. 29 and 30, owned by Daniel McGilleland, who resides thereon, Joe Starneck in sec. 33, and Joe Scisorilla, in sec. 35, who also reside in the township.

The south, east and west parts of the township are traversed by fair wagon roads, the Bewey-Camp Verde Highway crosses the S. edge of the Tp.; the road in the NW however, cannot be traveled by wagons beyond Wilkins well.

The lands are best suited for grazing and mining.



CERTIFICATE OF UNITED STATES ~~SURVEYOR~~ <sup>TRANSITMAN</sup>

I, Ty White, U. S. ~~Surveyor~~ <sup>Transitman</sup>, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 120, Arizona bearing date of the 26th day of May, 1922, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, <sup>re</sup> surveyed all those parts or portions of the East boundary of Township 14 North Range 1 East and the South boundary of Township 14 North, Range 2 East and surveyed all those parts or portions the East boundary and subdivision lines of Township 14 North, Range 2 East of the Gila & Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes <sup>and by diagram on page 1 hereof</sup> as having been executed by me, and under my direction; and that all the corners of <sup>said resurvey and</sup> survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 120, Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such <sup>resurvey and survey</sup>.

Place... Long Beach, Calif.  
Date... July, 27, 1925

Ty White

U. S. ~~Surveyor~~  
Transitman.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

191

The foregoing field notes of the survey of

executed by

under his special instructions dated \_\_\_\_\_, 191\_\_\_\_, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above-described surveys in \_\_\_\_\_, has been correctly copied from the original notes on file in this office.

U. S. Surveyor General.

BOOK 3660

**FIELD ASSISTANTS.to**

**Benjamin J.Kinsey, U.S.Transitman.**

NAMES.	CAPACITY.
John W. Malzacher,	1st chainman,
Frank Burgess,	2nd chainman,
Carl Anderson,	2nd chainman
Stephen Pool,	2nd chainman,
Homer Pepper,	Cornerman,
H.L.Alexander,	axman,
Stephen Pool,	flagman,
Marshall Walton,	flagman.

CERTIFICATE OF UNITED STATES SURVEYOR

TRANSITMAN

I, Benjamin J. Kinsey, U.S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 120, Arizona, bearing date of the 26th day of May, 1922, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the East boundary of Township 14 North, Range 1 East and surveyed all those parts or portions of the North boundary and Subdivision lines of Township 14 North, Range 2 East of the Gila & Salt River

Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes and by diagram on page 1 hereof as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 120, Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey and survey.

Place Phoenix, Arizona. Date APR 14 1925

Benjamin J. Kinsey U.S. Surveyor

APPROVAL.

OFFICE OF THE U.S. SUPERVISOR OF SURVEYS.

Denver, Colorado, August 13, 1925

The foregoing field notes of the resurvey of the East boundary of Township 14 North, Range 1 East and South boundary of Township 14 North, Range 2 East; and of the survey of the East boundary, North boundary and Subdivision lines of TOWNSHIP 14 NORTH, RANGE 2 EAST,

of the Gila and Salt River Base and Meridian, in the State of Arizona,

executed by Benjamin J. Kinsey, and Ty White, U.S. Transitmen, under his special instructions dated May 26, 1922, for Group 120, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U.S. Supervisor of Surveys

I certify that the foregoing transcript of the field notes of the above-described surveys in has been correctly copied from the original notes on file in this office.