

3662

Book "E"
4-879

3208 2008

BOOK 3662 FIELD NOTES

RE-
OF THE SURVEY OF THE

East boundary,

North boundary, and

Part of the West boundary,

and Survey of

Part of the West boundary, and

Subdivision lines,

ALL OF TOWNSHIP 14 NORTH, RANGE 6 EAST,

Of the Gila and Salt River Base and Meridian,

In the State of Arizona.

EXECUTED BY

William B. Kimmel, U.S.C.E.,

and

Benjamin J. Kinsey and Ty White, U.S. Transitmen,

In the capacity of U. S. Surveyors, under Special Instructions dated May 26, 1922, issued by the United States Surveyor General to govern surveys included in Group No. 120, Arizona, which were approved by the Commissioner of the General Land Office, June 23, 1922 and Assignment Instructions dated May 26, 1923.


Resurvey and Survey commenced August 16, 1923.

Resurvey and Survey completed September 21, 1923.

3662

3662

INDEX DIAGRAM.

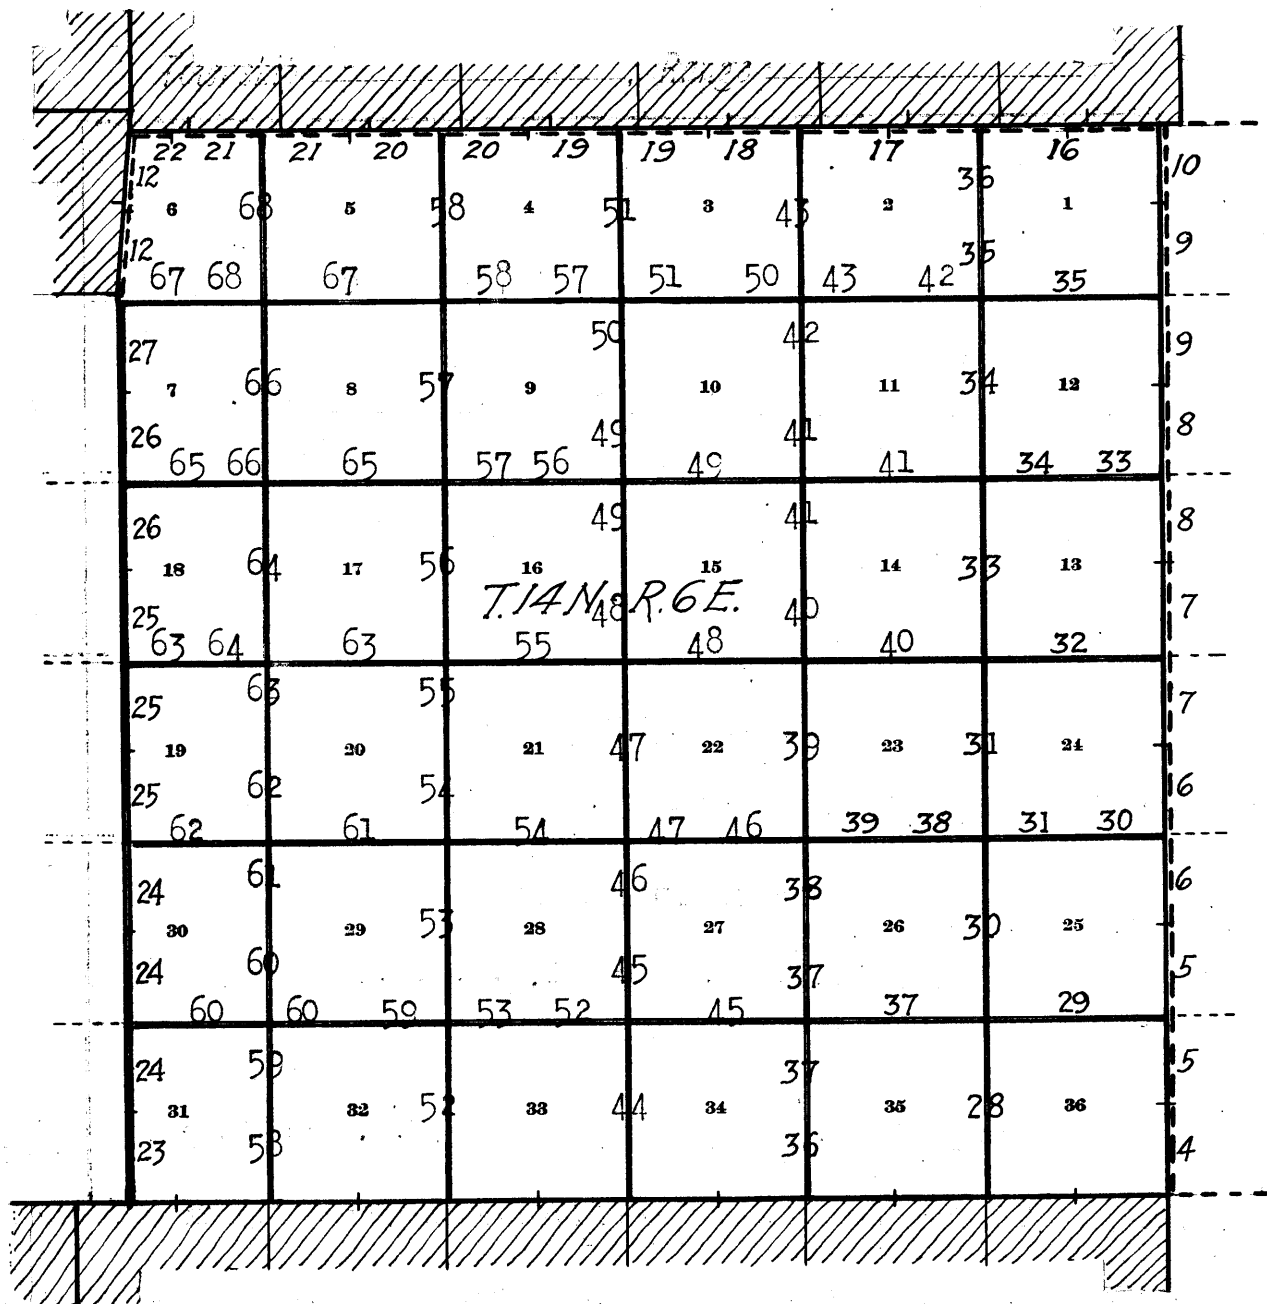

- Lines surveyed under this group.
- Lines resurveyed under this group.
- Accepted surveys.
- Unsurveyed.
- //// Areas surveyed as per accepted plats on file.

BOOK 3662

1 B

Book "E"

Group 120 - Arizona.

Township 14 North, Range 6 East.

DATE DIAGRAM.

1923.

9-21	9-15 6 9-21	9-14 9-14	9-15 5 9-14	9-15 4 9-12	9-15 3 9-11	9-10 2 9-10	9-4 1 9-5	9-3
9-21	7 9-21	9-14 9-13	8 9-12	9 9-12	10 9-8	11 9-3	12 9-4, 9-1	9-3
9-21	18 9-21	9-13 9-6	17 9-12	16 9-7	15 9-7	14 8-30	13 9-3, 8-30	9-1
9-21	19 9-21	9-6 9-6	20 8-17	21 9-7	22 9-7	23 8-30	24 8-28, 8-29	8-30
9-21	30 9-20	9-6 8-16	29 8-17	28 8-17	27 8-24	26 8-24	25 8-27	8-29
9-20	21 8-16	32 8-16	31 8-16	33 9-5	34 8-29	35 8-24, 8-27	36 8-27	8-28

- Surveyed by W.B.Kimmel, U.S.C.E. on dates shown thereon.
- - - - - Resurveyed by W.B.Kimmel, U.S.C.E. on dates shown thereon.
- Surveyed by Ty White, U.S.T. on dates shown thereon.
- - - - - Resurveyed by Ty White, U.S.T. on dates shown thereon.
- Surveyed by B. J. Kinsey, U.S.T. on dates shown thereon.
- Accepted surveys.

The resurveys and surveys hereinafter described, were executed on dates shown on diagram on page 1 hereof, by William B. Kimmel, U.S. Cadastral Engineer, and Benjamin J. Kinsey and Ty White, U.S. Transitmen, using respectively, Gurley Light Mountain Transit No. 20120, equipped with a full vertical circle and a Burt solar attachment, Buff "Rocky Mountain Favorite" transit No. 9940, with U-shaped standards, $4\frac{1}{2}$ in. horizontal circle, 4 in. vertical circle, and improved Smith solar attachment, and Young and Sons transit No. 8540, with full vertical circle and improved Smith solar attachment.

Unless otherwise specified, all azimuth determinations are accomplished with the solar attachments.

PRELIMINARY FIELD TEST OF BUFF TRANSIT NO. 9940 AND YOUNG AND SONS TRANSIT NO. 8540, BY KINSEY AND WHITE.

Aug. 12, 1923: We examine the adjustment of each instrument, and find no errors; then, to test the solar apparatus by comparing its indications during a.m. and p.m. hours, with a meridian determined by Polaris observations, Aug. 7, 1923, at camp near cor. of secs. 10, 11, 14 and 15, T. 13 N., R. 5 E., as described in Book "D" of this group, proceed with each instrument as follows:

- At 9h. 00m. a.m., l.m.t., set off $34^{\circ}41\frac{1}{2}'N.$ on the lat. arc; $15^{\circ}10'N.$ on the decl. arc, and determine a meridian with the solar, which agrees with the true meridian.
- At app. noon, with the lat. arc unchanged, observe the sun on the meridian, obtaining a reading of $15^{\circ}7\frac{1}{2}'N.$, which agrees with the computed declination of the sun.
- At 3h. 00m. p.m., l.m.t., with the lat. arc unchanged, set off $15^{\circ}5\frac{1}{2}'N.$ on the decl. arc, and determine a meridian with the solar, which agrees with the true meridian.

The above described tests demonstrate that both instruments are in satisfactory adjustment for the execution of the surveys hereinafter described.

PRELIMINARY FIELD TEST OF GURLEY TRANSIT NO. 20120, BY Wm. B. KIMMEL, U. S. C. E.

Aug. 21, 1923: Examine the adjustment of the instrument, and correct all errors; then, to test the solar apparatus by comparing its indications from observations made during a.m. and p.m. hours, with a meridian determined by Polaris observation, proceed as follows:

- At camp, near cor. of secs. 10, 11, 14 and 15, T. 13 N., R. 5 E., G. & S. R. B. & M., Arizona; latitude, $34^{\circ}41'34''N.$, longitude, $112^{\circ}48'W.$ at same station used by Kinsey and White in establishing meridian by Polaris observation on Aug. 7, 1923, as described in Book "D" of this group; at 6h. 45m. p.m., l.m.t., make an hour angle observation on Polaris east of the meridian, making four observations, two each with the telescope in direct and reversed positions, and mark the mean point in the line thus determined, by a tack in a stake driven firmly in the ground, about 5 chs. N. of instrument.

Aug. 22, 1923: Lay off the azimuth of Polaris, $0^{\circ}59'$ to the west, and mark the meridian thus determined by a tack in a stake driven firmly in the ground about 5 chs. N., which meridian is found to coincide with the one established at this point Aug. 7, 1923 by Kinsey and White.

At 9h.00m.a.m., l.m.t., set off $36^{\circ}41\frac{1}{2}'$ N. on the lat.arc; $11^{\circ}59\frac{1}{2}'$ N. on the decl.arc, and determine a meridian with the solar, which agrees with the true meridian.

At app.noon, with the lat.arc unchanged, observe the sun on the meridian, obtaining a reading of $11^{\circ}57'$ N. on the decl.arc, which agrees with the computed declination of the sun.

At 3h.00m.p.m., l.m.t., with the lat.arc unchanged set off $11^{\circ}54\frac{1}{2}'$ N. on the decl.arc, and determine a meridian with the solar, which agrees with the true meridian.

As all of the observations made during the usual hours of solar work come within $1'30''$ of the true meridian, conclude that the adjustment of the instrument is satisfactory.

All measurements are made with Lufkin steel tapes 5 chs. in length, compared with a Chesterman standard steel tape, and found correct. The measurements are made on the slope, the vertical angles determined with clinometer, and the slope measurements properly reduced to true horizontal distances.

BOOK 3662

4 Resurvey of East bdy. of Township 14 North, Range 6 East.

Chains.

This township boundary was surveyed in 1903, by W.H.Thorn, U.S.S. as a boundary of what was then known as the "Black Mesa" Forest Reserve, and also as a Range line bet. Ts.14 N., Rs.6 and 7 E., establishing the $\frac{1}{4}$ sec. and sec.cor.monuments thereon at proper intervals with a common reference to areas on both sides of the line.

The township cor. at each end of the line, and all of the sec.cor. monuments on line were monumented with iron posts capped with brass caps, which were designated as boundary posts and consecutively numbered from south to north.

In view of the fact that the land on both sides of this line is now Forest Reserve and unsurveyed, the original designation of the Tp. and sec.cor. monuments as Forest Reserve Boundary posts is erroneous, and the line is subject to rectification in every respect.

The following notes describe an independent resurvey of the entire line, destroying all the old $\frac{1}{4}$ sec.cors., removing the old iron post sec.cor. - forest boundary posts, destroying the accessories thereto, and re-establishing all corners on line at 40.00 ch. intervals, counting from the south end of the line.

The old iron posts are reset on line at proper points to monument the reestablished sec.cors., and the marking on the brass caps relating to the Forest Reserve is obliterated, and new iron posts with brass caps are set to monument all reestablished $\frac{1}{4}$ sec.cors.

The cor. of Ts.13 and 14 N., Rs.6 and 7 E., reestablished in 1916 by William H. Richards, Jr., U.S.S. is an iron post $3\frac{1}{2}$ ins. in diam., projecting 32 ins. above ground, firmly set in ground and mound of stone, properly marked on brass cap, and witnessed by three properly marked bearing trees, one each SE, SW, and NW. of cor., and a mound of stone, W. of cor.

Thence,

North, on true line, bet. secs.31 and 36.

Over mountainous land, thru. scattering timber and undergrowth.

3.10 Descend 80 ft., over steep NE. slope, to Gulch, course N.60°W.

9.15 Descend 130 ft., over steep W. slope.

18.40 Descend 197 ft., over NW. slope.

Bottom of canyon, course SW.

Ascend 275 ft., over steep SW. slope to rim of mesa.

37.29 Fall 66 lks. W. of the original $\frac{1}{4}$ sec. cor. of secs.31 and 36, which is a volcanic stone 24x12x8 ins., marked $\frac{1}{4}$ on W. face, set firmly in mound of stone, and witnessed by 2 bearing trees, one each SE. and SW. of cor. Obliterate the marking on stone and bearing trees, and scatter the mound of stone.

39.00 S. rim of mesa, brs. E. and W. Thence over nearly level land on mesa.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground, to bed rock, supported in a mound of stone, for reestablished $\frac{1}{4}$ sec. cor. of secs.31 and 36, with brass cap, marked

$\frac{1}{4}$
S36 | S31

1923

from which,

A juniper, 14 ins. in diam. brs. N.26°W., 167 lks. dist., marked $\frac{1}{4}$ S 36 BT.

A juniper, 6 ins. in diam., brs. S.75°50'E., 142 lks. dist., marked $\frac{1}{4}$ S 31 BT.

Resurvey of East bdy. of Township 14 North, Range 6 East. 5

Chains.


Continue over nearly level land on mesa, thru. scattering timber and undergrowth.

42.00 Enter dense timber, brs.E.and W.

76.00 North rim of mesa, brs.E.and W. Leave mesa. Enter mountainous land.

77.30 Descend 80 ft., over N.slope to reestablished sec.cor. Fall 63 lks.W. of the original cor. of secs.25,30, 31 and 36 and Forest Boundary Post No.76, which is an iron post $3\frac{1}{2}$ ins.in diam., projecting 18 ins. above ground, firmly set in ground and mound of stone with brass cap, bearing proper markings, for the original designation of the monument, and witnessed by four properly marked bearing trees, one each NW., NE., SE. and SW. of cor. Obliterate the marking on all the bearing trees, scatter the mound of stone, remove the iron post, and on line at

80.00 Reset same iron post, 4 ft.long, 24 ins.in the ground, supported in a mound of stone, for reestablished cor. of secs. 25,30, 31 and 36, with the marking on brass cap, changed to read:



- from which,
- A juniper, 24 ins.in diam., brs.N.28 $\frac{3}{4}$ °W., 76 lks. dist., marked T14N R6E S25 BT.
 - A pinyon, 30 ins.in diam., brs.N.25 $\frac{1}{2}$ °E., 43 lks. dist., marked T14N R7E S30 BT.
 - A juniper, 36 ins.in diam., brs.S.52°10'E., 64 lks. dist., marked T14N R7E S31 BT.
 - A juniper, 24 ins.in diam., brs.S.39 $\frac{1}{2}$ °W., 18 lks. dist., marked T14N R6E S36 BT.

Land, mountainous and nearly level.
 Soil, rocky, 4th rate.
 Timber, juniper and pine.
 Undergrowth, scrub oak and cactus.

North, on true line, bet. secs.25 and 30.
 Over mountainous land, thru. scattering timber and undergrowth.

Descend 70 ft., over steep N.slope.


1.80 Wash, 20 lks.wide, course W.in bottom of canyon.

Ascend 160 ft., over steep S.slope, to

9.00 S. rim of mesa, brs.E. and W. Thence over nearly level land on mesa. Enter dense timber, brs.E. and W.

36.87 Fall 61 lks.W. of the original $\frac{1}{4}$ sec.cor.of secs.25 and 30, which is a volcanic stone 26x14x10 ins., firmly set in a mound of stone, marked " $\frac{1}{4}$ " on W. face, and witnessed by two properly marked bearing trees, one each NW and SE. of cor. Obliterate marking on stone and bearing trees, and scatter the mound of stone.

40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins.in the ground, for reestablished $\frac{1}{4}$ sec.cor. of secs.25 and 30, with brass cap, marked



- from which,
- A pine, 14 ins.in diam., brs.N.47 $\frac{1}{4}$ °E., 104 lks.dist., marked $\frac{1}{4}$ S 30 BT.
 - A juniper, 24 ins.in diam., brs.S.83 $\frac{1}{2}$ °W., 69 lks.dist., marked $\frac{1}{4}$ S 25 BT.

BOOK 3662

6 Resurvey of East bdy. of Township 14 North, Range 6 East.

Chains.

- Continue over nearly level land on mesa, thru dense timber and scattering undergrowth.
- 76.95 Fall 59 lks. W. of the original cor. of secs. 19, 24, 25 and 30, and Forest Bdy. Post, No. 77, which is an iron post $3\frac{1}{2}$ ins. in diam., projecting 18 ins. above ground, firmly set in ground, and mound of stone, with brass cap, properly marked for the original designation of the monument, and witnessed by four properly marked bearing trees, one each NW., NE., SE. and SW. of cor. Obliterate the marking on all the bearing trees, scatter the mound of stone, and on line at
- 78.00 Reset the same iron post, 4 ft. long, 20 ins. in the ground to bed rock, supported in a mound of stone, for witness cor. to reestablished cor. of secs. 19, 24, 25 and 30, with the marking on the brass cap, changed to read
- | | |
|------|-----|
| W C | |
| T14N | |
| R6E | R7E |
| S24 | S19 |
| S25 | S30 |
| 1923 | |
- from which,
- A juniper, 14 ins. in diam., brs. N. $29\frac{1}{2}^{\circ}$ W., 7 lks. dist., marked T14N R6E S24 BT.
 - A juniper, 12 ins. in diam., brs. N. $44\frac{1}{4}^{\circ}$ E., 29 lks. dist., marked T14N R7E S19 BT.
 - A juniper, 24 ins. in diam., brs. S. $12^{\circ}40'$ E., 35 lks. dist., marked T14N R7E S30 BT.
 - A pine, 10 ins. in diam., brs. S. 58° W., 145 lks. dist., marked T14N R6E S25 BT.
- 78.30 North rim of mesa, brs. N. 80° E. and S. 80° W. Leave mesa. Enter mountainous land, scattering timber and dense undergrowth.
- 80.00 Descend 80 ft., over precipitous broken N. slope, to True point for reestablishment of the cor. of secs. 19, 24, 25 and 30 falls on almost perpendicular slope, where it is impracticable to monument the cor.; therefore, establish witness cor. at 2.00 chs. S. herefrom, as described above.
- Land, mountainous and nearly level.
Soil, rocky, 4th rate.
Timber, juniper and pine.
Undergrowth, scrub oak and cactus.
-
- From true point, for reestablished cor. of secs. 19, 24, 25 and 30,
North, on true line, bet. secs. 19 and 24.
Over mountainous land, thru scattering timber and dense undergrowth.
- 12.40 Descend 500 ft., over steep broken N. slope.
Wash, 30 lks. wide, course W. in bottom of canyon.
- 26.00 Ascend 400 ft., over steep S. slope.
Spur, slopes W.
- 33.00 Descend 200 ft., over steep NW. slope.
Bottom of canyon, course SW.
- 36.65 Ascend 250 ft., over steep S. slope to $\frac{1}{4}$ sec. cor.
Fall 72 lks. W. of the original $\frac{1}{4}$ sec. cor. of secs. 19 and 24, which is a volcanic stone in place, exposed 24x14x12 ins. above ground, marked with a cross (x) on top, and $\frac{1}{4}$ W. of cross, and witnessed by two properly marked bearing trees, one each NE. and NW. of cor. Obliterate the marking on stone and bearing trees.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground to bed rock, deposit a stone marked with a cross (x) at base of post, and raise a mound of stone around post, for reestablished $\frac{1}{4}$ sec. cor. of secs. 19 and 24, with brass cap, marked

Chains.

S24 | S19
1923

- from which,
A juniper, 12 ins. in diam., brs. N. 5 1/2° W., 27 lks. dist., marked 1/4 S 24 BT.
- A pine, 12 ins. in diam., brs. S. 16 1/4° W., 24 lks. dist., marked 1/4 S 24 BT.
- Ascend 220 ft., over steep S. slope.
- 62.00 Ridge, brs. E. and W.
- Descend 330 ft., over steep NW. slope to reestablished sec. cor.
- 76.45 Fall 76 lks. W. of the original sec. cor. of secs. 13, 18, 19 and 24, and Forest Bdy. Post No. 78, which is an iron post 3 1/2 ins. in diam., projecting 18 ins. above ground, firmly set in ground and mound of stone, properly marked on brass cap, for the original designation of the monument; and witnessed by one bearing tree SW., and four pits, one each NW., NE., SE. and SW. of cor.
- Fill in the pits, scatter the mound of stone, obliterate the marking on the bearing tree, remove the iron post and on line at
- 80.00 Reset same iron post 4 ft. long, 4 ins. in the ground to bed rock, deposit a stone, marked with a cross (x) at base of post, and raise a mound of stone around post, for reestablished cor. of secs. 13, 18, 19 and 24, with marking on brass cap, changed to read?

T14N
R6E | R7E
S13 | S18
S24 | S19
1923

from which
A pine, 8 ins. in diam., brs. S. 6° 06' W., 373 lks. dist., marked T14N R6E S24 BT.

No other bearing trees available.
Land, mountainous.
Soil, rocky, 4th rate.
Timber, juniper and pine.
Undergrowth, scrub oak and cactus.

-
- North, on true line, bet. secs. 13 and 18.
 - Over mountainous land, thru. scattering timber and dense undergrowth.
 - Descend 20 ft., over W. slope, to
 - 9.00 Spur, slopes NW.
 - Descend 340 ft., over steep NE. slope.
 - 28.70 Bottom of canyon, course S. 70° W.
 - Ascend 240 ft., over SE. slope to reestablished 1/4 sec. cor.
 - 36.44 Fall 77 lks. W. of the original 1/4 sec. cor. of secs. 13 and 18, which is a volcanic stone, 24x12x8 ins., marked 1/4 on W. face, firmly set in a mound of stone, and witnessed by two properly marked bearing trees, one each NW. and SW. of cor. Obliterate marking on stone and bearing trees, and scatter the mound of stone.
 - 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bed rock, supported in a mound of stone, for reestablished 1/4 sec. cor. of secs. 13 and 18, with brass cap, marked

S13 | S18
1923

from which,

BOOK 3662

8 Resurvey of East bdy. of Township 14 North, Range 6 East.

Chains.


- A juniper, 14 ins. in diam., brs. N. 56° E., 183 lks. dist., marked $\frac{1}{4}$ S 18 BT.
- A juniper, 20 ins. in diam., brs. S. $48\frac{1}{2}^{\circ}$ W., 51 lks. dist., marked $\frac{1}{4}$ S 13 BT.
- 43.50 Ascend 130 ft., over steep SE. slope, to Top of trap rock, cliff 30 ft. high, brs. E. and W. facing S.
- 45.00 Ascend 30 ft., over gradual S. slope.
- 55.00 Enter dense timber, brs. E. and W. Ridge, brs. E. and W. Enter scattering timber.
- 76.53 Descend 230 ft., over N. slope to reestablished sec. cor. point.
- 80.00 Fall 72 lks. W. of the original cor. of secs. 7, 12, 13 and 18, and Forest Bdy. Post, No. 79, which is an iron post $3\frac{1}{2}$ ins. in diam., projecting 20 ins. above ground, firmly set in ground and mound of stone, with brass cap, properly marked for the original designation of the monument and witnessed by four properly marked bearing trees, one each NW., NE., SE. and SW. of cor. Obliterate the marking on all the bearing trees, scatter the mound of stone, remove the iron post, and reset it on line at 0.50 chs. N. from reestablished point for cor. of said secs. for W.C. thereto, as hereinafter described.
- True point for reestablishment of cor. of secs. 7, 12, 13 and 18 falls in a wash, 15 lks. wide, course SE., where it would be impracticable to set monument; therefore, establish witness cor. at 50 lks. N. as described in the notes of following mile.
- Land, mountainous.
Soil, rocky, 4th rate.
Timber, juniper and pine,
Undergrowth, scrub oak and cactus.
-
- From true point for reestablished cor. of secs. 7, 12, 13 and 18,
North, on true line, bet. secs. 7 and 12.
Over mountainous land, thru. dense timber and scattering undergrowth.
- 0.50 Ascend 520 ft., over steep broken S. slope.
Reset same iron post, which was removed from a point 72 lks. E. from 76.53 ch. station of preceding mile, 4 ft. long, 26 ins. in the ground supported in a mound of stone for witness cor. to reestablished cor. of secs. 7, 12, 13 and 18, with marking on brass cap, changed to read:
- | | |
|------|-----|
| T14N | |
| R6E | R7E |
| S12 | S 7 |
| S13 | S18 |
| W | C |
| 1923 | |
- from which,
- A juniper, 10 ins. in diam., brs. N. 20° W., 45 lks. dist., marked T14N R6E S12 WC BT.
- A juniper, 16 ins. in diam., brs. N. $35\frac{1}{2}^{\circ}$ E., 52 lks. dist., marked T14N R7E S7 WCBT.
- A juniper, 8 ins. in diam., brs. S. 76° E., 133 lks. dist., marked T14N R7E S18 WCBT.
- A juniper, 6 ins. in diam., brs. S. $14\frac{1}{2}^{\circ}$ W., 120 lks. dist., marked T14N R6E S13 WCBT.
- 10.00 Enter scattering timber and dense undergrowth.
- 29.00 Top of trap rock cliff, 40 ft. high, bearing E. and W., facing S.
- 31.00 Top of a peak, brs. W. from this point about 50 lks. dist.
- 34.00 Descend 17 ft., over E. slope, to Descend 130 ft., over steep N. slope to reestablished $\frac{1}{4}$ sec. cor.
- 36.75 Fall 70 lks. W. of the original $\frac{1}{4}$ sec. cor. of secs. 7 and 12, which is a volcanic stone 22x12x12 ins., firmly set in mound of stone, marked $\frac{1}{4}$ on W. face, and witnessed

Resurvey of East bdy. of Township 14 North, Range 6 East. 9

Chains.

by two properly marked bearing trees, one each NE. and NW. of cor. Obliterate marking on stone and bearing trees, and scatter the mound of stone.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., on surface rock, deposit a stone, marked with a cross (x) at base of post, and raise a mound of stone around post, for reestablished $\frac{1}{4}$ sec. cor. of secs. 7 and 12, with brass cap, marked



from which,

A juniper, 16 ins. in diam., brs. S. $43\frac{3}{4}^{\circ}$ E., 106 lks. dist., marked $\frac{1}{4}$ S 7 BT.

A pine, 8 ins. in diam., brs. S. $73\frac{3}{4}^{\circ}$ W., 73 lks. dist., marked $\frac{1}{4}$ S 12 BT.


74.80 Descend 790 ft. over steep broken N. slope. Bottom of gulch, course NE. Ascend 25 ft., over SE. slope.

76.52 Fall 70 lks. W. of the original cor. of secs. 1, 6, 7 and 12, and Forest Bdy. Post No. 80, which is an iron post, $3\frac{1}{2}$ ins. in diam., projecting 18 ins. above ground, firmly set in ground and mound of stone, with brass cap, properly marked, for the original designation of the monument, and witnessed by four properly marked bearing trees, one each NW., NE., SE. and SW. of cor.

Obliterate marking on all the bearing trees, scatter the mound of stone, remove the iron post, and reset it on line at 80.00 ch. station, as hereinafter described.

78.00 Point of spur, slopes E. Descend 20 ft., over NE. slope, to

80.00 Reset the iron post removed from a point 70 lks. E. of 76.52 ch. station, 4 ft. long, 26 ins. in the ground, supported in a mound of stone, for reestablished cor. of secs. 1, 6, 7 and 12, with marking on brass cap, changed to read:



from which,

A pine, 12 ins. in diam., brs. N. $49\frac{3}{4}^{\circ}$ W., 154 lks. dist., marked T14N R6E S1 BT.

A pine, 7 ins. in diam., brs. N. $83\frac{3}{4}^{\circ}$ E., 115 lks. dist., marked T14N R7E S6 BT.

A juniper, 4 ins. in diam., brs. S. $61\frac{1}{2}^{\circ}$ E., 64 lks. dist., marked BT.

A pine, 12 ins. in diam., brs. S. $36\frac{3}{4}^{\circ}$ W., 113 lks. dist., marked T14N R6E S12 BT.

Land, mountainous.
Soil, rocky, 4th rate.
Timber, juniper and pine.
Undergrowth, scrub oak and cactus.

North, on true line, bet. secs. 1 and 6. Over mountainous land, thru. dense timber and undergrowth. Descend 116 ft., over steep NE. slope.

4.50 Dry bed of Spring Creek, .50 lks. wide, course NW. in bottom of canyon of same name.

23.10 Ascend 410 ft., over steep SW. slope, to Top of nearly vertical cliff, 75 ft. high, bearing N. 45° W. and S. 80° E., facing SW., and forming E. or right rim of Spring Creek Canyon. Thence over nearly level land on mesa, thru. scattering undergrowth and dense timber.

BOOK 3662

10 Resurvey of East bdy. of Township 14 North Range 6 East.

Chains.

- 36.49 Fall 75 lks. W. of the original $\frac{1}{4}$ sec. cor. of secs. 1 and 6, which is a volcanic stone 22x12x10 ins., marked $\frac{1}{4}$ on W. face, firmly set in mound of stone, and witnessed by two properly marked bearing trees, one each NE. and SW. of cor. Obliterate marking on stone and bearing trees, and scatter the mound of stone.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bed rock, supported in a mound of stone, for reestablished $\frac{1}{4}$ sec. cor. of secs. 1 and 6, with brass cap, marked



from which,


A juniper, 12 ins. in diam., brs. N. 23° E., 34 lks. dist., marked $\frac{1}{4}$ S 6 BT.

A juniper, 18 ins. in diam., brs. S. 79° 50' W., 144 lks. dist., marked $\frac{1}{4}$ S 1 BT.

Continue over nearly level land on mesa, thru. dense timber and scattering undergrowth.

- 76.55 Intersect the S. bdy. of T. 15 N., R. 6 E. at a point 70 lks. W. of the cor. of Ts. 14 N., Rs. 6 and 7 E. and Forest Bdy. Post No. 81, which is an iron post $3\frac{1}{2}$ ins. in diam., projecting 18 ins. above ground, firmly set in the ground and mound of stone, with brass cap, properly marked and witnessed by two properly marked bearing trees, one each SE. and SW. of cor. This monument was set by W.H. Thorn, U.S.S. in 1903 as cor. of Ts. 14 and 15 N., Rs. 6 and 7 E., and Forest Bdy. Post No. 81, and witnessed it by four bearing trees, one each NE., SE., SW. and NW. of cor. In 1904, J.F. Hesse, U.S.D.S. completed the survey of the E. bdy. of T. 15 N., R. 6 E., re-established the cor. of Ts. 15 N., Rs. 6 and 7 E. at 9.50 chs. E. from the original cor. of Ts. 14 and 15 N., Rs. 6 and 7 E., and altered the latter cor. to its present designation by obliterating the marking on the NE. and NW. bearing trees, and the marking on the brass cap which referred to areas in T. 15 N. This cor. now becomes only an angle point on S. bdy. of T. 15 N., R. 6 E.; therefore, obliterate the marking on the brass cap, and bearing trees, and mark "AP" on brass cap, and "APBT" on each of the bearing trees.

At point of intersection, set an iron post, 3 ft. long and 2 ins. in diam., 8 ins. in the ground to bed rock, deposit a stone marked with a cross (x) at base of post and raise a mound of stone around post for closing cor. of Ts. 14 N., Rs. 6 and 7 E., with brass cap, marked



from which,

A juniper, 15 ins. in diam., brs. S. 21° 50' E., 174 lks. dist., marked T14N R7E S6 CC BT.

A juniper, 18 ins. in diam., brs. S. 79° 50' W., 144 lks. dist., marked T14N R6E S1 CC BT.

Land, mountainous and nearly level.
 Soil, rocky, 4th rate.
 Timber, juniper and pine.
 Undergrowth, scrub oak and cactus.

Chains.

The north one mile of the West bdy. of T.14 N., R.6 E., surveyed by C.B. Foster, U.S.D.S. in 1876, establishing the sec.cor., and $\frac{1}{4}$ sec.cor. thereon with a common reference to areas both sides of the line, and same surveyor at same time also established the cor. of Ts.14 and 15 N., Rs.5 and 6 E.

In 1903, W. H. Thorn surveyed the N. bdy. of T.14 N., R.6 E. due west to intersection with E. bdy. of T.14 N., R.5 E., and in order to determine point for Tp. closing cor., retraced the E. bdy. of sec.1, T.14 N., R.5 E., established closing cor. of Ts.14 and 15 N., R.3 E. thereon at 9.59 chs. S.6°9'W. from original Tp. cor., and changed the original Tp. cor. to refer to Ts.14 and 15 N., R.5 E. only.

No other retracement or resurvey of this Tp. bdy. is of record. The S. 5 miles of the bdy. are unsurveyed, and such portion of the line is surveyed under instructions for Group 120, as hereinafter described.

Sec.1, T.14 N., R.5 E. being surveyed, resurvey of the W. bdy. of sec.6, T.14 N., R.6 E. is dependent upon the position of the original $\frac{1}{4}$ sec.cor. and sec.cor.; therefore, preliminary to the resurvey hereinafter described, make retracement of the E. bdy. of sec.1, T.14 N., R.5 E. as follows:

RETRACEMENT FOR RESURVEY.

The cor. of Ts.14 and 15 N., R.5 E. is a limestone, 10x8x8 ins. above ground, firmly set, marked with 6 notches on each of N., S. and W. faces, and witnessed by two pits, one each NW. and SW. of cor., and a mound of earth W. of cor. No bearing trees.

Thence,

9.65 S.6° 9'W., (Thorn retracement record) on random line on E. bdy. of sec.1 (N. $\frac{1}{2}$).

Fall 3 lks. E. of the original closing cor. of Ts.14 and 15 N., R.6 E., hereinafter described.

Continue line and measurement.

42.66 Fall 12 lks. E. of the original $\frac{1}{4}$ sec.cor. of secs.1 and 6, hereinafter described.

True course and dist. of N. $\frac{1}{2}$ of E. bdy. of sec.1 are therefore N.6° 19'E., 42.66 chs., and the Tp. closing cor. is on the line.

From $\frac{1}{4}$ sec.cor.,

40.09 S.1° 41'W., (Thorn retracement record) on random line, on E. bdy. of sec.1 (S. $\frac{1}{2}$).

Fall 19 lks. E. of the original cor. of secs. 1, 6, 7 and 12, hereinafter described.

True course and dist. of S. $\frac{1}{2}$ of E. bdy. of sec.1 are therefore N.1° 57'E., 40.09 chs.

RESURVEY.

From the reestablished cor. of secs. 6 and 7, T.14 N., R.6 E., hereinafter described,

North, on true line, on W. bdy. of sec.6.

Over gently rolling land, thru. very scattering timber and scattering undergrowth.

Ascend slightly over S. slope, to

1.65 intersect the original cor. of secs. 1, 6, 7 and 12, which is a limestone 10x8x6 ins. above ground, firmly set marked with 5 notches on S. face, and 1 notch on N. face, and witnessed by a mound of stone 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor. No bearing trees.

Reconstruct this cor. monument, and alter the same to refer to secs. 1 and 12 only as follows:

BOOK 3662

12 Resurvey of part of West bdy. of Township 14 North, Range 6 East

Chains.

Alongside old stone, set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 1 and 12 only, with brass cap, marked

T14N	T14N
R5E	R6E
S 1	S 6
S12	
1923	

No bearing trees available. No change in the original accessory or the marking on the old stone is required.

Thence, N. 1° 57' E., on true line, continuing measurement of W. bdy. of sec. 6.

Ascend 33 ft., over S. slope.

1.84 Wire fence, brs. E. and W.

16.14 Thence over nearly level land.

Descend slightly over N. slope.

29.15 Swale, drains W.

Ascend 38 ft., over S. slope.

36.20 Thence, over nearly level land, sloping W.

40.02 (40.00 chs. in northing from cor. of secs. 6 and 7) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 6 only, with brass cap, marked

$\frac{1}{4}$ S 6

1923

No bearing trees available. Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, E. of cor.

Continue line and measurement.

41.74 (40.09 chs. N. 1° 57' E., from cor. of secs. 1 and 12) Intersect the original $\frac{1}{4}$ sec. cor. of secs. 1 and 6, which is a limestone, 14x12x4 ins. above ground, firmly set, marked $\frac{1}{4}$ on W. face, and witnessed by a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor. No bearing trees.

Reconstruct this cor. monument, and alter same to refer to the quarters of sec. 1 only, as follows:

Alongside old stone, set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 1 only, with brass cap, marked

$\frac{1}{4}$ S 1

1923

No bearing trees available. No change in the original accessory or the marking on the old stone is required.

Thence, N. 6° 19' E., on true line, continuing measurement of W. bdy. of sec. 6.

Over nearly level land, thru. very scattering timber and scattering undergrowth.

60.75 Descend slightly over NW. slope, to

Leave nearly level and enter rolling land.

Descend 177 ft., over N. slope.

66.45 Wire fence, brs. E. and W.

73.25 Draw, course NE., turning to N. at about 50 lks. NE.

74.75 (33.01 chs. N. 6° 19' E. from $\frac{1}{4}$ sec. cor. of sec. 1) Intersect the original closing cor. of Ts. 14 and 15 N., R. 6 E., and Forest Bdy. Post No. 87, which is an iron post, 3 $\frac{1}{2}$ ins. in diam., projecting 20 ins. above ground, firmly set in ground and mound of stone, properly marked on brass cap, for original reference, and witnessed by two properly marked bearing trees, one each NE. and SE. of cor.

As the monument is no longer a Forest Reserve Bdy. Post, obliterate all marking on the brass cap which refers to Forest Service.

Resurvey of part of West bdy. of Township 14 North, Range 6 East. 13

Chains.

Forest Reserve.
Land, gently rolling, nearly level and rolling.
Soil, gravelly and rocky, 3rd and 4th rate.
Timber, cedar and mesquite.
Undergrowth, catclaw, corona christo and scrub oak.

BOOK 3662

14. Resurvey of North bdy. of Township 14 North Range 6 East

Chains.

The North bdy. of T.14 N., R.6 E., was surveyed in 1903 by W.H.Thorn, U.S.S. as a Tp. bdy., and also as a part of the bdy. of what was then known as the "Black Mesa" Forest Reserve, establishing all cor.monuments thereon with a common reference to areas on both sides of the line, the sec.cors. being additionally designated as Forest Bdy. Posts, and consecutively numbered from east to west.

No retracement or resurvey of the line is of record, however, in connection with the survey of the subdivision lines of the south half of T.15 N., R.6 E., J.J.Fisher, U.S. D.S. and J.F.Hesse, U.S.D.S.; established closing cors. on the line for all of the secs. of the south tier of secs. of said township, which changed all of the original cors. to refer to areas in T.14 N., R.6 E. only.

As the area to the N. of the line is now surveyed, the alignment of a resurvey is dependent upon the positions of the existing original $\frac{1}{4}$ sec. and sec.cors. thereon. This line is no longer a Forest Reserve Bdy., and it is therefore unnecessary to retain such designation for the original sec.cors.

The survey of the subdivision lines of T.14 N., R.6 E., hereinafter described, establishes closing cors. on the Tp. bdy. for all of the secs. in the N. tier thereof; therefore, the original $\frac{1}{4}$ sec. and sec.cors. on the line now become angle points only.

The following notes describe the resurvey of the N. bdy. of T.14 N., R.6 E., measuring between closing cors. of the N. tier of secs. of said township, and reestablishing a set of $\frac{1}{4}$ sec.cors. referring to said sections only at the several midpoints of N. boundaries of said sections.

Preliminary to the resurvey make retracement of the entire line, to obtain bearings between the original $\frac{1}{4}$ sec. and sec.cors. thereon as follows:

RETRACEMENT FOR RESURVEY.

- From cor. of Ts. 14 N., Rs. 6 and 7 E., and Forest Bdy. Post No. 81, changed to angle point as hereinbefore described, West, on random line on old N. bdy. of sec. 1 (E. $\frac{1}{2}$).
- 39.75 Intersect true point for original $\frac{1}{4}$ sec. cor. of secs. 1 and 36, determined by measurement of the record distance 2.71 chs. E. from the original witness cor. The true course and dist. of the E. $\frac{1}{2}$ of old N. bdy. of sec. 1 are therefore West, 39.75 chs.
- From original $\frac{1}{4}$ sec. cor. point, West, on random line, on old N. bdy. of sec. 1 (W. $\frac{1}{2}$).
- 2.71 Intersect the original witness cor. to $\frac{1}{4}$ sec. cor. of secs. 1 and 36, hereinafter described.
- Continue line and measurement.
- 30.48 Intersect the original C.C. of secs. 35 and 36, T.15 N., R. 6 E., hereinafter described.
- Continue line and measurement.
- 40.12 Intersect the original cor. of secs. 1 and 2, and Forest Bdy. Post No. 82, hereinafter described.
- True course and dist. of W. $\frac{1}{2}$ of old N. bdy. of sec. 1 are therefore West, 40.12 chs., of old N. bdy. of sec. 1, West 79.87 chs., and the C.C. of secs. 35 and 36 is on line.
-
- West, on random line, on old N. bdy. of sec. 2 (E. $\frac{1}{2}$).
- 40.01 Fall 1 lk. S. of the original $\frac{1}{4}$ sec. cor. of secs. 2 and 35, hereinafter described.
- True course and dist. of E. $\frac{1}{2}$ of old N. bdy. of sec. 2 are therefore N. 89° 59' W., 40.01 chs.
- Thence,
- West, on random line, on old N. bdy. of sec. 2 (W. $\frac{1}{2}$).
- 30.12 Fall 4 lks. S. of the original C.C. of secs. 34 and 35,

Chains.

- T. 15 N., R. 6 E., hereinafter described.
- 39.98 Continue line and measurement.
Fall 6 lks. S. of the original cor. of secs. 2 and 3, and Forest bdy. Post No. 83, hereinafter described.
True course and dist. of $W. \frac{1}{2}$ of old N. bdy. of sec. 2 are therefore $N. 89^{\circ} 55' W.$, 39.98 chs., and the C.C. of secs. 34 and 35 is on line.
-
- 39.97 West, on random line, on old N. bdy. of sec. 3 (E. $\frac{1}{2}$).
Fall 8 lks. S. of the original $\frac{1}{4}$ sec. cor. of secs. 3 and 34, hereinafter described.
True course and dist. of E. $\frac{1}{2}$ of old N. bdy. of sec. 3 are therefore $N. 89^{\circ} 53' W.$, 39.97 chs.
Thence,
- 30.34 West, on random line on old N. bdy. of sec. 3 (W. $\frac{1}{2}$).
Fall 5 lks. S. of the original C.C. of secs. 33 and 34, T. 15 N., R. 6 E., hereinafter described.
- 40.11 Continue line and measurement.
Fall 7 lks. S. of the original cor. of secs. 3 and 4, and Forest Bdy. Post No. 84, hereinafter described.
True course and dist. of W. $\frac{1}{2}$ of old N. bdy. of sec. 3 are therefore $N. 89^{\circ} 54' W.$, 40.11 chs., and the C.C. of secs. 33 and 34 is on line.
-
- 39.99 West, on random line, on old N. bdy. of sec. 4 (E. $\frac{1}{2}$).
Fall 3 lks. S. of the original $\frac{1}{4}$ sec. cor. of secs. 4 and 33, hereinafter described.
True course and dist. of E. $\frac{1}{2}$ of old N. bdy. of sec. 4 are therefore $N. 89^{\circ} 57' W.$, 39.99 chs.
Thence,
- 30.45 West, on random line, on old N. bdy. of sec. 4 (W. $\frac{1}{2}$).
Fall 2 lks. N. of the original C.C. of secs. 32 and 33, T. 15 N., R. 6 E., hereinafter described.
- 39.95 Continue line and measurement.
Fall 2 lks. N. of the original cor. of secs. 4 and 5, and Forest Bdy. Post No. 85, hereinafter described.
True course and dist. of W. $\frac{1}{2}$ of old N. bdy. of sec. 4 are therefore $S. 89^{\circ} 58' W.$, 39.95 chs., and the C.C. of secs. 32 and 33 is on line.
-
- 40.08 West, on random line, on old N. bdy. of sec. 5 (E. $\frac{1}{2}$).
Fall 2 lks. S. of the original $\frac{1}{4}$ sec. cor. of secs. 5 and 32, hereinafter described.
True course and dist. of E. $\frac{1}{2}$ of old N. bdy. of sec. 5 are therefore $N. 89^{\circ} 58' W.$, 40.08 chs.
Thence,
- 30.58 West, on random line, on old N. bdy. of sec. 5 (W. $\frac{1}{2}$).
Fall 3 lks. N. of the original C.C. of secs. 31 and 32, T. 15 N., R. 6 E., hereinafter described.
- 40.00 Continue line and measurement.
Fall 3 lks. N. of the original cor. of secs. 5 and 6, and Forest Bdy. Post No. 86, hereinafter described.
True course and dist. of W. $\frac{1}{2}$ of old N. bdy. of sec. 5 are therefore $S. 89^{\circ} 57' W.$, 40.00 chs., and the C.C. of secs. 31 and 32 is on line.
-
- 40.11 West, on random line, on old N. bdy. of sec. 6 (E. $\frac{1}{2}$).
Fall 2 lks. N. of the original $\frac{1}{4}$ sec. cor. of secs. 6 and 31, hereinafter described.
True course and dist. of E. $\frac{1}{2}$ of old N. bdy. of sec. 6 are therefore $S. 89^{\circ} 58' W.$, 40.11 chs.
Thence,
- 28.03 West, on random line, on old N. bdy. of sec. 6 (W. $\frac{1}{2}$).
Fall 2 lks. S. of the original closing cor. of Ts. 14 and 15

BOOK 3662

16 Resurvey of North bdy. of Township 14 North, Range 6 East.

Chains.

N., R.6 E., hereinbefore described.
True course and dist. of $W \frac{1}{2}$ of old N.bdy. of sec.6 are
therefore N.89°58'W., 28.03 chs.

RESURVEY.

From the closing cor. of Ts. 14 N., Rs.6 and 7 E., hereinbefore described,
West, on true line, on N. bdy. of sec.1.
Over nearly level land, thru. dense timber and scattering undergrowth.

20.00 Leave dense, and enter scattering timber.
23.00 East or right rim of Spring Creek Canyon, brs. N.20°W. and S.20°E. Leave nearly level, and enter mountainous land and dense undergrowth.

Descend 750 ft., over steep broken W. slope to bottom of canyon.

25.10 Vertical cliff, 90 ft. high, bearing N. and S., facing W.
26.60 Vertical cliff, 15 ft. high, bearing N. and S., facing W.
37.50 Spring Creek, 50 lks. wide, in bottom of canyon of same name, course NW., containing a stream of clear water, 1 lk. wide, 2' ins. deep.

Ascend 95 ft., over steep broken NE. slope to W.C.

40.16 (Midpoint) True point for reestablishment of the $\frac{1}{4}$ sec. cor. of sec.1 only, falls on precipitous slope, where it is impracticable to set monument; therefore, at

41.76 Intersect the original witness cor. to $\frac{1}{4}$ sec. cor. of secs. 1 and 36, which is a volcanic stone, 16x14x12 ins., marked "WC $\frac{1}{4}$ " on N. face, firmly set in a mound of stone and witnessed by two bearing trees, a juniper, 10 ins. in diam., S.62 $\frac{1}{2}$ °W., 151 lks. dist., and a juniper N.85 $\frac{1}{2}$ °W., 117 lks. dist., both of which are marked "WC $\frac{1}{4}$ S BT."

Reconstruct this monument in same place as follows:

Remove the mound of stone, set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bed rock, reset old marked stone at base of post, and raise a mound of stone around post, for witness cor. to reestablished $\frac{1}{4}$ sec. cor. of sec.1 only, with brass cap, marked

1/4 S 1 WC
1923

Obliterate the marking on the old NW bearing tree, add marking "S1" to the marking on the old SW bearing tree, and establish a new bearing tree as follows:

A juniper, 24 ins. in diam., S.15 $\frac{1}{2}$ °W., 279 lks. dist., marked $\frac{1}{4}$ S 1 WC BT.

Ascend 615 ft., over steep broken NE. slope.

48.00 Enter dense timber, brs. N. and S.
58.00 Leave dense, and enter scattering timber.
67.30 Top of high spur, sloping N.

Descend 21 ft., over NW. slope, to

69.53 Intersect the original closing cor. of secs. 35 and 36, T.15 N., R.6 E., which is a volcanic stone 15x10x6 ins. above ground, firmly set, marked "CC" on N. face, 1 notch on E face, and 5 notches on W face, and witnessed by a mound of stone N. of cor. No bearing trees.

Continue line and measurement,

Descend 301 ft., over steep NW. slope, to

79.17 Intersect the original cor. of secs. 1 and 2, and Forest Bdy. Post No. 82, which is an iron post, 3 $\frac{1}{2}$ ins. in diam., projecting 20 ins. above ground, firmly set, properly marked on brass cap, for reference to said secs. and Forest Bdy., and witnessed by two pits, one each SE. and SW. of cor., and one bearing tree, a juniper, 18 ins. in diam., S.78°E., 188 lks. dist., marked T14N R6E S1 BT."

Alter this cor. to angle point only by changing the marking on the brass cap to read:

chains.

A P

1923

Obliterate marking on the bearing tree, and mark same "APBT".

Thence,

N. 89° 59' W., on true line, continuing measurement of N. bdy. of sec. 1.

80.33 Descend 15 ft., over N. slope, to Intersect the Subdivision line, bet. secs. 1 and 2, surveyed N. 0° 1' W. Closing cor. of said secs. established at this point, as hereinafter described:

Land, nearly level and mountainous.

Soil, rocky, 4th rate.

Timber, juniper and pine.

Undergrowth, scrub oak and corona christo.

From C.C. of secs. 1 and 2,

N. 89° 59' W., on true line, on N. bdy. of sec. 2.

Over mountainous land, thru. scattering timber and dense undergrowth.

18.00 Ascend 120 ft., over N. and NE. slopes.

Ridge, brs. NW. and SE.

38.85 Descend 502 ft., over SW. and W. slopes, to

Intersect the original $\frac{1}{4}$ sec. cor. of secs. 2 and 35, which is a sandstone 16x14x8 ins. firmly set in a mound of stone, marked " $\frac{1}{4}$ " on N. face; and witnessed by a mound of stone, N. of cor., and one bearing tree,

A juniper, 9 ins. in diam., N. 76° W., 50 lks. dist., marked $\frac{1}{4}$ S BT.

Alter this cor. to angle point only as follows:

Obliterate the marking on the stone and bearing tree, and mark "AP" on the stone, and "APBT" on the bearing tree.

Thence,

N. 89° 55' W., on true line, continuing measurement of N. bdy. of sec. 2.

40.05 Descend 47 ft., over W. slope, to

(Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., on surface rock, supported in a mound of stone, for re-established $\frac{1}{4}$ sec. cor. of sec. 2 only, with brass cap, marked

$\frac{1}{4}$ S 2

1923

from which,

A cedar, 8 ins. in diam., brs. S. 29° E., 216 lks. dist., marked $\frac{1}{4}$ S 2 BT.

A cedar, 8 ins. in diam., brs. S. 84° W., 338 lks. dist., marked $\frac{1}{4}$ S 2 BT.

48.80 Descend 137 ft., over W. slope.

Draw, course NW.

61.50 Ascend 80 ft., over NE. slope.

Ridge, brs. NW. and SE.

68.97 Descend 57 ft., over SW. slope, to

Intersect the original closing cor. of secs. 34 and 35, T. 15 N., R. 6 E., which is a limestone, 16x10x6 ins. above ground, firmly set, marked "CU" on N. face, 2 notches on E. face, and 4 notches on W. face, and witnessed by a mound of stone N. of cor., and one properly marked cedar bearing tree NE. of cor.

78.83 Descend 80 ft., over SW. slope, to

Intersect the original cor. of secs. 2 and 3, and Forest Bdy. Post No. 83, which is an iron post, $3\frac{1}{2}$ ins. in diam., projecting 20 ins. above ground, firmly set in ground and mound of stone, properly marked on brass cap, and

BOOK 3662

18 Resurvey of North bdy. of Township 14 North Range 6 East.

Chains.

by two properly marked bearing trees, a pine, 15 ins. in diam., S. $37\frac{1}{2}^{\circ}$ E., 228 lks. dist., and a cedar, 10 ins. in diam., S. $34\frac{1}{2}^{\circ}$ W., 125 lks. dist.

Alter this cor. to angle point only by changing marking on brass cap to read

A P

1923

Obliterate marking on the bearing trees, and mark each of same "APBT."

Thence,

N. $89^{\circ}53'$ W., on true line, continuing measurement of N. bdy. of sec. 2.

80.10 Descend 8 ft., over SW. slope, to

Intersect the subdivision line bet. secs. 2 and 3, surveyed N. $0^{\circ}1'$ W.

Closing cor. of said secs. established at this point, as hereinafter described.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, juniper and cedar.

Undergrowth, scrub oak and corona christo.

From C.C. of secs. 2 and 3,

N. $89^{\circ}53'$ W., on true line, on N. bdy. of sec. 3.

Over rolling land, thru. scattering timber and undergrowth.

29.00 Descend 143 ft., over SW. slope.

Draw; course SW.

38.70 Ascend 20 ft., over SE. slope, to

Intersect the original $\frac{1}{4}$ sec. cor. of secs. 3 and 34, which is a volcanic stone 12x10x6 ins. above ground, firmly set, marked " $\frac{1}{4}$ " on N. face, and witnessed by two pits, one each E. and W., a mound of earth and stone N. of cor., and one bearing tree, a cedar, 12 ins. in diam., N. 55° W., 220 lks. dist., marked " $\frac{1}{4}$ SBT."

Alter this cor. to angle point only as follows:

Obliterate the marking on the stone and bearing tree, and mark "AP" on the stone, and "APBT" on the bearing tree.

Thence,

N. $89^{\circ}54'$ W., on true line, continuing measurement of N. bdy. of sec. 3.

40.06 Ascend 5 ft., over SE. slope, to

(Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 3, with brass cap, marked

 $\frac{1}{4}$ S 3

1923

from which,

A cedar, 6 ins. in diam., brs. S. 70° W., 220 lks. dist., marked " $\frac{1}{4}$ S 3 BT."

No other bearing tree available. Raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.

Ascend slightly over SE. slope.

42.12 End of low spur, sloping S.

Descend 112 ft., over SW. slope, to

69.04

Intersect the original closing cor. of secs. 33 and 34, T. 15 N., R. 6 E., which is a malpais stone, 10x8x6 ins. above ground, firmly set, marked "CC" on N. face, and 3 notches on each of E. and W. faces, and witnessed by a mound of stone N. of cor., and one properly marked sycamore bearing tree NW. of cor.

Continue line and measurement.

Descend slightly over SW. slope, to

Chains.

71.13 Wash 20 lks.wide, course NW.
 Descend 15 ft., over NW.slope, to
 78.81 Intersect the original cor. of secs. 3 and 4, and Forest
 Bdy. Post No.84, which is an iron post, $3\frac{1}{2}$ ins.in
 diam., projecting 20 ins. above ground, firmly set in
 ground and mound of stone, properly marked on brass
 cap, and witnessed by two pits, one each SE. and SW.,
 and two properly marked cedar bearing trees, one S, $32\frac{1}{2}^{\circ}$
 E., 113 lks.dist..and one S. $66\frac{1}{2}^{\circ}$ W., 158 lks.dist.
 Alter this cor. to angle point only by changing the marking
 on the brass cap to read:

A P
1923

Obliterate the marking on the bearing trees, and mark each
of same "APBT."

Thence,
N. $89^{\circ}57'$ W., on true line, continuing measurement of N.bdy.
of sec.3.

80.13 Enter nearly level land.
 Intersect the Subdivision line bet. secs. 3 and 4, surveyed
 N. $0^{\circ}2'$ W., Closing cor. of said secs. established at
 this point of intersection, as hereinafter described.
 Land, rolling.
 Soil, rocky, 4th rate.
 Timber, juniper.
 Undergrowth, scrub oak and corona christo.

 From C.D. of secs. 3 and 4,
 N. $89^{\circ}57'$ W., on true line, on N.bdy. of sec.4.
 Over nearly level land, thru. scattering timber and dense
 undergrowth.

23.20 Wire fence, brs. N. and S. Fence cor. brs. S. 20 lks. dist.,
from which fences extend E. and N.

24.80 Road, brs. N. 15° W. and S. 15° E.

26.20 Wash, 10 lks.wide, course N. Enter rolling land.
Ascend 56 ft., over E.slope.

32.00 Spur, slopes N.
Descend 15 ft., over NW.slope, to

38.67 Intersect the original $\frac{1}{4}$ sec. cor. of secs. 4 and 33, which
 is a limestone, $14 \times 8 \times 8$ ins. above ground, firmly set,
 marked $\frac{1}{4}$ on N. face, and witnessed by two pits, one
 each E. and W., a mound of earth and stone N. of cor.,
 and one bearing tree, a cedar, 12 ins. in diam., S. 6° E.,
 146 lks. dist., marked " $\frac{1}{4}$ S BT."

Alter this cor. to angle point only as follows:
 Obliterate the marking on stone and bearing tree, and
 mark "AP" on the stone and "APBT" on the bearing
 tree.
 Thence,
 S. $89^{\circ}58'$ W., on true line, continuing measurement of N.bdy.
 of sec.4.

40.14 Descend 10 ft., over NW.slope, to
 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 26
 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. of
 sec.4 only, with brass cap, marked

$\frac{1}{4}$ S 4
1923

from which,
 A cedar, 6 ins. in diam., brs. $70\frac{1}{2}^{\circ}$ E., 20 lks.
 dist., marked $\frac{1}{4}$ S 4 BT.
 A cedar, 6 ins. in diam., brs. S. 76° W., 142 lks.
 dist., marked $\frac{1}{4}$ S 4 BT.

41.00 Descend 6 ft., over NW.slope.
 Ascend 33 ft., over NE.slope.

BOOK 3662

20

Chains.

- 51.00 Descend 40 ft., over NW. and W. slopes.
- 66.70 Ascend 12 ft., over SE. slope.
- 67.02 Road. brs. NE. and SW.
- 69.12 Intersect the original closing cor. of secs. 32 and 33, T. 15 N., R. 6 E., which is a limestone, 12x6x6 ins. above ground, firmly set, marked "CC" on N. face, 2 notches on W. face, and 4 notches on E. face, and witnessed by two properly marked cedar bearing trees, one each NE. and NW. of cor.
- Wire fences extend N. and W. from this closing cor.
- Continue line and measurement, along wire fence, bearing E. and W.
- 78.62 Descend 28 ft., over S. slope, to Intersect the original cor. of secs. 4 and 5, and Forest Bdy. Post No. 85, which is an iron post, $3\frac{1}{2}$ ins. in diam., projecting 20 ins. above ground, firmly set in ground and mound of earth and stone, properly marked on brass cap, and witnessed by two pits, one each SE. and SW. and one bearing tree, a cedar, 10 ins. in diam., S. 42° E., 115 lks. dist., marked "T14N R6E S4 BT."
- Alter this cor. to angle point only by changing the marking on the brass cap to read:
- A P
1923
- Obliterate the marking on the bearing tree, and mark same "APBT"
- Thence,
N. 89° 58' W., on true line, continuing measurement of N. bdy. of sec. 4, along wire fence, bearing E. and W.
- 80.28 Descend slightly over S. slope, to Intersect the subdivision line, bet. secs. 4 and 5, surveyed N. 0° 2' W.
- Closing cor. of said secs. established at this point of intersection, as hereinafter described.
- Land, nearly level and rolling.
- Soil, rocky, 4th rate.
- Timber, cedar.
- Undergrowth, scrub oak and corona christo.
-
- From C.C. of secs. 4 and 5,
N. 89° 58' W., on true line, on N. bdy. of sec. 5.
- Over rolling land, thru. scattering timber and dense undergrowth. Along wire fence, bearing E. and W.
- Descend gradually over S. and SW. slopes.
- 7.40 Leave fence, which turns from E. to S. at this point.
- 27.50 Descend 58 ft., over W. slope, to
- 38.42 Intersect the original $\frac{1}{4}$ sec. cor. of secs. 5 and 32, which is a limestone 22x14x10 ins., firmly set in a mound of stone, marked " $\frac{1}{4}$ " on N. face, and witnessed by a mound of stone N. of cor. No bearing trees. Alter this cor. to angle point only by obliterating the marking on the stone, and remarking same "AP". No bearing trees available.
- Thence,
S. 89° 57' W., on true line, continuing measurement of N. bdy. of sec. 5.
- 40.07 Descend 8 ft., over W. slope, to (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground to bed rock, supported in a mound of stone, for reestablished $\frac{1}{4}$ sec. cor. of sec. 5 only, with brass cap, marked

$\frac{1}{4}$ S. 5
1923

from which,
A cedar, 6 ins. in diam., brs. S. 83 $\frac{1}{2}$ ° E., 96 lks. dist., marked $\frac{1}{4}$ S 5 BT.

Chains.	
	A cedar, 4 ins. in diam., brs. S. 52° W., 124 lks. dist., marked BT.
51.50	Descend 51 ft., over W. slope. Draw, course NW.
	Ascend 45 ft., over NE. slope.
55.00	Ascend 67 ft., over N. slope, to
69.00	Intersect the original closing cor. of secs. 31 and 32, T. 15
	N., R. 6 E., which is a limestone, 12x6x6 ins. above ground,
	firmly set, marked CC on N. face, 1 notch on W. face, and
	5 notches on E. face, and witnessed by two properly
	marked cedar bearing trees, one each NE. and NW. of cor.
	From this cor., fences extend W. and N.
	Continue line and measurement, along N. side of wire fence,
	bearing E. and W.
78.42	Ascend 50 ft., over N. slope, to
	Intersect the original cor. of secs. 5 and 6, and Forest Bdy.
	Post No. 861, which is an iron post, 3 1/2 ins. in diam., pro-
	jecting 20 ins. above ground, firmly set in ground and
	mound of stone, properly marked on brass cap, and wit-
	nessed by two pits, one each SE. and SW., and two
	properly marked bearing trees, a cedar, 12 ins. in
	diam., S. 36 1/2° E., 207 lks. dist., and a cedar, 12 ins. in
	diam., S. 86 1/2° W., 482 lks. dist.
	Alter this cor. to angle point only by changing the mark-
	ing on the brass cap to read:
	A P
	1923
	Obliterate the marking on the SE. bearing tree, and mark
	same "APBT". The old SW. bearing tree becomes a "BT"
	for the closing cor. of secs. 5 and 6, as hereinafter
	described.
	Thence
	S. 89° 58' W., on true line, continuing measurement of N. bdy.
	of sec. 5, along N. side of wire fence, bearing E. and W.
	Descend slightly over N. slope, to
80.14	Intersect the Subdivision line bet. secs. 5 and 6, surveyed
	N. 0° 3' W. Closing cor. of said secs. established at this
	point of intersection, as hereinafter described.
	Land, rolling.
	Soil, rocky, 4th rate.
	Timber, cedar.
	Undergrowth, catclaw, scrub oak and corona christo.

	From C.C. of secs. 5 and 6,
	S. 89° 58' W., on true line, on N. bdy. of sec. 6.
	Over rolling land, thru. scattering timber and dense under-
	growth, along N. side of wire fence, bearing E. and W.
	Descend gradually over N. slope.
7.22	Fence cor. brs. S. 2 lks. dist., from which fences extend E.
	and S.
22.00	Descend 105 ft., over NW. slope.
35.30	Draw, course N.
	Ascend 20 ft., over NE. slope to reestablished 1/4 sec. cor.
37.10	Dim road, brs. N. and S.
38.39	Intersect the original 1/4 sec. cor. of secs. 6 and 31, which
	is a limestone 36x20x20 ins. above ground, firmly set
	in ground and mound of stone, marked "1/4" on N. face, and
	witnessed by two bearing trees, a cedar, 18 ins. in diam.,
	S. 1 1/2° E., 117 lks. dist., and a cedar, 10 ins. in diam.,
	N. 72° W., 167 lks. dist., both marked "1/4 S BT."
	Alter this cor. to angle point only as follows:
	Obliterate markings on the stone and bearing trees, and
	mark "AP" on stone and "APBT" on each of the bearing
	trees.
	Thence
	N. 89° 58' W., on true line, continuing measurement of N. bdy. of
	sec. 6.
	Ascend 5 ft. over NE. slope, to

BOCK 3662

22 Resurvey of North bd. of Township 14 North, Range 6 East.

Chains.	
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. of sec. 6 only, with brass cap, marked
	$\frac{1}{4}$ S 6 1923
	from which, A cedar, 16 ins. in diam., brs. S. 47° E., 111 lks. dist., marked $\frac{1}{4}$ S 6 BT. A cedar, 16 ins. in diam., brs. S. 14° W., 52 lks. dist., marked $\frac{1}{4}$ S 6 BT.
42.70	Ascend 6 ft., over NE. slope.
	Spur, slopes N.
	Descend 115 ft., over NW. slope.
55.90	Draw, course N.
	Ascend 29 ft., over NE. slope.
62.50	Trail, brs. N. and S.
63.70	Wire fence, brs. N. and S.
64.70	Spur, slopes N.
	Descend 21 ft., over W. slope.
66.20	Draw, course N.
	Ascend slightly over NE. slope, to
66.42	Intersect the original closing cor. of Ts. 14 and 15 N., R.
	6 E., hereinbefore described.
	Land, rolling.
	Soil, rocky, 4th rate.
	Timber, cedar.
	Undergrowth, scrub oak and corona christo.

BOOK 3662

Survey of part (completion) of West bdy. of Township 14 North, Range 6 E. 23

Chains.

401.65

From the original cor. of secs. 1, 6, 7 and 12, hereinbefore described,

South, on random line, setting temp. cors., at intervals of 40.00 chs., and at

Intersect the N. bdy. of T. 13 N., R. 6 E. at a point 12.65 chs. S. 89° 43' E. from the cor. of Ts. 13 and 14 N., Rs. 5 and 6 E., established in 1916, by Wm. H. Richards, Jr. U.S.S., which is an iron post, 3 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by a mound of stone 2 ft. base, 1 1/2 ft. high, S. of cor., and two properly marked bearing trees, a cedar, 12 ins. in diam., N. 15 1/2° E., 261 lks. dist., and a cedar, 10 ins. in diam., S. 24° E., 100 lks. dist.

Alter this cor. monument to refer to Ts. 13 N., Rs. 5 and 6 E. only, by changing the marking on the brass cap to read:

T14N	
R5E	
S36	
S 1	S 6
R5E	R6E
T13N	
1916-23	

and obliterating the marking on the old NE. bearing tree.

No other bearing tree available.

At the point where the random W. bdy. intersects the N. bdy. of T. 13 N., R. 6 E. reestablish cor. of Ts. 14 N., Rs. 5 and 6 E. only, as follows:

Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for reestablished cor. of Ts. 14 N., Rs. 5 and 6 E., with brass cap, marked

T14N	
R5E	R6E
S36	S31
S 6	
T13N R6E	
1923	

from which,

A cedar, 8 ins. in diam., brs. N. 31° E., 96 lks. dist., marked T14N R6E S31 BT.

A cedar, 8 ins. in diam., brs. N. 84° 20' W., 121 lks. dist., marked T14N R5E S36 BT.

From this cor., flag on cor. of Ts. 13 N., Rs. 5 and 6 E. is visible, and brs. N. 89° 43' W., and a flag in the 1/4 sec. cor. of secs. 6 and 31 is also visible, and brs. S. 89° 43' E.; therefore, this township cor. is in proper alignment between said cors.

Thence,

North, on true line, on W. bdy. of sec. 31.

Over rolling land, thru. scattering timber and undergrowth.

20.05

Ascend 161 ft., over gradual S. slope, to

Foot of steep slope, brs. E. and W. Enter mountainous land.

24.77

Ascend 115 ft., over S. slope, to

Top of steep ascent. Enter rolling land.

40.00

Ascend 70 ft., over gradual S. slope, to

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor. of sec. 31 only, with brass cap, marked

†	
S31	
1923	

from which,

BOOK 3662

24 Survey of part (completion) of W. bdy. of Township 14 North, Range 6 East.

Chains.

- A cedar, 8 ins. in diam., brs. N. 50° E., 130 lks. dist., marked $\frac{1}{4}$ S 31 BT.
- A cedar, 12 ins. in diam., brs. S. 83 $\frac{3}{4}$ ° E., 210 lks. dist., marked $\frac{1}{4}$ S 31 BT.
- Ascend 8 ft., over gradual S. slope, to
- 41.60 S. rim of mesa, brs. E. and W. Thence over nearly level land on mesa.
- 41.80 Wire fence, brs. N. 10° E. and S. 10° W.
- 58.70 N. rim of mesa, brs. E. and W. Leave mesa. Enter rolling land.
- 72.80 Descend 52 ft., over N. slope.
- Draw, course W. Enter mountainous land.
- Ascend 83 ft., over S. slope, to
- 80.00 Ridge, bearing E. and W. Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 30 and 31 only, with brass cap, marked

T14N
R6E
S30
S31

1923

from which,

- A cedar, 10 ins. in diam., brs. S. 65° E., 588 lks. dist., marked T14N R6E S31 BT.
- No other bearing tree available. Raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor.
- Land, rolling, mountainous and nearly level.
- Soil, rocky, 4th rate.
- Timber, cedar.
- Undergrowth, cactus and cornua christo.

North, on true line, on W. bdy. of sec. 30.
Over rolling land, thru. scattering timber and undergrowth.

- 9.70 Descend 57 ft., over N. slope.
- Draw, course W.
- 12.60 Ascend 72 ft., over S. slope.
- Wire fence, brs. E. and W.
- 27.80 Spur, slopes W.
- Descend 54 ft., over N. slope.
- 33.10 Draw, course W.
- Ascend 49 ft., over S. slope, to
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor. of sec. 30 only, with brass cap, marked

$\frac{1}{4}$ S 30

1923

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor.

- Ascend slightly over S. slope, to
- 40.10 Spur, slopes W.
- Descend 90 ft., over N. slope.
- 49.70 Draw, course W.
- Ascend 83 ft., over S. slope.
- 78.10 Low ridge, brs. E. and W.
- Descend 10 ft., over N. slope, to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in ground, for cor. of secs. 19 and 30 only, with brass cap, marked

T14N
R6E
S19
S30

1923

BOOK 3662

Survey of part (completion) of West bdy. of Township 14 N., R. 6 E. 25

Chains.

No bearing trees available. Raise a mound of stone 3 ft. base, 2 ft. high, E. of cor.
 Land, rolling.
 Soil, rocky, 4th rate.
 Timber, cedar.
 Undergrowth, cactus and corona christo.

North, on true line, on W. bdy. of sec. 19.
 Over rolling land, thru. very scattering timber and dense undergrowth.
 Descend 26 ft., over N. slope.
 8.00 Draw, course W.
 Ascend 84 ft., over S. slope, to
 28.00 S. rim of mesa, brs. E. and W. Thence across level land on mesa.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 19 only, with brass cap, marked

|
 1/4 S 19
 1923

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor.
 Continue over level land on mesa, thru. very scattering timber and dense undergrowth.
 60.10 N. rim of mesa, brs. E. and W. Leave mesa. Enter mountainous land.
 Descend 143 ft., over N. slope, to
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 18 and 19 only, with brass cap, marked

|
 T14N
 R6E
 S18
 S19
 1923

from which,
 A cedar, 8 ins. in diam., brs. N. 34° E., 87 lks. dist., marked T14N R6E S18 BT.
 A cedar, 8 ins. in diam., brs. S. 74° E., 166 lks. dist., marked T14N R6E S19 BT.

Land, rolling, level and mountainous.
 Soil, rocky, 4th rate.
 Timber, cedar.
 Undergrowth, catclaw, corona christo, and scrub oak.

North, on true line, on W. bdy. of sec. 18.
 Over mountainous land, thru. scattering timber and undergrowth.
 Descend slightly over N. slope.
 0.29 Draw, course W.
 Ascend 75 ft., over S. slope.
 6.30 Spur, slopes W.
 Descend 65 ft., over N. slope, to
 12.70 Enter rolling land.
 Descend 43 ft., over gradual N. slope, to
 20.00 Draw, course W. Enter mountainous land.
 Ascend 116 ft., over steep SW. slope, to
 27.50 Enter rolling land.
 Ascend 16 ft., over gradual S. slope, to
 29.90 Spur, slopes W.
 Descend 22 ft., over gradual N. slope, to

BOOK 3662

26 Survey of part (completion) of West bdy. of Township 14 N., R. 6 E.

Chains.

38.65 Enter mountainous land.
 Descend 20 ft., over N. slope, to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the
 ground, to bed rock, supported in a mound of stone,
 for $\frac{1}{4}$ sec. cor. of sec. 18 only, with brass cap, marked

S 18

1923

from which,

A cedar, 18 ins. in diam., brs. N. 22° E., 218 lks.
 dist., marked $\frac{1}{4}$ S 18 BT.

No other bearing trees available.. Raise a mound of stone
 3 ft. base, 2 ft. high, E. of cor.

Descend 179 ft., over steep N. slope.

52.80 Draw, course W.

Ascend 196 ft., over S. slope.

68.70 Fence, brs. E. and W.

71.50 Ridge, brs. E. and W.

Descend 64 ft., over N. slope, to

76.64 Descend 53 ft., over NW. slope, to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in
 the ground, for cor. of secs. 7 and 18, only, with brass
 cap, marked

T 14 N
R 6 E
S 7
S 18

1923

from which,

A cedar, 8 ins. in diam., brs. N. 47° E., 229 lks..
 dist., marked T 14 N R 6 E S 7 BT.

A cedar, 8 ins. in diam., brs. S. 32 $\frac{1}{2}$ ° E., 366 lks.
 dist., marked T 14 N R 6 E S 18 BT.

Land, mountainous and rolling.

Soil, rocky, 4th rate+

Timber, cedar.

Undergrowth, catclaw, corona christo and scrub oak.

North, on true line, on W. bdy. of sec. 7.

Over mountainous land, thru. scattering timber and under-
 growth.

Descend 65 ft. over W. slope, to

20.10 Enter rolling land.

Descend 53 ft., over N. slope, to

32.55 Enter mountainous land.

Descend 37 ft., over steep N. slope, to

35.40 Old road, brs. E. and W. at foot of steep descent. Enter
 rolling land.

Descend 12 ft., over gradual N. slope, to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor. of sec. 7 only, with brass
 cap, marked

S 7

1923

from which,

A cottonwood, 20 ins. in diam., brs. N. 42° E., 418
 lks. dist., marked $\frac{1}{4}$ S 7 BT.

A pine, 4 ins. in diam., brs. S. 33 $\frac{1}{2}$ ° E., 295
 lks. dist., marked BT.

Enter mountainous land.

Descend 100 ft., over steep N. slope.

45.60 Wash, 60 lks. wide, course N. 80° W.

Ascend 142 ft., over S. slope.

Survey of part(completion)of West bdy.of T. 14 N., R. 6 E. 27

Chains.
 50.60 Road, brs.E. and W.
 61.10 Ridge, brs.E.and W. Enter rolling land.
 Descend 55 ft., over N.slope.
 69.70 Draw, course SW.
 Ascend 68 ft., over S.slope, to
 80.00 Set an iron post, 3 ft.long, 2 ins.in diam., 26 ins. in
 the ground, for reestablished cor.of secs.6 and 7, only
 with brass cap, marked

TL4N
 R6E
 S 6

S 7

1923

from which,

A cedar, 12 ins. in diam., brs.N.85°E., 159
 lks.dist., marked TL4N R6E S6 BT.

No other bearing tree available. Raise a mound of stone,
 3 ft.base, 2 ft.high, E.of cor.

Land, mountainous and rolling,

Soil, rocky, 4th rate.

Timber, cedar and pine.

Undergrowth, catclaw, corona christo and scrub oak.

Boundaries of Township 14 North, Range 6 East.

Latitudes, departures, and closing errors.

Line designated,	True course.	Dist.	Latitudes.		Departures.	
			N.	S.	E.	W.
South boundary,	N.89°43'W.	471.71	2.34			471.71
West boundary,	North,	401.65	401.65			
	N.1°57'E.	40.09	40.07		1.36	
	N.6°19'E.	33.01	32.81		3.63	
North boundary,	S.89°58'E.	28.03		.02	28.03	
	N.89°58'E.	40.11	.02		40.11	
	N.89°57'E.	40.00	.03		40.00	
	S.89°58'E.	40.08		.02	40.08	
	N.89°58'E.	39.95	.02		39.95	
	S.89°57'E.	39.99		.03	39.99	
	S.89°54'E.	40.11		.07	40.11	
	S.89°53'E.	39.97		.08	39.97	
	S.89°55'E.	39.98		.06	39.98	
	S.89°59'E.	40.01		.01	40.01	
East boundary,	South,	476.55		476.55		
Convergency,					.49	
Totals,			476.94	476.84	472.88	471.71
			476.84		471.71	
	Error in latitude,		0.10			
	Error in departure,				1.17	

BOOK 3662

28 Survey of Subdivision lines of Township 14 North, Range 6 East.

Chains.

The original cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., established by William H. Richards, U.S.S. in 1916, is an iron post 3 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by four properly marked cedar bearing trees, one each NE., SE., SW. and NW. of cor.

Thence,
N.0°1'W., bet. secs. 35 and 36.

Over mountainous land, thru. scattering timber and undergrowth.

Cliffs prevent chaining the southern part of the sec. line; therefore, to obtain measurement of such portion, begin at the sec. cor., and avoid the cliffs by a traverse surveyed as described as follows, and as shown on the diagram hereon:

From sec. cor.,
N.8°12'W., 7.46 chs.

Thence,
N.10°13'E., 15.49 chs.

Thence,
N.15°8'W., 2.49 chs.

Thence,
West, 1.04 chs. to
point on sec. line at

25.03 Traverse point at top of cliffs, bearing E. and W., facing S., about 650 ft. above the cor. of secs. 1, 2, 35 and 36, and forming S. rim of a mesa.

Thence,
N.0°1'W., on sec. line, continuing measurement from sec. cor.

Over gently rolling land, on mesa.

Ascend 25 ft., over S. slope.

30.90 Wire fence brs. NE and SW.

31.00 Top of ascent, brs. NE and SW.

Descend 34 ft., over NW. slope, to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in the ground, to bed rock, supported in a mound of stone for $\frac{1}{4}$ sec. cor. of secs. 35 and 36, with brass cap, marked

S35	S36
-----	-----

1923

from which,

A pine, 8 ins. in diam., brs. N.7°40'E., 101

lks. dist., marked $\frac{1}{4}$ S 36 BT.

A pine, 6 ins. in diam., brs. S.21 $\frac{1}{2}$ °W., 148

lks. dist., marked $\frac{1}{4}$ S 35 BT.

Descend 12 ft., over gradual NW. slope, to

41.29 N. rim of mesa, brs. E. and W. Leave mesa. Enter mountainous land.

Descend 230 ft., over steep N. slope.

51.50 Bottom of gulch, course W.

Ascend 300 ft., over steep SW. slope.

68.00 Ridge, brs. N.70°W. and S.70°E.

Descend 170 ft., over N. and NE. slopes, to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 25, 26, 35 and 36, with brass cap, marked

T14N	R6 E
------	------

S26	S25
-----	-----

S35	S36
-----	-----

1923

from which,

A cedar, 12 ins. in diam., brs. N.61°W., 147


lks. dist., marked T14N R6E S26 BT.

A pine, 16 ins. in diam., brs. N.21 $\frac{1}{2}$ °E., 164

lks. dist., marked T14N R6E S25 BT.

A pine, 12 ins. in diam., brs. S.45 $\frac{1}{2}$ °E., 179

lks. dist., marked T14N R6E S36 BT.

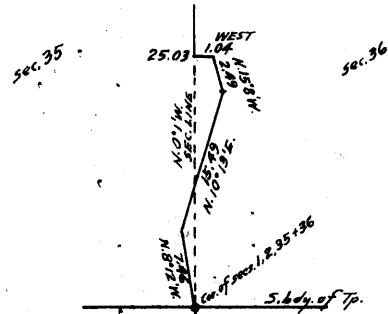

BOOK 3662

Survey of Subdivision line of Township 14 North, Range 6 East. 29

Chains.

A cedar, 6 ins. in diam., brs. S. 24° W., 1.77 lks. dist., marked T14N R6E S35 BT.
 Land, mountainous and gently rolling.
 Soil, rocky, 4th rate.
 Timber, juniper and pine.
 Undergrowth, scrub oak and catclaw.

- 40.00 S. 89° 43' E., on random line, bet. secs. 25 and 36.
Set temp. $\frac{1}{4}$ sec. cor.
- 80.26 Fall 3 lks. S. of the reestablished cor. of secs. 25, 30, 31 and 36, on the E. l. bdy. of the Tp., hereinbefore described.
Thence,
N. 89° 44' W., on true line, bet. secs. 25 and 36.
Over mountainous land, in canyon, thru. scattering timber and dense undergrowth.
Descend 20 ft., over steep N. slope, to
- 2.15 Top of cliff, 15 ft. high, bearing N. 80° E. and S. 70° W., facing NW.
Descend 160 ft., over NW. slope, to bottom of canyon.
- 8.75 Top of cliff, 15 ft. high, bearing N. 80° E. and S. 70° W., facing NW.
- 12.45 Wash, 40 lks. wide, in bottom of canyon, course S. 70° W.
Ascend 40 ft. to
- 13.50 Top of cliff, bearing N. 20° E. and SW. facing SE.
Ascend 47 ft., over steep SE. slope, to
- 15.70 Point of spur, sloping S.
Descend 20 ft., over SW. slope, to
- 17.35 Top of series of cliffs, bearing NW. and SE. facing SW.
Descend 100 ft. to
- 19.25 Foot of same cliffs, bearing NW. and SE.
Descend 100 ft., over SW. slope, to bottom of canyon.
- 24.85 Top of cliff, 25 ft. high, brs. NW. and SE. facing SW.
- 26.35 Wash, 40 lks. wide, in bottom of canyon, course N. 80° W.
Descend 135 ft., over steep N. and NW. slopes, to
- 38.45 Bottom of gulch, course N. into bottom of canyon.
Ascend 25 ft., over NE. slope, to
- 40.13 Set an iron post, 3 ft. long, 1 in. in diam., on surface rock, deposit a stone, marked with a cross (x) at base of post, and raise a mound of stone around post, for $\frac{1}{4}$ sec. cor. of secs. 25 and 36, with brass cap, marked

$\frac{1}{4}$ S 25
S 36
1923

from which,

- A juniper, 20 ins. in diam., brs. N. 44½° W., 1.11 lks. dist., marked $\frac{1}{4}$ S 25 BT.
- A juniper, 36 ins. in diam., brs. S. 26° W., .75 lks. dist., marked $\frac{1}{4}$ S 36 BT.
- 48.25 Descend 54 ft., over N. and NW. slopes.
Bottom of gulch, course N.
- 62.55 Ascend 157 ft., over NE. slope, to
Top of cliff, 15 ft. high, bearing N. 70° W. and SE. facing NE.
Ascend 30 ft., over N. slope
- 67.30 Descend 214 ft., over steep broken NW. slope. Enter dense timber, brs. NW. and SE.
- 79.05 Bottom of gulch, course N. Leave dense, and enter scattering timber, brs. N. and S.
- 80.26 Ascend 20 ft., over NE. slope, to
The cor. of secs. 25, 26, 35 and 36.
Land, mountainous.
Soil, rocky, 4th rate.
Timber, juniper and pine.
Undergrowth, scrub oak.

BOOK 3662

30 Survey of Subdivision lines of Township 14 North, Range 6 East.

Chains.

- N.0°1'W., on true line, bet. secs.25 and 26.
Over mountainous land, thru scattering timber and undergrowth.
Descend 307 ft. over NE.slope.
- 11.60 Wash, 40 lks.wide, in bottom of canyon, course W.
Ascend 510 ft., over steep S.slope, to
- 31.10 Top of vertical cliff, 30 ft.high, bearing E.and W., facing S., and forming N.or right rim of canyon.
Ascend 58 ft., over S.slope, to
- 34.40 Spur.slopes W.
Descend 74 ft., over N.slope, to
- 40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins.in the ground, for $\frac{1}{4}$ sec.cor. of secs.25 and 26, with brass cap, marked
- $\frac{1}{4}$
S26 | S25
1923
- from which,
A cedar, 6 ins.in diam., brs.N.73°E., 60 lks. dist., marked $\frac{1}{4}$ S 25 BT.
A pine, 14 ins.in diam., brs.N.75°W., 100 lks. dist., marked $\frac{1}{4}$ S 26 BT.
- 41.50 Descend 14 ft., over N.slope.
Head of gulch, course W.
- 46.00 Ascend 10 ft., over SW.slope.
Spur, slopes NW.
- 59.80 Descend 363 ft., over N.slope.
Bottom of gulch, course W. from SE.
- 64.00 Ascend 40 ft., over SW.slope.
Spur, slopes NW.
- 78.80 Descend 373 ft., over N.slope.
Wash, 40 lks.wide, course SW. in bottom of canyon.
- 80.00 Ascend 34 ft., over SE.slope, to
Set an iron post, 3 ft.long, 2 ins.in diam., 18 ins.in the ground to bed rock, supported in a mound of stone, for cor.of secs. 23, 24, 25 and 26, with brass cap, marked
- T14N | R6 E
S23 | S24
S26 | S25
1923
- from which,
A cedar, 18 ins. in diam., brs.N.16 $\frac{1}{2}$ °E., 37 lks.dist., marked T14N R6E S24 BT.
A pine, 16 ins.in diam., brs.N.14°W., 60 lks.dist., marked T14N R6E S23 BT.
A pine, 6 ins.in diam., brs.S.88°E., 136 lks.dist., marked T14N R6E S25 BT.
- No other bearing tree available. Raise a mound of stone, 3 ft.base, 1 $\frac{1}{2}$ ft.high, W.of cor.
Land, mountainous.
Soil, rocky, 4th rate.
Timber, juniper and pine.
Undergrowth, scrub oak and catclaw.

- S.89°40'E., on random line, bet.secs.24 and 25.
- 40.00 Set temp. $\frac{1}{4}$ sec.cor.
- 80.30 Fall 6 lks.S.of the true point for reestablished cor.of secs.19, 24, 25 and 30, on the E. bdy.of the Tp., witnessed 2 chs.S., as hereinbefore described.
From true point for sec.cor.,
N. 89° 42' W., on true line, bet. secs.24 and 25.
Over mountainous land, on S.or left wall of canyon, thru scattering timber and dense undergrowth.
- 40.15 Descend 490 ft. over steep broken N.slope, to
Set an iron post, 3 ft.long, 1 in.in diam., 20 ins.in the

Chains.

ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec.cor. of secs. 24 and 25, with brass cap, marked

$\frac{1}{4}$ S 24
S 25
1923

from which,

A pine, 5 ins.in diam., brs. N.15 $\frac{1}{2}$ ° E., 8 lks. dist., marked $\frac{1}{4}$ S 24 BT.

A juniper. 10 ins.in diam., brs.S.51 $\frac{1}{4}$ °W., 33 lks. dist., marked $\frac{1}{4}$ S 25 BT.

- 43.59 Descend 118 ft., over steep NW.slope.
- 46.10 Head of gulch, course N. Ascend 89 ft., over NE.slope.
- 63.20 Point of spur, slopes N. Descend 508 ft., over NW.slope.
- 69.60 Wash, 40 lks.wide in bend, course NW. from NE. in bottom of canyon. Ascend 38 ft., over NE.slope.
- 71.70 Descend 77 ft., over NW.slope.
- 72.60 Same wash and canyon bottom in bend, course NW. from NE. Ascend 37 ft., over NE.slope.
- 79.30 Point of spur, slopes N. Descend 82 ft., over NW.slope.
- 80.30 Same wash and canyon bottom, 40 lks.wide, course SW. Ascend 28 ft., over SE.slope, to The cor.of secs.23,24, 25 and 26. Land, mountainous. Soil, rocky, 4th rate. Timber, juniper and pine. Undergrowth, catclaw and scrub oak.

N.0°1'W., on true line, bet. secs.23 and 24. Over mountainous land, thru. scattering timber and undergrowth.

- 7.80 Ascend 189 ft., over broken SE.slope. Ridge, brs.E.and W.
- 13.20 Descend 117 ft., over N.slope. Bottom of gulch, course W.
- 34.50 Ascend 430 ft., over S.slope. Spur, slopes W.
- 40.00 Descend 25 ft., over NW.slope, to Set an iron post, 3 ft.long, 1 in. in diam., 12 ins.in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec.cor. of secs.23 and 24, with brass cap, marked

$\frac{1}{4}$
S23 | S24
1923

from which,

A pine, 6 ins.in diam., brs.S.72°E., 66 lks. dist., marked $\frac{1}{4}$ S 24 BT.

A pine, 4 ins.in diam., brs.W. 3 lks.dist., marked BT.

- 42.40 Descend 140 ft., over broken NW.slope. Bottom of gulch, course SW.
- 51.00 Ascend 317 ft., over steep S.slope. Ridge, brs.E.and W.
- 57.00 Descend 145 ft., over N.slope. Bottom of gulch, course W.
- 65.90 Ascend 210 ft., over S.slope. Ridge, brs.E.and W.
- 69.50 Descend 557 ft., over steep N.slope to sec.cor. Trail, brs.NW. and SE.
- 76.50 Top of vertical cliff, 75 ft.high, brs.E.and W., facing N.
- 80.00 Set an iron post, 3 ft.long, 2 ins.in diam., 24 ins.in

BOOK 3662

32 Survey of Subdivision lines of Township 14 North, Range 6 East.

Chains.

the ground, for cor. of secs. 13, 14, 23 and 24, with
brass cap, marked

T14N	R6 E
S14	S13
S23	S24
1923	

from which,

- A pine, 9 ins. in diam., brs. N. 76° W., 146 lks.
dist., marked T14N R6E S14 BT.
- A pine, 9 ins. in diam., brs. N. 152° E., 196 lks.
dist., marked T14N R6E S13 BT.
- A pine, 8 ins. in diam., brs. S. 55½° E., 73 lks.
dist., marked T14N R6E S24 BT.
- A cedar, 12 ins. in diam., brs. S. 17° W., 80 lks.
dist., marked T14N R6E S23 BT.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, pine and cedar.

Undergrowth, scrub oak and corona christo.

40.00

S. 89° 42' E., on random line, bet. secs. 13 and 24.

Set temp. ¼ sec. cor.

80.28

Fall 3 lks. S. of the reestablished cor. of secs. 13, 18, 19
and 24 on the E. bdy. of the Tp., hereinbefore described.

Thence,

N. 89° 43' W., on true line, bet. secs. 13 and 24.

Over mountainous, thru. scattering timber and dense under-
growth.

9.90

Descend 170 ft., over NW. slope.

Bottom of gulch, course NW.

18.40

Ascend 220 ft., over steep E. slope, to

Top of S. end of vertical cliff, 40 ft. high, bearing N. and
S., facing E.

Ascend 40 ft., over NE. slope.

20.00

Point of spur, sloping N. Thence over steep broken NW. and
N. slopes on S. or left wall of canyon.

40.14

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for ¼ sec. cor. of secs. 13 and 24, with brass
cap, marked

¼ S 13
S 24
1923

from which;

- A pine, 12 ins. in diam., brs. N. 82° W., 116 lks.
dist., marked ¼ S 13 BT.

No other bearing tree available.

Raise a mound of stone, 4 ft. base, 2 ft. high, N. of cor.

From this ¼ sec. cor., the bottom of the canyon, course W., brs.
N. about 3 chs, dist.

43.38

Descend 82 ft., over steep NW. slope.

Bottom of gulch, course N. near head.

53.28

Ascend 56 ft., over NE. slope.

Point of spur, slopes N.

57.75

Descend 164 ft., over NW. slope.

Head of gulch, course N.

65.90

Ascend 80 ft., over NE. slope.

Spur, slopes N.

79.25

Descend 350 ft., over W. slope.

Bottom of gulch, course NW.

80.28

Ascend 22 ft., over N. slope, to

The cor. of secs. 13, 14, 23 and 24.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, pine and cedar.

Undergrowth, scrub oak and cact. s.

BOOK 3662

Survey of Subdivision lines of Township 14 North, Range 6 East. 33

Chains.

N, 0°1'W., on true line, bet. secs. 13 and 14.
Over mountainous land, thru. scattering timber and undergrowth growth.


1.30 Descend 42 ft., over N. slope:
Bottom of gulch, course NW.

6.00 Ascend 73 ft., over SW. slope.
Point of spur, slopes NW.

10.00 Descend 90 ft., over N. slope.
Bottom of canyon, 40 lks. wide, course W.

22.60 Ascend 403 ft., over steep S. slope.
Ridge, brs. E. and W.

40.00 Descend 130 ft., over NW. slope, to
Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. of secs. 13 and 14, with brass cap, marked



from which,

A cedar, 8 ins. in diam., brs. N. 22° E., 25 lks. dist., marked $\frac{1}{4}$ S 13 BT.

A pine, 6 ins. in diam., brs. S. 36° W., 46 lks. dist., marked $\frac{1}{4}$ S 14 BT.

41.00 Descend 18 ft., over NW. slope.
Bottom of gulch, course W.


49.00 Ascend 108 ft., over S. slope.
Ridge, brs. E. and W.

61.00 Descend 175 ft., over N. slope.
Bottom of gulch, course W.

70.00 Ascend 310 ft., over steep S. slope.
Spur, slopes W.

74.50 Descend 149 ft., over N. slope.
Bottom of gulch, course W.

80.00 Ascend 95 ft., over S. slope, to
Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 11, 12, 13 and 14, with brass cap, marked



from which,

A pine, 6 ins. in diam., brs. N. 60° W., 115 lks. dist., marked T14N R6E S11 BT.

A pine, 4 ins. in diam., brs. N. 71 $\frac{1}{2}$ ° E., 249 lks. dist., marked BT.

A pine, 12 ins. in diam., brs. S. 9° E., 243 lks. dist., marked T14N R6E S13 BT.

A pine, 10 ins. in diam., brs. S. 2° 30' W., 188 lks. dist., marked T14N R6E S14 BT.

Land, mountainous.

Soil, rocky 4th rate.

Timber, cedar and pine.

Undergrowth, corona christa and scrub oak.

40.00 S. 89° 43' E., on random line, bet. secs. 12 and 13.
80.40 Set temp. $\frac{1}{4}$ sec. cor.

Fall 9 lks. N. of the true point for reestablished cor. of secs. 7, 12, 13 and 18, on the E. bdy. of the Tp., witnessed at 50 lks. N., as hereinbefore described.

From true point for sec. cor.,

N. 89° 39' W., on true line, bet. secs. 12 and 13.

Over mountainous land, thru. scattering timber and undergrowth.

BOOK 3662

34 Survey of Subdivision lines of Township 14 North, Range 6 East.

Chains.

- 26.90 Ascend 160 ft., over N. slope, to
Draw, course NE. near head.
- 39.00 Ascend 160 ft. over NE. slope, to
Ridge, brs. NW. and SE.
- 40.20 Descend slightly over SW. slope, to
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor. of secs. 12 and 13, with
brass cap, marked

$$\begin{array}{r} \frac{1}{4} \text{ S } 12 \\ \text{S } 13 \\ 1923 \end{array}$$

from which,

A cedar, 8 ins. in diam., brs. N. 74°W., 141 lks.
dist., marked $\frac{1}{4}$ S 12 BT.A pine, 6 ins. in diam., brs. S. 74°W., 30 lks.
dist., marked $\frac{1}{4}$ S 13 BT.

- 44.26 Ascend 12 ft., over S. slope.
- 48.50 Ascend 40 ft., over SE. slope.
- 80.40 Spur, slopes SW.
Descend 742 ft., over W. slope, to
The cor. of secs. 11, 12, 13 and 14.
Land, mountainous.
Soil, rocky, 4th rate.
Timber, pine and cedar.
Undergrowth, catclaw, corqna christo and scrub oak.

N. 0° 1' W., on true line, bet. secs. 11 and 12.Over mountainous land, thru. scattering timber and under-
growth.

- 6.60 Descend 35 ft., over W. slope, to
- 24.00 Ascend 260 ft., over SW. slope.
Ridge, brs. E. and W.
- 40.00 Descend 169 ft., over N. slope, to
Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in
the ground to bed rock, supported in a mound of stone,
for $\frac{1}{4}$ sec. cor. of secs. 11 and 12, with brass cap,
marked

$$\begin{array}{r} \frac{1}{4} \\ \text{S } 11 \text{ | } \text{S } 12 \\ 1923 \end{array}$$

from which,

A pine, 6 ins. in diam., brs. N. 50°E., 103
lks. dist., marked $\frac{1}{4}$ S 11 BT.A cedar, 8 ins. in diam., brs. N. 81°W., 59
lks. dist., marked $\frac{1}{4}$ S 12 BT.

- 40.60 Descend 20 ft., over N. slope, to
Bottom of gulch, course W.
- 54.00 Ascend 426 ft., over SW. slope.
Ridge, brs. NW. and SE.
- 69.50 Descend 267 ft., over NE. slope.
Bottom of gulch, course W. (general course NW.)
- 72.10 Ascend 12 ft., over SW. slope.
- 80.00 Descend 30 ft., over W. slope, to
Set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in
the ground to bed rock, supported in a mound of stone,
for cor. of secs. 1, 2, 11 and 12, with brass cap, marked

$$\begin{array}{r} \text{T } 14 \text{ N } \text{ | } \text{R } 6 \text{ E} \\ \text{S } 2 \text{ | } \text{S } 1 \\ \text{S } 11 \text{ | } \text{S } 12 \\ 1923 \end{array}$$

from which,

A cedar, 10 ins. in diam., brs. N. 6°W., 6 lks.
dist., marked T14N R6E S2 BT.

BOOK 3662

Survey of Subdivision lines of Township 14 North, Range 6 East. 35

Chains.

- A cedar, 10 ins. in diam., brs. N. 63 $\frac{3}{4}$ ° E., 115 lks. dist., marked T14N R6E S1 BT.
- A cedar, 12 ins. in diam., brs. S. 36 $\frac{1}{4}$ ° E., 68 lks. dist., marked T14N R6E S12 BT.
- A pine, 14 ins. in diam., brs. S. 57 $\frac{1}{2}$ ° W., 60 lks. dist., marked T14N R6E S11 BT.

Land, mountainous.
 Soil, rocky, 4th rate.
 Timber, juniper and pine.
 Undergrowth, scrub oak and corona christo.

- 40.00 S. 89° 39' E., on random line, bet. secs. 1 and 12.
- 80.32 Set temp. $\frac{1}{4}$ sec. cor. Intersect the reestablished cor. of secs. 1, 6, 7 and 12, on the E. bdy. of the Tp., hereinbefore described. Thence, N. 89° 39' W., on true line, bet. secs. 1 and 12. Over mountainous land, in Spring Creek Canyon, thru. scattering timber and dense undergrowth.
- 14.90 Ascend 370 ft., over steep E. slope, to West rim of Spring Creek Canyon, brs. N. and S. Leave canyon; enter rolling land.
- 28.30 Ascend 48 ft., over NE. slope, to East rim of mesa, brs. N. and S. Thence over nearly level land on mesa.
- 40.16 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 1 and 12, with brass cap, marked

$\frac{1}{4}$ S 1
 $\frac{1}{4}$ S 12
 1923

from which,
 A cedar, 16 ins. in diam., brs. N. 6° W., 12 lks. dist., marked $\frac{1}{4}$ S 1 BT.
 A cedar, 30 ins. in diam., brs. S. 44 lks. dist., marked $\frac{1}{4}$ S 12 BT.

- 54.40 Continue over nearly level land on mesa. W. rim of mesa, brs. N. and S. Leave mesa. Enter mountainous land.
- 62.80 Descend 102 ft., over W. slope. Bottom of gulch, course N.
- 69.90 Ascend 67 ft., over E. slope. Ridge, brs. N. and S.
- 80.32 Descend 179 ft., over W. slope, to Intersect the cor. of secs. 1, 2, 11 and 12. Land, mountainous, rolling and nearly level. Soil, rocky, 4th rate. Timber, juniper and cedar. Undergrowth, scrub oak and corona christo.

- 6.50 N. 0° 1' W., on true line, bet. secs. 1 and 2. Over mountainous land, thru. scattering timber and dense undergrowth.
- 10.60 Descend 15 ft., over W. slope. Ascend 10 ft., over SW. slope. Point of spur, slopes W.
- 35.00 Descend 385 ft., over steep broken NW. slope. Bottom of gulch, course W.
- 38.50 Ascend 64 ft., over S. slope. Spur, slopes W.
- 40.00 Descend 19 ft., over NW. slope, to Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 1 and 2, with brass cap, marked

BOOK 3662

36 Survey of Subdivision lines of Township 14 North, Range 6 East.

Chains.

$$\frac{1}{4}$$

$$S 2 | S 1$$

1923

from which,

A pine, 4 ins. in diam., brs. N. 88° W., 16 lks.
dist., marked BT.A pine, 4 ins. in diam., brs. N. 8° E., 21 lks.
dist., marked BT.

Descend 15 ft., over N. slope.

41.00 Bottom of gulch, course W.

Ascend 265 ft., over S. slope.

65.50 Ridge, brs. E. and W.

Descend 115 ft., over NE. slope, to

75.88 Intersect the N. bdy. of the Tp., at a point 1.16 chs. N. 89°
59' W., of the original cor. of secs. 1 and 2, changed to
angle point, as hereinbefore described.At point of intersection, set an iron post, 3 ft. long, 2
ins. in diam., 26 ins. in the ground, for closing cor. of
secs. 1 and 2, with brass cap, marked

T15N R6 E

S35

$$S 2 | S 1$$

T14N R6 E

G C

1923

from which,

A cedar, 8 ins. in diam., brs. S. 40° E., 158 lks.
dist., marked T14N R6E S1 CC BT.A cedar, 8 ins. in diam., brs. S. 27½° W., 354 lks.
dist., marked T14N R6E S2 CC BT.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, cedar and pine.

Undergrowth, scrub oak and corona christo.

The original cor. of secs. 2, 3, 34 and 35, on S. bdy. of the
Tp., established by Wm. H. Richards, Jr., U.S.S. in 1916
is an iron post, 3 ins. in diam., projecting 24 ins.
above ground, firmly set in ground and mound of stone,
properly marked on brass cap, and witnessed by four
properly marked cedar bearing trees, one each NW., NE.,
SE. and SW. of cor.

Thence,

N. 0° 1' W., on true line, bet. secs. 34 and 35.

Over mountainous land, thru. scattering timber and under-
growth.

Ascend 241 ft., over SW. and S. slopes.

13.20 Wire fence, brs. E. and W.

21.00 Ridge, brs. E. and W.

Descend 96 ft., over N. slope, to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 4 ins. in
the ground to bedrock, supported in a mound of stone,
for ¼ sec. cor. of secs. 34 and 35, with brass cap, marked
$$\frac{1}{4}$$

$$S34 | S35$$

1923

from which,

A cedar, 8 ins. in diam., brs. N. 65½° E., 36 lks.
dist., marked ¼ S 35 BT.A cedar, 8 ins. in diam., brs. N. 82½° W., 108 lks.
dist., marked ¼ S 34 BT.

Descend 239 ft., over N. slope.

Survey of Subdivision lines of Township 14 North, Range 6 East. 37

Chains.

- 58.80 Bottom of gulch, course W.
Ascend 88 ft. over S. slope.
- 70.00 Spur, slopes W.
Descend 29 ft., over NW. slope.
- 75.00 Draw, course SW.
Ascend gradual S. slope, to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in
the ground, for cor. of secs. 26, 27, 34 and 35, with
brass cap, marked

T14N	R6 E
S27	S26
S34	S35
1923	

- from which,
- A cedar, 8 ins. in diam., brs. N. 41 $\frac{1}{2}$ ° W., 126
lks. dist., marked T14N R6E S27 BT.
- A cedar, 10 ins. in diam., brs. N. 49° E., 141
lks. dist., marked T14N R6E S26 BT.
- A pine, 6 ins. in diam., brs. S. 64° E., 72
lks. dist., marked T14N R6E S35 BT.
- A cedar, 8 ins. in diam., brs. S. 33 $\frac{1}{2}$ ° W., 151
lks. dist., marked T14N R6E S34 BT.

Land, mountainous.
Soil, rocky, 4th rate.
Timber, juniper, and cedar.
Undergrowth, scrub oak.

- 40.00 S. 89° 43' E., on random line, bet. secs. 26 and 35.
Set temp. $\frac{1}{4}$ sec. cor.
- 80.12 Fall 8 lks. N. of the cor. of secs. 25, 26, 35 and 36.
Thence,
N. 89° 40' W., on true line, bet. secs. 26 and 35.
Over mountainous land, thru. scattering timber and dense
undergrowth.
- 5.10 Ascend 46 ft., over NE. slope, to
Enter rolling land on top of ridge, bearing NW. and SE.
- 25.10 Descend 86 ft., over NW. slope, to
Enter mountainous land.
- 40.06 Descend 160 ft., over SW. slope, to
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor. of secs. 26 and 35, with brass
cap, marked

S 26
S 35
1923

- from which,
- A cedar, 12 ins. in diam., brs. N. 47° W., 76 lks.
dist., marked $\frac{1}{4}$ S 26 BT.
- A cedar, 8 ins. in diam., brs. S. 33° W., 42 lks.
dist., marked $\frac{1}{4}$ S 35 BT.

- 42.80 Descend 60 ft., over SW. slope.
Bottom of gulch, 40 lks. wide, course NW.
- 63.10 Ascend 115 ft., over NE. slope.
Ridge, brs. NW. and SE.
- 80.12 Descend 59 ft., over SW. and S. slopes to
The cor. of secs. 26, 27, 34 and 35.
Land, mountainous and rolling.
Soil, rocky, 4th rate.
Timber, juniper and pine.
Undergrowth, scrub oak.

N. 0° 1' W., on true line, bet. secs. 26 and 27.
Over mountainous land, thru. scattering timber and under-
growth.

BOOK 3662

38 Survey of Subdivision lines of Township 14 North Range 6 East.

Chains.

2.00 Ascend 12 ft., over S. slope.
Spur, slopes W.

12.10 Descend 204 ft., over N. slope.
Bottom of gulch, course W. near head.

22.50 Ascend 150 ft., over S. slope.
Ridge, brs. E. and W.

27.00 Descend 65 ft., over N. slope.
Bottom of gulch, course W.

40.00 Ascend 70 ft., over SW. slope, to
Ridge, brs. W. and SE.
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 26 and 27, with brass cap, marked

$\frac{1}{4}$
S27 | S26
1923

from which,
A cedar, 10 ins. in diam., brs. N. $38\frac{1}{2}^\circ$ E., 28 lks.
dist., marked $\frac{1}{4}$ S 26 BT.
A cedar, 8 ins. in diam., brs. S. $73\frac{1}{2}^\circ$ W., 28 lks.
dist., marked $\frac{1}{4}$ S 27 BT.

55.00 Descend 317 ft., over N. slope.
Bottom of canyon, 50 lks. wide, course W.

65.20 Ascend 231 ft., over S. slope.
Ridge, brs. E. and W.

80.00 Descend 87 ft., over N. slope, to
Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 22, 23, 26 and 27, with brass cap, marked

T14N | R6 E
S22 | S23
S27 | S26
1923

from which,
A cedar, 6 ins. in diam., brs. N. 73° W., 157 lks.
dist., marked T14N R6E S22 BT.
A cedar, 15 ins. in diam., brs. N. $59\frac{1}{2}^\circ$ E., 602 lks.
dist., marked T14N R6E S23 BT.
A cedar, 8 ins. in diam., brs. S. 2° E., 148 lks.
dist., marked T14N R6E S26 BT.
A cedar, 18 ins. in diam., brs. S. 3° W., 200 lks.
dist., marked T14N R6E S27 BT.

Land, mountainous.
Soil, rocky, 4th rate.
Timber, cedar and pine.
Undergrowth, catclaw, cacti and oak.

40.00 S. $89^\circ 40'$ E., on random line, bet. secs. 23 and 26.
Set temp. $\frac{1}{4}$ sec. cor.

80.08 Fall 4 lks. S. of the cor. of secs. 23, 24, 25 and 26,
thence,
N. $89^\circ 42'$ W., on true line, bet. secs. 23 and 26.
Over mountainous land, thru: scattering timber and undergrowth.

5.90 Ascend 93 ft., over SE. slope.
Point of spur, slopes SW.

15.50 Descend 84 ft., over SW. slope.
Draw, course SW.

22.00 Ascend 41 ft., over SE. slope.
Ridge, brs. NE. and SW.

26.85 Descend 124 ft., over NW. slope.
Bottom of gulch, course SW.

emp

Survey of Subdivision lines of Township 14 North, Range 6 East. 39

Chains.

38.85 Ascend 169 ft., over SE.slope.
Ridge, brs.N.and S.
40.04 Descend 26 ft., over W.slope, to.
Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec.cor.of secs. 23 and 26, with
brass cap, marked

$\frac{1}{4}$ S 23.
S 26
1923

from which,
A cedar, 6 ins. in diam., brs.N.47°W., 115 lks.
dist., marked $\frac{1}{4}$ S 23 BT.
A cedar, 8 ins. in diam., brs.S.60°E., 81 lks.
dist., marked $\frac{1}{4}$ S 26 BT.

80.08 Descend 318 ft., over NW. and N.slopes, to
The cor.of secs.22, 23, 26 and 27.
Land, mountainous.
Soil, rocky, 4th rate.
Timber, cedar and pine.
Undergrowth, catclaw and scrub oak.

8.80 N.0°11'W., bet.secs.22 and 23,
Over rolling land, thru. scattering timber and undergrowth.
Descend 52 ft., over N.slope.
Draw, course N.60°W.
20.50 Ascend 60 ft., over S.slope.
Low ridge, brs.E.and W.
28.20 Descend 84 ft., over N.slope.
Draw, course W.
36.50 Ascend 16 ft., over S.slope..
Low spur, slopes W.
40.00 Descend 12 ft., over N.slope, to
Set an iron post, 3 ft.long, 1 in. in diam., on surface
rock, supported in a mound of stone, for $\frac{1}{4}$ sec.cor.of
secs. 22 and 23, with brass cap, marked

$\frac{1}{4}$
S22 | S23
1923

from which,
A cedar, 4 ins.in diam., brs.N.32 $\frac{1}{2}$ °E., 95.lks.
dist., marked BT.
A cedar, 4.ins. in diam., brs. S.64 $\frac{1}{2}$ °W., 305 lks.
dist., marked BT..

72.70 Descend 80 ft., over NW. slope.
Wash, 30 lks.wide, course SW.
80.00 Ascend 25 ft., over SE.slope, to
Set an iron post, 3 ft. long, 2 ins.in diam., 26 ins.in
the ground, for cor.of secs.14, 15, 22 and 23, with brass
cap, marked

T14N | R6E
S15 | S14
S22 | S23
1923

from which,
A cedar, 12 ins.in diam., brs.N.65 $\frac{1}{2}$ °W., 149
lks.dist., marked T14N R6E S15 BT.
A cedar, 4.ins.in diam., brs.N.66°E., 30
lks.dist., marked BT..
A pine, 6 ins.in diam., brs.S.70 $\frac{1}{2}$ °E., 96
lks.dist., marked T14N R6E S23 BT.
A cedar, 8 ins.in diam., brs.S.22 $\frac{1}{2}$ °W., 159
lks.dist., marked T14N R6E S22 BT.

Land, rolling.
Soil, rocky, 4th rate.
Timber, juniper and pine.
Undergrowth, scrub oak.

BOOK 3662

40 Survey of Subdivision of Township 14 North, Range 6 East.

Chains.

40.00 S. 89° 42' E., on random line, bet. secs. 14 and 23.
Set temp. $\frac{1}{4}$ sec. cor.

80.10 Fall 5 lks. N. of the cor. of secs. 13, 14, 23 and 24.
Thence,
N. 89° 40' W., on true line, bet. secs. 14 and 23.
Over mountainous land, thru. scattering timber and under-
growth.

5.60 Ascend 117 ft., over NE. slope.
Spur, slopes NW.
Descend 242 ft., over SW. slope.

10.60 Trail, brs. NW. and SE.

22.90 Draw, course W. from SE. Thence in draw;
Descend 90 ft. to

38.20 Leave draw, course NW. from E. Enter rolling land.
Ascend 10 ft., over NE. slope, to

40.05 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the
ground to bed rock, supported in a mound of stone, for
 $\frac{1}{4}$ sec. cor. of secs. 14 and 23, with brass cap, marked

$\frac{1}{4}$ S 14
S 23
1923

from which,

A pine, 6 ins. in diam., brs. N. 22° E., 6 lks.
dist., marked $\frac{1}{4}$ S 14 BT.
A pine, 8 ins. in diam., brs. S. 24° W., 15 lks.
dist., marked $\frac{1}{4}$ S 23 BT.

45.70 Ascend 16 ft., over NE. slope.
Enter mountainous land.

48.10 Descend 76 ft., over NW. slope.
Bottom of gulch, course SW.
Ascend 86 ft., over SE. slope.

55.10 Point of spur, slopes S.
Descend 197 ft., over W. slope.

69.50 Draw, SW. Enter rolling land,
Ascend 21 ft., over SE. slope, to

80.10 The cor. of secs. 14, 15, 22 and 23.
Land, mountainous and rolling.
Soil, rocky, 4th rate.
Timber, cedar and pine.
Undergrowth, scrub oak and cactus.

N. 0° 1' W., bet. secs. 14 and 15.
Over rolling land, thru. scattering timber & undergrowth.

13.50 Ascend 116 ft., over SE. slope.
Ridge, brs. E. and W.

39.40 Descend 176 ft., over N. slope.
Draw, course W.

40.00 Ascend slightly over S. slope, to
Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in the
ground to bed rock, supported in a mound of stone, for
the $\frac{1}{4}$ sec. cor. of secs. 14 and 15, with brass cap,
marked

$\frac{1}{4}$
S 15 | S 14
1923

from which,

A cedar, 12 ins. in diam., brs. N. 38 $\frac{1}{2}$ ° W., 56 lks.
dist., marked $\frac{1}{4}$ S. 15 BT.
A cedar, 8 ins. in diam., brs. S. 79° E., 71 lks.
dist., marked $\frac{1}{4}$ S. 14 BT.

43.30 Ascend 26 ft., over S. slope.
Spur, slopes W.

49.00 Descend 35 ft., over N. slope.
Draw, course W.

Survey of Subdivision lines of Township 14 North, Range 6 East. 41

Chains.

63.80 Ascend 98 ft., over gradual S.slope, to
Enter mountainous land.
80.00 Ascend 206 ft., over steep S.slope, to
Set an iron post, 3 ft.long, 2 ins.in diam., on surface
rock, supported in a mound of stone for cor.of secs.
10, 11, 14 and 15, with brass cap, marked

T14N	R6 E
S10	S11
S15	S14
1923	

from which,
A cedar, 10 ins.in diam., brs.N.68 $\frac{1}{2}$ °W., 42 lks.
dist., marked T14N R6E S10 BT.
A cedar, 8 ins.in diam., brs.N.32°E., 82 lks+
dist., marked T14N R6E S11 BT.
A cedar, 8 ins.in diam., brs.S.29°E., 269 lks.
dist., marked T14N R6E S14 BT.
A cedar, 5 ins. in diam., brs.S.33 $\frac{1}{4}$ °W., 161 lks.
dist., marked T14N R6E S15 BT.

Land, rolling and mountainous..
Soil, rocky, 4th rate.
Timber, cedar and pine.
Undergrowth, corona christo and scrub oak.

40.00 S.89°40'E., on random line, bet. secs.11 and 14.
Set temp. $\frac{1}{4}$ sec.cor.
80.02 Fall 5 lks.S. of the cor.of secs.11, 12, 13 and 14.
Thence,
N.89°42'W., on true line, bet. secs.11 and 14.
Over mountainous land, thru.scattering timber and under-
growth.
39.70 Descend 451 ft., over SW.slope.
Wash, 30 lks.wide, course SW. Enter rolling land.
Ascend slightly over SE.slope, to
40.01 Set an iron post, 3 ft.long, 1 in.in diam., 8 ins.in the
ground to bed rock, supported in a mound of stone, for
 $\frac{1}{4}$ sec.cor. of secs.11 and 14, with brass cap, marked

$\frac{1}{4}$ S 11
S 14
1923

from which,
A cedar, 8 ins. in diam., brs.N.3°W., 41 lks.
dist., marked $\frac{1}{4}$ S 11 BT.
A cedar, 8 ins.in diam., brs.S.69 $\frac{1}{2}$ °E., 41 lks.
dist., marked $\frac{1}{4}$ S 14 BT.

43.00 Descend gradually over S.slope.
Wash, 50 lks.wide, course NW.
Ascend 89 ft., over NE.slope.
67.50 Ridge, brs.NW. and SE.
Descend 40 ft., over S.slope, to
80.02 Intersect the cor.of secs.10, 11, 14 and 15.
Land, mountainous and rolling.
Soil, rocky, 4th rate.
Timber, cedar and juniper.
Undergrowth, corona christo and scrub oak.


N.0° 1'W., bet.secs.10 and 11.
Over mountainous land, thru.scattering timber and under-
growth.
Ascend 12 ft., over S.slope.
1.50 Ridge, brs.E.and W.
Descend 150 ft., over N.slope.
12.10 Bottom of gulch, course W.

BOOK 3662


42 Survey of Subdivision lines of Township 14 North, Range 6 East.

Chains.

21+80 Ascend 160 ft., over S.slope.
 Spur, slopes W.
 34.80 Descend 106 ft., over N.slope.
 Draw, course W. Enter rolling land.
 40.00 Ascend 29 ft., over S.slope, to
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground for $\frac{1}{4}$ sec. cor. of secs. 10 and 11, with brass
 cap, marked



from which,
 .A cedar, 8 ins. in diam., brs. N. 71 $\frac{3}{4}$ ° E., 133 lks.
 dist., marked $\frac{1}{4}$ S 11 BT.
 No other bearing tree available. Raise a mound of stone,
 3 ft. base; 2 ft. high. W. of cor.
 41.00 Ascend 6 ft., over S.slope.
 Ridge, brs. E. and W.
 57.00 Descend 49 ft., over gradual N.slope, to
 Enter mountainous land.
 62.70 Descend 103 ft., over N.slope, to
 Bottom of rocky gulch, course W.
 Ascend 92 ft. over broken S.slope.
 65.30 Spur, slopes W.
 69.40 Descend 86 ft., over N.slope.
 Bottom of gulch, course W.
 73.50 Ascend 135 ft., over steep S.slope, to
 80.00 Ascend 18 ft., over SW.slope, to
 Set an iron post 3 ft. long, 2 ins. in diam., 6 ins. in
 the ground to bed rock, supported in a mound of stone,
 for cor. of secs. 2, 3, 10 and 11, with brass cap,
 marked



from which,
 A cedar, 6 ins. in diam., brs. N. 41° W., 85 lks.
 dist., marked T14N R6E S3 BT.
 A cedar, 6 ins. in diam., brs. N. 15 $\frac{1}{2}$ ° E., 34 lks.
 dist., marked T14N R6E S2 BT.
 A cedar, 8 ins. in diam., brs. S. 72° E., 60 lks.
 dist., marked T14N R6E S11 BT.
 A pine, 18 ins. in diam., brs. S. 72° W., 85 lks.
 dist., marked T14N R6E S10 BT.


Land, mountainous and rolling.
 Soil, rocky, 4th rate.
 Timber, cedar and pine.
 Undergrowth, corona christo and scrub oak.

40.00 S. 89° 42' E., on random line, bet. secs. 2 and 11.
 Set - temp. $\frac{1}{4}$ sec. cor.
 80.16 Fall 21 lks. S. of the cor. of secs. 1, 2, 11 and 12.
 Thence,
 N. 89° 51' W., on true line, bet. secs. 2 and 11.
 Over mountainous land, thru. scattering timber and under-
 growth.
 4.40 Descend 113 ft., over steep W.slope.
 Bottom of gulch, course N.
 24.00 Ascend 175 ft., over NE.slope.
 Ridge, brs. NW. and SE.
 40.08 Descend 547 ft., over steep broken SW.slope, to
 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in

Survey of Subdivision lines of Township 14 North Range 6 East. 43

Chains.

the ground to bed rock, supported in a mound of stone, for 1/4 sec.cor. of secs.2 and 11, with brass cap,marked




from which,
 A pine, 6 ins.in diam.,brs.N.10°W.,67 lks.
 dist., marked 1/4 S 2 BT.
 A pine,16 ins.in diam.,brs.S.80°W.,100 lks.
 dist., marked 1/4 S 11 BT.

- 44.50 Descend 120 ft., over W.slope.
- Bottom of gulch, course NW.
- 48.30 Ascend 79 ft.,over NE.slope.
- Point of spur,slopes NW.
- Descend 87 ft., over NW.slope.
- 55.60 Same gulch, course SW.
- Ascend 58 ft., over SE.slope.
- 60.80 Spur,slopes SW. Enter gently rolling land.
- Descend 40 ft.,over W.slope.
- 65.50 Draw, course SW.
- Ascend 28 ft.,over SE.slope.
- 73.70 Point of spur,slopes S. Enter mountainous land.
- Descend 79 ft., over SW.slope,to
- 80.16 The cor.of secs.2,3, 10 and 11.
- Land, mountainous and rolling.
- Soil, rocky, 4th rate.
- Timber, cedar and pine.
- Undergrowth, corona christo and scrub oak.

N.0°1'W., on true line, bet. secs:2 and 3.
 Over mountainous land, thru. scattering timber and undergrowth.

- 3.70 Ascend 14 ft.,over SW.slope.
- Ridge, brs.E.and W.
- 17.35 Descend 70 ft.,over gradual N. slope,to
- 26.40 Descend 219 ft., over steep N.slope.
- Bottom of gulch, course NW.
- Ascend 92 ft.,over S.slope.
- 34.10 Spur,slopes W.
- Descend 116 ft., over N.slope.
- 39.70 Bottom of gulch, course W.
- Ascend slightly over S.slope,to
- 40.00 Set an iron post, 3 ft.long, 1 in. in diam.,6 ins.in
- the ground to bed rock, supported in a mound of stone,
- for 1/4 sec.cor. of secs.2 and 3, with brass cap,marked



from which,
 A cedar, 6 ins: in diam., brs.N.79°W.,23 lks.
 dist., marked 1/4 S 3 BT.
 A cedar, 8 ins.in diam.,brs.N:88°E.,87 lks.
 dist., marked 1/4 S 2 BT.

- 45.00 Ascend 153 ft., over steep broken S.slope.
- Ridge, brs.E. and W.
- 56.00 Descend.159 ft.,over N.slope.
- Wash,50 lks. wide, course W. Enter rolling land.
- Ascend 53 ft.,over S.and SW.slopes,to
- 75.82 Intersect the N. bdy.of the Tp., at a point 1.27 chs.N.
- 89°53'W., from the original cor. of secs. 2 and 3,
- changed to angle point only, as hereinbefore described,
- At point of intersection, set an iron post, 3 ft.long,2
- ins.in diam., 26 ins.in the ground,for closing cor.of
- secs.2 and 3, with brass cap, marked

Chains.

T15N R6E	
S34	
S 3	S 2
T14N R6 E	C C
1923	

from which,

A cedar, 6 ins. in diam., brs. S. $25\frac{1}{2}^{\circ}$ E., 115 lks. dist., marked T14N R6E S2 CC BT.A cedar, 6 ins. in diam., brs. S. $31\frac{1}{2}^{\circ}$ W., 175 lks. dist., marked T14N R6E S3 CC BT.

Land, mountainous and rolling.

Soil, rocky, 4th rate.

Timber, cedar and pine.

Undergrowth, corona christo and scrub oak.

The original cor. of secs. 3, 4, 33 and 34, on the S. bdy, of the Tp., established by Wm. H. Richards, Jr., U.S.S. in 1916, is an iron post, 3 ins. in diam., projecting 24 ins. above ground, firmly set in ground and mound of stone, properly marked on brass cap, and witnessed by a mound of stone W., and three properly marked bearing trees, one each NE., NW., and SE. of cor.

Thence,

N. $0^{\circ}2'$ W., bet. secs. 33 and 34.

Over mountainous land, thru. scattering timber and undergrowth.

Descend 330 ft., over N. slope.

19.00 Bottom of gulch, course N. 70° W.

Ascend 100 ft., over steep S. slope.

24.50 Spur, slopes W.

Descend 148 ft., over steep N. slope.

33.10 Bottom of gulch, course W.

Ascend 231 ft., over steep S. slope, to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. of secs. 33 and 34, with brass cap, marked

S33 S34	
1923	

from which,

A juniper, 5 ins. in diam., brs. S. 46° E., 58 lks. dist., marked $\frac{1}{4}$ S 34 BT.A juniper, 8 ins. in diam., brs. S. $83\frac{1}{2}^{\circ}$ W., 43 lks. dist., marked $\frac{1}{4}$ S 33 BT.

Ascend 69 ft., over steep S. slope.

46.00 Spur, slopes W.

Descend 87 ft., over steep N. slope, to

55.00 Foot of steep slope, brs. E. and W. Enter rolling land

Descend slightly to

57.50 Wash, 20 lks. wide, course NW.

Descend 40 ft., over NW. slope to sec. cor.

57.85 Wire fence, brs. N. 70° E. and S. 70° W.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 27, 28, 33 and 34, with brass cap, marked

T14N R6 E	
S28 S27	
S33 S34	
1923	

from which,

A cedar, 8 ins. in diam., brs. N. 32° E., 154 lks. dist., marked T14N R6E S27 BT.

Survey of Subdivision lines of Township 14 North, Range 6 East, 45

Chains.

A cedar, 6 ins. in diam., brs. S. 42° E., 23 lks.
 dist., marked T14N R6E S34 BT.
 No other bearing tree available. Raise a mound of stone,
 3 ft. base, 2 ft. high, W. of cor.
 Land, mountainous and rolling.
 Soil, rocky, 4th rate.
 Timber, cedar and pine.
 Undergrowth, corona christo and scrub oak.

40.00 S. 89° 43' E., on random line, bet. secs. 27 and 34.
 Set temp. 1/4 sec. cor.
 80.00 Intersect the cor. of secs. 26, 27, 34 and 35.
 Thence,
 N. 89° 43' W., on true line, bet. secs. 27 and 34.
 Over mountainous land, thru. scattering timber and under-
 growth.
 35.20 Descend 360 ft., over steep S. slope.
 Ravine, course NW.
 40.00 Ascend 72 ft., over steep NE. slope, to
 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the
 ground to bed rock, supported in a mound of stone, for
 1/4 sec. cor. of secs. 27 and 34, with brass cap, marked

1/4 S 27
 S 34
 1923

from which,

A juniper, 20 ins. in diam., brs. N. 63 lks.
 dist., marked 1/4 S 27 BT.
 A juniper, 20 ins. in diam., brs. S. 45 1/2° W., 55 lks.
 dist., marked 1/4 S 34 BT.
 50.00 Ascend 52 ft., over NE. slope.
 Ridge, brs. NW. and SE.
 68.80 Descend 200 ft., over W. slope, to
 Draw, course NW. Enter rolling land.
 80.00 Descend 46 ft., over NW. slope, to
 The cor. of secs. 27, 28, 33 and 34.
 Land, mountainous and rolling.
 Soil, rocky, 4th rate.
 Timber, juniper, and cedar.
 Undergrowth, corona christo and scrub oak.

N. 0° 2' W., bet. secs. 27 and 28.
 Over rolling land, thru. scattering timber and undergrowth.
 Descend slightly over NW. slope.
 0.45 Draw, course SW.
 4.00 Ascend 17 ft., over S. slope.
 Ridge, brs. E. and W.
 14.00 Descend 28 ft., over NW. slope.
 Wash, 30 lks. wide, course W.
 17.60 Ascend 30 ft., over S. slope.
 Spur, slopes W.
 19.30 Descend 78 ft., over N. slope.
 26.40 Old road, brs. E. and W.
 Bottom of gulch, course N. 60° W.
 37.50 Ascend 53 ft., over SW. slope.
 Spur, slopes NW. Enter mountainous land.
 40.00 Descend 25 ft., over N. slope, to
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for 1/4 sec. cor. of secs. 27 and 28, with
 brass cap, marked

S 28 | S 27
 1923

BOOK 3662

46 Survey of Subdivision lines of Township 14 North Range 6 East.

Chains.

from which;
 A cedar, 10 ins. in diam., brs. S. $77\frac{1}{2}^{\circ}$ E., 190 lks.
 dist., marked $\frac{1}{4}$ S 27 BT.
 A cedar, 6 ins. in diam., brs. S. $50\frac{1}{2}^{\circ}$ W., 77 lks.
 dist., marked $\frac{1}{4}$ S 28 BT.
 Descend 73 ft., over N. slope.
 43.80 Bottom of gulch, course W.
 Ascend 142 ft., over S. slope.
 58.00 Ridge, brs. E. and W.
 Descend 165 ft., over N. slope.
 66.20 Bottom of gulch, 30 lks. wide, course W.
 Ascend 167 ft., over steep S. slope, to
 74.45 Enter rolling land.
 Ascend 40 ft., over S. slope, to
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in
 the ground to bed rock, supported in a mound of stone,
 for cor. of secs. 21, 22, 27 and 28, with brass cap,
 marked

T14N	R6 E
S21	S22
S28	S27
1923	

from which,
 A cedar, 5 ins. in diam., brs. N. $67\frac{1}{2}^{\circ}$ W., 123 lks.
 dist., marked T14N R6E S21 BT.
 A cedar, 9 ins. in diam., brs. N. 70° E., 22 lks.
 dist., marked T14N R6E S22 BT.
 A cedar, 9 ins. in diam., brs. S. $52\frac{1}{2}^{\circ}$ E., 172 lks.
 dist., marked T14N R6E S27 BT.
 A cedar, 10 ins. in diam., brs. S. 12° W., 170 lks.
 dist., marked T14N R6E S28 BT.
 Land, rolling and mountainous.
 Soil, rocky, 4th rate.
 Timber, cedar and pine.
 Undergrowth, scrub oak and corona christo.

S. $89^{\circ}43'$ E., on random line, bet. secs. 22 and 27.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.10 Fall 7 lks. N. of the cor. of secs. 22, 23, 26 and 27.
 Thence,
 N. $89^{\circ}40'$ W., on true line, bet. secs. 22 and 27.
 Over rolling land, thru. scattering timber and dense
 undergrowth.
 18.40 Descend 69 ft., over NW. slope,
 Draw, course N. 30° W.
 33.30 Ascend 73 ft., over NE. slope.
 Spur, slopes N.
 37.40 Descend 42 ft., over W. slope.
 Head of draw, course N. 20° W.
 Ascend 15 ft., over NE. slope, to
 40.05 Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in
 the ground, to bed rock, supported in a mound of stone,
 for $\frac{1}{4}$ sec. cor. of secs. 22 and 27, with brass cap, marked

$\frac{1}{4}$ S 22
S 27
1923

from which,
 A cedar, 18 ins. in diam., brs. N. 87° E., 79
 lks. dist., marked $\frac{1}{4}$ S 22 BT.
 A pine, 8 ins. in diam., brs. S. 62° E., 122 lks.
 dist., marked $\frac{1}{4}$ S 27 BT.
 Ascend 14 ft., over NE. slope.
 42.07 Descend 20 ft., along N. slope, to
 50.00 Ascend 23 ft., over NE. slope, to
 55.00 Top of ridge, west, and S. 70° E.,
 Descend gradually along top of ridge.

Survey of Subdivision lines of Township 14 North, Range 6 East. 47

Chains.

78.10 Leave top of ridge, brs.NW. and E.
 Descend slightly over S.slope, to
 80.10 The cor.of secs.21, 22, 27 and 28.
 Land, rolling.
 Soil, rocky, 4th rate.
 Timber, cedar and pine.
 Undergrowth, scrub oak and corona christo.

 N.0°2'W., bet. secs.21 and 22.
 Over rolling land, thru. scattering timber and undergrowth.
 Ascend 12 ft., over S. slope.
 3.00 Ridge, brs.E.and W.
 Descend 189 ft., over N.slope.
 35.00 Foot of ridge, brs.E.and W.
 Thence over nearly level land.
 40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec.cor. of secs.21 and 22, with brass
 cap, marked.

$\frac{1}{4}$
 S21 | S22
 1923

from which,

A cedar, 8 ins. in diam., brs.N.50 $\frac{1}{4}$ °W., 322
 lks.dist., marked $\frac{1}{4}$ S 21 BT.
 A cedar, 8 ins. in diam., brs.S.50 $\frac{1}{2}$ °E., 130
 lks.dist., marked $\frac{1}{4}$ S 22 BT.

Continue over nearly level land, thru. scattering timber
 and undergrowth.
 Descend slightly over N.slope.
 41.10 Road, brs.E.and W.
 46.00 Wash, 40 lks.wide, course W. Enter rolling land.
 Ascend 28 ft., over S.slope.
 60.00 Low ridge, brs.E.and W.
 Descend 23 ft., over N.slope.
 67.20 Wash, 20 lks.wide, course W.
 Ascend 20 ft., over SW.slope.
 78.20 Spur, slopes SW.from SE.
 Descend 18 ft., over N.slope, to
 80.00 Set an iron post, 3 ft.long, 2 ins.in diam., 10 ins.in
 the ground to bed rock, supported in a mound of stone,
 for cor.of secs.15, 16, 21 and 22, with brass cap,
 marked

T14N | R6E
 S16 | S15
 S21 | S22
 1923

from which,

A pine, 10 ins. in diam., brs.N.4 $\frac{1}{2}$ °W., 141 lks.
 dist., marked T14N R6E S16 BT.
 A pine, 8 ins.in diam., brs.N.13 $\frac{3}{4}$ °E., 98 lks.
 dist., marked T14N R6E S15 BT.
 A pine, 8 ins.in diam., brs.S.40°E., 76 lks.
 dist., marked T14N R6E S22 BT.
 A cedar, 18 ins.in diam., brs.S.41 $\frac{1}{2}$ °W., 26 lks.
 dist., marked T14N R6E S21 BT.

Land, rolling and nearly level.
 Soil, rocky, 4th rate.
 Timber, cedar and pine.
 Undergrowth; corona christo and scrub oak.

 S.89°40'E., on random line, bet.secs.15 and 22.
 40.00 Set temp. $\frac{1}{4}$ sec.cor.
 80.12 Fall 8 lks.S.of the cor.of secs.14, 15, 22 and 23.
 Thence,

BOOK 3662

.48 Survey of Subdivision lines of Township 14 North Range 6 East.

Chains.

N.89°43'W., on true line, bet.secs.15 and 22.
 Over rolling land, thru. scattering timber and undergrowth.
 Ascend 55 ft., over SE.slope, to
 12.50 Rim of bench, brs.NE.and SW. Thence over level land on
 bench.
 30.00 Rim of bench, brs.NE.and SW. Leave bench. Enter mountain-
 ous land.
 Descend 105 ft., over NW.slope, to
 35.60 Enter rolling land.
 Descend 17 ft., over NW.slope, to
 40.06 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec.cor. of secs.15 and 22, with
 brass cap, marked

$\frac{1}{4}$ S 15
 $\frac{1}{4}$ S 22
 1923

from which,
 A pine, 6 ins.in diam., brs.N.31 $\frac{1}{2}$ °W., 78 lks.
 dist., marked $\frac{1}{4}$ S 15 BT.
 A cedar, 6 ins. in diam., brs.S.1°W., 22 lks.
 dist., marked $\frac{1}{4}$ S 22 BT.

Continue over rolling land, thru. scattering timber and
 undergrowth.
 Descend 19 ft., over NW.slope.
 47.50 Draw, course NW. Enter mountainous land.
 Ascend 69 ft., over NE.slope.
 54.60 Spur, slopes N.
 Descend 187 ft., over NW.slope.
 74.60 Draw, course NW. Enter rolling land.
 Ascend 11 ft., over NE.slope, to
 80.12 The cor.of secs. 14, 15, 22 and 23.
 Land, rolling, level and mountainous.
 Soil, rocky, 4th rate.
 Timber, juniper and cedar.
 Undergrowth, scrub oak and corona christo.

N.0° 2'W., bet. secs.15 and 16.
 Over rolling land, thru. scattering timber and undergrowth.
 Descend 26 ft., over NE.slope.
 2.34 A cedar, 18 ins. in diam., on line. Mark 2 notches on each
 of N. and S.faces of same.
 6.50 Draw, course N.60°W.
 Ascend 22 ft., over SW.slope.
 18.70 Wire fence, brs.E.and W.
 20.00 Low spur, slopes W.
 Descend 38 ft., over N.slope.
 27.70 Draw, course W.
 Ascend 74 ft., over S. slope, to
 40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins.in
 the ground, for $\frac{1}{4}$ sec.cor. of secs.15 and 16, with
 brass cap, marked

$\frac{1}{4}$
 S16 | S15

1923

from which,
 A cedar, 6 ins.in diam., brs.N.85 $\frac{1}{2}$ °E., 45 lks.
 dist., marked $\frac{1}{4}$ S 15 BT.
 A cedar, 8 ins.in diam., brs.S.37°W., 39 lks.
 dist., marked $\frac{1}{4}$ S 16 BT.

Ascend slightly over S.slope.
 41.00 Low spur, slopes W.
 Descend 37.ft., over N.slope.
 49.70 Draw, course W.
 Ascend 73 ft., over S.slope.

Survey of Subdivision lines of Township 14 North Range 6 East, 49

Chains.

- 55.90 Spur, slopes SW. Descend 46 ft., over NW. slope.
- 61.10 Draw, course SW. Ascend 75 ft., over S. slope, to
- 66.20 Ascend 27 ft., over SW. slope.
- 75.00 Low spur, slopes W. Descend 18 ft., over N. slope, to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 9, 10, 15 and 16, with brass cap, marked

T14N	R6E
S 9	S10
S16	S15
1923	

from which,
 A cedar, 12 ins. in diam., brs. N. 81 1/2° E., 436 lks. dist., marked T14N R6E S10 BT.
 A cedar, 4 ins. in diam., brs. S. 81 1/2° W., 186 lks. dist., marked BT.

No other bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
 Land, rolling.
 Soil, rocky 4th rate.
 Timber, cedar and pine,
 Undergrowth, corona christo and scrub oak.

- 40.00 S. 89° 43' E., on random line, bet. secs. 10 and 15. Set temp. 1/4 sec. cor.
- 80.32 Intersect the cor. of secs. 10, 11, 14 and 15. Thence, N. 89° 43' W., on true line, bet. secs. 10 and 15. Over mountainous land, thru. scattering timber and undergrowth.
- 15.30 Descend 56 ft., over S. slope, to Spur, slopes SW. Enter rolling land.
- 40.16 Descend 164 ft., over W. slope, to Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, supported in a mound of stone, for 1/4 sec. cor. of secs. 10 and 15, with brass cap, marked

1/4 S 10
S 15
1923

from which,
 A cedar limb, 10 ins. in diam., brs. N. 55° W., 307 lks. dist., marked 1/4 S 10 BT.
 A cedar, 24 ins. in diam., brs. S. 44° W., 514 lks. dist., marked 1/4 S 15 BT.

- 65.50 Descend 229 ft., over NW. and N. slopes to sec. cor.
- 80.32 Wire fence, brs. N. and S. The cor. of secs. 9, 10, 15 and 16. Land, mountainous and rolling. Soil, rocky, 4th rate. Timber, cedar and pine. Undergrowth, scrub oak and corona christo.

- 5.30 N. 0° 2' W., bet. secs. 9 and 10. Over rolling land, thru. scattering timber and undergrowth. Descend 10 ft., over N. slope.
- 19.82 Wash, 50 lks. wide, course W. Ascend 62 ft., over S. slope.
- 19.90 A vacant house, brs. W. about 16 chs. dist.
- 24.40 Spur, slopes W. Descend 50 ft., over N. slope. Draw, course W. Ascend 46 ft., over S. slope.

BOOK 3662

50 Survey of Subdivision lines of Township 14 North, Range 6 East.

chains.

- 32.50 Wire fence, brs.E.and W.
 37.50 Low ridge, brs.E.and W.
 40.00 Descend 6 ft., over N.slope, to
 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor.of secs.9 and 10, with
 brass cap, marked

$\frac{1}{4}$
 S 9 S10
 1923

from which,

- A cedar, 10 ins.in diam., brs.S.44°E., 160 lks.
 dist., marked $\frac{1}{4}$ S 10 BT.
 A cedar, 8 ins.in diam., brs.S.65 $\frac{1}{2}$ °W., 316 lks.
 dist., marked $\frac{1}{4}$ S 9 BT.
 77.00 Descend 83 ft., over N.slope.
 Draw, course West.
 80.00 Ascend 9 ft., over S.slope, to
 Set an iron post, 3 ft.long, 2 ins.in diam., 26 ins.in
 the ground, for cor.of secs.3,4,9 and 10, with brass
 cap, marked

T14N R6E
 S 4 S 3
 S 9 S10
 1923

from which,

- A cedar, 6 ins.in diam., brs.N.10 $\frac{1}{4}$ °W., 152
 lks.dist., marked T14N R6E S4 BT.
 A cedar, 8 ins. in diam., brs.N.52 $\frac{1}{2}$ °E., 269
 lks.dist., marked T14N R6E S3 BT.
 A cedar, 8 ins. in diam., brs.S.38°E., 388
 lks.dist., marked T14N R6E S10 BT.
 A cedar, 8 ins.in diam., brs.S.11 $\frac{3}{4}$ °W., 432 lks.
 dist., marked T14N R6E S9 BT.
 Land, rolling.
 Soil, rocky, 4th rate.
 Timber, cedar and pine.
 Undergrowth, scrub oak and ~~coroma~~ christo.

- 40.00 S.89°43'E., on random line, bet. secs.3 and 10.
 Set temp. $\frac{1}{4}$ sec.cor.
 80.12 Intersect the cor.of secs.2,3,10 and 11.
 Thence,
 N.89°43'W., on true line, bet. secs.3 and 10.
 Over mountainous land, thru. scattering timber and under-
 growth.
 8.82 Descend 175 ft., over SW.slope, to
 Enter rolling land.
 20.73 Descend 26 ft., over W.slope, to
 Enter mountainous land.
 24.60 Descend 108 ft., over steep W.slope, to
 Foot of steep descent, brs.N.and S. Enter rolling land.
 40.06 Descend 48ft., over gradual W.slope, to
 Set an iron post 3 ft.long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec.cor. of secs. 3 and 10, with
 brass cap, marked

S 3
 S 10
 1923

from which,

- A cedar, 10 ins.in diam., brs.N.63 $\frac{1}{4}$ °E., 73
 lks.dist., marked $\frac{1}{4}$ S 3 BT.
 A cedar, 8 ins.in diam., brs.S.6°W., 145
 lks.dist., marked $\frac{1}{4}$ S 10 BT.

Survey of Subdivision lines of Township 14 North, Range 6 East. 51'

chains.

43.20 Descend 70 ft. over W. slope.
 Draw, course SW.
 56.10 Ascend 90 ft. over SE. slope.
 Spur, slopes S.
 63.00 Descend 66 ft., over SW. slope, to
 Descend 171 ft., over S. slope, to
 80.12 The cor. of secs. 3, 4, 9 and 10.
 Land, mountainous and rolling.
 Soil, rocky, 4th rate.
 Timber, cedar and pine.
 Undergrowth, ~~corona~~ christo and scrub cedar.

 N. 0° 2' W., on true line, bet. secs. 3 and 4.
 Over rolling land, thru. scattering timber and undergrowth.
 Ascend 43 ft., over S. slope.
 12.00 Ridge, brs. E. and W.
 Descend 70 ft., over N. slope.
 31.80 Wash, 20 lks. wide, course NW.
 Ascend 27 ft., over S. slope.
 38.80 West end of ridge, bearing E. and W.
 Descend slightly over NW. slope, to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor. of secs. 3 and 4, with brass
 cap, marked

$\frac{1}{4}$
 S 4 | 8 3
 1923

from which,
 A cedar, 6 ins. in diam., brs. N. 79° W., 78 lks.
 dist., marked $\frac{1}{4}$ S 4 BT.
 A cedar, 14 ins. in diam., brs. N. 38 $\frac{1}{2}$ ° E., 163 lks.
 dist., marked $\frac{1}{4}$ S 3 BT.

47.30 Descend 15 ft., over NW. slope.
 Wash, 20 lks. wide, course W.
 51.00 Ascend 12 ft., over SW. slope, to
 Thence over nearly level land, thru. scattering timber
 and dense undergrowth.
 Descend 30 ft., over W. and NW. slopes to closing cor.
 73.30 Wire fence, brs. E. and W.
 75.38 Intersect the N. bdy. of the Tp. at a point 1.32 chs. N. 89°
 57' W. from original cor. of secs. 3 and 4, changed to
 angle point, as hereinbefore described.
 At point of intersection, set an iron post, 3 ft. long,
 2 ins. in diam., 26 ins. in the ground, for closing cor.
 of secs. 3 and 4, with brass cap, marked

T15N R6E
 S33
 S 4 | S 3
 T14N R6 E
 C C
 1923

from which,
 A cedar, 16 ins. in diam., brs. S. 24 $\frac{1}{2}$ ° E., 195
 lks. dist., marked T14N R6E S3 BC BT.
 A cedar, 6 ins. in diam., brs. S. 71° W., 189
 lks. dist., marked T14N R6E S4 CC BT.

Land, rolling and nearly level.
 Soil, rocky, 4th rate.
 Timber, cedar and pine.
 Undergrowth, corona christo and scrub oak.

BOOK 3662

52 Survey of Subdivision lines of Township 14 North, Range 6 East.

Chains.

The original cor. of secs. 4, 5, 32 and 33, on the South
bdy. of the township, established by Wm. H. Richards,
Jr., U. S. S. in 1916, is an iron post 3 ins. in
diam., projecting 16 ins. above ground, firmly set
in ground, and mound of stone, properly marked on brass
cap, and witnessed by two properly marked cedar bearing
trees, one each NE. and SW. of cor., and a mound of stone
W. of cor.

7.00 Thence,
N. 0° 2' W., bet. secs. 32 and 33.
Over rolling land, thru. scattering timber and undergrowth.
Ascend 51 ft., over S. slope.
Low ridge, brs. NE. and SW.
33.30 Descend 63 ft., over NW. slope.
Wash, 30 lks. wide, course SW.
Ascend 76 ft., over S. slope, to $\frac{1}{4}$ sec. cor.
33.80 Wire fence, brs. E. and W.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor. of secs. 32 and 33, with
brass cap, marked

S32 | S33

1923

from which,

A cedar, 10 ins. in diam., brs. S. 54 $\frac{1}{2}$ ° E., 225
lks. dist., marked $\frac{1}{4}$ S 33 BT.
A cedar, 8 ins. in diam., brs. S. 41 $\frac{1}{2}$ ° W., 158
lks. dist., marked $\frac{1}{4}$ S 32 BT.

Ascend 27 ft., over S. slope.
46.50 Road, brs. E. and W.
54.00 Spur, slopes W.
Descend 46 ft., over N. slope.
59.00 Wash, 30 lks. wide, course W. Enter mountainous land.
Ascend 109 ft., over SW. slope, to
80.00 Set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in
the ground, for cor. of secs. 28, 29, 32 and 33, with
brass cap, marked

T14N | R6E

S29 | S28

S32 | S33

1923

from which,

A cedar, 6 ins. in diam., brs. N. 62 $\frac{1}{2}$ ° W., 134
lks. dist., marked T14N R6E S29 BT.
A cedar, 24 ins. in diam., brs. N. 64 $\frac{1}{2}$ ° E., 74
lks. dist., marked T14N R6E S28 BT.
A cedar, 10 ins. in diam., brs. S. 16 $\frac{1}{2}$ ° E., 262
lks. dist., marked T14N R6E S33 BT.
A cedar, 6 ins. in diam., brs. S. 78° 40' W., 64
lks. dist., marked T14N R6E S32 BT.

Land, rolling and mountainous.
Soil, rocky, 4th rate.
Timber, cedar and pine.
Undergrowth, scrub oak and corona christo.

40.00 S. 89° 43' E., on random line, bet. secs. 28 and 33.
Set temp. $\frac{1}{4}$ sec. cor.
80.20 Fall 2 lks. N. of the cor. of secs. 27, 28, 33 and 34.
Thence,
N. 89° 42' W., on true line, bet. secs. 28 and 33.
Over rolling land, thru. scattering timber and undergrowth.
Descend slightly over NW. slope.
0.65 Draw, course SW.
8.00 Ascend 70 ft., over SE. slope.
Old road, brs. N. 70° E. and S. 70° W.

BOOK 3662

Survey of Subdivision lines of Township 14 North, Range 6 East. 53

Chains.
 30.20 Spur, slopes SW. Enter mountainous land.
 Descend 126 ft., over steep W.slope.
 36.70 Wash, 40 lks.wide, course S.30°W.
 Ascend 91 ft., over steep SE.slope, to
 40.10 Set an iron post, 3 ft.long, 1 in. in diam., 10 ins.in
 the ground to bedrock, supported in a mound of stone,
 for $\frac{1}{4}$ sec.cor.of secs.28 and 33, with brass cap, marked

$\frac{1}{4}$ S 28
 S 33
 1923

from which,
 A juniper, 36 ins.in diam., brs.S.49 $\frac{1}{2}$ °E., 123
 lks.dist., marked $\frac{1}{4}$ S 33 BT.
 A juniper, 16 ins. in diam., brs.N.65 $\frac{1}{2}$ °W., 160
 lks.dist., marked $\frac{1}{4}$ S 28 BT.
 Ascend 16 ft., over SE.slope, to
 42.20 Rim of mesa, brs.NE.and SW. Leave mountainous, and enter
 gently rolling land on mesa.
 Descend 83 ft., over SW.slope, to
 75.20 Rim of mesa, brs.NE. and SW. Enter mountainous land.
 Descend 71 ft., over SW.slope, to
 80.20 The cor.of secs.28, 29, 32 and 33.
 Land, mountainous.
 Soil, rocky, 4th rate.
 Timber, cedar and pine.
 Undergrowth, scrub oak and scrub mesquite.

N.0°2'W., bet. secs.28 and 29.
 Over mountainous land, thru.scattering timber and under-
 growth.
 Ascend 51 ft., over SW.slope.
 6.00 Spur, slopes W.
 Descend 68 ft., over N.slope.
 11.80 Wash, course NW. Enter rolling land.
 Ascend 15 ft., over SW. slope.
 17.50 Descend 94 ft., over NW.slope.
 25.30 Road, brs.NE. and SW.
 32.50 Wash, 60 lks.wide, course SW. Thence over nearly level
 land, sloping slightly to the SW.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec.cor. of secs. 28 and 29, with
 brass cap, marked

$\frac{1}{4}$
 S29 | S28
 1923

from which,
 A juniper, 12 ins. in diam. brs.S.42°E., 371
 lks.dist., marked $\frac{1}{4}$ S 28 BT.
 A juniper, 10 ins.in diam., brs.S.52°W., 239
 lks.dist., marked $\frac{1}{4}$ S 29 BT.
 Continue over nearly level land, thru. scattering timber
 and undergrowth.
 Ascend gradually to sec.cor.
 42.20 Wash, 5 lks.wide, course W.
 48.70 Wash, 10 lks.wide, course SW.
 66.60 Wash, 10 lks.wide, course SW.
 71.80 Wash, 10 lks.wide, course SW.
 80.00 Set an iron post, 3 ft.long, 2 ins.in diam., 26 ins. in
 the ground, for cor.of secs. 20, 21, 28 and 29, with
 brass cap, marked

BOOK 3662

54 Survey of Subdivision lines of Township 14 North Range 6 East.

Chains.

T14N	R6E
S20	S21
S29	S28
1923	

from which,

- A cedar, 12 ins. in diam., brs. N. 57° W., 438 lks. dist., marked T14N R6E S20 BT.
- A cedar, 6 ins. in diam., brs. N. 44½° E., 153 lks. dist., marked T14N R6E S21 BT.
- A cedar, 6 ins. in diam., brs. S. 53° 30' E., 267 lks. dist., marked T14N R6E S28 BT.
- A cedar, 24 ins. in diam., brs. S. 33° W., 322 lks. dist., marked T14N R6E S29 BT.

Land, mountainous, rolling and nearly level.
 Soil, rocky, 4th rate.
 Timber, cedar and pine.
 Undergrowth, corona christo and scrub oak.

- 40.00 S. 89° 42' E., on random line, bet. secs. 21 and 28. Set temp. ¼ sec. cor.
- 80.14 Fall 5 lks. N. of the cor. of secs. 21, 22, 27 and 28. Thence, N. 89° 40' W., on true line, bet. secs. 21 and 28. Over rolling land, thru. scattering timber and undergrowth. Descend 86 ft., over SW. slope.
- 12.00 Wash, 30 lks. wide, course NW.
- 35.00 Ascend 48 ft., over NE. slope.
- 40.07 Spur, slopes N. Descend 22 ft., over NW. slope, to Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for ¼ sec. cor. of secs. 21 and 28, with brass cap, marked

¼ S 21
S 28
1923

from which,

- A cedar, 8 ins. in diam., brs. N. 38° E., 54 lks. dist., marked ¼ S 21 BT.
- A cedar, 10 ins. in diam., brs. S. 82° E., 250 lks. dist., marked ¼ S 28 BT.

- 67.00 Descend 176 ft., over NW. slope. Foot of descent, brs. NE. and SW. Thence over nearly level land.
- 72.50 Wash, 20 lks. wide, course SW.
- 80.14 The cor. of secs. 20, 21, 28 and 29. Land, rolling and nearly level. Soil, rocky, 4th rate. Timber, cedar and pine. Undergrowth, corona christo and scrub oak.

- 25.00 N. 0° 2' W., bet. secs. 20 and 21. Enter mountainous land.
- 37.00 Ascend 142 ft., over S. slope. Ridge, brs. E. and W.
- 40.00 Descend 36 ft., over N. slope, to Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for ¼ sec. cor. of secs. 20 and 21, with brass cap, marked

¼
S 20 S 21
1923

Chains.

from which,
 A cedar, 16 ins. in diam., brs. S. 11° E., 18 lks.
 dist., marked $\frac{1}{4}$ S 21 BT.
 A pine, 16 ins. in diam., brs. S. 38° W., 23 lks.
 dist., marked $\frac{1}{4}$ S 20 BT.
 Descend 103 ft., over N. slope.
 46.20 Road, brs. E. and W.
 50.00 Foot of descent brs. E. and W. Leave mountainous, and enter level land.
 53.00 Wash, 30 lks. wide, course W.
 55.30 Dim road, brs. E. and W.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 16, 17, 20 and 21, with brass cap, marked

T14N	R6E
S17	S16
S20	S21
1923	

from which,
 A cedar, 6 ins. in diam., brs. N. 88° W., 276 lks.
 dist., marked T14N R6E S17 BT.
 A cedar, 10 ins. in diam., brs. N. 69 $\frac{1}{2}$ ° E., 180 lks.
 dist., marked T14N R6E S16 BT.
 A cedar, 6 ins. in diam., brs. S. 39° E., 143 lks.
 dist., marked T14N R6E S21 BT.
 A cedar, 6 ins. in diam., brs. S. 8 $\frac{3}{4}$ ° W., 93 lks.
 dist., marked T14N R6E S20 BT.
 Land, nearly level, mountainous and level.
 Soil, rocky, 4th rate.
 Timber, cedar and pine.
 Undergrowth, corona christo and scrub oak.

40.00 S. 89° 40' E., on random line, bet. secs. 16 and 21.
 80.32 Set temp. $\frac{1}{4}$ sec. cor.
 Fall 2 lks. S. of the cor. of secs. 15, 16, 21 and 22.
 Thence,
 N. 89° 41' W.; on true line; bet. secs. 16 and 21.
 Over rolling land, thru. scattering timber and undergrowth.
 Descend 46 ft., over NW. slope.
 22.50 Wash, 20 lks. wide, course N. 20° W.
 Ascend 39 ft., over NE. slope.
 32.00 Spur, slopes N.
 Descend 33 ft., over W. slope, to
 40.16 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 16 and 21, with brass cap, marked

$\frac{1}{4}$ S 16
S 21
1923

from which,
 A cedar, 24 ins. in diam., brs. N. 22° E., 354 lks.
 dist., marked $\frac{1}{4}$ S 16 BT.
 A cedar, 6 ins. in diam., brs. S. 57° E., 285 lks.
 dist., marked $\frac{1}{4}$ S 21 BT.
 Descend 16 ft., over NW. slope.
 46.30 Road, brs. NE. and SW.
 47.70 Draw, course NE.
 Ascend 35 ft., over NE. slope.
 62.80 Dim road, brs. NE. and SW.
 64.00 Low ridge, brs. NW. and SE.
 Descend 25 ft., over SW. slope, to
 77.00 Enter nearly level land.
 80.32 The cor. of secs. 16, 17, 20 and 21.
 Land, rolling and nearly level.
 Soil, rocky, 3rd and 4th rate.
 Timber, cedar and pine.
 Undergrowth, corona christo and scrub oak.

BOOK 3662

56 Survey of Subdivision lines of Township 14 North, Range 6 East.

Chains.

- N.0°2'W., bet. secs. 16 and 17.
Over nearly level land, thru. scattering timber and undergrowth.
- 3.80 Old road, brs. E. and W. Leave nearly level, and enter rolling land. Ascend, 78 ft., over S. slope.
- 17.00 Ridge, brs. E. and W. Enter mountainous land. Descend, 193 ft., over N. slope, to foot of ridge, brs. E. and W.
- 35.00 Thence over nearly level land.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 16 and 17, with brass cap, marked

1		1
S17		S16

1923

from which,

- A cedar, 24 ins. in diam., brs. S. 59 $\frac{1}{2}$ ° E., 325 lks.
dist., marked $\frac{1}{4}$ S 16 BT.
- A cedar, 18 ins. in diam., brs. S. 6 $\frac{1}{2}$ ° W., 178 lks.
dist., marked $\frac{1}{4}$ S 17 BT.
- Continue over nearly level land, thru. scattering timber and undergrowth.
- 49.40 Trail, brs. NW. and SE.
- 55.20 Wash, 50 lks. wide, course N. 60° W.
- 70.00 Leave nearly level, and enter rolling land, brs. NW. and SE. Ascend 20 ft., over SW. slope, to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 8, 9, 16 and 17, with brass cap, marked

T14N		R6E
S 8		S 9

S17		S16
-----	--	-----

1923

from which,

- A cedar, 4 ins. in diam., brs. N. 60 $\frac{1}{2}$ ° W., 94 lks.
dist., marked BT.
- A cedar, 14 ins. in diam., brs. N. 1 $\frac{1}{4}$ ° E., 46 lks.
dist., marked T14N R6E S9 BT.
- A pine, 6 ins. in diam., brs. S. 85 $\frac{1}{2}$ ° E., 99 lks.
dist., marked T14N R6E S16 BT.
- A pine, 4 ins. in diam., brs. S. 50 $\frac{1}{2}$ ° W., 107 lks.
dist., marked BT.
- Land, nearly level, rolling and mountainous.
Soil, rocky, 4th rate.
Timber, cedar and pine.
Undergrowth, corona christo and scrub oak.

- 40.00 S. 89° 41' E., on random line, bet. secs. 9 and 16.
Set temp. $\frac{1}{4}$ sec. cor.
- 80.28 Fall 14 lks. S. of the cor. of secs. 9, 10, 15 and 16.
Thence,
N. 89° 47' W., on true line, bet. secs. 9 and 16.
Over rolling land, thru. scattering timber and undergrowth.
Descend 38 ft., over N. slope, to
- 8.90 Descend 120 ft., over NW. and W. slopes to
- 19.30 Foot of descent, brs. N. and S. Enter nearly level land.
- 28.30 Road, brs. NE and SW.
- 35.25 Road, brs. N. and S.
- 40.10 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 9 and 16, with brass cap, marked

1		9
S 16		S 16

1923


from which,

Survey of Subdivision lines of Township 14 North Range 6 East. 57

Chains.


A cedar, 14 ins. in diam., brs. N. $58\frac{1}{2}^{\circ}$ W., 47 lks. dist., marked $\frac{1}{4}$ S 9 BT.
 A cedar, 6 ins. in diam., brs. S. $4\frac{1}{2}^{\circ}$ E., 54 lks. dist., marked $\frac{1}{4}$ S 16 BT.
 Continue over nearly level land, thru scattering timber & undergrowth.
 Enter rolling land, brs. N. and S. Asc. 73 ft. over E. slope.
 50.30 Wire fence, brs. N. and S.
 72.80 Point of spur, slopes S. Desc. 55 ft., over SW. slope, to
 76.20 Intersect the cor. of secs. 8, 9, 16 and 17.
 80.28 Land, rolling and nearly level.
 Soil, rocky, 4th rate. Timber, cedar and pine.
 Undergrowth, scrub oak and corona christo.

N. $0^{\circ}2'W.$, bet. secs. 8 and 9.
 Over rolling land, thru scattering timber and undergrowth.
 Ascend 6 ft., over SW. slope.
 2.00 Descend 60 ft., over NW. slope.
 15.80 Wash, 30 lks. wide, course W. Asc. 43 ft., over S. slope.
 24.70 Ridge, brs. E. and W. Desc. 33 ft. over N. slope to $\frac{1}{4}$ sec. cor.
 34.80 Road, brs. E. and W.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor. of secs. 8 and 9, with brass cap,
 marked



from which,

A cedar, 4 ins. in diam., brs. N. 80° E., 278 lks. dist., marked BT.
 A cedar, 4 ins. in diam., brs. S. 32° W., 171 lks. dist., marked BT.
 Descend 10 ft., over N. slope.
 44.40 Draw, course S. 60° W. Asc. 92 ft., over SE. slope.
 56.00 Ridge, brs. W. and NE. Desc. 39 ft., over NW. slope.
 71.60 Draw, course W. Asc. 46 ft., over SE. slope, to
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the
 ground, for cor. of secs. 4, 5, 8 and 9, with brass cap,
 marked




from which,

A cedar, 6 ins. in diam., brs. N. $29\frac{1}{2}^{\circ}$ W., 226 lks. dist., marked T14N R6E S5 BT.
 A cedar, 8 ins. in diam., brs. N. $23\frac{3}{4}^{\circ}$ E., 176 lks. dist., marked T14N R6E S4 BT.
 A cedar, 16 ins. in diam., brs. S. $68\frac{1}{2}^{\circ}$ E., 160 lks. dist., marked T14N R6E S9 BT.
 A cedar, 4 ins. in diam., brs. S. $74\frac{1}{2}^{\circ}$ W., 192 lks. dist., marked BT.

Land, rolling.
 Soil, rocky, 4th rate.
 Timber, cedar and pine.
 Undergrowth, corona christo and scrub oak.

S. $89^{\circ}47'E.$, on a random line, bet. secs. 4 and 9.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.34 Fall 2 lks. S. of the cor. of secs. 3, 4, 9 and 10.
 Thence, N. $89^{\circ}48'W.$, on true line, bet. secs. 4 and 9.
 Over rolling land, thru scattering timber and undergrowth.
 Descend 24 ft., over SW. slope.
 12.85 Wash, 20 lks. wide, course NW. Asc. 68 ft., over E. slope.
 33.35 Spur, slopes S. Road, brs. N. and S. Desc. 33 ft., over W. slope, to
 40.17 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the
 ground for $\frac{1}{4}$ sec. cor. of secs. 4 and 9, with brass cap,
 marked



No bearing trees available. Raise a mound of stone, 3 ft.

BOCK 3662

58 Survey of Subdivision lines of Township 14 North, Range 6 East.

chains.

base, 2 ft. high, N. of cor. Desc. 12 ft., over W. slope.
 44.85 Wash, course S. Asc. 20 ft., over SE. slope.
 53.35 Low ridge, brs. N. and SW. Desc. 36 ft., over W. slope.
 74.05 Draw, course S. 20° W. Asc. 22 ft., over SE. slope, to
 80.34 The cor. of secs. 4, 5, 8 and 9.
 Land, rolling. Soil, rocky, 4th rate.
 Timber, cedar and pine.
 Undergrowth, corona christo and scrub oak.

N. 0° 2' W., on true line, bet. secs. 4 and 5.
 Over rolling land, thru. scattering timber and undergrowth.
 Ascend 24 ft., over SE. slope.
 6.00 Sour, slopes SW. Asc. 8 ft., over W. slope, to
 10.00 Descend 23 ft., over NW. slope.
 15.00 Ascend 28 ft., over S. slope.
 19.30 Low ridge, brs. E. and W. Desc. 33 ft., over N. slope.
 24.30 Draw, course W., near head. Asc. 122 ft., over S. slope, to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the
 ground for $\frac{1}{4}$ sec. cor. of secs. 4 and 5, with brass cap,
 marked

$\frac{1}{4}$
 S 5 | S 4
 1923

from which,
 A cedar, 14 ins. in diam., brs. S. 5 $\frac{1}{2}$ ° E., 53 lks.
 dist., marked $\frac{1}{4}$ S 4 BT.
 A cedar, 6 ins. in diam., brs. S. 61° W., 37 lks.
 dist., marked $\frac{1}{4}$ S 5 BT.

Ascend 10 ft., over S. slope.
 42.00 Ridge, brs. E. and W. Enter mountainous land & dense undergrowth.
 Descend 188 ft., over N. slope.
 56.00 Draw, course N. 70° W. Enter rolling land.
 Ascend 28 ft., over S. slope to closing cor.
 62.90 Road brs. E. and W.
 75.11 Intersect the N. bdy. of Tp. at a point 1.66 chs. N. 89° 58' W.
 from the original cor. of secs. 4 and 5, changed to Angle
 Point, as hereinbefore described.
 At point of intersection, set an iron post, 3 ft. long, 2 ins.
 ins. in diam., 26 ins. in the ground, for closing cor. of
 secs. 4 and 5, with brass cap, marked

T15N R6 E
 S32
 S 5 | S 4
 T14N R6 E
 C C
 1923

from which,
 A cedar, 6 ins. in diam., brs. S. 25° E., 44 lks.
 dist., marked T14N R6E S4 CC BT.
 A cedar, 8 ins. in diam., brs. S. 65 $\frac{1}{2}$ ° W., 116 lks.
 dist., marked T14N R6E S5 CC BT.

Land, rolling. Soil, rocky, 4th rate.
 Timber, cedar and pine.
 Undergrowth, corona christo, and scrub oak.

The original cor. of secs. 5, 6, 31 and 32, on S. bdy. of Tp.,
 established by Wm. H. Richards, Jr., U.S.S. in 1916, is an
 iron post 3 ins. in diam., projecting 12 ins. above ground
 firmly set, properly marked on brass cap, and witnessed
 by four properly marked cedar bearing trees, one each
 NW., NE., SE. and SW. of cor.
 Thence, N. 0° 3' W., bet. secs. 31 and 32.
 Over rolling land, thru. scattering timber and undergrowth.
 Descend 91 ft., over NW. slope.
 5.90 Gully, course W. Asc. 17 ft., over S. slope.
 9.50 Point of spur, slopes SW. Desc. 37 ft. over NW. slope, to
 16.20 Wash, 30 lks. wide, course S. 20° W. Asc. slightly over E. slope, to
 18.80 Same wash, course SE. Asc. 18 ft., over W. slope, to
 27.60 Same wash, course S. 20° W. Asc. 25 ft., over E. slope, to
 35.80 Same wash, 10 lks. wide, course SE. Asc. slightly over W.
 slope, to

3008
BOOK 3662

Survey of Subdivision lines of Township 14 North, Range 6 East, 59.


Chains+

- 37.00 Same wash, course SW. Asc. slightly over E. slope, to
- 59.10 Same wash, course SE. Asc. slightly over W. slope, to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 31 and 32, with brass cap, marked



from which,
 A juniper, 12 ins. in diam., brs. N. 43° W., 304 lks. dist., marked $\frac{1}{4}$ S 31 BT.
 A pine, 16 ins. in diam., brs. S. 23° E., 210 lks. dist., marked $\frac{1}{4}$ S 32 BT.


- 42.60 Ascend slightly over W. slope, to Wash, 10 lks. wide, course SW. Enter mountainous land. Ascend 116 ft., over S. slope.
- 56.00 Point of spur, slopes SE. Desc. 57 ft., over NE. slope.
- 64.30 Wash, 15 lks. wide, course SE. Enter rolling land. Ascend 58 ft., over SW. slope.
- 69.50 Spur, slopes SE. Desc. 15 ft., over NE. slope.
- 75.30 Draw, course SE., near head. Enter mountainous land. Ascend 52 ft., over SW. slope, to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 29, 30, 31 and 32, with brass cap, marked



from which,
 A cedar, 8 ins. in diam., brs. S. 37° E., 243 lks. dist., marked T14N R6E S32 BT.
 A cedar, 8 ins. in diam., brs. S. 87 $\frac{1}{2}$ ° W., 529 lks. dist., marked T14N R6E S31 BT.

No other bearing trees available. Raise a mound of stone 3 ft. base, 2 ft. high, W. of cor.
 Land, rolling and mountainous.
 Soil, rocky, 4th rate.
 Timber, cedar and pine.
 Undergrowth, corona christo and scrub oak.

- 40.00 S. 89° 43' E., on random line, bet. secs. 29 and 32. Set temp. $\frac{1}{4}$ sec. cor.
- 80.02 Fall 5 lks. N. of the cor. of secs. 28, 29, 32 and 33. Thence, N. 89° 41' W., on true line, bet. secs. 29 and 32. Over mountainous land, thru. scattering timber and undergrowth. Desc. 30 ft., over W. slope.
- 2.70 Bottom of gulch, course SW., near head. Ascend 25 ft., over SE. slope.
- 5.00 Descend 118 ft., over SW. slope.
- 12.80 Bottom of gulch, course S. Asc. 49 ft., over E. slope, to
- 15.00 Enter rolling land. Asc. 16 ft., over SW. slope.
- 20.10 Road, brs. N. and SE.
- 23.30 Draw, course S. 20° W., near head. Asc. 10 ft., over E. slope.
- 26.00 Low spur, slopes S. Desc. 18 ft., over W. slope.
- 34.10 Wash, 10 lks. wide, course S. Asc. 27 ft., over E. slope, to
- 40.01 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. of secs. 29 and 32, with brass cap, marked



from which,
 A juniper, 12 ins. in diam., brs. N. 11° E., 37 lks. dist., marked $\frac{1}{4}$ S 29 BT.
 A juniper, 6 ins. in diam., brs. S. 60° W., 9 lks. dist., marked $\frac{1}{4}$ S 32 BT.

- 43.50 Ascend 35 ft., over E. slope. Ridge, brs. N. 30° W. and S. Enter mountainous land.

BOCK 3662

60 Survey of Subdivision lines of Township 14 North, Range 6 East.

Chains.

50.90 Descend 78 ft., over W. slope, to
 Wash, 10 lks. wide, course S. 70° W. Asc. 28 ft., over SW. slope.
 55.90 Wash, 25 lks. wide, course S. Asc. 97 ft., over SE. slope.
 61.40 Spur, slopes S. Desc. 62 ft., over W. slope.
 64.90 Wash, 12 lks. wide, course S. Asc. 87 ft., over E. slope.
 69.50 Spur, slopes S. Desc. 63 ft., over SW. slope.
 74.40 Bottom of gulch, course S. 20° E. Asc. 100 ft., over steep
 E. slope, to
 78.50 Thence over rolling land.
 Ascend 7 ft., over E. slope, to
 80.02 The cor. of secs. 29, 30, 31 and 32.
 Land, mountainous and rolling.
 Soil, rocky, 4th rate.
 Timber, cedar and pine.
 Undergrowth, corona christo and scrub oak.

40.00 N. 89° 43' W., on random line, bet. secs. 30 and 31.
 Set temp. $\frac{1}{4}$ sec. cor.
 71.80 Fall 8 lks. S. of the cor. of secs. 30 and 31 on the W. bdy.
 of the Tp., hereinbefore described.
 Thence,
 S. 89° 39' E., on true line, bet. secs. 30 and 31.
 Over rolling land, thru. scattering timber and undergrowth.
 Ascend gradually along top of ridge, bearing E. and W.
 8.00 Leave top of ridge, brs. W. and S. 80° E.
 Ascend 71 ft., over N. and NW. slopes, to
 27.50 Rim of mesa, brs. N. and S. Thence over nearly level land
 on mesa.
 31.80 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in
 the ground, to bed rock, supported in a mound of stone,
 for $\frac{1}{4}$ sec. cor. of secs. 30 and 31, with brass cap,
 marked

S 30
 S 31
 1923

from which,
 A cedar, 8 ins. in diam., brs. N. 44½° E., 244 lks.
 dist., marked $\frac{1}{4}$ S 30 BT.
 A cedar, 8 ins. in diam., brs. S. 64° E., 83 lks.
 dist., marked $\frac{1}{4}$ S 31 BT.

Continue over nearly level land on mesa.
 36.80 Rim of mesa, brs. N. and S. Leave mesa. Enter rolling land.
 Descend 118 ft., over E. slope.
 48.50 Draw, course S. Asc. 36 ft., over SW. slope.
 53.80 Spur, slopes S. 30° E. Desc. 42 ft., over E. slope, to
 71.80 The cor. of secs. 29, 30, 31 and 32.
 Land, rolling and nearly level.
 Soil, rocky, 4th rate.
 Timber, cedar and pine.
 Undergrowth, corona christo and scrub oak.

N. 0° 3' W., bet. secs. 29 and 30.
 Over rolling land, thru. scattering timber and undergrowth.
 Ascend 12 ft., over E. slope, to
 5.60 Descend 25 ft., over NE. slope.
 7.50 Gully, course SE.
 Ascend 66 ft., over SE. slope.
 36.00 Ridge, brs. E. and W.
 Descend 15 ft., over N. slope, to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor. of secs. 29 and 30, with brass
 cap, marked

S 30 | S 29
 1923

from which,

BOOK 3662

Survey of Subdivision lines of Township 14 North Range 6 East. 61 chains.

54.80 A pine, 4 ins. in diam., brs. S. 21° E., 62 lks. dist., marked BT.
 75.20 A cedar, 12 ins. in diam., brs. S. 87½° W., 529 lks. dist., marked ¼ S 30 BT.
 80.00 Descend 30 ft., over N. slope.
 Draw, course SW.
 Ascend 78 ft., over S. slope.
 Ascend 12 ft., over E. slope, to
 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 19, 20, 29 and 30, with brass cap, marked

T14N	R6E
S19	S20
S30	S29
1923	

from which,
 A cedar, 14 ins. in diam., brs. S. 89½° E., 198 lks. dist., marked T14N R6E S29 BT.
 No other bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
 Land, rolling.
 Soil, rocky, 4th rate.
 Timber, cedar and pine.
 Undergrowth, scrub oak and corona christo.

40.00 S. 89° 41' E., on a random line, bet. secs. 20 and 29.
 80.00 Set temp. ¼ sec. cor.
 Fall 9 lks. S. of the cor. of secs. 20, 21, 28 and 29. Thence,
 N. 89° 45' W., on true line, bet. secs. 20 and 29.
 Over nearly level land, thru. scattering timber and undergrowth.
 Descend slightly over SW. slope.
 4.60 Wash, course S.
 6.70 Leave nearly level land and enter rolling land.
 Ascend 22 ft. over NE. slope.
 11.20 Road, brs. N. and S.
 11.70 Enter mountainous land.
 Ascend 105 ft., over NE. slope.
 21.50 Ridge, brs. N. 80° W. and SE.
 Descend 87 ft., over SW. slope, to
 30.00 Enter rolling land.
 Descend 33 ft. over SW. slope to ¼ sec. cor.
 35.00 Wash, course SW., near head.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for ¼ sec. cor. of secs. 20 and 29, with brass cap, marked

¼ S 20
S 29
1923

from which,
 A cedar, 12 ins. in diam., brs. N. 86° E., 375 lks. dist., marked ¼ S 20 BT.
 A cedar, 8 ins. in diam., brs. S. 47½° W., 424 lks. dist., marked ¼ S 29 BT.
 47.10 Descend 14 ft. over SW. slope, to
 Same wash, course N. 86° W.
 56.50 Descend 17 ft., over NW. slope, to
 Same wash, course SW.
 Thence, over nearly level land, sloping slightly to the SW.
 68.00 Wash, course SW.
 80.00 Ascend 37 ft., over E. slope, to
 The cor. of secs. 19, 20, 29 and 30.
 Land, nearly level and rolling.
 Soil, rocky, 4th rate.

BOOK 3662

62. Survey of Subdivision lines of Township 14 North Range 6 East.

Chains.


- Timber, cedar and pine.
Undergrowth, scrub oak and corona christo.
-
- 40.00 N. $89^{\circ}39'W.$, on random line, bet. secs. 19 and 30.
Set temp. $\frac{1}{4}$ sec. cor.
71.82 Fall 4 lks + S. of the cor. of secs. 19 and 30, on the W. bdy. of the Tp., hereinbefore described.
Thence,
S. $89^{\circ}41'E.$, on a true line, bet. secs. 19 and 30.
Over rolling land, thru. scattering timber and undergrowth.
Ascend 30 ft., over N. slope, to
17.40 Low ridge, brs. N. $70^{\circ}E.$ and S. $70^{\circ}W.$
Descend 43 ft., over S. slope, to
31.82 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 19 and 30, with brass cap, marked
- $\frac{1}{4}$ S 19
S 30
1923
- from which,
A cedar, 6 ins. in diam., brs. N. $56^{\circ}W.$, 113 lks. dist., marked $\frac{1}{4}$ S 19 BT.
A cedar, 4 ins. in diam., brs. S. $30^{\circ}W.$, 52 lks. dist., marked BT.
Descend 15 ft., over S. slope, to
47.50 Head of draw, course SW.
Ascend 50 ft., over SW slope.
62.80 Spur, slopes S.
Descend 20 ft., over E. slope, to
71.82 The cor. of secs. 19, 20, 29 and 30.
Land, rolling.
Soil, rocky, 4th rate.
Timber, cedar and pine.
Undergrowth, corona christo and scrub oak.
-
- N. $0^{\circ}3'W.$, bet. secs. 19 and 20.
Over rolling land, thru. scattering timber and undergrowth.
Ascend 40 ft., over E. and SE. slopes.
13.20 Low ridge, brs. E. and W.
Descend 29 ft., over N. slope.
17.00 Draw, course N. $70^{\circ}W.$
Ascend 49 ft., over SW. slope.
26.70 Spur, slopes W.
Descend 72 ft., over NW. slope, to
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 19 and 20, with brass cap, marked
- $\frac{1}{4}$
S 19 | S 20
1923
- No bearing trees available, Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
Descend 12 ft., over steep N. slope, to
40.05 Wash, 30 lks. wide, course W.
Ascend 12 ft., over S. slope.
40.50 Descend 15 ft., over N. slope.
41.10 Wash, 20 lks. wide, course W.
Ascend 99 ft., over S. slope.
62.00 Ridge, brs. E. and W.
Descend 60 ft., over N. slope.
79.80 Draw, course NW.
Ascend slightly over SW. slope, to

Camp

BOOK 3662

Survey of Subdivision lines of Township 14 North, Range 6 East, 63
Chains.


80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 17, 18, 19 and 20, with brass cap, marked



- from which,
- A cedar, 8 ins. in diam., brs. N. 55° W., 278 lks. dist., marked T14N R6E S18 BT.
- A cedar, 10 ins. in diam., brs. N. 70 1/4° E., 539 lks. dist., marked T14N R6E S17 BT.
- A cedar, 14 ins. in diam., brs. S. 21 1/2° E., 491 lks. dist., marked T14N R6E S20 BT.
- A cedar, 4 ins. in diam., brs. S. 69 1/2° W., 473 lks. dist., marked BT.

Land, rolling.
Soil, rocky, 4th rate.
Timber, cedar and pine.
Undergrowth, corona christo and scrub oak.

40.00 S. 89° 45' E., on random line, bet. secs. 17 and 20.
Set temp. 1/4 sec. cor.
79.92 Fall 9 lks. S. of the cor. of secs. 16, 17, 20 and 21.
Thence,
N. 89° 49' W., on true line, bet. secs. 17 and 20.
Over nearly level land, sloping slightly to the SE., thru. scattering timber and undergrowth.
11.80 Enter rolling land, Asc. 40 ft., over E. slope.
35.90 Ridge, brs. N. & S. from which spur slopes W. Desc. 37 ft. on top of spur.
39.96 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor. of secs. 17 and 20, with brass cap, marked



- from which,
- A cedar, 8 ins. in diam., brs. N. 69 1/2° W., 78 lks. dist., marked 1/4 S 17 BT.
- A pine, 8 ins. in diam., brs. S. 68 1/2° W., 61 lks. dist., marked 1/4 S 20 BT.

47.30 Descend 20 ft., along top of spur, to Leave top of spur, slopes NW. from E.
79.92 Descend 103 ft., over SW. slope, to The cor. of secs. 16, 17, 20 and 21.
Land, nearly level and rolling.
Soil, rocky, 4th rate.
Timber, cedar and pine.
Undergrowth, corona christo and scrub oak.

40.00 N. 89° 41' W., on random line, bet. secs. 18 and 19.
Set temp. 1/4 sec. cor.
71.79 Fall 2 lks. S. of the cor. of secs. 18 and 19, on the W. bdy. of the Tp., hereinbefore described.
Thence,
S. 89° 40' E., on true line, bet. secs. 18 and 19.
Over mountainous land, thru. scattering timber and undergrowth.
Ascend 40 ft., over N. slope.
3.45 Descend 30 ft., over NE. slope.
6.50 Draw, course NW.
Ascend 127 ft., over SW. slope.
16.90 Spur, slopes NW. Enter rolling land.
Descend 56 ft., over E. slope, to

BOCK 3662

64. Survey of Subdivision lines of Township 14 North, Range 6 East.


Chains.	
31.79	Draw, course N. Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 18 and 19, with brass cap, marked
	$\frac{1}{4}$ S 18 S 19 1923
	from which, A cedar, 16 ins. in diam., brs. S. 7° W., 172 lks. dist., marked $\frac{1}{4}$ S 19 BT. No other bearing tree available. Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor. Enter mountainous land.
35.20	Ascend 44 ft., over W. slope. Spur, slopes N. Descend 51 ft., over E. slope.
40.20	Draw, course N. Enter rolling land. Ascend 33 ft., over W. slope.
50.80	Spur, slopes N. Descend 43 ft., over NE. slope.
71.50	Draw, course NW. Ascend slightly over SW. slope, to
71.79	The cor. of secs. 17, 18, 19 and 20. Land, rolling and mountainous. Soil, rocky, 4th rate. Timber, cedar and pine. Undergrowth, corona christo and scrub oak.

	N. 0° 3' W., bet. secs. 17 and 18. Over rolling land, thru. scattering timber and undergrowth. Ascend 35 ft., over SW. slope.
11.00	Spur, slopes NW. Descend 52 ft., over N. slope.
22.40	Draw, course N. 60° W. Ascend 20 ft., over SW. slope.
25.50	Point of spur, slopes W. Enter mountainous land. Descend 37 ft., over NW. slope.
28.50	Bottom of gulch, course SW. Ascend 108 ft., over steep S. slope, to
36.20	Enter rolling land. Ascend 24 ft., over S. slope, to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 17 and 18, with brass cap, marked
	$\frac{1}{4}$ S 18 S 17 1923
	from which, A cedar, 6 ins. in diam., brs. S. 28 $\frac{1}{2}$ ° E., 89 lks. dist., marked $\frac{1}{4}$ S 17 BT. A cedar, 12 ins. in diam., brs. S. 31 $\frac{3}{4}$ ° W., 155 lks. dist., marked $\frac{1}{4}$ S 20 BT.
45.00	Ascend 10 ft., over S. slope. Ridge, brs. E. and W.
51.10	Descend 27 ft., over gradual N. slope, to Enter mountainous land. Descend 120 ft., over N. slope, to
57.00	Enter rolling land. Descend 66 ft., over N. slope.
71.20	Draw, course N. 70° W. Ascend 33 ft., over SW. slope.
77.30	Point of low spur, slopes W. Descend 17 ft., over N. slope.
79.50	Draw, course S. 85° W., from E. Ascend slightly over S. slope, to
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 7, 8, 17 and 18, with brass

Survey of Subdivision lines of Township 14 North Range 6 East. 65

Chains.

cap, marked



from which,

- A cedar, 12 ins. in diam., brs. N. 33 1/4° W., 156 lks. dist., marked T14N R6E S7 BT.
- A cedar, 8 ins. in diam., brs. N. 60 1/2° E., 199 lks. dist., marked T14N R6E S8 BT.
- A cedar, 8 ins. in diam., brs. S. 2 1/4° E., 36 lks. dist., marked T14N R6E S17 BT.
- A cedar, 10 ins. in diam., brs. S. 46 1/4° W., 231 lks. dist., marked T14N R6E S18 BT.

Land, rolling and mountainous.
 Soil, rocky, 4th rate.
 Timber, cedar and pine.
 Undergrowth, corona christo and scrub oak.

40.00
79.92

S. 89° 49' E., on random line, bet. secs. 8 and 17.
 Set temp. 1/4 sec. cor.
 Fall 18 lks. N. of the cor. of secs. 8, 9, 16 and 17.

23.25
26.50


Thence,
 N. 89° 41' W., on true line, bet. secs. 8 and 17.
 Over rolling land, thru. scattering timber and undergrowth.
 Descend 61 ft., over SW. slope, to
 Foot of descent, brs. NW and SE. Enter nearly level land.

29.10
35.80
38.40

Wash, 50 lks. wide, course N..
 Road, brs. NW and SE. Enter rolling land.
 Ascend 46 ft., over NE. slope.
 Point of spur, slopes N.
 Descend 28 ft., over NW. slope.
 Draw, course N.

39.96

Ascend 10 ft., over E. slope, to
 Set an iron post 3 ft. long, 1 in. in diam., on surface rock, supported in a mound of stone, for 1/4 sec. cor. of secs. 8 and 17, with brass cap, marked.



from which,

- A cedar, 10 ins. in diam., brs. N. 82° E., 185 lks. dist., marked 1/4 S 8 BT.
- A pine, 6 ins. in diam., brs. S. 76 1/2° W., 24 lks. dist., marked 1/4 S 17 BT.

53.90
69.60
74.90
79.92

Enter mountainous land.
 Ascend 147 ft., over E. slope.
 Ridge, brs. NW and SE.
 Descend 180 ft., over SW. slope.
 Enter rolling land.
 Descend 33 ft., over NW. slope.
 Draw, course SW.
 Descend gradually over S. slope, to
 The cor. of secs. 7, 8, 17 and 18.
 Land, rolling, nearly level and mountainous.
 Soil, rocky, 4th rate.
 Timber, cedar and pine.
 Undergrowth, corona christo and scrub oak.

40.00
71.66

N. 89° 40' W., on random line, bet. secs. 7 and 18.
 Set temp. 1/4 sec. cor.
 Intersect the cor. of secs. 7 and 18, on W. bdy. of Tp., here-
 inbefore described.
 Thence,
 S. 89° 40' E., on true line, bet. secs. 7 and 18.

BOCK 3662

.66 Survey of Subdivision lines of Township 14 North, Range 6 East.

Chains.

Over mountainous land, thru scattering timber and undergrowth.
 Ascend 132 ft., over W. slope.
 7.00 Ridge, brs. N. and S.
 Descend 188 ft., over E. slope.
 23.90 Bottom of gulch, course N. 20° E.
 Ascend 34 ft., over W. slope.
 29.80 Spur, slopes N. Enter rolling land.
 Descend 9 ft., over E. slope, to
 31.66 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 7 and 18, with brass cap, marked

S 7
 $\frac{1}{4}$
 S 18
 1923

from which,

A cedar limb, 6 ins. in diam., brs. S. 80° E., 54 lks. dist., marked $\frac{1}{4}$ S 18 BT.

No other bearing tree available. Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Descend 31 ft., over E. slope,
 34.70 Draw, course WE.
 Ascend 69 ft., over NW. slope.
 44.80 Spur, slopes N.
 Descend 87 ft., over E. slope.
 54.50 Draw, course NW.
 Ascend 86 ft., over SW. slope, to
 71.66 The cor. of secs. 7, 8, 17 and 18.
 Land, mountainous and rolling.
 Soil, rocky, 4th rate.
 Timber, cedar and pine.
 Undergrowth, corona christo and scrub oak.

N. 0° 3' W., bet. secs. 7 and 8.

Over rolling land, thru scattering timber and undergrowth.

Ascend 123 ft., over SW. slope.
 12.20 Spur, slopes W. Enter mountainous land.
 Descend 184 ft., over N. slope.
 27.20 Wash, 30 lks. wide, course W. Enter rolling land.
 Ascend 51 ft., over S. slope to $\frac{1}{4}$ sec. cor.
 33.20 Road, brs. E. and W.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 7 and 8, with brass cap, marked

$\frac{1}{4}$
 S 7 | S 8
 1923

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Ascend 30 ft., over SE. slope.
 54.00 Spur, slopes SW.
 Descend 33 ft., over NW. slope.
 69.00 Draw, course SW. Enter mountainous land.
 Ascend 89 ft., over SE. slope, to
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 5, 6, 7 and 8, with brass cap, marked

T14N | R6E
 S 6 | S 5
 S 7 | S 8
 1923

from which,

A cedar, 12 ins. in diam., brs. N. 44 $\frac{1}{2}$ ° W., 53

lks. dist., marked T14N R6E S6 BT.

A pine, 10 ins. in diam., brs. N. 60 $\frac{1}{2}$ ° E., 67

lks. dist., marked T14N R6E S5 BT.

Survey of Subdivision lines of Township 14 North, Range 6 East. 67

chains.

A cedar, 6 ins. in diam., brs. S. 40° E., 116 lks. dist., marked T14N R6E S8 BT.
A cedar, 12 ins. in diam., brs. S. 64° W., 113 lks. dist., marked T14N R6E S7 BT.

Land, rolling and mountainous.
Soil, rocky, 4th rate.
Timber, cedar and pine.
Undergrowth, corona christo and scrub oak.

40.00 S. 89° 41' E., on random line, bet. secs. 5 and 8.
Set temp. 1/4 sec. cor., bet. secs. 5 and 8.
80.06 Fall 14 lks. S. of the cor. of secs. 4, 5, 8 and 9.
Thence,
N. 89° 47' W., on true line, bet. secs. 5 and 8:
Over rolling land, thru. scattering timber and undergrowth.
Ascend 19 ft., over SE. slope.
7.05 Spur, slopes SW.
Descend 35 ft., over W. slope.
15.05 Wash, 10 lks. wide, course S.
Ascend 49 ft., over SE. slope.
39.05 Spur, slopes S.
Descend 5 ft., over W. slope, to
40.03 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor. of secs. 5 and 8, with brass cap, marked

1/4 S 5
S 8
1923

from which,
A cedar, 12 ins. in diam., brs. N. 80° E., 61 lks. dist., marked 1/4 S 5 BT.
A cedar, 6 ins. in diam., brs. S. 7° E., 79 lks. dist., marked 1/4 S 8 BT.

51.80 Descend 22 ft., over W. slope:
Head of draw, course S.
61.70 Ascend 52 ft., over SE. slope, to
Enter mountainous land.
Ascend 78 ft., over E. slope.
68.55 Ridge, brs. N. and S.
Descend 156 ft., over W. slope.
78.05 Wash, 10 lks. wide, course S.
Ascend 32 ft., over SE. slope, to
80.06 The cor. of secs. 5, 6, 7 and 8.
Land, rolling and mountainous.
Soil, rocky, 4th rate.
Timber, cedar and pine.
Undergrowth, corona christo and scrub oak.

40.00 N. 89° 40' W., on random line, bet. secs. 6 and 7.
Set temp. 1/4 sec. cor.
71.61 Fall 4 lks. N. of the cor. of secs. 6 and 7, on the W. bdy. of the Tp., hereinbefore described.
Thence,
S. 89° 42' E., on true line, bet. secs. 6 and 7.
Over rolling land, thru. scattering timber and undergrowth.
Ascend 20 ft., over S. slope.
15.00 Descend 50 ft., over SE. slope.
19.40 Wash, 10 lks. wide, course S. 20° W. Enter mountainous land.
Ascend 66 ft., over N. slope.
22.20 Rim of bench, brs. NE. and S. Thence over nearly level land on bench.
31.10 Road, brs. NE. and SW.
31.61 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor. of secs. 6 and 7, with brass

BOOK 3662

68 Survey of Subdivision lines of Township 14 North, Range 6 East.

Chains.

cap, marked

1/4	S	6
		7
	S	7
		1923

from which,

A cedar, 16 ins. in diam., brs. N. 38° W., 13 lks. dist., marked 1/4 S 6 BT.

A cedar, 16 ins. in diam., brs. S. 11° E., 276 lks. dist., marked 1/4 S 7 BT.

Continue over nearly level land on bench, bearing NE. and SW.

49.80 Leave bench, Enter mountainous land.

Ascend 201 ft., over NW slope.

63.60 Ridge, brs. NE. and SW.

Descend 125 ft., over SE slope, to

71.61 The cor. of secs. 5, 6, 7 and 8.

Land, rolling, mountainous and nearly level.

Soil, rocky, 4th rate.

Timber, cedar and pine.

Undergrowth, corona christo and scrub oak.

N. 0° 3' W., on true line, bet. secs. 5 and 6.

Over mountainous land, thru. scattering timber and undergrowth.

Ascend 121 ft., over S. slope.

8.50 Ridge, brs. E. and W.

Descend 203 ft., over steep N. slope, to

21.00 Foot of steep descent, brs. E. and W. Enter rolling land.

Descend 34 ft., over gradual N. slope.

27.60 Road, brs. E. and W.

32.50 Draw, course W.

Ascend 18 ft., over S. slope, to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor. of secs. 5 and 6, with brass cap, marked

	1/4	
S	6	S
		5
		1923

A cedar, 4 ins. in diam., brs. S. 32° E., 85 lks. dist., marked BT.

No other bearing tree available. Raise a mound of stone 3 ft. base, 2 ft. high, W. of cor.

Ascend 72 ft., over S. slope.

43.80 Wire fence brs. N. 70° W. and S. 70° E.

60.00 Ridge, brs. E. and W.

Descend 62 ft. over N. slope to closing cor.

74.88 Wire fence, brs. E. and W.

74.90 Intersect the N. bdy. of the Tp. at a point 1.72 chs. S.

89° 58' W. from the original cor. of secs. 5 and 6, changed to Angle Point only, as hereinbefore described.

At point of intersection, set an iron post, 3 ft. long, 2 ins. in diam., 14 ins. in the ground to bedrock, supported in a mound of stone for closing cor. of secs. 5 and 6, with brass cap, marked

T15N	R6	E
	S31	
S	6	S
		5
T14N	R6E	
	C/C	
		1923

from which,

A cedar, 8 ins. in diam., brs. S. 22° E., 287 lks. dist., marked T14N R6E S5 CC BT.

A cedar, 14 ins. in diam., brs. S. 14° W., 213 lks. dist., marked T14N R6E S6 CC BT.

One of the bearing trees to the original cor. of secs. 5 and 6, a cedar, 12 ins. in diam., brs. S. 85° W., 310 lks. dist., marked T14N R6E S6 BT, to which add marking "CC".

Land, mountainous and rolling.
Soil, rocky, 4th rate.
Timber, cedar and pine.
Undergrowth, corona christo and scrub oak.

The continued satisfactory adjustment of the solar apparatus of Gurley transit No. 20120 during the execution of resurveys and surveys by Wm. B. Kimmel, U.S.C.E., described in the foregoing notes is indicated from field tests described in Book "F," of this group.

FINAL FIELD TEST OF BUFF TRANSIT NO. 9940, BY BENJAMIN J. KINSEY, U.S. TRANSITMAN.

Aug. 23, 1923. Examine the adjustment of the instrument, and find no errors; then, to test the solar apparatus by comparing its indications during a.m. and p.m. hours, with a meridian determined by Polaris observations, Aug. 7, 1923, at camp near cor. of secs. 10, 11, 14 and 15, T. 13 N., R. 5 E., as described in Book "D" of this group, proceed as follows:

- At 9h.00m. a.m., l.m.t., set off 34° 41½' N. on the lat. arc; 11° 39½' N. on the decl. arc, and determine a meridian with the solar, which agrees with the true meridian.
- At app. noon, with the lat. arc unchanged, observe the sun on the meridian, obtaining a reading of 11° 37' N., which agrees with the computed declination of the sun.
- At 3h.00m. p.m., l.m.t., with the lat. arc unchanged, set off 11° 36½' N. on the decl. arc, and determine a meridian with the solar, which agrees with the true meridian.

The above described tests demonstrate that the instrument has remained in satisfactory adjustment throughout the execution of the surveys hereinbefore described.

FINAL FIELD TEST OF YOUNG & SONS TRANSIT NO. 8540, BY TY WHITE, U.S. TRANSITMAN.

Sept. 5, 1923: Examine the adjustment of the instrument, and find no errors; then, to test the solar apparatus by comparing its indications during a.m. and p.m. hours, with a meridian determined by Polaris observations, Aug. 7, 1923, at camp near cor. of secs. 10, 11, 14 and 15, T. 13 N., R. 5 E., as described in Book "D" of this group, proceed as follows:

- At 9h.00m. a.m., l.m.t., set off 34° 41½' N. on the lat. arc; 7° 3' N. on the decl. arc, and determine a meridian with the solar, which agrees with the true meridian.
- At app. noon, with the lat. arc unchanged, observe the sun on the meridian, obtaining a reading of 7° 00' N., which agrees with the computed declination of the sun.
- At 3h.00m. p.m., l.m.t., with the lat. arc unchanged, set off 6° 57½' N. on the decl. arc, and determine a meridian with the solar, which agrees with the true meridian.

The above described tests demonstrate that the instrument has remained in satisfactory adjustment throughout the execution of the surveys hereinbefore described.

BOCK 3662

70

Township 14 North, Range 6 East.

GENERAL DESCRIPTION.

This township is situated in the Coconino Forest Reserve about 5 miles East of the Verde river. Elevation ranges from 3000 ft. on the W. side to 5000 ft. on the E. side. General drainage is into the Verde river. The surface is mainly mountainous, and the soil is mostly rocky, 4th rate.

There is a spring of good water in sec. 32, known as "Hantz Spring"; also, a tank of stock water in sec. 20.

None of the water courses carry a permanent flow of water. There are no settlers living in the township. A number of wire drift fences are scattered throughout the township. A good growth of cedar and pine, with a merchantable value as fence posts, constitutes the chief timber supply.

There are no roads in the east half of the township, but the west half is traversed by a road north and south, from which in sec. 9 a road extends west, and another road bears northeast and southwest, thru. the north-western part of the township.

There are no indications of valuable mineral deposits. The grazing value of the township is fair.

BOOK 3662

4-680

FIELD ASSISTANTS. to

Ty White, U. S. Transitman.

NAMES.	CAPACITY.
Frank T. Burgess,	1st chainman,
Maynard Burbridge,	2nd chzinman,
Homer Pepper,	cornerman,
Edward McSwinney,	axman,
Howard Beard,	axman,
Marshall Walton,	flagman,
Edward McSwinney,	flagman,

CERTIFICATE OF UNITED STATES TRANSITMAN.

I, Ty White, U. S. Transitman, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 120, Arizona, bearing date of the 26th day of May, 1922, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, re-surveyed all those parts or portions of the East and North boundaries of Township 14 North, Range 6 East;

and surveyed all those parts or portions of the Subdivision lines of

TOWNSHIP 14 NORTH, RANGE 6 EAST.

of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes and by diagram on page 1 hereof as having been executed by me, and under my direction; and that all the corners of said resurvey and survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 120, Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such resurvey and survey.

Place: Long Beach Calif. (U.S.S.) Ty White U. S. Transitman

Date: July 27, 1925.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

19

The foregoing field notes of the survey of

executed by under his special instructions dated, 10, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above described surveys in, has been correctly copied from the original notes on file in this office.

U. S. Surveyor General.

ORIG

BOOK 3662

74

CERTIFICATE OF UNITED STATES ~~SURVEYOR~~ ^{TRANSITMAN}

I, Benjamin J. Kinsey, U. S. ~~Surveyor~~ ^{Transitman}, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 120, Arizona bearing date of the 26th day of May, 1922, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States surveyed all those parts or portions of _____

the Subdivision lines of
Township 14 North, Range 6 East
 _____ of the Gila & Salt River

Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes ^{and by diagram on page 1 hereof} as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 120, Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Place Phoenix, Arizona.
 Date APR 14 1925

Benjamin J. Kinsey
 U. S. ~~Surveyor~~ ^{Transitman}

APPROVAL

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

_____, 192

The foregoing field notes of the survey of _____

executed by _____

under his special instructions dated _____, 191, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U. S. Surveyor General

I certify that the foregoing transcript of the field notes of the above-described surveys in _____, has been correctly copied from the original notes on file in this office.

U. S. Surveyor General

CADASTRAL ENGINEER. SURVEYOR. CERTIFICATE OF UNITED STATES

I, William B. Kimmel, U.S. Cadastral Engineer, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 120, Arizona bearing date of the 26th day of May, 1922, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the West and North boundaries of Township 14 North, Range 6 East and surveyed all those parts or portions of the West boundary and Subdivision lines of Township 14 North, Range 6 East of the Gila & Salt River

Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes and by diagram on page 1 hereof as having been executed by me, and under my direction; and that all the corners of said resurvey and survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 120, Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such resurvey and survey.

Place San Francisco, Calif. Date July 21, 1925.

Wm B. Kimmel, U.S. Cadastral Engineer.

APPROVAL.

OFFICE OF THE U. S. SUPERVISOR OF SURVEYS, U. S. DEPARTMENT OF THE INTERIOR

Denver, Colorado, August 13, 1925.

The foregoing field notes of the resurvey of the East, North and part of the West boundary of

TOWNSHIP 14 NORTH, RANGE 6 EAST,

and of the Survey of

Part of the West boundary, and

Subdivision lines of

TOWNSHIP 14 NORTH, RANGE 6 EAST,

of the Gila and Salt River Base and Meridian, in the State of Arizona, executed by William B. Kimmel, U.S.C.E., and Benjamin J. Kinsey and Ty White, U.S. Transitmen, under his special instructions dated May 26, 1922, for Group 120, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U.S. Supervisor of Surveys

I certify that the foregoing transcript of the field notes of the above described surveys in accordance with the instructions of the U.S. Surveyor General, has been correctly copied from the original notes on file in this office.