

3670

ORIE 77

Book "F".  
4-875

BOOK 3670

# FIELD NOTES

OF THE RESURVEY OF THE

South Boundary,

and of the survey of the

East Boundary,

West Boundary,

North Boundary and

Part of the Subdivision Lines of

TOWNSHIP 14 SOUTH, RANGE 7 EAST,

Of the Gila and Salt River Base and Meridian,

In the State of Arizona.

EXECUTED BY

William H. Thorn, U. S. Cadastral Engineer.

In the capacity of U. S. Surveyor, under Special Instructions dated September 25, 1919, issued by the United States Surveyor General to govern surveys included in Group No. 100, Arizona, which were approved by the Commissioner of the General Land Office, October 22, 1919, and Assignment Instructions dated December 1, 1924.

Resurvey and Survey commenced December 13, 1924.


Resurvey and Survey completed January 7, 1925.

1A


Book "F"  
Group 100 - -Arizona.


BOOK 3670


INDEX DIAGRAM.

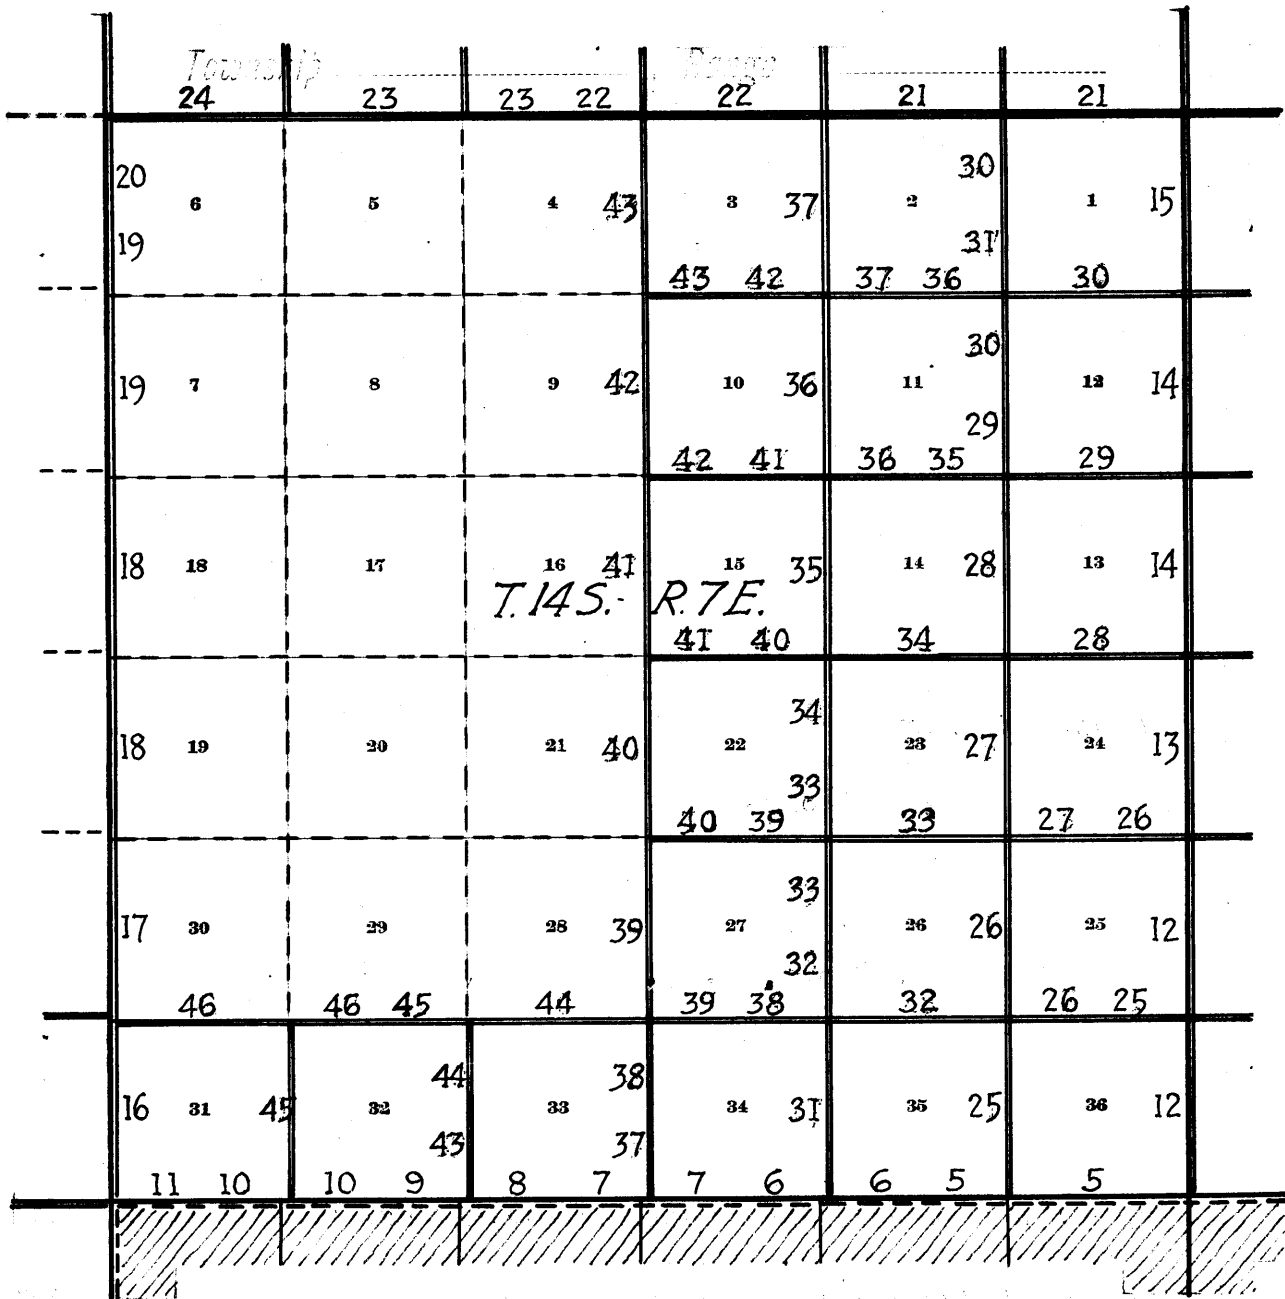


 Lines surveyed under this group.

 Lines resurveyed under this group.

 Accepted surveys.

 Unsurveyed.

 Areas surveyed as per accepted plats on file.

Book "F"  
 Group 100 - - - Arizona.  
 Township 14 South, Range 7 East.

DATE DIAGRAM.

	12-26-24	12-26-24	12-22-24	12-22-24	12-22-24	12-22-24
12-26-24	6	5	4	3	2	1
				1-7-25	1-6-25	1-2-25
12-26-24	7	8	9	10	11	12
				1-6-25	1-3-25	1-2-25
12-26-24	18	17	16	15	14	13
				1-6-25	1-3-25	1-2-25
12-26-24	19	20	21	22	23	24
				1-6-25	1-3-25	1-2-25
12-26-24	30	29	28	27	26	25
	1-5-25	1-5-25	1-5-25	1-5-25	1-3-25	12-31-24
12-13-24	31	32	33	34	35	36
	1-5-25	1-5-25	1-5-25	1-3-25	12-31-24	12-24-24
12-27-24						

————— Indicates lines surveyed by William H. Thorn, U.S.C.E. on dates shown thereon.

- - - - - Indicates lines resurveyed by William H. Thorn, U.S.C.E. on dates shown thereon.

----- Indicates unsurveyed lines.

Resurveys and surveys hereinafter described executed by William H. Thorn, U. S. Cadastral Engineer, on dates shown on diagram on page 1 hereof, using Young and Sons light mountain transit No. 8592, equipped with full vertical circle and Smith solar attachment. Unless otherwise specified all azimuth determinations are accomplished with the solar attachment.

December 21, 1924: Examine the adjustment of the instruments and correct all errors; then, to test the solar apparatus by comparing their indications from observations made during a. m. and p. m. hours with a meridian established by Polaris observation, proceed with each instrument as follows:

At camp near the center of sec. 13, T. 14 S., R. 7 E., G. & S. R. B. & M., Arizona, in latitude  $32^{\circ} 12\frac{1}{2}'$  N., longitude  $111^{\circ} 35\frac{1}{2}'$  W., at 9 h. 0 m., a. m.; 1. m. t., set off  $32^{\circ} 12\frac{1}{2}'$  N. on the lat. arc.,  $23^{\circ} 24\frac{1}{2}'$  S., on the decl. arc, and mark the meridian thus determined by a tack in a peg driven firmly in the ground 5 chs. N.

At app. noon with the lat. arc unchanged, observe the sun on the meridian, obtaining a reading of  $23^{\circ} 26'$  S. on the decl. arc, which agrees with the computed declination of the sun.

At same station at 1 h. 31 m., p. m., 1. m. t., observe Polaris at western elongation, making four observations, two each with the telescope in direct and reversed positions, and mark the mean point in the line thus determined, on a peg driven firmly in the ground 8. chs. N.

Azimuth of Polaris at western elongation =  $1^{\circ} 17' 35''$ .

At 1 h. 45 m., p. m., 1. m. t., lay off the azimuth of Polaris  $1^{\circ} 17\frac{1}{2}'$  to the west and mark the meridian thus determined by a tack in a peg driven firmly in the ground 8. chs. N. This meridian coincides with the meridian determined with the solar apparatus.

At 3 h. 0 m., p. m., 1. m. t., with the lat. arc unchanged, set off  $23^{\circ} 24\frac{1}{2}'$  S. on the decl. arc and determine a meridian with the solar, which agrees with the true meridian.

As all of the solar observations made during the usual hours of solar work come within 1' in arc of the true meridian, conclude that the adjustments of the instruments are satisfactory.

Unless otherwise specified all measurements are made with a Lufkin steel tape 5. chs. in length, compared with a Lufkin standard steel tape and found correct. The measurements are made on the slope, the vertical angles determined with clinometer and the slope measurements properly reduced to true horizontal distances.

Resurvey of the South Boundary of Township 14 South, Range 7 East.

Chains This township boundary was surveyed in 1887 by G. J. Roskrige, U. S. D. S., establishing all corner monuments thereon with a common reference to areas on both sides of the line. No retracement or resurvey of any part of the line is of record.

The following notes describe a resurvey of the entire line, reconstructing all existing corner monuments by setting an iron post with brass cap alongside each one; reestablishing the missing 1/4 sec. cor. of secs. 1 and 36 at proportional dist.; the cor. of secs. 34 and 35 at 160.00 chs. in westing from SE. cor. of the township; the 1/4 sec. cor. of sec. 35 at mid-point of S. bdy. of said sec.; and from the cor. of secs. 34 and 35 reestablishing all 1/4 sec. and sec. cors. referring to areas in T. 14 S., R. 7 E., only, at intervals of 40.00 chs. in westing, placing the excess measurement in the W. 1/2 of S. bdy. of sec. 31.

The portion of the line bet. secs. 1 and 36 being found within allowable limit of error in both measurement and alinement, the original reference of the cor. of secs. 1, 2, 35 and 36 is retained as is also that of the 1/4 sec. cor. of secs. 1 and 36, but all of the other existing cor. monuments are changed to refer to areas in T. 15 S., R. 7 E., only, owing to measurements in excess of allowable limit of error.

Retracement for Resurvey.

From orig. cor. of Ts. 14 and 15 S., Rs. 7 and 8 E., hereinafter described, N. 89° 53' W., on random line, bet. secs. 1 and 36. 40.00 Diligent search in this vicinity fails to reveal any trace of the orig. 1/4 sec. cor. Set temp. 1/4 sec. cor. and continue line and measurement. 80.36 Fall 35 lks. N. of the orig. cor. of secs. 1, 2, 35 and 36, hereinafter described. True course and dist. of line bet. secs. 1 and 36 are, therefore, S. 89° 52' W., 80.36 chs.

N. 89° 53' W., on random line, on N. bdy. of sec. 2 (E. 1/2). 40.38 Fall 27 lks. S. of the orig. 1/4 sec. cor. of secs. 2 and 35, hereinafter described. True course and distance of E. 1/2 of N. bdy. of sec. 2 are, therefore, N. 89° 30' W., 40.38 chs.

Thence N. 89° 53' W., on random line, on N. bdy. of sec. 2 (W. 1/2). 40.13 Fall 1 lk. S. of the orig. cor. of secs. 2, 3, 34 and 35, hereinafter described. True course and distance of W. 1/2 of N. bdy. of sec. 2 are, therefore, N. 89° 52' W., 40.13 chs.

N. 89° 53' W., on random line, on N. bdy. of sec. 3 (E. 1/2). 40.26 Fall 20 lks. S. of the orig. 1/4 sec. cor. of secs. 3 and 34, hereinafter described. True course and distance of E. 1/2 of N. bdy. of sec. 3 are, therefore, N. 89° 36' W., 40.26 chs.

Thence N. 89° 53' W., on random line, on N. bdy. of sec. 3 (W. 1/2). 40.16 Fall 30 lks. S. of the orig. cor. of secs. 3, 4, 33 and 34, hereinafter described. True course and distance of W. 1/2 of N. bdy. of sec. 3 are, therefore, N. 89° 27' W., 40.16 chs.

Resurvey of the South Boundary of  
Township 14 South, Range 7 East.

- Chains (Retracement for resurvey, continued)
- 40.24 N. 89° 53' W., on random line, on N. bdy. of sec. 4 (E.  $\frac{1}{2}$ )  
Fall 1 lks. S. of the orig.  $\frac{1}{4}$  sec. cor. of secs. 4 and  
33, hereinafter described.  
True course and distance of E.  $\frac{1}{2}$  of N. bdy. of sec.  
4 are, therefore, N. 89° 52' W., 40.24 chs.
- Thence  
40.34 N. 89° 53' W., on random line, on N. bdy. of sec. 4 (W.  $\frac{1}{2}$ )  
Fall 9 lks. S. of the orig. cor. of secs. 4, 5, 32 and  
33, hereinafter described.  
True course and distance of W.  $\frac{1}{2}$  of N. bdy. of sec.  
4 are, therefore, N. 89° 45' W., 40.34 chs.
- 
- 40.16 N. 89° 53' W., on random line, on N. bdy. of sec. 5 (E.  $\frac{1}{2}$ )  
Fall 16 lks. S. of the orig.  $\frac{1}{4}$  sec. cor. of secs. 5 and  
32, hereinafter described.  
True course and distance of E.  $\frac{1}{2}$  of N. bdy. of sec.  
5 are, therefore, N. 89° 39' W., 40.16 chs.
- Thence  
40.44 N. 89° 53' W., on random line, on N. bdy. of sec. 5 (W.  $\frac{1}{2}$ )  
Fall 18 lks. S. of the orig. cor. of secs. 5, 6, 31 and  
32, hereinafter described.  
True course and distance of W.  $\frac{1}{2}$  of N. bdy. of sec.  
5 are, therefore, N. 89° 38' W., 40.44 chs.
- 
- 40.87 N. 89° 53' W., on random line, on N. bdy. of sec. 6 (E.  $\frac{1}{2}$ )  
Fall 68 lks. S. of the orig.  $\frac{1}{4}$  sec. cor. of secs. 6 and  
31, hereinafter described.  
True course and distance of E.  $\frac{1}{2}$  of N. bdy. of sec.  
6 are, therefore, N. 88° 56' W., 40.88 chs.
- Thence  
40.83 N. 89° 53' W., on random line, on N. bdy. of sec. 6 (W.  $\frac{1}{2}$ )  
Fall 23 lks. N. of the orig. cor. of Ts. 14 and 15 S.,  
Rs. 6 and 7 E., described in Book "C" of this group.  
True course and distance of W.  $\frac{1}{2}$  of N. bdy. of sec.  
6 are, therefore, S. 89° 47' W., 40.83 chs.

RESURVEY.

The orig. cor. of Ts. 14 and 15 S., Rs. 7 and 8 E., is a  
mesquite post, 4 ins. square, projecting 2 $\frac{1}{2}$  ft. above  
ground, firmly set, mkd. with 6 notches on each of N.,  
S., E. and W. edges, "R VII S XXXVI" on NW. face,  
"T XIV S S XXXI" on NE. face, "R VIII S VI" on SE.  
face, and "T XV S S I" on SW. face. No accessories.  
Reconstruct this cor. monument, as follows:  
Alongside old wood post, set an iron post, 3 ft. long,  
3 ins. in diam., 24 ins. in the ground, for cor. of  
Ts. 14 and 15 S., Rs. 7 and 8 E., with brass cap marked

T 14 S	
R 7 E	R 8 E
S 36	S 31
S 1	S 6
T 15 S	
1924	

From which

- Mesquite, 5 ins. in diam., brs. N. 1 $\frac{1}{2}$ ° E., 80 lks.  
dist., marked T 14 S R 8 E S 31 B T.
- Mesquite, 6 ins. in diam., brs. S. 24 $\frac{1}{2}$ ° E., 214 lks.  
dist., marked T 15 S R 8 E S 6 B T.
- Mesquite, 5 ins. in diam., brs. S. 61° W., 164 lks.  
dist., marked T 15 S R 7 E S 1 B T.
- Mesquite, 5 ins. in diam., brs. N. 18° W., 307 lks.  
dist., marked T 14 S R 7 E S 36 B T.

Resurvey of the South Boundary of  
Township 14 South, Range 7 East.

Chains Thence  
S. 89° 52' W., on a true line, bet. secs. 1 and 36.  
Over level land, thru scattering timber and undergrowth.  
9.98 Wire fence (4-wire) brs. N. and S.  
Derrick at the Santa Rosa Cattle Co's. ranch, brs. S. 8 $\frac{1}{2}$ °  
E., about  $\frac{1}{2}$  mile dist.  
11.00 Road, brs. N. & S.  
25.00 Wash, 15 lks. wide, course N.  
35.60 Wash, 20 lks. wide, course N.  
40.18 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam.,  
26 ins. in the ground, for reestablished  $\frac{1}{4}$  sec. cor.  
of secs. 1 and 36, with brass cap marked

$$\frac{1}{4} \begin{array}{l} \text{S } 36 \\ \text{S } 1 \end{array}$$

1924

From which

Mesquite, 4 ins. in diam., brs. N. 43° W., 55 lks.  
dist., marked  $\frac{1}{4}$  S 36 B T.

Mesquite, 5 ins. in diam., brs. S. 24 $\frac{1}{2}$ ° E., 82 lks.  
dist., marked  $\frac{1}{4}$  S 1 B T.

56.20 Road, brs. NW. and SE.

56.70 Derrick at the Santa Rosa Cattle Cos. Ranch brs. S. 52° E.

80.36 Intersect the original cor. of secs. 1, 2, 35 and 36,  
which is a granite stone 10 x 8 x 6 ins. above ground  
firmly set, marked 1 notch on E. edge and 5 notches  
on W. edge. No accessories.

Reconstruct this cor. monument as follows:

Alongside of old stone set an iron post 3 ft. long, 2 ins.  
in diam., 24 ins. in the ground for cor. of secs. 1,  
2, 35 and 36, with brass cap marked

$$\begin{array}{l} \text{T } 14 \text{ S } \text{ R } 7 \text{ E} \\ \text{S } 35 \text{ | } \text{S } 36 \\ \text{S } 2 \text{ | } \text{S } 1 \\ \text{T } 15 \text{ S} \\ 1924 \end{array}$$

From which

Mesquite, 6 ins. in diam., brs. N. 48° E., 131 lks.  
dist., marked T 14 S R 7 E S 36 B T.

Mesquite, 5 ins. in diam., brs. S. 75° E., 47 lks.  
dist., marked T 15 S R 7 E S 1 B T.

Mesquite, 5 ins. in diam., brs. S. 33° W., 211 lks.  
dist., marked T 15 S R 7 E S 2 B T.

Mesquite, 5 ins. in diam., brs. N. 38° W., 121 lks.  
dist., marked T 14 S R 7 E S 35 B T.

Land; level.

Soil; sandy and gravelly, 2nd rate.

Timber; palo verde and mesquite.

Undergrowth; greasewood and catclaw.

N. 89° 30' W., on a true line, on S. bdy. of sec. 35.  
Over level land, thru scattering timber and undergrowth.  
9.90 Wash, 20 lks. wide, course N. 10° W.  
13.70 Wash, 10 lks. wide, course N.  
29.40 Drain, course N.  
39.82 (Midpoint of S. bdy. of sec. 35). Set an iron post, 3  
ft. long, 1 in. in diam., 26 ins. in the ground for  
reestablished  $\frac{1}{4}$  sec. cor. of sec. 35, only, with  
brass cap marked

Resurvey of the South Boundary of  
Township 14 South, Range 7 East.

Chains

$$\frac{1}{4} \frac{S 35}{1924}$$

From which

Mesquite, 4 ins. in diam., brs. N.  $66\frac{1}{2}^{\circ}$  E., 205 lks.  
dist., marked  $\frac{1}{4}$  S 35 B T.

Palo verde, 6 ins. in diam., brs. N.  $58^{\circ}$  W., 30 lks.  
dist., marked  $\frac{1}{4}$  S 35 B T.

40.38 Intersect the original  $\frac{1}{4}$  sec. cor. of secs. 2 and 35  
which is a mesquite post, 4 ins. sq., projecting 2  
ft. above ground, firmly set, marked  $\frac{1}{4}$  on N. face.  
No accessories.

Reconstruct this cor. monument as follows: Alongside  
old post, set an iron post, 3 ft. long, 1 in. in diam.  
26 ins. in the ground for  $\frac{1}{4}$  sec. cor. of sec. 2, only,  
with brass cap marked

$$\frac{1}{4} \frac{S 2}{1924}$$

No bearing trees available. Dig pits 18 x 18 x 12 ins.  
one each E. and W. of cor. 3 ft. dist.

Thence

N.  $89^{\circ} 52'$  W., on a true line, continuing measurement  
of S. bdy. of sec. 35.

59.10 Wash, 50 lks. wide, course N.

79.30 Dim road, brs. NW. and SE.

79.64 (160.00 chs. westing from T. cor.) Set an iron post, 3  
ft. long, 2 ins. in diam., 24 ins. in the ground for  
reestablished cor. of secs. 34 and 35, only, with  
brass cap marked

$$\begin{array}{c} T 14 S R 7 E \\ \hline S 34 | S 35 \\ \hline 1924 \end{array}$$

No bearing trees available. Dig pits 18 x 18 x 12 ins.  
one each NE. and NW. of cor. 3 ft. dist.

Land; level.

Soil; sandy and gravelly, 2nd rate.

Timber; palo verde and mesquite.

Undergrowth; greasewood and catclaw.

0.87 N.  $89^{\circ} 52'$  W., on true line, on S. bdy. of sec. 34.  
Over level land, thru scattering timber and undergrowth.  
(40.13 chs. N.  $89^{\circ} 52'$  W. from  $\frac{1}{4}$  sec. cor. of sec. 2).  
Intersect original cor. of secs. 2, 3, 34 and 35, which  
is a granite stone 8 x 6 x 6 ins. above ground, firm-  
ly set, marked with 2 notches on E. edge and 4  
notches on W. edge, and witnessed by  
Stump of orig. mesquite bearing tree 8 ins. in  
diam., N.  $10^{\circ}$  W., 223 lks. dist. mkd. B T and  
Stump of orig. mesquite bearing tree 8 ins. in  
diam.  $55\frac{1}{2}^{\circ}$  E., 214 lks. dist., mkd. B T.  
Reconstruct this cor. monument as follows: Alongside  
old stone set an iron post 3 ft. long, 2 ins. in diam.  
24 ins. in the ground for cor. of secs. 2 and 3, only,  
with brass cap marked

$$\begin{array}{c} \hline S 3 | S 2 \\ \hline T 15 S R 7 E \\ \hline 1924 \end{array}$$

No bearing trees available. Dig pits 18 x 18 x 12 ins.  
one each SE. and SW. of cor. 3 ft. dist.



Resurvey of the South Boundary of  
Township 14 South, Range 7 East.

Chains Thence  
N. 89° 36' W., on a true line, continuing measurement of  
S. bdy. of sec. 34.  
16.77 Wash, 20 lks. wide, course N.  
23.16 Wash, 20 lks. wide, course N.  
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
ground for reestablished  $\frac{1}{4}$  sec. cor. of sec. 34, only,  
with brass cap marked

$\frac{1}{4}$  S 34  
1924

From which

Mesquite, 5 ins. in diam., brs. N. 21 $\frac{1}{2}$ ° E. 163 lks.  
dist., marked  $\frac{1}{4}$  S 34 B T.  
Palo verde, 8 ins. in diam., brs. N. 44 $\frac{1}{2}$ ° W., 69 lks.  
dist., marked  $\frac{1}{4}$  S 34 B T.  
41.13 (40.26 chs. N. 89° 36' W., from cor. of secs. 2 and 3).  
Intersect the original  $\frac{1}{4}$  sec. cor. of secs. 3 and 34,  
which is a granite stone 10 x 8 x 6 ins. above ground,  
firmly set, marked  $\frac{1}{4}$  on N. face, and witnessed by the  
two original bearing trees: A mesquite, 6 ins. in  
diam., N. 24° E., 30 lks. dist., and a palo verde 6  
ins. in diam. S 75° E., 97 lks. dist., both mkd.  $\frac{1}{4}$  S  
B T.

Reconstruct this cor. monument as follows: Alongside  
old stone set an iron post 3 ft. long, 1 in. in diam.  
26 ins. in the ground for  $\frac{1}{4}$  sec. cor. of sec. 3, only,  
with brass cap marked

$\frac{1}{4}$  S 3  
1924

From which

Mesquite, 5 ins. in diam., brs. S. 31 $\frac{1}{2}$ ° E., 136 lks.  
dist., marked  $\frac{1}{4}$  S 3 B T.  
Palo verde, 8 ins. in diam., brs. S. 37 $\frac{1}{2}$ ° W., 92 lks.  
dist., marked  $\frac{1}{4}$  S 3 B T.

Thence

N. 89° 27' W., on a true line, continuing measurement  
of S. bdy. of sec. 34.  
58.27 Wash, 20 lks. wide, course N.  
68.77 Wash, 10 " " " "  
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins.  
in the ground for reestablished cor. of secs. 33 and  
34, only, with brass cap marked

T 14 S R 7 E  
S 33 | S 34  
1924

From which

Mesquite, 6 ins. in diam., brs. N. 76° E., 65 lks.  
dist., marked T 14 S R 7 E S 34 B T.  
Mesquite, 6 ins. in diam., brs. N. 43° W., 280 lks.  
dist., marked T 14 S R 7 E S 33 B T.

Land; level.

Soil; sandy and gravelly, 2nd rate.

Timber; palo verde and mesquite.

Undergrowth; greasewood and catclaw.

N. 89° 27' W., on true line, on S. bdy. of sec. 33.  
Over level land, thru scattering timber and undergrowth.  
1.29 (40.16 chs. N. 89° 27' W., from  $\frac{1}{4}$  sec. cor. of sec. 3).  
Intersect the original cor. of secs. 3, 4, 33 and 34,  
which is a granite stone 10 x 8 x 6 ins. above ground,  
firmly set, marked with 3 notches on each of E. and

Resurvey of the South Boundary of  
Township 14 South, Range 7 East.

Chains

W. edges, and witnessed by:

Stump of orig. mesquite bearing tree 8 ins. in diam., S.  $88^{\circ}$  W., 272 lks. dist., marks obliterated.

No trace of orig. NW. bearing tree can be found.

Reconstruct this cor. monument as follows: Alongside old stone, set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 3 and 4, only, with brass cap marked

S 4 | S 3  
T 15 S R 7 E  
1924

From which

Mesquite, 5 ins. in diam., brs. S.  $30\frac{1}{2}^{\circ}$  E., 127 lks. dist., marked T 15 S R 7 E S 3 B T.

Mesquite, 4 ins. in diam., brs. S.  $13\frac{1}{2}^{\circ}$  W., 108 lks. dist., marked T 15 S R 7 E S 4 B T.

Thence

N.  $89^{\circ} 52'$  W., on a true line, continuing measurement of S. bdy. of sec. 33.

18.69 Wash, 10 lks. wide, course N.

29.19 Wash, 20 lks. wide, course N.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished  $\frac{1}{4}$  sec. cor. of sec. 33, only, with brass cap marked

$\frac{1}{4}$  S 33  
1924

From which

Mesquite, 5 ins. in diam., brs. N.  $58\frac{3}{4}^{\circ}$  W., 75 lks. dist., marked  $\frac{1}{4}$  S 33 B T.

No other bearing tree available. Dig pits 18 x 18 x 12 ins., one each E. and W. of cor. 3 ft. dist.

41.53 Intersect the original  $\frac{1}{4}$  sec. cor. of secs. 4 and 33, which is a mesquite post, 4 ins. sq., projecting 2 ft. above ground, marked  $\frac{1}{4}$  on N. face.

Alongside of old cor. set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec. cor. of sec. 4, only, with brass cap marked

$\frac{1}{4}$  S 4  
1924

From which

Palo verde, 6 ins. in diam., brs. S.  $38\frac{1}{2}^{\circ}$  W., 172 lks. dist., marked  $\frac{1}{4}$  S 4 B T.

Mesquite, 7 ins. in diam., brs. S.  $23\frac{3}{4}^{\circ}$  W., 97 lks. dist., marked  $\frac{1}{4}$  S 4 B T.

Thence

N.  $89^{\circ} 45'$  W., on a true line, continuing measurement of S. bdy. of sec. 33.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for reestablished cor. of secs. 32 and 33, only, with brass cap marked

T 14 S R 7 E  
S 32 | S 33  
1924

From which

Mesquite, 5 ins. in diam., brs. N.  $49^{\circ}$  E., 432 lks. dist., marked T 14 S R 7 E S 33 B T.

Mesquite, 8 ins. in diam., brs. N.  $12\frac{1}{2}^{\circ}$  W., 263 lks. dist., marked T 14 S R 7 E S 32 B T.

Resurvey of the South Boundary of  
Township 14 South, Range 7 East.

Chains

Land; level.

Soil; sandy and gravelly, 2nd rate.

Timber; mesquite and palo verde.

Undergrowth; greasewood and catclaw.

1.87 N.  $89^{\circ} 45'$  W., on true line, on S. bdy. of sec. 32.  
Over level land, thru scattering timber and undergrowth.  
(40.34 chs. N.  $89^{\circ} 45'$  W., from  $\frac{1}{4}$  sec. cor. of sec. 4).  
Intersect the original cor. of secs. 4, 5, 32 and 33,  
which is a volcanic stone 12 x 10 x 8 ins. above the  
ground, firmly set, marked with 4 notches on E. edge  
and 2 notches on W. edge, and witnessed by the three  
original bearing trees as follows:

A mesquite, 4 ins. in diam., N.  $76^{\circ}$  W., 117 lks.  
dist., mkd. T 14 S R 7 E S 32 B T.

A mesquite, 5 ins. in diam., N.  $27^{\circ}$  E., 287 lks.  
dist., mkd. T 14 S R 7 E S 33 B T., and

A mesquite, 8 ins. in diam., S.  $3\frac{1}{4}^{\circ}$  E., 229 lks.  
dist., mkd. T 15 S R 7 E S 4 B T.

Reconstruct this cor. monument and alter same to refer  
to secs. 4 and 5, only, as follows:

Alongside old stone set an iron post, 3 ft. long, 2 ins.  
in diam., 24 ins. in the ground for cor. of secs.  
4 and 5, only, with brass cap marked

S 5	S 4
T 15 S	R 7 E
1924	

Destroy marking on the old NE. and NW. bearing trees  
and establish new bearing trees as follows:

Mesquite, 5 ins. in diam., brs. S.  $38^{\circ}$  E., 183 lks.  
dist., marked T 15 S R 7 E S 4 B T.

Mesquite, 5 ins. in diam., brs. S.  $58^{\circ}$  W., 225 lks.  
dist., marked T 15 S R 7 E S 5 B T.

Thence

N.  $89^{\circ} 39'$  W., on a true line, continuing measurement of  
S. bdy. of sec. 32.

2.67 Road, brs. N. and S.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
the ground, for reestablished  $\frac{1}{4}$  sec. cor. of sec. 32,  
only, with brass cap marked

$\frac{1}{4}$ S 32	
1924	

From which

Mesquite, 8 ins. in diam., brs. N.  $24^{\circ}$  E., 112 lks.  
dist., marked  $\frac{1}{4}$  S 32 B T.

Mesquite, 8 ins. in diam., brs. N.  $45\frac{1}{4}^{\circ}$  W., 110 lks.  
dist., marked  $\frac{1}{4}$  S 32 B T.

42.03 (40.16 chs. N.  $89^{\circ} 39'$  W., from cor. of secs. 4 and 5).  
Intersect the original  $\frac{1}{4}$  sec. cor. of secs. 5 and 32,  
which is a mesquite post, 4 ins. sq., projecting 2  
ft. above ground, firmly set, marked  $\frac{1}{4}$  on N. face  
and witnessed by the two original bearing trees, as  
follows:

Mesquite, 6 ins. in diam., N.  $11^{\circ}$  E., 69 lks., dist.  
marked  $\frac{1}{4}$  S B T.

Mesquite, 6 ins. in diam., N.  $22\frac{1}{2}^{\circ}$  W., 88 lks.,  
dist., marked  $\frac{1}{4}$  S B T. Both of these trees  
are dead.

Resurvey of the South Boundary of  
Township 14 South, Range 7 East.

Chains Reconstruct this cor. monument and alter same to refer to quarters of sec. 5 only, as follows:  
Alongside old post  
 1 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec. cor. of sec. 5, only, with brass cap marked

$\frac{1}{4}$  S 5  
1924

and establish new bearing trees as follows:  
 Mesquite, 4 ins. in diam., brs. S.  $68\frac{3}{4}^{\circ}$  E., 24 lks. dist., marked  $\frac{1}{4}$  S 5 B T.  
 Palo verde, 8 ins. in diam., brs. S.  $22^{\circ}$  W., 12 lks. dist., marked  $\frac{1}{4}$  S 5 B T.

Thence  
 N.  $89^{\circ} 38'$  W., on a true line, continuing measurement of S. bdy. of sec. 32.

45.57 Wash, 30 lks. wide, course N.  
 58.97 Road, brs. NE. and SW.  
 61.08 Road, brs. N. and S.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for reestablished cor. of secs. 31 and 32, only, with brass cap marked

T 14 S R 7 E  
S 31 | S 32  
 1924

No bearing trees available. Raise mound of stone 3 ft. base, 2 ft. high, N. of cor.  
 Land; level.  
 Soil; sandy and gravelly, 2nd rate.  
 Timber; mesquite and palo verde.  
 Undergrowth; greasewood and catclaw.

N.  $89^{\circ} 38'$  W., on true line on S. bdy. of sec. 31.  
 Over level land, thru scattering timber and dense undergrowth.

0.67 Foot of slope, brs. N. and S. Enter rolling land. Asc. 20 ft. over SE. slope to  
 2.47 (40.44 chs. N.  $89^{\circ} 38'$  W., from  $\frac{1}{4}$  sec. cor. of sec. 5).  
 Intersect the original cor. of secs. 5, 6, 31 and 32, which is a volcanic stone 14 x 8 x 8 ins. above ground firmly set, marked with 5 notches on E. edge and 1 notch on W. edge and witnessed by a mound of stone 4 ft. base, 2 ft. high, N. of cor. No bearing trees.

Reconstruct this cor. monument and alter same to refer to secs. 5 and 6, only, as follows:  
 Alongside old stone set an iron post, 3 ft. long, 2 ins. in diam., 14 ins. in the ground to bed rock, supported in a mound of stone for cor. of secs. 5 and 6, only, with brass cap marked

S 6 | S 5  
 T 15 S R 7 E  
 1924

No bearing trees available. Destroy old md. of stone N. of cor., and raise a new md. of stone 3 ft. base, 2 ft. high S. of cor.

Resurvey of the South Boundary of  
Township 14 South, Range 7 East.

Chains	Thence
	N. 88° 56' W., on a true line, continuing measurement of S. bdy. of sec. 31.
	Ascend 34 ft. over SE. slope to
7.57	Spur, slopes S. Desc. 70 ft. over SW. slope.
16.67	Foot of desc., brs. N. and S., thence over nearly level land.
23.38	Drain, course N.
26.05	Reservoir (dry), brs. N., about 2.00 chs. dist.
40.01	(40.00 chs. in westing from cor. of secs. 31 and 32). Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. of sec. 31, only, with brass cap marked
	$\frac{1}{4}$ S 31 1924
	No bearing trees available. Dig pits 18 x 18 x 12 ins. one each E. and W. of cor. 3 ft. dist.
43.35	(40.88 chs. N. 88° 56' W. from cor. of secs. 5 and 6). Intersect the original $\frac{1}{4}$ sec. cor. of secs. 6 and 31, which is a volcanic stone 10 x 6 x 4 ins. above ground firmly set, marked $\frac{1}{4}$ on N. face. No accessories. Reconstruct this cor. monument and alter same to refer to quarters of sec. 6, only, as follows: Alongside old stone set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor. of sec. 6, only, with brass cap marked
	$\frac{1}{4}$ S 6 1924
	No bearing trees available. Dig pits 18 x 18 x 12 ins. one each E. and W. of cor. 3 ft. dist.
	Thence
	S. 89° 47' W., on a true line, continuing measurement of S. bdy. of sec. 31.
	Over nearly level land, thru scattering timber and dense undergrowth.
45.08	Road, brs. N. and S.
54.27	Center of wash, 200 lks. wide, course N.
76.45	Road, brs. N. and S.
84.18	(40.83 chs. S. 89° 47' W., from $\frac{1}{4}$ sec. cor. of sec. 6) Intersect the cor. of Ts. 14 and 15 S., Rs. 6 and 7 E., reconstructed as described in book "C" of this group. Land; level and rolling. Soil; gravelly and rocky, 2nd and 4th rate. Timber; palo verde and mesquite. Undergrowth; greasewood.

Survey of the East Boundary of  
Township 14 South, Range 7 East.

Chains From the cor. of Ts. 14 and 15 S., Rs. 7 and 8 E.,  
hereinbefore described:  
Thence  
North, on a true line, bet. secs. 31 and 36.  
Over level land, thru scattering timber and undergrowth.  
27.70 Wire fence, brs. E. and W.  
29.90 Dim road, brs. E. and W.  
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins.  
in the ground for  $\frac{1}{4}$  sec. cor., with brass cap marked

S 36		S 31
1924		

From which  
Mesquite, 8 ins. in diam., brs. N.  $5\frac{1}{2}^{\circ}$  E., 80 lks.  
dist., marked  $\frac{1}{4}$  S 31 B T.  
Mesquite, 9 ins. in diam., brs. S.  $64^{\circ}$  W., 254 lks.  
dist., marked  $\frac{1}{4}$  S 36 B T.  
59.70 Old road, brs. NE. and SW.  
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins.  
in the ground for cor. of secs. 25, 30, 31 and 36,  
with brass cap marked

T 14 S		
R 7 E		R 8 E
S 25		S 30
S 36		S 31
1924		

From which  
Mesquite, 8 ins. in diam., brs. S.  $36\frac{1}{2}^{\circ}$  W., 89 lks.  
dist., marked T 14 S R 7 E S 36 B+T.  
Mesquite, 5 ins. in diam., brs. N.  $47^{\circ}$  W., 164 lks.  
dist., marked T 14 S R 7 E S 25 B T.  
Mesquite, 5 ins. in diam., brs. N.  $9^{\circ}$  E., 355 lks.  
dist., marked T 14 S R 8 E S 30 B T.  
Mesquite, 4 ins. in diam., brs. S.  $13\frac{1}{2}^{\circ}$  E., 277 lks.  
dist., marked T 14 S R 8 E S 31 B-T.

Land; level.  
Soil; sandy and gravelly, 2nd rate.  
Timber; palo verde and mesquite.  
Undergrowth; catclaw and greasewood.

North, on a true line, bet. secs. 25 and 30.  
Over level land, thru scattering timber and dense under-  
growth.  
37.60 Wash, 20 lks. wide, course NW.  
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
the ground for  $\frac{1}{4}$  sec. cor., with brass cap marked

S 25		S 30
1924		

From which  
Mesquite, 8 ins. in diam., brs. N.  $77^{\circ}$  W., 63 lks.  
dist., marked  $\frac{1}{4}$  S 25 B T.  
Mesquite, 8 ins. in diam., brs. N.  $77\frac{1}{2}^{\circ}$  W., 128 lks.  
dist., marked  $\frac{1}{4}$  S 30 B T.  
43.20 Wash, 10 ins. in diam., course NW.  
70.00 Small drain, course NW.  
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins.  
in the ground for cor. of secs. 19, 24, 25 and 30,  
with brass cap marked

Survey of the East Boundary of Township 14 South, Range 7 East.

Chains

T 14 S	
R 7 E	R 8 E
S 24	S 19
S 25	S 30

1924

From which

- Mesquite, 4 ins. in diam., brs. N. 50 $\frac{1}{2}$  $^{\circ}$  E., 65 lks. dist., marked B T.
- Mesquite, 4 ins. in diam., brs. S. 72 $\frac{1}{2}$  $^{\circ}$  E., 35 lks. dist., marked B T.
- Mesquite, 6 ins. in diam., brs. S. 47 $\frac{1}{2}$  $^{\circ}$  W., 130 lks. dist., marked T 14 S R 7 E S 25 B T.
- Mesquite, 6 ins. in diam., brs. N. 82 $^{\circ}$  W., 114 lks. dist., marked T 14 S R 7 E S 24 B T.

Land; level.

Soil; sandy and gravelly, 2nd rate.

Timber; palo verde and mesquite.

Undergrowth; greasewood and catclaw.

North, on a true line, bet. secs. 19 and 24.

Over level land, thru scattering timber and dense undergrowth.

- 13.10 Wash, 10 lks. wide, course NW.
- 15.63 Wash, 10 lks. wide, course N. 20 $^{\circ}$  W.
- 18.80 Road, bears N. 70 $^{\circ}$  W., and S. 70 $^{\circ}$  E.
- 23.70 Wash, 10 lks. wide, course N. 10 $^{\circ}$  W.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec. cor., with brass cap marked

T 14 S	
R 7 E	R 8 E
S 24	S 19

1924

From which

- Mesquite, 5 ins. in diam., brs. N. 10 $\frac{1}{2}$  $^{\circ}$  E., 150 lks. dist., marked  $\frac{1}{4}$  S 19 B T.
- Mesquite, 8 ins. in diam., brs. N. 89 $\frac{1}{2}$  $^{\circ}$  W., 130 lks. dist., marked  $\frac{1}{4}$  S 24 B T.
- 45.00 Enter dense mesquite thicket, brs. E. and W.
- 46.00 Enter wash, 20 lks. wide, from S. 10 $^{\circ}$  E. to North.
- 49.30 Leave wash, from south to N. 10 $^{\circ}$  W.
- 62.00 Leave dense mesquite thicket, brs. NW. and SE.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 13, 18, 19 and 24, with brass cap marked

T 14 S	
R 7 E	R 8 E
S 13	S 18
S 24	S 19

1924

From which

- Mesquite, 4 ins. in diam., brs. N. 37 $\frac{1}{2}$  $^{\circ}$  E., 93 lks. dist., marked B T.
- Mesquite, 4 ins. in diam., brs. S. 5 $\frac{1}{2}$  $^{\circ}$  E., 133 lks. dist., marked B T.
- Mesquite, 8 ins. in diam., brs. S. 72 $\frac{1}{2}$  $^{\circ}$  W., 49 lks. dist., marked T 14 S R 7 E S 24 B T.
- Mesquite, 10 ins. in diam., brs. N. 34 $\frac{1}{2}$  $^{\circ}$  W., 90 lks. dist., marked T 14 S R 7 E S 13 B T.

Land; level.

Soil; sandy and gravelly, 2nd rate.

Timber; mesquite and palo verde.

Undergrowth; scrub mesquite, greasewood and catclaw.

Survey of the east boundary of  
Township 14 South, Range 7 East.

Chains North on a true line, bet. secs. 13 and 18.  
Over level land, thru scattering timber and dense under-  
growth.

- 24.00 Wash, 10 lks. wide, course N. 20° W.  
30.00 Enter dense mesquite thicket, brs. NW. and SE.  
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
the ground for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$   
 S 13 | S 18  
 1924

From which

- Mesquite, 6 ins. in diam., brs. S. 16 $\frac{1}{2}$ ° E., 62 lks.  
dist., marked  $\frac{1}{4}$  S 18 B T.  
Mesquite, 4 ins. in diam., brs. S. 42° W., 41 lks.  
dist., marked B T.  
46.90 Wash, 20 lks. wide, course NE.  
57.30 Wash, 60 lks. wide, course NW.  
64.00 Wash, 15 lks. wide, course NW.  
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins.  
in the ground for cor. of secs. 7, 12, 13 and 18 with  
brass cap marked

T 14 S  
 R 7 E | R 8 E  
 S 12 | S 7  
 S 13 | S 18  
 1924

From which

- Mesquite, 6 ins. in diam., brs. N. 67 $\frac{1}{2}$ ° E., 236 lks.  
dist., marked T 14 S R 8 E S 7 B T.  
Mesquite, 5 ins. in diam., brs. S. 67 $\frac{1}{2}$ ° E., 69 lks.  
dist., marked T 14 S R 8 E S 18 B T.  
Mesquite, 6 ins. in diam., brs. S. 5° W., 58 lks.  
dist., marked T 14 S R 7 E S 13 B T.  
Mesquite, 5 ins. in diam., brs. N. 82° W., 157 lks.  
dist., marked T 14 S R 7 E S 12 B T.

Land; level.

Soil; sandy and gravelly, 2nd rate.

Timber; mesquite.

Undergrowth; scrub mesquite and greasewood.

North, on a true line, bet. secs. 7 and 12.  
Over level land, thru scattering timber and dense under-  
growth.

- 2.20 Wire fence, brs. E. and W.  
35.00 Drain, course NW.  
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
the ground for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$   
 S 12 | S 7  
 1924

From which

- Mesquite, 5 ins. in diam., brs. N. 45° E., 33 lks.  
dist., marked  $\frac{1}{4}$  S 7 B T.  
Mesquite, 8 ins. in diam., brs. S. 4 $\frac{1}{2}$ ° W., 84 lks.  
dist., marked  $\frac{1}{4}$  S 12 B T.  
65.00 Wash, 30 lks. wide, course NW.  
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins.  
in the ground for cor. of secs. 1, 6, 7 and 12, with  
brass cap marked



Survey of the East Boundary of  
Township 14 South, Range 7 East.

Chains

T 14 S	
R 7 E	R 8 E
S 1	S 6
S 12	S 7
1924	

From which

Mesquite, 6 ins. in diam., brs. N. 12° E., 130 lks.

dist., marked T 14 S R 8 E S 6 B T.

Mesquite, 6 ins. in diam., brs. S. 2° E., 100 lks.

dist., marked T 14 S R 8 E S 7 B T.

Mesquite, 6 ins. in diam., brs. S. 10° W., 62 lks.

dist., marked T 14 S R 7 E S 12 B T.

Mesquite, 6 ins. in diam., brs. N. 35½° W., 100 lks.

dist., marked T 14 S R 7 E S 1 B T.

Land; level.

Soil; sandy and gravelly, 2nd rate.

Timber; mesquite.

Undergrowth; scrub mesquite and greasewood.

North, on a true line, bet. secs. 1 and 6.

Over level land, thru scattering timber and dense under-  
growth.

27.20 Wash, 20 lks. wide, course NW.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
the ground for ¼ sec. cor., with brass cap marked

S 1		S 6
1924		

No bearing trees available. Dig pits 18 x 18 x 12 ins.  
N. and S. of cor. 3 ft. dist.80.00 Set an iron post, 3 ft. long, 3 ins. in diam., 24 ins. in  
the ground for cor. of Ts. 13 and 14 S., Rs. 7 and 8  
E., with brass cap marked

T 13 S	
R 7 E	R 8 E
S 36	S 31
S 1	S 6
T 14 S	
1924	

From which

Mesquite, 6 ins. in diam., brs. N. 38° E., 79 lks.

dist., marked T 13 S R 8 E S 31 B T.

Mesquite, 6 ins. in diam., brs. S. 80° E., 274 lks.

dist., marked T 14 S R 8 E S 6 B T.

Mesquite, 8 ins. in diam., brs. S. 55½° W., 38 lks.

dist., marked T 14 S R 7 E S 1 B T.

Mesquite, 5 ins. in diam., brs. N. 60° W., 43 lks.

dist., marked T 13 S R 7 E S 36 B T.

Land; level.

Soil; sandy and gravelly, 2nd rate.

Timber; mesquite.

Undergrowth; scrub mesquite, greasewood and catclaw.

Survey of the West Boundary of  
Township 14 South, Range 7 East.

Chains The following notes describe the survey of the west boundary of T. 14 S., R. 7 E., due north to point of intersection with N. bdy. of said township surveyed due west. The cor. of secs. 30 and 31 is established thereon at point where sectional correction line surveyed due west thru T. 14 S., R. 7 E., intersects the range line. From said sec. cor., north, a set of cors. referring to areas in T. 14 S., R. 7 E., only is established at intervals of 40.00 chs. The  $\frac{1}{4}$  sec. cor. of sec. 31, only, is established at 40.00 chs. S. from the cor. of secs. 30 and 31. The  $\frac{1}{4}$  sec. cor. of sec. 36, T. 14 S., R. 6 E., is established on the line at 40.00 chs. north from T. cor., and the cor. of secs. 25 and 36, T. 14 N., R. 6 E., is established at 80.00 chs. N. from T. cor.

No cors. referring to areas in T. 14 S., R. 6 E., are established on the North 5 miles of the line.

-----

From cor. of Ts. 14 and 15 S., Rs. 6 and 7 E., described in Book "C" of this group.

North, on true line on W. hdy. of sec. 31. Over level land, thru scattering timber and undergrowth. (40.00 chs. S. from the cor. of secs. 30 and 31).

37.51 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec. cor. of sec. 31, only, with brass cap marked.

|  $\frac{1}{4}$  S 31  
1924

From which

Mesquite, 4 ins. in diam., brs. N.  $82\frac{3}{4}^\circ$  E., 114 lks. dist., marked  $\frac{1}{4}$  S 31 B T.

Mesquite, 4 ins. in diam., brs. S.  $10\frac{3}{4}^\circ$  E., 139 lks. dist., marked  $\frac{1}{4}$  S 31 B T.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 36, only, with brass cap marked.

|  $\frac{1}{4}$  S 36  
1924

From which

Mesquite, 4 ins. in diam., brs. N.  $11\frac{1}{2}^\circ$  E., 115 lks. dist., marked B T.

Mesquite, 5 ins. in diam., brs. N.  $8^\circ$  W., 96 lks. dist., marked  $\frac{1}{4}$  S 36 B T.

No other bearing tree W. of line is available.

77.51 (Point of intersection with sectional correction line) Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 30 and 31, only, with brass cap marked.

T 14 S  
R 6 E | R 7 E  
S 36 | S 30  
S 31  
1924

From which

Mesquite, 6 ins. in diam., brs. N.  $24\frac{3}{4}^\circ$  E., 285 lks. dist., marked T 14 S R 7 E S 30 B T.


Mesquite, 5 ins. in diam., brs. S.  $80\frac{3}{4}^\circ$  E., 79 lks. dist., marked T 14 S R 7 E S 31 B T.

Survey of the West Boundary of  
Township 14 South, Range 7 East.

Chains From this cor. the bdy. of the Papago Indian Reservation extends east identical with the sectional correction line, and north identical with the range line. The land to the north of the sectional correction line, and to the east of the range line N. of this cor., being within the reservation.

Land; level.  
Soil; sandy and gravelly, 2nd rate.  
Timber; palo verde and mesquite.  
Undergrowth; greasewood and catclaw.


North, on true line, on W. bay. of sec. 30.  
Over level land, thru scattering timber and undergrowth.  
2.49 (80.00 chs. N. from T. cor.) Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 25 and 36, only, with brass cap marked



From which  
Mesquite, 4 ins. in diam., brs. S.  $7\frac{3}{4}^\circ$  W., 134 lks. dist., marked T 14 S R 6 E S 36 B T.  
Mesquite, 5 ins. in diam., brs. N.  $42\frac{1}{2}^\circ$  W., 252 lks. dist., marked T 14 S R 6 E S 25 B T.

From this cor. the bdy. of the Papago Indian Reservation extends west, identical with the sec. line bet. secs. 25 and 36, and south identical with the range line. The land N. of this cor. on both sides of the range line is within said reservation. Continue line and measurement.


40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec. cor. of sec. 30, only, with brass cap marked



From which  
Mesquite, 4 ins. in diam., brs. N.  $14\frac{1}{2}^\circ$  E., 309 lks. dist., marked  $\frac{1}{4}$  S 30 B T.  
Mesquite, 8 ins. in diam., brs. S.  $80^\circ$  E., 241 lks. dist., marked  $\frac{1}{4}$  S 30 B T.

Continue over level land, thru scattering timber and undergrowth.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 19 and 30, with brass cap marked



From which  
Mesquite, 5 ins. in diam., brs. N.  $19^\circ$  E., 126 lks. dist., marked T 14 S R 7 E S 19 B T.  
Mesquite, 8 ins. in diam., brs. S.  $49\frac{1}{4}^\circ$  E., 220 lks. dist., marked T 14 S R 7 E S 30 B T.

Land; level.  
Soil; sandy and gravelly, 2nd rate.  
Timber; mesquite.  
Undergrowth; greasewood.

Survey of the West Boundary of  
Township 14 South, Range 7 East.

Chains North, on a true line, on W. boundary of Sec. 19.  
Over level land, thru scattering timber and undergrowth.  
2.65 Wire fence, brs. E. and W. (4 wires).  
31.80 Dim road, brs. NW. and SE.  
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
the ground for  $\frac{1}{4}$  sec. cor. of sec. 19, only, with  
brass cap marked

$\frac{1}{4}$  S 19  
1924

From which

Mesquite, 4 ins. in diam., brs. N.  $47\frac{1}{2}^{\circ}$  E., 174 lks.  
dist., marked  $\frac{1}{4}$  S 19 B T.  
Mesquite, 6 ins. in diam., brs. S.  $52\frac{1}{4}^{\circ}$  E., 148 lks.  
dist., marked  $\frac{1}{4}$  S 19 B T.  
43.80 Tucson and Santa Rosa road, brs. E. and W.  
57.10 Road, brs. NE. to Indian Village, about 20.00 chs. dist.  
58.50 Small reservoir brs. west 2.00 chs. dist.  
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins.  
in the ground for cor. of secs. 18 and 19, with brass  
cap marked

T 14 S  
R 7 E  
S 18  
S 19  
1924

From which

Mesquite, 8 ins. in diam., brs. S.  $41\frac{1}{4}^{\circ}$  E., 149 lks.  
dist., marked T 14 S R 7 E S 19 B T.  
No other bearing tree available. Dig pits 18 x 18 x 12  
ins. one each NE. and SE. of post 3 ft. dist.  
Land; level.  
Soil; sandy and gravelly, 2nd rate.  
Timber; mesquite.  
Undergrowth; greasewood.

40.00 North, on true line, on W. bdy. of sec. 18.  
Over level land, thru scattering timber and undergrowth.  
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
the ground for  $\frac{1}{4}$  sec. cor. of sec. 18, only, with  
brass cap marked

$\frac{1}{4}$  S 18  
1924

From which

Mesquite, 6 ins. in diam., brs. N.  $83\frac{1}{2}^{\circ}$  E., 403 lks.  
dist., marked  $\frac{1}{4}$  S 18 B T.  
Mesquite, 4 ins. in diam., brs. S.  $61^{\circ} 10'$  E., 367  
lks. dist., marked  $\frac{1}{4}$  S 18 B T.  
Continue over level land, thru scattering timber and  
undergrowth.  
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins.  
in the ground for cor. of secs. 7 and 18, with brass  
cap marked

T 14 S  
R 7 E  
S 7  
S 18  
1924

From which

Survey of the West Boundary of  
Township 14 South, Range 7 East.

Chains

Ironwood, 8 ins. in diam., brs. N. 53° W., 70 lks.  
dist., marked B T (only).

Ironwood, 8 ins. in diam., brs. S. 33° E., 438 lks.  
dist., marked T 14 S R 7 E S 18 B T.

Land; level.

Soil; sandy and gravelly, 2nd rate.

Timber; mesquite and ironwood.

Undergrowth; greasewood.

North, on a true line, on W. bdy. of sec. 7.

Over level land, thru scattering timber and undergrowth.

15.50 Wash, 50 lks. wide, course NE.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins.  
in the ground for  $\frac{1}{4}$  sec. cor. of sec. 7, T. 14 S., R.  
7 E., with brass cap marked

|  $\frac{1}{4}$  S 7  
1924

From which

Mesquite, 4 ins. in diam., brs. S. 35 $\frac{1}{2}$ ° E., 79 lks.  
dist., marked B T.

Mesquite, 4 ins. in diam., brs. N. 32 $\frac{1}{2}$ ° W., 64 lks.  
dist., marked B T.

Continue over level land, thru scattering timber and  
undergrowth.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in  
the ground for cor. of secs. 6 and 7, only, with  
brass cap marked

T 14 S  
| R 7 E  
| S 6  
| S 7  
1924

From which

Mesquite, 5 ins. in diam., brs. N. 61° E., 166 lks.  
dist., marked T 14 S R 7 E S 6 B T.

Mesquite, 8 ins. in diam., brs. S. 48° E., 37 lks.  
dist., marked T 14 S R 7 E S 7 B T.

Land, level.

Soil; sandy and gravelly, 2nd rate.

Timber; mesquite.

Undergrowth; greasewood.

North, on a true line, on W. bdy. of sec. 6.

Over level land, thru scattering timber and undergrowth.

28.90 Drain, course NE.

39.75 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins.  
in the ground, for witness cor. to  $\frac{1}{4}$  sec. cor. of sec.  
6, only, with brass cap marked


W C  
|  $\frac{1}{4}$  S 6  
1924

From which

Mesquite, 8 ins. in diam., brs. N. 9 $\frac{1}{2}$ ° E., 203 lks.  
dist., marked  $\frac{1}{4}$  S 6 W C B T.

Survey of the West Boundary of  
Township 14 South, Range 7 East.

Chains No other bearing tree available. Dig pits 18 x 18 x 12 ins., one each N. and S. of cor., 3 ft. dist.  
 40.00 True point for  $\frac{1}{4}$  sec. cor. of sec. 6, only, falls in wash, 10 lks. wide, course NE. Impracticable to set monument here, therefore, establish W. C. at 25 lks. S., as described above.  
 Continue over level land, thru scattering timber and undergrowth.  
 80.19 Intersect N. bdy. of T. 14 S., R. 7 E., surveyed due west, as hereinafter described. At point of intersection  
 Set an iron post, 3 ft. long, 3 ins. in diam., 24 ins. in the ground for cor. of Ts. 13 and 14 S., R. 7 E., only, with brass cap marked



From which  
 Mesquite, 5 ins. in diam., brs. N.  $28\frac{1}{2}^\circ$  E., 57 lks. dist., marked T 13 S R 7 E S 31 B T.  
 Mesquite, 5 ins. in diam., brs. S.  $35\frac{1}{2}^\circ$  E., 42 lks. dist., marked T 14 S R 7 E S 6 B T.  
 Land; level.  
 Soil; sandy and gravelly, 2nd rate.  
 Timber; mesquite and palo verde.  
 Undergrowth; greasewood and catclaw.

Survey of North bdy. of Township 14 South, Range 7 East. 21

Chains.

From the cor. of Ts. 13 and 14 S., Rs. 7 and 8 E., hereinbefore described,

West, on true line, bet. secs. 1 and 36.

Over level land, thru. scattering timber and dense undergrowth.

7.10

Drain, course N.

20.60

Wash, 20 lks. wide, course N.

40.00

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked

$\frac{1}{4}$  S 36

S 1

1924

No bearings available. Dig pits, 18x18x12 ins., one each E. and W. of post, 3 ft. dist.

Continue over level land, thru. scattering timber and dense undergrowth.

80.00

Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 1, 2, 35 and 36, with brass cap, marked

T13S R7E

S35 S36

S 2 S 1

T14S

1924

No bearing trees available. Dig pits, 18x18x12 ins., one each NE., SE., SW. and NW. of post, 3 ft. dist.

Land, level.

Soil, sandy and gravelly, 2nd rate.

Timber, mesquite.

Undergrowth, scrub mesquite, greasewood and catclaw.

West, on a true line, bet. secs. 2 and 35.

Over level land, thru. scattering timber and dense undergrowth.

11.00

Wash, 20 lks. wide, course NW.

14.90

Wash, 20 lks. wide, course N.

40.00

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked

$\frac{1}{4}$  S 35

S 2

1924

from which,

A mesquite, 5 ins. in diam., brs. S. 43 $\frac{1}{2}$ ° E., 73 lks. dist., marked  $\frac{1}{4}$  S 2 BT.

A mesquite, 4 ins. in diam., brs. N. 15° W., 30 lks. dist., marked  $\frac{1}{4}$  S 35 BT.

Continue over level land, thru. scattering timber and dense undergrowth.

80.00

Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 2, 3, 34 and 35, with brass cap, marked

T13S R7E

S34 S35

S 3 S 2

T14S

1924

from which,

A mesquite, 5 ins. in diam., brs. N. 22° E., 146 lks. dist., marked T13S R7E S35 BT.

## BOOK 3670

## 22 Survey of North bdy. of Township 14 South, Range 7 East.

Chains.

- A mesquite, 4 ins. in diam., brs. S. 43° E., 23  
lks. dist., marked T14S R7E S2 BT.  
A mesquite, 8 ins. in diam., brs. S. 77° W., 64  
lks. dist., marked T14S R7E S3 BT.  
A mesquite, 5 ins. in diam., brs. N. 52° W., 167  
lks. dist., marked T13S R7E S34 BT.

Land, level.

Soil, sandy and gravelly, 2nd rate.

Timber, mesquite.

Undergrowth, scrub mesquite, greasewood and catclaw.

West, on true line, bet. secs. 3 and 34.

Over level land, thru. scattering timber and dense under-  
growth.

22.00 Road brs. NE. and SW.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked
$$\frac{1}{4} \text{ S } 34$$

$$\text{S } 3$$

$$1924$$

from which,

- A mesquite, 4 ins. in diam., brs. S. 45° W., 16  
lks. dist., marked  $\frac{1}{4}$  S 3 BT.  
A mesquite, 5 ins. in diam., brs. N. 15° E., 69  
lks. dist., marked  $\frac{1}{4}$  S 34 BT.

Continue over level land, thru. scattering timber and  
dense undergrowth.

58.00 Wash, 30 lks. wide, course N.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in  
the ground, for cor. of secs. 3, 4, 33 and 34, with brass  
cap, marked

T13S	R7E
S33	S34
S 4	S 3
T14S	
1924	

from which,

- A mesquite, 8 ins. in diam., brs. N. 22° E., 163  
lks. dist., marked T13S R7E S34 BT.  
A mesquite, 6 ins. in diam., brs. S. 53 $\frac{1}{2}$ ° E., 305  
lks. dist., marked T14S R7E S 3 BT.

No other bearing trees available.

Dig pits, 18x18x12 ins., one each NE., SE., SW. and NW. of  
post, 3 ft. dist.

Land, level.

Soil, sandy and gravelly, 2nd rate.

Timber, mesquite.

Undergrowth, scrub mesquite and greasewood.

West, on a true line, bet. secs. 4 and 33.

Over level land, thru. scattering timber and dense under-  
growth.

31.90 Road, brs. N. and S.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked
$$\frac{1}{4} \text{ S } 33$$

$$\text{S } 4$$

$$1924$$



Survey of North bdy. of Township 14 South, Range 7 East. 23

Chains.

No bearing trees available. Dig pits 18x18x12 ins., one each E. and W. of cor., 3 ft. dist. Continue over level land, thru. scattering timber and dense undergrowth.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 4, 5, 32 and 33. with brass cap, marked

T13S R7E  
S32 S33  
S 5 S 4  
T14S  
1924

from which,

A mesquite, 5 ins. in diam., brs. S. 89 1/2° W., 200 lks. dist., marked T14S R7E S5 BT.

A mesquite, 4 ins. in diam., brs. N. 19 1/2° W., 247 lks. dist., marked T13S R7E S32 BT.

No other bearing trees available. Dig pits, 18x18x12 ins., one each NE., SE., SW. and NW. of post, 3 ft. dist.

Land, level.

Soil, sandy and gravelly, 2nd rate.

Timber, mesquite.

Undergrowth, greasewood and scrub mesquite.

West, on a true line, bet. secs. 5 and 32.

Over level land, thru. scattering timber and dense undergrowth.

2.50 Wash, 20 lks. wide, course N.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor., with brass cap, marked

1/4 S 32  
S 5  
1924

from which,

A mesquite, 8 ins. in diam., brs. S. 16° 10' E., 79 lks. dist., marked 1/4 S 5 BT.

A mesquite, 8 ins. in diam., brs. N. 87 1/2° W., 69 lks. dist., marked 1/4 S 32 BT.

Continue over level land, thru. scattering timber and dense undergrowth.

44.60 Wash, 30 lks. wide, course N.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 5, 6, 31 and 32, with brass cap, marked

T13S R7E  
S31 S32  
S 6 S 5  
T14S  
1924

from which.

A mesquite, 5 ins. in diam., brs. N. 25 1/2° E., 44 lks. dist., marked T13S R7E S32 BT.

A mesquite, 5 ins. in diam., brs. S. 35° E., 47 lks. dist., marked T14S R7E S5 BT.

A mesquite, 4 ins. in diam., brs. S. 45° W., 47 lks. dist., marked BT.

A mesquite, 5 ins. in diam., brs. N. 71° W., 145 lks. dist., marked BT.

Land, level.

Soil, sandy and gravelly, 2nd rate.

## BOOK 3670

24 Survey of North bdy. of Township 14 South, Range 7 East.

Chains.

Timber, mesquite.  
Undergrowth, greasewood and scrub mesquite.

West, on true line, bet. secs. 6 and 31.  
Over level land, thru scattering timber and dense under-  
growth.

4.80 Wash, 15 lks. wide, course N.  
10.00 Wash, 20 lks. wide, course N.  
19.50 Wash, 15 lks. wide, course N.  
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor., with brass cap, marked

$\frac{1}{4}$  S 31  
S 6  
1924

No bearing trees available. Dig pits, 18x18x12 ins., one  
each E. and W. of post, 3 ft. dist.  
Continue over level land, thru scattering timber and under-  
growth.

53.80 Draw, course N.  
84.00 Intersect the W. bdy. of T. 14 S., R. 7 E., surveyed due  
north, Cor. of Ts. 13 and 14 S., R. 7 E., established at  
this point of intersection, as hereinbefore described.  
Land, level.  
Soil, sandy and gravelly, 2nd rate.  
Timber, mesquite.  
Undergrowth, scrub mesquite, greasewood and catclaw.

Survey of part of the Subdivision Lines of  
Township 14 South, Range 7 East.

**Chains** The following notes describe the survey of the subdivision lines of all that part of T. 14 S., R. 7 E., situated outside the Papago Indian Reservation. The said Indian Reservation embraces all of the west half of the township except Secs. 31, 32 and 33.

From the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the township, hereinbefore described.

- 18.00 Wash, 20 lks. wide, course N. 10° W.
- 19.80 Road, brs. NW. and SE.
- 27.10 Wash, 20 lks. wide, course NW.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$   
 S 35 | S 36  
 1924

From which

- Mesquite, 4 ins. in diam., brs. S. 58 $\frac{1}{2}$ ° E., 29 lks. dist., marked  $\frac{1}{4}$  S 36 B T.
- Mesquite, 6 ins. in diam., brs. N. 68 $\frac{1}{2}$ ° W., 143 lks. dist., marked  $\frac{1}{4}$  S 35 B T.
- 46.50 Wash, 20 lks. wide, course N. 20° W.
- 79.30 Dim road, brs. NW. and SE.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 25, 26, 35 and 36 with brass cap marked.

T 14 S R 7 E  
 S 26 | S 25  
 S 35 | S 36  
 1924

From which

- Mesquite, 5 ins. in diam., brs. N. 16 $\frac{1}{2}$ ° E., 132 lks. dist., marked T 14 S R 7 E S 25 B T.
- Mesquite, 8 ins. in diam., brs. S. 40 $\frac{1}{2}$ ° E., 58 lks. dist., marked T 14 S R 7 E S 36 B T.
- Mesquite, 5 ins. in diam., brs. S. 46 $\frac{1}{2}$ ° W., 132 lks. dist., marked T 14 S R 7 E S 35 B T.
- Mesquite, 4 ins. in diam., brs. N. 61 $\frac{1}{2}$ ° W., 109 lks. dist., marked T 14 S R 7 E S 26 B T.

Land; level.

Soil; sandy and gravelly, 2nd rate.

Timber; mesquite and palo verde.

Undergrowth; catclaw and greasewood.

- 40.00 N. 89° 52' E., on a random line, bet. secs. 25 and 36. Set temp.  $\frac{1}{4}$  sec. cor.

- 80.38 Fall 3 lks. N. of the cor. of secs. 25, 30, 31 and 36, on E. bdy. of township, hereinbefore described.

Thence

S. 89° 53' W., on a true line, bet. secs. 25 and 36.

Over level land, thru scattering timber and dense undergrowth.

- 12.68 Road, brs. N. and S.

- 29.38 Drain, course N.

- 40.19 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec. cor., with brass cap marked


$\frac{1}{4}$  S 25  
 S 36  
 1924

Survey of part of the Subdivision Lines of  
Township 14 South, Range 7 East.

Chains	From which Mesquite, 4 ins. in diam., brs. N. 3° E., 114 lks. dist., marked $\frac{1}{4}$ S 25 B T. Mesquite, 4 ins. in diam., brs. S. 88° W., 86 lks. dist., marked $\frac{1}{4}$ S 36 B T.																
40.33	Road, brs. N. and S.																
63.08	Wash, 15 lks. wide, course N.																
69.48	Drain, course N.																
70.88	An old R. R. survey, brs. NE. and SW.																
80.38	The cor. of secs. 25, 26, 35 and 36, Land; level. Soil; sandy and gravelly, 2nd rate. Timber; mesquite. Undergrowth; greasewood and catclaw.																
N. 0° 1' W., bet. secs. 25 and 26. Over-level land, thru scattering timber and dense under- growth.																	
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap marked																
<table border="0"> <tr> <td>S 26</td> <td>↑</td> <td>S 25</td> </tr> <tr> <td></td> <td>1</td> <td></td> </tr> <tr> <td></td> <td>924</td> <td></td> </tr> </table>		S 26	↑	S 25		1			924								
S 26	↑	S 25															
	1																
	924																
From which Mesquite, 5 ins. in diam., brs. S. 76° E., 107 lks. dist. marked $\frac{1}{4}$ S 25 B T. Mesquite, 8 ins. in diam., brs. N. 89° W., 75 lks. dist., marked $\frac{1}{4}$ S 26 B T.																	
41.00	Wash, 15 lks. wide, course NE.																
44.30	Same wash, course NW.																
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 23, 24, 25 and 26, with brass cap marked																
<table border="0"> <tr> <td>T 14</td> <td>S</td> <td>R 7</td> <td>E</td> </tr> <tr> <td>S 23</td> <td> </td> <td>S 24</td> <td></td> </tr> <tr> <td>S 26</td> <td> </td> <td>S 25</td> <td></td> </tr> <tr> <td colspan="4" style="text-align: center;">1924</td> </tr> </table>		T 14	S	R 7	E	S 23		S 24		S 26		S 25		1924			
T 14	S	R 7	E														
S 23		S 24															
S 26		S 25															
1924																	
From which Mesquite, 6 ins. in diam., brs. N. 53 $\frac{1}{2}$ ° E., 253 lks. dist., marked T 14 S R 7 E S 24 B T. Mesquite, 6 ins. in diam., brs. S. 54 $\frac{1}{2}$ ° E., 255 lks. dist., marked T 14 S R 7 E S 25 B T. Mesquite, 8 ins. in diam., brs. S. 64 $\frac{1}{2}$ ° W., 144 lks. dist., marked T 14 S R 7 E S 26 B T. Mesquite, 5 ins. in diam., brs. N. 85 $\frac{1}{2}$ ° W., 232 lks. dist., marked T 14 S R 7 E S 23 B T. Land; level. Soil; sandy loam, 2nd rate. Timber; mesquite and palo verde. Undergrowth; greasewood and catclaw.																	
N. 89° 53' E., on a random line, bet. secs. 24 and 25.																	
40.00	Set a temp. $\frac{1}{4}$ sec. cor.																
80.38	Fall 5 lks. N. of cor. of secs. 19, 24, 25 and 30, on E. bdy. of the T., hereinbefore described.																
Thence S. 89° 55' W., on a true line, bet. secs. 24 and 25. Over level land, thru scattering timber and dense under- growth.																	
17.38	Enter overflowed land and dense thicket of mesquite,																
20.38	Leave overflowed land, course N. 20° W.																

Survey of part of the Subdivision Lines of Township 14 South, Range 7 East.

- Chains
- 26.38 Road, bears N. and S.
- 28.88 Wash, 20 lks. wide, course N.
- 39.38 Wash, 30 lks. wide, course N.
- 40.19 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec. cor., with brass cap marked




From which  
 Mesquite, 6 ins. in diam., brs. S. 57° E., 155 lks. dist., marked  $\frac{1}{4}$  S 25 B T.  
 Mesquite, 10 ins. in diam., brs. N. 89° E., 140 lks. dist., marked  $\frac{1}{4}$  S 24 B T.

- 55.88 Enter overflow land and dense thicket, course N.
- 60.38 Leave overflow land and thicket, course N.
- 62.18 Dim road, brs. N. and S.
- 64.88 Dim road, brs. NW. and SE.
- 74.08 Enter overflow land and dense thicket, course N.
- 77.18 Leave overflow land and dense thicket, course N.
- 80.38 The cor. of secs. 23, 24, 25 and 26.  
 Land; level.  
 Soil; sandy and gravelly, 2nd rate.  
 Timber; mesquite.  
 Undergrowth; scrub mesquite and greasewood and catclaw.


N. 0° 1' W., bet. secs. 23 and 24.  
 Over level land, thru scattering timber and dense undergrowth.

- 21.00 Dim road, brs. N. 10° W., and S. 10° E.
- 24.00 Enter wash, 20 lks. wide, course from SW. to N.
- 26.60 Road, brs. E. and W.
- 29.00 Same wash, from south to NW.
- 30.00 Same wash, from SW. to N.
- 37.60 Same wash, from S. to NW.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec. cor. with brass cap marked



From which  
 Mesquite, 5 ins. in diam., brs. N. 37° E., 158 lks. dist., marked  $\frac{1}{4}$  S 24 B T.  
 Mesquite, 5 ins. in diam., brs. N. 52° E., 34 lks. dist., marked  $\frac{1}{4}$  S 23 B T.

- 77.40 Wash, 15 lks. wide, course NE.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 13, 14, 23 and 24, with brass cap marked



From which  
 Mesquite, 5 ins. in diam., brs. N. 78° E., 16 lks. dist., marked T 14 S R 7 E S 13 B T.  
 Mesquite, 5 ins. in diam., brs. S. 3° E., 39 lks. dist., marked T 14 S R 7 E S 24 B T.  
 Mesquite, 5 ins. in diam., brs. S. 47 $\frac{1}{2}$ ° W., 108 lks. dist., marked T 14 S R 7 E S 23 B T.

Survey of part of the Subdivision Lines of  
Township 14 South, Range 7 East.

Chains	<p>Mesquite, 4 ins. in diam., brs. N. 2° W., 59 lks., marked T 14 S R 7 E S 14 B T. Land; level. Soil; sandy and gravelly, 2nd rate. Timber; mesquite. Undergrowth; scrub mesquite, catclaw and greasewood.</p>
40.00	N. 89° 55' E., on a random line, bet. secs. 13 and 24. Set temp. $\frac{1}{4}$ sec. cor.
80.38	Ball 5 lks. S. of the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of the T., hereinbefore described. Thence S. 89° 53' W., on a true line, bet. secs. 13 and 24. Over level land, thru scattering timber and dense under- growth.
28.58	Road, bears N. and S.
40.19	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \begin{array}{l} S 13 \\ S 24 \\ 1925 \end{array}$
	From which
	Mesquite, 5 ins. in diam., brs. N. 3 $\frac{3}{4}$ ° W., 160 lks. dist., marked $\frac{1}{4}$ S 13 B T.
	Mesquite, 5 ins. in diam., brs. S. 45 $\frac{3}{4}$ ° E., 84 lks. dist., marked $\frac{1}{4}$ S 24 B T.
44.38	Wash, 15 lks. wide, course N.
55.08	Wash, 40 lks. wide, course N.
79.88	Wash, 20 lks. wide, course N.
80.38	The cor. of secs. 13, 14, 23 and 24. Land; level. Soil; sandy and gravelly, 2nd rate. Timber; mesquite. Undergrowth; scrub mesquite, catclaw and greasewood.
	N. 0° 1' W., bet. secs. 13 and 14. Over level land, thru scattering timber and dense under- growth.
1.30	Wash, 20 lks. wide, course NW.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor. with brass cap marked
	$\begin{array}{c} \frac{1}{4} \\ S 14 \quad   \quad S 13 \\ 1925 \end{array}$
	From which
	Mesquite, 4 ins. in diam., brs. N. 80 $\frac{1}{2}$ ° E., 29 lks. dist., marked $\frac{1}{4}$ S 13 B T.
	Mesquite, 5 ins. in diam., brs. N. 66 $\frac{1}{2}$ ° W., 70 lks. dist., marked $\frac{1}{4}$ S 14 B T.
65.00	Wash, 30 lks. wide, course NE.
79.80	Same wash, course NW.
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 11, 12, 13 and 14, with brass cap marked
	$\begin{array}{c} T 14 S \quad R 7 E \\ S 11 \quad   \quad S 12 \\ S 14 \quad   \quad S 13 \\ 1925 \end{array}$

Survey of part of the Subdivision Lines of  
Township 14 South, Range 7 East.

Chains From which  
 Mesquite, 4 ins. in diam., brs. N. 86° E., 216 lks.  
 dist., marked T 14 S R 7 E S 12 B T.  
 Mesquite, 8 ins. in diam., brs. S. 5° E., 200 lks.  
 dist., marked T 14 S R 7 E S 13 B T.  
 Mesquite, 8 ins. in diam., brs. S. 9° W., 244 lks.  
 dist., marked T 14 S R 7 E S 14 B T.  
 Mesquite, 5 ins. in diam., brs. N. 50° W., 176 lks.  
 dist., marked T 14 S R 7 E S 11 B T.

Land; level.  
 Soil; sandy and gravelly, 2nd rate.  
 Timber; mesquite.  
 Undergrowth; scrub mesquite, greasewood and catclaw.

N. 89° 53' E., on a random line bet. secs. 12 and 13.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.46 Intersect the cor. of secs. 7, 12, 13 and 18, on the E.  
 bdy. of the T., hereinbefore described.

Thence  
 S. 89° 53' W., on a true line, bet. secs. 12 and 13.  
 Over level land, thru scattering timber and dense under-  
 growth.

7.96 Wash, 10 lks. wide, course N.  
 9.96 Wash, 20 lks. wide, course N.  
 35.46 Drain, course N.  
 40.23 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins.  
 in the ground for  $\frac{1}{4}$  sec. cor. with brass cap marked

$\frac{1}{4}$  S 12  
 S 13  
 1925

From which  
 Mesquite, 8 ins. in diam., brs. S. 13° W., 193 lks.  
 dist., marked  $\frac{1}{4}$  S 13 B T.  
 Mesquite, 8 ins. in diam., brs. N. 11 $\frac{1}{2}$ ° W., 119 lks.  
 dist., marked  $\frac{1}{4}$  S 12 B T.

53.96 Drain, course N.  
 80.46 The cor. of secs. 11, 12, 13 and 14.

Land; level.  
 Soil; sandy and gravelly, 2nd rate.  
 Timber; mesquite.  
 Undergrowth; scrub mesquite, greasewood and catclaw.

N. 0° 1' W., bet. secs. 11 and 12.  
 Over level land, thru scattering timber and dense under-  
 growth.

2.40 Wire fence, brs. E. and W.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins.  
 in the ground for  $\frac{1}{4}$  sec. cor., with brass cap marked


S 11  $\frac{1}{4}$  S 12  
 1925

From which  
 Mesquite, 8 ins. in diam., brs. N. 4 $\frac{1}{2}$ ° E., 550 lks.  
 dist., marked  $\frac{1}{4}$  S 12 B T.  
 Mesquite, 8 ins. in diam., brs. S. 54 $\frac{1}{2}$ ° W., 110 lks.  
 dist., marked  $\frac{1}{4}$  S 11 B T.

Survey of part of the Subdivision Lines of Township 14 South, Range 7 East.

Chains


- 45.90 Wash, 50 lks. wide, course NE.
- 55.30 Drain, course N. 10° E.
- 64.50 Enter wash, from SW\* to North.
- 72.00 Leave wash, from S. to N. 10° W.
- 80.00 Set an iron post, 3 ft. long; 2 ins. in diam., 24 ins. in the ground for cor. of secs. 1, 2, 11 and 12, with brass cap marked.



From which

- Mesquite, 5 ins. in diam., brs. S. 31° W., 75 lks. dist., marked T 14 S R 7 E S 11 B T.
- Mesquite, 6 ins. in diam., brs. N. 27° W., 53 lks. dist., marked T 14 S R 7 E S 2 B T.
- No other bearing trees available. Dig pits 18 x 18 x 12 ins. one each NE., SE., SW. and NW. of post 3 ft. dist.
- Land; level.
- Soil; 2nd rate.
- Timber; mesquite.
- Undergrowth; scrub mesquite and greasewood.

- N. 89° 53' E., on a random line, bet. secs. 1 and 12.
- 40.00 Set a temp. 1/4 sec. cor.
- 80.30 Fall 6 lks. S. of the cor. of secs. 1, 6, 7 and 12, on the E. bdy. of the T., hereinbefore described.
- Thence
- S. 89° 50' W., on a true line, bet. secs. 1 and 12.
- Over-level land, thru scattering timber and dense undergrowth.
- 15.30 Wash, 30 lks. wide, course N.
- 40.15 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor., with brass cap marked



From which

- Mesquite, 4 ins. in diam., brs. S. 80 1/2° E., 143 lks. dist., marked 1/4 S 12 B T.
- Mesquite, 5 ins. in diam., brs. N. 17 1/2° W., 160 lks. dist., marked 1/4 S 1 B T.
- 67.80 Enter overflow land and dense thicket, course N.
- 73.30 Leave overflow land, course N.
- 80.30 The cor. of secs. 1, 2, 11 and 12.
- Land; level.
- Soil; sandy and gravelly, 2nd rate.
- Timber; mesquite.
- Undergrowth; scrub mesquite, catclaw and greasewood.


- N. 0° 1' W., on a random line, bet. secs. 1 and 2.
- 40.00 Set temp. 1/4 sec. cor.
- 80.18 Fall 23 lks. E. of the cor. of secs. 1, 2, 35 and 36, on the N. bdy. of the T., hereinbefore described.
- Thence
- S. 0° 11' E., on a true line, bet. secs. 1 and 2.
- Over-level land, thru scattering timber and dense undergrowth.



Survey of part of the Subdivision Lines of Township 14 South, Range 7 East.

Chains

- 5.68 Wash, 15 lks. wide, course NW.
- 40.18 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec. cor., with brass cap marked



From which


- Mesquite, 5 ins. in diam., brs. N.  $89\frac{1}{2}^\circ$  E., 36 lks. dist., marked  $\frac{1}{4}$  S 1 B T.
  - Mesquite, 4 ins. in diam., brs. N.  $77^\circ$  W., 69 lks. dist., marked  $\frac{1}{4}$  S 2 B T.
  - 61.18 Wash, 20 lks. wide, course N.  $20^\circ$  W.
  - 66.18 Wash, 20 lks. wide, course N.  $20^\circ$  W.
  - 80.18 The cor. of secs. 1, 2, 11 and 12.
- Land; level.  
Soil; sandy and gravelly, 2nd rate.  
Timber; mesquite.  
Undergrowth; scrub mesquite, catclaw and greasewood.

The west five miles of the south bdy. of the T., being defective in alinement, begin at the cor. of secs. 25, 26, 35 and 36, and survey a Sectional Correction Line due west to intersection with W. bay. of the T., setting temp. cors. thereon at intervals of 40.00 chs. The permanent sec. cors. are then established at the points where the meridional sec. lines surveyed from the sec. cors. on the S. bdy. in the normal manner, intersect said sectional correction line. The permanent  $\frac{1}{4}$  sec. cors. on the sectional correction line are then established at mid-points bet. the sec. cors. with the exception of the  $\frac{1}{4}$  sec. cor. of secs. 30 and 31, which is established at 40.00 chs. W. from the cor. of secs. 29, 30, 31 and 32. The quarter sec. cors. on the meridional sec. lines in the S. tier of secs. are established at 40.00 chs. S. from sectional correction line, placing the deficiency in measurement against the S. bdy. of the township.

- From temp. cor. of secs. 26, 27, 34 and 35, on sectional correction line.
- S.  $0^\circ 1'$  E., on random line, bet. secs. 34 and 35.
- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.
- 79.56 Fall 36 lks. W. of the reestablished cor. of secs. 34 and 35 on the S. bdy. of the T., hereinbefore described.

Thence

- N.  $0^\circ 1'$  W., on a true line, bet. secs. 34 and 35.
- Over level land, thru scattering timber and undergrowth.
- 39.56 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of secs. 34 and 35, with brass cap marked



From which

- Mesquite, 6 ins. in diam., brs. S.  $19\frac{1}{2}^\circ$  E., 168 lks. dist., marked  $\frac{1}{4}$  S 35 B T.
- Mesquite, 6 ins. in diam., brs. N.  $57^\circ$  W., 226 lks. dist., marked  $\frac{1}{4}$  S 34 B T.
- Continue over level land, thru scattering timber and undergrowth.
- 79.56 Intersect the sectional correction line at 36 lks. E. of the temp. cor. of secs. 26, 27, 34 and 35, or 79.64

Survey of part of the Subdivision Lines of Township 14 South, Range 7 East.

Chains

chs. west from cor. of secs. 25, 26, 35 and 36. At point of intersection set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 26, 27, 34 and 35, with brass cap marked

T 14 S R 7 E  
S 27 | S 26  
S 34 | S 35  
1925

From which

- Mesquite, 6 ins. in diam., brs. N. 18° E., 336 lks. dist., marked T 14 S R 7 E S 26 B T.
- Mesquite, 6 ins. in diam., brs. S. 31° E., 580 lks. dist., marked T 14 S R 7 E S 35 B T.
- Mesquite, 6 ins. in diam., brs. S. 74° W., 128 lks. dist., marked T 14 S R 7 E S 34 B T.
- Mesquite, 5 ins. in diam., brs. N. 50° W., 250 lks. dist., marked T 14 S R 7 E S 27 B T.

Land; level.

Soil; sandy and gravelly, 2nd rate.

Timber; mesquite.

Undergrowth; greasewood and catclaw.

From the cor. of secs. 25, 26, 35 and 36.

West, on a true line, on sectional correction line, bet. secs. 26 and 35.

Over level land, thru scattering timber and undergrowth.

12.90 Wash, 20 lks. wide, course N.

16.00 Wash, 20 lks. wide, course N. 20° W.

30.50 Wash, 20 lks. wide, course N.

39.82 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor., with brass cap marked

1/4 S 26  
S 35  
1925

From which

- Mesquite, 4 ins. in diam., brs. N. 55° E., 12 lks. dist., marked 1/4 S 26 B T.
- Mesquite, 4 ins. in diam., brs. S. 68° W., 45 lks. dist., marked B T.

54.90 Wash, 20 lks. wide, course N.

72.00 Road, brs. NW. and SE.

79.64 The cor. of secs. 26, 27, 34 and 35.

Land; level.

Soil; sandy and gravelly, 2nd rate.

Timber; mesquite.

Undergrowth; greasewood.

N. 0° 1' W., bet. secs. 26 and 27.

Over level land, thru scattering timber and dense undergrowth.

8.20 Road, bears NW. and SE.

39.40 Wash, 15 lks. wide, course N. 20° E.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor. with brass cap marked

1/4 S 27 | S 26  
1925

Survey of part of the Subdivision Lines of  
Township 14 South, Range 7 East.

Chains From which  
Mesquite, 10 ins. in diam., brs. N. 79° E., 130 lks.  
dist., marked  $\frac{1}{4}$  S 26 B T.  
Mesquite, 8 ins. in diam., brs. N. 3° W., 11 lks.  
dist., marked  $\frac{1}{4}$  S 27 B T.  
44.20 Wash, 20 lks. wide, course NW.  
78.20 Wash, 20 lks. wide, course N. 10° W.  
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins.  
in the ground for cor. of secs. 22, 23, 26 and 27,  
with brass cap marked

T 14 S	R 7 E
S 22	S 23
S 27	S 26

1925

From which  
Mesquite, 6 ins. in diam., brs. N. 56° E., 15 lks.  
dist., marked T 14 S R 7 E S 23 B T.  
Mesquite, 6 ins. in diam., brs. S. 79 $\frac{1}{2}$ ° E., 100 lks.  
dist., marked T 14 S R 7 E S 26 B T.  
Mesquite, 4 ins. in diam., brs. S. 71 $\frac{1}{2}$ ° W., 56 lks.  
dist., marked T 14 S R 7 E S 27 B T.  
Mesquite, 6 ins. in diam., brs. N. 72° W., 73 lks.  
dist., marked T 14 S R 7 E S 22 B T.

Land; level.  
Soil; sandy and gravelly, 2nd rate.  
Timber; mesquite.  
Undergrowth; catclaw, and greasewood.

East, on a random line, bet. secs. 23 and 26.  
40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
79.72 Fall 7 lks. N. of cor. of secs. 23, 24, 25 and 26.  
Thence  
N. 89° 57' W., on a true line, bet. secs. 23 and 26.  
Over level land, thru scattering timber and dense under-  
growth.  
6.72 Wash, 20 lks. wide, course N. 20° W.  
15.42 Drain, course NE.  
39.86 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
the ground for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$ S 23
S 26

1925

From which  
Mesquite, 5 ins. in diam., brs. N. 4° E., 66 lks.  
dist., marked  $\frac{1}{4}$  S 23 B T.  
Mesquite, 5 ins. in diam., brs. S. 48 $\frac{1}{2}$ ° E., 61 lks.  
dist., marked  $\frac{1}{4}$  S 26 B T.

44.72 Drain, course N.  
53.72 Wash, 20 lks. wide, course N.  
56.92 Drain, course N.  
77.62 Wash, 10 lks. wide, course N.  
79.72 The cor. of secs. 22, 23, 26 and 27.

Land; level.  
Soil; sandy and gravelly, 2nd rate.  
Timber; mesquite.  
Undergrowth; greasewood and catclaw.

N. 0° 1' W., bet. secs. 22 and 23.  
Over level land, thru scattering timber and undergrowth.  
10.10 Wash, 20 lks. wide, course N. 5° E.  
12.30 Same wash, course N. 30° W.

Survey of part of the Subdivision Lines of  
Township 14 South, Range 7 East.

Chains

.32.50 Road, brs. E. and W.  
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$   
 $\begin{array}{c} \text{S } 22 \quad | \quad \text{S } 23 \\ \hline 1925 \end{array}$

From which

Mesquite, 4 ins. in diam., brs. N. 2° W., 4 lks.  
dist., marked  $\frac{1}{4}$  S 22 B T.  
Mesquite, 5 ins. in diam., brs. N. 22° E., 105 lks.  
dist., marked  $\frac{1}{4}$  S 23 B T.  
78.00 Wash, 20 lks. wide, course N. 20° E.  
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground for cor. of secs. 14, 15, 22 and 23, with brass cap marked

$\begin{array}{c} \text{T } 14 \text{ S } \quad | \quad \text{R } 7 \text{ E} \\ \hline \text{S } 15 \quad | \quad \text{S } 14 \\ \hline \text{S } 22 \quad | \quad \text{S } 23 \\ \hline 1925 \end{array}$

From which

Mesquite, 4 ins. in diam., brs. N. 31 $\frac{1}{2}$ ° E., 56 lks.  
dist., marked B T.  
Mesquite, 8 ins. in diam., brs. S. 71 $\frac{1}{2}$ ° E., 126 lks.  
dist., marked T 14 S R 7 E S 23 B T.  
Mesquite, 4 ins. in diam., brs. S. 44 $\frac{1}{2}$ ° W., 80 lks.  
dist., marked B T.  
Mesquite, 4 ins. in diam., brs. N. 84° W., 69 lks.  
dist., marked B T.

Land; level.

Soil; sandy and gravelly, 2nd rate.

Timber; mesquite.

Undergrowth; greasewood and catclaw.

40.00 East, on a random line, bet. secs. 14 and 23.  
Set temp.  $\frac{1}{4}$  sec. cor.  
79.72 Fall 5 lks. S. of cor. of secs. 13, 14, 23 and 24.  
Thence  
S. 89° 58' W., on a true line, bet. secs. 14 and 23.  
Over level land, thru scattering timber and dense undergrowth.

21.02 Wash, 20 lks. wide, course N.  
27.02 Wash, 20 lks. wide, course N.  
30.92 Wash, 30 lks. wide, course N.  
37.22 Wash, 30 lks. wide, course N. 20° W.  
39.72 Drain, course N.  
39.86 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$   $\begin{array}{c} \text{S } 14 \\ \hline \text{S } 23 \\ \hline 1925 \end{array}$

From which

Mesquite, 8 ins. in diam., brs. N. 12° E., 83 lks.  
dist., marked  $\frac{1}{4}$  S 14 B T.  
Mesquite, 5 ins. in diam., brs. S. 27° E., 112 lks.  
dist., marked  $\frac{1}{4}$  S 23 B T.  
59.22 Wash, 15 lks. wide, course N.  
78.82 Wash, 20 lks. wide, course N. 20° W.  
79.72 The cor. of secs. 14, 15, 22 and 23.


Survey of part of the Subdivision Lines of Township 14 South, Range 7 East.

Chains

Land; level  
Soil; sandy and gravelly, 2nd rate.  
Timber; mesquite.  
Undergrowth; greasewood and catclaw.


N. 0° 1' W., bet. secs. 14 and 15.  
Over level land, thru scattering timber and dense undergrowth.

- .80 Wash, 20 lks. wide, course NW.
- 39.30 Wash, 15 lks. wide, course NW.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor., with brass cap marked



From which  
 Mesquite, 6 ins. in diam., brs. N. 49 1/2° W., 85 lks. dist., marked 1/4 S 15 B T.  
 Mesquite, 8 ins. in diam., brs. N. 4° E., 201 lks. dist., marked 1/4 S 14 B T.

- 43.00 Enter dense mesquite thicket.
- 65.00 Leave dense mesquite thicket.
- 75.00 Wash, 20 lks. wide, course N. 10° E.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 10, 11, 14 and 15, with brass cap marked



From which  
 Mesquite, 4 ins. in diam., brs. N. 88 1/2° E., 114 lks. dist., marked B T.  
 Mesquite, 5 ins. in diam., brs. S. 69° E., 69 lks. dist., marked T 14 S R 7 E S 14 B T.  
 Mesquite, 5 ins. in diam., brs. S. 86 1/2° W., 222 lks. dist., marked T 14 S R 7 E S 15 B T.  
 Mesquite, 6 ins. in diam., brs. N. 16 1/2° W., 67 lks. dist., marked T 14 S R 7 E S 11 B T.

Land; level.  
Soil; sandy and gravelly, 2nd rate.  
Timber; mesquite.  
Undergrowth; greasewood, scrub mesquite and catclaw.

- 40.00 East, on a random line, bet. secs. 11 and 14. Set temp. 1/4 sec. cor.
- 79.58 Fall 3 lks. S. of cor. of secs. 11, 12, 13 and 14. Thence S. 89° 59' W., on a true line, bet. secs. 11 and 14. Over level land, thru scattering timber and dense undergrowth.
- 4.58 Wash, 50 lks. wide, course N.
- 15.58 Wash, 10 lks. wide, course N.
- 27.98 Wash, 10 lks. wide, course N.
- 39.79 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor., with brass cap marked

Survey of part of the Subdivision Lines of Township 14 South, Range 7 East.

Chains

1/4 S 11  
S 14  
1925

From which

Mesquite, 6 ins. in diam., brs. N. 9° E., 24 lks. dist., marked 1/4 S 11 B T.

Mesquite, 8 ins. in diam., brs. S. 3 1/2° W., 64 lks. dist., marked 1/4 S 14 B T.

- 79.18 Wash, 20 lks. wide, course N.

79.58 The cor. of secs. 10, 11, 14 and 15.

Land; level.

Soil; sandy and gravelly, 2nd rate.

Timber; mesquite.

Undergrowth; scrub mesquite, greasewood and catclaw.

N. 0° 1' W., on a true line, bet. secs. 10 and 11.

Over level land, thru scattering timber and dense undergrowth.

2.46 Wire fence, brs. E. and W.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor., with brass cap marked

S 10 1/4 S 11  
1925

From which

Mesquite, 5 ins. in diam., brs. S. 67° E., 54 lks. dist., marked 1/4 S 11 B T.

Mesquite, 6 ins. in diam., brs. N. 77° W., 78 lks. dist., marked 1/4 S 10 B T.

54.00 Wash, 20 lks. wide, course NW.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 2, 3, 10 and 11, with brass cap marked

T 14 S R 7 E  
S 3 S 2  
S 10 S 11  
1925

From which

Mesquite, 4 ins. in diam., brs. N. 62 1/2° E., 108 lks. dist., marked B T.

Mesquite, 5 ins. in diam., brs. S. 14 1/2° E., 57 lks. dist., marked T 14 S R 7 E S 11 B T.

Mesquite, 4 ins. in diam., brs. S. 28° W., 106 lks. dist., marked B T.

Mesquite, 6 ins. in diam., brs. N. 52° W., 57 lks. dist., marked T 14 S R 7 E S 3 B T.

Land; level.

Soil; sandy and gravelly, 2nd rate.

Timber; mesquite.

Undergrowth; greasewood and catclaw

East, on a random line, bet. secs. 2 and 11.

40.00 Set temp. 1/4 sec. cor.

79.70 Fall 4 lks. N. of cor. of secs. 1, 2, 11 and 12.

Thence

N. 89° 58' W., on a true line, bet. secs. 2 and 11.

Over level land, thru scattering timber and dense undergrowth.

Survey of part of the Subdivision Lines of  
Township 14 South, Range 7 East.

Chains

- 19.90 Wash, 30 lks. wide, 3 ft. banks, course N.
- 39.85 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$   $\frac{S\ 2}{S\ 11}$   
1925

From which  
Mesquite, 5 ins. in diam., brs. S. 70° W., 149 lks. dist., marked  $\frac{1}{4}$  S 11 B T.  
Mesquite, 5 ins. in diam., brs. N. 41° E., 70 lks. dist., marked  $\frac{1}{4}$  S 2 B T.

- 54.90 Wash, 20 lks. wide, course N.
- 79.70 The cor. of secs. 2, 3, 10 and 11.  
Land; level.  
Soil; sandy and gravelly, 2nd rate.  
Timber; mesquite.  
Undergrowth; scrub mesquite, greasewood and catclaw.

- 40.00 N. 0° 1' W., on a random line, bet. secs. 2 and 3.  
Set temp.  $\frac{1}{4}$  sec. cor.
- 80.18 Intersect cor. of secs. 2, 3, 34 and 35, on the N. bdy. of the T., hereinbefore described.

Thence  
S. 0° 1' E., on a true line, bet. secs. 2 and 3.  
Over level land, thru scattering timber and dense undergrowth

- 40.18 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$   
S 3 | S 2  
1925

From which  
Mesquite, 5 ins. in diam., brs. S. 78° E., 128 lks. dist., marked  $\frac{1}{4}$  S 2 B T.  
Mesquite, 5 ins. in diam., brs. N. 52 $\frac{1}{2}$ ° W., 154 lks. dist., marked  $\frac{1}{4}$  S 3 B T.

- 80.18 Continue over level land, thru scattering timber and dense undergrowth.  
The cor. of secs. 2, 3, 10 and 11.  
Land; level.  
Soil; sandy and gravelly, 2nd rate.  
Timber; mesquite and palo verde.  
Undergrowth; scrub mesquite, catclaw and greasewood.

From temp. cor. of secs. 27, 28, 33 and 34, on Sectional Correction Line.

- 40.00 S. 0° 2' E., on random line, bet. secs. 33 and 34.  
Set temp.  $\frac{1}{4}$  sec. cor.
- 78.90 Fall 40 lks. West of the reestablished cor. of secs. 33 and 34 on the S. bdy. of the T., hereinbefore described.

Thence  
N. 0° 2' W.; on true line, bet. secs. 33 and 34  
Over level land, thru scattering timber and undergrowth.

- 29.20 Wash; 20 lks. wide, course NE.
- 32.80 Wash, 20 lks. wide, course NE.

Survey of part of the Subdivisional Lines of  
Township 14 South, Range 7 East.

Chains

38.90 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec. cor., with brass cap marked

$$\begin{array}{c} \frac{1}{4} \\ \text{S } 33 \quad | \quad \text{S } 34 \\ 1925 \end{array}$$

From which

Mesquite, 5 ins. in diam., brs. N.  $30\frac{1}{2}^{\circ}$  E., 37 lks. dist., marked  $\frac{1}{4}$  S 34 B T.

Mesquite, 5 ins. in diam., brs. N.  $4^{\circ}$  W., 89 lks. dist., marked  $\frac{1}{4}$  S 33 B T.

46.20 Wash, 25 lks. wide, course NE.

52.00 Head of drain, ditch into reservoir. Foot of low hill brs W. about 15.00 chs. dist.

65.00 South end of reservoir brs. west 4.00 chs. Enter gently rolling land. Asc. 29 ft. over S. slope to

72.36 Top of hill, raise md. of stone, 3 ft. base, 2 ft. high on line at this point. Desc. 29 ft. over N. slope to

78.90 Intersect the sectional correction line at a point 40 lks. E. of the temp. cor. of secs. 27, 28, 33 and 34, or 79.96 chs. W. from the cor. of secs. 26, 27, 34 and 35

At point of intersection set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 27, 28, 33 and 34, with brass cap marked

$$\begin{array}{c} \text{T } 14 \text{ S } \text{R } 7 \text{ E} \\ \text{S } 28 \quad | \quad \text{S } 27 \\ \text{S } 33 \quad | \quad \text{S } 34 \\ 1925 \end{array}$$

From which

Mesquite, 8 ins. in diam., brs. N.  $52^{\circ}$  E., 204 lks. dist., marked T 14 S R 7 E S 27 B T.

Mesquite, 4 ins. in diam., brs. N.  $65\frac{1}{2}^{\circ}$  W., 244 lks. dist., marked B T.

No other bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high west of cor.

Land; level and gently rolling.

Soil; sandy and gravelly, 2nd rate.

Timber; mesquite, palo verde and ironwood.

Undergrowth; greasewood and catclaw.

From the cor. of secs. 26, 27, 34 and 35.

West, on a true line, on sectional correction line, bet. secs. 27 and 34.

Over level land, thru scattering timber and undergrowth.

7.70 Wash, 15 lks. wide, course N.

29.30 Wash, 150 lks. wide, course N.

38.00 Wash, 20 lks. wide, course N.  $20^{\circ}$  E.

39.98 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec. cor., with brass cap marked

$$\begin{array}{c} \frac{1}{4} \text{ S } 27 \\ \text{S } 34 \\ 1925 \end{array}$$

From which

Mesquite, 4 ins. in diam., brs. N.  $43^{\circ}$  E., 123 lks. dist., marked B T.

Mesquite, 4 ins. in diam., brs. S.  $15^{\circ}$  W., 88 lks. dist., marked B T.



Survey of part of the Subdivision Lines of  
Township 14 South, Range 7 East.

Chains

- 43.10 Wash, 20 lks. wide, course N.  
79.96 The cor. of secs. 27, 28, 33 and 34.  
Land; level.  
Soil; sandy and gravelly, 2nd rate.  
Timber; mesquite and palo verde.  
Undergrowth; greasewood.
- 
- 40.00 N. 0° 2' W., bet. secs. 27 and 28.  
Over-level land, thru scattering timber and undergrowth.  
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins.  
in the ground for  $\frac{1}{4}$  sec. cor., with brass cap marked
- $\frac{1}{4}$   
S 28 | S 27  
1925
- From which  
Mesquite, 5 ins. in diam., brs. N. 42 $\frac{1}{2}$ ° E., 31 lks.  
dist., marked  $\frac{1}{4}$  S 27 B T.  
Mesquite, 6 ins. in diam., brs. N. 81° W., 29 lks.  
dist., marked  $\frac{1}{4}$  S 28 B T.
- 62.80 Road, brs. NE. and SW.  
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins.  
in the ground for cor. of secs. 21, 22, 27 and 28,  
with brass cap marked
- T 14 S R 7 E  
S 21 | S 22  
S 28 | S 27  
1925
- From which  
Mesquite, 5 ins. in diam., brs. N. 53 $\frac{1}{2}$ ° E., 174 lks.  
dist., marked T 14 S R 7 E S 22 B T.  
Mesquite, 5 ins. in diam., brs. S. 4° E., 144 lks.  
dist., marked T 14 S R 7 E S 27 B T.  
Mesquite, 6 ins. in diam., brs. S. 11° W., 136 lks.  
dist., marked T 14 S R 7 E S 28 B T.  
Palo verde 12 ins. in diam., brs. N. 20 $\frac{1}{4}$ ° W., 248  
lks. dist., marked T 14 S R 7 E S 21 B T.  
Land; level.  
Soil; sandy and gravelly, 2nd rate.  
Timber; mesquite and palo verde.  
Undergrowth; greasewood.
- 
- 40.00 East, on a random line, bet. secs. 22 and 27.  
Set temp.  $\frac{1}{4}$  sec. cor.  
79.96 Fall 5 lks. N. of cor. of secs. 22, 23, 26 and 27.  
Thence  
N. 89° 58' W., on a true line, bet. secs. 22 and 27.  
Over level land, thru scattering timber and brush.
- 0.66 Wash, 20 lks. wide, course N.  
7.36 Wash, 20 lks. wide, course N.  
39.98 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
the ground for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$  S 22  
S 27  
1925


Survey of part of the Subdivision Lines of  
Township 14 South, Range 7 East.

Chains From which  
 Mesquite, 8 ins. in diam., brs. S. 33° E., 50 lks.  
 dist., marked  $\frac{1}{4}$  S 27 B T.  
 Mesquite, 4 ins. in diam., brs. N. 45 $\frac{1}{2}$ ° W., 61 lks.  
 dist., marked  $\frac{1}{4}$  S 22 B T.  
 Continue over level land, thru scattering timber and  
 undergrowth.  
 79.96 The cor. of secs. 21, 22, 27 and 28.  
 Land; level.  
 Soil; sandy and gravelly, 2nd rate.  
 Timber; mesquite.  
 Undergrowth; greasewood.

N. 0° 2' W., bet. secs. 21 and 22.  
 Over level land, thru scattering timber and undergrowth.  
 3.50 Fence cor. bears W. about 4.00 chs. dist., from which  
 wire fences extend N. and W.  
 6.70 Road, brs. N. 70° E., and S. 70° W.  
 40.00 Set an iron post; 3 ft. long, 1 in. in diam., 26 ins. in  
 the ground for  $\frac{1}{4}$  sec. cor., with brass cap marked



From which  
 Mesquite, 4 ins. in diam., brs. S. 79° E., 12 lks.  
 dist., marked  $\frac{1}{4}$  S 22 B T.  
 Mesquite, 6 ins. in diam., brs. S. 42° W., 217 lks.  
 dist., marked  $\frac{1}{4}$  S 21 B T.  
 Continue over level land, thru scattering timber and  
 undergrowth.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins.  
 in the ground for cor. of secs. 15, 16, 21 and 22,  
 with brass cap marked



From which  
 Mesquite, 5 ins. in diam., brs. S. 12 $\frac{1}{2}$ ° E., 295 lks.  
 dist., marked T 14 S R 7 E S 22 B T.  
 Mesquite, 6 ins. in diam., brs. S. 7 $\frac{1}{2}$ ° W., 427 lks.  
 dist., marked T 14 S R 7 E S 21 B T.  
 Mesquite, 6 ins. in diam., brs. N. 69° W., 117 lks.  
 dist., marked T 14 S R 7 E S 16 B T.  
 No other bearing trees available. Dig pits 18 x 18 x 12  
 ins., one each NE., SE., SW. and NW. of post, 3 ft.  
 dist.  
 Land; level.  
 Soil; sandy and gravelly, 2nd rate.  
 Timber; mesquite.  
 Undergrowth; greasewood.

40.00 East, on a random line, bet. secs. 15 and 22.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.94 Fall 2 lks. S. of cor. of secs. 14, 15, 22 and 23.  
 Thence  
 S. 89° 59' W., on a true line, bet. secs. 15 and 22.  
 Over level land, thru scattering timber and undergrowth.

Survey of part of the Subdivision Lines of  
Township 14 South, Range 7 East.

- Chains  
38.54 Wash, 20 lks. wide, course N.  
39.97 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
the ground for  $\frac{1}{4}$  sec. cor., with brass cap marked
- $\frac{1}{4}$   $\frac{S 15}{S 22}$   
1925
- From which  
Mesquite, 6 ins. in diam., brs. N.  $82\frac{1}{2}^{\circ}$  E., 186 lks.  
dist., marked  $\frac{1}{4}$  S 15 B T.  
Mesquite, 5 ins. in diam., brs. S.  $72^{\circ}$  E., 125 lks.  
dist., marked  $\frac{1}{4}$  S 22 B T.
- 58.98 Drain, course N.  
79.94 The cor. of secs. 15, 16, 21 and 22.  
Land; level.  
Soil; sandy and gravelly, 2nd rate.  
Timber; mesquite.  
Undergrowth; greasewood.
- 
- N.  $0^{\circ}$  2' W., bet. secs. 15 and 16.  
Over level land, thru scattering timber and undergrowth.  
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
the ground for  $\frac{1}{4}$  sec. cor., with brass cap marked
- $\frac{1}{4}$   
S 16 | S 15  
1925
- No bearing trees available. Dig pits 18 x 18 x 12 ins.,  
one each N. and S. of cor., 3 ft. dist.  
Continue over level land, thru scattering timber and  
undergrowth.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins.  
in the ground, for cor. of secs. 9, 10, 15 and 16,  
with brass cap marked
- T 14 S R 7 E  
S 9 | S 10  
S 16 | S 15  
1925
- No bearing trees available. Dig pits 18 x 18 x 12 ins.  
one each NE., SE., SW., and NW. of post, 3 ft. dist.  
Land; level.  
Soil; sandy and gravelly, 2nd rate.  
Timber; mesquite.  
Undergrowth; greasewood.
- 
- East, on a random line, bet. secs. 10 and 15.  
40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
79.94 Fall 2 lks. S. of cor. of secs. 10, 11, 14 and 15.  
Thence  
S.  $89^{\circ}$  59' W., on a true line, bet. secs. 10 and 15.  
Over level land, thru timber and brush.
- 27.94 Wash, 50 lks. wide, course N.  
38.94 Wash, 20 lks. wide, course N.  
39.97 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
the ground for  $\frac{1}{4}$  sec. cor., with brass cap marked

Survey of part of the Subdivision Lines of  
Township 14 South, Range 7 East.

Chains

$$\frac{1}{4} \frac{\$ 10}{\$ 15}$$

1925

From which

Mesquite, 5 ins. in diam., brs. N. 28° E., 23 lks.  
dist., marked  $\frac{1}{4}$  \$ 10 B T.

Mesquite, 5 ins. in diam., brs. S. 71 $\frac{3}{4}$ ° E., 41 lks.  
dist., marked  $\frac{1}{4}$  \$ 15 B T.

Continue over level land, thru scattering timber and  
undergrowth.

79.94 The cor. of secs. 9, 10, 15 and 16.

Land; level.

Soil; sandy and gravelly, 2nd rate.

Timber; mesquite.

Undergrowth; scrub mesquite and greasewood.

N. 0° 2' W., bet. secs. 9 and 10.

Over level land, thru scattering timber and undergrowth.

2.40 Wire fence, brs. E. and W., extends west about 3.00 chs.  
thence south.

4.30 Road, brs. N. 80° E., and S. 60° W.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins.  
in the ground for  $\frac{1}{4}$  sec. cor., with brass cap marked
$$\frac{1}{4} \frac{\$ 9}{\$ 10}$$

1925

From which

Mesquite, 4 ins. in diam., brs. N. 60° E., 16 lks.  
dist., marked  $\frac{1}{4}$  \$ 10 B T.

Mesquite, 5 ins. in diam., brs. N. 6 $\frac{1}{4}$ ° W., 50 lks.  
dist., marked  $\frac{1}{4}$  \$ 9 B T.

Continue over level land, thru scattering timber and  
undergrowth.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins.  
in the ground for cor. of secs. 3, 4, 9 and 10, with  
brass cap marked
$$\begin{array}{c} T 14 S R 7 E \\ \frac{\$ 4}{\$ 9} \mid \frac{\$ 3}{\$ 10} \\ 1925 \end{array}$$

Dig pits 18 x 18 x 12 ins., one each NE., SE., SW., and  
NW. of post, 3 ft. dist.

Land; level.

Soil; sandy and gravelly, 2nd rate.

Timber; mesquite.

Undergrowth; greasewood and scrub mesquite.

East, on a random line, bet. secs. 3 and 10.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.94 Intersect cor. of secs. 2, 3, 10 and 11.

Thence

West, on a true line, bet. secs. 3 and 10.

Over level land, thru scattering timber and dense under-  
growth.

20.30 Wash, 15 lks. wide, course N.

24.50 Wash, 20 lks. wide, course N.

Survey of part of the Subdivision Lines of Township 14 South, Range 7 East.

Chains

32.00 Leave dense and enter scattering undergrowth, brs. N. and S.

39.97 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor. with brass cap marked

1/4 S 3 / S 10 1925

From which

Mesquite, 5 ins. in diam., brs. N. 79° W., 256 lks. dist., marked 1/4 S 3 B T.

Mesquite, 6 ins. in diam., brs. S. 82° W., 259 lks. dist., marked 1/4 S 10 B T.

47.20 Road, brs. N. and S.

79.94 The cor. of secs. 3, 4, 9 and 10.

Land; level.

Soil; 2nd rate.

Timber; mesquite.

Undergrowth; dense mesquite and greasewood brush in the E. half mile.

N. 0° 2' W., on a random line, bet. secs. 3 and 4.

40.00 Set temp. 1/4 sec. cor.

80.16 Fall 6 lks. E. of the cor. of secs. 3, 4, 33 and 34, on the N. bdy. of the T., hereinbefore described.

Thence

S. 0° 5' E., on a true line, bet. secs. 3 and 4.

Over-level land, thru scattering timber and brush.

40.16 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor., with brass cap marked

1/4 S 4 | S 3 1925

From which

Mesquite, 5 ins. in diam., brs. S. 67° W., 48 lks. dist., marked 1/4 S 4 B T.

Mesquite, 8 ins. in diam., brs. N. 5 1/2° E., 72 lks. dist., marked 1/4 S 3 B T.

74.26 Dim road, brs. NE. and SW.

80.16 Cor. of secs. 3, 4, 9 and 10.

Land; level.

Soil; sandy and gravelly, 2nd rate.

Timber; mesquite.

Undergrowth; greasewood.

From the temp. cor. of secs. 28, 29, 32 and 33, on sectional correction line.

S. 0° 2' E., on random line, bet. secs. 32 and 33.

40.00 Set temp. 1/4 sec. cor.

78.58 Fall 40 lks. W. of the reestablished cor. of secs. 32 and 33, on the S. bdy. of the T., hereinbefore described.

Thence

N. 0° 2' W., on a true line, bet. secs. 32 and 33.

Over-level land, thru scattering timber and undergrowth.

35.50 Road, brs. NE. and SW.

38.58 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor., with brass cap marked

Survey of part of the Subdivision Lines of  
Township 14 South, Range 7 East.

Chains

$$\begin{array}{c} \frac{1}{4} \\ \text{S } 32 \text{ } | \text{ } \text{S } 33 \\ 1925 \end{array}$$

From which

Mesquite, 8 ins. in diam., brs. S.  $43^{\circ}$  E., 24 lks.  
dist., marked  $\frac{1}{4}$  S 33 B T.

Mesquite, 6 ins. in diam., brs. N.  $56\frac{1}{2}^{\circ}$  W., 153 lks.  
dist., marked  $\frac{1}{4}$  S 32 B T.

Continue over level land, thru scattering timber and  
undergrowth.

70.10 Drain, course N.  $70^{\circ}$  E.

78.58 Intersect the sectional correction line at a point 40  
lks. E. of the temp. cor. of secs. 28, 29, 32 and 33,  
or 80.00 chs. west of the cor. of secs. 27, 28, 33  
and 34.

At point of intersection set an iron post, 3 ft. long,  
2 ins. in diam., 24 ins. in the ground for cor. of  
secs. 28, 29, 32 and 33, with brass cap marked

$$\begin{array}{c} \text{T } 14 \text{ S } \text{ R } 7 \text{ E} \\ \text{S } 29 \text{ } | \text{ } \text{S } 28 \\ \text{S } 32 \text{ } | \text{ } \text{S } 33 \\ 1925 \end{array}$$

From which

Mesquite, 8 ins. in diam., brs. S.  $1\frac{1}{2}^{\circ}$  E., 350 lks.  
dist., marked T 14 S R 7 E S 33 B T.

Mesquite, 8 ins. in diam., brs. S.  $2\frac{1}{2}^{\circ}$  W., 429 lks.  
dist., marked T 14 S R 7 E S 32 B T.

No other bearing trees available. Dig pits 18 x 18 x 12  
ins., one each NE., SE., SW. and NW. of post 3 ft.  
dist.

Land; level.

Soil; 2nd rate.

Timber; scattering mesquite.

Undergrowth; greasewood.

From the cor. of secs. 27, 28, 33 and 34.

West, on a true line, on sectional correction line, bet.  
secs. 28 and 33.

Over level land, thru scattering timber and undergrowth.

4.50 N. edge of reservoir.

9.60 Wire fence, brs. N. and S.

18.40 Wire fence, brs. N. and S.

18.80 Road, brs. N. and S.

21.10 Road, brs. N.  $20^{\circ}$  E., and S.  $20^{\circ}$  W.

40.00 Set an iron post; 3 ft. long, 1-in. in diam., 26 ins. in  
the ground for  $\frac{1}{4}$  sec. cor. with brass cap marked

$$\begin{array}{c} \frac{1}{4} \text{ S } 28 \\ \text{S } 33 \\ 1925 \end{array}$$

From which

Mesquite, 10 ins. in diam., brs. N.  $82^{\circ}$  E., 110 lks.  
dist., marked  $\frac{1}{4}$  S 28 B T.

Mesquite, 8 ins. in diam., brs. S.  $61\frac{1}{2}^{\circ}$  E., 120 lks.  
dist., marked  $\frac{1}{4}$  S 33 B T.

Continue over level land, thru scattering timber and  
undergrowth.

80.00 The cor. of secs. 28, 29, 32 and 33.

Land; level.

Soil; sandy and gravelly, 2nd rate.

Timber; mesquite and palo verde.

Undergrowth; greasewood.

Survey of part of the Subdivision Lines of  
Township 14 South, Range 7 East.

Chains From temp. cor. of secs. 29, 30, 31 and 32, on sectional correction line.  
S.  $0^{\circ} 3'$  E., on random line bet. secs. 31 and 32.  
40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
78.02 Fall 34 lks. W. of the reestablished cor. of secs. 31 and 32, on the S. bdy. of the T., hereinbefore described  
Thence  
N.  $0^{\circ} 3'$  W., on a true line, bet. secs. 31 and 32.  
Over level land, thru scattering timber and undergrowth.  
2.00 Foot of ridge, brs. N.  $5^{\circ}$  E., and S.  $5^{\circ}$  W. Enter rolling land. Asc. 87 ft. over E. slope to  
38.02 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post and raise a mound of stone around post, for  $\frac{1}{4}$  sec. cor. with brass cap marked

S 31  $\frac{1}{4}$  S 32  
1925

No bearing trees available. Ascend 28 ft. over SE. slope.  
43.50 Ridge, brs. NE. and S.  $20^{\circ}$  W. Descend 50 ft. over W. and NW. slopes to  
60.00 Foot of ridge, brs. NE. and S.  $20^{\circ}$  W. Enter level land.  
78.02 Intersect the sectional correction line at a point 34 lks. E. of the temp. cor. of secs. 29, 30, 31 and 32 or 80.06 chs. west of the cor. of secs. 28, 29, 32 and 33.  
At point of intersection set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 29, 30, 31 and 32, with brass cap marked

T 14 S R 7 E  
S 30 | S 29  
S 31 | S 32  
1925

From which

Mesquite, 6 ins. in diam., brs. N.  $43\frac{1}{2}^{\circ}$  E., 89 lks. dist., marked T 14 S R 7 E S 29 B T.  
Ironwood, 12 ins. in diam., brs. S.  $16\frac{1}{2}^{\circ}$  E., 192 lks. dist., marked T 14 S R 7 E S 32 B T.  
Mesquite, 8 ins. in diam., brs. S.  $16\frac{1}{2}^{\circ}$  W., 211 lks. dist., marked T 14 S R 7 E S 31 B T.  
Mesquite, 5 ins. in diam., brs. N.  $50^{\circ}$  W., 76 lks. dist., marked T 14 S R 7 E S 30 B T.  
Land; rolling and level.  
Soil; sandy and rocky, 2nd and 4th rate.  
Timber; palo verde and mesquite.  
Undergrowth; greasewood.

From the cor. of secs. 28, 29, 32 and 33.  
West, on a true line on sectional correction line, bet. secs. 29 and 32.  
Over level land, thru scattering timber and undergrowth.  
13.00 Reservoir, brs. South, about 15.00 chs. dist.  
18.60 Draw, course N.  
21.10 Road, brs. N. and S.  
29.70 Road, brs. NW. and SE.  
40.03 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec. cor. with brass cap marked

Survey of part of the subdivision lines of  
Township 14 South, Range 7 East.

Chains

$$\frac{1}{4} \frac{S 29}{S 32}$$

1925

From which

Mesquite, 10 ins. in diam., brs. S. 24° W., 97 lks.  
dist., marked  $\frac{1}{4}$  S 32 B T.

Mesquite, 8 ins. in diam., brs. N. 40° W., 307 lks.  
dist., marked  $\frac{1}{4}$  S 29 B T.

Continue over level land, thru scattering timber and  
undergrowth.

- 59.90 Enter rolling land. Ascend 55 ft. over E. slope.  
63.20 NE. end of ridge, bearing NE. and SW. Raise a mound of  
stone, 4 ft. base, 3 ft. high on line, at this point.  
Desc. 57 ft. over NW. slope to  
68.90 Foot of ridge, brs. NE. and SW. Enter level land.  
80.06 The cor. of secs. 29, 30, 31 and 32.  
Land; level and rolling.  
Soil; sandy and rocky, 2nd and 4th rate.  
Timber; palo verde and mesquite.  
Undergrowth; greasewood.

From the cor. of secs. 29, 30, 31 and 32.  
West, on a true line, on sectional correction line, bet.  
secs. 30 and 31.

Over level land, thru scattering timber and dense under-  
growth.

- 28.60 Road, brs. N. and S.  
30.00 Wash, 180 lks. wide, course N. 20° E.  
40.00 Set an iron post, 3 ft. long, 1 ins. in diam., 26 ins.  
in the ground for  $\frac{1}{4}$  sec. cor., with brass cap marked

$$\frac{1}{4} \frac{S 30}{S 31}$$

1925

From which

Palo verde, 6 ins. in diam., brs. N. 64 $\frac{1}{2}$ ° W., 133  
lks. dist., marked  $\frac{1}{4}$  S 30 B T.

Mesquite, 5 ins. in diam., brs. S. 77° W., 111 lks.  
dist., marked  $\frac{1}{4}$  S 31 B T.

- 42.00 West branch of same wash, 200 lks. wide, course N.  
68.30 Road, brs. N. and S.  
84.02 Intersect the W. bdy. of the T., at a point 77.51 chs.  
north from the cor. of Ts. 14 and 15 S., Rs. 6 and 7  
E. Cor. of secs. 30 and 31, T. 14 S., R. 6 E., es-  
tablished at this point of intersection as herein-  
before described in notes of survey of W. bdy. of  
said township.

Land; level.

Soil; 2nd rate.

Timber; mesquite, palo verde and ironwood.

Undergrowth; greasewood and catclaw.

The continued satisfactory adjustment of the solar appa-  
ratus of the instrument used in the execution of the  
resurveys and surveys described in the foregoing  
notes is indicated from field tests described in books  
"G" and "I" of this group.



Boundaries of  
Township 14 South, Range 7 East.

Latitudes, departures and closing errors.

Line designated	True course	Dist- ance	Latitudes		Departures	
			N.	S.	E.	W.
South Boundary	S.89°52'W.	80.36		.19		80.36
	N.89°30'W.	40.38	.35			40.38
	N.89°52'W.	40.13	.09			40.13
	N.89°36'W.	40.26	.28			40.26
	N.89°27'W.	40.16	.38			40.16
	N.89°52'W.	40.24	.09			40.24
	N.89°45'W.	40.34	.17			40.34
	N.89°39'W.	40.16	.25			40.16
	N.89°38'W.	40.44	.26			40.44
	N.88°56'W.	40.88	.76			40.88
	S.89°47'W.	40.83		.15		40.83
West Boundary	North	477.70	477.70			
North Boundary	East	484.00			484.00	
East Boundary	South	480.00		480.00		
Convergency					.45	
Totals			480.33	480.34	484.45	484.18
				480.33	484.18	
Error in latitude				.01		
Error in departure					.27	

GENERAL DESCRIPTION.

The surface is level, except for a ridge in secs. 31 and 32, and two small hills in secs. 33 and 34. The east two ranges of sections is overflow lands and covered with undergrowth of scrub mesquite, catclaw and greasewood. A scattering growth of mesquite and palo verde timber is prevalent in all sections. The drainage is north and hard to trace out. The soil is a sandy loam mixed with fine gravel and red clay, 2nd rate, 6 inches to two feet deep. During rainy seasons grasses provide abundant feed for stock. There is no permanent water in the township. There are two reservoirs, one in Sec. 33 and one in Sec. 32, but no water in them at this time. There is a well 700 feet deep in Sec. 6, T. 15 S., R. 8 E., where the stock gets water. Tucson, the nearest postoffice is about 45 miles distant. The Tucson and Ajo highway is about 10 miles south of this township. There are no settlers and no indications of valuable mineral deposits. A wire fence extends thru the township, entering the township on the W. bdy. of sec. 19, near the cor. of secs. 19 and 30, extending E. 3 miles, thence North 2 miles, thence east 3 miles, leaving the township on the E. bdy. of sec. 12, near the cor. of secs. 7, 12, 13 and 18. Several roads, traverse the township in various directions.



CERTIFICATE OF UNITED STATES CADASTRAL ENGINEER.

I, William H. Thorn, U.S. Cadastral Engineer, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 100, Arizona, bearing date of the 25th day of September, 1919, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, re-surveyed all those parts or portions of the South boundary; and surveyed all those parts or portions of the East, West and North boundaries, and the Subdivision lines of

TOWNSHIP 14 SOUTH, RANGE 7 EAST,

of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes, and by diagram on page 1 hereof as having been executed by me, and under my direction; and that all the corners of said resurvey and survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group No. 100, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such resurvey and survey.

Place: Phoenix Ariz
Date: Oct. 16 1925

William H Thorn
U. S. Cadastral Engineer.

APPROVAL.

OFFICE OF THE UNITED STATES SUPERVISOR OF SURVEYS,

Denver, Colorado, November 25, 1925.

The foregoing field notes of the resurvey of the South boundary; and of the survey of the East, West and North boundaries, and Part of the Subdivision lines of

TOWNSHIP 14 SOUTH, RANGE 7 EAST,

of the Gila and Salt River Base and Meridian, in the State of Arizona,

executed by William H. Thorn, U.S. Cadastral Engineer,

under his special instructions dated September 25, 1919, for Group 100, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the resurveys and surveys they describe, are hereby approved.

U. S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above described surveys in has been correctly copied from the original notes on file in this office.