

3680

Book "A"

4-679

BOOK 3680

# FIELD NOTES

OF THE SURVEY OF THE

South Boundary

East Boundary

North Boundary

and

Subdivision Lines

of

Township 35 North, Range 7 West

of the Gila and Salt River Base and Meridian,

In the State of Arizona

EXECUTED BY

William E. Hiester, U.S. Surveyor

and

Charles E. Hunter, U.S. Transitman

In the capacity of U. S. Surveyors, under Special Instructions dated April 23, 1923, issued by the United States Surveyor General to govern surveys included in Group No. 122 Arizona, which were approved by the Commissioner of the General Land Office, May 17, 1923, and Assignment Instructions dated Nov. 15, 1923

Survey commenced November 25, 1923

Survey completed December 15, 1923

3680

3680

ORIG

121

1A

Book "A"

Group 122 - Arizona.

BOOK 3680

INDEX DIAGRAM.

Township		13		14		14		15		16		16		17	
6	57	5	47	4	40	3	32	2	24	1	12				
57		56		47	46	40	39	31		24	23				
7	55	8	46	9	39	10	31	11	23	18	11				
54	55	54	45	45	38	38	30	30		22					
18	53	17	44	16	37	15	29	14	22	18	10				
53		52		T. 35 N., R. 7 W.		37	36	29	28	21		21			
19	51	20	43	21	36	22	28	28	20	24	9				
51		50		43	42	35	27	27		20					
30	50	29	42	28	34	27	26	26	19	25	8				
49	49	49	48	41		34	33	26	25	19	18				
31	48	32	41	33	33	34	25	35	18	36	8				
47		40		32		24									
3	3	3	4	4		5		6		7					

- Lines surveyed under this group
- Accepted surveys.
- - - - - Unsurveyed.
- //// Areas surveyed as per accepted plats on file.

BOOK 3680

DATE DIAGRAM

T.35N.,R.7 W.

BOOK 3680

Accepted survey (1917)

	12-5-23	12-5-23	12-4-23	12-4-23	12-4-23	12-4-23
	6	5	4	3	2	1
	12-11-23	12-5-23	12-11-23	12-12-23	12-13-23	12-13-23
	7	8	9	10	11	12
	12-11-23	12-11-23	12-10-23	12-8-23	12-13-23	12-12-23
	18	17	16	15	14	13
	12-1-23	12-1-23	12-8-23	12-8-23	12-7-23	12-12-23
	19	20	21	22	23	24
	11-28-23	12-1-23	12-5-23	12-8-23	12-7-23	12-6-23
	30	29	28	27	26	25
	11-27-23	11-28-23	11-27-23	11-30-23	12-6-23	12-4-23
	31	32	33	34	35	36
	11-27-23	11-27-23	11-27-23	11-28-23	11-28-23	11-30-23

Lines in red surveyed by William E. Hiester, U.S. Surveyor  
 Lines in green surveyed by Charles E. Hunter, U.S. Transitman.

The surveys hereinafter described, executed by William E. Hiester, U.S. Surveyor and Charles E. Hunter, U.S. Transitman, on dates shown on diagram on page 1 hereof, using respectively, Buff "Rocky Mountain Favorite" solar transit No. 9977 and Young and Sons light mountain transit No. 8292. Each transit is equipped with full vertical circle and improved Smith solar attachment. Unless otherwise specified, all azimuth determinations are accomplished with the solar attachment. The instruments were examined, tested on the true meridian at the Federal Building at Phoenix Arizona, found correct and were approved by the Assistant Supervisor of Surveys for Arizona and California November 15, 1923, conditional upon satisfactory field tests.

We examine the adjustments of the transits and correct all errors; then to test the solar apparatus, by comparing its indications, resulting from solar observations, made during a.m., and p.m. hours with a meridian established by observations on Polaris, we proceed with each instrument as follows;

November 25, 1923: At camp in the NW  $\frac{1}{4}$  of sec. 33, T35N., R7W. Gila and Salt River Base and Meridian Arizona, in latitude  $36^{\circ}23'2''$  N.; longitude  $113^{\circ}03'46''$  W., At  $6^{\text{h}}3^{\text{m}}$  p.m., by my watch which is  $31^{\text{m}}$  fast of l.m.t. observe Polaris east of the meridian, making four observations, two each with telescope in direct and reversed positions, and mark the mean point in the line thus determined on a peg driven firmly in the ground 5 chs. N.

Watch time of observation, mean of four readings  $6^{\text{h}}04^{\text{m}}$  p.m.

Nov. 26, 1923: At  $8^{\text{h}}30^{\text{m}}$  a.m. lay off the azimuth of Polaris  $1^{\circ}10'$  to the west and mark the meridian thus determined by a tack driven in a stake set firmly in the ground 5 chs. N.

At the same station at  $9^{\text{h}}00^{\text{m}}$  a.m. app. time, set off  $36^{\circ}23'2''$  N. on the lat. arc,  $20^{\circ}48'$  S. on the decl. arc and determine a meridian with the solar which agrees with the true meridian, established by the Polaris observations.

At apparent noon with the latitude unchanged; observe the sun on the meridian; the resulting reading of the decl. arc is  $20^{\circ}51'$  S. which agrees with the computed declination of the sun

At  $3^{\text{h}}00^{\text{m}}$  p.m. app. time with the lat. arc unchanged, set off  $20^{\circ}51'$  S. on the decl. arc and determine a meridian with the solar which agrees with the true meridian

Since all of the solar observations made during the usual hours of solar work come within  $1'30''$  of the true meridian we conclude that the adjustments of the transits are satisfactory.

Unless otherwise specified, all measurements are made with Lufkin steel tapes, 5 chs. in length, compared with a Chesterman standard steel tape, and found correct. The measurements are made on the slope, the vertical angles determined and the slope measurements properly reduced to true horizontal distances.

Survey of the South bdy. of Township 35 North., Range 7 West

Chains


From the cor. of Tps. 34 and 35 N., Rs. 7 and 8 W., which is an iron post 3 ins. in diam. projecting 12 ins. above ground, properly marked on brass cap, and witnessed by four bearing trees, one in each sec. NE., SE., SW., and NW. of cor.

East bet. secs. 6 and 31.  
 Descend 86 ft. over E. slope thorough scattering timber and undergrowth.

25.00 Ravine course NE.  
 Asc. 23 ft. over W. slope.

38.30 Top of small cliff bears N. and S.; desc. 284 ft. over steep E. slope.

38.94 Set an iron post 3 ft. long, 1 in. in diam. 30 ins. in the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap



1923

from which

A pinion 6 ins. in diam. bears N54°E. 14 lks. dist., marked  $\frac{1}{4}$  S31 BT

A pinion 6 ins. in diam. bears S16 $\frac{3}{4}$ °W. 52 lks. dist., marked  $\frac{1}{4}$  S 6 BT.


48.50 Leave heavy timber bears N. and S.; enter scattering timber and dense sage brush undergrowth.

58.50 Foot of descent; asc. over W. slope. 87 ft.

65.00 Slope changes from W. to NW.

72.50 Top of spur slopes N.NE.; desc. 75 ft. over E. SE. slope.

78.94 Set an iron post 3 ft. long, 2 ins. in diam. 28 ins. in the ground for cor. of secs. 5, 6, 31, and 32, marked on brass cap



T34N  
1923

from which

A cedar 16 ins. in diam. bears S75 $\frac{1}{4}$ °E. 20 lks. dist., marked T34N., R7W., S 5 BT.

A cedar 14 ins. in diam. bears S21°W. 91 lks. dist., marked T34N., R7W., S 6 BT.

A cedar 4 ins. in diam. bears N15°W. 55 lks. dist., marked T35N., R7W., S31 BT.; No other trees suitable for bearing trees within limits.

Raise a mound of stone 2 ft. base, 1 $\frac{1}{2}$  ft. high W. of cor.  
 Land rolling.  
 Soil sandy and stony 2 nd. and 3 rd. rate.  
 Timber cedar and pinion.  
 Undergrowth sage brush.

East bet. secs. 5 and 32.  
 Over rolling sandy land, through scattering timber and sagebrush undergrowth.

11.00 Dry sand wash 5 lks. wide, course N.NE.

11.90 The Nixon-Hurricane road bears NE. and SW.

16.70 Dry wash 6 lks. wide, course N.

40.00 The point for the  $\frac{1}{4}$  sec. cor. falls in the bottom of sand wash 20 lks. wide, course E.NE. therefore at

Chains

38.80

Set an iron post 3 ft. long, 1 in. in diam. 30 ins. in the ground for witness cor. to the  $\frac{1}{4}$  sec. cor., marked on brass cap

$$\frac{1}{4} \frac{S \ 32}{S \ 5} \text{ WC}$$

1923

from which

A cedar 4 ins. in diam. bears  $N4\frac{1}{2}^{\circ}E.85$  lks. dist., marked WC  $\frac{1}{4} S 32$  BT.

A cedar 6 ins. in diam. bears  $S28^{\circ}E.77$  lks. dist., marked WC  $\frac{1}{4} S 5$  BT.

47.40

Dry sand wash 5 lks. wide, course N.

79.00

Desc. 23 ft. over E. slope.

80.00

Set an iron post 3 ft. long, 2 ins. in diam. 28 ins. in the ground for cor. of secs. 4, 5, 32, and 33, marked on brass cap

$$\begin{array}{c|c} T35N \ R7W & \\ \hline S32 & S33 \\ \hline S5 & S4 \end{array}$$

T34N

1923

from which

A cedar 12 ins. in diam. bears  $N53\frac{1}{2}^{\circ}E.106$  lks. dist., marked T35N., R7W., S33 BT.

A cedar 10 ins. in diam. bears  $S66^{\circ}E.141$  lks. dist., marked T34N., R7W., S4 BT.

A cedar 10 ins. in diam. bears  $S9\frac{1}{2}^{\circ}W.257$  lks. dist., marked T34N., R7W., S5 BT.

A cedar 6 ins. in diam. bears  $N6\frac{1}{2}^{\circ}W.134$  lks. dist., marked T35N., R7W., S32 BT.

Land rolling.

Soil sandy and stony 4 th. rate.

Timber cedar and pinion.

Undergrowth, sage and juniper brush.

East bet. secs. 4 and 33.

Descend 45 ft. over E. slope over rolling land, through scattering timber and dense undergrowth.

9.15

Dry sand wash 30 lks. wide, course S. SE.

19.80

Dry sand wash 5 lks. wide, course S.

40.00

Set an iron post 3 ft. long, 1 in. in diam. 30 ins. in the ground for  $\frac{1}{4}$  sec. cor. marked on brass cap

$$\frac{1}{4} \frac{S \ 33}{S \ 4}$$

1923

No trees within limits

Raise a mound of stone 2 ft. base, 1 $\frac{1}{2}$  ft. high N. of cor.

41.95

Road from Hurricane to Toroweap valley, bears NW. and SE. Ascend 636 ft. over W. slope.

65.50

Dry wash 15 lks. wide, 3 ft. deep, course SW.

80.00

Set an iron post 3 ft. long 2 ins. in diam. 16 ins. in the ground supported in a mound of stone for cor. of secs. 3, 4, 33, and 34., marked on brass cap

Survey of the South bdy. of Township 35 North., Range 7 West.

Chains

T35N	R 7W
S 33	S34
S 4	S 3

T34N  
1923

from which

- A pinion 10 ins. in diam. bears N44 $\frac{1}{2}$ °E. 143 lks. dist., marked T35N., R7W S34 BT.
- A pinion 6 ins. in diam. bears S 0°30'E. 115 lks. dist., marked T34N., R7W., S 3 BT.
- A pinion 10 ins. in diam. bears S22 $\frac{3}{4}$ °W. 227 lks. dist., marked T34N., R7 W., S 4 BT.
- A pinion 16 ins. in diam. bears N 11°W 217 lks. dist., marked T35N., R7W., S33 BT.

Land rolling and mountainous.  
 Soil stony and sandy 4 th. rate.  
 Timber pinoin and cedar.  
 Undergrowth. sage and juniper brush.

East bet. secs. 3 and 34.

- Ascend 250 ft. over W. slope over stony mountainous land through scattering timber and undergrowth
- 3.40 Top of perpendicular cliff 40 ft. high bears N. and S.
- 17.30 Top of ascent on spur bears S.; desc. 46 ft. over E. slope.
- 30.30 Ascend 63 ft. over SW. slope.
- 34.50 Enter heavy timber bears N. and S.
- 38.40 Descend 83 ft. over E. NE. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 30 ins. in the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$ S 34
S 3

1923

from which

- A cedar 12 ins. in diam. bears N29°W. 155 lks. dist., marked  $\frac{1}{4}$  S 34 BT.
- A pinion 12 ins. in diam. bears S8 $\frac{3}{4}$ °W. 155 lks. dist., marked  $\frac{1}{4}$  S 3 BT.
- 50.35 Dry sand wash 14 lks. wide, course SE.; asc. 29 ft. over SW. slope.
- 62.00 Top of spur bears SE.; desc. 34 ft. over NE. slope.
- 65.00 Dry wash 8 lks. wide, course SE.; asc. 29 ft.
- 72.10 Top of ascent on spur slopes S.; desc. 26 ft. over E. slope.
- 77.25 Dry wash 14 lks. wide, course SE.; asc. 20 ft. to
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 30 ins. in the ground for cor of secs. 2, 3, 34, and 35, marked on brass cap

T35N	R 7W
S 34	S35
S 3	S 2

T34N  
1923

from which

## Chains

- A cedar 10 ins. in diam bears  $N41\frac{1}{2}^{\circ}E$ . 67 lks. dist.,  
marked T35N., R7W., S35 BT.
- A cedar 14 ins. in diam. bears  $S84^{\circ}E$ . 131 lks. dist.,  
marked T34N., R7W., S2 BT.
- A cedar 8 ins. in diam. bears  $S19\frac{1}{4}^{\circ}W$ . 56 lks. dist.,  
marked T34N., R7W., S3 BT.
- A pinion 6 ins. in diam. bears  $N59^{\circ}W$ . 109 lks. dist.,  
marked T35N., R7W., S34 BT.

Land rolling mountains.

Soil sandy and stony 3<sup>rd</sup>. and 4<sup>th</sup>. rate.

Timber cedar and pinion.

Undergrowth sage and juniper brush.

East bet. secs. 2 and 35.

Over stony mountainous land, through heavy timber and  
undergrowth.

- 6.00 Dry wash 10 lks. wide, course S. SE.  
Asc. 55 ft. over W. slope.
- 14.50 Top of spur bears SW.; desc. 32 ft. over NE. slope.
- 22.00 Dry ravine 12 lks. wide, course SW.;
- 28.90 Dry wash 8 lks. wide, course S.  
Asc. 46 ft. over W. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 20 ins. in  
the ground to bedrock, supported in a mound of  
stone for  $\frac{1}{4}$  sec. cor. marked on brass cap

$$\frac{1}{4} \frac{S 35}{S 2}$$

1923

from which,

- A pinion 12 ins. in diam. bears  $N41\frac{1}{2}^{\circ}E$ . 27 lks. dist.,  
marked  $\frac{1}{4}$  S35 BT.
- A pinion 8 ins. in diam. bears  $S37^{\circ}W$ . 67 lks. dist.,  
marked  $\frac{1}{4}$  S 2 BT.

50.00 Slope changes from steep to gradual.

52.20 Top of ascent on spur, slopes SE.; desc. 68 ft. over NE. slope

63.39 Dry wash 12 lks. wide, course SE.

66.30 Dry sand wash 7 lks. wide, course S.; asc. 96 ft. over W.  
slope to

80.00 Set an iron post 3 ft. long, 2 ins. in diam. 14 ins. in  
the ground to bedrock, supported in a mound  
of stone for cor. of secs. 1, 2, 35, and 36.,  
marked on brass cap

T35N	R 7W
S 35	S36
S 2	S 1.

T34N

1923

from which,

- A cedar 12 ins. in diam. bears  $N30\frac{1}{2}^{\circ}E$ . 71 lks. dist.,  
marked T35N., R7W., S36 BT.
- A pinion 15 ins. in diam. bears  $S31\frac{1}{2}^{\circ}E$ . 17 lks. dist.,  
marked T34N., R7W., S 1 BT.
- A pinion 10 ins. in diam. bears  $S43\frac{1}{4}^{\circ}W$ . 34 lks. dist.,  
marked T34N., R7W., S2 BT.
- A cedar 10 ins. in diam. bears  $N10\frac{1}{2}^{\circ}W$ . 36 lks. dist.,  
marked T35N., R7W., S 35 BT.



Survey of the South bdy. of Township 35 N., Range 7 West

Chains

Land rolling and mountainous.  
Soil stony 4 th. rate.  
Timber cedar and pinion.  
Undergrowth, sage and juniper brush.

East bet. secs. 1 and 36.  
Over rolling sandy land, through heavy timber and scattering undergrowth.

- 18.80 Dry wash 12 lks. wide, course N.NE.
- 31.00 Leave heavy timber bears N. and S.; enter scattering timber.
- 40.00 Set an iron post 3 ft. long 1 in. in diam. 26 ins. in the ground for  $\frac{1}{4}$  sec. cor. marked on brass cap

S 36  
—  
S 1

1923

from which

- A cedar 8 ins. in diam. bears N82 $\frac{1}{2}$ °E. 147 lks. dist., marked  $\frac{1}{4}$  S36 BT.
- A cedar 6 ins. in diam. bears S72 $\frac{1}{4}$ °E. 135 lks. dist., marked  $\frac{1}{4}$  S 1 BT.
- 50.00 Leave scattering timber, bears N. and S.; enter heavy timber
- 75.50 Dry ravine 25 lks. wide, course S.
- 80.00 Set an iron post 3 ft. long 3 ins. in diam. 28 ins. in the ground for cor. of Tps. 34 and 35 N., Rs. 6 and 7 W., marked on brass cap

T35N  
S36 | S31  
R7W—S 1—S 6—R6W  
T34N  
1923

from which

- A cedar 8 ins. in diam. bears N28°E. 40 lks. dist., marked T35N., R6W S31 BT.
- A pinion 6 ins. in diam. bears S35 $\frac{3}{4}$ °E. 57 lks. dist., marked T34N., R6W., S 6 BT.
- A pinion 8 ins. in diam. bears S7 $\frac{1}{4}$ °W. 30 lks. dist., marked T34N., R7W., S 1 BT.
- A pinion 8 ins. in diam. bears N53 $\frac{1}{2}$ °W. 51 lks. dist., marked T35N., R7W., S 36 BT.
- Land rolling.
- Soil sandy 3 rd. and 4 th. rate.
- Timber cedar and pinion.
- Undergrowth, sage and juniper brush.


Chains

From the cor. of Tps. 34 and 35 N., Rs. 6 and 7 W., herein before described.

North bet. secs. 31 and 36.

Descend N. slope over rolling sandy land, through heavy timber and undergrowth.

40.00 Set an iron post 3 ft. long, 1 in. in diam. 20 ins. in the ground to bedrock supported in a mound of stone for  $\frac{1}{4}$  sec. cor., marked on brass cap



from which


A cedar 10 ins. in diam. bears  $S71\frac{1}{2}^{\circ}E$ . 57 lks. dist., marked  $\frac{1}{4}$  S31 BT.

A cedar 16 ins. in diam. bears  $S72\frac{1}{2}^{\circ}W$ . 7 lks. dist., marked  $\frac{1}{4}$  S36 BT.

45.00 Leave heavy timber bears E. and W.; enter scattering timber.

70.00 Leave scattering timber bears E. and W.; enter heavy timber.

80.00 Set an iron post 3 ft. long, 2 ins. in diam. 12 ins. in the ground to bedrock, supported in a mound of stone for cor. of secs. 25, 30, 31, and 36, marked on brass cap.



from which

A cedar 10 ins. in diam. bears  $N35\frac{1}{2}^{\circ}E$ . 82 lks. dist., marked T35N., R6W., S30 BT.

A cedar 8 ins. in diam. bears  $S68\frac{1}{4}^{\circ}E$ . 35 lks. dist., marked T35N., R6W., S31 BT.

A pinion 8 ins. in diam. bears  $S55\frac{1}{2}^{\circ}W$ . 62 lks. dist., marked T35N., R7W., S36 BT.

A pinion 4 ins. in diam. bears  $N75\frac{1}{4}^{\circ}W$ . 148 lks. dist., marked T35N., R7W., S25 BT.

Land rolling.

Soil sandy and stony 3 rd. and 4 th. rate.

Timber cedar and pinion.

Undergrowth sage, juniper, and dogwood brush.

North bet. secs. 25 and 30.

Over rolling sandy land, through heavy timber and brush undergrowth.

4.40 Dry ravine 10 lks. wide, course E.

10.00 Descend 43 ft. over NE. slope; leave heavy timber E and W

21.50 Old road bears NW. and SE.


29.30 Enter heavy timber bears E. and W.; asc. 54 ft. over S. slope

36.40 Top of spur bears NW.; desc. 45 ft. over NE. slope.

40.00 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for  $\frac{1}{4}$  sec. cor. marked on brass cap


Survey of the East bdy. of Township 35 N., Range 7 West.

Chains



from which


- A pinion 8 ins. in diam. bears N85°W.65 lks. dist., marked 1/4 S25 BT.
- A cedar 8 ins. in diam. bears S72 1/2°E.54 lks. dist., marked 1/4 S30BT.
- 45.90 Dry sand wash 8 lks. wide, course NW.;asc.16 ft. over SW.slope.
- 50.30 Top of ascent,thence over rolling land.
- 63.30 Begin descent 40 ft. over N.slope.
- 69.70 Dry sand wash 8 lks. wide. course W.;asc.57 ft. over S. slope.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam.14 ins.in the ground to bedrock,supported in a mound of stone for cor. of secs.19,24,25,and 30,marked on brass cap.



from which

- A cedar 10 ins. in diam. bears N30 1/2°E.87 lks. dist., marked T35N.,R6W.,S19 BT.
- A cedar 4 ins. in diam. bears S58 1/2°E.41 lks. dist., marked T35N.,R6W.,S30 BT.
- A cedar 24 ins. in diam. bears S31 1/2°W.11 lks. dist., marked T35N.,R7W.,S25 BT.
- A cedar 24 ins. in diam. bears N39 1/4°W. 87 lks. dist., marked T35N.,R7W.,S24 BT.
- Land rolling.
- Soil stony 3 rd. and 4 th. rate.
- Timber cedar and pinion.
- Undergrowth,sage and juniper brush.

- North bet. secs. 19 and 24.
- Descend 52 ft. over NW. slope. over rolling stony land, through heavy timber and undergrowth.
- 5.00 Dry sand wash 6 lks. wide, course W;asc.27 ft. over S. slope.
- 16.80 Top of ascent;desc.34 ft. over N.slope.
- 21.70 Dry ravine 12 lks. wide, course SW.;asc.34 ft. over SE. slope.
- 38.00 Old road bears NE. and SW.
- 40.00 Set an iron post 3 ft. long,1 in. in diam.30 ins. in the ground for 1/4 sec. cor.,marked on brass cap



from which

## 10 Survey of the East bdy. of Township 35 North., Range 7 West.

chains

A pinion 6 ins. in diam. bears N76 $\frac{1}{2}$ °E. 60 lks. dist.,  
marked  $\frac{1}{4}$  S 19 BT.

A pinion 5 ins. in diam. bears S87°W. 150 lks. dist.,  
marked  $\frac{1}{4}$  S24 BT.

80.00

Set an iron post 3 ft. long, 2 ins. in diam. 28 ins. in the  
ground for cor. of secs. 13, 18, 19, and 24.,  
marked on brass cap

T35N		
R7W		R6W
S13		S18
S24		S19

1923

from which,

A pinion 8 ins. in diam. bears N13 $\frac{1}{2}$ °E. 164 lks. dist.;  
marked T35N., R6W., S18 BT.

A pinion 14 ins. in diam. bears S27 $\frac{1}{2}$ °E. 72 lks. dist.,  
marked T35N., R6W., S19 BT.

A pinion 5 ins. in diam. bears S49 $\frac{1}{2}$ °W. 12 lks. dist.,  
marked T35N., R7W., S24 BT.

A cedar 20 ins. in diam. bears N55 $\frac{1}{2}$ °W. 140 lks. dist.,  
marked T35N., R7W., S13 BT.

Land rolling.

Soil sandy and stony 3 rd. and 4 th. rate.

Timber, cedar and pinion

Undergrowth, sage brush and juniper.

North bet. secs. 13 and 18:

Over rolling sandy and stony land, through heavy timber  
and undergrowth.

5.00 Leave heavy timber bears E. and W.; enter scattering  
timber.

17.50 Old road bears NW. and SE.

40.00 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in  
the ground for  $\frac{1}{4}$  sec. cor.; marked on brass cap

$\frac{1}{4}$		
S13		S18

1923

No trees suitable for bearing trees within limits.

Dig pits 18x18x12 ins. N. and S. of post 3 ft. dist.

60.00 Ascend 138 ft. over S. slope. to

80.00 Set an iron post 3 ft. long, 2 ins. in diam. 14 ins. in  
the ground to bedrock supported in a mound  
of stone for cor. of secs. 7, 12, 13, and 18.,  
marked on brass cap

T35N		
R7W		R6W
S12		S7
S13		S18

1923

from which

Survey of the East bdy. of Township 35 North, Range 7 West.

Chains

- A cedar 14 ins. in diam. bears N74°E. 523 lks. dist. marked T35N., R6W., S 7 BT.
- A cedar 18 ins. in diam. bears S69°E., 578 lks. dist., marked T35N., R6W., S18 BT.
- A pinion 8 ins. in diam. bears S30°W. 321 lks. dist., marked T35N., R7W., S13 BT.
- A cedar 12 ins. in diam. bears N46°W. 331 lks. dist., marked T35N., R7W., S12 BT.

Land rolling.

Soil stony and sandy 3 rd. and 4 th. rate.


Timber, cedar and pinion.

Undergrowth, sage and juniper brush.

North bet. secs. 7 and 12.


Ascend 96 ft. over SE. slope, through scattering timber and brush undergrowth

- 7.50 The slope changes from SE. to E.
- 10.00 Top of ascent on E. slope of mountain; desc. 119 ft. over NE. slope.
- 34.70 Dry wash 10 lks. wide, course SE.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap



from which,

- A cedar 10 ins. in diam. bears N25°E. 58 lks. dist., marked  $\frac{1}{4}$  S 7 BT.
- A cedar 12 ins. in diam. bears N82 $\frac{1}{2}$ °W. 110 lks. dist., marked  $\frac{1}{4}$  S 12 BT.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 28 ins. in the ground for cor. of secs. 1, 6, 7, and 12, marked on brass cap.



from which

- A cedar 16 ins. in diam. bears S11°E. 470 lks. dist., marked T35N., R6E., S 7 BT.
- A cedar 12 ins. in diam. bears S34 $\frac{1}{2}$ °W. 245 lks. dist., marked T35N., R7W., S12 BT.

No other trees within limits.

Deposite a lava stone 14x12x6 ins. marked with a cross (x) at base of monument.

Land rolling.

Soil stony 3 rd. and 4 th. rate.

Timber cedar and pinion.

Undergrowth, sage and juniper brush.

Chains


North bet. secs. 1 and 6.

Over rolling stony land, through scattering timber and undergrowth.

37.50  
40.00

Old road bears NE. and SW.

Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap



from which

A pinion 18 ins. in diam. bears N52°W. 44 lks. dist., marked  $\frac{1}{4}$  S 1 BT.

A cedar 14 ins. in diam. bears S82 $\frac{1}{2}$ °E. 100 lks. dist., marked  $\frac{1}{4}$  S 6 BT.

Ascend 52 ft. over S. slope.

46.00

Leave scattering timber; enter heavy timber, bears E. and W.

64.00

Dry sand wash 8 lks. wide, course NE.; asc. 14 ft. over SE. slope.

70.50


Top of small spur slopes E.; desc. 23 ft. over NE. slope.

77.80

Dry sand wash 7 lks. wide, course E.; asc. 20 ft. over S. slope to

80.00

Set an iron post 3 ft. long, 3 ins. in diam. 30 ins. in the ground for cor. of Tps. 35 and 36N., Rs. 6 and 7 W., marked on brass cap



from which

A cedar 18 ins. in diam. bears N45°E. 68 lks. dist., marked T36N., R6W., S31 BT.

A cedar 20 ins. in diam. bears S75°E. 202 lks. dist., marked T35N., R6W., S6 BT.

A cedar 6 ins. in diam. bears S77 $\frac{1}{2}$ °W. 87 lks. dist., marked T35N., R7W., S1 BT.

A cedar 10 ins. in diam. bears N37°W. 109 lks. dist., marked T36N., R7W., S 36 BT.

Land rolling.

Soil stony 3 rd. and 4 th. rate.

Timber cedar and pine.

Undergrowth, sage and juniper brush.

Survey of the North bdy. of Township 35 North, Range 7 West

Chains

From the cor. of Tps. 35 and 36 N., Rs. 6 and 7 W.,  
 hereinbefore described.  
 West on a random line, setting temporary  $\frac{1}{4}$  sec. and sec.  
 cors. alternately, at intervals of 40.00 chs.;  
 and at 478.15 chs. Intersect the cor. of Tps.  
 35 and 36 N., Rs. 7 and 8 W., which is an iron  
 post 3 ins. in diam. projecting 12 ins. above  
 ground, properly marked and witnessed by four  
 bearing trees, one in each sec. NE., SE., SW., and  
 NW. of cor., thence

8.85  
 12.35  
 24.75  
 38.15

East bet. sec. 6 and 31, marking and blazing true line.  
 Over rolling stony land, through scattering timber and  
 undergrowth.  
 Old road bears NE. and SW.  
 Old road bears NW. and SE.  
 Dry sand wash 15 lks. wide, 3 ft. deep, course SE.  
 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in  
 the ground for  $\frac{1}{4}$  sec. cor. marked on brass cap

$\frac{1}{4}$  S 31  
 S 6

1923

from which,  
 A cedar 6 ins. in diam. bears N  $0\frac{3}{4}^{\circ}$ E 141 lks. dist.,  
 marked  $\frac{1}{4}$  S 31 BT.  
 A cedar 4 ins. in diam. bears S  $42\frac{1}{2}^{\circ}$ W. 209 lks. dist.,  
 marked  $\frac{1}{4}$  S 6 BT.

58.95  
 78.15

Dry sand wash 14 lks. wide, course S.  
 Set an iron post 3 ft. long, 2 ins. in diam. 28 ins. in  
 the ground for cor. of secs. 5, 6, 31, and 32,  
 marked on brass cap.

T36N	R7W
S31	S32
S6	S5

T35N  
1923

from which,  
 A cedar 10 ins. in diam. bears N  $9^{\circ}$ E 394 lks. dist.,  
 marked T36N., R7W., S32 BT.  
 A cedar 8 ins. in diam. bears S  $83^{\circ}$ W. 525 lks. dist.,  
 marked T35N., R7W., S 6 BT.  
 A cedar 7 ins. in diam. bears N  $11\frac{1}{4}^{\circ}$ W. 374 lks. dist.,  
 marked T36N., R7W., S31 BT.

No other trees within limits;  
 Paise a mound of stone 2 ft. base, 1 $\frac{1}{2}$  ft. high W. of cor.  
 Land rolling.  
 Soil stony  $\frac{3}{4}$  rd. and  $\frac{4}{4}$  th. rate.  
 Timber cedar and pinion.  
 Undergrowth sage and juniper brush.

13.44  
 40.00

East bet. secs. 5 and 32.  
 Over rolling stony land, through scattering timber and  
 brush undergrowth.  
 Dry sand wash 5 lks. wide, course SE.  
 Set an iron post 3 ft. long, 1 in. in diam. 18 ins. in  
 the ground to bedrock, supported in a mound of  
 stone for  $\frac{1}{4}$  sec. cor., marked on brass cap

14 Survey of the North bdy. of Township 35 North., Range 7 West.

Chains

$\frac{1}{4}$  S 32  
S 5

1923

from which,

A cedar 6 ins. in diam. bears N11°W. 99 lks. dist.,  
marked  $\frac{1}{4}$  S 32 BT.

A cedar 6 ins. in diam. bears S4°W. 41 lks. dist.,  
marked  $\frac{1}{4}$  S 5 BT.

76.75 Road bears NE. and SW.

80.00 Set an iron post 3 ft. long, 2 ins. in diam. 28 ins. in  
the ground for cor. of secs. 4, 5, 32, and 33,  
marked on brass cap.

T36N	R7W
S32	S33
S 5	S 4

T35N  
1923

from which,

A cedar 14 ins. in diam. bears N25°E. 66 lks. dist.,  
marked T36N., R7W., S 33 BT.

A cedar 8 ins. in diam. bears S76°W. 249 lks. dist.,  
marked T35N., R7W., S 5 BT.

A cedar 14 ins. in diam. bears N19 $\frac{1}{2}$ °W. 83 lks. dist.,  
marked T36N., R7W., S 32 BT.

No other trees within limits

Deposit marked stone at base of monument.

Land rolling.

Soil stony 3 rd. and 4 th. rate.

Timber cedar and pinion.

Undergrowth, sage and juniper brush.

East bet. secs. 4 and 33.

Ascend 40 ft. over SW. slope over rolling stony land,  
through scattering timber and undergrowth.

19.65 Top of ascent on low ridge bears S. desc. 42 ft. over E.  
slope

40.00 Set an iron post 3 ft. long, 1 in. in diam. 14 ins. in  
the ground to bedrock, supported in a mound of  
stone for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$  S 33  
S 4

1923

from which

A cedar 20 ins. in diam. bears N65 $\frac{3}{4}$ °W. 189 lks. dist.,  
marked  $\frac{1}{4}$  S33 BT.

A pinion 6 ins. in diam. bears S41 $\frac{3}{4}$ °W. 62 lks. dist.,  
marked  $\frac{1}{4}$  S 4 BT.

45.00 Top of spur bears N. desc. 69 ft. over E. slope.

50.00 Foot of descent, thence over rolling land.

80.00 Set an iron post 3 ft. long, 2 ins. in diam. 20 ins. in the  
ground to bedrock, supported in a mound of  
stone for cor. of secs. 3, 4, 33, and 34, marked  
on brass cap



Survey of the North bdy. of Township 35 North., Range 7 West.

Chains

T36N	R7W
S33	S34
S 4	S 3

T35N  
1923

from which .

- A cedar 22 ins. in diam. bears N63 $\frac{1}{4}$ °E. 365 lks. dist., marked T36N., R7W. S34 BT.
- A cedar 30 ins. in diam. bears S64 $\frac{1}{4}$ °E. 341 lks. dist., marked T35N., R7W., S 3 BT.
- A cedar 20 ins. in diam. bears S88 $\frac{1}{2}$ °W. 233 lks. dist., marked T35N., R7W. S 4 BT.
- A cedar 20 ins. in diam. bears N16 $\frac{1}{2}$ °W. 216 lks. dist., marked T36N., R7W., S 33 BT.

Land rolling.  
Soil stony 3 rd. and 4 th. rate.  
Timber cedar and pinion.  
Undergrowth, sage and juniper brush.

East bet. secs. 3 and 34.

Descend 118 ft. over E. slope over rolling stony land, through scattering timber and undergrowth.

- 34.35 Old road bears N. and S.
- 34.80 Dry sand wash 6 lks. wide, course SE. enter rolling land
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$ S 34
S 3

1923

No trees within limits.

- 64.52 Raise a mound of stone 2 ft. base, 1 $\frac{1}{2}$  ft. high N. of cor.
- Dry sand wash 10 lks. wide, course NW.
- Ascend 160 ft. over W. slope.

- 71.70 Top of bluff bears NW. and SE. thence over rolling land.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 20 ins. in the ground to bedrock, supported in a mound of stone for cor. of secs. 2, 3, 34, and 35., marked on brass cap

T36N	R7W
S34	S35
S 3	S 2

T35N  
1923

No trees within limits.

Raise a mound of stone 2 ft. base, 1 $\frac{1}{2}$  ft. high W. of cor  
Land hilly and rolling.  
Soil stony 3 rd. and 4 th. rate.  
Timber cedar and pinion.  
Undergrowth, sage and juniper brush.

BOOK 3680

16 Survey of the North bdy. of Township 35 North., Range 7 West.

Chains

East bet. secs. 2 and 35  
Over rolling stony land, through scattering timber and brush undergrowth.

14.05 Dry sand wash 10 lks. wide, course S.

34.50 Dry sand wash 12 lks. wide, course SW.

Asc. 130 ft. over NW. slope.

40.00 Set an iron post 3 ft. long, 1 in. in diam. 20 ins. in the ground to bedrock, supported in a mound of stone for 1/4 sec. cor., marked on brass cap

1/4 S 35  
1/4 S 2  
1923

from which,

A pinion 8 ins. in diam. bears N74 1/2° E. 345 lks. dist., marked 1/4 S 35 BT

A pinion 12 ins. in diam. bears S9 1/4° E. 223 lks. dist., marked 1/4 S 2 BT.

41.32 Dry sand wash .5 lks. wide 4 ft. deep, course NW.

51.50 Top of spur bears N.; desc. 91 ft. over E. slope.

65.00 Foot of descent; enter nearly level land bears N. and S.

80.00 Set an iron post 3 ft. long, 2 ins. in diam. 16 ins. in the ground supported in a mound of stone for cor. of secs. 1, 2, 35, and 36., marked on brass cap

T36N | R7W  
S 35 | S 36  
S 2 | S 1

T35N  
1923

from which,

A cedar 10 ins. in diam. bears N23 1/2° E. 387 lks. dist., marked T36N., R7W., S 36 BT

A cedar 8 ins. in diam. bears S28 1/4° E. 124 lks. dist., marked T35N., R7W., S 1 BT.

A cedar 4 ins. in diam. bears S54 1/2° W. 39 lks. dist., marked T35N., R7W., S 2 BT.

A cedar 5 ins. in diam. bears N84 1/2° W. 84 lks. dist., marked T36N., R7W., S 35. BT.

Land rolling and hilly.  
Soil stony 3 rd. and 4 th. rate.  
Timber, cedar and onion.  
Undergrowth, sage and juniper brush.

East bet. secs. 1 and 36  
Descend 199 ft. over E. slope over hilly land, through scattering timber and brush undergrowth

10.00 Enter heavy timber bears N. and S.

24.00 Dry ravine 4 lks. wide, course NE.; reservoir formed in ravine on line.

Ascend 29 ft. over W. slope.

32.00 Top of spur slopes N.; desc. 23 ft. to

40.00 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for 1/4 sec. cor., marked on brass cap

1/4 S 36  
1/4 S 1

1923

Survey of the North boundary of Township 35 North., Range 7 West

Chains

from which,  
 A pinion 16 ins. in diam, bears N  $1\frac{1}{4}^{\circ}$  E. 75 lks. dist.,  
 marked  $\frac{1}{4}$  S 36 BT.  
 A cedar 6 ins. in diam, bears S  $42\frac{1}{4}^{\circ}$  W., 67 lks. dist.,  
 marked  $\frac{1}{4}$  S 1 BT.  
 Ascend 20 ft. over W. slope of spur.  
 45.00 Top of spur slopes N.  
 Desc. 112 ft. over E. slope.  
 59.00 Leave heavy timber bear on N. and S.; enter scattering timber  
 60.10 Wash 10 lks. wide, course SE.; asc. 23 ft. over NW. slope.  
 78.00 Top of spur bears NE.; desc. 31 ft. over SE. slope to  
 80.00 The cor. of Tps. 35 and 36 N., Rs. 6 and 7 W.  
 Land hilly.  
 Soil stony 3 rd. and 4 th. rate.  
 Timber cedar and pinion.  
 Undergrowth, sage and juniper brush.

Boundaries of Township 35 North., Range 7 West.


Latitudes, Departures, and Closing Errors.

Line Designated	True bearing	Dist.	Latitudes		Departures	
			N	S	E	W
South boundary	West	478.94				478.94
West boundary	North	480.00	480.00			
North boundary	East	478.15			478.15	
East boundary	South	480.00		480.00		
Convergency					.53	
Totals			480.00	480.00	478.68	478.94
			480.00			478.68
			0.00			0.26
Error in Latitude						
Error in Departure			0.26			


18 Survey of the Subdivision lines of Township 35 North., Range 7 West.

Chains

N.0°1'W., bet. secs. 35 and 36,  
 from the cor. of secs. 1, 2, 35, and 36 on S. bdy. of Tp.  
 hereinbefore described.  
 Ascend about 39 ft. over SE. slope over rolling stony  
 land, through scattering timber and undergrowth.  
 24.50 Top of low ridge bears E. and W.; descend gradually over  
 NW. slope.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 12 ins. in the  
 ground to bedrock, supported in a mound of stone  
 for  $\frac{1}{4}$  sec. cor., marked on brass cap




from which,  
 A pine 10 ins. in diam. bears N77 $\frac{1}{2}$ °W. 58 lks. dist., marked  
 $\frac{1}{4}$  S 35 BT.  
 A pine 12 ins. in diam. bears S35 $\frac{1}{4}$ °E. 69 lks. dist.,  
 marked  $\frac{1}{4}$  S36 BT.  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 8 ins. in the  
 ground to bedrock, supported in a mound of  
 stone for cor. of secs. 25, 26, 35, and 36,  
 marked on brass cap



from which,  
 A pine 5 ins in diam bears N65 $\frac{1}{2}$ °E 63 lks. dist.,  
 marked T35N., R7W., S25 BT.  
 A cedar 10 ins. in diam. bears S94 $\frac{1}{2}$ °E°1122 lks. dist.,  
 marked T35N., R7W., S36 BT.  
 A pine 10 ins. in diam. bears S61 $\frac{1}{2}$ °W 22 lks. dist.,  
 marked T35N., R7W., S 35 BT.  
 A pine 12 ins. in diam. bears N29 $\frac{1}{4}$ °W. 62 lks. dist.,  
 marked T35N., R7W., S 26 BT.  
 Land rolling.  
 Soil stony 3 rd. rate.  
 Timber scattering cedar and pine.  
 Undergrowth, sage and juniper brush.

40.00 East on a random line bet. secs. 25 and 36  
 Set temp  $\frac{1}{4}$  sec. cor.  
 80.05 Intersect E. bdy. of Tp. 22 lks. S. of the cor. of secs.  
 25, 30, 31, and 36  
 Thence  
 S89°51'W. on true line bet. secs. 25 and 36.  
 Ascend 36 ft. over NE. slope over rolling stony land,  
 7.00 Top of low ridge bears NW. and SE.  
 Desc. 44 ft. over SW. slope.  
 40.03 Set an iron post 3 ft. long, 1 in. in diam. 18 ins. in  
 the ground to bedrock, supported in a mound of  
 stone for  $\frac{1}{4}$  sec. cor., marked on brass cap




Survey of the Subdivision lines of Township 35 North, Range 7 West


Chains

from which,  
 A cedar 6 ins. in diam. bears N57 $\frac{1}{4}$ °W. 74 lks. dist.,  
 marked  $\frac{1}{4}$  S 25 BT.  
 A cedar 10 ins. in diam. bears S1 $\frac{1}{2}$ °W. 37 lks. dist.,  
 marked  $\frac{1}{4}$  S 36 BT.  
 45.00 Draw course N.; asc. 40 ft. over E. slope.  
 55.70 Top of ascent; desc. 32 ft.  
 80.05 The cor. of secs. 25, 26, 35, and 36.  
 Land rolling and hilly.  
 Soil sandy and stony 3 rd. rate.  
 Timber scattering cedar and pine.  
 Undergrowth, sage and juniper brush.

N 0°01'W. bet. secs. 25 and 26.  
 Descend 47 ft. over NW. slope over rolling sandy and  
 stony land, through scattering timber and brush  
 undergrowth.  
 5.76 Draw course NW.; asc. 91 ft. over SW. slope.  
 30.34 Top of spur slopes NW.; desc. 112 ft. over NE. slope.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 6 ins. in the  
 ground to bedrock, supported in a mound of stone  
 for  $\frac{1}{4}$  sec. cor., marked on brass cap



from which,  
 A cedar 7 ins. in diam. bears N53°E., 64 lks. dist.,  
 marked  $\frac{1}{4}$  S25 BT.  
 A cedar 5 ins. in diam. bears S87°W. 98 lks. dist.,  
 marked  $\frac{1}{4}$  S26 BT.  
 57.80 Bottom of draw, course NW.; asc. 71 ft. over SW. slope.  
 68.96 Top of spur slopes NW.; desc. 143 ft. over NE. slope to  
 79.80 Draw course SW.  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 26 ins. in  
 the ground for cor. of secs. 23, 24, 25, and 26,  
 marked on brass cap




from which  
 A cedar 12 ins. in diam. bears S50 $\frac{1}{4}$ °E. 137 lks. dist.,  
 marked T35N., R7W., S25 BT.  
 A pine 8 ins. in diam. bears S71 $\frac{1}{4}$ °W. 183 lks. dist.,  
 marked T35N.; R7W., S26 BT.  
 A cedar 6 ins. in diam. bears N63 $\frac{1}{2}$ °W. \_\_\_\_\_ lks. dist.,  
 marked T35N., R7W., S23 BT.  
 No other trees within limits.  
 Raise a mound of stone 2 ft. base, 1 $\frac{1}{2}$  ft. high W. of cor.  
 Land rolling and hilly.  
 Soil sandy and stony 3 rd. rate.  
 Timber cedar and pine.  
 Undergrowth, sage and juniper brush.

20 Survey of the Subdivision lines of Township 35 North., Range 7 West.

Chains


40.00 N 89°51'E. on a random line bet. secs. 24 and 25.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.00 Intersect E. bdy. of Tp. 16 lks. N. of the cor. of secs.  
 19, 24, 25, and 30.  
 Thence  
 S 89°58'W. on true line bet. secs. 24 and 25.  
 Descend 107 ft. over SW. slope over rolling stony land;  
 through scattering timber and undergrowth:  
 35.30 Old road in bottom of draw, course NW.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in  
 the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap




1923

from which,  
 A cedar 6 ins. in diam. bears N31°W. 36 lks. dist.,  
 marked  $\frac{1}{4}$  S 24 BT.  
 A cedar 8 ins. in diam. bears S5°E 164 lks. dist.,  
 marked  $\frac{1}{4}$  S 25 BT.  
 80.00 The cor. of secs. 23, 24, 25, and 26.  
 Land rolling.  
 Soil sandy and stony 3 rd. rate.  
 Timber cedar and pine.  
 Undergrowth sage and juniper brush.

N 0°01'W. bet. secs. 23 and 24 .  
 Ascend SE. slope 171 ft. over rolling stony land, thru.  
 scattering timber and brush undergrowth.  
 18.94 Top of spur slopes W.; desc. gradually over N. slope.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the  
 ground for  $\frac{1}{4}$  sec. cor. marked on brass cap



from which,  
 A cedar 12 ins. in diam. bears N52°W. 48 lks. dist.,  
 marked  $\frac{1}{4}$  S 23 BT.  
 A pine 10 ins. in diam. bears S47 $\frac{3}{4}$ °E 131 lks. dist.,  
 marked  $\frac{1}{4}$  S 24 BT.  
 63.40 Bottom of draw course W.; asc. 22 ft. over S. slope.  
 66.58 Top of spur bears W.; desc. 21 ft. over N. slope.  
 76.90 Draw course SW. asc. over SE. slope.  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 30 ins. in  
 the ground for cor. of secs. 13, 14, 23, and 24.,  
 marked on brass cap



1923

from which,

Survey of the Subdivision lines of Township 35 North., Range 7 West.

Chains

A cedar 6 ins. in diam. bears S56°E. 447 lks. dist.,  
 marked T35N., R7W., S 24 BT.  
 A pinion 12 ins. in diam. bears S71 $\frac{1}{4}$ °W. 320 lks. dist.,  
 marked T35N., R7W., S 23 BT.  
 A cedar 8 ins. in diam. bears N44 $\frac{1}{2}$ °W. 150 lks. dist.,  
 marked T35N., R7W., S14 BT..  
 A pinion 16 ins. in diam. bears N20 $\frac{3}{4}$ °W. 926 lks. dist.,  
 marked T35N., R7W., S14 BT..  
 Land rolling and hilly.  
 Soil sandy and stony 3rd. rate.  
 Timber cedar and pininopine.  
 Undergrowth sage brush.


40.00  
79.87

N 89°58'E. on a random line bet. secs. 13 and 24.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 Intersects E. bdy. of Tp. 08 lks. S. of the cor. of secs 13,  
 18, 19, and 24.

Thence  
 S 89°55'W. on true line bet. secs. 13 and 24.  
 Descend NW. slope 105 ft. over stony land, through  
 scattering timber and brush undergrowth.

39.30  
39.94

Road bears NW. and SE.  
 Set an iron post 3 ft. long, 1 in. in diam. 29 ins. in the  
 ground for  $\frac{1}{4}$  sec. cor., marked on brass cap



1923

from which,


A cedar 5 ins. in diam. bears N21 $\frac{1}{4}$ °E. 227 lks. dist., mk'd.  
 $\frac{1}{4}$  S 13 BT  
 A cedar 12 ins. in diam. bears S82 $\frac{1}{2}$ °W. 157 lks. dist.,  
 marked  $\frac{1}{4}$  S 24 BT.

77.87  
79.87

Dry ravine 5 lks. wide, course SW.  
 The cor. of secs. 13, 14, 23, and 24.  
 Land rolling and hilly.  
 Soil stony 3rd. rate.  
 Timber cedar and pinion..  
 Undergrowth, sage and cedar brush.

25.10  
40.00

N 0°01'W. bet. secs. 13 and 14.  
 Ascend 68 ft. over SE. slope over rolling land, through  
 scattering timber and undergrowth.  
 Top of spur bears E.; desc. 29 ft. over N. slope.  
 Set an iron post 3 ft. long, 1 in. in diam. 30 ins. in the  
 ground for  $\frac{1}{4}$  sec. cor., marked on brass cap



1923

Chains

from which  
A cedar 6 ins. in diam. bears N88 $\frac{1}{4}$ °W. 137 lks. dist.,  
marked  $\frac{1}{4}$  S 14 BT.

No other trees within limits.

Deposite a marked stone at base of monument.

45.10 Road bears NW. and SE.

60.96 Leave timber bears bears E. and W.

65.95 Road bears NE. and SW.

80.00 Set an iron post 3 ft. long, 2 ins. in diam. 30 ins. in  
the ground for cor. of secs. 11, 12, 13, and 14.,  
marked on brass cap

T35N	R7W
S11	S12
S14	S13

1923

from which,  
A pinion 6 ins. in diam. bears N2°15'E 238 lks. dist.,  
marked T35N., R7W., S12 BT.

A pine 8 ins. in diam. bears S43 $\frac{3}{4}$ °W. 277 lks. dist.,  
marked T35N., R7W., S 14 BT.

A cedar 12 ins. in diam. bears N45°W. 277 lks. dist.,  
marked T35N., R7W., S11 BT.

No other trees within limits.

Deposite a marked stone at base of monument.

Land rolling.

Soil stony 3 rd. rate.

Timber scattering cedar and pinion timber.

Undergrowth sage and juniper brush.

40.00 N 89°55'E. on a random line bet. secs. 12 and 13.

Set temp.  $\frac{1}{4}$ ° sec. cor.

79.86 Intersect E. bdy. of Tp. 14 lks. N. of the cor. of secs. 7, 12,  
13, and 18.

Thence

N 89°59'W. on true line bet. secs. 12 and 13.

Over rolling stony land, through scattering timber and  
undergrowth.

39.93 Set an iron post 3 ft. long, 1 in. in diam. 30 ins. in  
the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$ S 12
$\frac{1}{4}$ S 13

1923

from which,  
A pinion 12 ins. in diam. bears N0 $\frac{3}{4}$ °E. 192 lks. dist.,  
marked  $\frac{1}{4}$  S12 BT.

A pinion 12 ins. in diam. bears S52 $\frac{3}{4}$ °E. 91 lks. dist.,  
marked  $\frac{1}{4}$  S13 BT.

44.86 Leave timber bears N. and S.

58.56 Road bears NE. and SW.

79.86 The cor. of secs. 11, 12, 13, and 14

Land rolling.

Soil sandy and stony 3 rd. rate.

Timber pinion and cedar.


Undergrowth, sage and juniper brush.




Survey of the Subdivision lines of Township 35 North., Range 7 West.

Chains

N 0°01'W. bet. secs. 11 and 12.  
 Ascend 458 ft. over SW. slope over rolling bench land.  
 through scattering timber and brush undergrowth  
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 18 ins. in  
 the ground to bedrock, supported in a mound of  
 stone for  $\frac{1}{4}$  sec. cor., marked on brass cap.




from which,  
 A cedar 12 ins. in diam. bears S77°E. 31 lks. dist.,  
 marked  $\frac{1}{4}$  S 12 BT.  
 A cedar 14 ins. in diam. bears S51 $\frac{1}{2}$ °W. 131 lks. dist.,  
 marked  $\frac{1}{4}$  S 11 BT.  
 41.70 Top of spur slopes E.; desc. 358 ft. over NE. slope.  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 26 ins. in  
 the ground for cor. of secs. 1, 2, 11, and 12.  
 marked on brass cap



from which,  
 A cedar 8 ins. in diam. bears N33°E. 246 lks. dist.,  
 marked T35N., R7W., S 1 BT.  
 A cedar 12 ins. in diam. bears S11 $\frac{1}{2}$ °E. 255 lks. dist.,  
 marked T35N., R7W., S 12 BT.  
 A cedar 14 ins. in diam. bears S52 $\frac{3}{4}$ °W. 212 lks. dist.  
 marked T35N., R7W., S11 BT.  
 A cedar 4 ins. in diam. bears N11 $\frac{1}{2}$ °W. 47 lks. dist.,  
 marked T35N., R7W., S 2 BT.  
 Land rolling and hilly.  
 Soil sandy and stony 3 rd. rate.  
 Timber scattering cedar and pinion.  
 Undergrowth sage brush.

S 89°59'E on a random line bet. secs. 1 and 12.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.90 Intersect E. bdy. of Tp. 05 lks. N. of the cor. of secs. 16, 7,  
 and 12.  
 Thence  
 N 89°57'W. on true line bet. secs. 1 and 12.  
 Over rolling stony land, through scattering timber and  
 brush undergrowth.  
 12.57 Road bears N. and S.  
 39.95 Set an iron post 3 ft. long, 1 in. in diam. 6 ins. in the  
 ground to bedrock, supported in a mound of  
 stone for  $\frac{1}{4}$  sec. cor., marked on brass cap




Survey of the Subdivision lines of Township 35 North, Range 7 West.

Chains

from which  
 A pinion 12 ins. in diam. bears N50 $\frac{1}{2}$ °E. 168 lks. dist.,  
 marked  $\frac{1}{4}$  S 1 BT.  
 A pinion 6 ins. in diam. bears S29°W. 116 lks. dist.,  
 marked  $\frac{1}{4}$  S 12 BT.  
 47.10 Enter heavy pine timber bears N. and S.  
 55.90 Top of gradual ascent, thence over nearly level land.  
 65.00 Leave heavy timber bears N. and S.; enter scattering  
 timber.  
 79.90 The cor. of secs. 1, 2, 11, and 12.  
 Land rolling.  
 Soil sandy and stony  $\frac{3}{4}$  rd. and  $\frac{4}{4}$  th. rate.  
 Timber, cedar and pinion pine.  
 Undergrowth, sage and juniper brush.

40.00 N 0°01'W. on a random line bet. secs. 1 and 2.  
 Set temp  $\frac{1}{4}$  sec. cor.  
 79.70 Intersect N. bdy. of Tp. 08 lks. E. of the cor. of secs.  
 1, 2, 35, and 36, hereinbefore described.  
 Thence  
 S 0°04'E. on true line bet. secs. 1 and 2.  
 Over rolling sandy land, through scattering timber and  
 undergrowth.  
 Descend 108 ft. over S. slope.  
 16.96 Dry sand wash 10 lks. wide, course E.  
 19.76 Dry sand wash 10 lks. wide, course E. NE.  
 39.70 Set an iron post 3 ft. long, 1 in. in diam. 22 ins. in  
 the ground to bedrock, supported in a mound  
 of stone for  $\frac{1}{4}$  sec. cor., marked on brass cap




from which,  
 A cedar 18 ins. in diam. bears S85 $\frac{1}{2}$ °E. 63 lks. dist.,  
 marked  $\frac{1}{4}$  S 1 BT.  
 A pinion 11 ins. in diam bears S72 $\frac{1}{4}$ °W. 64 lks. dist.,  
 marked  $\frac{1}{4}$  S 2 BT.  
 41.10 Dry sand wash 8 lks. wide, 3 ft. deep, course NE.  
 79.70 The cor. of secs. 1, 2, 11, and 12.  
 Land rolling.  
 Soil stony  $\frac{3}{4}$  rd. and  $\frac{4}{4}$  th. rate.  
 Timber scattering cedar and pinion.  
 Undergrowth, sage and juniper brush.


From the cor. of secs. 2, 3, 34, and 35 on S. bdy. of Tp.  
 hereinbefore described.  
 N 0°01'W. bet. secs. 34 and 35.  
 Ascend 70 ft. over SW. slope over rolling stony land,  
 through scattering timber and undergrowth.  
 16.94 Top of ridge bears NW, and SE.  
 Desc. 47 ft. over NE. slope.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in  
 the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap

Survey of the Subdivision lines of Township 35 North., Range 7 West

Chains




from which,  
 A pine 8 ins. in diam. bears N27 $\frac{1}{2}$ °W 125 lks. dist.,  
 marked  $\frac{1}{4}$  S 34 BT.  
 A cedar 8 ins. in diam. bears S28 $\frac{1}{2}$ °E. 38 lks. dist.,  
 marked  $\frac{1}{4}$  S 35  
 74.80 Dry sand wash 7 lks. wide 3 ft. deep, course NE.  
 80.00 Set an iron post 3 ft. long 2 ins. in diam. 12 ins. in the  
 ground to bedrock, supported in a mound of  
 stone for cor. of secs. 26, 27, 34, and 35, mk'd  
 on brass cap



from which,  
 A cedar 10 ins. in diam. bears N62°E. 107 lks. dist.,  
 marked T35N., R7W., S 26 BT.  
 A cedar 14 ins. in diam. bears S51 $\frac{1}{2}$ °E. 91 lks. dist.,  
 marked T35N., R7W., S35 BT.  
 A pinion 8 ins. in diam. bears S6 $\frac{1}{4}$ °W. 69 lks. dist.,  
 marked T35N., R7W., S 34 BT.  
 A pinion 10 ins. in diam. bears N58 $\frac{1}{2}$ °W 59 lks. dist.,  
 marked T35N., R7W., S 27 BT.  
 Land rolling.  
 Soil stony 3 rd. and 4 th. rate.  
 Timber, scattering cedar and pinion.  
 Undergrowth sage and juniper brush.

40.00 East on a random line bet. secs. 26 and 35.  
 Set temp  $\frac{1}{4}$  sec. cor.  
 80.01 Intersect N. and S. line 16 lks. S. of the cor of secs.  
 25, 26, 35, and 36.  
 Thence  
 S 89°53'W. on true line bet. secs. 26 and 35.  
 Descend 200 ft. over W. slope over rolling stony land,  
 through scattering timber and brush under-  
 growth.  
 40.01 Set an iron post 3 ft. long, 1 in. in diam. 4 ins. in  
 the ground to bedrock, supported in a mound  
 of stone, with marked stone at base, for  $\frac{1}{4}$  sec.  
 cor., marked on brass cap



from which,  
 A pine 8 ins. in diam bears S0 $\frac{1}{2}$ °W. 51 lks. dist.,  
 marked  $\frac{1}{4}$  S35 BT.  
 A cedar 14 ins. in diam. bears N5°W. 20 lks. dist.,  
 marked  $\frac{1}{4}$  S26 BT.

BOOK 3680

26 Survey of the Subdivision lines of Township 35 North, Range 7 West

Chains  
 55.35 Draw, course N.; asc. about 57 ft. over E. slope.  
 80.01 The cor. of secs. 26, 27, 34, and 35. *75.50' Wash, Course N.*  
 Land rolling.  
 Soil stony 3 rd. rate.  
 Timber pinion pine and cedar.  
 Undergrowth sage brush.

---

10.00 N 0°01' W. bet. secs. 26 and 27.  
 Over rolling stony land, through heavy timber and  
 scattering undergrowth.  
 Leave heavy timber bears E. and W.; enter scattering  
 timber.

17.00 Top of spur slopes W.; desc. 70 ft. over N. slope.  
 Enter heavy timber bears E. and W.

33.22 Dry sand wash 14 lks. wide, course NE.  
 Ascend 20 ft. over SE. slope.

40.00 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the  
 ground for  $\frac{1}{4}$  sec. cor., marked on brass cap

	$\frac{1}{4}$	
S 27		S 26
1923		

from which,  
 A cedar 6 ins. in diam. bears S26°E., 76 lks. dist.,  
 marked  $\frac{1}{4}$  S 26 BT.  
 A pinion 16 ins. in diam. bears S40°W. 42 lks. dist.,  
 marked  $\frac{1}{4}$  S27 BT.

57.59 Same dry sand wash 20 lks. wide, course NW.; asc. over SW.  
 slope.

67.60 Dry sand wash 8 lks. wide, course SW.; asc. 91 ft. over  
 SE. slope.  
 Leave heavy timber, bears E. and W.; enter scattering  
 timber.

75.00 Top of ascent on rim of canyon, bears E. and W.; desc. 243  
 ft. over N. slope to

80.00 Set an iron post 3 ft. long, 2 ins. in diam. with marked  
 stone at base, 20 ins. in the ground to bedrock  
 supported in a mound of stone for cor. of secs.  
 22, 23, 26, and 27, marked on brass cap

T35N		R7W
S22		S23
S27		S26
1923		

from which,  
 A cedar 8 ins. in diam. bears N40°E. 100 lks. dist.,  
 marked T35N., R7W., S 23 BT.  
 A cedar 14 ins. in diam. bears S61 $\frac{1}{2}$ °E. 5 lks. dist.,  
 marked T35N., R7W., S 26 BT.  
 A pinion 10 ins. in diam. bears S37°W. 120 lks. dist.,  
 markde T35N., R7W., S 27 BT.  
 No other trees within limits.  
 Land rolling and hilly.  
 Soil stony 4 th. rate.  
 Timber cedar and pinion pine.  
 Undergrowth, sage brush and juniper.

Survey of the Subdivision lines of Township 35 North., Range 7 West

Chains

40.00 N 89°53'E on a random line bet. secs. 23 and 26.  
Set temp 1/4 sec. cor.

79.91 Intersect N. and S. line at the cor. of secs. 23, 24, 25, and 26.

Thence

10.64 S 89°53'W. on true line bet. secs. 23 and 26  
Descend 60 ft. over SW. slope over hilly land, through scattering timber and undergrowth.

18.52 Bottom of canyon course NW. 10 chs. thence west.  
Ascend 164 ft. over NE. slope.

25.60 Top of spur slopes NE.  
Descend 242 ft. over NW. slope.

34.53 Bottom of same canyon, course SW, about 10 chs. thence NW.  
Ascend 182 ft. over NE. slope.

37.49 Bottom of same canyon, course NW.  
Ascend 182 ft. over NE. slope.

39.96 Top of spur slopes N.  
Descend 87 ft. over W. slope.  
Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the ground for 1/4 sec. cor., marked on brass cap

1/4 S 23  
S 26

1923

from which,

A pine 6 ins. in diam. bears N55 1/2°W. 132 lks. dist., marked 1/4 S 23 BT.

A cedar 6 ins. in diam. bears S55°E 173 lks. dist., marked 1/4 S 26 BT.

41.05 Descend 22 ft. over W. slope. into canyon.  
Bottom of canyon, course N.; asc. 218 ft. over E. slope.

44.96 Top of spur bears NE.; desc. 260 ft. over NW. slope.

56.00 Foot of descent on N. slope; asc. 203 ft. over NE. slope.

66.58 Top of spur bears N.; desc. 115 ft. over NW. slope.

72.00 Foot of descent on N. slope; asc. 68 ft. over NE. slope to

79.91 The cor. of secs. 22, 23, 26, and 27.  
Land rolling and hilly.  
Soil stony 3 rd. and 4 th. rate.  
Timber, cedar and pinion.  
Undergrowth, sage brush and juniper.

N 0°01'W. bet. secs. 22 and 23.  
Descend 187 ft. over N. slope over broken hilly land, through scattering timber and dense undergrowth.

5.02 Dry wash 60 lks. wide, 3 ft. deep, course W.

7.50 Trail bears E. and W.

9.25 Foot of steep S. slope.; asc. 206 ft.

16.00 Top of spur, bears SE.; desc. 28 ft. over NE. slope.

20.04 Foot of descent at foot of cliff; asc. 298 ft.

21.25 Top of cliff bears NE. and SW.

34.65 Dry wash 10 lks. wide, course E.; asc. 30 ft. over S. slope

40.00 Set an iron post 3 ft. long, 1 in. in diam. 10 ins. in the ground to bedrock, supported in a mound of stone for 1/4 sec. cor., marked on brass cap

1/4  
S 22 | S 23  
1923

from which,

## BOOK 3680

## 28 Survey of the Subdivision lines of Township 35 North., Range 7 West

Chains

A cedar 3 ins. in diam. bears N56°W. 100 lks. dist.,  
marked BT.  
A pinion 10 ins. in diam. bears S86°E. 421 lks. dist.,  
marked  $\frac{1}{4}$  S 23 BT.  
43.70 Dry wash 5 lks. wide, course E.; asc. about 5 ft. over S.  
slope.  
47.50 Top of spur, slopes SE.; desc. 40 ft. over NE. slope.  
51.54 Dry wash 8 lks. wide, course E.; asc. 10 ft. over S. slope.  
53.70 Top of spur bears E.; desc. 11 ft. over N. slope.  
55.38 Dry sand wash 14 lks. wide, course E.; asc.  
74.00 Dry sand wash 8 lks. wide, course E.  
80.00 Set an iron post 3 ft. long, 2 ins. in diam. 16 ins. in  
the ground to bedrock, supported in a mound  
of stone for cor. of secs. 14, 15, 22, and 23.,  
marked on brass cap

T35N	R7W
S15	S14
S22	S23

1923

from which,  
A pinion 6 ins. in diam. bears N40°E. 124 lks. dist.,  
marked T35N., R7W., S14 BT.  
A cedar 12 ins. in diam. bears S52 $\frac{3}{4}$ °E. 86 lks. dist.,  
marked T35N., R7W., S23 BT.  
A cedar 12 ins. in diam. bears S37°W. 103 lks. dist.,  
marked T35N., R7W., S22 BT.  
A cedar 6 ins. in diam. bears N59 $\frac{3}{4}$ °W. 117 lks. dist.,  
marked T35N., R7W., S15 BT.  
Land hilly and mountainous.  
Soil stony 3 rd. and 4 th. rate.  
Timber cedar and pinion.  
Undergrowth, sage and juniper brush.

40.00 N 89°53'E. on a random line bet. secs. 14 and 23.  
Set temp  $\frac{1}{4}$  sec. cor.  
80.11 Intersect N. and S. line 25 lks. N. of the cor. of secs.  
13, 14, 23, and 24.  
Thence  
N 89°56'W. on true line bet. secs. 14 and 23.  
Ascend E. slope of spur, 52 ft. over hilly stony land,  
through heavy timber and undergrowth.  
7.61 Top of spur slopes S.; desc. 53 ft. over W. slope.  
11.45 Dry wash 9 lks. wide, course S.; asc. 40 ft. over E. slope  
16.31 Top of small spur slopes SE.; desc. over SW. slope.  
32.01 Dry sand wash 8 lks. wide, course SW.  
Ascend 58 ft. over E. slope.  
40.06 Set an iron post 3 ft. long, 1 in. in diam. 14 ins. in  
the ground to bedrock, supported in a mound of  
stone for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$ S 14
S 23

1923

from which,  
A cedar 7 ins. in diam. bears N35°W. 27 lks. dist.,  
marked  $\frac{1}{4}$  S 14 BT.  
A pinion 10 ins. in diam. bears S52°E 40 lks. dist.,  
marked  $\frac{1}{4}$  S 23 BT

Survey of the Subdivision Lines of Township 35 North, Range 7 West.

Chains  
41.11  
50.56

Dry wash, 9 lks. wide, course SW.  
Dry sand wash, 9 lks. wide, 4 ft. deep, course S.  
Asc. 32 ft. over E. slope. Leave heavy timber, bears N.  
and S. and enter scattering timber.

55.30 Top of spur, slopes S. Desc. 40 ft. over W. slope.  
59.17 Dry sand wash, 8 lks. wide, course SE. Asc. NE. slope.  
63.11 Top of spur, bears SE. Desc. 26 ft. over SW. slope.  
67.45 Dry sand wash, 14 lks. wide, course SE.  
79.03 Dry sand wash, 5 lks. wide, 3 ft. deep, course SE.  
80.11 The cor. of secs. 14, 15, 22 and 23.

Land; hilly.  
Soil; stony, 3rd. and 4th. rates.  
Timber; cedar and pinion.  
Undergrowth; sage and juniper brush.

N.0°1'W., bet. secs. 14 and 15.  
Over rolling land, through scattering timber and under-  
growth.

.90 Dry wash, 6 lks. wide, course SE.  
9.00 Old road, bears NE. and SW.  
17.65 Dry sand wash, 8 lks. wide, course SW.  
20.00 Enter heavy timber, bears E. and W.  
24.30 Dry sand wash, 8 lks. wide, course SW.  
Asc. 46 ft. over SE. slope.  
31.00 Top of spur, slopes W.  
Desc. 11 ft. over N. slope.  
32.54 Dry wash, 6 lks. wide, course W. Asc. 15 ft. over S. slope.  
38.70 Top of spur, bears W. Desc. 13 ft. over N. slope.  
40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground for  $\frac{1}{4}$  sec. cor. marked on brass cap

$\frac{1}{4}$

S 15 | S 14

1923

from which

A cedar, 16 ins. diam., bears S.79 $\frac{1}{2}$ °E., 29 lks. dist.  
marked  $\frac{1}{4}$  S 14 B T

A pinion, 10 ins. diam., bears S.87 $\frac{1}{2}$ °W., 22 lks. dist.  
marked  $\frac{1}{4}$  S 15 B T

40.20 Dry sand wash, 6 lks. wide, course SW.  
Asc. 76 ft. over SE. slope.  
48.30 Top of ascent on S. edge of mesa, thence over rolling land.  
77.30 Dry sand wash, 6 lks. wide, course NW.  
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the  
ground for cor. of secs. 10, 11, 14 and 15, marked on  
brass cap

T35N R7W  
S 10 | S 11  
S 15 | S 14

1923

from which

A pinion, 12 ins. diam., bears N.71 $\frac{1}{4}$ °E., 28 lks. dist.  
marked T 35 N R 7 W S 11 B T

A pinion, 10 ins. diam., bears S.35 $\frac{1}{2}$ °E., 25 lks. dist.  
marked T 35 N R 7 W S 14 B T

A cedar, 14 ins. diam., bears S.41 $\frac{1}{2}$ °W., 13 lks. dist.  
marked T 35 N R 7 W S 15 B T

A pinion, 16 ins. diam., bears N.64 $\frac{1}{2}$ °W., 63 lks. dist.  
marked T 35 N R 7 W S 10 B T

Survey of the Subdivision Lines of Township 35 North, Range 7 West.

Chains Land; rolling.  
 Soil; stony, 3rd. and 4th. rates.  
 Timber; cedar and pinion.  
 Undergrowth; sage and juniper brush.

40.00 S. 89° 56' E., on a random line bet. sees. 11 and 14.  
 Set temp. 1/4 sec. cor.  
 80.10 Intersect N. and S. line 23 lks. S. of the cor. of sees. 11, 12, 13 and 14.

Thence  
 S. 89° 54' W., on a true line bet. sees. 11 and 14.  
 Over rolling land, through scattering undergrowth.  
 Asc. gentle E. slope.  
 2.00 Enter timber, bears N. and S.  
 40.05 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground for 1/4 sec. cor. marked on brass cap

S 11

S 14

1923

from which  
 A cedar, 24 ins. diam., bears N. 1/2° E., 67 lks. dist., marked 1/4 S 11 B T  
 A pinion, 10 ins. diam., bears S. 23 1/2° W., 83 lks. dist., marked 1/4 S 14 B T  
 Desc. 90 ft. over gradual W. slope.

73.30 Wash, course NW.  
 74.40 Road, bears SE. and NW.  
 80.10 The cor. of sees. 2, 3, 10 and 11.

Land; rolling.  
 Soil; stony, 3rd. rate.  
 Timber; cedar and pinion.  
 Undergrowth; sage and juniper brush.

N. 0° 1' W., bet. sees. 10 and 11.  
 Over rolling land, through heavy timber and dense undergrowth.  
 3.40 Road, bears SE. and NW.  
 4.80 Dry sand wash, 6 lks. wide, 3 ft. deep, course NW.  
 Asc. 54 ft. over S. slope.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bed rock, supported in a mound of stone, for 1/4 sec. cor. marked on brass cap

1/4

S 10 | S 14

1923


from which  
 A cedar, 10 ins. diam., bears N. 32 1/2° E., 37 lks. dist., marked 1/4 S 11 B T



Survey of the Subdivision lines of Township 35 North., Range 7 West.

Chains

62.50 A cedar 16 ins. in diam. bears N78°W. 47 lks. dist.,  
 68.70 marked 1/4 S10 BT.  
 80.00 Over level bench land.  
 North edge of bench land; desc. 61 ft. over w. slope.  
 Dry sand wash 8 lks. wide, course W.  
 Set an iron post 3 ft. long, 2 ins. in diam. 12 ins. in  
 the ground to bedrock, supported in a mound  
 of stone for cor. of secs. 2, 3, 10, and 11,  
 marked on brass cap



from which,


A cedar 6 ins. in diam. bears N81°E. 100 lks. dist.,  
 marked T35N., R7W., S 2 BT.  
 A cedar 8 ins. in diam. bears S33 1/2°E. 21 lks. dist.,  
 marked T35N., R7W., S 11 BT.  
 A cedar 8 ins. in diam. bears S82 1/2°W. 47 lks. dist.,  
 markde T35N., R7W., S 10 BT.  
 A cedar 12 ins. in diam. bears N58°W. 64 lks. dist.,  
 marked T35N., R7W., S 3 BT.

Land rolling.  
 Soil stony 3 rd. and 4 th. rate.  
 Timber cedar and pinion.  
 Undergrowth, sage and juniper brush.

40.00 N 89°54'E. on a random line bet. secs. 2 and 11.  
 80.00 Set temp 1/4 sec. cor.  
 Intersect N. and S. line 16 lks. S. of the cor. of secs.  
 1, 2, 11, and 12.

Thence  
 S 89°47'W. on true line bet. secs. 2 and 11.  
 Over rolling stony land, through scattering timber and  
 undergrowth.

10.00 Enter heavy timber bears N. and S.  
 27.50 Dry sand wash 6 lks. wide, course NW.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 12 ins. in the  
 ground to bedrock, supported in a mound of stone  
 for 1/4 sec. cor., marked on brass cap



from which,


A pinion 10 ins. in diam. bears N68°W. 173 lks. dist.,  
 marked 1/4 S 2 ET.  
 A pinion 10 ins. in diam. bears S14 1/4°W 83 lks. dist.,  
 marked 1/4 S 11 BT.

80.00 Descend 75 ft. over w. slope.  
 The cor. of secs. 2, 3, 10, and 11  
 Land rolling.  
 Soil stony 3 rd. and 4 th. rate.  
 Timber cedar and pinion.  
 Undergrowth, sage and juniper brush.

32. Survey of the Subdivision lines of Township 35 North., Range 7 West


Chains

N 0°04' W. on a random line bet. secs. 2 and 3.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.96 Intersect N. bdy. of Tp. 10 lks. W. of the cor. of secs. 2, 3, 34 and 35, hereinbefore described.  
 Thence  
 South on a true line bet. secs. 2 and 3.  
 Over rolling stony land, through scattering timber and undergrowth.  
 7.96 Edge of lava cliff bears E. and W.; desc. 57 ft. over S. slope.  
 11.13 Dry wash 20 lks. wide, course SW. Ascend 34 ft. over NW. slope.  
 12.50 Enter heavy timber bears E. and W.  
 14.06 Top of spur, slopes W.; desc. 29 ft. over S. slope.  
 17.01 Dry sand wash 30 lks. wide, course NW.  
 23.71 wash 14 lks. wide, course NE.; asc. over N. slope.  
 39.96 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap



from which,  
 A pinion 12 ins. in diam. bears  $S 38\frac{1}{2}^{\circ} E.$  147 lks. dist., marked  $\frac{1}{4}$  S 2 BT.  
 A pinion 7 ins. in diam. bears  $N 27\frac{3}{4}^{\circ} W.$  88 lks. dist., marked  $\frac{1}{4}$  S 3 BT.  
 48.96 Dry wash 6 lks. wide, course W.; asc. 170 ft. over N. slope of bluff.  
 53.46 Top of bluff, bears NW. and SE.; desc. 46 ft. over SW. slope.  
 79.96 The cor. of secs. 2, 3, 10, and 11.  
 Land rolling and hilly,  
 Soil stony 3 rd. and 4 th. rate.  
 Timber cedar and pinion.  
 Undergrowth, sage and juniper brush.

From the cor. of secs. 3, 4, 33, and 34 on S. bdy. of Tp. hereinbefore described.  
 N 0°02' W. bet. secs. 33 and 34.  
 Descend 274 ft. over NW. slope over stony hilly land, through scattering cedar timber and heavy undergrowth.  
 19.23 Dry ravine 20 lks. wide, 4 ft. deep, course SW.; asc. 523 ft. over SW. slope.  
 29.68 Top of rim-rock bears NW. and SE., continue ascent over SW. slope.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 12 ins. in the ground to bedrock, supported in a mound of stone for  $\frac{1}{4}$  sec. cor. marked on brass cap



from which  
 A pine 10 ins. in diam. bears  $N 53\frac{1}{2}^{\circ} W.$  50 lks. dist., marked  $\frac{1}{4}$  S 33 BT.

Survey of the Subdivision lines of Township 35 North, Range 7 West

Chains

- A cedar 16 ins. in diam. bears  $S42\frac{1}{4}^{\circ}E.36$  lks. dist., marked  $\frac{1}{4}$  S 34 BT.
- 43.80 Top of spur slopes W.; desc. gradually over N. slope, to
- 58.00 Top of rim-rock, bears NE. and SW.
- 69.86 Descend 347 ft. over broken NW. slope.
- Foot of descent in wash 15 lks. wide, course W.; asc. 108 ft. over SW. slope.
- 80.00 The point for the cor. of secs. 27, 28, 33, and 34, falls on side of limestone ledge 20 ft. long, 8 ft. above ground; impracticable to set cor., therefore chisel a cross (x) at the exact cor. point and at,
- 79.50 Set an iron post 3 ft. long, 2 ins. in diam. with marked stone deposited at base, 6 ins. in the ground to bedrock, supported in a mound of stone for witness cor. to cor. of secs. 27, 28, 33, and 34, marked on brass cap

W C	
T35N	R7W
S 28	S 27
S 33	S 34

1923

- from which,
- A pine 10 ins. in diam. bears  $N4\frac{1}{4}^{\circ}E.$  \_\_\_\_\_ lks. dist., marked WC T35N., R7W., S27 BT.
- A pine 12 ins. in diam. bears  $S66\frac{1}{2}^{\circ}W.94$  lks. dist., marked WC T35N., R7W., S33 BT.
- No other trees within limits.
- Land mountainous and rolling.
- Soil stony 3 rd. and 4 th. rate.
- Timber cedar and pine.
- Undergrowth, sage and juniper brush.
- 80.00 True point for cor. falls on limestone ledge, where it is impracticable to set cor. post. Mark a cross (X) at exact cor. point.

- From true point for cor.,
- East on a random line bet. secs. 27 and 34.
- 40.00 Set temp  $\frac{1}{4}$  sec. cor.
- 80.00 Intersect N. and S. line 16 lks. S. of the cor. of secs. 26, 27, 34, and 35.
- Thence
- S  $89^{\circ}53'$  W. on true line bet. secs. 27 and 34.
- Ascend 17 ft. over NE. slope over hilly land, through scattering timber and undergrowth
- 22.40 Top of ridge bears N. and S.
- Descend 100 ft. over W. slope.
- 29.72 Bottom of draw. course N.
- Ascend, 140 ft. over E. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. with marked stone at base, 3 ins. in the ground to bedrock, supported in a mound of stone for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$ S 27
S 34

1923

- from which,
- A cedar 12 ins. in diam. bears  $N36\frac{1}{4}^{\circ}W.84$  lks. dist., marked  $\frac{1}{4}$  S 27 BT.
- A cedar 6 ins. in diam. bears  $S63^{\circ}E.34$  lks. dist., marked  $\frac{1}{4}$  S 34 BT.

34 Survey of the Subdivision lines of Township 35 North., Range 7 West.

Chains


43.00 Top of spur slopes NE.; desc. gradually over NW. slope.  
 72.86 Top of rim-rock bears N. and S.; desc. 276 ft. over  
*True P.L. for* broken W. slope.  
 80.00 The cor. of secs. 27, 28, 33, and 34.  
 Land rolling and broken.  
 Soil stony 3 rd. and 4 th, rate.  
 Timber cedar and pinion pine.  
 Undergrowth, sage and juniper brush.

N 0°02' W. bet. secs. 27 and 28.  
 Over stony W. slope over cliffs through scattering  
 timber and undergrowth.  
 8.32 Point of spur slopes NW. ; desc. 428 ft. over NW. slope.  
 30.34 Foot of descent, in sand wash 20 lks. wide, course SW.  
 ascend rolling SW. slope.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in  
 the ground for  $\frac{1}{4}$  sec. cor. marked on brass cap

$\frac{1}{4}$   
 S 28 | S 27

1923

No trees suitable for bearing trees within limits.  
 Raise a mound of stone 2 ft. base, 1 1/2 ft. high W. of cor.  
 Precipitous ascent from this point over S. slope of  
 spur, impracticable to chain; triangulate as  
 follows; Vertical angle to flag on line on top  
 of rim-rock = +20°. auxiliary flag bears  
 N 89°58' E. 10.00 chs. dist.; from auxiliary flag  
 the flag on line on rim bears N 22°38' W.; All  
 bearings checked by direct readings of the solar,  
 and all angles checked by deflection.



Dist. on line	40.00 chs.
Dist. by triangulation to flag on line	24.02 "
	64.02 "

64.02 Top of rim-rock bears NE. and SW.; continue gradual ascent  
 over SE. slope.  
 67.55 Top of spur bears SE.; desc. 23 ft. over NE. slope.  
 73/01 Bottom of wash 10 lks. wide, course SE.; asc. 48 ft. to  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 20 ins. in  
 the ground to bedrock, supported in a mound of stone  
 for cor. of secs. 21, 22, 27, and 28., marked on brass  
 cap

T3N	R7W
S21	S22
S28	S27

1923


from which,

Survey of the Subdivision lines of Township 35 North., Range 7 West

Chains

A cedar 14 ins. in diam bears N64°E., 16 lks. dist., marked T35N., R7W., S22 BT  
 A pine 12 ins. in diam. bears S50°E. 133 lks. dist., marked T35N., R7W., S27 BT.  
 A pine 10 ins. in diam. bears S48°W. 74 lks. dist., marked T35N., R7W., S28 BT.  
 A pine 8 ins. in diam. bears N41 $\frac{1}{4}$ °W. 98 lks. dist., marked T35N., R7W., S21 BT.  
 Land broken, rolling, and mountainous.  
 Soil stony 3 rd. and 4 th. rate.  
 Timber cedar and pine.  
 Undergrowth, sage and juniper brush.

40.00 N89°53'E. on a random line bet. secs. 22 and 27.  
 79.87 Set temp.  $\frac{1}{4}$  sec. cor.  
 Intersect N. and S. line 3 lks. S. of the cor. of secs 22, 23, 26, and 27.  
 Thence  
 S 89°52'W. on true line bet. secs. 22 and 27.  
 Descend 271 ft. over NW. slope, over stony mountainous land, through scattering timber and brush undergrowth.  
 17.70 Bottom of canyon, course SW.; trail bears NE. and SW.  
 Ascend 164 ft. over SE. slope.  
 39.94 Set an iron post 3 ft. long, 1 in. in diam. 20 ins. in the ground to bedrock, supported in a mound of stone for  $\frac{1}{4}$  sec. cor., marked on brass cap



1923

from which,  
 A pinion 10 ins. in diam. bears N82°W. 75 lks. dist., marked  $\frac{1}{4}$  S 22 BT.  
 A cedar 10 ins. in diam. bears S 65 $\frac{1}{4}$ °W. 246 lks. dist., marked  $\frac{1}{4}$  S 27 BT.  
 52.17 Top of rimrock on W. side of canyon, bears NE. and SW.  
 thence ascend 447 ft. over SE. slope of spur.  
 74.29 Top of spur, slopes SE.; desc. 30 ft. over SW. slope to  
 79.87 The cor. of secs. 21, 22, 27, and 28.  
 Land mountainous.  
 Soil stony 3 rd. and 4 th. rate.  
 Timber cedar and pinion.  
 Undergrowth, sage brush and pinion.

7.12 N 0°02'W. bet. secs. 21 and 22.  
 11.42 Ascend 108 ft. over SW. slope, through scattering timber and brush undergrowth.  
 33.12 Top of spur slopes E.  
 40.00 Top of ridge bears NE. and SW.; desc. 168 ft. over NW. slope.  
 Head of draw, course W.; asc. 139 ft. over S. slope.  
 Set an iron post 3 ft. long, 1 in. in diam. 18 ins. in the ground to bedrock, supported in a mound of stone for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$

BOOK 3680

36 Survey of the Subdivision lines of Township 335 North, Range 7 West

Chains

S. 21 | S 22

1923

from which,

A pine 10 ins. in diam. bears N31 $\frac{1}{4}$ °W. 43 lks. dist., marked  $\frac{1}{4}$  S 21 BT.

A pine 10 ins. in diam. bears S26°E. 41 lks. dist., marked  $\frac{1}{4}$  S 22 BT.

57.98 Top of spur slopes NW.; desc. 86 ft. over NE. slope.

68.96 Dry ravine 8 lks. wide, course NW.; asc. 141 ft. over SW. slope to

80.00 Set an iron post 3 ft. long, 2 ins. in diam. 10 ins. in the ground to bedrock, supported in a mound of stone for cor. of secs. 15, 16, 21, and 22, marked on brass cap

T35N | R7W  
S 16 | S15

S 21 | S 22

1923

from which,

A pine 10 ins. in diam. bears N70 $\frac{1}{4}$ °E. 50 lks. dist., marked T35N., R7W., S 15 BT.

A cedar 12 ins. in diam. bears S54 $\frac{1}{4}$ °E. 60 lks. dist., marked T35N., R7W., S 22 BT.

A pine 8 ins. in diam. bears S45°W. 75 lks. dist., marked T35N., R7W., S 21 BT.

A pine 8 ins. in diam. bears N 32 $\frac{1}{4}$ °W. 24 lks. dist., marked T35N., R7W., S 16 BT.

Land rolling and mountainous.

Soil stony 3 rd. and 4 th. rate.

Timber cedar and pinion.

Undergrowth, sage and juniper brush.

N 89°52'E. on a random line bet. secs. 15 and 22.

40.00 Set temp  $\frac{1}{4}$  sec. cor.

79.95 Intersect N. and S. line 08 lks. N. of the cor. of secs. 14, 15, 22, and 23.

Thence

S 89°55'W. on true line bet. secs. 15 and 22.

Ascend 82 ft. over NE. slope over rolling stony land, through heavy timber and brush undergrowth

10.00 Enter heavy cedar timber, bears N. and S.

Descend 40 ft. over SW. slope.

17.26 Dry wash 6 lks. wide, course N.; asc. NE. slope.

19.20 Top of spur slopes NW.; desc. 28 ft. over SW. slope.

22.19 Dry wash 5 lks. wide, course N.; asc. 48 ft. over E. slope.

34.82 Top of spur slopes N.

Descend 82 ft. over NW. slope to

39.97 Set an iron post 3 ft. long, 1 in. in diam. 22 ins. in the ground to bedrock supported in a mound of stone for  $\frac{1}{4}$  sec. cor., marked on brass cap

Survey of the Subdivision lines of Township 35 North., Range 7 West.

Chains

$\frac{1}{4}$  S 15  
S 22

1923

from which,

- A cedar 8 ins. in diam. bears N25 $\frac{1}{2}$ <sup>o</sup>W. 69 lks. dist., marked  $\frac{1}{4}$  S 15 BT.
- A cedar 6 ins. in diam. bears S52 $\frac{1}{4}$ <sup>o</sup>W. 16 lks. dist., marked  $\frac{1}{4}$  S 22 BT.

56.17

Draw course SW.

79.95

Ascend 17 ft. over SE. slope to  
 The cor. of secs. 15, 16, 21, and 22.  
 Land rolling and hilly.  
 Soil stony 3 rd. rate.  
 Timber, scattering juniper and heavy cedar and pinion  
 timber.  
 Undergrowth, sage and juniper brush.

N 0<sup>o</sup>02'W. bet. secs. 15 and 16.

Ascend 157 ft. over SW. slope over rolling stony land, through scattering timber and undergrowth.

4.25

Top of spur slopes SE.

32.88

Top of ridge bears NE. and SW.

40.00

Descend 119 ft. over NW. slope.

Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the ground for  $\frac{1}{4}$  sec. cor. marked on brass cap

$\frac{1}{4}$   
S 16 | S 15

1923

from which,

- A pine 12 ins. in diam. bears S73 $\frac{1}{2}$ <sup>o</sup>E. 52 lks. dist., marked  $\frac{1}{4}$  S 15 BT.
- A pine 12 ins. in diam. bears S9 $\frac{1}{4}$ <sup>o</sup>W. 63 lks. dist., marked  $\frac{1}{4}$  S 16 BT.

51.02

Head of draw course SW.;

Ascend 148 ft. over SE. slope.

59.59

Top of spur bears NE. and SW.; desc. 190 ft. over NW. slope

74.60

Head of draw course NW.

Ascend 9 ft. over SW. slope to.

80.00

Set an iron post 3 ft. long, 2 ins. in diam. 24 ins. in the ground to bedrock, supported in a mound of stone for cor. of secs. 9, 10, 15, and 16., marked on brass cap

T35N | R7W  
S 9 | S 10  
S 16 | S 15

1923

from which,

- A pine 8 ins. in diam. bears N81 $\frac{1}{2}$ <sup>o</sup>E. 81 lks. dist., marked T35N., R7W., S10 BT.
- A pine 12 ins. in diam. bears S32<sup>o</sup>E. 47 lks. dist., marked T35N., R7W., S15 BT.
- A pine 10 ins. in diam. bears S69<sup>o</sup>W. 103 lks. dist., marked T35N., R7W S16 BT.

Chains

A cedar 16 ins. in diam. bears N47 $\frac{1}{2}$ °W. 49 lks. dist., marked T35N., R7W., S 9 BT.  
Land rolling and hilly.  
Soil stony 3 rd. and 4 th. rate.  
Timber cedar and pinion.  
Undergrowth, sage and juniper brush.

40.00  
79.87

N 89°55'E. on a random line bet. secs. 10 and 15.  
Set temp.  $\frac{1}{4}$  sec. cor.  
Intersect N. and S. line 3 lks. S. of the cor. of secs. 10, 11, 14 and 15.

Thence  
S 89°54'W. on true line bet. secs. 10 and 15.  
Over rolling stony land, through timber and brush undergrowth.

.60 Dry wash 6 lks. wide, course NW.; asc. E. slope over rolling land.

2.24 Dry sand wash 8 lks. wide, course N.  
Ascend 38 ft. over E. slope.

32.50 Top of spur slopes N.; Desc. 18 ft. over W. slope

34.91 Dry wash 4 lks. wide, course NW.; Asc. 18 ft. over NE. slope

37.50 Point of spur slopes NW.; Desc. 11 ft. over SW. slope

39.08 Dry sand wash 10 lks. wide, course NE.

39.94 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$  S 10  
S 15

1923

from which,  
A pinion 14 ins. in diam. bears N52 $\frac{1}{2}$ °W. 39 lks. dist., marked  $\frac{1}{4}$  S 10 BT.

A pinion 14 ins. in diam. bears South 10 lks. dist., marked  $\frac{1}{4}$  S 15 BT.

45.90 Dry sand wash 10 lks. wide, course NE.; Asc. 60 ft. over SE. slope.

52.15 Dry sand wash 5 lks. wide, course SE.

57.00 Top of spur slopes N.; Desc. 34 ft. over W. slope.

59.95 Dry wash 6 lks. wide, course N.; Asc. 10 ft. over E. slope

69.00 Rim of cliff bears N. and S. Desc. 120 ft. over SW. slope.

79.87 The cor. of secs. 9, 10, 15, and 16.

Land rolling and hilly.  
Soil, stony 3 rd. and 4 th. rate.  
Timber, cedar and pinion.  
Undergrowth sage and juniper brush.

N 0°02'W. bet. secs. 9 and 10.  
Descend 127 ft. over NW. slope through scattering timber and brush undergrowth.


24.41 Dry wash 10 lks. wide, course NW.; Asc. 93 ft. over SW. slope

40.00 Set an iron post 3 ft. long, 1 in. in diam. 30 ins. in the ground for  $\frac{1}{4}$  sec. cor.; marked on brass cap




Survey of the Subdivision lines of Township 35 North, Range 7 West

Chains




from which,  
 A pine 12 ins. in diam. bears S44½°E. 82 lks. dist.,  
 marked ¼ S 10 BT  
 A pine 8 ins. in diam. bears S56½°W. 36 lks. dist.,  
 marked ¼ S 9 BT  
 48.13 Draw course NW.; Asc. 30 ft. over SW. slope.  
 64.91 Top of spur, slopes W.; Desc. 104 ft. over N. slope to  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 30 ins. in  
 the ground for cor. of secs. 3, 4, 9, and 10.,  
 marked on brass cap



from which,  
 A pine 8 ins. in diam. bears N 2°E 546 lks. dist.,  
 marked T35N., R7W., S 3 BT.  
 A pine 8 ins. in diam. bears S44½°E. 338 lks. dist.,  
 marked T35N., R7W., S 10 BT.  
 A cedar 12 ins. in diam. bears S6½°W. 580 lks. dist.,  
 marked T35N., R7W., S 9 BT.  
 No other trees within limits;  
 Deposite a lava stone 8x6x3 ins. marked with a cross (x)  
 at base of post.  
 Land rolling.  
 Soil stony 3 rd. and 4 th. rate.  
 Timber cedar and pine.  
 Undergrowth, sage brush.

40.00 N 89°54'E. on a random line bet. secs. 3 and 10  
 Set temp. ¼ sec. cor.  
 79.85 Intersect. N. and S. line 03 lks. S. of the cor. of secs.  
 2, 3, 10, and 11.  
 Thence  
 S 89°53'W. on true line bet. secs. 3 and 10  
 Over rolling stony land; through heavy timber and brush  
 undergrowth  
 18.80 Descend 46 ft. over SW. slope.  
 24.68 Dry wash 10 lks. wide, course NW.; Asc. over NE. slope  
 30.00 Descend W. slope. 69 ft.  
 35.68 Dry wash 10 lks. wide, course SW.  
 39.92 Set an iron post 3 ft. long, 1 in. in diam. 18 ins. in  
 the ground to bedrock, supported in a mound of  
 stone for ¼ sec. cor. marked on brass cap




from which,  
 A cedar 8 ins. in diam. bears N41°E 13 lks. dist., marked  
 ¼ S 3 BT

40 Survey of the Subdivision lines of Township 35 North., Range 7 West

Chains


A pinion 12 ins. in diam. bears S34 $\frac{1}{2}$ °E 41 lks. dist., marked  $\frac{1}{4}$  S 10 BT.  
 41.20 Same sand wash 15 lks. wide, course NW.  
 47.20 Descend 40 ft. over rolling W. slope.  
 54.45 Road bears N. and S.  
 63.40 Dry wash 12 lks. wide, course NW.  
 73.00 Leave heavy timber bears N. and S.; Enter scattering timber.  
 79.85 The cor. of secs. 3, 4, 9, and 10.  
 Land rolling  
 Soil stony 3 rd. and 4 th. rate.  
 Timber cedar and pinion.  
 Undergrowth, sage and juniper brush.

North on a random line bet. secs. 3 and 4.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.09 Intersect N. bdy. of Tp. 12 lks. E. of the cor. of secs. 3, 4, 33, and 34, hereinbefore described.  
 Thence  
 S 0°05'E. on true line bet. secs. 3 and 4.  
 Descend 36 ft. over rolling sandy and stony land, through scattering pine and cedar timber and sagebrush undergrowth.  
 39.43 A point from which a grainary bears N82°07'E.  
 40.09 Set an iron post 3 ft. long, 1 in. in diam. 24 ins. in the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap

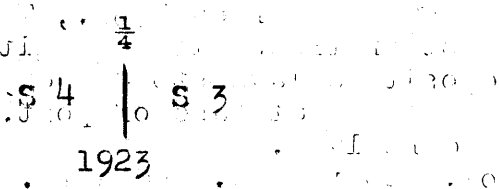

from which,  
 A cedar 10 ins. in diam. bears N55 $\frac{1}{2}$ °E. 82 lks. dist., marked  $\frac{1}{4}$  S 3 BT.  
 A cedar 10 ins. in diam. bears N28 $\frac{1}{2}$ °W. 93 lks. dist., marked  $\frac{1}{4}$  S 4 BT.  
 Descend 63 ft. over SW. slope.  
 59.28 Road bears N55°E. and S55°W.  
 71.78 From this point a grainary bears N35°23'E.  
 80.09 The cor. of secs. 3, 4, 9, and 10.  
 Land rolling.  
 Soil stony 3 rd. and 4 th. rate.  
 Timber cedar and pine.  
 Undergrowth sage brush.

From the cor. of secs. 4, 5, 32, and 33 on S. bdy. of Tp. hereinbefore described.  
 N 0°03'W. bet. secs. 32 and 33.  
 Descend 23 ft. over NE. slope over rolling stony land through scattering timber and dense undergrowth.  
 9.75 Dry wash 30 lks. wide, 3 ft. deep, course E. SE.  
 28.30 Dry wash 8 lks. wide, course E. NE.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap



Survey of the Subdivision lines of Township 35 North, Range 7 West.

Chains

from which,  
 A cedar 10 ins. in diam. bears N88<sup>1</sup>/<sub>2</sub>°W. 46 lks. dist.,  
 marked <sup>1</sup>/<sub>4</sub> S 32 BT  
 A cedar 14 ins. in diam. bears S82<sup>1</sup>/<sub>4</sub>°E. 117 lks. dist.,  
 marked <sup>1</sup>/<sub>4</sub> S 33 BT  
 45.75 Road from Nixon to Hurricane bears NE. and SW.; Asc. 72 ft.  
 over S. slope.  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 24 ins. in  
 the ground for cor. of secs. 28, 29, 32, and 33,  
 marked on brass cap

T35N	R7W
S29	S 28
S32	S33

1923

from which,  
 A pinion 8 ins. in diam. bears S69<sup>3</sup>/<sub>4</sub>°E. 231 lks. dist.,  
 marked T35N., R7W., S 33 BT.  
 A cedar 14 ins. in diam. bears S31<sup>1</sup>/<sub>2</sub>°W. 376 lks. dist.,  
 marked T35N., R7W., S 32 BT.  
 A cedar 4 ins. in diam. bears N42°W. 350 lks. dist.,  
 marked T35N., R7W., S 29 BT.  
 No other trees within limits.  
 Raise a mound of stone 2 ft. base, 1 1/2 ft. high W. of cor.  
 Land rolling.  
 Soil stony 3 rd. and 4 th. rate.  
 Timber cedar and pinion.  
 Undergrowth sage brush.  
 Note The NW. cor. of John Schmutz house bears S51<sup>1</sup>/<sub>4</sub>°E

40.00 East on a random line bet. secs. 28 and 33.  
 Set temp. <sup>1</sup>/<sub>4</sub> sec. cor.  
 79.94 Intersect N. and S. line at the cor. of secs. 27, 28, 33,  
 and 34.  
 Thence  
 West on true line bet. secs. 28 and 33.  
 Descend 489 ft. over W. slope over mountainous land,  
 through scattering timber and brush under-  
 growth.  
 39.97 Set an iron post 3 ft. long, 1 in. in diam. 30 ins. in  
 the ground for <sup>1</sup>/<sub>4</sub> sec. cor., marked on brass  
 cap

<sup>1</sup> / <sub>4</sub> S 28
+ S 33

1923

No trees within limits.  
 Raise a mound of stone 2 ft. base, 1 1/2 ft. high N. of cor.  
 From this point the NW. cor. of John Schmutz house bears  
 S65°W.  
 49.89 Wire fence bears N. and S.  
 54.74 Wire fence bears NE. and SW.  
 70.64 Dry wash 5 lks. wide, course S.  
 76.34 Wire fence bears NW. and SE.; Road along west side of fen-  
 ce bears NW. and SE.  
 Ascend 23 ft. over E. slope.  
 79.94 The cor. of secs. 28, 29, 32, and 33.  
 Land rolling and mountainous.  
 Soil stony 3 rd. and 4 th. rate.  
 Timber cedar and pinion  
 Undergrowth sage brush.

42 Survey of the Subdivision lines of Township 55 North., Range 7 West

Chains	<p>N 0°03'W. bet. secs. 28 and 29. Over rolling stony land, through scattering timber and brush undergrowth.</p> <p>7.95 Dry wash 3 lks. wide, course SE. 19.50 Dry sand wash 5 lks. wide, course SE. 26.90 Old road bears NW. and SE. Ascend 46 ft. over SW. slope. 40.00 Set an iron post 3 ft. long, 1 in. in diam. 30 ins. in the ground for <math>\frac{1}{4}</math> sec. cor., marked on brass cap</p> <div style="text-align: center;"> <math>\frac{1}{4}</math>  <table border="1"> <tr> <td>S29</td> <td>S28</td> </tr> <tr> <td colspan="2">1923</td> </tr> </table> </div> <p>from which, A cedar 14 ins. in diam. bears S51<math>\frac{1}{4}</math>°E. 331 lks. dist., marked <math>\frac{1}{4}</math> S 28 BT No other trees within limits. Deposit stone marked with a cross (x) at base of post. 43.50 Dry wash 10 lks. wide, course SW. 80.00 Set an iron post 3 ft. long 2 ins. in diam. 30 ins. in the ground for cor. of secs. 20, 21, 28, and 29, marked on brass cap</p> <div style="text-align: center;"> <table border="1"> <tr> <td>T35N</td> <td>R7W</td> </tr> <tr> <td>S20</td> <td>S21</td> </tr> <tr> <td>S29</td> <td>S28</td> </tr> </table> <p>1923</p> </div> <p>from which, A cedar 10 ins in diam bears N74<math>\frac{1}{4}</math>°E. 265 lks. dist., marked T35N., R7W., S 21 BT A cedar 4 ins. in diam. bears S12<math>\frac{1}{4}</math>°E. 428 lks. dist., marked BT. No other trees within limits. Deposit stone 14x8x7 ins, marked with a cross (x) at base of post. Land rolling. Soil stony <math>\frac{3}{4}</math> rd. and <math>\frac{1}{4}</math> th. rate. Timber, cedar and pinion. Undergrowth, sage and juniper brush.</p> <hr/> <p>40.00 East on a random line bet. secs. 21 and 28. 80.07 Set temp. <math>\frac{1}{4}</math> sec. cor. Intersect N. and S. line 05 lks. E. of the cor. of secs. 21, 22, 27, and 28. Thence S 89°58'W. on true line bet. secs. 21 and 28. Descend 16 ft. over SW. slope over stony mountainous land, through scattering timber and brush undergrowth.</p> <p>5.95 Draw course SE.; Asc. 73 ft. over NE. slope. 10.29 Top of spur slopes SE.; Descend 81 ft. over SW. slope. 19.23 Draw, course SE.; Ascend, 115 ft. over SE. slope. 28.64 Top of ridge bears N. and S.; Descend 155 ft. over W. slope 40.04 Set an iron post 3 ft. long, 1 in. in diam. 18 ins. in the</p>	S29	S28	1923		T35N	R7W	S20	S21	S29	S28
S29	S28										
1923											
T35N	R7W										
S20	S21										
S29	S28										

Survey of the Subdivision lines of Township 35 North., Range 7 West.

Chains

ground to bedrock, supported in a mound of stone for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$  S 21  
 $\frac{1}{4}$  S 28

1923

from which,

A pine 12 ins. in diam. bears N47 $\frac{1}{2}$ °E. 129 lks. dist., marked  $\frac{1}{4}$  S 21 BT.

A pine 14 ins. in diam. bears S53°E. 42 lks. dist., marked  $\frac{1}{4}$  S 28 BT.

48.92 Bottom of draw, course NW.; Ascend 110 ft. over NE. slope.

60.70 Top of spur slopes NW.; Descend 434 ft. over W. slope.

67.56 Rim-rock bears N. and S.

80.07 The cor. of secs. 20, 21, 28, and 29.

Land mountainous.

Soil stony 3 rd. and 4 th. rate.

Timber cedar and pinion.

Undergrowth, sage brush.

N 0°03'W. bet. secs. 20 and 21.

Along W. slope over stony hilly land, through scattering timber and undergrowth

6.00 Wash 8 lks. wide, course W.

10.00 Descend 34 ft. over NW. slope.

36.00 Dry sand wash 40 lks. wide 2 ft. deep, course W.

40.00 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap

S 20 | S 21

1923

from which,

A cedar 14 ins. in diam. bears S79 $\frac{1}{4}$ °E 450 lks. dist., marked  $\frac{1}{4}$  S 21 BT.

A cedar 5 ins. in diam. bears S61°W. 362 lks. dist., marked  $\frac{1}{4}$  S 20 BT.

59.60 Dry wash 8 lks. wide, course SW.

72.50 Dry wash 6 lks. wide, course W.

80.00 Set an iron post 3 ft. long, 2 ins. in diam. 30 ins. in the ground for cor. of secs. 16, 17, 20, and 21, marked on brass cap

T35N | R7W  
S17 | S16  
S20 | S21

1923

from which,

A pinion 8 ins. in diam. bears N39°E 518 lks. dist., marked T35N., R7W., S 16 BT.

A pinion 18 ins. in diam. bears S61 $\frac{1}{2}$ °E 226 lks. dist., marked T35N., R7W., S 21 BT.

No other trees within limits.

Deposite a stone 16x8x8 ins. marked with a cross (x) at base of monument.

Chains

Land hilly and rolling.  
Soil stony 3<sup>rd</sup>. and 4<sup>th</sup>. rate.  
Timber cedar and pinion

40.00 N 89°58'E. on a random line bet. secs.16 and 21.  
Set temp.  $\frac{1}{4}$  sec. cor.  
80.19 Intersect N. and S. line 08 lks. N. of the cor. of secs.  
15,16,21, and 22.  
Thence  
N 89°59'W. on true line bet. secs.16 and 21.  
Descend 66 ft. over SW. slope, over stony mountainous land  
through scattering timber and undergrowth.  
11.14 Bottom of draw course SW.; Asc. 100 ft. over SW. slope  
24.49 Top of spur, slopes S.; Desc. 192 ft. over W. slope.  
36.43 Wash course NW.  
40.00 Bottom of wash, course S.  
40.09 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the  
ground for  $\frac{1}{4}$  sec. cor. marked on brass cap

$\frac{1}{4}$  S 16  
S 21

1923

from which,  
A pine 6 ins. in diam. bears N41°E. 93 lks. dist.,  
marked  $\frac{1}{4}$  S 16 BT.  
A pine 8 ins. in diam. bears S71°W. 133 lks. dist.,  
marked  $\frac{1}{4}$  S 21 BT.  
Ascend 186 ft. over E. slope of spur.  
59.71 Top of spur, slopes S.; Descend 531 ft. over W. slope.  
80.19 The cor. of secs. 16, 17, 20, and 21.  
Land mountainous.  
Soil stony 3<sup>rd</sup>. and 4<sup>th</sup>. rate.  
Timber, cedar and pinion.  
Undergrowth, sage brush.

40.00 N 0°03'W. bet. secs. 16 and 17.  
Over level sandy land, through scattering timber and  
brush undergrowth.  
Set an iron post 3 ft. long, 1 in. in diam. 30 ins. in the  
ground for  $\frac{1}{4}$  sec. cor. marked on brass cap

$\frac{1}{4}$   
S 17 | S 16

1923

54.65 No trees within limits.  
80.00 Raise a mound of stone 2 ft base 1 $\frac{1}{2}$  ft. high W. of cor.  
Road bears NE. and SW.  
Set an iron post 3 ft. long, 2 ins. in diam. 28 ins. in the  
ground for cor. of secs. 8, 9, 16, and 17,  
marked on brass cap

T35N. R7W  
S 8 | S 9  
S17 | S16  
1923

Survey of the Subdivision lines of Township 55 North, Range 7 West

Chains

from which,  
 A cedar 16 ins. in diam. bears N23 $\frac{1}{2}$  $^{\circ}$ E. 53 lks. dist.;  
 marked T35N., R7W., S 9 BT.  
 A cedar 6 ins. in diam. bears S64 $^{\circ}$ E. 310 lks. dist.;  
 marked T35N., R7W.; S 16 BT.  
 A cedar 18 ins. in diam. bears N5 $\frac{1}{2}$  $^{\circ}$ W. 242 lks. dist.,  
 marked T35N., R7W.; S 8 BT.  
 No other trees within limits.  
 Deposite stone 12x6x6 ins. marked with a cross (x) at  
 base of post.  
 Land level and rolling.  
 Soil stony 3 rd. and 4 th. rate.  
 Timber cedar and juniper.  
 Undergrowth sage and juniper brush.

40.00 S 89 $^{\circ}$ 59'E. on a random line bet. secs. 9 and 16.  
 80.12 Set temp.  $\frac{1}{4}$  sec. cor.  
 Intersect N. and S. line 10 lks. S. of the cor. of secs.  
 9, 10, 15, and 16.  
 Thence  
 S 89 $^{\circ}$ 57'W. on true line bet. secs. 9 and 16.  
 Descend 107 ft. over NW. slope over rolling stony land,  
 through scattering timber and brush undergrowth  
 8.96 Bottom of draw, course NW.; Ascend 73 ft. over NE. slope.  
 18.00 Descend 46 ft.  
 23.00 Ascend 16 ft. over E. slope.  
 40.06 Set an iron post 3 ft. long, 1 in. in diam. over cross  
 (x) on exposed surface of bedrock, supported in  
 a mound of stone for  $\frac{1}{4}$  sec. cor., marked on brass  
 cap

$$\frac{1}{4} \frac{S 9}{S 16}$$


1923

from which,  
 A pine 16 ins. in diam. bears N52 $^{\circ}$ E. 94 lks. dist.,  
 marked  $\frac{1}{4}$  S 9 BT.  
 A pine 14 ins. in diam. bears S 41 $\frac{1}{4}$  $^{\circ}$ E. 128 lks. dist.,  
 marked  $\frac{1}{4}$  S 16 BT.  
 41.30 Descend 377 ft. over NW. slope over rolling bench land.  
 57.22 Wash course SW.  
 64.67 Road bears NE. and SW.  
 Ascend 13 ft. over SE. slope.  
 80.12 The cor. of secs. 8, 9, 16; and 17.  
 Land rolling and hilly.  
 Soil stony 3 rd. and 4 th. rate.  
 Timber cedar and pinion.  
 Undergrowth sage brush.

N 0 $^{\circ}$ 03'W bet. secs. 8 and 9.  
 Ascend 307 ft. over rolling S. slope, through scattering  
 timber and undergrowth.  
 8.20 At this point the slope changes from S. to SW.  
 16.50 Dry wash 10 lks. wide, course SW.  
 19.50 Top of spur slopes SW.; continue ascent over S. slope  
 28.00 Top of spur bears E.; Descend 135 ft. over N. slope.


Chains

- 30.79 Dry ravine course NE.; Asc. over SE. slope. about 22 ft.
- 36.90 Enter heavy timber bears E. and W.
- 39.00 Top of spur bears E. desc. N. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 20 ins. in the ground to bedrock, supported in a mound of stone for  $\frac{1}{4}$  sec. cor., marked on brass cap



from which,

- A pinion 6 ins. in diam. bears  $N79\frac{1}{4}^{\circ}E.$  38 lks. dist., marked  $\frac{1}{4}$  S 9 BT.
- A pinion 16 ins. in diam. bears  $S10\frac{3}{4}^{\circ}W.$  72 lks. dist., marked  $\frac{1}{4}$  S 8 BT.
- 41.88 Dry wash 14 lks. wide, course E.; Asc. 11 ft. over S. slope.
- 47.30 Top of spur bears E.; Desc 5 ft. over N. slope.
- 48.93 Dry wash 8 lks. wide, course E. SE; Ascend over SW. slope.
- 51.80 Dry wash 6 lks. wide, 3 ft. deep, course SE.; Asc. 93 ft.
- 62.50 Top of spur bears E. NE.; Desc. 23 ft. over NW. slope.
- 73.00 Old road bears NE. and SW. ; Ascend 41 ft. over SE. slope.
- 79.75 Dry wash 6 lks. wide, course SE.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 14 ins. in the ground for cor. of secs. 4, 5, 8, and 9., marked on brass cap



1923

from which,

- A pinion 12 ins. in diam. bears  $N31\frac{1}{4}^{\circ}E.$  56 lks. dist., marked T35N., R7W., S 4 BT.
- A pinion 10 ins. in diam. bears  $S65\frac{3}{4}^{\circ}E.$  64 lks. dist., marked T35N., R7W., S 9 BT.
- A pinion 10 ins. in diam. bears  $S15\frac{1}{4}^{\circ}W.$  64 lks. dist., marked T35N., R7W., S 8 BT.
- A pinion 14 ins. in diam. bears  $N77\frac{3}{4}^{\circ}W.$  30 lks. dist., marked T35N., R7W., S 5 BT.
- Land rolling and hilly.
- Soil stony 3 rd. and 4 th. rate.
- Timber cedar and pinion.
- Undergrowth, sage and juniper brush.


- 40.00 N  $89^{\circ}57'E.$  on a random line bet. secs. 4 and 9. Set temp.  $\frac{1}{4}$  sec. cor.
- 80.24 Intersect N. and S. line at the cor. of secs. 3, 4, 9, and 10 Thence S  $89^{\circ}57'W.$  on true line bet. secs. 4 and 9. Descend 23 ft. over SW. slope over rolling stony land, through scattering timber and undergrowth.
- 16.19 Dry wash 8 lks. wide, course SW.
- 16.69 Road bears NE. and SW.; Ascend 88 ft. over NE. slope
- 40.12 Set an iron post 3 ft. long, 1 in. in diam. with sand stone 12x8x3 ins. marked with a cross (x) at base 18 ins. in the ground to bedrock, supported in a



Survey of the Subdivision lines of Township 35 North., Range 7 West.

Chains

mound of stone for  $\frac{1}{4}$  sec. cor., marked on brass cap



1923

from which,  
 A cedar 16 ins. in dia, bears N56°W. 100 lks. dist.,  
 marked  $\frac{1}{4}$  S 4 BT.  
 A pine 8 ins. in diam. bears S 0 $\frac{1}{2}$ °W 40 lks. dist.,  
 marked  $\frac{1}{4}$  S 9 BT.  
 Ascend 125 ft. over SE. slope.  
 Dim road bears NE. and SW.  
 The cor. of secs. 4, 5, 8, and 9.  
 Land rolling.  
 Soil stony clay loam 3 rd. and 4 th. rate.  
 Timber cedar and pine.  
 Undergrowth sage brush.

72.47  
80.24


N 0°05'W. on a random line bet. secs. 4 and 5  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 Intersect N. bdy. of Tp. 32 lks. W. of the cor. of secs. 4, 5,  
 32, and 33, hereinbefore described.

40.00  
80.10

Thence  
 S 0°09'W. on true line bet. secs. 4 and 5.  
 Over rolling stony land, through scattering timber and  
 brush undergrowth.

31.37  
40.10

Dry wash 6 lks. wide, course E.  
 Set an iron post 3 ft. long, 1 in. in diam. 16 ins. in the  
 ground to bedrock, supported in a mound of stone  
 for  $\frac{1}{4}$  sec. cor., marked on brass cap



1923

from which,  
 A pinion 14 ins. in diam. bears N18°E. 48 lks. dist.,  
 marked  $\frac{1}{4}$  S 4 BT.  
 A pinion 10 ins. in diam. bears S58 $\frac{1}{4}$ °W. 78 lks. dist.,  
 marked  $\frac{1}{4}$  S 5 BT.

49.95  
54.10

Old road bears NE. and SW.  
 Enter heavy timber bears E. and W.; Asc. 82 ft. over  
 N. slope.

67.10  
70.35  
80.10

Top of spur bears E.; Desc. 57 ft. over S. slope.  
 Dry wash 10 lks. wide, course E.  
 The cor. of secs. 4, 5, 8, and 9.  
 Land rolling.  
 Soil stony 3 rd, and 4 th rate.  
 Timber cedar and pinion.  
 Undergrowth, sage and juniper brush.

From the cor. of secs. 5, 6, 31, and 32 on S. bdy. of Tp.  
 hereinbefore described.

N 0°03'W. bet. secs. 31 and 32.

Descend 105 ft. over NE. slope over rolling stony land,

Chains

through scattering timber and undergrowth.  
 30.00 Foot of descent. Ascend 52 ft.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 10 ins. in the  
 ground to bedrock, supported in a mound of stone  
 for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$   
 S 31 | S 32  
 1923

from which,  
 A cedar 8 ins. in diam. bears N35 $\frac{1}{2}$ °E 64 lks. dist.,  
 marked  $\frac{1}{4}$  S 32 BT.  
 A cedar 6 ins. in diam. bears S89 $\frac{1}{2}$ °W. 73 lks. dist.,  
 marked  $\frac{1}{4}$  S 31 BT.  
 45.00 Top of ascent; Desc. 77 ft. over N. slope.  
 60.00 Foot of descent. Asc. 40 ft. over S. slope  
 70.00 Top of ascent.; Desc. 57 ft. over N. slope.  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 30 ins. in  
 the ground for cor. of secs. 29, 30, 31, and 32.,  
 marked on brass cap

T35N | R7W  
 S 30 | S 29  
 S 31 | S 32

1923

No trees within limits.  
 Raise a mound of stone 2 ft. base, 1 $\frac{1}{2}$  ft. high W. of cor.  
 Land rolling.  
 Soil stony 3 rd. rate.  
 Timber scattering cedar.  
 Undergrowth sage brush.

East on a random line bet. secs. 29 and 32.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.00 Intersect N. and S. line 12 lks. N. of the cor. of secs.  
 28, 29, 32, and 33.  
 Thence  
 N 89°55'W. on true line bet. secs. 29 and 32.  
 Ascend. 88 ft. over SE. slope over rolling stony land;  
 through scattering timber and brush undergrowth.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 30 ins. in the  
 ground for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$  S 29  
 $\frac{1}{4}$  S 32

1923

from which,  
 A pine 12 ins. in diam. bears N44°W. 55 lks. dist.,  
 marked  $\frac{1}{4}$  S 29 BT.  
 A pine 10 ins. in diam. bears S20°E. 38 lks. dist.,  
 marked  $\frac{1}{4}$  S 32 BT.

This cor. is on top of spur, slopes NE.; Desc. 141 ft. over

Survey of the Subdivision lines of Township 35 North., Range 7 West

Chains

54.82 NW. slope.  
Foot of descent; Leave rolling land, bears N. and S.;  
enter level land.  
80.00 The cor. of secs. 29, 30, 31, and 32.  
Land level and rolling.  
Soil stony 3 rd. rate.  
Timber cedar and pine.  
Undergrowth sage brush.

40.00 West on a random line bet. secs. 30 and 31.  
Set temp  $\frac{1}{4}$  sec. cor.  
78.76 Intersect W. bdy. of Tp. 09 lks. S. of the cor. of secs. 25,  
30, 31, and 36, which is an iron post 2 ins. in  
diam. firmly set in a mound of ston, properly  
marked and witnessed by four bearing trees one  
each NE., SE., SW., and NW. of cor.  
Thence  
S  $89^{\circ}56'$  E. on true line bet. secs. 30 and 31.  
Descend 101 ft. over SE. slope over rolling stony land,  
through scattering timber and brush under-  
growth.  
11.78 Wash course NE.; Ascend 35 ft. over NW. slope.  
38.76 Set an iron post 3 ft. long, 1 in. in diam. 30 ins. in the  
ground for  $\frac{1}{4}$  sec. cor. marked on brass cap

$\frac{1}{4}$  S 30  
 $\frac{1}{4}$  S 31

1923

from which,  
A pine 6 ins. in diam. bears  $N74^{\circ}W$ . 77 lks. dist.  
marked  $\frac{1}{4}$  S 30 BT.  
A cedar 6 ins. in diam. bears  $S54^{\circ}W$ . 49 lks. dist.,  
marked  $\frac{1}{4}$  S 31 BT.  
Descend 116 ft. over SE. slope.  
44.97 Bottom of draw course NE.; Asc. 21 ft. over NW. slope.  
48.95 Top of spur bears NE.; Desc. 142 ft. over SE. slope. to  
78.76 The cor. of secs. 29, 30, 31, and 32.  
Land rolling and hilly.  
Soil stony 3 rd. rate.  
Timber cedar and pine.  
Undergrowth. sage brush.

20.00 N  $0^{\circ}03'$  W. bet. secs. 29 and 30.  
Over level sandy and stony land, through scattering  
timber and undergrowth.  
25.00 Leave level land bears NE. and SW.; Enter hilly land.; Asc.  
29 ft. over SE. slope.  
28.17 Top of ascent; Desc. 20 ft. over N. slope.  
Dry wash 6 lks. wide, 8 ft. deep, course E.; Asc. 80 ft.  
over S. slope.  
40.00 Set an iron post 3 ft. long, 1 in. in diam. 30 ins. in the  
ground for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$   
S 30 | S 29

1923

Survey of the Subdivision lines of Township 35 North., Range 7 West.

Chains

from which,  
 A cedar 6 ins. in diam bears N59 $\frac{1}{4}$ °E 126 lks. dist.,  
 marked  $\frac{1}{4}$  S 29 BT.  
 A cedar 6 ins. in diam. bears S77°W 46 lks. dist.,  
 marked  $\frac{1}{4}$  S 30 BT.  
 42.66 Top of spur slopes E.; Desc. 38 ft. over rolling N. slope.  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 30 ins. in the  
 ground for cor. of secs. 19, 20, 29, and 30, marked  
 on brass cap

T 35N	R7W
S19	S20
S30	S29

1923

from which,  
 A cedar 10 ins. in diam. bears S61 $\frac{1}{4}$ °E. 200 lks. dist.,  
 marked T35N., R7W., S29 BT.  
 A cedar 8 ins. in diam. bears S58 $\frac{3}{4}$ °W. 214 lks. dist.,  
 marked T35N., R7W., S 30 BT.  
 A pine 10 ins. in diam. bears N40 $\frac{3}{4}$ °W. 380 lks. dist.,  
 marked, T35N., R7W S 19 BT.  
 No other trees within limits.  
 Raise a mound of stone 2 ft. base, 1 $\frac{1}{2}$  ft. high W. of cor.  
 Land rolling.  
 Soil stony 3 rd. rate.  
 Timber cedar and pine.  
 Undergrowth sag brush.

40.00

S 89°55'E. on a random line bet. secs. 20 and 29.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.00 Intersect N. and S. line 03 lks. N. of the cor. of secs.  
 20, 21, 28, and 29.

7.55

Thence  
 N 89°54'W. on true line bet. secs. 20 and 29.  
 Descend 75 ft. over W. slope over rolling stony land,  
 through scattering timber and undergrowth  
 Old road bears N. and S.  
 14.00 Dry wash 10 lks. wide, course SW.  
 36.00 Dry sand wash 8 lks. wide, course S.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 30 ins. in  
 the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$ S 20
$\frac{1}{4}$ S 29

1923

69.10

No trees within limits.  
 Raise a mound of stone 2 ft. base, 1 $\frac{1}{2}$  ft. high N. of cor.  
 Continue gradual descent over W. slope 44 ft.  
 80.00 Dry wash 8 lks. wide 8 ft. deep, course SE.  
 The cor. of secs. 19, 20, 29, and 30.

Land rolling.  
 Soil stony 3 rd. rate.  
 Timber cedar and pinion.  
 Undergrowth sage brush.

Survey of the Subdivision lines of Township 35 North., Range 7 West

Chains

40.00 N 89°56'W. on a random line bet. secs.19 and 30.  
 78.83 Set temp.  $\frac{1}{4}$  sec. cor.  
 Intersect W. bdy. of Tp. 11 lks. N. of the cor. of secs. 19, 24, 25, and 30. which is an iron post 2 ins. in diam. set in a mound of stone, properly marked on brass cap and witnessed by four bearing trees one in each sec NE., SE., SW., and NW. of cor.  
 Thence N. 89°59'E. on a true line bet. Secs. 19 & 30.  
 29.88 Descend 211 ft. over NE. slope over rolling stony land, through scattering timber and brush undergrowth  
 38.83 Dry sand wash 10 lks. wide, course SE.  
 Set an iron post 3 ft. long, 1 in. in diam. 30 ins. in the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$   $\frac{S 19}{S 30}$

1923

from which,  
 A cedar 8 ins. in diam. bears N89 $\frac{1}{2}$ °E 64 lks. dist., marked  $\frac{1}{4}$  S 19 BT.  
 A cedar 7 ins. in diam. bears S23 $\frac{1}{4}$ °W. 64 lks. dist., marked  $\frac{1}{4}$  S 30 BT.  
 46.81 Dry ravine 10 lks. wide, course NE.; Descend 100 ft.  
 73.02 Top of spur slopes NE.; Descend 96 ft.  
 78.83 The cor. of secs. 19, 20, 29, and 30.  
 Land rolling and hilly.  
 Soil stony 3 rd. rate.  
 Timber cedar and pinion.  
 Undergrowth sage brush.

N 0°03'W. bet. secs. 19 and 20.  
 Over level stony land, through scattering timber and brush undergrowth.  
 12.80 Dry wash 20 lks. wide 15 ft. deep, course SE; Leave timber bears E. and W.  
 30.00 Enter scattering cedar timber bears E. and W.  
 39.70 Dry 9 lks. wide 2 ft. deep, course E.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 30 ins. in the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$

S 19 | S 20

1923

from which,  
 A pine 6 ins. in diam. bears N56 $\frac{1}{2}$ °E 158 lks. dist., marked  $\frac{1}{4}$  S 20 BT.  
 A cedar 12 ins. in diam. bears N86 $\frac{3}{4}$ °W. 63 lks. dist., marked  $\frac{1}{4}$  S 19 BT.  
 59.99 Bottom of draw, course SE.; Asc. 286 ft. over SW. slope over hilly land.  
 76.70 Top of spur bears SE.; Desc. gradually over NE. slope.  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 10 ins. in the ground to bedrock, supported in a mound of stone for cor. of secs: 17, 18, 19, and 20; marked on brass cap

Chains

T35N	R7W
S 18	S 17
S 19	S 20

1923

from which,  
 A cedar 12 ins. in diam. bears N75°E 47 lks. dist.,  
 marked T35N.,R7W.,S 17 BT.  
 A cedar 12 ins. in diam. bears S80½°E 116 lks. dist.,  
 marked T35N.,R7W.,S 20 BT.  
 A pine 10 ins. in diam. bears N17°W. 234 lks. dist.,  
 marked T35N.,R7W.,S 18 BT.  
 No other trees within limits.  
 Land; rolling. Soil; rocky, 4th. rate.  
 Timber; cedar and pinyon.  
 Undergrowth; sagebrush.

40.00 S 89°54'E. on a random line bet. secs. 17 and 20  
 Set temp ¼ sec. cor.  
 79.88 Intersect N. and S. line 03 lks. S. of the cor. of secs.  
 16, 17, 20, and 21.  
 Thence  
 N 89°55'W. on true line bet. secs. 17 and 20.  
 Descend 40 ft. over W. slope, through scattering timber  
 and brush undergrowth.  
 16.40 Dry sand wash 8 lks. wide, course S.  
 30.50 Old road bears NE. and SW.  
 Ascend 122 ft. over E. slope.  
 39.94 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in  
 the ground for ¼ sec. cor., marked on brass cap

¼ S 17
¼ S 20

1923

from which,  
 A cedar 12 ins. in diam. bears N4½°E 78 lks. dist.,  
 marked ¼ S 17 BT.  
 A pinion 8 ins. in diam. bears S8½°E 45 lks. dist.,  
 marked ¼ S 20 BT.  
 40.00 Top of spur slopes S.; Desc. 85 ft. over W. slope.  
 47.50 Dry wash 6 lks. wide, course S.; Asc. 210 ft. over E. slope  
 61.00 Top of spur slopes S.; Desc. W. slope 93 ft. to  
 66.90 Bottom of canyon, bears NW. and SE.; cross wash 20 lks.  
 wide 3 ft. deep, course S. SE.  
 Ascend 46 ft. over E. slope.  
 76.70 Dry wash 10 lks. wide, 3 ft. deep, course SE.  
 79.88 The cor. of secs. 17, 18, 19, and 20.  
 Land rolling and hilly.  
 Soil stony 3 rd. and 4 th rate.  
 Timber cedar and pinion.  
 Undergrowth sage and juniper brush.

40.00 S 89°59'W. on a random line bet. secs. 18 and 19.  
 Set temp ¼ sec. cor.  
 78.79 Intersect W. bdy. of Tp. 08 lks. S. of the cor. of secs.  
 13, 18, 19, and 24., which is an iron post 2 ins.  
 in diam. set firmly in a mound of stone, properly  
 marked on brass cap and witnessed by four

Survey of the Subdivision lines of Township 35 North., Range 7 West.

Chains							
	<p>bearing trees, one in each sec, NE.,SE.,SW.,and NW.of post.</p> <p>Thence                      S 89°58'E.on true line bet. secs. 18 and 19.                      Descend 174 ft. over E. slope over rolling stony land, through scattering timber and undergrowth.</p>						
38.79	<p>Set an iron post 3 ft. long, 1 in. in diam. 2 ins.in the ground to bedrock,supported in a mound of stone for <math>\frac{1}{4}</math> sec. cor.,marked on brass cap</p> <div style="text-align: center;"> <math display="block">\frac{1}{4} \begin{array}{c} S 18 \\ S 19 \end{array}</math> <p>1923</p> </div>						
	<p>Deposite a limestone 10x8x4 ins.,marked with a cross (x) at base of monument. from which,                      A pine 12 ins. in diam. bears N34<math>\frac{1}{4}</math>°W.71 lks. dist., marked <math>\frac{1}{4}</math> S 18 BT.                      A pine 12 ins. in diam. bears S21°W 69 lks. dist., marked <math>\frac{1}{4}</math> S 19 BT.</p>						
46.22	Bottom of draw,course SE.;Ascend 294 ft. over SW. slope						
74.01	Top of spur slopes SE.;Desc.96 ft. over NE. slope						
78.79	<p>The cor. of secs.17,18,19,and 20                      Land rolling and hilly.                      Soil stony 3 rd. and 4 th. rate.                      Timber,scattering cedar and pinion.                      Undergrowth sage brush.</p>						
<hr/>							
	<p>N 0°03'W.bet. secs.17 and 18.                      Ascend SE. slope 99 ft. over rolling stony land,through scattering timber and undergrowth</p>						
14.68	Top of spur slopes SE.;Descend 68 ft. over NE. slope						
23.39	Bottom of draw,course SE.;Ascend 141 ft. over SW.slope.						
40.00	<p>Set an iron post 3 ft. long, 1 in. in diam.30 ins.in the ground for <math>\frac{1}{4}</math> sec. cor.,marked on brass cap</p> <div style="text-align: center;"> <math display="block">\frac{1}{4} \begin{array}{c} S 18 \\ S 17 \end{array}</math> <p>1923</p> </div>						
	<p>from which,                      A cedar 8 ins. in diam. bears S62°E 79 lks. dist., marked <math>\frac{1}{4}</math> S 17 BT.                      A pine 10 ins. in diam. bears S46<math>\frac{1}{4}</math>°W. 69 lks. dist., marked <math>\frac{1}{4}</math> S 18 BT.</p>						
44.30	Top of spur slopes SW; Desc. 209 ft.over NW. slope.						
56.92	Dry sand wash 8 lks. wide, course W.						
65.00	Leave scattering timber bears E. and W.; Enter heavy timber.						
80.00	<p>Set an iron post 3 ft. long, 2 ins. in diam.30 ins. in the ground for cor. of secs.7,8,17,and 18.,mk'd on brass cap</p> <div style="text-align: center;"> <table border="1"> <tr> <td>T35N</td> <td>R7W</td> </tr> <tr> <td>S 7</td> <td>S 8</td> </tr> <tr> <td>S.18</td> <td>S 17</td> </tr> </table> <p>1923</p> </div>	T35N	R7W	S 7	S 8	S.18	S 17
T35N	R7W						
S 7	S 8						
S.18	S 17						

## 54 Survey of the Subdivision lines of Township 35 North., Range 7 West.

Chains


	<p>from which,  A cedar 14 ins. in diam. bears N81°E 209 lks. dist.,  marked T35N.,R7W.,S 8 BT:  A cedar 20 ins. in diam. bears N3<math>\frac{1}{4}</math>°W. 573 lks. dist.,  marked T35N.,R7W.,S 7 BT.  No other trees within limits.  Deposite a stone 16x10x6 ins, marked with a cross (x)  at base of post:  Land rolling and hilly.  Soil stony 3 rd. and 4 th. rate.  Timber, cedar and pinion.  Undergrowth sage and juniper brush.</p>
40.00	S 89°55'E. on a random line bet. secs. 8 and 17. Set temp. $\frac{1}{4}$ sec. cor.
79.90	Intersect N. and S. line 05 lks. S. of the cor. of secs. 8, 9, 16, and 17: Thence N89°57'W. on true line bet. secs. 8 and 17. Over rolling stony land, through scattering timber and brush undergrowth.
9.00	Dry sand wash 5 lks. wide, course SE.; Ascend 315 ft. over NE. slope.
21.50	Top of spur, slopes NW.; continue ascent.
34.10	Dry wash 5 lks. wide, course NE.
38.40	Top of rim, bears NW. and SE.
39.95	Set an iron post 3 ft. long, 1 in. in diam. 18 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4} \begin{array}{l} S 8 \\ S 17 \end{array}$ 1923
	<p>from which,  A pinion 6 ins. in diam. bears N46°W. 43 lks. dist.,  marked <math>\frac{1}{4}</math> S 8 BT.  A pinion 6 ins. in diam. bears S24<math>\frac{1}{4}</math>°E. 65 lks. dist.,  marked <math>\frac{1}{4}</math> S 17 BT.</p>
41.20	Top of ascent, thence over rolling land. slopes SE.
51.00	Enter flat bears N. and S.
79.90	The cor. of secs. 7, 8, 17, and 18. Land level and rolling Soil stony 3 rd. and 4 th. rate. Timber cedar and pinion. Undergrowth sage and juniper brush.
40.00	N 89°58'W. on a random line bet. secs. 7 and 18. Set temp. $\frac{1}{4}$ sec. cor.
78.63	Intersect W. bdy. of Tp. 12 lks. N. of the cor. of secs. 7, 12, 13, and 18., which is an iron post 2 ins. in diam. firmly set in a mound of stone, properly marked on brass cap, and witnessed by four bearing trees, one in each sec. NE., SE., SW., and NW. of cor
	Thence N 89°57'E. on true line bet. secs. 7 and 18. Over rolling stony land, through heavy timber and brush undergrowth.
4.13	Descend 165 ft. over E. slope.
4.30	Leave heavy timber bears N. and S.



Survey of the Subdivision lines of Township 35 North., Range 7 West

Chains

- 14.37 Dry wash 18 lks. wide, course S. ;Ascend 126 ft. over NW. slope.
- 21.83 Top of spur bears SW.; Desc. 25 ft. to
- 25.35 Foot of descent.; Asc. 46 ft. over NE. slope.
- 35.33 Top of spur bears SE.; Desc. 100 ft. over NE. slope.
- 38.63 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the ground for  $\frac{1}{4}$  sec. cor. marked on brass cap



1923

from which,  
 A cedar 6 ins. in dia, bears N22°W. 160 lks. dist., marked  $\frac{1}{4}$  S 7 BT.

A pinion 14 ins. in diam. bears S52°W. 166 lks. dist., marked  $\frac{1}{4}$  S 18 BT.

- 48.63 Foot of descent; leave hilly land bears N. and S.; Enter nearly level land.

- 73.63 Dry sand wash 6 lks. wide, course SW.

78.63 The cor. of secs. 7, 8, 17, and 18  
 Land rolling and hilly.  
 Soil stony 4 th. rate.  
 Timber, cedar and pinion.  
 Undergrowth, sage brush and juniper.


N 0°03'W. bet. secs. 7 and 8.

Over rolling stony land, through scattering timber and brush undergrowth.

- 26.20 Old road bears NE. and SW.

- 27.70 Dry wash 10 lks. wide, course SW.

- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap



1923

from which,

A cedar 14 ins. in diam. bears N82°W. 92 lks. dist., marked  $\frac{1}{4}$  S 7 BT.

No other trees within limits.

Deposite stone 14x10x8 ins, marked with a cross (x) at base of post.


- 43.15 Dry wash 8 lks. wide, course SE.

- 50.00 Ascend 126 ft. over SE. slope.

- 55.00 Leave scattering timber, bears E. and W.; Enter heavy timber.

- 70.00 Top of ascent, thence over rolling land.

- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 28 ins. in the ground for cor. of secs. 5, 6, 7, and 8., marked on brass cap



1923

Chains

from which  
 A pinion 7 ins. in diam. bears  $N61\frac{1}{2}^{\circ}E$ . 69 lks. dist.,  
 marked T35N., R7W., S 5 BT.  
 A pinion 8 ins. in diam. bears  $S39\frac{3}{4}^{\circ}E$  75 lks. dist.,  
 marked T35N., R7W., S 8 BT.  
 A cedar 14 ins. in diam. bears  $S11^{\circ}W$ . 42 lks. dist.,  
 marked T35N., R7W., S 7 BT.  
 A cedar 10 ins. in diam. bears  $N57\frac{1}{2}^{\circ}W$ . 131 lks. dist.,  
 marked T35N., R7W., S 6 BT.

Land rolling.

Soil stony 3 rd. rate.

Timber cedar and pinion.

Undergrowth, sage and juniper brush.

40.00 S  $89^{\circ}57'E$ . on a random line bet. secs. 5 and 8.  
 79.90 Set temp  $\frac{1}{4}$  sec. cor.  
 Intersect N. and S. line 12 lks. N. of the cor. of secs.  
 4, 5, 8, and 9.

Thence

N  $89^{\circ}52'W$ . on true line bet. secs. 5 and 8.Ascend 49 ft. over NE. slope over rolling stony land,  
 through scattering timber and brush undergrowth

5.10 Top of hill, bears SE.; Desc. 65 ft. over SW. slope.

16.27 Dry sand wash 10 lks. wide, course S.; Asc. 77 ft. over E.  
 slope.

21.95 Top of spur slopes S.; Desc. 106 ft. over W. slope.

39.95 Set an iron post 3 ft. long, 1 in. in diam. 18 ins. in  
 the ground to bedrock, supported in a mound of  
 stone for  $\frac{1}{4}$  sec. cor. marked on brass cap
$$\frac{1}{4} \frac{S 5}{S 8}$$

1923

from which,

A cedar 12 ins. in diam. bears  $S38^{\circ}W$ . 142 lks. dist.,  
 marked  $\frac{1}{4}$  S 8 BT.A cedar 6 ins. in diam. bears  $N57\frac{1}{4}^{\circ}W$ . 234 lks. dist.,  
 marked  $\frac{1}{4}$  S 5 BT.

40.14 Dry wash 8 lks. wide, course S.; Asc. 76 ft. over E. slope.

44.30 Enter heavy timber bears N. and S.

53.05 Dry sand wash 5 lks. wide, course SE.

59.90 Leave heavy timber, bears N. and S.; Enter scattering  
 timber.

79.90 The cor. of secs. 5, 6, 7, and 8.

Land rolling.

Soil stony 3 rd. rate.

Timber cedar and pinion.

Undergrowth sage brush.


40.00 S  $89^{\circ}57'W$ . on a random line bet. secs. 6 and 7.78.27 Set temp  $\frac{1}{4}$  sec. cor.Intersect W. bdy. of Tp. 07 lks. N. of the cor. of secs.  
 1, 6, 7, and 12, which is an iron post 2 ins. in  
 diam. projecting 12 ins. above ground, properly  
 marked, and witnessed by four bearing trees,  
 one in each sec. NE., SE., SW., and NW. of cor

Survey of the Subdivision lines of Township 35 North., Range 7 West

Chains

Thence  
 N 89°54'E. on true line bet. secs. 6 and 7.  
 Descend 104 ft. over NE. slope, over rolling stony land  
 through scattering undergrowth and heavy cedar  
 and pinion timber.  
 Dry sand wash 8 lks. wide, course SE.  
 Set an iron post 3 ft. long, 1 in. in diam. 12 ins. in the  
 ground to bedrock, supported in a mound of stone  
 for  $\frac{1}{4}$  sec. cor. marked on brass cap

34.69  
38.27



1923

from which,  
 A cedar 14 ins. in diam. bears N52 $\frac{1}{2}$ °E. 91 lks. dist.,  
 marked  $\frac{1}{4}$  S 6 BT.  
 A cedar 14 ins. in diam. bears S61°E 91 lks. dist.,  
 marked  $\frac{1}{4}$  S 7 BT.  
 Ascend 16 ft. over W. slope.  
 Top of spur slopes S.; desc. 34 ft. over E. slope.  
 Foot of descent; Leave rolling land, bears N. and S.; Enter  
 level land.  
 Old road bears NE. and SW.  
 The cor. of secs. 5, 6, 7, and 8.  
 Land rolling and level.  
 Soil stony 3 rd. and 4 th. rate.  
 Timber, cedar and pinion.  
 Undergrowth, sage and juniper brush.

39.67  
41.00


45.07  
78.27

N 0°09'E. on a random line bet. secs. 5 and 6.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 Intersect N. bdy. of Tp. 08 lks. E. of the cor. of secs. 5, 6,  
 31 and 32., hereinbefore described.

40.00  
79.90

Thence  
 S 0°06'W. on true line bet. secs. 5 and 6.  
 Descend 34 ft. over SW. slope over rolling stony land,  
 through scattering timber and brush undergrowth,  
 Old road at foot of descent, bears NW. and SE.; Asc. 34 ft.  
 over NE. slope.  
 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the  
 ground for  $\frac{1}{4}$  sec. cor. marked on brass cap

27.00  
39.90



1923

from which,  
 A cedar 5 ins. in diam. bears N63 $\frac{1}{4}$ °E. 120 lks. dist.,  
 marked  $\frac{1}{4}$  S 5 BT.  
 A cedar 3 ins. in diam. bears S64 $\frac{1}{2}$ °W. 49 lks. dist.,  
 marked BT.  
 Dry wash 8 lks. wide 3 ft. deep, course SW.; Leave hilly  
 land bears E. and W.; Enter level land.  
 Old road bears NE. and SW.  
 The cor. of secs. 5, 6, 7, and 8.  
 Land level and rolling.  
 Soil stony 3 rd. and 4 th. rate.  
 Timber, cedar and pinion  
 Undergrowth sage and juniper brush..

58.80  
61.05  
79.90

The continued satisfactory adjustment of the solar apparatus during the survey of this township is indicated from field tests, as described in Book "B".

#### GENERAL DESCRIPTION.

The surface of this township ranges from level to mountainous, with the greater portion rolling. Toroweap Valley which ranges in width from 20 chs. to  $1\frac{1}{2}$  miles crosses the township from north to south. The drainage is southerly into the Colorado River. Along the east side of Toroweap Valley is a rim of cliffs from 200 to 800 ft. high. The soil on the greater portion of the township is very rocky and is suitable only for grazing, in Toroweap Valley it is suitable for agriculture. There is a scattering growth of juniper (commonly called cedar) and pinyon pine over most of the township. The timber however is mostly small and unsuitable for lumber. The principal undergrowth is sagebrush.

There is only one settler in the township John Schmutz who is located in the NW $\frac{1}{4}$  of sec. 33, he has the only watering hole in the township. No evidence of mineral was found.

4-680

**FIELD ASSISTANTS.**

To Charles E. Hunter, U.S. Transitman.

NAMES.	CAPACITY.
Walter Fitzgerald	First Chainman.
Pete Spurzen	Second Chainman.
Basil Porter	Flagman
Amel Peterson	Cornerman.
Henry Crosby	Axman.

CERTIFICATE OF UNITED STATES TRANSITMAN.

I, Charles E. Hunter, U.S. Transitman, U.S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 122, Arizona bearing date of the 23rd. day of April, 1923, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of

The Subdivision Lines of Township 35 North, Range 7 West

of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes and by diagram on page 1 hereof as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 122, Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Place: Phoenix, Arizona Date: October 28, 1925. Charles E. Hunter U. S. Transitman.

APPROVAL.

Office of the United States Surveyor General

The foregoing field notes of the survey of

executed by under his special instructions dated 19, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above-described surveys in, has been correctly copied from the original notes on file in this office.

U. S. Surveyor General.

4-680

**FIELD ASSISTANTS.**

To William E. Hiester, U.S. Surveyor

NAMES.	CAPACITY.
Ed F. Stanley	First Chainman.
Austin M. Frost	Second Chainman.
Orvil Bastian	Flagman.
Clifford Stone	Cornerman.
Clyde Pectol	Cornerman.

CERTIFICATE OF UNITED STATES SURVEYOR.

I, William E. Hiester, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 122, Arizona

bearing date of the 23rd. day of April, 19 23, I have well, faithfully, and truly

in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of

The South Boundary, East Boundary,  
North Boundary and Subdivision Lines of  
Township 35 North, Range 7 West

of the Gila and Salt

River Base and Meridian, in the State of Arizona, which are represented in

the foregoing field notes <sup>and by diagram on page 1 hereof</sup> as having been executed by me, and under my direction; and that all the corners of

said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 122, Arizona

and in the specific manner described in the field notes, and that the foregoing are the original field notes of

such survey.

Place: Phoenix Arizona

William E. Hiester  
U. S. Surveyor.

Date: Oct. 27, 1926

APPROVAL.

OFFICE OF THE UNITED STATES SUPERVISOR OF SURVEYS.

Denver Colorado, March 8, 1926.

The foregoing field notes of the survey of

The South Boundary, East Boundary, North Boundary and

Subdivision Lines of Township 35 North, Range 7 West, of the

Gila and Salt River Base and Meridian in the

State of Arizona, executed by

William E. Hiester, U.S. Surveyor and

Charles E. Hunter, U.S. Transitman

~~executed by~~

under ~~his~~ special instructions dated April 23, 1923 for Group 122, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Walter H. Johnson  
U. S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above described surveys in

has been correctly copied from the original notes on file in this office.