

3682

4-879

BOOK 3682

BOOK "C"

FIELD NOTES

OF THE SURVEY OF THE

East Boundary and

Subdivision Lines of

TOWNSHIP 36 NORTH, RANGE 8 WEST

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

EXECUTED BY

William E. Hiester, U.S. Surveyor

and

C.E. Hunter, U.S. Transitman.

~~In the capacity of U.S. Surveyor~~, under Special Instructions dated April 23, 1923, issued by the United States Surveyor General to govern surveys included in Group No. 122, Arizona, which were approved by the Commissioner of the General Land Office, May 17, 1923, and Assignment Instructions dated November 15, 1923.

Survey commenced January 11, 1924

Survey completed January 25, 1924.

3682


3682

1A

Book "C"

BOOK 3682

INDEX DIAGRAM.

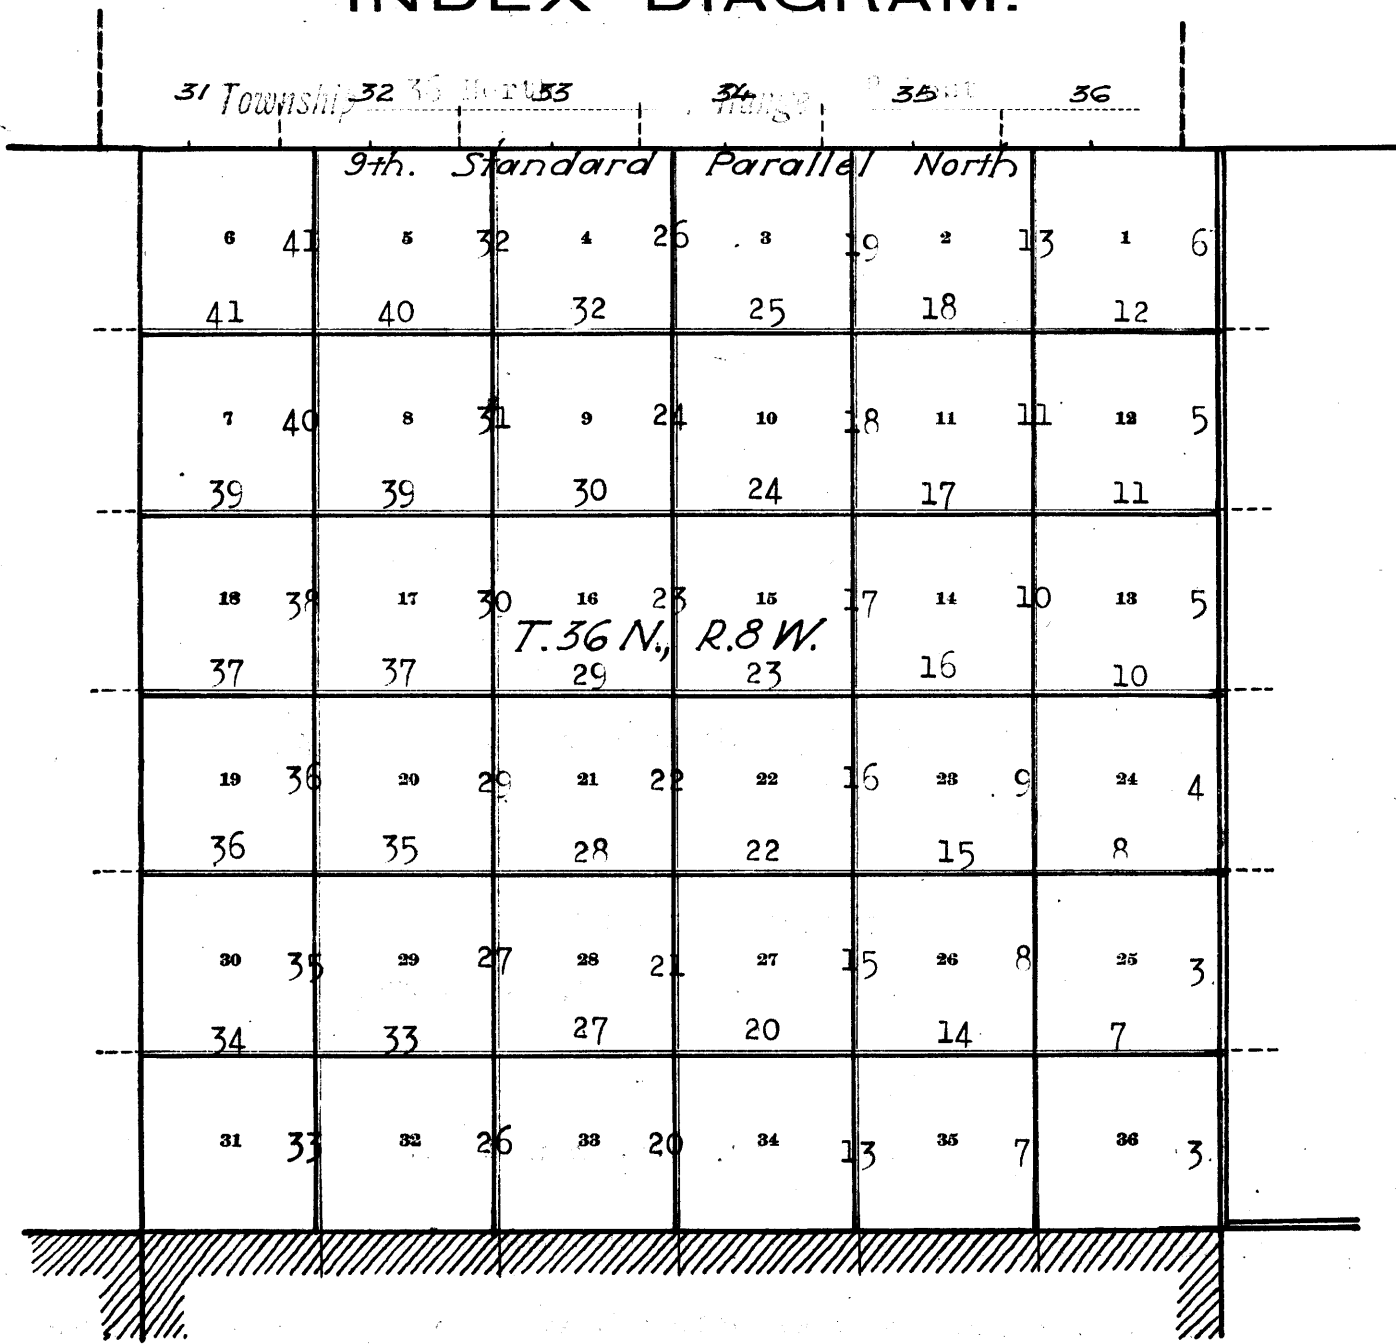

— Lines surveyed under this group.

— Accepted surveys.

- - - Unserved.

/// Areas surveyed as per accepted plats on file.

DATE

4-679 b

BOOK 3682

~~INDEX~~ DIAGRAM.

Township 36 North, Range 2 West
Accepted survey (1915)

Accepted survey (1917)

6 1-23-24 1-23-24	5 1-23-24 1-23-24	4 1-24-24 1-24-24	3 1-24-24 1-24-24	2 1-21-24 1-21-24	1 1-21-24 1-21-24
7 1-22-24 1-22-24	8 1-22-24 1-21-24	9 1-22-24 1-22-24	10 1-22-24 1-12-24	11 1-15-24 1-17-24	12 1-17-24 1-21-24
13 1-19-24 1-26-24	17 1-19-24 1-21-24	16 1-18-24 1-22-24	15 1-18-24 1-12-24	14 1-16-24 1-15-24	13 1-16-24 1-17-24
19 1-16-24 1-19-24	20 1-16-24 1-19-24	21 1-19-24 1-18-24	22 1-15-24 1-12-24	23 1-14-24 1-15-24	24 1-14-24 1-16-24
30 1-12-24 1-16-24	29 1-18-24 1-17-24	28 1-19-24 1-18-24	27 1-19-24 1-12-24	26 1-25-24 1-15-24	25 1-25-24 1-14-24
31 1-12-24 1-12-24	32 1-17-24 1-17-24	33 1-18-24 1-18-24	34 1-12-24 1-12-24	35 1-15-24 1-15-24	36 1-14-24 1-14-24

Accepted survey (1917)

6-4817

Lines in red surveyed by William E. Hiester, U.S. Surveyor.

Lines in green surveyed by Charles E. Hunter, U.S. Transitman.

(Survey commenced Jan. 11, 1924, and executed by William E. Hiester, U.S. Surveyor and Charles E. Hunter, U.S. Transitman on dates shown on diagram on page 1 hereof, using Buff Transit No. 9977, and Young and Sons Transit No. 8292 respectively. Both instruments are equipped with full vertical circle and the Smith solar attachment, and were approved by the Assistant Supervisor of Surveys, conditional upon satisfactory field tests. Unless otherwise specified all azimuth determinations are accomplished with the solar attachments.

We examine the adjustments of the instruments and correct all errors, then to test the solar apparatus by comparing their indications resulting from solar observations made during a.m. and p.m. hours with a meridian determined from observation on Polaris, proceed as follows:

Jan. 11: at camp near the cor. of secs. 22, 23, 26 and 27, T.36 N., R.8 W., Gila and Salt River Base and Meridian, Arizona, in latitude $36^{\circ}30'N.$, longitude $113^{\circ}8'W.$, of Greenwich, at 6h 1m p.m., l.m.t., we make an hour angle observation on Polaris east of the meridian, making four observations, two each with telescope in direct and reversed positions, and mark the mean point in the line thus determined, on a peg driven firmly in the ground, 8 chs. N.

Hour angle of Polaris east of the Meridian = 12 m.

Jan. 12: we lay off the azimuth of Polaris $4.3'$ to the west and mark the meridian thus determined by a tack in a stake driven firmly in the ground 8 chs. N.

At the same station at 9h 0m a.m. app.t., we set off $36^{\circ}30'N.$ on the latitude arcs, $21^{\circ}44'S.$, on the declination arcs, and determine meridians with the solars which agree with the true meridian.

At app. noon with the latitude arcs unchanged we observe the sun on the meridian with each instrument, the resulting readings of the declination arcs are $21^{\circ}43\frac{1}{2}'S.$ which agree with the computed declination of the sun.

At 3h 0m p.m., app.t., with the latitude arcs unchanged, we set off $21^{\circ}41\frac{1}{2}'S.$ on the declination arcs and determine meridians with the solars, which agree with the true meridian.


As all of the solar observations during the usual hours of solar work come within $1'30''$ of the true meridian, we conclude that the adjustments of the instruments are satisfactory.

Unless otherwise specified all measurements are made with Lufkin steel tapes 5 chs. in length compared with a Lufkin standard steel tape and found correct. The measurements are made on the slope, the vertical angle determined, and the slope measurement properly reduced to true horizontal distances.

East Boundary of T.36 N., R.8 W.


Chains From the cor. of Ts. 35 and 36 N., Rs. 7 and 8 W., described in Book "A", North, bet. secs. 31 and 36. Over rolling land, through heavy timber and dense undergrowth.

5.00 Asc. 134 ft. over S. slope.
 15.00 Draw, course E. continue ascent.
 23.00 Top of ascent.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. marked on brass cap



From which,
 A cedar, 6 ins. diam., bears S. $52\frac{1}{2}^\circ$ E., 61 lks. dist. marked $\frac{1}{4}$ S 31 B T
 A cedar, 16 ins. diam., bears S. $19\frac{1}{4}^\circ$ W., 142 lks. dist., marked $\frac{1}{4}$ S 36 B T

45.00 Asc. 63 ft. over S. slope.
 58.00 Top of ascent.
 64.71 Wash, 12 lks. wide, course SE.
 Asc. 90 ft. over SW. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground to bed rock, supported in a mound of stone, for cor. of secs. 25, 30, 31 and 36, marked on brass cap




From which,
 A cedar, 8 ins. diam., bears N. $35\frac{1}{2}^\circ$ E., 62 lks. dist. marked T 36 N R 7 W S 30 B T
 A pinyon, 9 ins. diam., bears S. $62\frac{3}{4}^\circ$ E., 61 lks. dist., marked T 36 N R 7 W S 31 B T
 A pinyon, 12 ins. diam., bears S. 25° W., 51 lks. dist. marked T 36 N R 8 W S 36 B T
 A cedar, 12 ins. diam., bears N. $41\frac{1}{4}^\circ$ W., 89 lks. dist. marked T 36 N R 8 W S 25 B T

Land; rolling.
 Soil; rocky, 3rd. and 4th. rates.
 Timber; cedar and pinyon.
 Undergrowth; sagebrush and juniper.

North, bet. secs. 25 and 30. Over rolling land, through heavy timber and dense undergrowth.

14.40 Asc. SW. slope of cinder cone mountain.
 Wash, 14 lks. wide, 3 ft. deep, course W.
 Continue ascent.
 36.80 Top of ascent, 350 ft. above cor.
 Desc. 80 ft. over NW. slope to
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



From which,
 A pinyon, 12 ins. diam., bears N. 78° E., 9 lks. dist. marked $\frac{1}{4}$ S 30 B T
 A pinyon, 10 ins. diam., bears S. 53° W., 66 lks. dist. marked $\frac{1}{4}$ S 25 B T

East Boundary of T.36 N., R.8 W.

Chains

45.42

Desc. 170 ft. over steep NW. slope.

Wash, 16 lks. wide, course W.


Asc. 80 ft. over S. slope.

51.40

Spur, slopes W. Desc. 300 ft. over NW. slope.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 4 ins. in the ground to bed rock, supported in a mound of stone, for cor. of secs. 19, 24, 25 and 30, marked on brass cap



From which,

A cedar, 6 ins. diam., bears N.84°E., 142 lks. dist. marked T 36 N R 7 W S 19 B T

A cedar, 8 ins. diam., bears S.19¼°E., 143 lks. dist., marked T 36 N R 7 W S 30 B T

A cedar, 8 ins. diam., bears S.47½°W., 184 lks. dist. marked T 36 N R 8 W S 25 B T

A cedar, 10 ins. diam., bears N.31½°W., 131 lks. dist. marked T 36 N R 8 W S 24 B T

Land; rolling.

Soil; rocky, 3rd. and 4th. rates.

Timber; pinyon and cedar.

Undergrowth; sagebrush and juniper.

North, bet. secs. 19 and 24.

Over rolling land, through heavy timber and dense undergrowth.

Desc. over gentle N. slope.

2.70

Draw, course NE.

10.00


Leave heavy, enter scattering timber bears E. and W.

27.32

Wash, 8 lks. wide, course NW.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor. marked on brass cap



From which,

A cedar, 6 ins. diam., bears N.33¼°E., 111 lks. dist. marked ¼ S 19 B T


A cedar, 16 ins. diam., bears N.61¼°W., 235 lks. dist. marked ¼ S 24 B T

62.00

Enter heavy timber, bears E. and W. Desc. NW. slope.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground for cor. of secs. 13, 18, 19 and 24, marked on brass cap



From which,

A cedar, 18 ins. diam., bears N.66¼°E., 55 lks. dist. marked T 36 N R 7 W S 18 B T

A cedar, 10 ins. diam., bears S.56 3/4°E., 35 lks. dist., marked T 36 N R 8 W S 19 B T

A cedar, 14 ins. diam., bears S.47¼°W., 39 lks. dist. marked T 36 N R 8 W S 24 B T

A cedar, 9 ins. diam., bears N.72°W., 65 lks. dist. marked T 36 N R 8 W S 13 B T


Land; rolling. Soil; rocky, 4th. rate.

Timber; cedar and pinyon.

Undergrowth; sagebrush and juniper.


East Boundary of T.36 N., R.8 W.

Chains North, bet. secs. 13 and 18.
 Over rolling land, through heavy timber and dense undergrowth.
 Desc. gentle N. slope.
 12.00 Leave heavy and enter scattering timber, bears E. and W.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



Raise a mound of stone, $3\frac{1}{2}$ ft. base, 3 ft. high W. of cor.


68.60 Road, bears NE. and SW.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, with marked cross (+) stone alongside for cor. of secs. 7, 12, 13 and 18, marked on brass cap



From which,
 a cedar, 6 ins. diam., bears N.41°E., 120 lks. dist. marked T 36 N R 7 W S 7 B T
 No other trees near.


Land; rolling.
 Soil; rocky, 3rd. and 4th. rate.
 Timber; cedar.
 Undergrowth; sagebrush and juniper.

North, bet. secs. 7 and 12.
 Over rolling land, through scattering timber and dense undergrowth.
 Desc. 70 ft. over NW. slope.
 11.50 Draw, course NE.
 Asc. 30 ft. over E. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, with marked cross (+) stone alongside for $\frac{1}{4}$ sec. cor. marked on brass cap



From which,
 a cedar, 12 ins. diam., bears N.5 $\frac{1}{2}$ °W., 446 lks. dist. marked $\frac{1}{4}$ S 12 B T

48.30 Road, bears NE. and SW.
 60.00 Desc. gentle N. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, with marked cross (+) stone alongside for cor. of secs. 1, 6, 7 and 12, marked on brass cap



From which,
 a cedar, 8 ins. diam., bears S.36 $\frac{3}{4}$ °E., 146 lks. dist., marked T 36 N R 7 W S 7 B T

East Boundary of T.36 N., R.8 W.

Chains

No other trees available.

Land; rolling.
Soil; rocky, 3rd. and 4th. rates.
Timber; cedar and pinyon.
Undergrowth; sagebrush and juniper.

North, bet. secs. 1 and 6.
Over rolling land, through scattering timber and undergrowth.

- .70 Rocky spur, slopes N.
Desc. 130 ft. over N. slope.
- 7.50 Wash, 16 lks. wide, course NE.
Asc. 95 ft. over SE. slope.
- 16.20 Spur, slopes SE. Desc.
Desc. 165 ft. over NE. slope to
- 30.35 Draw, course NE.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in
the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

S 1 S 6

1924

From which,

- A cedar, 4 ins. diam., bears S.50°W., 206 lks. dist.
marked B T
- A cedar, 6 ins. diam., bears S.81 $\frac{1}{4}$ °W., 120 lks. dist.
marked $\frac{1}{4}$ S 1 B.T

- 52.50 Draw, course NE.
- 55.00 Reservoir, bears E. about 10 chs. dist.
- 61.40 Spur, slopes E. Desc. 30 ft. to
- 63.25 Wash, 12 lks. wide, 4 ft. deep, course E.
asc. gentle S. slope.
- 64.45 Road, bears E. and W.
- 79.01 Intersect the 9th. Standard Parallel North, 14.89 chs.
E. of the standard cor. of Ts. 37 N., Rs. 7 and 8 W.,

At point of intersection, set an iron post, 3 ft. long,
3 ins. diam., 30 ins. in the ground for closing cor.
of Ts. 36 N., Rs. 7 and 8 W., marked on brass cap

T37N R7W
S 31
S 1 | S 6
R8W | R7W
T36N
1924

Raise a mound of stone, 3 $\frac{1}{2}$ ft. base, 3 ft. high S. of cor.

Land; rolling.
Soil; rocky, 3rd. and 4th. rates.
Timber; cedar and pinyon.
Undergrowth; sagebrush and juniper.

Subdivision of T.36 N., R.8 W.

Chains

The cor. of secs. 1, 2, 35 and 36 on S. bdy. of Tp., is an iron post, 2 ins. diam., 12 ins. above ground, firmly set, and witnessed by four bearing trees, one each NE., SE., SW. and NW. of cor., all properly marked.

Thence

N.0°1'W., bet. secs. 35 and 36.

Over rolling land, through heavy timber and dense undergrowth.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

S 35 | S 36

1924

From which,

A pinyon, 8 ins. diam., bears N.86°E., 31 lks. dist. marked $\frac{1}{4}$ S 36 B T.

A pinyon, 6 ins. diam., bears S.57 3/4°W., 11 lks. dist., marked $\frac{1}{4}$ S 35 B T

56.00

Draw, course E.

70.00

Asc. 80 ft. over S. slope.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground for cor. of secs. 25, 26, 35 and 36, marked on brass cap

T36N. R8W
S 26 | S 25
S 35 | S 36
1924

From which,

A pinyon, 8 ins. diam., bears N.77 1/4°E., 46 lks. dist. marked T 36 N R 8 W S 25 B T

A cedar, 14 ins. diam., bears S.60 1/2°E., 57 lks. dist. marked T 36 N R 8 W S 36 B T

A pinyon, 6 ins. diam., bears S.56 3/4°W., 141 lks. dist., marked T 36 N R 8 W S 35 B T

A cedar, 14 ins. diam., bears N.34 1/2°W., 51 lks. dist. marked T 36 N R 8 W S 26 B T

Land; rolling.

Soil; rocky, 3rd. rate.

Timber; cedar and pinyon.

Undergrowth; sagebrush and juniper.

40.00

N.89°57'E., on a random line bet. secs. 25 and 36.

80.18

Set temp. $\frac{1}{4}$ sec. cor.

Fall 14 lks. S. of the cor. of secs. 25, 30, 31 and 36, hereinbefore described.

Thence

S.89°51'W., on a true line bet. secs. 25 and 36.

Over rolling land, through scattering timber and dense undergrowth.

Desc. 75 ft. over SW. slope.

16.76

Draw, course S.

20.00

Asc. 46 ft. to

28.00

Top of knoll. Desc. 100 ft. over w. slope.

40.09

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

S 25
S 36
1924

From which,

A cedar, 7 ins. diam., bears N.20°W., 47 lks. dist. marked $\frac{1}{4}$ S 25 B T.

A cedar, 8 ins. diam., bears S.31 1/2°W., 65 lks. dist. marked $\frac{1}{4}$ S 36 B T

Subdivision of T.36 N., R.8 W.

Chains

51.42

60.32

77.50

80.18

Desc. 50 ft.

Draw, course NW.

Draw, course NE.

Asc. 160 ft. over S $\frac{1}{2}$ slope.

Top of ascent.

The cor. of secs. 25, 26, 35 and 36.

Land; rolling.

Soil; rocky, 3rd. rate.

Timber; cedar and pinyon.

Undergrowth; sagebrush and juniper.

N.0°1'W., bet. secs. 25 and 26.

Over rolling land, through heavy timber and dense undergrowth.

Asc. 24 ft. to

4.00

Spur, slopes W. Desc. 140 ft. to

25.70

Draw, course NE.

34.00

Spur, slopes E. Desc. 46 ft. over N. slope.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap $\frac{1}{4}$

S 26. | S 25

1924

From which,

A cedar, 12 ins. diam., bears N.62°E., 48 lks. dist. marked $\frac{1}{4}$ S 25 B TA cedar, 6 ins. diam., bears N.78°W., 40 lks. dist. marked $\frac{1}{4}$ S 26 B T

Desc. 75 ft. over N. slope to

56.30

Point of spur, slopes N.

60.00

Leave heavy and enter scattering timber, bears E. and W.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground for cor. of secs. 23, 24, 25 and 26, marked on brass cap

T36N, R8W

S 23 | S 24

S 26 | S 25

1924

From which,

A cedar, 14 ins. diam., bears N.50 $\frac{1}{2}$ °E., 102 lks. dist., marked T 36 N R 8 W S 24 B T

A cedar, 12 ins. diam., bears S.36°E., 149 lks. dist., marked T 36 N R 8 W S 25 B T

A cedar, 8 ins. diam., bears S.30 $\frac{1}{2}$ °W., 98 lks. dist. marked T 36 N R 8 W S 26 B TA cedar, 16 ins. diam., bears N.49 $\frac{3}{4}$ °W., 98 lks. dist., marked T 36 N R 8 W S 23 B T

Land; rolling.

Soil; rocky, 3rd. rate.

Timber; cedar and pinyon.

Undergrowth; sagebrush and juniper.

40.00

N.89°51'E., on a random line bet. secs. 24 and 25.

80.10

Set temp. $\frac{1}{4}$ sec. cor.

Fall 9 lks. S. of the cor. of secs. 19, 24, 25 and 30 on E. bdy. of Tp., hereinbefore described.

Thence

S.89°47'W., on a true line bet. secs. 24 and 25,

Over rolling land, through heavy timber and dense undergrowth.

2.20

Dr $\frac{1}{2}$ wash, 4 lks. wide, course NE.

15.00

Desc. gentle W. slope.

Subdivision of T.36 N., R.8 W.

Chains
26.00
31.70
40.05

Leave heavy, enter scattering timber, bears N. and S.
Draw, course N. Asc. 100 ft. over S^w. slope to
Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in
the ground, for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ S 24
S 25
1924

From which,
A pinyon, 12 ins. diam., bears N.59 $\frac{3}{4}$ °W., 182 lks.
dist., marked $\frac{1}{4}$ S 24 B T
A pinyon, 14 ins. diam., bears S.78 $\frac{1}{2}$ °W., 249 lks.
dist., marked $\frac{1}{4}$ S 25 B T

43.20
72.00
80.10

Asc. E. slope.
Top of ascent. Desc. 300 ft. over SW. slope.
Draw, course NW. Asc. gentle NE. slope.
The cor. of secs. 23, 24, 25 and 26.

Land; rolling.
Soil; rocky, 3rd. rate.
Timber; cedar and pinyon.
Undergrowth; sagebrush and juniper.

13.30
30.00
35.00
40.00

N.0°1'W., bet. secs. 23 and 24.
Over rolling land, through scattering timber and dense
undergrowth.
Desc. gentle W. slope.
Draw course NW.
Asc. gentle S. slope.
Top of ascent, slopes W.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$
S 23 | S 24
1924

From which,
A cedar, 16 ins. diam., bears S.2 $\frac{1}{4}$ °E., 140 lks. dist.
marked $\frac{1}{4}$ S 24 B T
A cedar, 14 ins. diam., bears S.2 $\frac{3}{4}$ °W., 120 lks.
dist., marked $\frac{1}{4}$ S 23 B T

48.00
63.50
80.00

Desc. 120 ft. over N. slope to cor.
Draw, course W.
Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in
the ground to bed rock, with marked cross (+) stone
alongside, in a mound of stone, for cor. of secs.
13, 14, 23 and 24, marked on brass cap

T36N R8W
S 14 | S 13
S 23 | S 24
1924

From which,
A cedar, 7 ins. diam., bears N.1 $\frac{3}{4}$ °E., 272 lks.
dist., marked T 36 N R 8 W S 13 B T
A cedar, 10 ins. diam., bears S.12 $\frac{1}{2}$ °W., 219 lks.
dist., marked T 36 N R 8 W S 23 B T
A cedar, 22 ins. diam., bears N.7 $\frac{3}{4}$ °W., 297 lks.
dist., marked T 36 N R 8 W S 14 B T

Land; rolling.
Soil; rocky, 3rd. rate.
Timber; cedar and pinyon.
Undergrowth; sagebrush.

Subdivision of T.36 N., R.8 W.

Chains	N.89°47'E., on a random line bet. secs. 13 and 24.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.10	Intersect the cor. of secs. 13, 18, 19 and 24 on E. bdy. of Tp., hereinbefore described.
	Thence
	S.89°47'W., on a true line bet. secs. 13 and 24.
	Over rolling land, through heavy timber and dense undergrowth.
	Desc. 67 ft. over W. slope.
8.07	Wash, 14 lks. wide, course NW.
	Asc. 33 ft. over NE. slope.
9.00	Leave heavy and enter scattering timber.
14.20	Spur, slopes N. Desc. 46 ft. over W. slope.
24.12	Draw, course N. Asc. E. slope.
29.10	Spur, slopes N. Desc. W. slope.
34.07	Wash, 16 lks. wide, course N.
	Asc. 74 ft. over E. slope.
40.05	Set an iron post, 3 ft. long, 1 $\frac{1}{2}$ in. diam., 24 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap
	$\frac{1}{4}$ S 13 $\frac{1}{4}$ S 24 1924
	From which,
	A cedar, 10 ins. diam., bears N.50 $\frac{1}{4}$ °W., 129 lks. dist., marked $\frac{1}{4}$ S 13 B T
	A cedar, 12 ins. diam., bears S.77°W., 479 lks. dist., marked $\frac{1}{4}$ S 24 B T
45.00	Desc. 33 ft. over NW. slope.
50.68	Draw, course N. Asc. E. slope.
55.15	Spur, slopes N. Desc.
60.06	Draw, course N. Asc. E. slope.
67.00	Spur, slopes NW. Desc. 47 ft. over SW. slope.
	Desc. 47 ft. over SW. slope.
74.58	Wash, 10 lks. wide, course NW.
	Ascend.
78.85	Small lava rock point. Desc.
80.10	The cor. of secs. 13, 14, 23 and 24.
	Land; rolling.
	Soil; rocky, 3rd. and 4th. rates.
	Timber; cedar and pinyon.
	Undergrowth; sagebrush and juniper.
<hr/>	
	N.0°1'W., bet. secs. 13 and 14.
	Over rolling land, through scattering timber and undergrowth.
	Desc. 30 ft. over N. slope.
2.72	Wash, 10 lks. wide, course W.
5.00	Desc.
25.90	Wash, 10 lks. wide, course NE.
38.92	Road, bears SE, and NW.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap
	$\frac{1}{4}$ S 14 S 13 1924
	From which,
	A cedar, 12 ins. diam., bears S.16°E., 94 lks. dist. marked $\frac{1}{4}$ S 13 B T
	A cedar, 8 ins. diam., bears N.72 $\frac{3}{4}$ °W., 83 lks. dist., marked $\frac{1}{4}$ S 14 B T
43.40	Draw, course NE.
47.80	Old roqd, bears NE. and SW.
50.60	Draw, course E.

Subdivision of T.36 N., R.8 W.

Chains

63.50

Desc. 45 ft. to Wash, 12 lks. wide, course E.

71.85

Asc. 45 ft.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in the ground to bed rock, with marked cross (+) stone alongside, in a mound of stone, for cor. of secs. 11, 12, 13 and 14, marked on brass cap

T36N R8W
S 11 S 12
S 14 S 13
1924

From which,

A cedar, 14 ins. diam., bears N.19°E., 228 lks. dist. marked T 36 N R 8 W S 12 B T

A cedar, 6 ins. diam., bears S.0°30'E., 373 lks. dist., marked T 36 N R 8 W S 13 B T

A cedar, 12 ins. diam., bears N.13 3/4°W., 114 lks. dist., marked T 36 N R 8 W S 11 B T

Land; rolling.

Soil; rocky, 3rd. and 4th. rates.

Timber; cedar and pinyon.

Undergrowth; sagebrush.

40.00

N.89°47'E., on a random line bet. secs. 12 and 13.

Set temp. 1/4 sec. cor.

80.12

Fall 2 lks. S. of the cor. of secs. 7, 12, 13 and 18 on E. bdy. of Tp., hereinbefore described.

Thence

S.89°46'W., on a true line bet. secs. 12 and 13.

Over rolling land, through scattering timber and dense sagebrush.

6.74

Draw, course NE.

40.06

Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bed rock, supported in a mound of stone, for 1/4 sec. cor. marked on brass cap

S 12
1/4 S 13
1924

Raise a mound of stone, 3 1/2 ft. base, 3 ft. high N. of cor.

49.30

Road, bears NE. and SW.

52.90

Draw, course N.

64.00

Wash, 16 lks. wide, course N.

Asc. 55 ft. over E. slope.

80.12

The cor. of secs. 11, 12, 13 and 14.

Land; rolling.

Soil; rocky, 3rd. and 4th. rates.

Timber; cedar and pinyon.

Undergrowth; sagebrush.

N.0°1'W., bet. secs. 11 and 12.

Over rolling land, through scattering timber and dense sagebrush.

Desc.

5.00

Draw, course NE.

21.05

Wash, 20 lks. wide, course E.

Asc. 80 ft. over S. slope.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground for 1/4 sec. cor. marked on brass cap

Chains

S 11 | S 12

1924

From which,

- A cedar, 8 ins. diam., bears N.66 $\frac{1}{2}$ °E., 101 lks. dist., marked $\frac{1}{4}$ S 12 B T
- A cedar, 6 ins. diam., bears S.53°W., 21 lks. dist., marked $\frac{1}{4}$ S 11 B T

Asc. over SE. slope.

48.90 Wash, 6 lks. wide, course SE.

58.70 Spur, slopes E.

60.04 Draw, course NE.

67.40 Desc. 192 ft. over NE. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, with marked cross (+) stone alongside in for cor. of secs. 1, 2, 11 and 12, marked on brass cap

T36N	R8W
S 2	S 1
S 11	S 12

1924

From which,

- A cedar, 14 ins. diam., bears N.68 $\frac{1}{4}$ °E., 65 lks. dist. marked T 36 N R 8 W S 1 B T
- A cedar, 5 ins. diam., bears S.70 $\frac{1}{4}$ °E., 113 lks. dist. marked B T

Land; rolling.

Soil; rocky, 3rd. and 4th. rates.

Timber; cedar and pinyon.

Undergrowth; sagebrush.

40.00 N.89°46'E., on a random line bet. secs. 1 and 12.

Set temp. $\frac{1}{4}$ sec. cor.

80.12 Fall 5 lks. N. of the cor. of secs. 1, 6, 7 and 12, on E. bdy. of Tp., hereinbefore described.

Thence

S.89°48'W., on a true line bet. secs. 1 and 12.

Over rolling land, through scattering timber and undergrowth.

.70 Top of cliff, bears N. and S.

Desc. 118 ft. over W. slope.

5.47 Wash, 16 lks. wide, course NE. Asc.

13.10 Top of cliff, bears S. and NE. 150 ft. above wash.

Asc. gradually.

40.06 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

S 1
$\frac{1}{4}$ S 12

1924

From which,

- A cedar, 8 ins. diam., bears N.81 $\frac{1}{4}$ °W., 361 lks. dist. marked $\frac{1}{4}$ S 1 B T
- A cedar, 6 ins. diam., bears S.20 $\frac{1}{4}$ °W., 326 lks. dist. marked $\frac{1}{4}$ S 12 B T

47.04 Draw, course N. Asc. 70 ft. to

59.00 Top of ascent.

76.90 Desc. 80 ft. over W. slope.

80.08 Wash, 6 lks. wide, course NW.

80.12 The cor. of secs. 1, 2, 11 and 12.

Land; rolling.

Soil; rocky, 3rd. and 4th. rates.

Timber; cedar and pinyon.

Undergrowth; sagebrush.

Subdivision of T.36 N., R.8 W.

Chains
 40.00 N.0°1'W., on a true com line bet. secs. 1 and 2.
 Over rolling land, through scattering timber and dense undergrowth.
 .20 Wash, 6 lks. wide, course NW.
 5.53 Same wash, course NE.
 16.10 Top of lava cliff.
 Desc. 165 ft. over N. slope.
 28.17 Same wash, course NW.
 34.80 Draw, course NE. Asc.
 35.40 Road, bears NE. and SW.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap

S 2 | S 1

1924

From which,
 A cedar, 6 ins. diam., bears N.31 $\frac{1}{4}$ °E., 130 lks. dist. marked $\frac{1}{4}$ S 1 B T
 A cedar, 8 ins. diam., bears S.82 $\frac{1}{2}$ °W., 39 lks. dist. marked $\frac{1}{4}$ S 2 B T

Asc.
 56.30 Road, bears E. and W.
 69.00 Spur, slopes E.
 Desc. gentle N. slope.
 79.25 Intersect the 9th. Standard Parallel North, 14.79 chs. East of the S.C. of secs. 35 and 36, T.37 N., R.8 W., which is an iron post, 3 ins. diam., 10 ins. above ground, with brass cap properly marked and witnessed by a mound of stone N. of cor. At point of intersection, set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground for closing cor. of secs. 1 and 2, with brass cap marked

T37N R8W
 S 36

S 2 | S 1
 T36N R8W

C C

1924

From which,
 A pinyon, 24 ins. diam., bears S.9 $\frac{1}{4}$ °E., 730 lks. dist. marked T 36 N R 8 W S 1 C C B T
 A cedar, 8 ins. diam., bears S.34 $\frac{1}{2}$ °W., 473 lks. dist. marked T 36 N R 8 W S 2 C C B T

Land; rolling.
 Soil; rocky, 3rd. and 4th. rates.
 Timber; cedar and pinyon.
 Undergrowth; sagebrush.

The cor. of secs. 2, 3, 34 and 35 on S. bdy. of Tp., is an iron post, 2 ins. diam., 18 ins. above ground, in a mound of stone, firmly set, properly marked and witnessed by four properly marked bearing trees.

Thence
 N.0°1'W., bet. secs. 34 and 35.
 Over rolling land, through heavy timber and dense undergrowth.

Asc.
 5.00 Top of ascent, bears NE. and SW.
 Desc. 167 ft. over NW. slope.
 32.00 Leave timber, bears NE. and SW.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in

Subdivision of T.36 N., R.8 W.

Chains

the ground, for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$
 S 34 | S 35

1924

From which,

- A pinyon, 6 ins. diam., bears S. $57\frac{1}{2}^\circ$ E., 389 lks. dist., marked $\frac{1}{4}$ S 35 B T
- A cedar, 18 ins. diam., bears N. 22° W., 378 lks. dist. marked $\frac{1}{4}$ S 34 B T

- 44.40 Wash, 10 lks. wide, course NE.
- 44.60 Road, bears SW. and NW.
- 47.00 Enter heavy timber, bears NE. and SW.
- 50.55 Same wash as above, course NW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground for cor. of secs. 26, 27, 34 and 35, marked on brass cap

T36N R8W
 S 27 | S 26
 S 34 | S 35
 1924

From which,

- A cedar, 6 ins. diam., bears N. $62\frac{3}{4}^\circ$ E., 79 lks. dist., marked T 36 N R 8 WS 26 B T
- A cedar, 6 ins. diam., bears S. $61\frac{1}{2}^\circ$ E., 199 lks. dist. marked T 36 N R 8 W S 35 B T
- A pinyon, 18 ins. diam., bears S. $80\frac{3}{4}^\circ$ W., 184 lks. dist., marked T 36 N R 8 W S 34 B T
- A pinyon, 16 ins. diam., bears N. 49° W., 155 lks. dist. marked T 36 N R 8 W S 27 B T

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar and pinyon.
Undergrowth; sagebrush.

- 40.00 N. $89^\circ 57'$ E., on a random line bet. secs. 26 and 35. Set temp. $\frac{1}{4}$ sec. cor.
- 80.08 Fall 12 lks. S. of the cor. of secs. 25, 26, 35 and 36.

Thence
S. $89^\circ 52'$ W., on a true line bet. secs. 26 and 35.
Over rolling land, through scattering timber and dense undergrowth.

- Desc. 100 ft. over SW. slope.
- 17.35 Draw, course NE.
- 32.00 Enter heavy timber, bears N. and S.
- 40.04 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ S 26
 S 35
 1924

From which,

- A cedar, 6 ins. diam., bears N. $6\frac{3}{4}^\circ$ W., 17 lks. dist. marked $\frac{1}{4}$ S 26 B T
- A cedar, 6 ins. diam., bears S. $19\frac{1}{2}^\circ$ W., 88 lks. dist. marked $\frac{1}{4}$ S 35 B T


- 63.00 Draw, course NW.
- 67.40 Desc. W. slope.
- 71.13 Draw, course SW.
- 78.58 Wash, 8 lks. wide, course NW.
- 80.08 The cor. of secs. 26, 27, 34 and 35.

Land; rolling.
Soil; rocky, 3rd. and 4th. rate.
Timber; cedar and pinyon. Undergrowth; sagebrush.

Subdivision of T. 36 N., R. 8 W.

Chains

N.0°1'W., bet. secs. 26 and 27.
 Over rolling land, through heavy timber and dense undergrowth.
 4.72 Wash, 8 lks. wide, course NW.
 Asc. 30 ft. over SW. slope.
 15.00 Spur, slopes W. Desc. 34 ft. over NW. slope.
 19.15 Same wash, course NE. Asc.
 24.00 Spur, slopes NE. Desc. gentle NW. slope.
 30.00 Leave heavy and enter scattering timber, bears E. and W.
 34.30 Road, bears NE. and SW.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



From which,


A cedar, 6 ins. diam., bears N.65°E., 347 lks. dist. marked $\frac{1}{4}$ S 26 B T

A cedar, 10 ins. diam., bears N.7 $\frac{1}{2}$ °W., 392 lks. dist. marked $\frac{1}{4}$ S 27 B T

45.00 Low spur, slopes SW.
 Desc. NW. slope.

77.58 Wash, 7 lks. wide, 3 ft. deep, course NW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground for cor. of secs. 22, 23, 26 and 27, marked on brass cap



From which,

A cedar, 4 ins. diam., bears N.71 $\frac{1}{2}$ °E., 49 lks. dist. marked B T $\frac{1}{4}$ S 23 B T

A cedar, 6 ins. diam., bears S.28°E., 246 lks. dist. marked T 36 N R 8 W S 26 B T

A cedar, 4 ins. diam., bears S.6°W., 259 lks. dist. marked B T

A cedar, 14 ins. diam., bears N.5°W., 141 lks. dist. marked T 36 N R 8 W S 22 B T

Land; rolling.

Soil; rocky, 4th. rate.

Timber; cedar and pinyon.

Undergrowth; sagebrush and juniper.

40.00 N.89°52'E., on a random line bet. secs. 23 and 26.
 Set temp. $\frac{1}{4}$ sec. cor.

80.08 Fall 2 lks. S. of the cor. of secs. 23, 24, 25 and 26.


Thence

S.89°51'W., on a true line bet. secs. 23 and 26.

Over rolling land, through scattering timber and dense undergrowth.

17.00 Draw, course NE.

40.04 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



From which,

A cedar, 16 ins. diam., bears N.67°W., 296 lks. dist. marked $\frac{1}{4}$ S 23 B T

A cedar, 16 ins. diam., bears S.88 $\frac{1}{4}$ °E., 69 lks. dist. marked $\frac{1}{4}$ S 26 B T

Subdivision of T.36 N., R.8 W.


Chains
40.85
45.00
80.08

Road, bears NE. and SW.
Wash, 6 lks. wide, course NW.
The cor. of secs. 22, 23, 26 and 27.

Land; rolling.
Soil; rocky, 3rd. and 4th. rates.
Timber; cedar and pinyon.
Undergrowth; sagebrush.


N.0°1'W., bet. secs. 22 and 23.
Over rolling land, through scattering timber and dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



From which,
A cedar, 8 ins. diam., bears S.44 $\frac{1}{2}$ °E., 264 lks. dist. marked $\frac{1}{4}$ S 23 B T
A cedar, 6 ins. diam., bears S.51 $\frac{1}{2}$ °W., 318 lks. dist. marked $\frac{1}{4}$ S 22 B T

50.00 Desc. 86 ft. over N. slope.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground for cor. of secs. 14, 15, 22 and 23, marked on brass cap




Dig pits 18 x 18 x 12 ins. one in each sec. NE., SE., SW. and NW. of cor. 3 ft. dist.

Land; rolling.
Soil; rocky, 3rd. and 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.

40.00 N.89°51'E., on a random line bet. secs. 14 and 23.
80.10 Set temp. $\frac{1}{4}$ sec. cor.
Fall 9 lks. W. of the cor. of secs. 13, 14, 23 and 24.

Thence
S.89°55'W., on a true line bet. secs. 14 and 23.
Over rolling land, through scattering timber and dense undergrowth.

20.72 Desc. 70 ft. over gentle NW. slope to
21.35 Wash, 10 lks. wide, course NE.
33.42 Road, bears NE. and SW.
40.05 Wash, 6 lks. wide, course NW.
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



From which,
A cedar, 6 ins. diam., bears N.66 $\frac{3}{4}$ °W., 118 lks. dist., marked $\frac{1}{4}$ S 14 B T
A cedar, 10 ins. diam., bears S.62 $\frac{3}{4}$ °W., 253 lks. dist., marked $\frac{1}{4}$ S 23 B T

Subdivision of T.36 N., R.8 W.


Chains

41.63 Wash, 20 lks. wide, course NE.
 Asc. gentle E. slope.
 60.00 Desc. W. slope.
 80.10 The cor. of secs. 14, 15, 22 and 23.


Land; rolling.
 Soil; rocky, 3rd. and 4th. rates.
 Timber; cedar and pinyon.
 Undergrowth; sagebrush.

N.0°1'W., bet. secs. 14 and 15.
 Over rolling land, through dense sagebrush.

32.80 Desc. gentle N. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bed rock, with marked cross (+) stone alongside, in a mound of stone, for 1/4 sec. cor. marked on brass cap



78.00 Road, bears E. and W.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in the ground for cor. of secs. 10, 11, 14 and 15, marked on brass cap




Raise a mound of stone, 3 ft. base, 2 1/2 ft. high W. of cor.

Land; rolling.
 Soil; rocky, 3rd. and 4th. rates.
 Timber; none.
 Undergrowth; sagebrush and oak.

40.00 N.89°55'E., on a random line bet. secs. 11 and 14.
 80.10 Set temp. 1/4 sec. cor.
 Fall 9 lks. S. of the cor. of secs. 11, 12, 13 and 14.

Thence
 S.89°51'W., on a true line bet. secs. 11 and 14.
 Over rolling land, through scattering timber and dense undergrowth.

10.00 Leave timber, bears N. and S.
 40.05 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground for 1/4 sec. cor. marked on brass cap



Raise a mound of stone, 4 ft. base, 3 1/2 ft. high N. of cor.

45.00 Desc. W. slope.
 80.10 The cor. of secs. 10, 11, 14 and 15.

Land; rolling. Soil; rocky, 3rd. and 4th. rates.
 Timber; none. Undergrowth; sagebrush and juniper.

Subdivision of T. 36 N., R. 8 W.

Chains

N.0°1'W., bet. secs. 10 and 11.
Over rolling land, through dense sagebrush.

9.25 Wash, 8 lks. wide, course W. Asc.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

S 10 | S 11

1924

Raise a mound of stone, $3\frac{1}{2}$ ft. base, 3 ft. high W. of cor.

60.00 Enter scattering timber.

Desc. 45 ft. over N. slope to

68.20 Point of rocky cliff, bears NE. and W.

Desc. 86 ft. over steep N. slope.

71.95 Wash, 10 lks. wide, 2 ft. deep, course NE.

74.50 Same wash, course NW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground for cor. of secs. 2, 3, 10 and 11, marked on brass cap

T36N R8W

S 3 | S 2

S 10 | S 11

1924

From which,

A cedar, 5 ins. diam., bears N.76°E., 216 lks. dist. marked T 36 N R 8 W S 2 B T

A cedar, 12 ins. diam., bears S.11 $\frac{1}{4}$ °E., 132 lks. dist., marked T 36 N R 8 W S 11 B T

A cedar, 6 ins. diam., bears S.53 $\frac{1}{2}$ °W., 301 lks. dist. marked T 36 N R 8 W S 10 B T

A cedar, 12 ins. diam., bears N.83 $\frac{1}{2}$ °W., 201 lks. dist. marked T 36 N R 8 W S 3 B T

Land; rolling.

Soil; rocky, 3rd. and 4th. rates.

Timber; cedar.

Undergrowth; sagebrush.

40.00 N.89°51'E., on a random line bet. secs. 2 and 11.
Set temp. $\frac{1}{4}$ sec. cor.

80.14 Intersect the cor. of secs. 1, 2, 11 and 12.

Thence

S.89°51'W., on a true line bet. secs. 2 and 11.

Over rolling land, through scattering timber and undergrowth.

Asc. 95 ft. over NE. slope of cinder cone Mt.

13.50 Desc. 170 ft. over NW. slope to $\frac{1}{4}$ cor.

23.92 Draw, course NW.

26.00 Spur, slopes NW.

28.74 Draw, course N.

40.07 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap

S 2

S 11

1924

From which,

A cedar, 18 ins. diam., bears N.74 $\frac{3}{4}$ °E., 11 lks. dist., marked $\frac{1}{4}$ S 2 B T

A cedar, 22 ins. diam., bears S.44°W., 113 lks. dist. marked $\frac{1}{4}$ S 11 B T

Subdivision of T.36 N., R.8 W.

Chains

Desc.
41.73 Draw, course N.
45.00 Spur, slopes N.
47.35 Draw, course N.
55.91 Draw, course NW. Asc. 80 ft.
67.10 Spur, slopes N. Desc. 100 ft. over NW. slope.
80.14 The cor. of secs. 2, 3, 10 and 11.

Land; rolling.
Soil; rocky, 3rd. and 4th. rates.
Timber; cedar and pinyon.
Undergrowth; sagebrush.

N.0°1'W., bet. secs. 2 and 3.
Over rolling land, through scattering timber and dense undergrowth.

.60 Draw, course NE. Asc.
3.50 Point of spur, slopes NE.
Desc. NW. slope.
12.62 Wash, 16 lks. wide, course NE.
17.40 Road, bears NE. and SW. Leave dense sagebrush.
33.50 Asc. over S. slope.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

S 3 | S 2

1924

From which,
A pinyon, 8 ins. diam., bears N.45 $\frac{1}{4}$ °E., 405 lks. dist., marked $\frac{1}{4}$ S 2 B T
A cedar, 12 ins. diam., bears S.25°W., 440 lks. dist., marked $\frac{1}{4}$ S 3 B T

79.50 Asc. S. slope.
Intersect the 9th. Standard Parallel North, 14.64 chs. East of the S.C. of secs. 34 and 35, which is an iron post, 3 ins. diam., 12 ins. above ground, properly marked, firmly set and witnessed by a mound of stone N. of cor.
At point of intersection, set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground for closing cor. of secs. 2 and 3, marked on brass cap

T37N R8W

S 35

S 3 | S 2

T36N R8W

C C

1924

From which,
A cedar, 12 ins. diam., bears S.11 $\frac{1}{2}$ °E., 82 lks. dist., marked T 36 N R 8 W S 2 C C B T
A cedar, 12 ins. diam., bears S.25°W., 440 lks. dist., marked T 36 N R 8 W S 3 C C B T

Land; rolling.
Soil; rocky, 2nd. and 3rd. rates.
Timber; cedar and pinyon.
Undergrowth; sagebrush.

Subdivision of T 36 N., R. 8 W.

Chains

The cor. of secs. 3, 4, 33 and 34 on S. bdy. of Tp., is an iron post, 2 ins. diam., 12 ins. above ground, firmly set, properly marked and witnessed by four bearing trees, one in each sec. NE., SE., SW. and NW. of cor. all properly marked.

Thence

N.0°2'W., bet. secs. 33 and 34.

Over rolling land, through heavy timber and dense undergrowth.

Desc. gentle N. slope.

Wash, 8 lks. wide, course E.

Desc. 100 ft. over gradual NE. slope.

Draw, course NE.

Set an iron post, 3 ft. long, 1 in. diam., 4 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap

5.08
15.00
39.14
40.00

S 33 | S 34

1924

From which,

A cedar, 14 ins. diam., bears N.37 $\frac{1}{2}$ °E., 63 lks. dist., marked $\frac{1}{4}$ S 34 B T

A cedar, 8 ins. diam., bears S.77 $\frac{1}{2}$ °W., 56 lks. dist., marked $\frac{1}{4}$ S 33 B T

Desc. 200 ft. over NE. slope to cor.

Wash, 10 lks. wide, course NE.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground for cor. of secs. 27, 28, 33 and 34, marked on brass cap

65.78
80.00

T36N R8W

S 28 | S 27

S 33 | S 34

1924

From which,

A cedar, 6 ins. diam., bears N.52°E., 42 lks. dist., marked T 36 N R 8 W S 27 B T

A cedar, 6 ins. diam., bears S.35 $\frac{1}{2}$ °E., 26 lks. dist., marked T 36 N R 8 W S 34 B T

A cedar, 6 ins. diam., bears S.61 $\frac{3}{4}$ °W., 28 lks. dist., marked T 36 N R 8 W S 33 B T

A cedar, 8 ins. diam., bears N.62 $\frac{1}{2}$ °W., 39 lks. dist., marked T 36 N R 8 W S 28 B T

Land; rolling.

Soil; rocky, 3rd. and 4th. rates.

Timber; cedar and pinyon.

Undergrowth; sagebrush, juniper and oak.

N.89°57'E., on a random line bet. secs. 27 and 34.

Set temp. $\frac{1}{4}$ sec. cor.

Intersect the cor. of secs. 26, 27, 34 and 35.

40.00
80.06

Thence

S.89°57'W., on a true line bet. secs. 27 and 34.

Over rolling land, through heavy timber and dense undergrowth.

Road, bears N. and S.

Desc. 40 ft. over SW. slope.

Wash, 18 lks. wide, course NW.

Asc. 70 ft. over NE. slope.

Spur, slopes NE. Desc.

Wash, 16 lks. wide, course NE.

Asc. 58 ft. to

Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bed rock, supported in a mound of stone

4.89
10.00
16.88
31.05
34.15
40.03

Subdivision of T.36 N., R.8 W.

Chains

for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ S 27
S 34
1924

From which,

- A pinyon, 12 ins. diam., bears N.14 $\frac{1}{4}$ °E., 34 lks. dist., marked $\frac{1}{4}$ S 27 B T
- A pinyon, 8 ins. diam., bears S.52 $\frac{1}{4}$ °E., 104 lks. dist., marked $\frac{1}{4}$ S 34 B T

60.00
67.04
80.06

Asc. 100 ft. over NE. slope.
Top of ascent.
Wash, 8 lks. wide, course NE.
Asc. 94 ft. over E. slope.
The cor. of secs. 27, 28, 33 and 34.

Land; rolling.
Soil; rocky, 3rd. and 4th. rates.
Timber; cedar and pinyon.
Undergrowth; sagebrush.

N.0°2'W., bet. secs. 27 and 28.
Over rolling land, through heavy timber and dense undergrowth.

40.00

Desc. 160 ft. over NE. slope.
Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground for bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$
S 28 | S 27
1924

From which,

- A cedar, 20 ins. diam., bears S.60°E., 84 lks. dist. marked $\frac{1}{4}$ S 27 B T
- A cedar, 14 ins. diam., bears N.11 $\frac{1}{4}$ °W., 20 lks. dist. marked $\frac{1}{4}$ S 28 B T

61.26
67.00
76.50
80.00

Desc. 160 ft. over N. slope.
Wash, 14 lks. wide, course NE. Asc.
Desc. 68 ft. to
Wash, 20 lks. wide, course E. Asc.
Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground for cor. of secs. 21, 22, 27 and 28, marked on brass cap

T36N R8W
S 21 | S 22
S 28 | S 27
1924

From which,

- A cedar, 6 ins. diam., bears N.47 $\frac{1}{4}$ °E., 97 lks. dist. marked T 36 N R 8 W S 22 B T
- A cedar, 20 ins. diam., bears S.30 $\frac{1}{2}$ °E., 73 lks. dist. marked T 36 N R 8 W S 27 B T
- A cedar, 6 ins. diam., bears S.33 $\frac{3}{4}$ °W., 144 lks. dist., marked T 36 N R 8 W S 28 B T
- A pinyon, 6 ins. diam., bears N.80 $\frac{3}{4}$ °W., 21 lks. dist., marked T 36 N R 8 W S 21 B T

Land; rolling.
Soil; rocky, 3rd. and 4th. rates.
Timber; cedar and pinyon.
Undergrowth; sagebrush.

Subdivision of T.36 N., R.8 W.

Chains
40.00
79.92

N.89°57'E., on a random line bet. secs. 22 and 27.
Set temp. $\frac{1}{4}$ sec. cor.
Intersect the cor. of secs. 22, 23, 26 and 27,

Thence
S.89°57'W., on a true line bet. secs. 22 and 27.
Over rolling land, through scattering timber and undergrowth.

10.20
20.00
32.20
38.66
39.96

Road, bears SE. and NW.
Wash, course NW. asc.
Spur, slopes N. Desc.
Wash, course N.
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

S 22
S 27
1924

From which,

- A cedar, 12 ins. diam., bears N.51 $\frac{1}{2}$ °E., 200 lks. dist., marked $\frac{1}{4}$ S 22 B T
- A cedar, 20 ins. diam., bears S.57°E., 125 lks. dist., marked $\frac{1}{4}$ S 27 B T

74.30
79.92

Wash, course, NE.
The cor. of secs. 21, 22, 27 and 28.

Land; rolling.
Soil; rocky, 3rd. rate.
Timber; cedar and pinyon.
Undergrowth; sagebrush.

N.0°2'W., bet. secs. 21 and 22.
Over rolling land, through scattering timber and dense undergrowth.

15.00
25.00
27.82
40.00

Desc. N. slope.
Enter heavy timber, bears E. and W.
Wash, 6 lks. wide, course NE.
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$
S 21 | S 22
1924

From which,

- A cedar, 6 ins. diam., bears N.37°W., 76 lks. dist. marked $\frac{1}{4}$ S 21 B T
- A cedar, 6 ins. diam., bears N.75 $\frac{1}{2}$ °E., 104 lks. dist., marked $\frac{1}{4}$ S 22 B T

49.55
60.00
72.48
80.00

Desc. N. slope.
Draw, course NE.
Spur, slopes NE. Desc.
Wash, 12 lks. wide, course NE.
Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground for cor. of secs. 15, 16, 21 and 22, marked on brass cap

T36N R8W
S 16 | S 15
S 21 | S 22
1924

From which,

- A cedar, 8 ins. diam., bears N.67 $\frac{1}{4}$ °E., 212 lks. dist. marked T 36 N R 8 W S 15 B T
- A cedar, 16 ins. diam., bears S.85°E., 22 lks. dist. marked T 36 N R 8 W S 22 B T
- A cedar, 18 ins. diam., bears S.89°W., 369 lks. dist. marked T 36 N R 8 W S 21 B T

Subdivision of T.36 N., R.8 W.

Chains

A cedar, 6 ins. diam., bears N.86 $\frac{1}{2}$ °W., 323 lks. dist.
marked T 36 N R 8 W S 16 B T

Land; rolling.
Soil; rocky, 3rd. and 4th. rates.
Timber; cedar and pinyon.
Undergrowth; sagebrush.

40.00
79.90

N.89°57'E., on a random line bet. secs. 15 and 22.
Set temp. $\frac{1}{4}$ sec. cor.
Fall 14 lks. S. of the cor. of secs. 14, 15, 22 and 23.

Thence
S.89°51'W., on a true line bet. secs. 15 and 22.
Over rolling land, through dense sagebrush.

37.35
39.50
39.95

Road, bears SE. and NW.
Wash, 14 lks. wide, course NW.
Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in
the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ S 15
S 22
1924

Raise a mound of stone, 4 ft. base, 3 $\frac{1}{2}$ ft. high N. of
cor.

51.05
65.00
70.56
79.90

Wash, 8 lks. wide, course N.
Enter scattering timber, bears SE. and NW.
Wash, 12 lks. wide, course NE.
The cor. of secs. 15, 16, 21 and 22.

Land; rolling.
Soil; rocky, 3rd. and 4th. rates.
Timber; cedar.
Undergrowth; sagebrush.

40.00

N.0°2'W., bet. secs. 15 and 16.
Over rolling land, through scattering timber and dense
undergrowth.
Desc. gentle W. slope.

Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in
the ground to bed rock, supported in a mound of stone,
for $\frac{1}{4}$ sec. cor. marked on brass cap

S 16 | S 15
1924

From which,
A cedar, 8 ins. diam., bears S.56°E., 184 lks. dist.
marked $\frac{1}{4}$ S 15 B T
A cedar, 18 ins. diam., bears N.58 $\frac{1}{2}$ °W., 211 lks.
dist., marked $\frac{1}{4}$ S 16 B T

50.00
67.60
80.00

Desc. 110 ft. over NW. slope.
Wash, 14 lks. wide, course NE.
Asc.
Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in
the ground for cor. of secs. 9, 10, 15 and 16, marked
on brass cap marked

T36N R8W
S 9 | S 10
S 16 | S 15
1924

Subdivision of T.36 N., R.8 W.

Chains

From which,
 A cedar, 6 ins. diam., bears N.6°E., 514 lks. dist.
 marked T 36 N R 8 W S 10 B T
 A cedar, 20 ins. diam., bears S.52 3/4°E., 211 lks.
 marked T 36 N R 8 W S 15 B T
 A cedar, 14 ins. diam., bears S.81 1/4°W., 510 lks.
 dist., marked T 36 N R 8 W S 16 B T
 A cedar, 16 ins. diam., bears N.11°W., 95 lks. dist.
 marked T 36 N R 8 W S 9 B T


Land; rolling.
 Soil; rocky, 3rd. and 4th. rate.
 Timber; cedar and pinyon.
 Undergrowth; sagebrush.

40.00 N.89°51'E., on a random line bet. secs. 10 and 15.
 Set temp. 1/4 sec. cor.
 79.90 Fall 5 lks. N. of the cor. of secs. 10, 11, 14 and 15.

Thence
 S.89°53'W., on a true line bet. secs. 10 and 15.
 Over rolling land, through scattering timber and dense
 undergrowth.

7.74 Road, bears SE. and NW.

39.95 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in
 the ground, for 1/4 sec. cor. marked on brass cap




Raise a mound of stone, 4 ft. base, 3 1/2 ft. high N. of
 cor.

45.60 Road, bears S. and NW.
 63.69 Wash, 14 lks. wide, course N.
 64.94 Wash, 12 lks. wide, course NE.
 79.90 The cor. of secs. 9, 10, 15 and 16.

Land; rolling.
 Soil; rocky, 3rd. and 4th. rates.
 Timber; cedar and pinyon.
 Undergrowth; sagebrush.

N.0°2'W., bet. secs. 9 and 10.
 Over rolling land, through scattering timber and dense
 undergrowth.

17.84 Desc. gentle NW. slope.
 18.35 Wash, 14 lks. wide, course NE.
 39.30 Road, bears NE. and SW.
 40.00 Spur, slopes E.
 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in
 the ground to bed rock, supported in a mound of stone,
 for 1/4 sec. cor. marked on brass cap



From which,
 A cedar, 10 ins. diam., bears N.60 1/2°E., 295 lks. dist.
 marked 1/4 S 10 B T
 A cedar, 14 ins. diam., bears S.87 1/2°W., 71 lks. dist.
 marked 1/4 S 9 B T

45.00 Wash, 20 lks. wide, course NE.
 53.25 Road, bears E. and W.

Subdivision of T.36 N., R.8 W.

Chains

- 54.28 Fence cor. from which fences, bear SE. and SW.
 55.00 Granary, bears W. about 3 chs. dist. Shed, bears E. 1 ch.
 56.22 Fence, bears SE. and SW.
 58.45 Draw, course E.
 60.00 Reservoir, bears E. about 15 chs.
 65.00 Spur, slopes E. Desc.
 72.20 Wash, 16 lks. wide, course E.
 Asc. 47 ft. over S. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to bed rock, supported in a mound of stone, for cor. of secs. 3, 4, 9 and 10, marked on brass cap

T36N R8W			
S 4		S 3	
S 9		S 10	
1924			

From which,

- A cedar, 20 ins. diam., bears N.42 $\frac{1}{2}$ °E., 255 lks. dist. marked T 36 N R 8 W S 3 B T
- A cedar, 14 ins. diam., bears S.30 $\frac{1}{4}$ °E., 97 lks. dist. marked T 36 N R 8 W S 10 B T
- A cedar, 20 ins. diam., bears S.65 $\frac{1}{2}$ °W., 121 lks. dist. marked T 36 N R 8 W S 9 B T
- A cedar, 20 ins. diam., bears N.41 3/4°W., 556 lks. dist., marked T 36 N R 8 W S 4 B T

Land; rolling.

Soil; rocky, 3rd. and 4th. rate.

Timber; cedar and pinyon.

Undergrowth; sagebrush.

- 40.00 N.89°53'E., on a random line bet. secs. 3 and 10.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.84 Fall 9 lks. N. of the cor. of secs. 2, 3, 10 and 11.

Thence

S.89°57'W., on a true line bet. secs. 3 and 10.
 Over rolling land, through scattering timber and undergrowth.

- 18.90 Asc. 100 ft. over NE. slope.
 Point of spur, slopes NE.
 27.94 Wash, course NE. Asc.
 31.05 Road, bears NE. and SW.
 39.92 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

S 3
S 10
1924

From which,

- A cedar, 6 ins. diam., bears N.64 $\frac{1}{2}$ °W., 159 lks. dist. marked $\frac{1}{4}$ S 3 B T
- A cedar, 4 ins. diam., bears S.10 3/4°E., 186 lks. dist., marked $\frac{1}{4}$ S 10 B T

- 79.84 Over SE. slope.
 The cor. of secs. 3, 4, 9 and 10.

Land; rolling.

Soil; rocky, 4th. rate.

Timber; cedar and pinyon.

Undergrowth; sagebrush.


Subdivision of T.36 N., R.8 W.

Chains

N.0°2'W., bet. secs. 3 and 4.
Over rolling land, through scattering timber and undergrowth.

7.39
36.27
40.00

Road, bears NE. and SW.
Road, bears NE. and SW.
Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap




1924

From which,
A cedar, 30 ins. diam., bears S.74 $\frac{1}{4}$ °E., 538 lks. dist., marked $\frac{1}{4}$ S 3 B T
A cedar, 10 ins. diam., bears N.67°W., 340 lks. dist., marked $\frac{1}{4}$ S 4 B T

49.99
72.29
79.49

Asc. gentle SE. slope.
Road, bears SE. and N.
Road, bears S. and NW.
Intersect the 9th. Standard Parallel North, 14.84 chs. East of the s.c. of secs. 33 and 34, which is an iron post, 3 ins. diam., 12 ins. above ground, firmly set properly marked and witnessed by a mound of stone, N. of cor.
At point of intersection, set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the ground to bed rock, in a mound of stone, for closing cor. of secs. 3 and 4, marked on brass cap



From which,
A cedar, 12 ins. diam., bears S.15 $\frac{1}{4}$ °E., 219 lks. dist. marked T 36 N R 8 W S 3 C C B T
A cedar, 6 ins. diam., bears S.39 3/4°W., 169 lks. dist., marked T 36 N R 8 W S 4 C C B T


Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar and pinyon.
Undergrowth; sagebrush.

The cor. of secs. 4, 5, 32 and 33, on S. bdy. of Tp., is an iron post, 2 ins. diam., 10 ins. above ground, firmly set, properly marked and witnessed by four bearing trees, one in each sec. NE., SE., SW. and NW. of cor. all properly marked.

Thence
N.0°3'W., bet. secs. 32 and 33.
Over rolling land, through heavy timber and scattering undergrowth.

40.00

Desc. 185 ft. over NW. slope.
Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap



1924

From which,
A cedar, 6 ins. diam., bears N.46 $\frac{1}{4}$ °E., 63 lks. dist.

Subdivision of T.36 N., R.8 W.

Chains

marked $\frac{1}{4}$ S 33 B T
A pinyon, 8 ins. diam., bears N.80 $\frac{1}{2}$ °W., 27 lks. dist.
marked $\frac{1}{4}$ S 32 B T

80.00

Desc. 228 ft. over NW. slope.
Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground for cor. of secs. 28, 29, 32 and 33, marked on brass cap

T36N R8W
S 29 | S 28
S 32 | S 33
1924

From which,

- A cedar, 12 ins. diam., bears N.53 $\frac{1}{2}$ °E., 44 lks. dist. marked T 36 N R 8 W S 28 B T
- A cedar, 14 ins. diam., bears S.29°E., 31 lks. dist. marked T 36 N R 8 W S 33 B T
- A cedar, 12 ins. diam., bears S.39 $\frac{1}{2}$ °W., 40 lks. dist. marked T 36 N R 8 W S 32 B T
- A cedar, 8 ins. diam., bears N.65 $\frac{1}{4}$ °W., 30 lks. dist. marked T 36 N R 8 W S 29 B T

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar and pinyon.
Undergrowth; sagebrush.

40.00

N.89°57'E., on a random line bet. secs. 28 and 33.
Set temp. $\frac{1}{4}$ sec. cor.

80.00

Fall 18 lks. S. of the cor. of secs. 27, 28, 33 and 34.

Thence

S.89°49'W., on a true line bet. secs. 28 and 33.
Over rolling land, through heavy timber and dense undergrowth.

8.80

Asc. 27 ft. over NE. slope.

16.06

Spur, slopes N. Desc. 36 ft. over W. slope.

Wash, 10 lks. wide, course N.

Asc. gentle $\frac{1}{4}$ slope.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ S 28
S 33
1924

From which,

- A cedar, 16 ins. diam., bears N.21 $\frac{1}{4}$ °W., 90 lks. dist. marked $\frac{1}{4}$ S 28 B T
- A cedar, 8 ins. diam., bears S.6 $\frac{1}{2}$ °W., 16 lks. dist. marked $\frac{1}{4}$ S 33 B T

43.26

Wash, 6 lks. wide, course N.

58.26

Draw, course NE.

80.00

The cor. of secs. 28, 29, 32 and 33.

Land; rolling.
Soil; rocky, 3rd. and 4th. rates.
Timber; cedar and pinyon.
Undergrowth; sagebrush.

40.00

N.0°3'W., bet. secs. 28 and 29.
Over rolling land, through heavy timber and scattering undergrowth.
Desc. gentle NW. slope.
Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap

Subdivision of T.36 N., R.8 W.

Chains

$\frac{1}{4}$
 S 29 | S 28

1924

From which,

- A pinyon, 6 ins. diam., bears N.68 $\frac{1}{4}$ °E., 38 lks. dist.
marked $\frac{1}{4}$ S 28 B T
- A cedar, 8 ins. diam., bears S.79 $\frac{1}{4}$ °W., 66 lks. dist.
marked $\frac{1}{4}$ S 29 B T

Continue desc, of NW. slope.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to bed rock, supported in a mound of stone, for cor. of secs. 20, 21, 28 and 29, marked on brass cap

T36N R8W
 S 20 | S 21
~~S 29 | S 28~~
 1924

From which,

- A cedar, 6 ins. diam., bears N.65°E., 36 lks. dist.
marked T 36 N R 8 W S 21 B T
- A cedar, 16 ins. diam., bears S.58°E., 76 lks. dist.
marked T 36 N R 8 W S 28 B T
- A cedar, 16 ins. diam., bears S.30°W., 278 lks. dist.
marked T 36 N R 8 W S 29 B T
- A cedar, 10 ins. diam., bears N.38°W., 203 lks. dist.
marked T 36 N R 8 W S 20 B T

Land; rolling.

Soil; rocky, 4th. rate.

Timber; cedar and pinyon.

Undergrowth; sagebrush.

40.00

N.89°49'E., on a random line bet. secs. 21 and 28.
Set temp. $\frac{1}{4}$ sec. cor.

80.04

Run 7 lks. S. of the cor. of secs. 21, 22, 27 and 28.

Thence

S.89°46'W., on a true line bet. secs. 21 and 28.

Over rolling land, through scattering timber and undergrowth.

Asc. gentle NE. slope.

15.00

Spur, slopes N. Desc.

25.00

Wash, course N.

40.02

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ S 21
~~S 28~~
 1924

From which,

- A pinyon, 5 ins. diam., bears N.42 $\frac{1}{4}$ °W., 184 lks. dist., marked $\frac{1}{4}$ S 21 B T
- A cedar, 8 ins. diam., bears S.18 3/4°E., 139 lks. dist., marked $\frac{1}{4}$ S 28 B T

Asc. NE. slope.

60.00

Spur, slopes N. Desc.

73.06

Wash, course N. Asc.

80.04

The cor. of secs. 20, 21, 28 and 29.

Land; rolling.

Soil; rocky, 4th. rate.

Timber; cedar and pinyon.

Undergrowth; sagebrush.

Subdivision of T.36 N., R.8 W.

Chains

N.0°3'W., bet. secs. 20 and 21.
Over rolling land, through scattering timber and undergrowth.

Desc. gentle N. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap

S 20 | S 21

1924

From which,

A cedar, 6 ins. diam., bears S.29 $\frac{1}{2}$ °E., 311 lks. dist. marked $\frac{1}{4}$ S 21 B T

A cedar, 6 ins. diam., bears N.66 $\frac{1}{2}$ °W., 170 lks. dist. marked $\frac{1}{4}$ S 20 B T

48.56
80.00

Wash, course NE.

Set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the ground to bed rock, supported in a mound of stone, for cor. of secs. 16, 17, 20 and 21, marked on brass cap

T36N, R8W

S 17 | S 16

S 20 | S 21

1924

From which,

A pinyon, 8 ins. diam., bears N.38°E., 66 lks. dist. marked T 36 N R 8 W S 16 B T

A cedar, 12 ins. diam., bears S.59 $\frac{3}{4}$ °E., 174 lks. dist., marked T 36 N R 8 W S 21 B T

A cedar, 7 ins. diam., bears S.55°W., 92 lks. dist. marked T 36 N R 8 W S 20 B T

A cedar, 12 ins. diam., bears N.24°W., 151 lks. dist. marked T 36 N R 8 W S 17 B T

Land; rolling.

Soil; rocky, 4th. rate.

Timber; cedar and pinyon.

Undergrowth; sagebrush.

40.00
80.00

N.89°46'E., on a random line bet. secs. 16 and 21.

Set temp. $\frac{1}{4}$ sec. cor.

Fall 10 lks. S. of the cor. of secs. 15, 16, 21 and 22.

Thence

S.89°42'W., on a true line bet. secs. 16 and 21.

Over rolling land, through scattering timber and undergrowth.

33.24
40.00

Draw, course N. asc. 40 ft. to

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ S 16

S 21

1924

From which,

A cedar, 6 ins. diam., bears N.13 $\frac{1}{2}$ °W., 137 lks. dist., marked $\frac{1}{4}$ S 16 B T

A cedar, 5 ins. diam., bears S.19 $\frac{3}{4}$ °W., 83 lks. dist., marked $\frac{1}{4}$ S 21 B T

Asc. 40-ft. over E. slope.

45.00

Spur, slopes N.

Desc. gentle NW. slope.

75.00

Wash, course NE.

80.00

The cor. of secs. 16, 17, 20 and 21.


Subdivision of T. 36 N., R. 8 W.

Chains

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar and pinyon.
Undergrowth; sagebrush.

8.96
15.93
40.00


N. 0° 3' W., bet. secs. 16 and 17.
Over rolling land, through scattering timber and undergrowth.
Desc. 50 ft. over NE. slope.
Draw, course NE. Asc. 70 ft.
Spur, slopes NE. Desc.
Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap



From which,
A cedar, 6 ins. diam., bears S. 39 $\frac{1}{4}$ ° E., 152 lks. dist. marked $\frac{1}{4}$ S 16 B T
A cedar, 7 ins. diam., bears S. 59 $\frac{3}{4}$ ° W., 175 lks. dist., marked $\frac{1}{4}$ S 17 B T

54.96
65.00
71.95
72.36
80.00

Desc. 75 ft. to
Draw, course NE. Asc.
Desc.
Wash, course NE.
Road, bears NE. and SW.
Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground for cor. of secs. 8, 9, 16 and 17, marked on brass cap



From which,
A cedar, 26 ins. diam., bears N. 61 $\frac{3}{4}$ ° E., 247 lks. marked T 36 N R 8 W S 8 B T
A cedar, 30 ins. diam., bears S. 89° E., 267 lks. dist. marked T 36 N R 8 W S 16 B T
A cedar, 16 ins. diam., bears S. 71° W., 311 lks. dist. marked T 36 N R 8 W S 17 B T
A cedar, 16 ins. diam., bears N. 79 $\frac{3}{4}$ ° W., 332 lks. dist., marked T 36 N R 8 W S 8 B T

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar and pinyon.
Undergrowth; sagebrush.

40.00
80.08

N. 89° 42' E., on a random line bet. secs. 9 and 16.
Set temp. $\frac{1}{4}$ sec. cor.
Fall 2 lks. S. of the cor. of secs. 9, 10, 15 and 16.

Thence
S. 89° 41' W., on a true line bet. secs. 9 and 16.
Over rolling land, through scattering timber and dense undergrowth.

10.05
22.84
33.90
40.04

Wash, 8 lks. wide, course NW.
Draw, course NE. Asc. 40 ft.
Top of ascent.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

Subdivision of T.36 N., R.8 W.

Chains

$\frac{1}{4}$ S 9
 $\frac{1}{4}$ S 16
 1924

From which,

A cedar, 18 ins. diam., bears S.55 $\frac{1}{2}$ °E., 215 lks. dist.
 marked $\frac{1}{4}$ S 16 B T

A cedar, 20 ins. diam., bears S.51 $\frac{1}{2}$ °W., 255 lks. dist.
 marked $\frac{1}{4}$ S 16 B T

No bearing tree available in sec. 9.

59.24
 63.20
 80.08

Wash, 8 lks. wide, course NE.
 Road, bears NE. and SW.
 The cor. of secs. 8, 9, 16 and 17.

Land; rolling.
 Soil; rocky, 3rd. and 4th. rates.
 Timber; cedar and pinyon.
 Undergrowth; sagebrush.

N.0°3'W., bet. secs. 8 and 9.
 Over rolling land, through scattering timber and undergrowth.

21.90

Asc. 100 ft. over SE. slope.

Spur, slopes NE.

Desc. NW. slope.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$
 S 8 | S 9
 1924

From which,

A cedar, 20 ins. diam., bears N.71°E., 320 lks. dist., marked $\frac{1}{4}$ S 9 B T

A cedar, 16 ins. diam., bears N.85 $\frac{3}{4}$ °W., 154 lks. dist., marked $\frac{1}{4}$ S 8 B T

54.28
 57.58
 63.58

Draw, course NE.
 Road, bears NE. and SW.
 Wash, course NE.
 Ascend.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground for cor. of secs. 4, 5, 8 and 9, marked on brass cap

T36N | R8W
 S 5 | S 4
 S 8 | S 9
 1924

From which,

A cedar, 10 ins. diam., bears N.35 $\frac{1}{4}$ °E., 80 lks. dist. marked T 36 N R 8 W S 4 B T

A cedar, 16 ins. diam., bears S.4 $\frac{1}{2}$ °E., 372 lks. dist. marked T 36 N R 8 W S 9 B T

A cedar, 20 ins. diam., bears S.86 $\frac{3}{4}$ °W., 170 lks. dist., marked T 36 N R 8 W S 8 B T

A cedar, 16 ins. diam., bears N.64 $\frac{3}{4}$ °W., 278 lks. dist., marked T 36 N R 8 W S 5 B T

Land; rolling.
 Soil; rocky, 4th. rate.
 Timber; cedar and pinyon.
 Undergrowth; sagebrush.

Subdivision of T.36 N., R.8 W.

Chains N.89°41'E., on a random line bet. secs. 4 and 9.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.10 Fall 13 lks. N. of the cor. of secs. 3, 4, 9 and 10.

Thence
 S.89°47'W., on a true line bet. secs. 4 and 9.
 Over rolling land, through scattering timber and under-
 growth.
 Desc. 33 ft. over SE. slope.
 3.47 Road, bears SE. and NW.
 Asc. 60 ft. to
 17.00 Desc. 40 ft. to
 27.50 Road, bears NE. and SW. in draw, course SE.
 40.05 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in
 the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

S 4
 S 9
 1924

From which,
 A cedar, 12 ins. diam., bears N.46 $\frac{1}{4}$ °W., 368 lks. dist.
 marked $\frac{1}{4}$ S 4 B T
 A cedar, 6 ins. diam., bears S.51 $\frac{3}{4}$ °W., 299 lks.
 dist., marked $\frac{1}{4}$ S 9 B T

80.10 Asc. 90 ft. over E. slope to
 The cor. of secs. 4, 5, 8 and 9.

Land; rolling.
 Soil; rocky, 4th. rate.
 Timber; cedar and pinyon.
 Undergrowth; sagebrush.

N.0°3'W., bet. secs. 4 and 5.
 Over rolling land, through scattering timber and under-
 growth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in
 the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$
 S 5 | S 4
 1924

From which,
 A cedar, 16 ins. diam., bears N.25 $\frac{1}{2}$ °E., 162 lks. dist.
 marked $\frac{1}{4}$ S 4 B T
 A cedar, 20 ins. diam., bears N.29°W., 86 lks. dist.
 marked $\frac{1}{4}$ S 5 B T

79.72 Intersect the 9th. Standard Parallel North, 14.72 chs.
 E. of the S.C. of secs. 32 and 33, which is an iron
 post, 3 ins. diam., 12 ins. above ground, firmly set,
 properly marked, and witnessed by two properly marked
 bearing trees, one each NE. and NW. of cor.
 At point of intersection, set an iron post, 3 ft. long,
 2 ins. diam., 30 ins. in the ground for closing cor.
 of secs. 4 and 5, marked on brass cap

T37N R8W
 S 33
 S 5 | S 4
 T36N R8W
 CC
 1924

From which,
 A cedar, 12 ins. diam., bears S.17°E., 154 lks. dist.
 marked T 36 N R 8 W S 4 C B T
 A cedar, 12 ins. diam., bears S.21°W., 170 lks. dist.
 marked T 36 N R 8 W S 5 C C B T

Subdivision of T.36 N., R.8 W.


Chains

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar and pinyon.
Undergrowth; sagebrush.

The cor. of secs. 5, 6, 31 and 32 on S. bdy. of Tp., is an iron post, 2 ins. diam., 20 ins. above ground, firmly set, properly marked, and witnessed by a four properly marked bearing trees, one in each sec. NE., SE., SW. and NW. of cor.


Thence
N.0°3'W., bet. secs. 31 and 32.
Over rolling land, through scattering timber and undergrowth.

3.60 Wash, course NW.
Along W. slope.
28.20 Desc. 50 ft. to
36.74 Wash, course NW.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bed rock, supported in a mound of stone, for 1/4 sec. cor. marked on brass cap



From which,
A cedar, 10 ins. diam., bears S. 87 1/2° E., 73 lks. dist. marked 1/4 S 32 B T
A cedar, 10 ins. diam., bears N. 88° W., 43 lks. dist. marked 1/4 S 31 B T

Asc. gentle SW. slope.
55.00 Spur, slopes NW. Desc. gentle W. slope.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground for cor. of secs. 29, 30, 31 and 32, marked on brass cap



From which,
A pinyon, 8 ins. diam., bears N. 1 3/4° E., 178 lks. dist., marked T 36 N R 8 W S 29 B T
A pinyon, 14 ins. diam., bears S. 23° E., 261 lks. dist., marked T 36 N R 8 W S 32 B T
A pinyon, 24 ins. diam., bears S. 86 1/4° W., 273 lks. dist., marked T 36 N R 8 W S 31 B T
A pinyon, 8 ins. diam., bears N. 24 1/2° W., 59 lks. dist., marked T 36 N R 8 W S 30 B T

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar and pinyon.
Undergrowth; sagebrush.

40.00 N. 89° 57' E., on a random line bet. secs. 29 and 32.
80.04 Set temp. 1/4 sec. cor.
Fall 7 lks. N. of the cor. of secs. 28, 29, 32 and 33.

Thence
West, on a true line bet. secs. 29 and 32.
Over rolling land, through heavy timber and scattering undergrowth;

Subdivision of T.36 N., R.8 W.

Chains

- 7.60 Draw, course NW.
 13.00 Spur, slopes NW.
 Desc. gentle NW. slope.
 40.02 Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap
- $\frac{1}{4}$ $\frac{S\ 29}{S\ 32}$
1924
- From which,
 A pinyon, 12 ins. diam., bears N.34 $\frac{1}{2}$ °W., 166 lks. dist., marked $\frac{1}{4}$ S 29 B T
 A pinyon, 5 ins. diam., bears S.11 $\frac{1}{2}$ °W., 38 lks. dist. marked $\frac{1}{4}$ S 32 B T
- 74.85 Desc. 178 ft. over W. slope.
 Draw, course NW.
 80.04 The cor. of secs. 29, 30, 31 and 32.

Land; rolling.
 Soil; rocky, 4th. rate.
 Timber; cedar and pinyon.
 Undergrowth; sagebrush.

- 40.00 S.89°57'W., on a random line bet. secs. 30 and 31.
 Set temp. $\frac{1}{4}$ sec. cor.
 77.93 Fall 7 lks. N. of the cor. of secs. 25, 30, 31 and 36, which is an iron post, 2 ins. diam., 16 ins. above ground, in a mound of stone, firmly set, properly marked and witnessed by four bearing trees, properly marked, one in each sec. NE., SE., SW. and NW. of cor.
- Thence
 N.89°54'E., on a true line bet. secs. 30 and 31.
 Over rolling land, through scattering timber and undergrowth.
- 37.93 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ $\frac{S\ 30}{S\ 31}$
1924

From which,
 A pinyon, 6 ins. diam., bears N.18 $\frac{3}{4}$ °W., 58 lks. marked $\frac{1}{4}$ S 30 B T
 A pinyon, 8 ins. diam., bears S.2 $\frac{1}{2}$ °W., 113 lks. dist. marked $\frac{1}{4}$ S 31 B T

- 46.33 Wash, course NE.
 48.33 Road, bears SE, and NW.
 77.93 The cor. of secs. 29, 30, 31 and 32.

Land; rolling.
 Soil; rocky, 4th. rate.
 Timber; cedar and pinyon.
 Undergrowth; sagebrush.

Subdivision of T.36 N., R.8 W.

Chains N.0°3'W., bet. secs. 29 and 30.
 Over rolling land, through scattering timber and undergrowth.
 Desc. gentle NW. slope.
 17.69 Wash, course NW.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$
 S 30 | S 29
 1924

From which,
 A pinyon, 12 ins. diam., bears N.80°E., 84 lks. dist. marked $\frac{1}{4}$ S 29 B T
 A pinyon, 12 ins. diam., bears S.14 $\frac{1}{2}$ °W., 34 lks. dist. marked $\frac{1}{4}$ S 30 B T

47.90 Wash, 4 ft. deep, 8 lks. wide, course NE.
 60.00 Wash, course NW.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground for cor. of secs. 19, 20, 29 and 30, marked on brass cap

T36N R8W
 S 19 | S 20
 S 30 | S 29
 1924

From which,
 A cedar, 12 ins. diam., bears N.44 $\frac{1}{2}$ °E., 433 lks. dist. marked T 36 N R 8 W S 20 B T
 A cedar, 5 ins. diam., bears S.43°E., 195 lks. dist. marked T 36 N R 8 W S 29 B T
 A cedar, 4 ins. diam., bears S.67 $\frac{1}{2}$ °W., 346 lks. dist. marked T 36 N R 8 W S 30 B T
 Land; marked T 36 N R 8 W S 19 B T
 Soil; cedar, 4 ins. diam., bears N.34 $\frac{1}{2}$ °W., 179 lks. dist. marked T 36 N R 8 W S 19 B T
 Land; rolling. Soil; rocky, 3rd. rate.
 Timber; cedar and pinyon. Undergrowth; sagebrush.

40.00 East, on a random line bet. secs. 20 and 29.
 80.00 Set temp. $\frac{1}{4}$ sec. cor.
 Fall 2 lks. S. of the cor. of secs. 20, 21, 28 and 29.

Thence
 S.89°59'W., on a true line bet. secs. 20 and 29.
 Over rolling land, through scattering timber and undergrowth.

10.06 Asc. gentle E. slope.
 Spur, slopes NW.
 Desc. W. slope.
 23.06 Wash, course NW.
 Asc. gradually.
 30.00 Spur, slopes NW.
 Desc. 73 ft. over NW. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 20
 S 29
 1924

From which,
 A cedar, 5 ins. diam., bears N.51°W., 28 lks. dist., marked $\frac{1}{4}$ S 20 B T
 A cedar, 7 ins. diam., bears S.50°E., 71 lks. dist. marked $\frac{1}{4}$ S 29 B T

50.00 Desc. 45 ft. to
 Draw, course NW.

Chains

53.30 Spur, slopes NW. Desc.
 59.15 Draw, course NE. Asc. 85 ft. over SE. slope.
 70.00 Spur, slopes NW. Desc. 45 ft. over NW. slope.
 80.00 The cor. of secs. 19, 20, 29 and 30.

Land; rolling.
 Soil; rocky, 4th. rate.
 Timber; cedar and pinyon.
 Undergrowth; sagebrush.

40.00
 77.81

S.89°54'W., on a random line bet. secs. 19 and 30.
 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect the cor. of secs. 19, 24, 24 and 30 on W. bdy.
 of Tp., which is an iron post, 2 ins. diam., with
 brass cap properly marked and set in a mound of stone,
 witnessed by four bearing trees one in each sec. NE.,
 SE., SW. and NW. of cor.

Thence

N.89°54'E., on a true line bet. secs. 19 and 30.
 Over rolling land, through scattering timber and under-
 growth.

12.85
 23.00
 37.81

Draw, course NE. Asc. 57 ft. over NW. slope.
 Along N. slope.
 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the
 ground to bed rock, supported in a mound of stone, for
 $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ S 19
 $\frac{1}{4}$ S 30
 1924

From which,

A cedar, 16 ins. diam., bears N.51°E., 115 lks. dist.
 marked $\frac{1}{4}$ S 19 B T
 A pinyon, 10 ins. diam., bears S.47 $\frac{1}{2}$ °W., 66 lks. dist.
 marked $\frac{1}{4}$ S 30 B T

67.50
 77.81

Draw, course NW. Road, bears N. and S.
 The cor. of secs. 19, 20, 29 and 30.

Land; rolling.
 Soil; rocky, 3rd. rate.
 Timber; cedar and pinyon.
 Undergrowth; sagebrush.

N.0°3'W., bet. secs. 19 and 20.
 Over rolling land, through scattering timber and under-
 growth.

17.00

Road, bears NE. and SW.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in
 the ground to bed rock, supported in a mound of stone
 for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$
 S 19 | S 20
 1924

From which,


A cedar, 5 ins. diam., bears N.87 $\frac{1}{2}$ °E., 217 lks.
 dist., marked $\frac{1}{4}$ S 20 B T
 A cedar, 14 ins. diam., bears N.50 $\frac{1}{2}$ °W., 88 lks.
 dist., marked $\frac{1}{4}$ S 19 B T

Desc. gentle NE. slope.

Subdivision of T.36 N., R.8 W.

Chains
80.00

Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to bed rock, with marked cross (+) stone alongside, in a mound of stone, for cor. of secs. 17, 18, 19 and 20, marked on brass cap



From which,
A cedar, 6 ins. diam., bears N.51 3/4°E. 596 lks. dist., marked T 36 N R 8 W S 17 B T
A cedar, 12 ins. diam., bears S.51 1/4°E., 317 lks. dist., marked T 36 N R 8 W S 20 B T
No other trees near.

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar and pinyon.
Undergrowth; sagebrush.


40.00
80.00

N.89°59'E., on a random line bet. secs. 17 and 20.
Set temp. 1/4 sec. cor.
Fall 5 lks. W. of the cor. of secs. 16, 17, 20 and 21.

Thence
N.89°59'W., on a true line bet. secs. 17 and 20.
Over rolling land, through scattering timber and undergrowth.

7.00
30.00
40.00

Desc. gentle W. slope.
Draw, course NW. Asc. gentle E. slope.
Spur, slopes NE. Desc. gentle W. slope.
Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground for 1/4 sec. cor. marked on brass cap



From which,
A cedar, 6 ins. diam., bears N.73°E., 199 lks. dist. marked 1/4 S 17 B T
A cedar, 6 ins. diam., bears S.87 3/4°E., 172 lks. dist., marked 1/4 S 20 B T

43.76
71.10
80.00

Draw, course NW.
Spur, slopes N. Road, bears N. and S.
The cor. of secs. 17, 18, 19 and 20.

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar and pinyon.
Undergrowth; sagebrush.

40.00
77.66


S.89°54'W., on a random line bet. secs. 18 and 19.
Set temp. 1/4 sec. cor.
Fall 2 lks. S. of the cor. of secs. 13, 18, 19 and 24 on W. bdy. of Tp., which is an iron post, 2 ins. diam., 20 ins. above ground, in a mound of stone, with brass cap properly marked and witnessed by a mound of stone W. of cor.

Thence
N.89°55'E., on a true line bet. secs. 18 and 19.
Over rolling land, through scattering timber and undergrowth.
Desc. 160 ft. over E. slope.

Chains

22.66
37.66

Draw, course NE.
Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bed rock, supported in a mound of stone for $\frac{1}{4}$ sec. cor. marked on brass cap



Raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high N. of cor.

39.20
47.12
47.91
77.66


Desc. 70 ft. over E. slope to Wash, course NW. and gentle W. slope. Road, bears SE. and NW. The cor. of secs. 17, 18, 19 and 20.

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar and pinyon.
Undergrowth; sagebrush.

N.0°3'W., bet. secs. 17 and 18.
Over rolling land, through scattering timber and undergrowth.

34.67
40.00


Desc. gentle NE. slope.
Draw, course NE.
Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



From which,
A cedar, 10 ins. diam., bears S.69 3/4°E., 274 lks. dist., marked $\frac{1}{4}$ S 17 B T
A cedar, 6 ins. diam., bears N.29 3/4°W., 170 lks. dist., marked $\frac{1}{4}$ S 18 B T

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground for cor. of secs. 7, 8, 17 and 18, marked on brass cap



From which,
A cedar, 20 ins. diam., bears N.14°E., 608 lks. dist. marked T 36 N R 8 W S 8 B T
A cedar, 16 ins. diam., bears S.2 1/4°E., 399 lks. dist. marked T 36 N R 8 W S 17 B T
A cedar, 12 ins. diam., bears S.31 1/4°W., 183 lks. dist. marked T 36 N R 8 W S 18 B T

Deposit a stone marked cross (+) at base of post.
Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar and pinyon.
Undergrowth; sagebrush.


Subdivision of T.36 N., R.8 W.

Chains	S.89°59'E., on a random line bet. secs. 8 and 17.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.98	Fall 5 lks. N. of the cor. of secs. 8, 9, 16 and 17.
	Thence
	N.89°57'W., on a true line bet. secs. 8 and 17.
	Over rolling land, through scattering timber and undergrowth.
	Asc. over SE. slope.
27.30	Top of ascent.
	Desc.
39.99	Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap
	$\frac{1}{4}$ $\frac{S\ 8}{S\ 17}$ 1924
	From which,
	A cedar, 14 ins. diam., bears N.7 $\frac{3}{4}$ °E., 78 lks. dist., marked $\frac{1}{4}$ S 8 B T
	A cedar, 12 ins. diam., bears S.13°E., 46 lks. dist. marked $\frac{1}{4}$ S 17 B T
79.98	The cor. of secs. 7, 8, 17 and 18.
	Land; rolling.
	Soil; rocky, 4th. rate,
	Timber; cedar and pinyon.
	Undergrowth; sagebrush.
	S.89°55'W., on a random line bet. secs. 7 and 18.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
77.62	Fall 2 lks. N. of the cor. of secs. 7, 12, 13 and 18, on W. bdy. of Tp., which is an iron post, 2 ins. diam., 16 ins. above ground, in a mound of stone, with brass cap properly marked and witnessed by a mound of stone W. of cor.
	Thence
	N.89°54'E., on a true line bet. secs. 7 and 18.
	Over rolling land, through scattering timber and undergrowth.
14.00	Draw, course NW.
16.00	Road, bears SE. and NW.
	Asc. 109 ft. over W. slope.
26.00	Spur, slopes NE.
37.62	Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap
	$\frac{1}{4}$ $\frac{S\ 7}{S\ 18}$ 1924
	From which,
	A cedar, 8 ins. diam., bears N.63 $\frac{1}{4}$ °W., 564 lks. dist. marked $\frac{1}{4}$ S 7 B T
	A cedar, 8 ins. diam., bears S.82°W., 229 lks. dist. marked $\frac{1}{4}$ S 18 B T
	Desc. gentle E. slope.
45.65	Draw, course NE. Asc. slightly.
52.00	Desc. gentle E. slope.
77.62	The cor. of secs. 7, 8, 17 and 18.
	Land; rolling.
	Soil; rocky, 4th. rate.
	Timber; cedar and pinyon.
	Undergrowth; sagebrush.

Chains

N. 0°3'W., bet. secs. 7 and 8.
Over rolling land, through scattering timber and undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for 1/4 sec. cor. marked on brass cap




From which,

A cedar, 16 ins. diam., bears S.32 3/4°E., 610 lks. dist., marked 1/4 S 8 B T

A cedar, 20 ins. diam., bears S.19 3/4°W., 725 lks. dist., marked 1/4 S 7 B T

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to bed rock, with marked cross (+) stone alongside, in a mound of stone, for cor. of secs. 5, 6, 7 and 8, marked on brass cap



From which,

A cedar, 16 ins. diam., bears N.45 1/2°E., 279 lks. dist., marked T 36 N R 8 W S 5 B T

A cedar, 14 ins. diam., bears S.53 3/4°E., 440 lks. dist., marked T 36 N R 8 W S 8 B T


Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar and piñon.
Undergrowth; sagebrush.

40.00 S.89°57'E., on a random line bet. secs. 5 and 8.
Set temp. 1/4 sec. cor.
80.02 Fall 12 lks. S. of the cor. of secs. 4, 5, 8 and 9.

Thence
S.89°58'W., on a true line bet. secs. 5 and 8.
Over rolling land, through scattering timber and undergrowth.

4.58 Desc. 32 ft. over W. slope to
Draw, course SE.
20.83 Asc. 70 ft. over E. slope.
Spur, slopes SE.
40.01 Desc. gentle W. slope.

40.01 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground for 1/4 sec. cor. marked on brass cap



From which,

A cedar, 12 ins. diam., bears S.82 3/4°W., 622 lks. dist., marked 1/4 S 8 B T

No other trees near.

67.00 Asc. gentle NE. slope.
Top of ascent: Desc. 90 ft. over W. slope.
80.02 The cor. of secs. 5, 6, 7 and 8.

Land; rolling. Soil; rocky, 4th. rate.
Timber; cedar and piñon.
Undergrowth; sagebrush.

Subdivision of T.36 N., R.8 W.

Chains
40.00
77.57

S.89°54'W., on a random line bet. secs. 6 and 7.
Set temp. $\frac{1}{4}$ sec. cor.
Fall 2 lks. W. of the cor. of secs. 1, 6, 7 and 12 on
W. bdy. of Tp., which is an iron post, 2 ins. diam.,
12 ins. above ground, firmly set, properly marked
and witnessed by a mound of stone W. of cor.

Thence
N.89°53'E., on a true line bet. secs. 6 and 7.
Over rolling land, through scattering timber and under-
growth.
Asc.

22.60
37.57

Spur, slopes SE..
Desc. 70 ft. over E. slope to
Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the
ground to bed rock, supported in a mound of stone, for
 $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ S 6
S 7
1924

From which,
A pinyon, 12 ins. diam., bears N.72 3/4°W., 234 lks.
dist., marked $\frac{1}{4}$ S 6 B T
A pinyon, 10 ins. diam., bears S.3°E., 177 lks. dist.
marked $\frac{1}{4}$ S 7 B T

49.52
50.50
62.20
77.57

Desc. 60 ft. over E. slope to
Road, bears NE. and SW.
Wash, 20 lks. wide, 10 ft. deep, course NE.
Wash, course NE. Asc. 46 ft. over W. slope.
The cor. of secs. 5, 6, 7 and 8.

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar and pinyon.
Undergrowth; sagebrush.

40.00

N.0°3'W., bet. secs. 5 and 6.
Over rolling land, through scattering timber and under-
growth.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in
the ground for $\frac{1}{4}$ sec. cor. marked on brass cap.

$\frac{1}{4}$
S 6 | S 5
1924

From which,
A cedar, 12 ins. diam., bears S.51 1/4°E., 221 lks. dist.
marked $\frac{1}{4}$ S 5 B T
A cedar, 8 ins. diam., bears N.10 1/4°W., 39 lks. dist.
marked $\frac{1}{4}$ S 6 B T

48.87
79.65

Draw, course NW.
Intersect the 9th. Standard Parallel North, 14.67 chs.
E. of the S.C. of secs. 31 and 32, T.37 N., R.8 W.,
which is an iron post, 3 ins. diam., 24 ins. above
ground, in a mound of stone, with brass cap properly
marked.
At point of intersection, set an iron post, 3 ft. long,
2 ins. diam., 18 ins. in the ground to bed rock, sup-
ported in a mound of stone, for closing cor. of secs.
5 and 6, marked on brass cap

T37N R8W
S 32
S 6 | S 5
T36N R8W
1924

Subdivision of T.36 N., R.8 W.

Chains Raise a mound of stone, 3½ ft. base; 2 ft. high S. of cor.
Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar and pinyon.
Undergrowth; sagebrush.

BOUNDARIES OF T.36 N.; R.8 W.

Latitudes, departures and closing errors.

Line designated.	True bearing.	Dist- ance.	Latitudes.		Departures.	
			N.	S.	E.	W.
S. bdy.	S.89°57'W.	477.89		.42		477.89
W. bdy.	North	480.00	480.00			
N. bdy.	East	477.77			477.77	
E. bdy.	South	479.01		479.01		
Convergency					.54	
Totals.			480.00	479.43	478.31	477.89
Error in latitude			479.43		477.89	
Error in departure					.42	

The continued satisfactory adjustment of the instruments throughout the survey of this township is indicated from field tests as given in Book "D".

GENERAL DESCRIPTION

The land throughout this township is mostly rolling and mountainous. The south part of the township is rough and mountainous and is thickly covered with cedar and pinyon timber while the northern part of the township is rolling with scattering cedar and pinyon timber. The land is rough and rocky from volcanic eruptions and unfit for cultivation. At the present time the land is used for grazing purposes. There are no known springs or running water within the township. There is a reservoir located in sec. 9.

10

4-680

FIELD ASSISTANTS.

To Charles E. Hunter, U.S. Transitman.

NAMES.	CAPACITY.
Walter Fitzgerald	First Chainman.
Pete Spurzen	Second Chainman.
Basil Porter	Flagman.
Amel Peterson	Cornerman.
Henry Crosby	Axman

CERTIFICATE OF UNITED STATES TRANSITMAN.

I, Charles E. Hunter, U.S. Transitman, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 122, Arizona bearing date of the 23rd day of April, 1923, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of The East Boundary and Subdivision lines of Township 36 North, Range 8 West of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes and by diagram on page 1 hereof as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 122, Arizona and in the specific manner described in the field notes; and that the foregoing are the original field notes of such survey.

Place: Phoenix, Arizona
 Date: October 28, 1925

Charles E. Hunter
 U.S. Transitman, Surveyor

~~APPROVAL~~
~~Office of the United States Surveyor General~~

~~The foregoing field notes of the survey of _____, 19____, executed by _____ under his special instructions dated _____, 19____, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.~~

~~_____ U. S. Surveyor General.~~

~~I certify that the foregoing transcript of the field notes of the above-described surveys in _____, has been correctly copied from the original notes on file in this office.~~

~~_____ U. S. Surveyor General.~~

4-680

FIELD ASSISTANTS.

To William E. Hester, U.S. Surveyor

NAMES.	CAPACITY.
Ed F. Stanley	First Chainman
Austin M. Frost	Second Chainman
Orvil Bastran	Flagman
Clyde Pectel	Cornerman.
Clifford Stone	Axman.

46

CERTIFICATE OF UNITED STATES SURVEYOR.

I, William E. Hiester, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 122, Arizona bearing date of the 23rd day of April, 1923, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of The East Boundary and Subdivision lines of Township 36 North, Range 8 West of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes ^{and by diagram on page 1 hereof} as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 122, Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Place: Phoenix Arizona
 Date: Oct 27, 1925

William E. Hiester
 U. S. Surveyor.

APPROVAL.

OFFICE OF THE UNITED STATES SUPERVISOR OF SURVEYS.

Denver, Colorado, March 8, 1926.

The foregoing field notes of the survey of The East Boundary and Subdivision lines of Township 36 North, Range 8 West of the Gila and Salt River Base and Meridian, in The State of Arizona, executed by William E. Hiester, U.S. Surveyor and Charles E. Hunter, U.S. Transitman

executed by Charles E. Hunter under the special instructions dated April 23, 1923 for Group 122, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Charles E. Hunter
 U. S. Supervisor of Surveys.

~~I certify that the foregoing transcript of the field notes of the above described surveys in _____, has been correctly copied from the original notes on file in this office.~~